



中国认可  
国际互认  
检测  
TESTING  
CNAS L2264

# EMC TEST REPORT

**Applicant** Shanghai SmartPeak Technology Co.,Ltd.  
**FCC ID** 2AJMSC6000  
**Brand** SMARTPEAK  
**Product** WCDMA Smart Handheld Terminal  
**Model** C6000  
**Report No.** RXA1606-0101EMC  
**Issue Date** September 13, 2016

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2015)/ ANSI C63.4 (2014)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Wei Liu*

*Guangchang Fan*

*Performed by: Wei Liu/ Manager*

*Approved by: Guangchang Fan/ Director*

**TA Technology (Shanghai) Co., Ltd.**

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report.....	4
1.2	Test facility.....	4
1.3	Testing Location.....	5
2	General Description of Equipment under Test.....	6
2.1	Client Information.....	6
2.2	General information.....	7
2.3	Applied Standards.....	8
3	Test Case Results.....	9
3.1	Radiated Emission.....	9
3.2	Conducted Emission.....	15
4	Main Test Equipment.....	18
ANNEX A:	The EUT Appearance and Test Configuration.....	19
A.1	EUT Appearance.....	19
A.2	Test Setup.....	23
A.3	Host Product.....	25



### Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	15.107, ANSI C63.4-2014	PASS
Test Date: July 21, 2016~ September 3, 2016			

# 1 Test Laboratory

## 1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of TA technology (shanghai) co., Ltd).The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by CNAS or any government agencies.

## 1.2 Test facility

### **CNAS (accreditation number: L2264)**

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

### **FCC (recognition number is 428261)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

### **IC (recognition number is 8510A)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

### **VCCI (recognition number is C-4595, T-2154, R-4113, G-766)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



### 1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2 General Description of Equipment under Test

### 2.1 Client Information

<b>Applicant</b>	Shanghai SmartPeak Technology Co.,Ltd.
<b>Applicant address</b>	Room 1,No.3 Building, NO.295, Qianqiao Road, Fengxian District, Shanghai, P.R.China
<b>Manufacturer</b>	Shanghai SmartPeak Technology Co.,Ltd.
<b>Manufacturer address</b>	Room 1,No.3 Building, NO.295, Qianqiao Road, Fengxian District, Shanghai, P.R.China

## 2.2 General information

EUT Description	
Device Type:	Portable Device
Product Name:	WCDMA Smart Handheld Terminal
Model Number:	C6000
HW Version:	P1
SW Version:	V1.41.4649
IMEI:	868692020019704
Antenna Type:	Internal Antenna
Used Host Product:	PC Manufacturer: lenovo Model: Thinkpad T540p (SN : SL10E37685)
Test Mode:	Transfer Data Mode
EUT Accessory	
Adapter 1	Manufacturer: SHENZHEN RICHLI TECHNOLOGIES CO.,LTD. Model: RCL-X055300C
Adapter 2	Manufacturer: DONGGUAN YINLI ELECTRONICS CO.,LTD. Model: YLJXC-055100
Battery	Manufacturer: Shenzhen MBELL ELECTRONICS CO., LTD. Model: BL-C60 Power Rating: DC 3.8V, 2500mAh, Li-ion
Charger Pedestal Holder	Manufacturer: DONGGUAN YINLI ELECTRONICS CO.,LTD. Model: CRD-C60
USB Cable	100cm Cable, Shielded
Remark: The information of the EUT is declared by the manufacturer. Please refer to the specifications or user manual for details.	



## 2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

### Test standards

**FCC Code CFR47 Part15B (2015)**

**ANSI C63.4 (2014)**



### 3 Test Case Results

#### 3.1 Radiated Emission

##### Ambient condition

Temperature	Relative humidity	Pressure
24°C~26°C	45%~50%	102.5kPa

##### Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO


During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC; PC is connected to server via a long LAN cable.

## Test Setup

### Below 1GHz

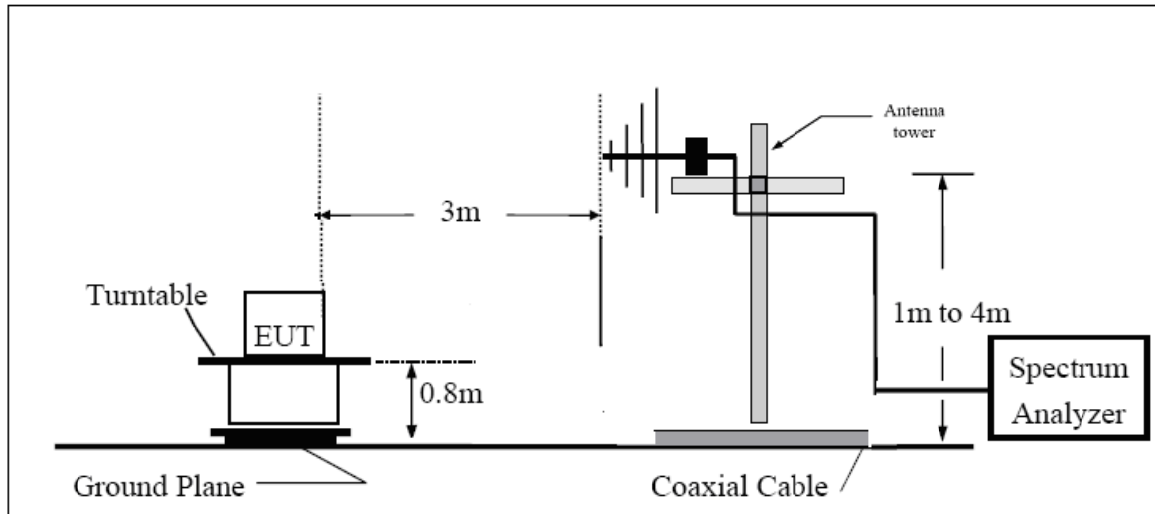

### Above 1GHz

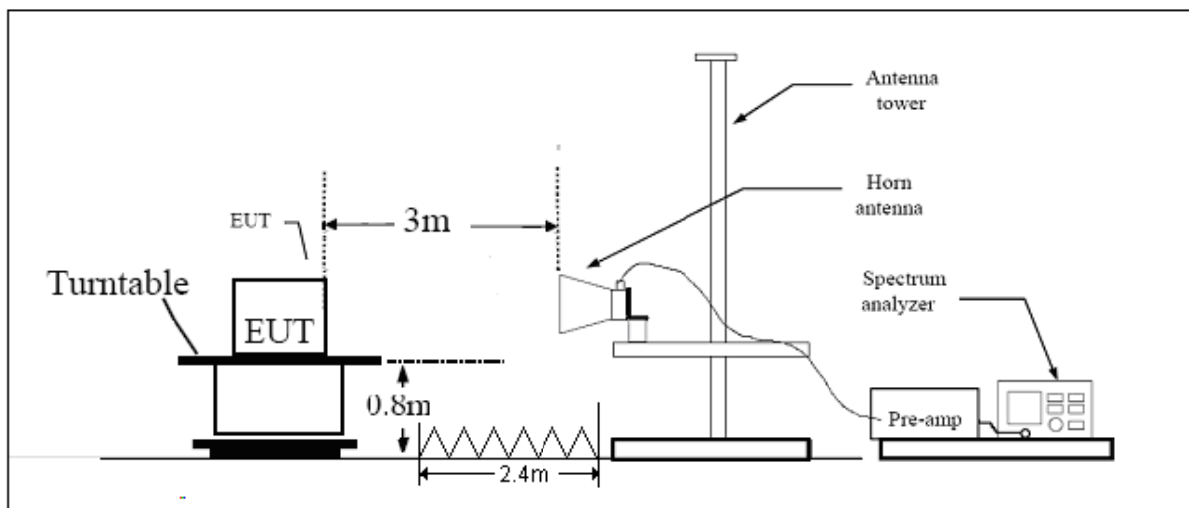

Note: Area side:2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

**Limits**


Frequency (MHz)	Field Strength (dB $\mu$ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 <sup>th</sup> harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .  $U = 3.92$  dB.

**Test Results**

The following graphs display the maximum values of horizontal and vertical by software.  
 For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

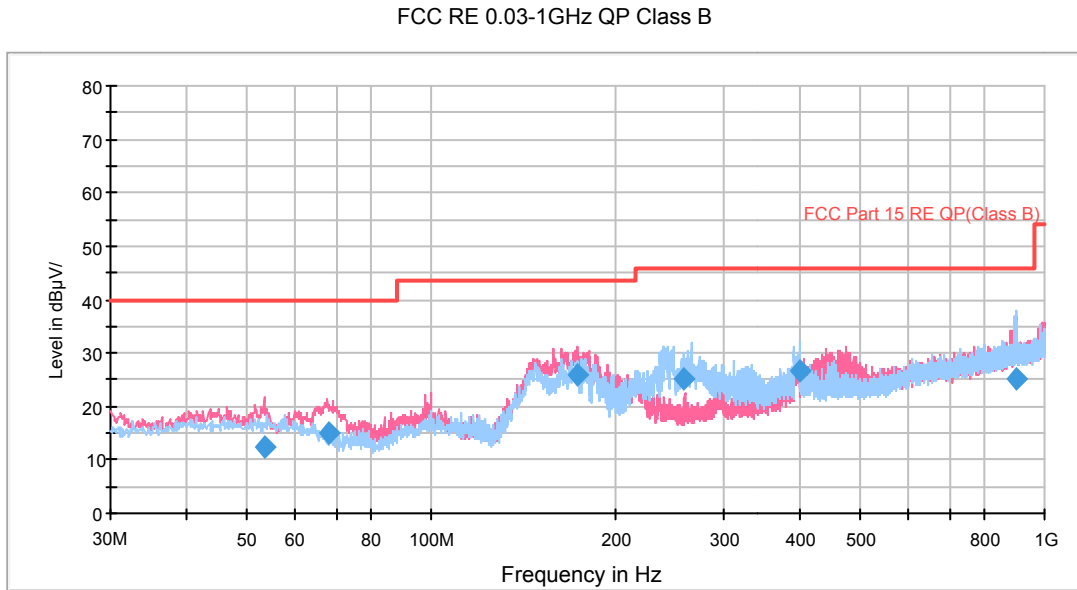


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
53.641250	12.4	25.2	100.0	V	176.0	12.8	27.6	40.0
68.030000	15.2	24.6	100.0	V	26.0	9.4	24.8	40.0
173.035000	25.8	36.3	100.0	V	232.0	10.5	17.7	43.5
257.665000	25.3	39.6	100.0	H	161.0	14.3	20.7	46.0
399.651250	26.8	44.7	100.0	H	186.0	17.9	19.2	46.0
898.276250	25.0	50.6	100.0	H	60.0	25.6	21.0	46.0

- Remark:**
1. Quasi-Peak = Reading value + Correction factor
  2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)
  3. Margin = Limit – Quasi-Peak

RE 1G-3GHz PK+AV

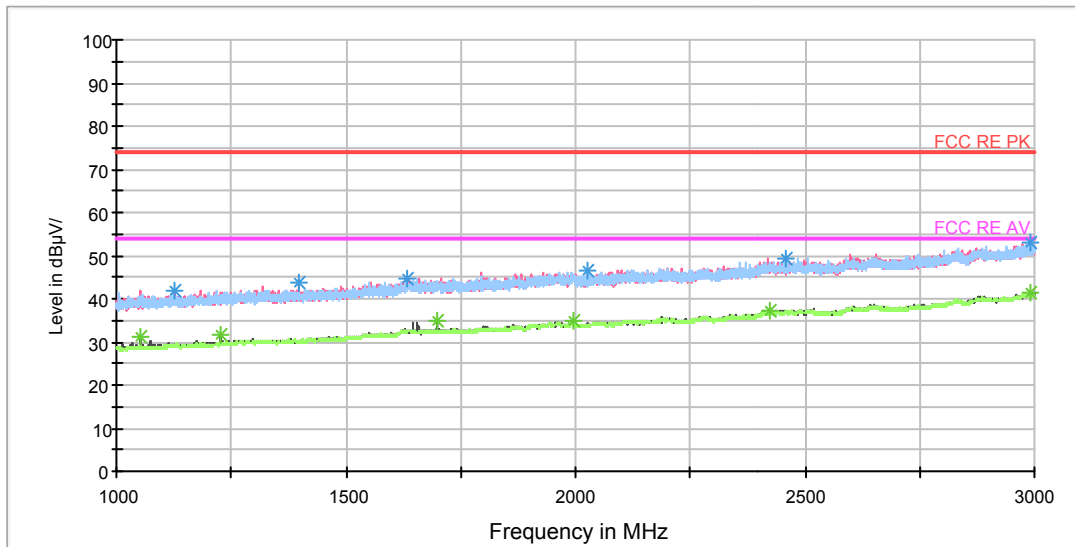


Radiated Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1128.250000	41.8	50.2	101.0	V	210.0	-8.4	32.2	74
1396.000000	43.6	50.7	101.0	V	0.0	-7.1	30.4	74
1631.250000	44.9	49.6	101.0	V	0.0	-4.7	29.1	74
2025.000000	46.4	49.9	101.0	H	0.0	-3.5	27.6	74
2457.750000	49.4	49.9	101.0	V	210.0	-0.5	24.6	74
2990.250000	53.2	55.4	101.0	H	60.0	2.2	20.8	74

Frequency (MHz)	Average (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1051.500000	31.3	40.3	101.0	V	172.0	-9.0	22.7	54
1228.000000	31.4	39.2	101.0	V	210.0	-7.8	22.6	54
1697.500000	35.0	40.0	101.0	V	191.0	-5.0	19.0	54
1994.000000	34.7	37.9	101.0	V	0.0	-3.2	19.3	54
2424.500000	37.3	37.8	101.0	V	191.0	-0.5	16.7	54
2991.750000	41.5	43.7	101.0	H	133.0	2.2	12.5	54

RE 3-18GHz PK+AV

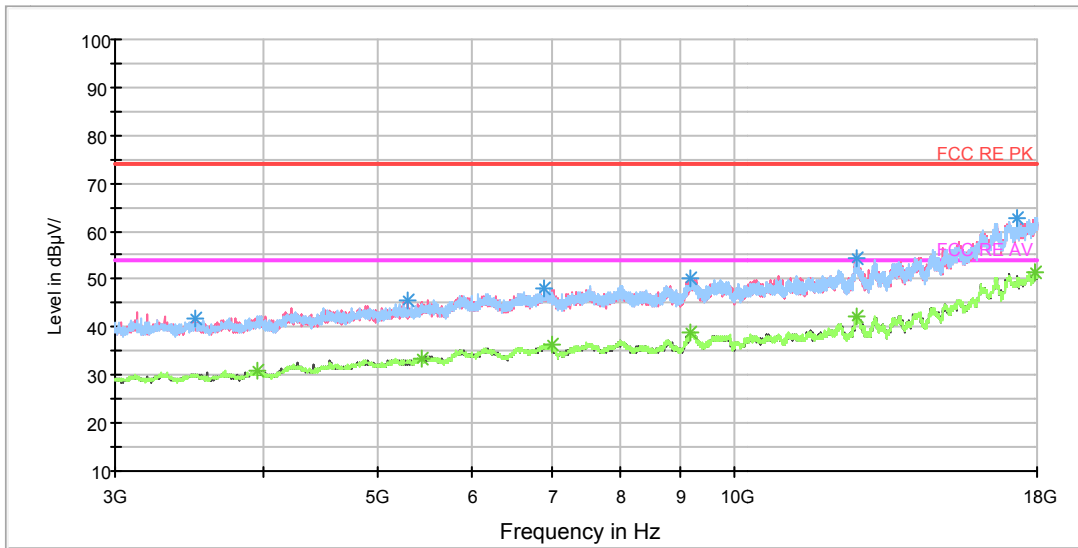

Radiated Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3502.500000	41.9	44.0	101.0	H	158.0	-2.1	32.1	74
5293.125000	45.6	47.9	101.0	V	309.0	2.3	28.4	74
6909.375000	48.3	54.5	101.0	H	0.0	6.2	25.7	74
9170.625000	50.3	60.4	101.0	H	0.0	10.1	23.7	74
12660.000000	54.2	68.0	101.0	H	94.0	13.8	19.8	74
17317.500000	62.8	87.1	101.0	H	0.0	24.3	11.2	74

Frequency (MHz)	Average (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3956.250000	30.8	31.8	101.0	H	0.0	-1.0	23.2	54
5446.875000	33.6	36.4	101.0	H	29.0	2.8	20.4	54
7001.250000	36.5	43.1	101.0	H	208.0	6.6	17.5	54
9172.500000	38.7	48.8	101.0	H	252.0	10.1	15.3	54
12676.875000	42.4	56.6	101.0	H	0.0	14.2	11.6	54
17917.500000	51.5	77.2	101.0	H	0.0	25.7	2.5	54

### 3.2 Conducted Emission

#### Ambient condition


Temperature	Relative humidity	Pressure
24°C ~26°C	50%~55%	102.5kPa

#### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC; PC is connected to server via a long LAN cable.

#### Test Setup

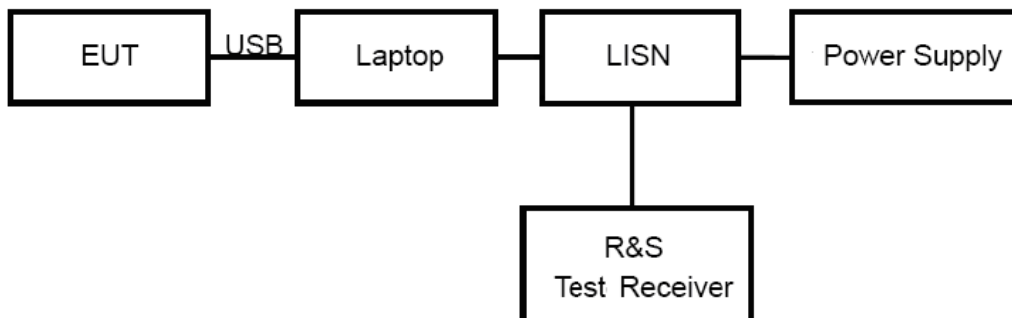

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

#### Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50


\*: Decreases with the logarithm of the frequency.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .  $U = 2.69$  dB.

### Test Results

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

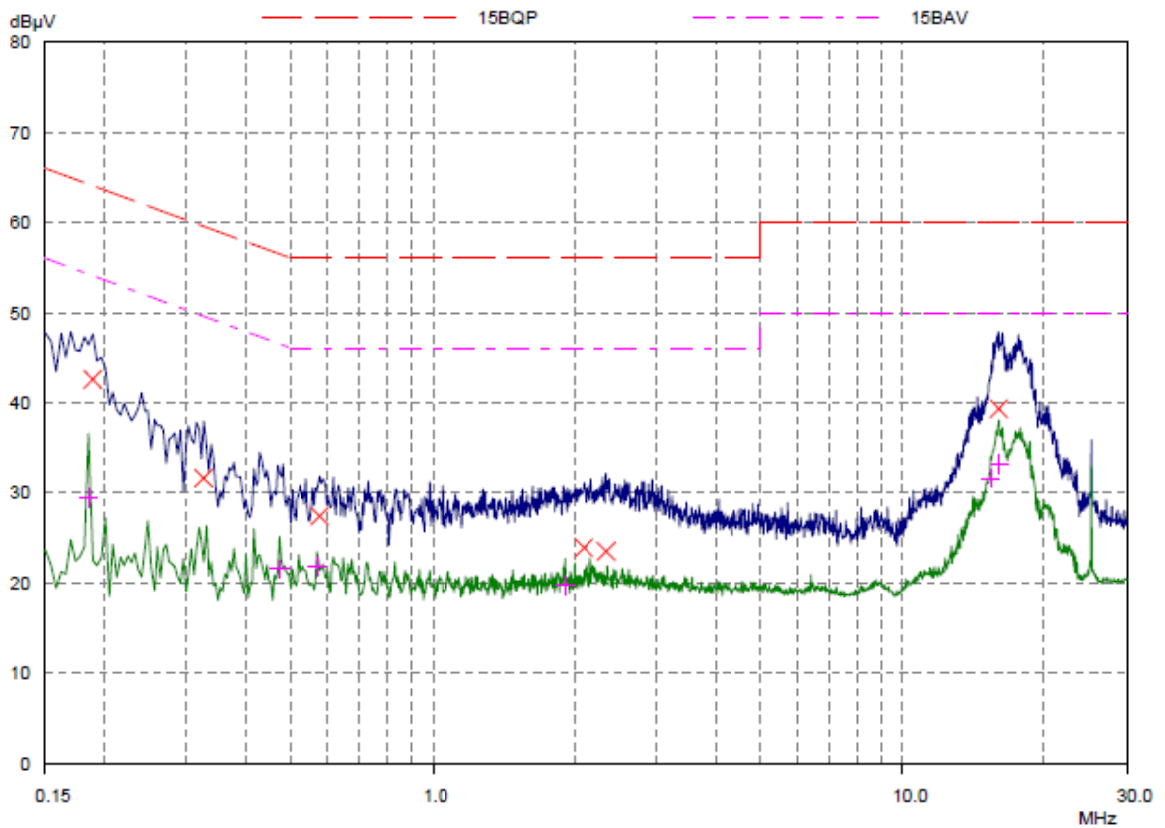

Final Measurement Results


Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase -	PE -
0.18908	42.57	64.08	21.51	L1	gnd
0.32578	31.65	59.56	27.91	L1	gnd
0.57578	27.40	56.00	28.60	L1	gnd
2.10312	23.90	56.00	32.10	L1	gnd
2.34921	23.50	56.00	32.50	L1	gnd
15.99765	39.31	60.00	20.69	L1	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase -	PE -
0.18515	29.52	54.25	24.73	L1	gnd
0.47031	21.54	46.51	24.97	L1	gnd
0.56796	21.86	46.00	24.14	L1	gnd
1.91171	19.76	46.00	26.24	L1	gnd
15.41953	31.60	50.00	18.40	L1	gnd
16.04062	33.10	50.00	16.90	L1	gnd

L line

Conducted Emission from 150 KHz to 30 MHz



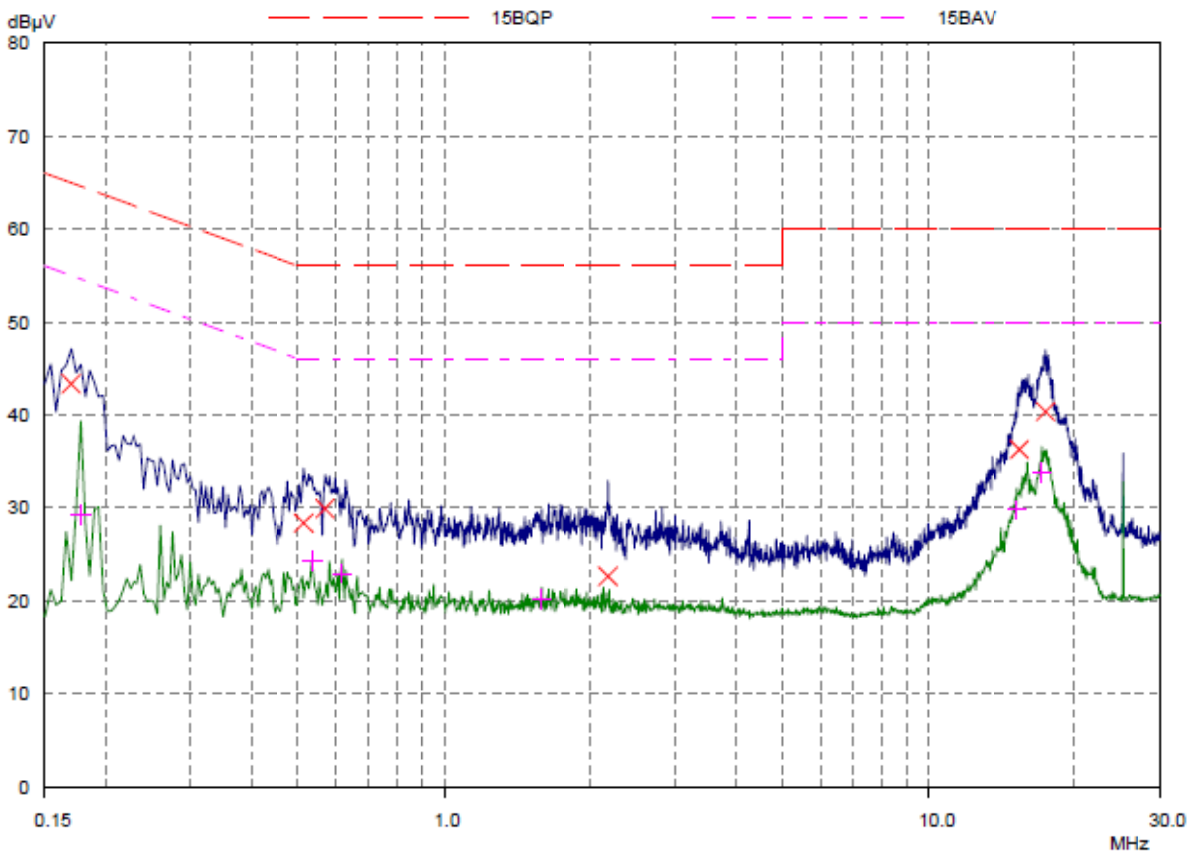

Final Measurement Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase -	PE -
0.16953	43.32	64.98	21.66	N	gnd
0.51327	28.34	56.00	27.66	N	gnd
0.56796	29.90	56.00	26.10	N	gnd
2.18125	22.62	56.00	33.38	N	gnd
15.4	36.28	60.00	23.72	N	gnd
17.45078	40.34	60.00	19.66	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase -	PE -
0.17734	29.21	54.61	25.40	N	gnd
0.53281	24.25	46.00	21.75	N	gnd
0.61484	22.94	46.00	23.06	N	gnd
1.5875	20.22	46.00	25.78	N	gnd
15.22812	29.79	50.00	20.21	N	gnd
17.18515	33.81	50.00	16.19	N	gnd

N line  
Conducted Emission from 150 KHz to 30 MHz

## 4 Main Test Equipment

Name	Type	Manufacturer	Serial Number	Last Cal.	Cal. Due Date
EMI Test Receiver	ESCI3	R&S	100948	2016-06-01	2017-05-31
Signal Analyzer	FSV30	R&S	100815	2015-12-17	2016-12-16
Loop Antenna	FMZB1519	SCHWARZBECK	1519-047	2014-02-29	2017-02-28
Trilog Antenna	VULB 9163	SCHWARZBECK	9163-201	2014-12-06	2017-12-05
Horn Antenna	HF907	R&S	100126	2014-12-06	2017-12-05
Horn Antenna	3160-09	ETS-Lindgren	00102643	2015-01-30	2018-01-29
EMI Test Receiver	ESCS30	R&S	100138	2015-12-17	2016-12-16
LISN	ENV216	R&S	101171	2013-12-18	2016-12-17
Bore Sight Antenna mast	2171B	ETS	00058752	NA	NA