



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.249

TEST REPORT

For

Pycom Ltd

High Point 9 Sydenham Road, Guildford Surrey GU1 3RX, Surrey, United Kingdom

FCC ID: 2AJMTLOPY4R

Report Type: Original Report	Product Type: LoPy4 Module
Test Engineer: Max Min	<i>Max Min</i>
Report Number: RSHA180625001-00E	
Report Date: 2019-01-07	
Reviewed By: Oscar Ye RF Leader	<i>Oscar Ye</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC§15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE	12
CORRECTED FACTOR & MARGIN CALCULATION	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS& OUT OF BAND EMISSION.....	17
APPLICABLE STANDARD	17
EUT SETUP	17
TEST EQUIPMENT SETUP	18
TEST PROCEDURE	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	19
TEST RESULTS SUMMARY	19
TEST DATA	19
FCC §15.215(C) – 20 DB BANDWIDTH TESTING	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST DATA	30

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Pycom Ltd
Tested Model	LoPy4 1.0
Product Type	LoPy4 Module
Dimension	55mm (L)* 20 mm (W)*10 mm(H)
Power Supply	DC 3.4-5.5V

**All measurement and test data in this report was gathered from production sample serial number: 20180625001. (Assigned by the BACL. The EUT supplied by the applicant was received on 2018-06-25)*

Objective

This type approval report is prepared on behalf of Pycom Ltd in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.249 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS and Part 15.247 DSS submissions with FCC ID: 2AJMTLOPY4R.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Lab Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Justification

The frequencies is $F(\text{MHz})=902.3+0.2*n$ ($0 \leq n \leq 63$). The lowest, middle, highest channel numbers of the EUT used and tested in this report are below.

Channel	Frequency (MHz)
0	902.3
32	908.7
63	914.9

EUT Exercise Software

RF test tool: putty

Power Level: 5

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
DELL	Adapter	LA65NS0-00	DF263
Pycom Ltd	Expansion board	V3.0r	1811002240

External I/O Cable


Cable Description	Length (m)	From Port	To
USB Cable	0.8	Expansion board	Notebook

Block Diagram of Test Setup


For Conducted Emissions:

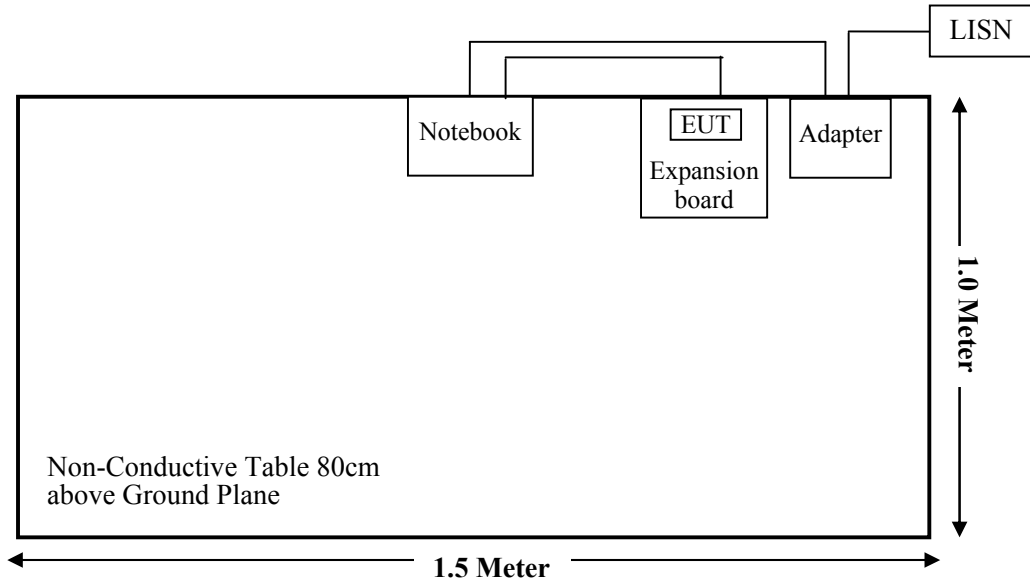

For Radiated Emissions(Below 1GHz):

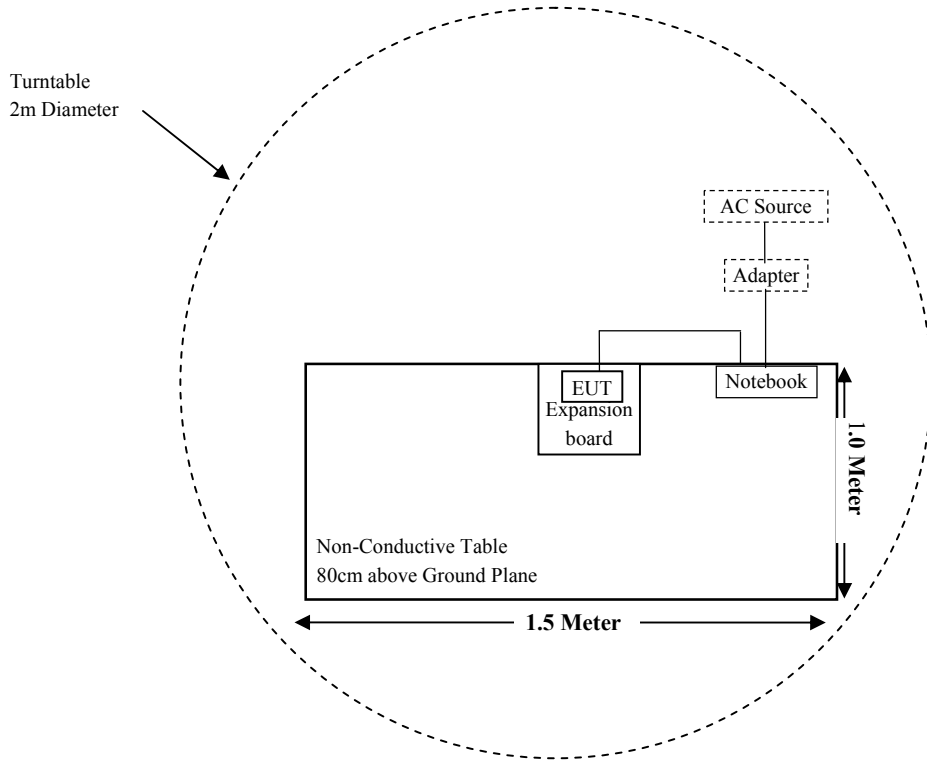

For Radiated Emissions(Above 1GHz):

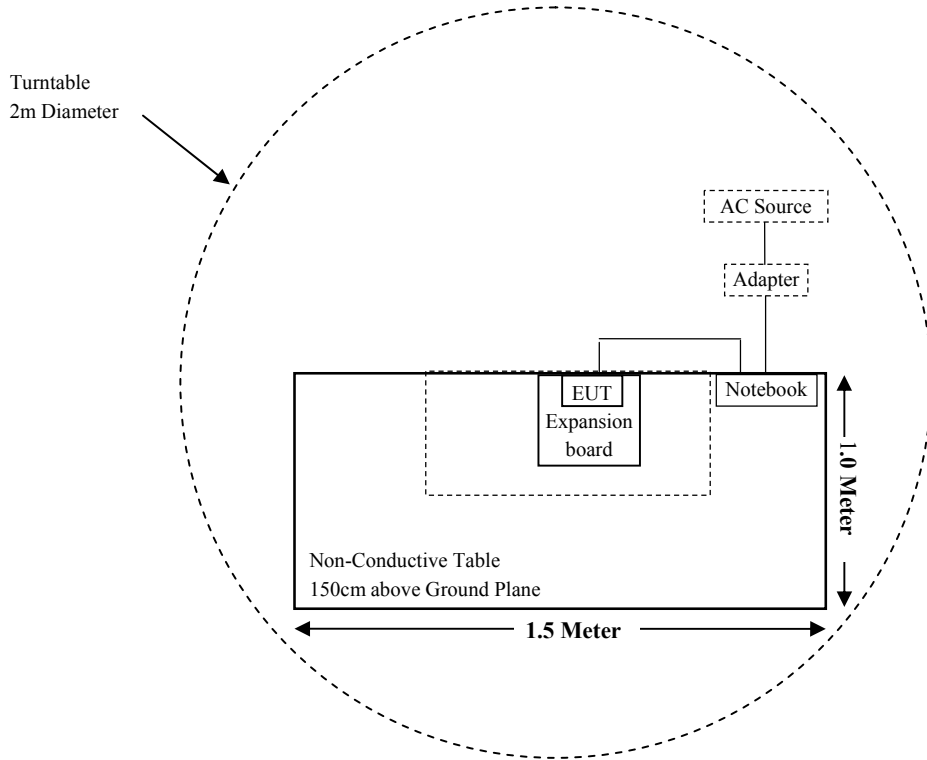

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	Conduction Emissions	Compliant
15.205, §15.209, §15.249	Radiated Emissions& Out of Band Emission	Compliant
§15.215 (c)	20 dB Bandwidth	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2017-11-30	2018-11-29
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-15	2019-08-14
MICRO-TRONICS	Band Reject Filter	BRC50722	G013	2018-08-05	2019-08-04
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2018-08-27	2019-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2016-12-12	2019-12-11
A.H.Systems, inc	Amplifier	2641-1	466	2018-09-11	2019-09-10
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2018-08-15	2019-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2018-07-23	2019-07-22
Narda	Attenuator	10dB	010	2018-08-15	2019-08-14
Pycom Ltd	RF Cable	Pycom01	C01	Each Time	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2018-11-30	2019-11-29
Rohde & Schwarz	LISN	ENV216	3560655016	2018-11-30	2019-11-29
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2018-08-15	2019-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

Antenna Connector Construction

The EUT has an external antenna for LoRa, which the antenna gain is 0.87 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

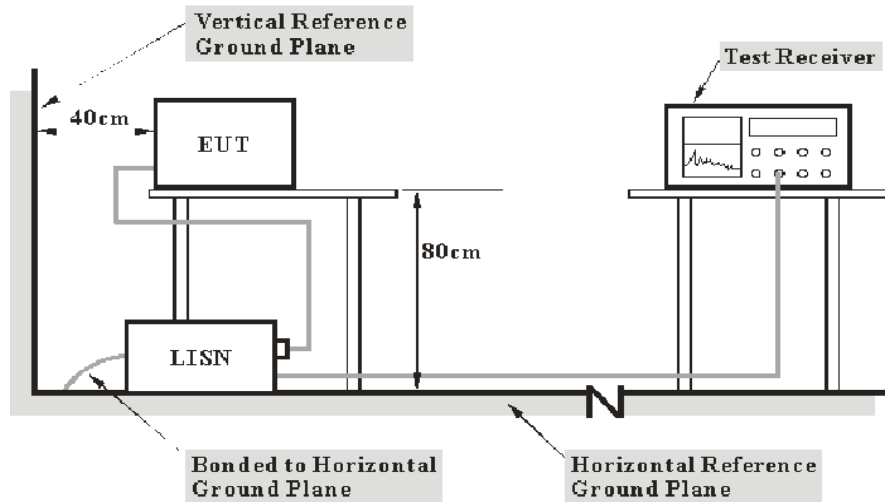

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Corrected Amplitude (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions


Temperature:	24.2°C
Relative Humidity:	51%
ATM Pressure:	101.2 kPa

The testing was performed by Max Min on 2018-12-17.

EUT operation mode: Transmitting in low channel (worst case)


For 125kHz

AC 120V/60 Hz, Line

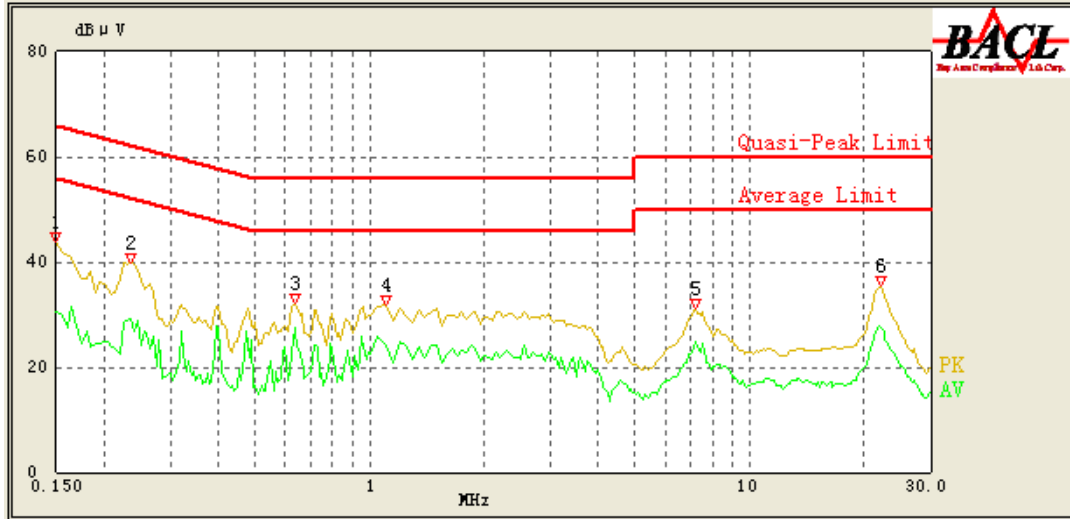

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	43.88	QP	9.000	L1	16.06	66.00	22.12	Compliant
0.150	30.64	AV	9.000	L1	16.06	56.00	25.36	Compliant
0.235	39.85	QP	9.000	L1	16.02	62.27	22.42	Compliant
0.235	29.21	AV	9.000	L1	16.02	52.27	23.06	Compliant
0.640	32.28	QP	9.000	L1	15.99	56.00	23.72	Compliant
0.640	26.44	AV	9.000	L1	15.99	46.00	19.56	Compliant
1.100	31.83	QP	9.000	L1	15.88	56.00	24.17	Compliant
1.100	24.17	AV	9.000	L1	15.88	46.00	21.83	Compliant
7.200	31.30	QP	9.000	L1	15.99	60.00	28.70	Compliant
7.200	24.68	AV	9.000	L1	15.99	50.00	25.32	Compliant
22.100	35.45	QP	9.000	L1	16.45	60.00	24.55	Compliant
21.950	27.68	AV	9.000	L1	16.45	50.00	22.32	Compliant

AC 120V/60 Hz, Neutral

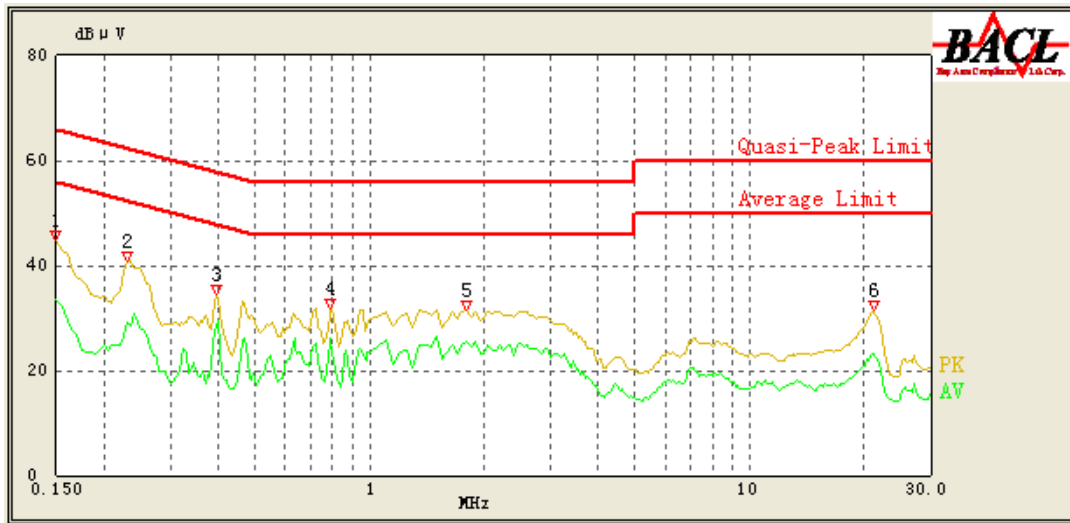


Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	44.71	QP	9.000	N	16.06	66.00	21.29	Compliant
0.150	33.41	AV	9.000	N	16.06	56.00	22.59	Compliant
0.230	40.85	QP	9.000	N	16.06	62.45	21.60	Compliant
0.230	29.12	AV	9.000	N	16.06	52.45	23.33	Compliant
0.395	34.63	QP	9.000	N	16.09	57.96	23.33	Compliant
0.395	28.33	AV	9.000	N	16.09	47.96	19.63	Compliant
0.790	31.96	QP	9.000	N	15.97	56.00	24.04	Compliant
0.790	26.26	AV	9.000	N	15.97	46.00	19.74	Compliant
1.800	31.51	QP	9.000	N	15.92	56.00	24.49	Compliant
1.800	25.65	AV	9.000	N	15.92	46.00	20.35	Compliant
21.150	31.39	QP	9.000	N	16.18	60.00	28.61	Compliant
21.150	23.30	AV	9.000	N	16.18	50.00	26.70	Compliant

Note:

- 1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Margin (dB) = Limit (dBμV) – Corrected Amplitude (dBμV)


For 250kHz

AC 120V/60 Hz, Line

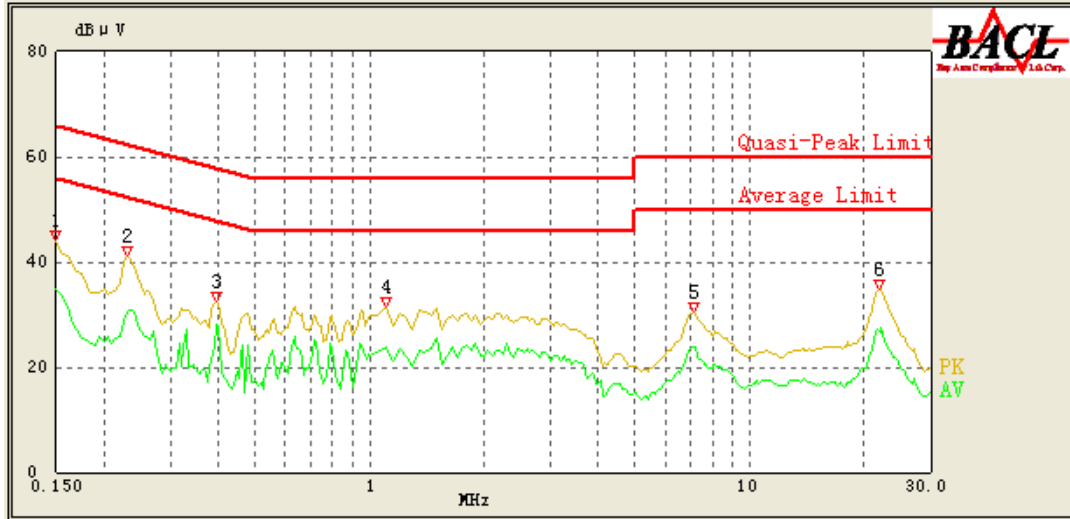

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	44.04	QP	9.000	L1	16.06	66.00	21.96	Compliant
0.150	34.67	AV	9.000	L1	16.06	56.00	21.33	Compliant
0.230	41.19	QP	9.000	L1	16.02	62.45	21.26	Compliant
0.230	30.51	AV	9.000	L1	16.02	52.45	21.94	Compliant
0.395	32.50	QP	9.000	L1	16.06	57.96	25.46	Compliant
0.395	28.21	AV	9.000	L1	16.06	47.96	19.75	Compliant
1.100	31.45	QP	9.000	L1	15.88	56.00	24.55	Compliant
1.100	23.89	AV	9.000	L1	15.88	46.00	22.11	Compliant
7.150	30.40	QP	9.000	L1	15.98	60.00	29.60	Compliant
7.150	23.93	AV	9.000	L1	15.98	50.00	26.07	Compliant
22.050	34.87	QP	9.000	L1	16.45	60.00	25.13	Compliant
22.050	26.64	AV	9.000	L1	16.45	50.00	23.36	Compliant

AC 120V/60 Hz, Neutral

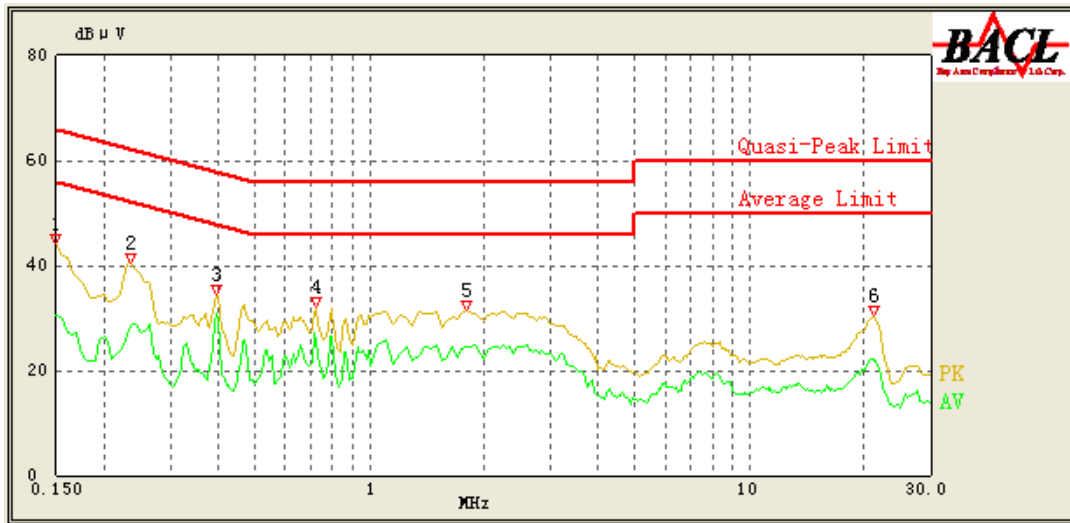

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	44.07	QP	9.000	N	16.06	66.00	21.93	Compliant
0.150	30.60	AV	9.000	N	16.06	56.00	25.40	Compliant
0.235	40.57	QP	9.000	N	16.06	62.27	21.70	Compliant
0.235	28.63	AV	9.000	N	16.06	52.27	23.64	Compliant
0.395	34.65	QP	9.000	N	16.09	57.96	23.31	Compliant
0.395	30.87	AV	9.000	N	16.09	47.96	17.09	Compliant
0.720	32.02	QP	9.000	N	15.99	56.00	23.98	Compliant
0.725	25.66	AV	9.000	N	15.99	46.00	20.34	Compliant
1.800	31.35	QP	9.000	N	15.92	56.00	24.65	Compliant
1.800	24.48	AV	9.000	N	15.92	46.00	21.52	Compliant
21.250	30.61	QP	9.000	N	16.18	60.00	29.39	Compliant
21.250	22.26	AV	9.000	N	16.18	50.00	27.74	Compliant

Note:

- 1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Margin (dB) = Limit (dBμV) – Corrected Amplitude (dBμV)

FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS& OUT OF BAND EMISSION

Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

EUT Setup

Below 1 GHz:

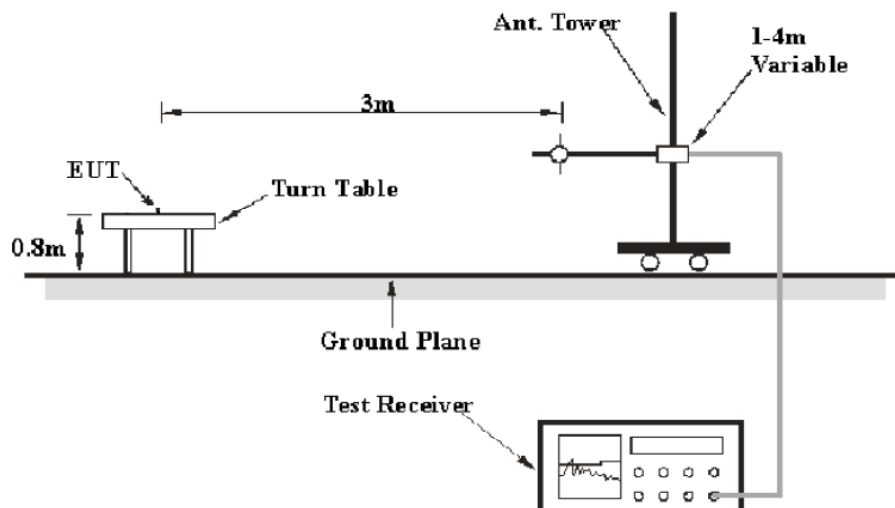

Above 1 GHz:

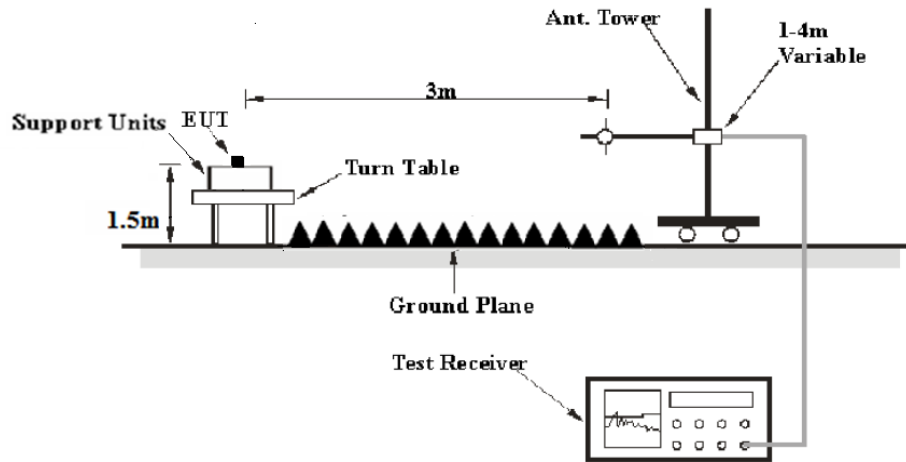

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits. The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

Test Equipment Setup

The system was investigated from 30 MHz to 10 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 30MHz to 1GHz, Peak and average detection mode above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 & 15.205 & 15.249.

Test Data

Environmental Conditions

Temperature:	24.4°C~24.6°C
Relative Humidity:	51~52%
ATM Pressure:	101.1~101.2 kPa

The testing was performed by Max Min from 2018-09-25 to 2018-09-28.

Test Mode: Transmitting (Scan with X-Axis, Y-Axis and Z-Axis position, the worst case X-Axis was recorded)

Spurious Emission Test:


For 125kHz:

30MHz-1GHz

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **low channel of operation in X-axis of orientation** was recorded)

Note:

1. This test was performed with the 902-928MHz notch filter.

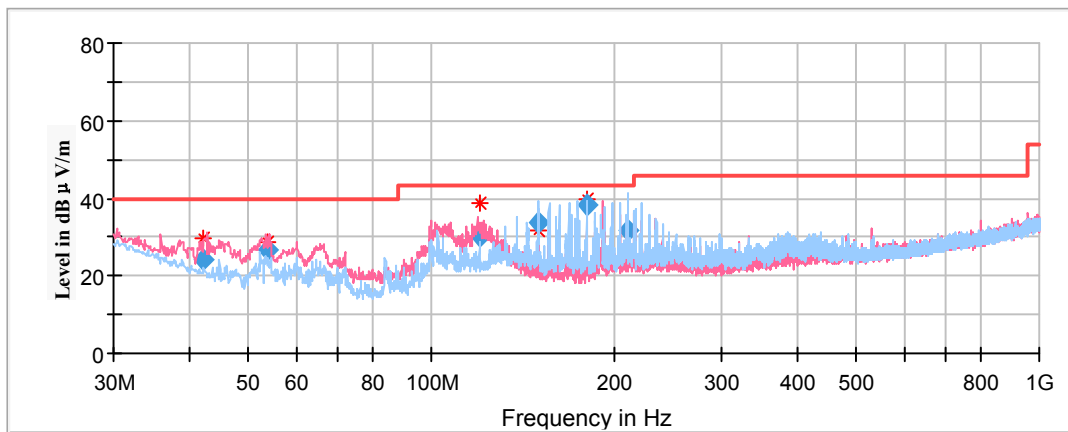

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)				
42.153800	24.15	101.0	V	30.0	-12.2	40.00	15.85
53.586050	26.70	101.0	V	67.0	-17.7	40.00	13.30
120.016250	30.42	101.0	V	0.0	-11.2	43.50	13.08
150.216850	33.52	199.0	H	24.0	-12.3	43.50	9.98
180.216450	38.46	199.0	H	149.0	-13.6	43.50	5.04
210.246000	31.57	101.0	H	157.0	-12.3	43.50	11.93


For 250kHz:

30MHz-1GHz

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **low channel of operation in X-axis of orientation** was recorded)

Note:

1. This test was performed with the 902-928MHz notch filter.

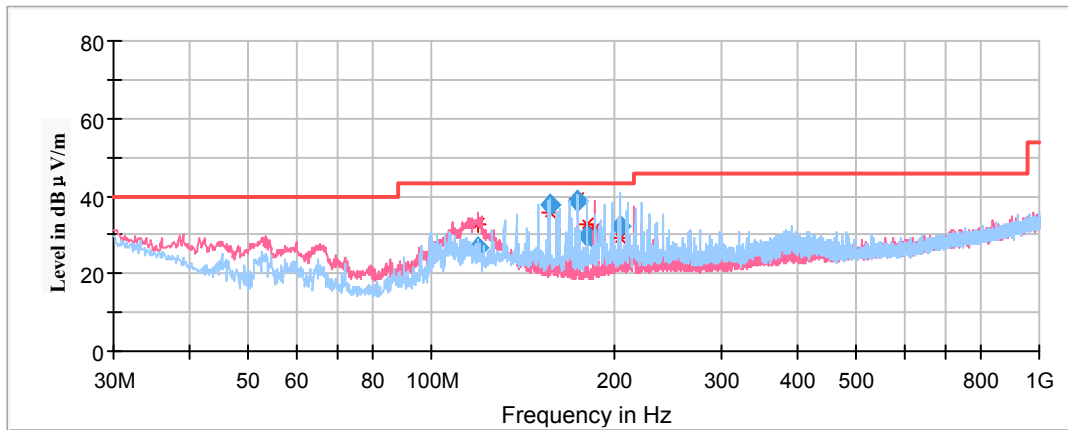

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)				
119.601500	26.65	101.0	V	262.0	-11.3	43.50	16.85
156.231450	37.91	199.0	H	157.0	-12.6	43.50	5.59
174.336100	38.84	199.0	H	13.0	-13.4	43.50	4.66
180.923250	29.92	199.0	H	13.0	-13.6	43.50	13.58
186.299450	28.68	199.0	V	126.0	-13.2	43.50	14.82
204.456450	32.26	199.0	H	137.0	-12.3	43.50	11.24

1GHz-10GHz

(Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded.)


For 125kHz

Note: .

- 1. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
- Corrected Amplitude = Corrected Factor + Reading
- Margin = Limit – Corrected. Amplitude

Low Channel: 902.3MHz


Full Spectrum

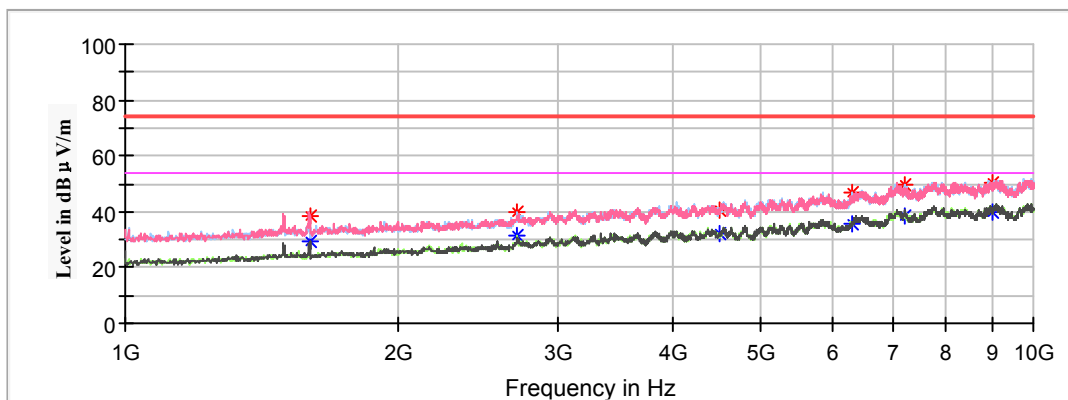

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1597.600000	38.68	---	250.0	V	180.0	-7.2	74.00	35.32
1597.600000	---	29.51	250.0	V	180.0	-7.2	54.00	24.49
2706.900000	---	31.35	250.0	H	146.0	-3.2	54.00	22.65
2706.900000	39.65	---	150.0	H	243.0	-3.2	74.00	34.35
4510.000000	---	31.88	200.0	H	189.0	1.5	54.00	22.12
4510.000000	40.52	---	250.0	H	3.0	1.5	74.00	33.48
6315.400000	---	35.61	100.0	H	167.0	6.0	54.00	18.39
6315.400000	46.67	---	100.0	H	167.0	6.0	74.00	27.33
7219.000000	---	38.72	250.0	H	34.0	8.9	54.00	15.28
7219.000000	49.33	---	250.0	H	34.0	8.9	74.00	24.67
9022.600000	---	40.10	100.0	H	295.0	11.7	54.00	13.90
9022.600000	50.02	---	200.0	H	260.0	11.7	74.00	23.98

Middle Channel: 908.7MHz


Full Spectrum

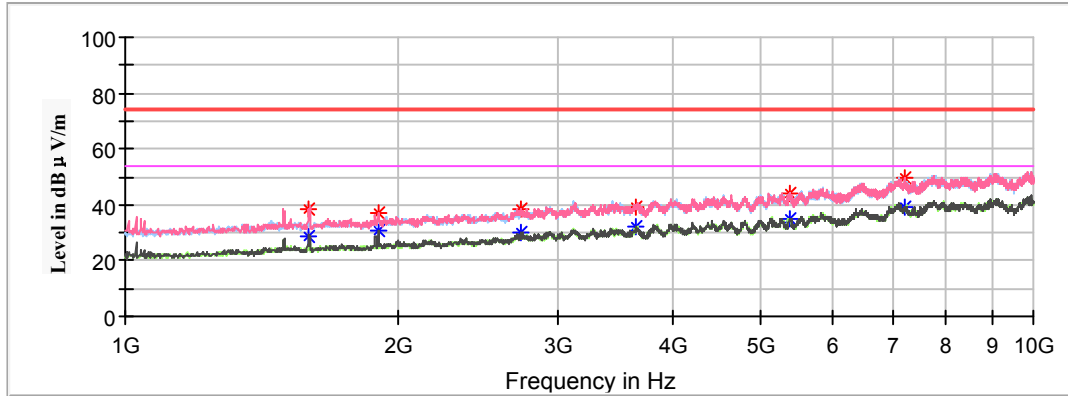

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1592.200000	---	28.56	200.0	V	181.0	-7.2	54.00	25.44
1592.200000	38.57	---	100.0	V	177.0	-7.2	74.00	35.43
1898.200000	37.35	---	200.0	V	284.0	-6.2	74.00	36.65
1898.200000	---	30.94	200.0	V	284.0	-6.2	54.00	23.06
2726.100000	38.66	---	150.0	V	0.0	-3.1	74.00	35.34
2726.100000	---	30.25	200.0	V	295.0	-3.1	54.00	23.75
3644.200000	38.82	---	150.0	V	286.0	-0.3	74.00	35.18
3644.200000	---	32.18	100.0	V	2.0	-0.3	54.00	21.82
5401.000000	---	34.88	200.0	V	100.0	3.6	54.00	19.12
5401.000000	43.73	---	150.0	V	25.0	3.6	74.00	30.27
7215.400000	---	39.08	200.0	V	59.0	8.9	54.00	14.92
7215.400000	49.38	---	200.0	V	59.0	8.9	74.00	24.62

High Channel: 914.9MHz

Full Spectrum

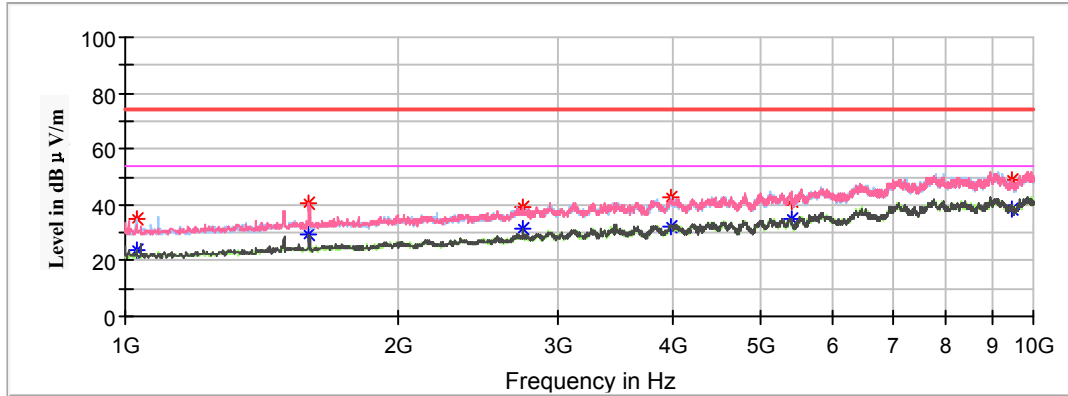

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1028.800000	---	23.82	200.0	H	2.0	-10.3	54.00	30.18
1028.800000	34.84	---	200.0	H	2.0	-10.3	74.00	39.16
1592.200000	---	29.38	250.0	V	180.0	-7.2	54.00	24.62
1592.200000	40.33	---	250.0	V	180.0	-7.2	74.00	33.67
2744.700000	---	31.29	100.0	V	1.0	-3.0	54.00	22.71
2744.700000	38.90	---	100.0	V	1.0	-3.0	74.00	35.10
3982.600000	---	32.43	250.0	H	119.0	0.8	54.00	21.57
3982.600000	42.73	---	250.0	H	119.0	0.8	74.00	31.27
5419.000000	41.19	---	100.0	H	224.0	3.7	74.00	32.81
5419.000000	---	34.62	200.0	V	130.0	3.7	54.00	19.38
9470.800000	---	38.25	200.0	V	201.0	11.4	54.00	15.75
9470.800000	49.16	---	100.0	V	289.0	11.4	74.00	24.84


For 250kHz

Note:

1. The test was performed with a 10dB Attenuator.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
 Corrected Amplitude = Corrected Factor + Reading
 Margin = Limit – Corrected. Amplitude

Low Channel: 902.3MHz


Full Spectrum

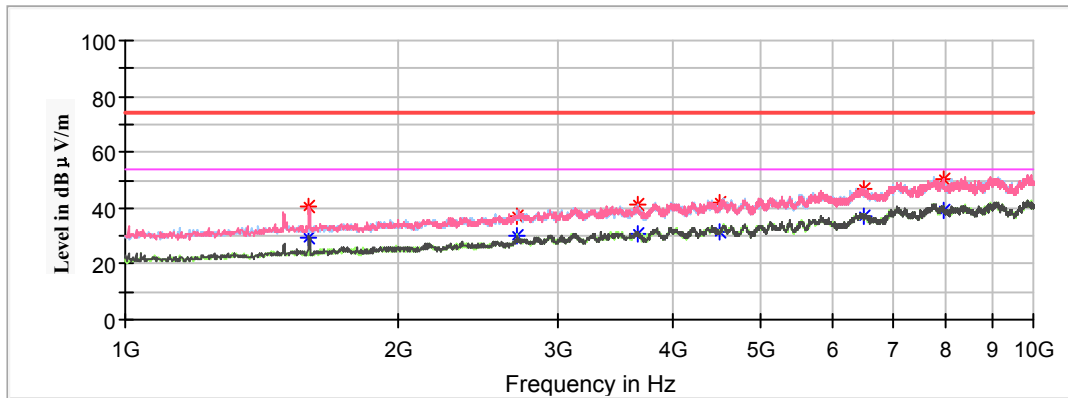

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1594.000000	40.80	---	250.0	V	174.0	-7.2	74.00	33.20
1594.000000	---	29.13	250.0	V	174.0	-7.2	54.00	24.87
2706.900000	37.08	---	200.0	V	3.0	-3.2	74.00	36.92
2706.900000	---	30.17	100.0	V	4.0	-3.2	54.00	23.83
3669.400000	---	30.75	200.0	H	25.0	-0.2	54.00	23.25
3669.400000	41.13	---	200.0	H	25.0	-0.2	74.00	32.87
4511.800000	---	31.54	100.0	V	99.0	1.5	54.00	22.46
4511.800000	41.77	---	250.0	V	102.0	1.5	74.00	32.23
6499.000000	---	36.75	150.0	V	123.0	6.6	54.00	17.25
6499.000000	46.72	---	250.0	V	38.0	6.6	74.00	27.28
7969.600000	---	39.45	100.0	V	221.0	10.6	54.00	14.55
7969.600000	50.59	---	100.0	V	221.0	10.6	74.00	23.41

Middle Channel: 908.7MHz


Full Spectrum

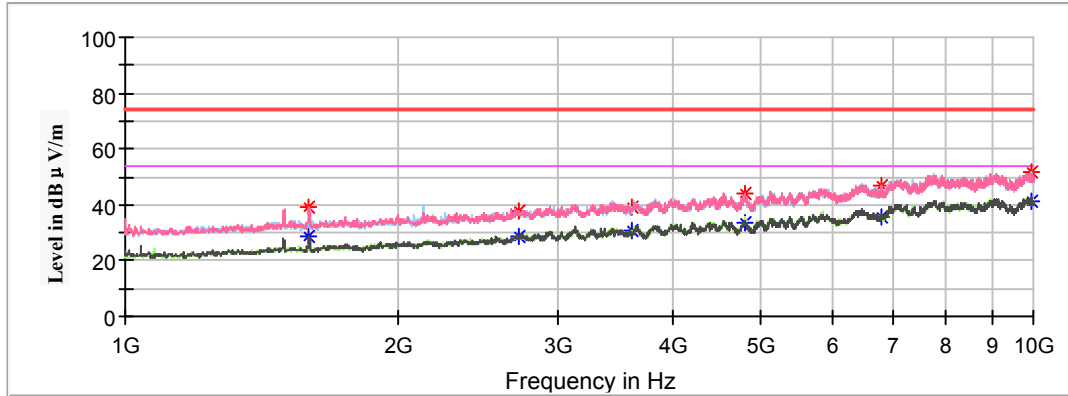

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1594.000000	---	28.68	200.0	V	165.0	-7.2	54.00	25.32
1594.000000	38.99	---	250.0	V	180.0	-7.2	74.00	35.01
2726.100000	---	28.94	250.0	V	6.0	-3.2	54.00	25.06
2726.100000	37.96	---	150.0	V	322.0	-3.2	74.00	36.04
3620.800000	---	30.82	200.0	H	256.0	-0.4	54.00	23.18
3620.800000	38.89	---	150.0	H	13.0	-0.4	74.00	35.11
4814.200000	---	33.72	250.0	H	119.0	1.9	54.00	20.28
4814.200000	44.32	---	250.0	V	200.0	1.9	74.00	29.68
6805.000000	---	35.42	150.0	V	241.0	7.6	54.00	18.58
6805.000000	46.74	---	150.0	V	241.0	7.6	74.00	27.26
9942.400000	---	41.21	150.0	H	129.0	12.5	54.00	12.79
9942.400000	51.91	---	100.0	H	350.0	12.5	74.00	22.09

High Channel: 914.9MHz

Full Spectrum

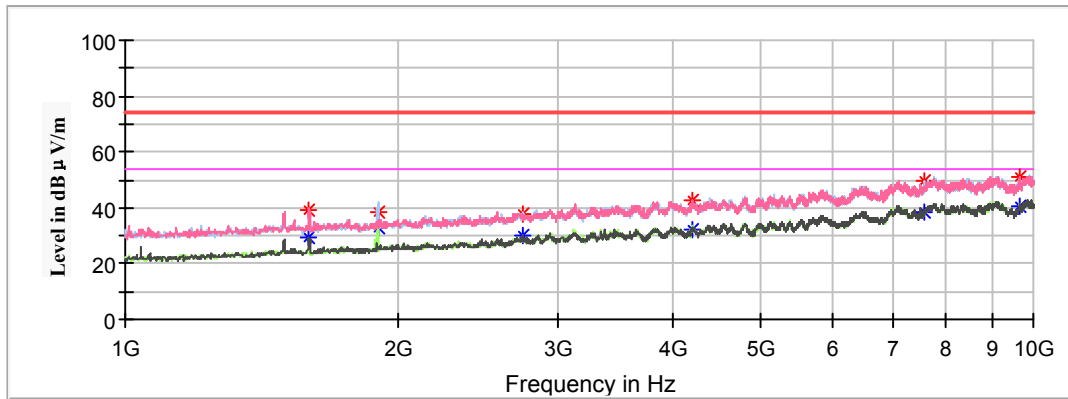

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1592.200000	---	29.35	250.0	V	175.0	-7.2	54.00	24.65
1592.200000	39.05	---	250.0	V	175.0	-7.2	74.00	34.95
1896.400000	---	32.63	100.0	H	33.0	-6.2	54.00	21.37
1896.400000	38.37	---	100.0	H	33.0	-6.2	74.00	35.63
2744.700000	38.03	---	250.0	V	252.0	-3.0	74.00	35.97
2744.700000	---	29.97	150.0	H	160.0	-3.0	54.00	24.03
4216.600000	---	32.10	200.0	V	139.0	1.1	54.00	21.90
4216.600000	42.94	---	200.0	V	139.0	1.1	74.00	31.06
7600.600000	---	38.32	150.0	H	2.0	9.9	54.00	15.68
7600.600000	49.49	---	150.0	H	2.0	9.9	74.00	24.51
9656.200000	---	40.24	200.0	V	252.0	11.7	54.00	13.76
9656.200000	50.93	---	250.0	V	144.0	11.7	74.00	23.07

Fundamental Test & Restricted Bands Emissions Test:

(Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded.)

For 125kHz

Note:

- 1. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
- Corrected Amplitude = Corrected Factor + Reading
- Margin = Limit - Corrected. Amplitude

Frequency (MHz)	Corrected Amplitude (dBµV /m)	Detector (PK/QP/Ave.)	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
			Height (cm)	Polar (H/V)				
902.30MHz								
902.30	93.62	QP	150	V	345	0.22	94	0.38
902.30	90.11	QP	150	H	345	0.22	94	3.89
902.00	37.56	QP	150	V	25	0.20	46	8.44
902.00	36.11	QP	150	H	25	0.20	46	9.89
908.70MHz								
908.70	93.87	QP	100	V	304	0.36	94	0.13
908.70	90.36	QP	100	H	304	0.36	94	3.64
914.90MHz								
914.90	93.79	QP	150	V	353	0.46	94	0.21
914.90	90.23	QP	150	H	353	0.46	94	3.77
928.00	34.53	QP	200	V	325	0.75	46	11.47
928.00	33.67	QP	200	H	325	0.75	46	12.33

For 250kHz

Note:

1. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude

Frequency (MHz)	Corrected Amplitude (dBµV /m)	Detector (PK/QP/Ave.)	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
			Height (cm)	Polar (H/V)				
902.30MHz								
902.30	93.56	QP	150	V	231	0.22	94	0.44
902.30	90.28	QP	150	H	231	0.22	94	3.72
902.00	42.26	QP	200	V	47	0.20	46	3.74
902.00	40.89	QP	200	H	47	0.20	46	5.11
908.70MHz								
908.70	93.49	QP	150	V	241	0.36	94	0.51
908.70	90.21	QP	150	H	241	0.36	94	3.79
914.90MHz								
914.90	93.71	QP	200	V	338	0.46	94	0.29
914.90	90.45	QP	200	H	338	0.46	94	3.55
928.00	34.59	QP	150	V	287	0.75	46	11.41
928.00	33.53	QP	150	H	287	0.75	46	12.47

FCC §15.215(c) – 20 dB BANDWIDTH TESTING

Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through § 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	24.2°C
Relative Humidity:	50 %
ATM Pressure:	101.3kPa

The testing was performed by Max Min on 2018-12-03.

Test Result: Compliant.


Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	
		125kHz	250kHz
Low	902.3	147.610	306.800
Middle	908.7	143.270	301.000
High	914.9	145.440	302.500

20 dB Bandwidth


For 125kHz

Low Channel

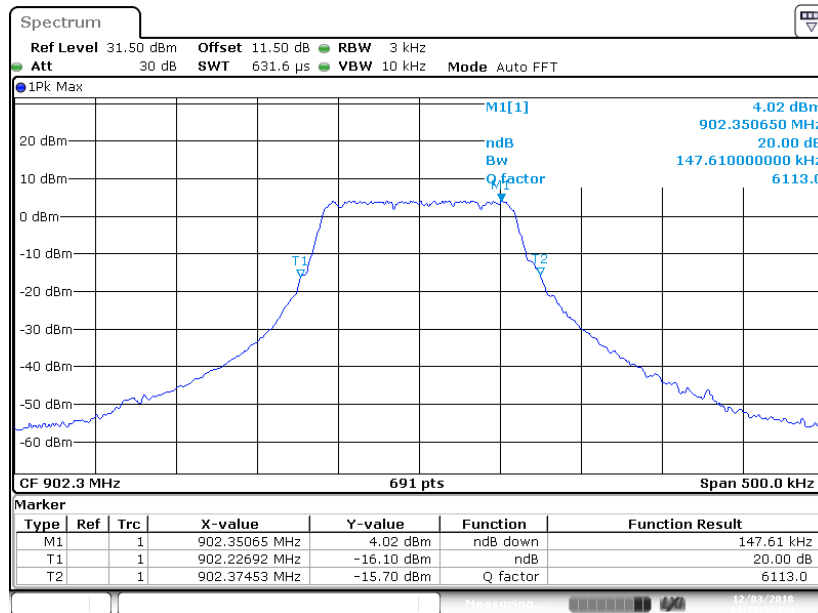


Date: 3 DEC 2018 13:11:53

Middle Channel

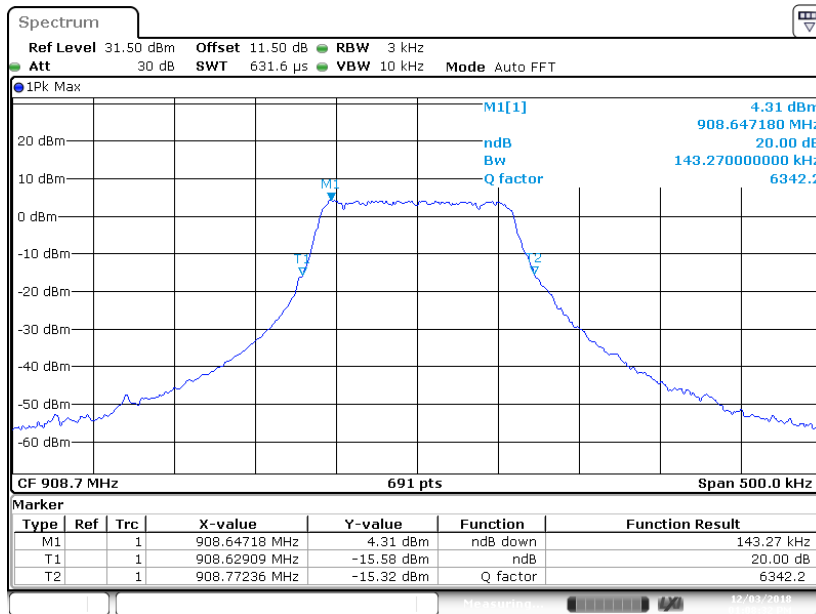

Date: 3 DEC 2018 13:08:32


High Channel

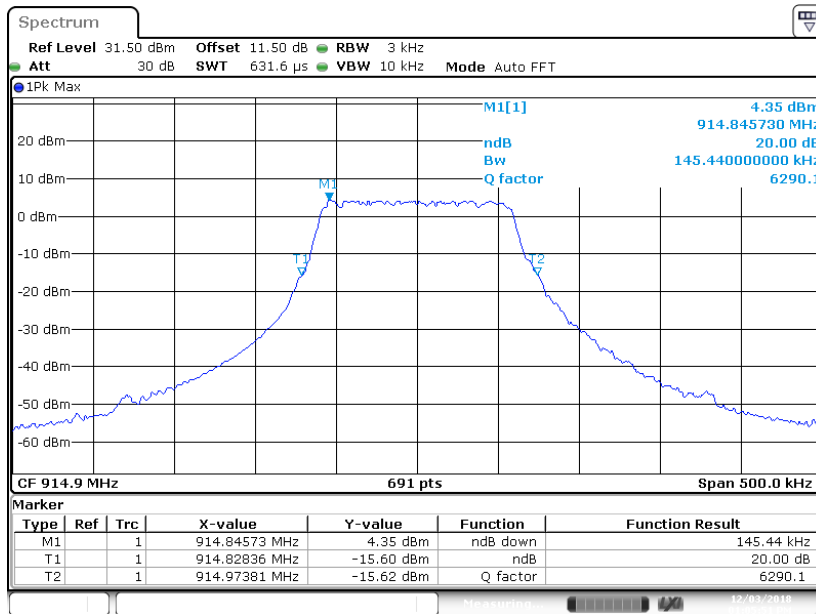

Date: 3 DEC 2018 13:05:51


For 250kHz

Low Channel

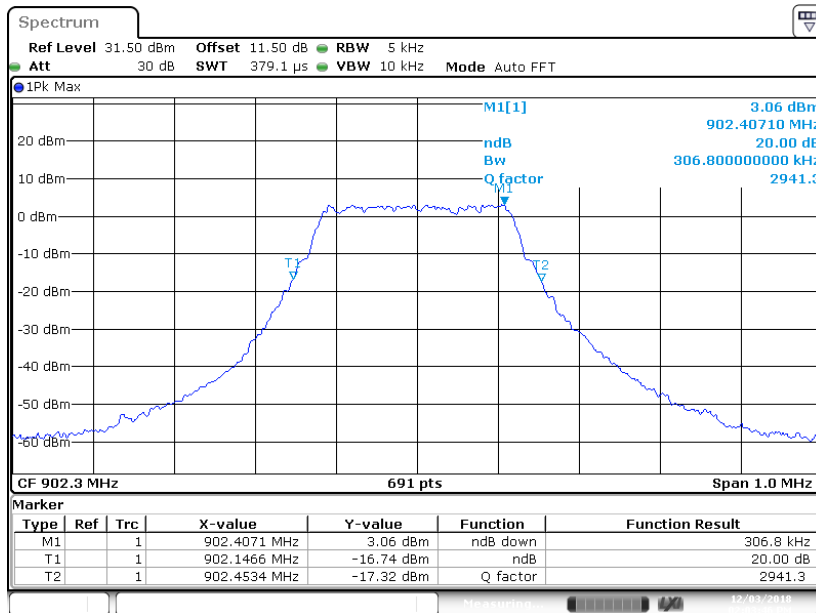


Date: 3 DEC. 2018 14:03:46

Middle Channel

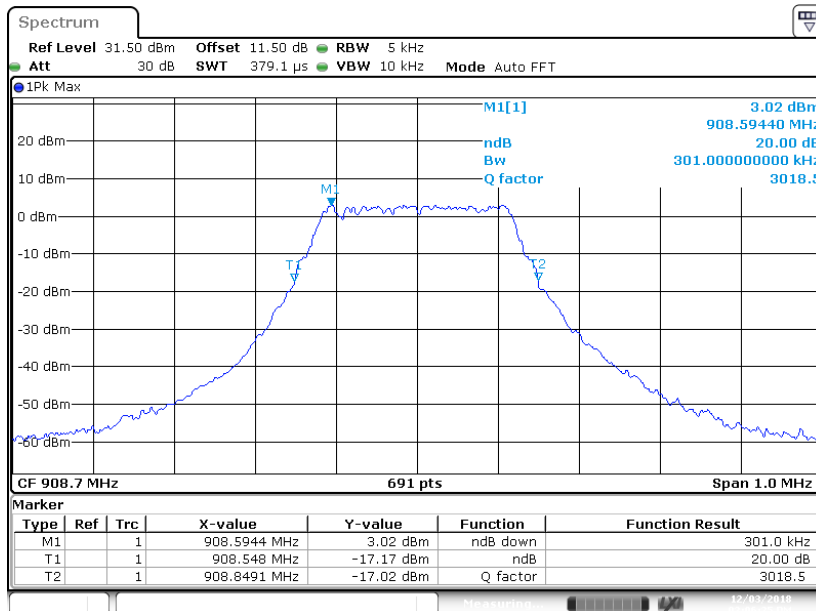

Date: 3 DEC. 2018 14:06:25

High Channel

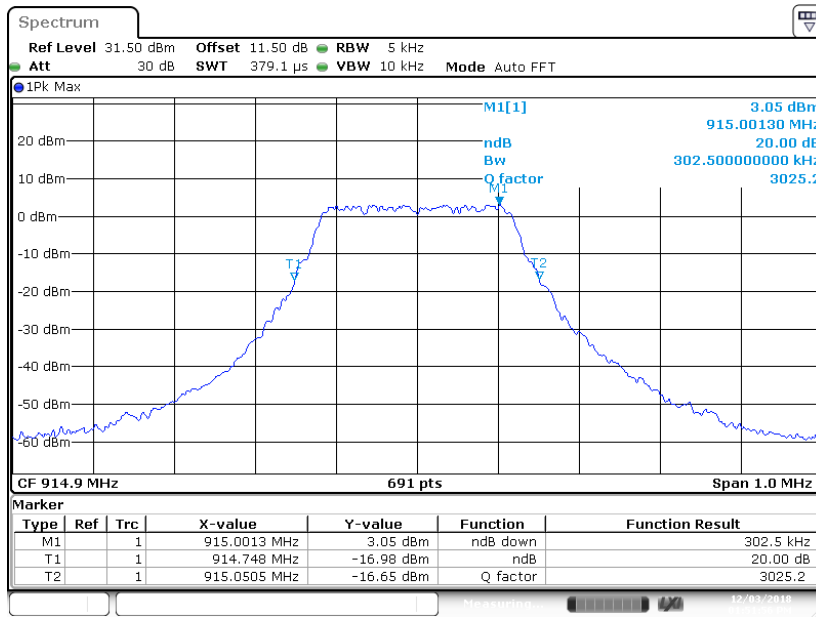

Date: 3 DEC. 2018 13:51:57

***** END OF REPORT *****