



REPORT No.: SZ16120120W04

FCC RF TEST REPORT

APPLICANT : Pycom Ltd
PRODUCT NAME : sipy
MODEL NAME : SiPy 1.0
TRADE NAME : SiPy
BRAND NAME : SiPy
FCC ID : 2AJMTSIPY1
STANDARD(S) : 47 CFR Part 15 Subpart C
ISSUE DATE : 2017-03-20



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.com E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	4
1. GENERAL INFORMATION	5
1.1 EUT DESCRIPTION	5
1.2 TEST STANDARDS AND RESULTS	6
1.3 TEST ENVIRONMENT CONDITIONS	6
2. 47 CFR PART 15C REQUIREMENTS	7
2.1 ANTENNA REQUIREMENT	7
2.1.1 APPLICABLE STANDARD	7
2.1.2 RESULT: COMPLIANT	7
2.2 NUMBER OF HOPPING FREQUENCY	7
2.2.1 REQUIREMENT	7
2.2.2 TEST DESCRIPTION	7
2.2.3 TEST PROCEDURE	8
2.2.4 TEST RESULT	8
2.3 PEAK OUTPUT POWER	10
2.3.1 REQUIREMENT	10
2.3.2 TEST DESCRIPTION	10
2.3.3 TEST RESULT	10
2.4 20dB BANDWIDTH	13
2.4.1 DEFINITION	13
2.4.2 TEST DESCRIPTION	13
2.4.3 TEST PROCEDURE	13
2.4.4 TEST RESULT	13
2.5 CARRIED FREQUENCY SEPARATION	16
2.5.1 DEFINITION	16
2.5.2 TEST DESCRIPTION	16
2.5.3 TEST PROCEDURE	16
2.5.4 TEST RESULT	17
2.6 TIME OF OCCUPANCY (DWELL TIME)	18
2.6.1 REQUIREMENT	18
2.6.2 TEST DESCRIPTION	18



2.6.3	TEST PROCEDURE.....	18
2.6.4	TEST RESULT.....	18
2.7	CONDUCTED SPURIOUS EMISSIONS AND BAND EDGE	20
2.7.1	REQUIREMENT.....	20
2.7.2	TEST DESCRIPTION	20
2.7.3	TEST PROCEDURE.....	20
2.7.4	TEST RESULT.....	21
2.8	CONDUCTED EMISSION.....	25
2.8.1	REQUIREMENT.....	25
2.8.2	TEST DESCRIPTION	25
2.8.3	TEST RESULT.....	26
2.9	RADIATED EMISSION	28
2.9.1	REQUIREMENT.....	28
2.9.2	TEST DESCRIPTION	29
2.9.3	TEST PROCEDURE.....	31
2.9.4	TEST RESULT.....	31
<u>ANNEX A GENERAL INFORMATION.....</u>		<u>35</u>

Change History		
Issue	Date	Reason for change
1.0	2017-03-03	First edition
2.0	2017-03-20	Second edition



REPORT No.: SZ16120120W04

TEST REPORT DECLARATION

Applicant	Pycom Ltd
Applicant Address	Registered Office 57 Avenue Road Cranleigh, Surrey GU6 7LJ UK
Manufacturer	In-Tech Electronics Ltd
Manufacturer Address	2/F Rhythm Home, 119 Shazui Road, Futian, Shenzhen, Guangdong, P.R.China
Product Name	sipy
Model Name	SiPy 1.0
Brand Name	SiPy
HW Version	1.0r
SW Version	1.0
Test Standards	47 CFR Part 15 Subpart C
Test Date	2016-12-26 to 2017-03-20
Test Result	PASS

Tested by : Li Jingzong
Li Jingzong

Reviewed by : Qiu Xiaojun
Qiu Xiaojun

Approved by : Peng Huarui
Peng Huarui

MORLAB GROUPFL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. ChinaTel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.com E-mail: service@morlab.cn



1. GENERAL INFORMATION

1.1 EUT Description

EUT Type.....	sipy
Serial No.	N.A
Hardware Version.....	1.0r
Software Version	1.0
Applicant.....	Pycom Ltd Registered Office 57 Avenue Road Cranleigh, Surrey GU6 7LJ UK
Manufacturer	In-Tech Electronics Ltd 2/F Rhythm Home,119 Shazui Road,Futian,Shenzhen,Guangdong,P.R.China
Frequency Range.....	The frequency range used is 902.2MHz – 904.70MHz
Modulation Type.....	FHSS
Data Type	DBPSK
Antenna Type.....	Dedicated Antenna
Antenna Gain.....	2.2dBi

NOTE:

1. The EUT is a sipy, it contains Radio Module operating at 900MHz ISM band; It has 54 channels(9 Macro channels *6 Micro channels),the lowest channel 902.2MHz, middle channel 903.3MHz and highest channel 904.7MHz were tested in this report.
2. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (900 MHz ISM Band Frequency Hopping Spread Spectrum Transmitter) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Test data	Result
1	15.203	Antenna Requirement	N.A	<u>PASS</u>
2	15.247(a)	Number of Hopping Frequency	Dec 29, 2016	<u>PASS</u>
3	15.247(b)	Peak Output Power	Jan 04, 2017	<u>PASS</u>
4	15.247(a)	20dB Bandwidth	Jan 06, 2017	<u>PASS</u>
5	15.247(a)	Carrier Frequency Separation	Dec 29, 2016	<u>PASS</u>
6	15.247(a)	Time of Occupancy (Dwell time)	Dec 30, 2016	<u>PASS</u>
7	15.247(d)	Conducted Spurious Emission and Band Edge	Jan 04, 2017& Jan 10, 2017& Mar 20, 2017	<u>PASS</u>
8	15.209 15.247(d)	Radiated Emission	Feb 24, 2017	<u>PASS</u>

NOTE:

The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and DA-00-705.

1.3 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR PART 15C REQUIREMENTS

2.1 Antenna requirement

2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2 Result: Compliant

The maximum gain of antenna was defined by manufacturer. The max gain is 2.2dBi. The antenna type is Dedicated Antenna. For more info, please refer to the user manual.


2.2 Number of Hopping Frequency

2.2.1 Requirement

According to FCC section 15.247(a)(1)(i), frequency hopping systems operating in the 902MHz to 928MHz bands shall use at least 50 hopping frequencies if the 20dB bandwidth of the hopping channel is less than 250KHz; or at least 25 hopping frequencies if the 20dB bandwidth of the hopping channel is 250KHz or greater.

2.2.2 Test Description

A. Test Setup:

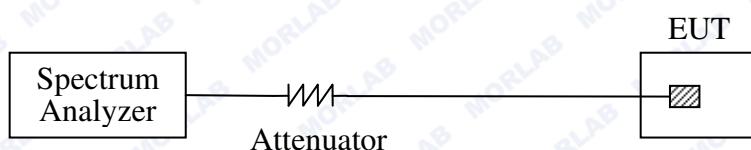

The EUT is powered by the USB, is coupled to the Spectrum Analyzer (SA) with Attenuators the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the EUT is activated by the USB cable.

B. Equipments List:

Please reference ANNEX A(1.5).



2.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq 1\%$ of the span

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize


2.2.4 Test Result

The EUT operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.

A. Test Verdict:


Frequency Block (MHz)	Measured Channel Numbers	Limit	Refer to Plot	Verdict
902 - 928	9*6=54	≥ 50	Plot A	PASS

B. Test Plots:

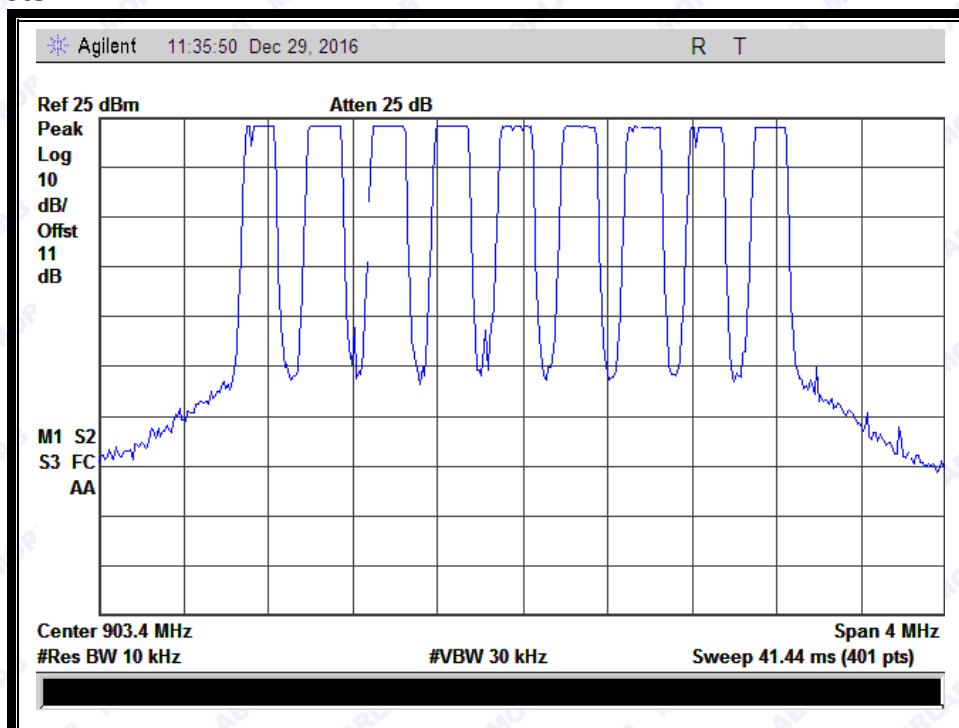



REPORT No.: SZ16120120W04

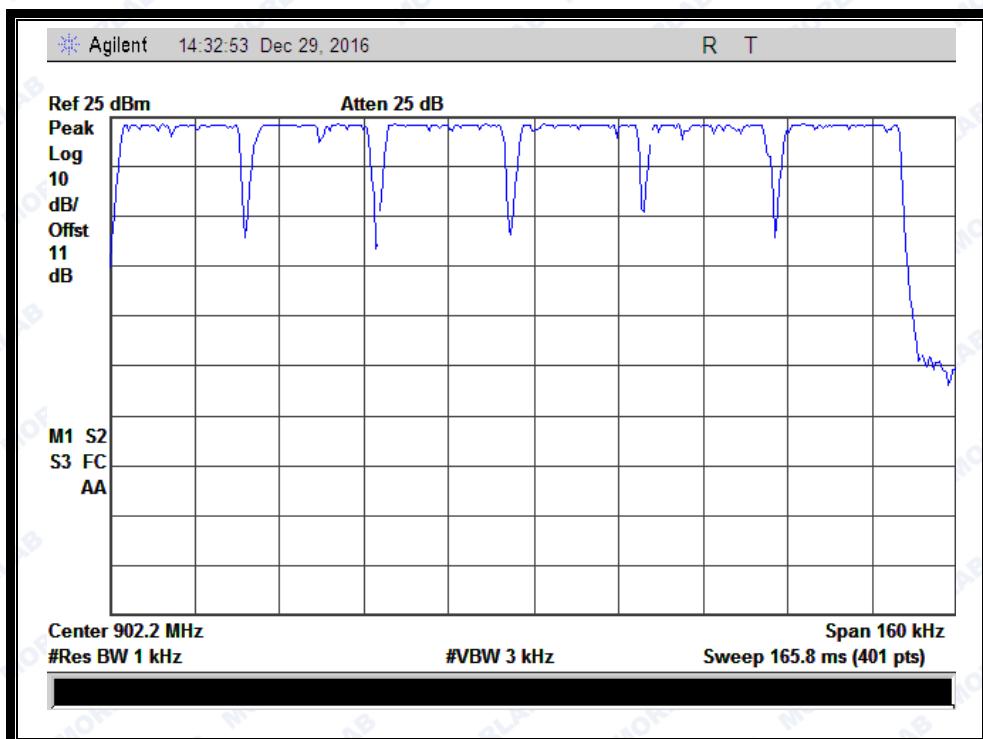

(Plot B: Number of micro channels in one single macro channel zoomed)




2.3 Peak Output Power

2.3.1 Requirement

According to FCC section 15.247(b)(2), for frequency hopping systems that operates in the 902MHz to 928MHz band employing at least 50 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt, and 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels.

2.3.2 Test Description

A. Test Setup:

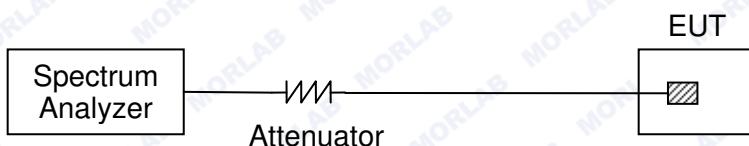

The EUT is powered by the USB, is coupled to the Spectrum Analyzer (SA) with Attenuators the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the EUT is activated by the USB cable.

B. Equipments List:

Please reference ANNEX A(1.5).

2.3.3 Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the EUT.


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power			Limit (W)	Verdict
		dBm	W	Refer to Plot		
1	902.2	23.12	0.2051	Plot A	1	PASS
27	903.3	23.05	0.2018	Plot B		PASS
54	904.7	22.94	0.1968	Plot C		PASS


B. Test Plot:



REPORT No.: SZ16120120W04

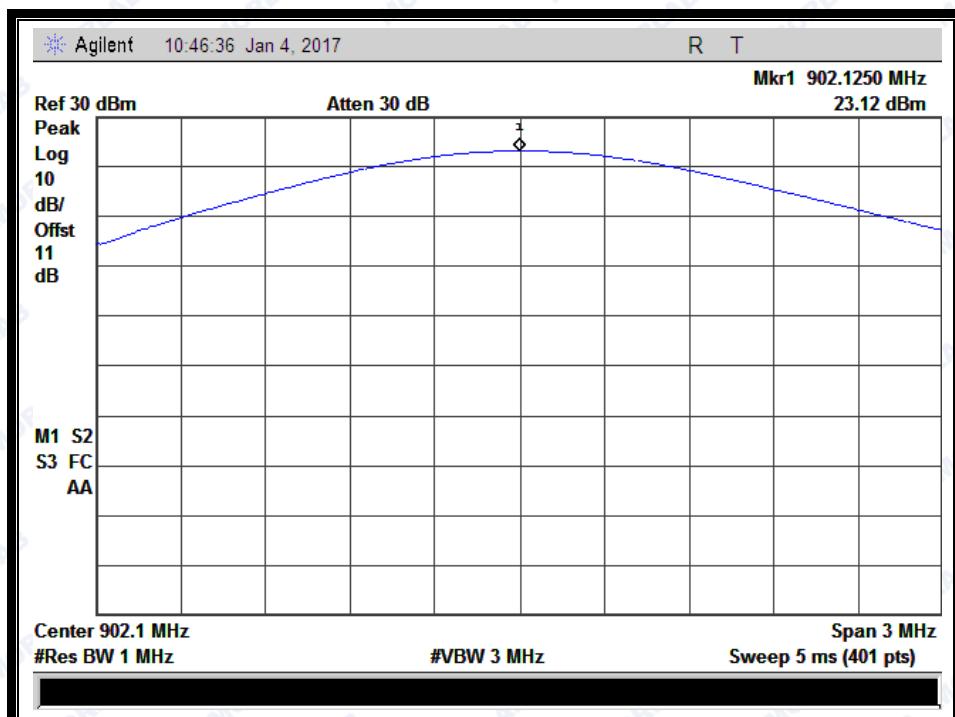


(Plot A: Channel = 1)

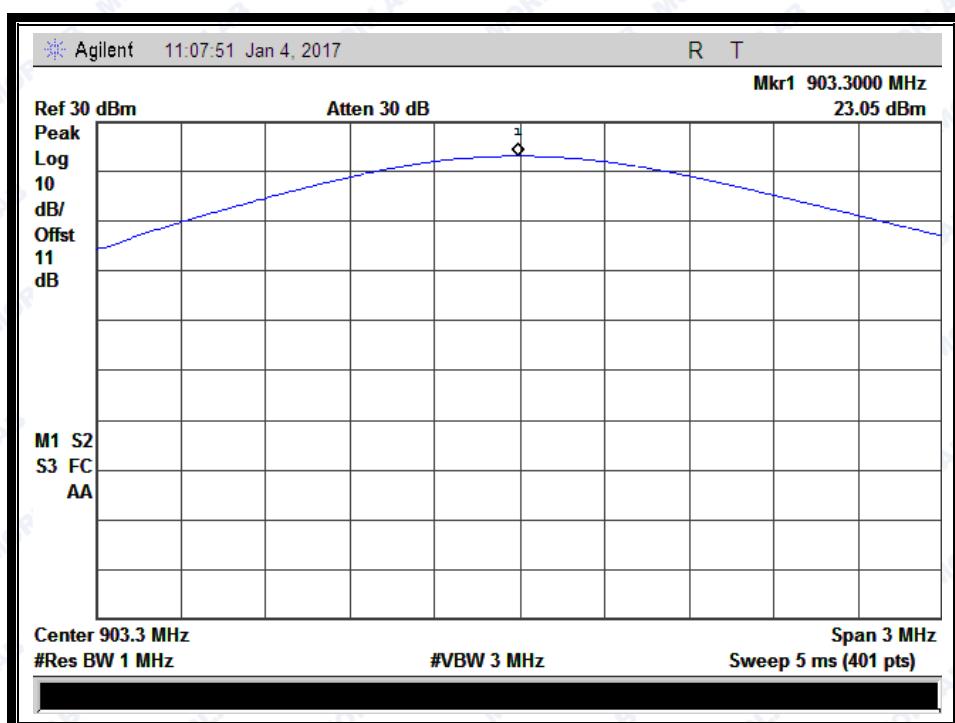

(Plot B: Channel = 27)



REPORT No.: SZ16120120W04

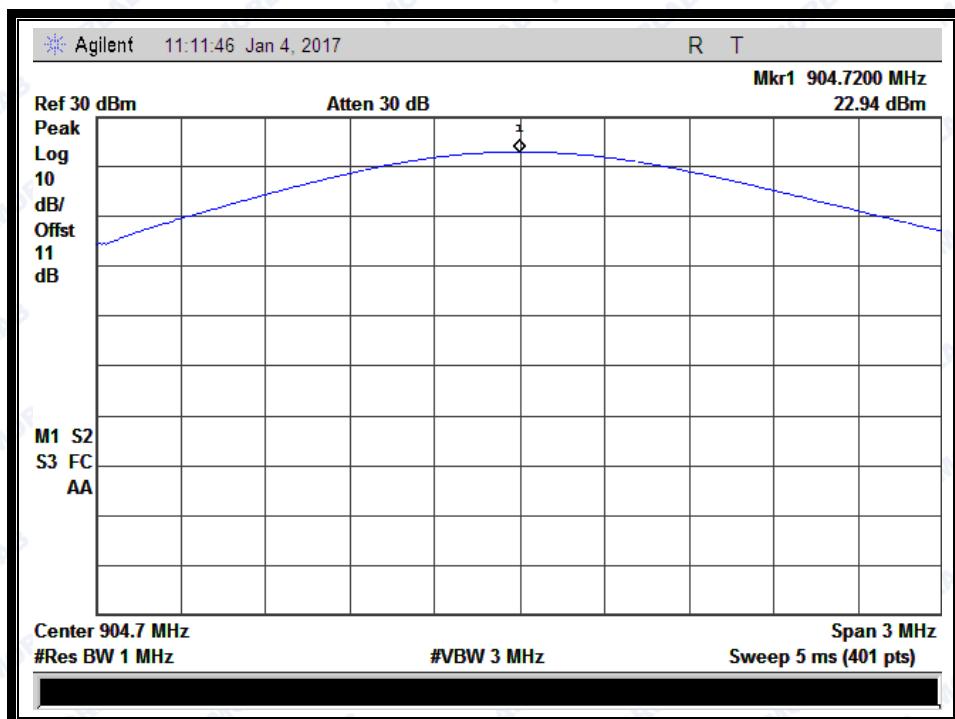

(Plot C: Channel = 54)




2.4 20dB Bandwidth

2.4.1 Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \times \log_{10} 1\% = 20\text{dB}$) taking the total RF output power.

2.4.2 Test Description

A. Test Setup:

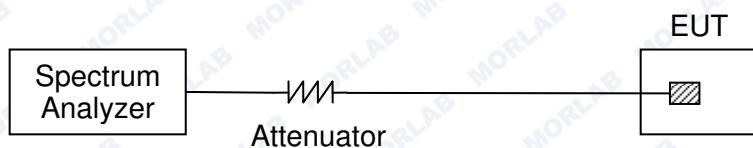

The EUT, which is powered by the USB, is coupled to the Spectrum Analyzer (SA) with Attenuators the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the EUT is activated by the USB cable.

B. Equipments List:

Please reference ANNEX A(1.5).

2.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW \geq 1% of the 20 dB bandwidth

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold


2.4.4 Test Result

A. Test Verdict:


Channel	Frequency (MHz)	20dB Bandwidth (KHz)	Refer to Plot
1	902.2	23.652	Plot A
27	903.3	23.652	Plot B
54	904.7	23.421	Plot C

**B. Test Plots:**

(Plot A: Channel = 1)

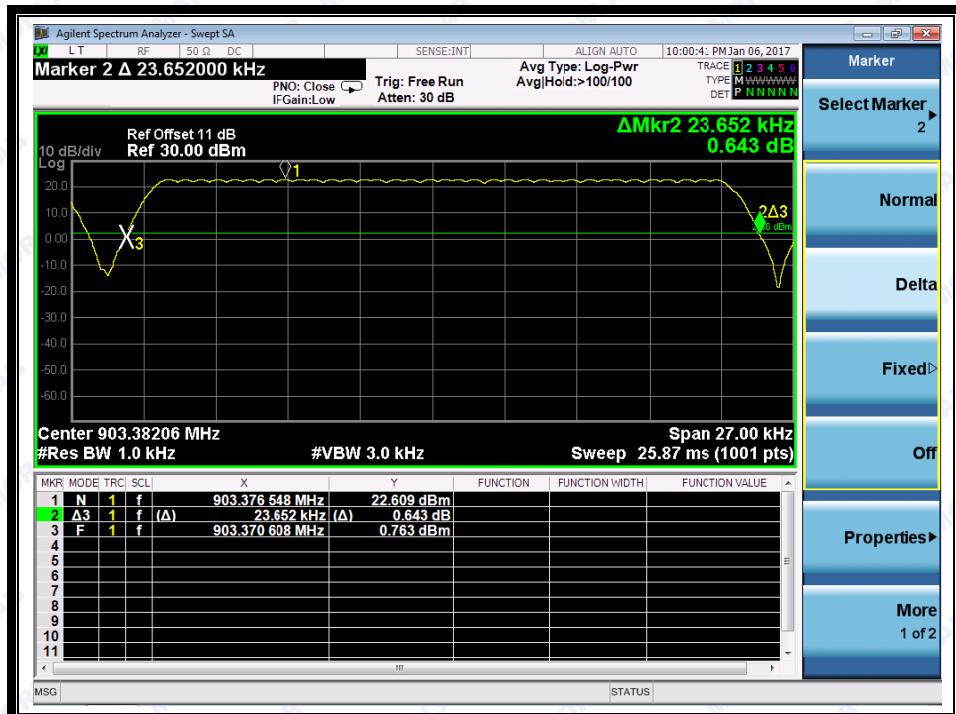

(Plot B: Channel = 27)

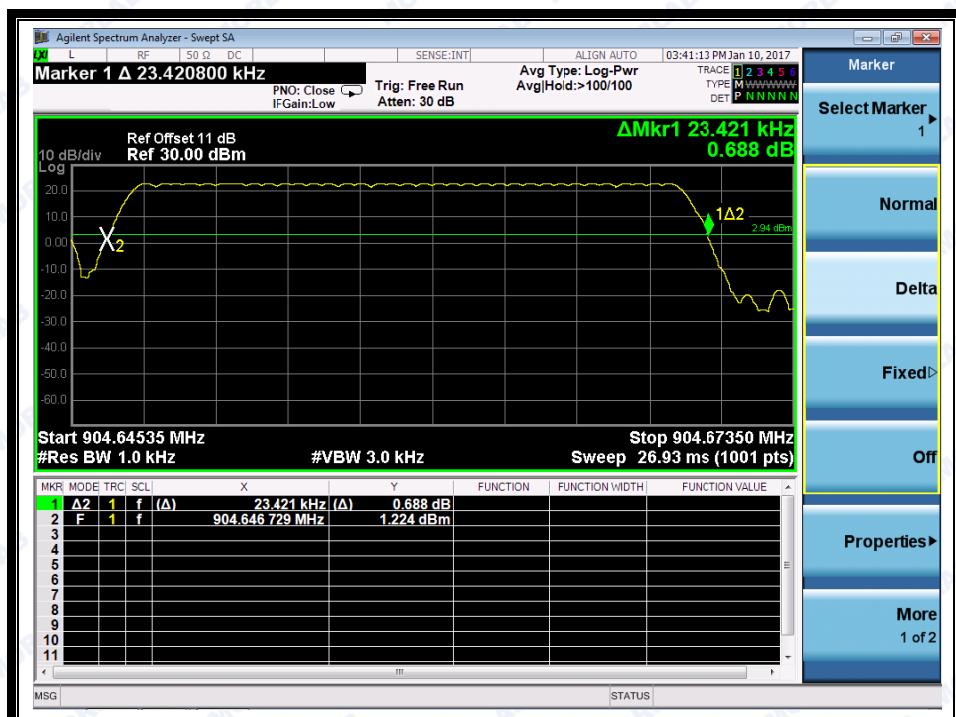

(Plot C: Channel = 54)




2.5 Carried Frequency Separation

2.5.1 Definition

According to FCC section 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.5.2 Test Description

A. Test Setup:



The RFID Reader Module of the EUT, which is powered by the AC adapter, is coupled to the Spectrum Analyzer (SA) with Attenuators the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the RFID Reader Module of the EUT is activated by the PC via Lan port.

B. Equipments List:

Please reference ANNEX A(1.5).

2.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) \geq 1% of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold


Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.



2.5.4 Test Result

The EUT operates at hopping-on test mode.

For any adjacent channels (two adjacent micro channels), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater. The following picture show the two adjacent micro channels separation is 25.339KHz. So, the verdict is PASSING

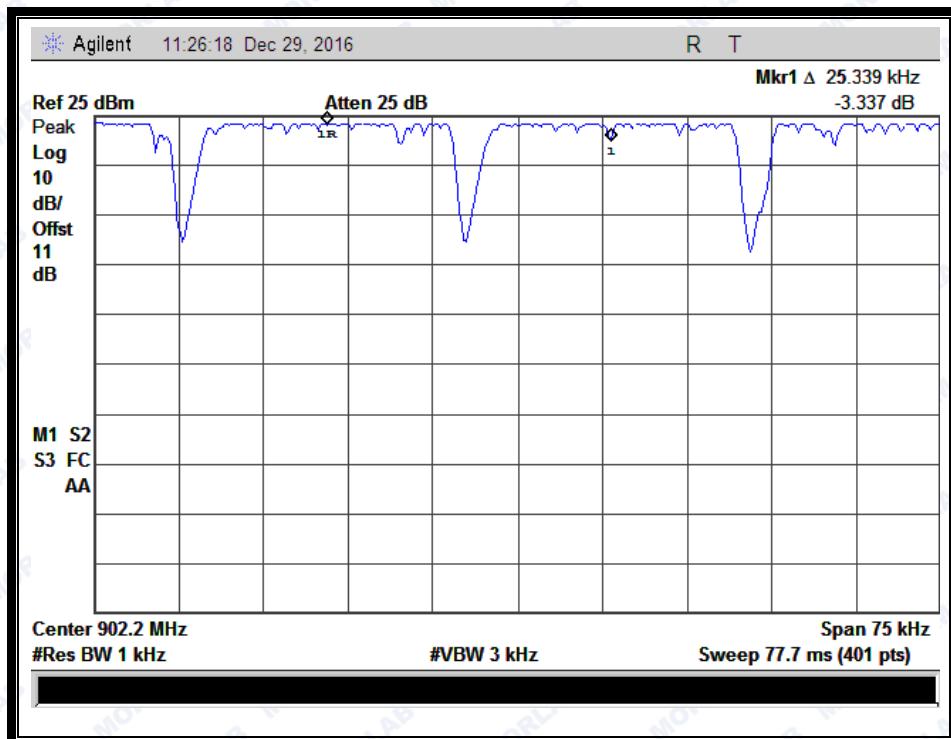

(Carried Frequency Separation)




2.6 Time of Occupancy (Dwell time)

2.6.1 Requirement

According to FCC section 15.247(a)(1)(i), frequency hopping systems in the 902 - 928MHz band shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

2.6.2 Test Description

A. Test Setup:



The EUT which is powered by the USB, is coupled to the Spectrum Analyzer (SA) with Attenuators the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the EUT is activated by the USB cable

B. Equipments List:

Please reference ANNEX A(1.5).

2.6.3 Test Procedure


The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in 20 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 20 second period is equal to (# of pulses in 20s) * pulse width.


2.6.4 Test Result

A. Test Verdict:

Pulse Width (ms)	Refer to Plot	Number of pulse in 20 seconds	Refer to Plot	Average Time of Occupancy (sec)	Limit (sec)	Verdict
348.8	Plot A	1	Plot B	0.3488	0.4	PASS

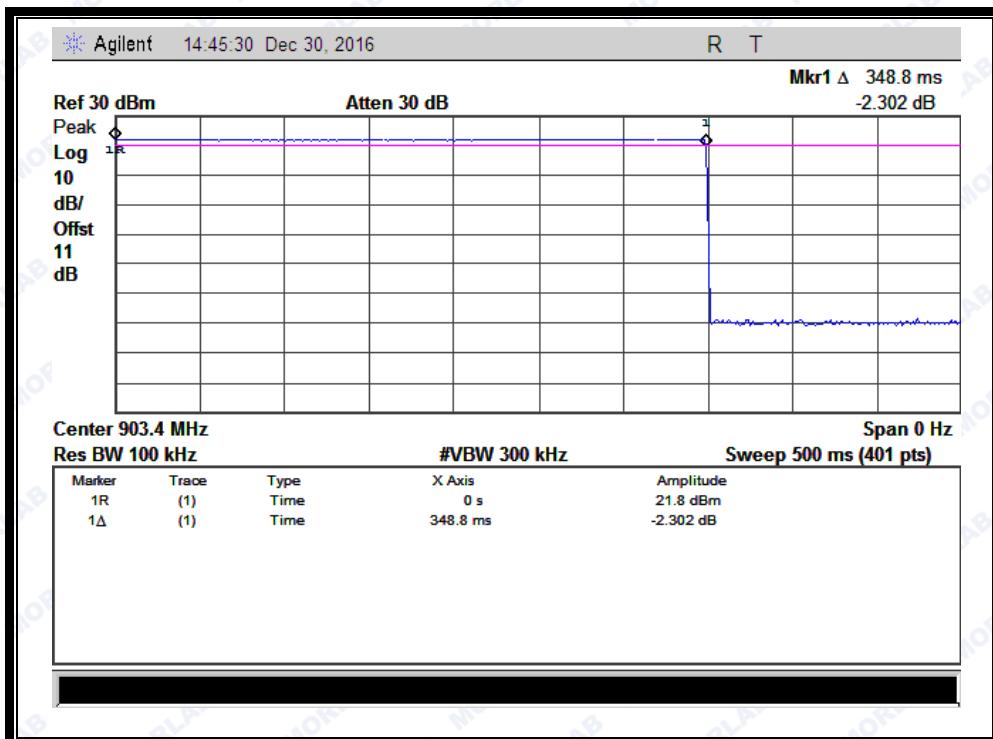**B. Test Plots:**

(Plot A: Pulse width of the burst)

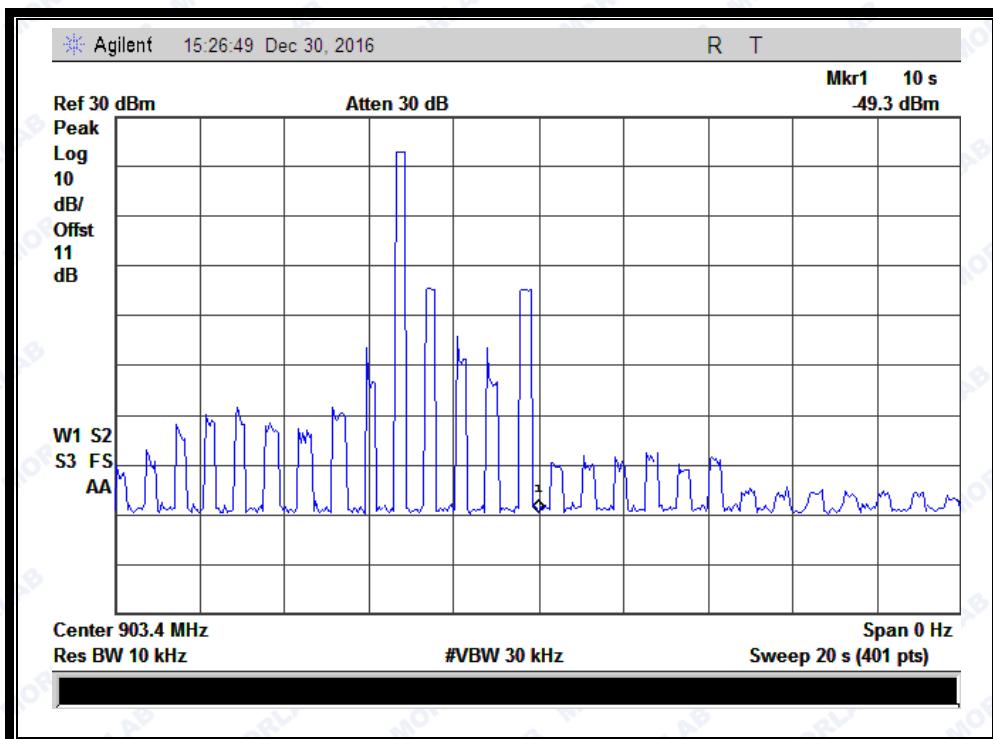

(Plot B: Number of the burst in 20s period)




2.7 Conducted Spurious Emissions and Band Edge

2.7.1 Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2 Test Description

A. Test Setup:



The EUT is powered by the USB, it is coupled to the Spectrum Analyzer (SA) with Attenuators the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the EUT is activated by the USB cable.

B. Equipments List:

Please reference ANNEX A(1.5).

2.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.




2.7.4 Test Result

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
1	902.2	-15.36	Plot A	23.24	3.24	PASS
27	903.3	-15.20	Plot B	23.04	3.04	PASS
54	904.7	-15.27	Plot C	22.95	2.95	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

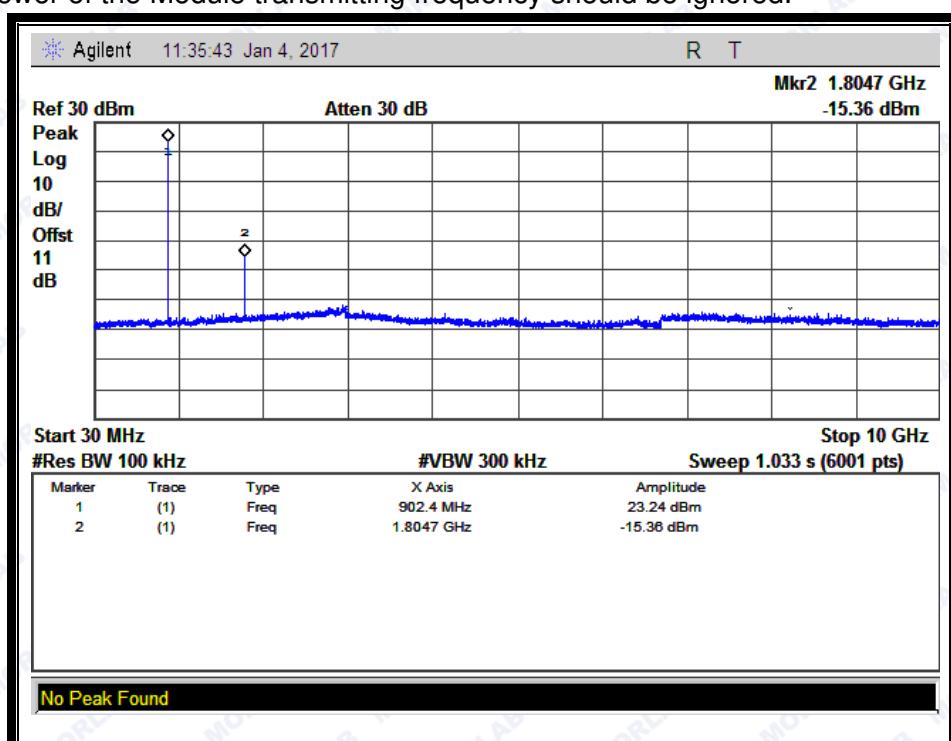

(Plot A: Channel = 1, 30MHz to 10GHz)

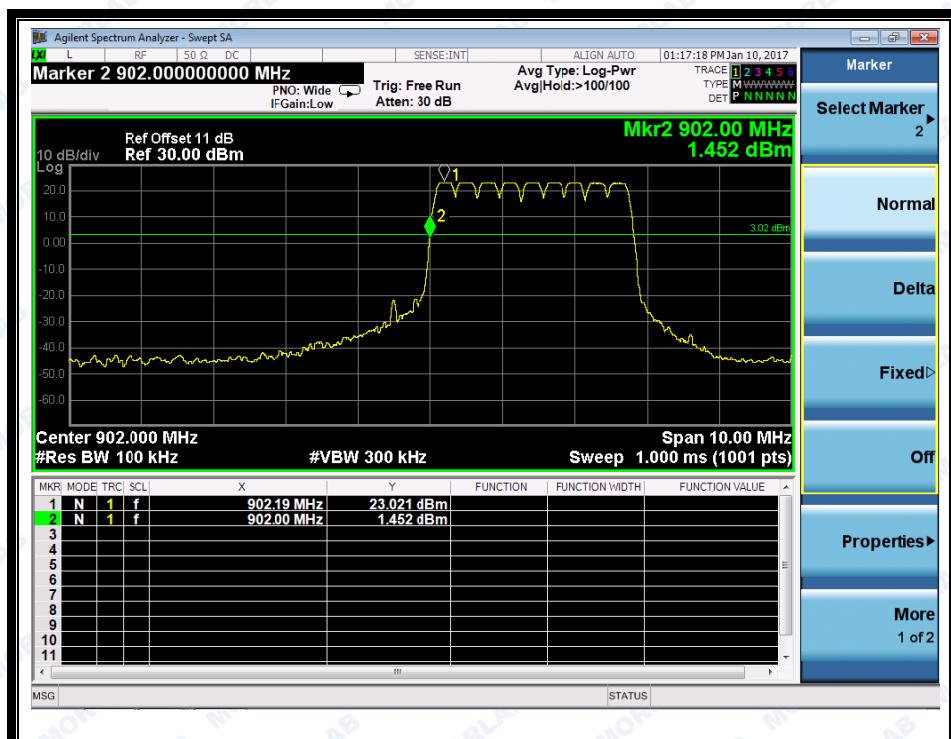


(Channel = 1, Band edge with hopping)

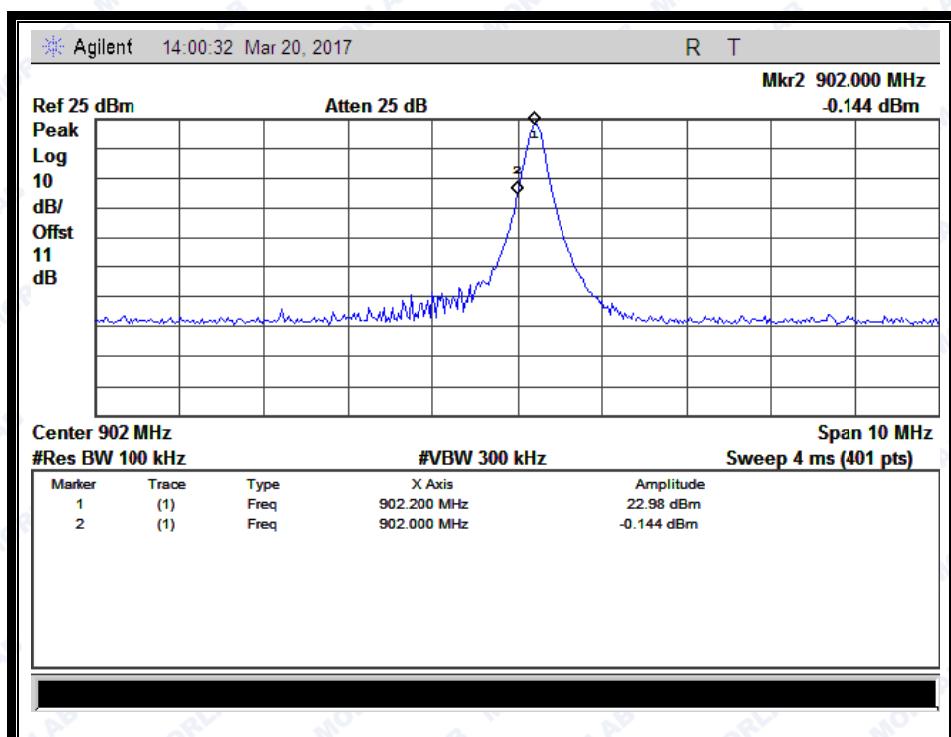


(Channel = 1, Band edge)



REPORT No.: SZ16120120W04

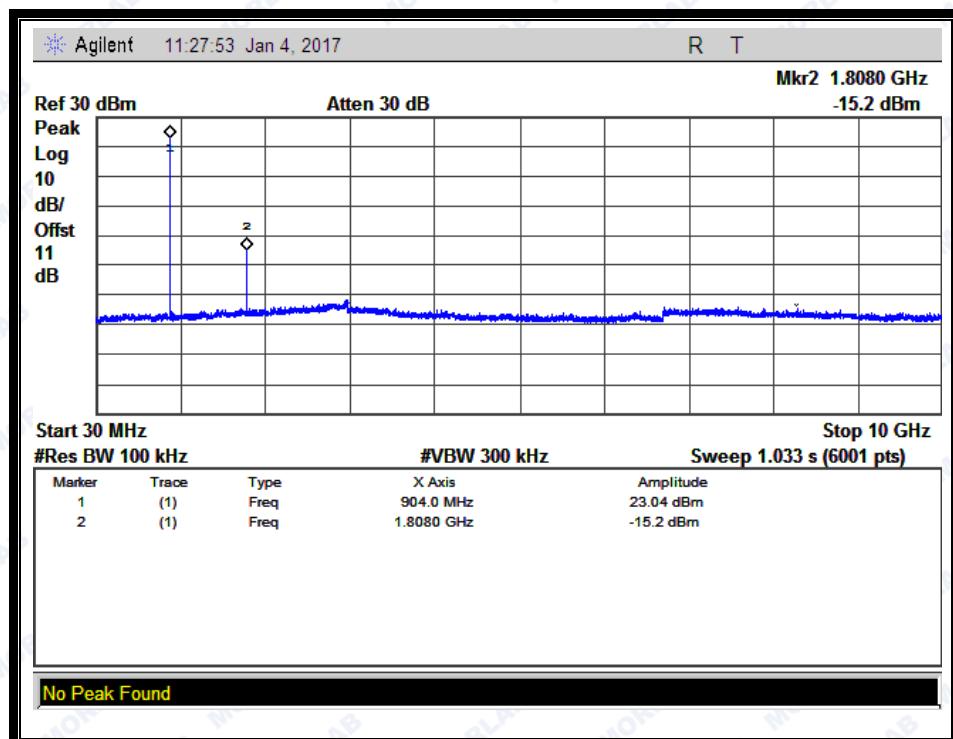


(Plot B: Channel = 27, 30MHz to 10GHz)

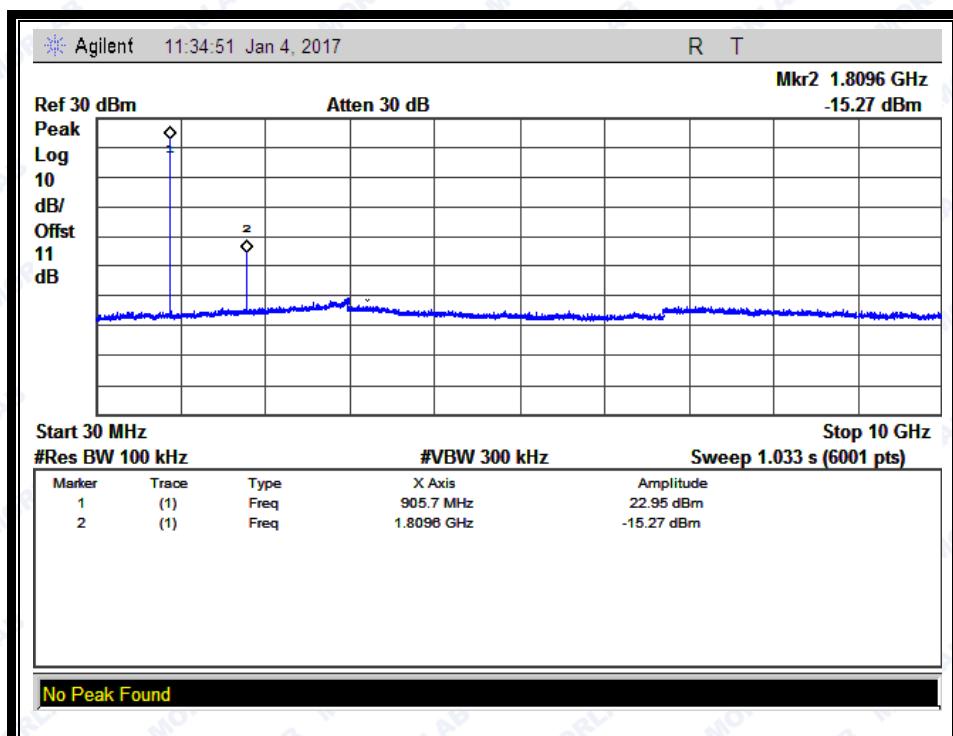


(Plot C: Channel = 54, 30MHz to 10GHz)



REPORT No.: SZ16120120W04

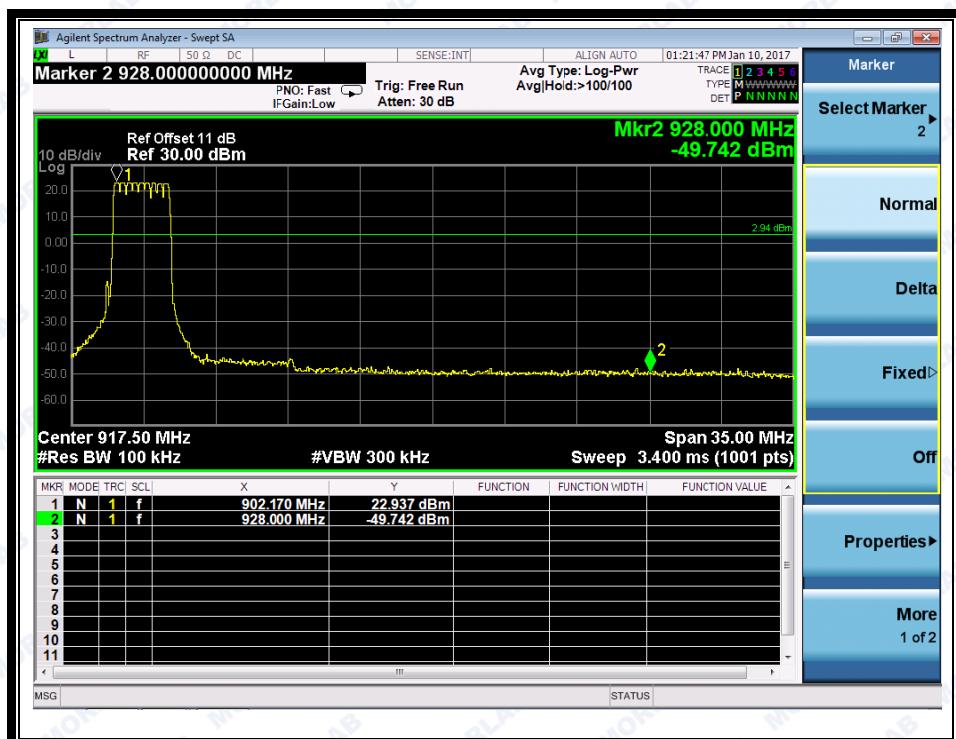

(Channel = 54, Band edge with hopping)

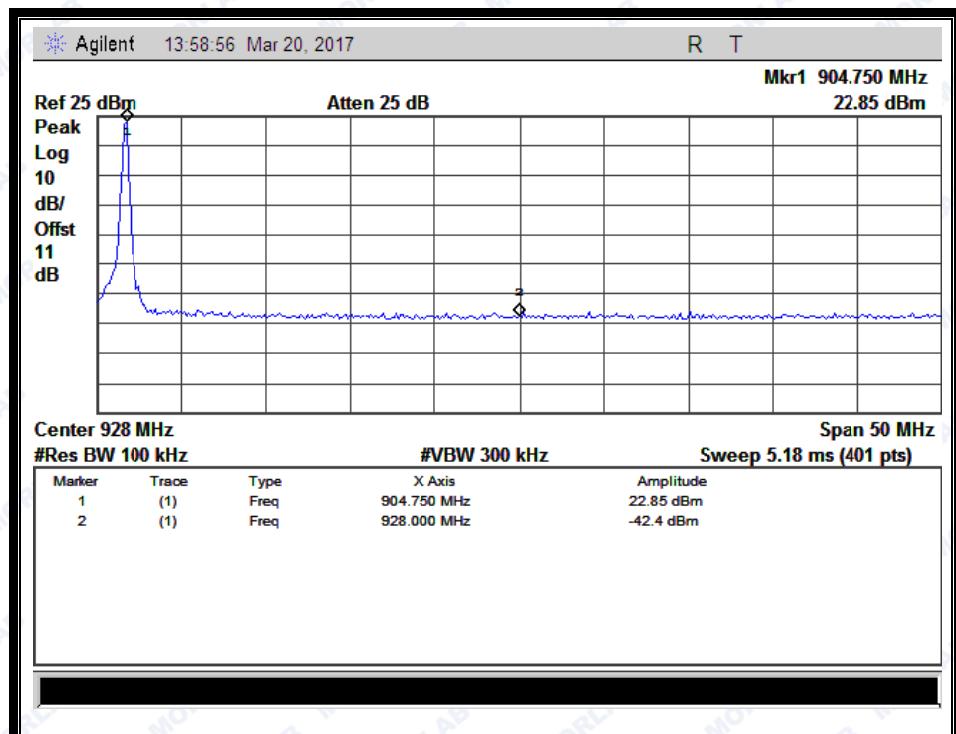

(Channel = 54, Band edge)

2.8 Conducted Emission

2.8.1 Requirement

According to RSS-GEN section 8.8, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5- 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.8.2 Test Description

A. Test Setup:

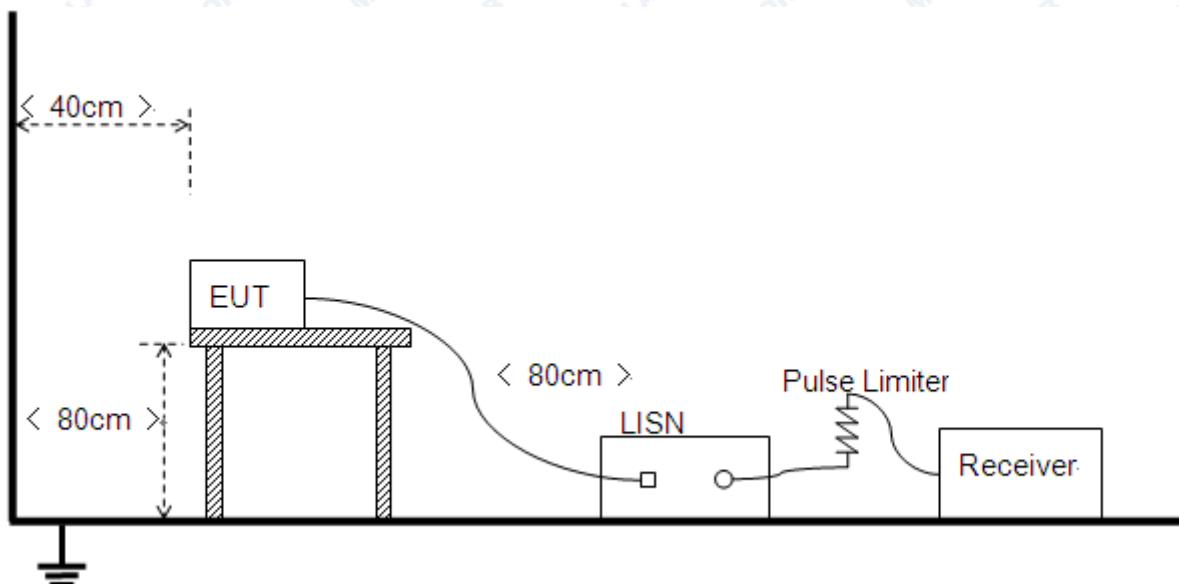

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10:2013

The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.



B. Equipments List:

Please reference ANNEX A(1.5).

2.8.3 Test Result


The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

A. Test setup:

The EUT configuration of the emission tests is EUT + Link.


Note: The test voltage is AC 120V/60Hz.

B. Test Plots:

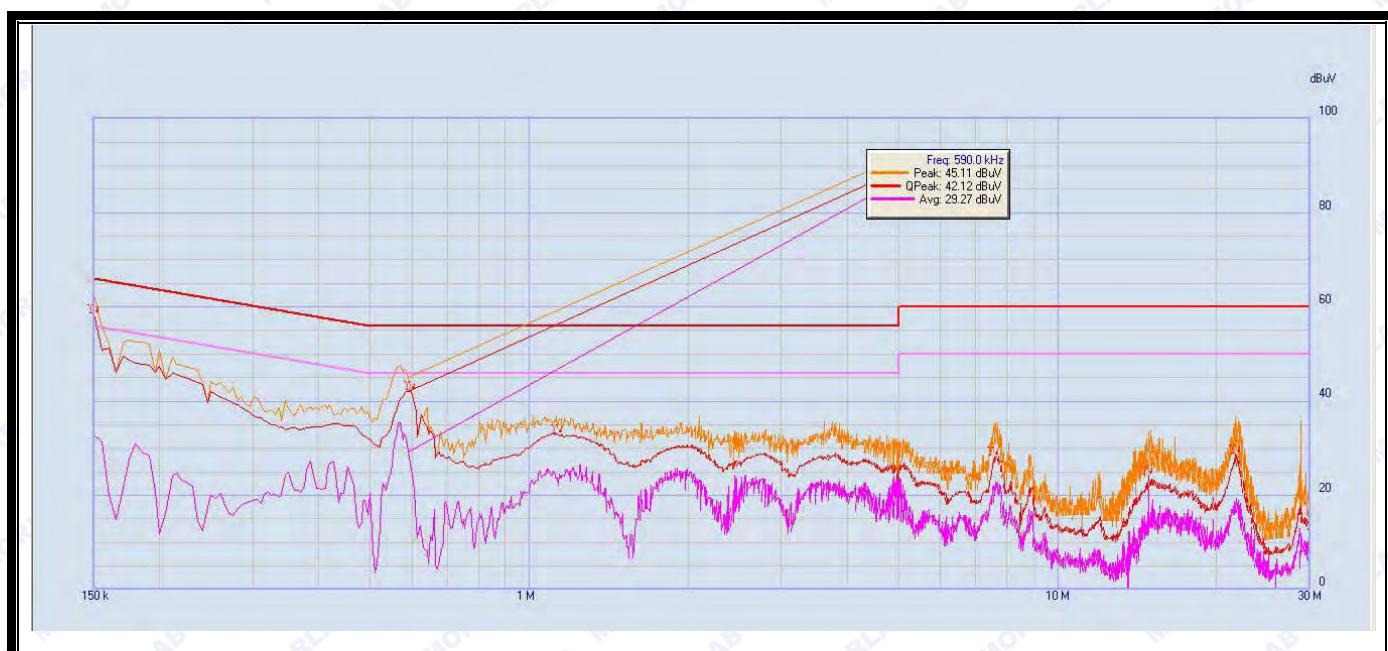

(Plot A: L Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.15	58.45	32.90	66	56	Line	PASS
2	0.595	42.26	26.82	56	46		PASS
3	1.13	33.10	23.60	56	46		PASS
4	7.55	27.73	22.23	60	50		PASS
5	14.84	23.90	21.24	60	50		PASS
6	21.72	28.23	18.75	60	50		PASS

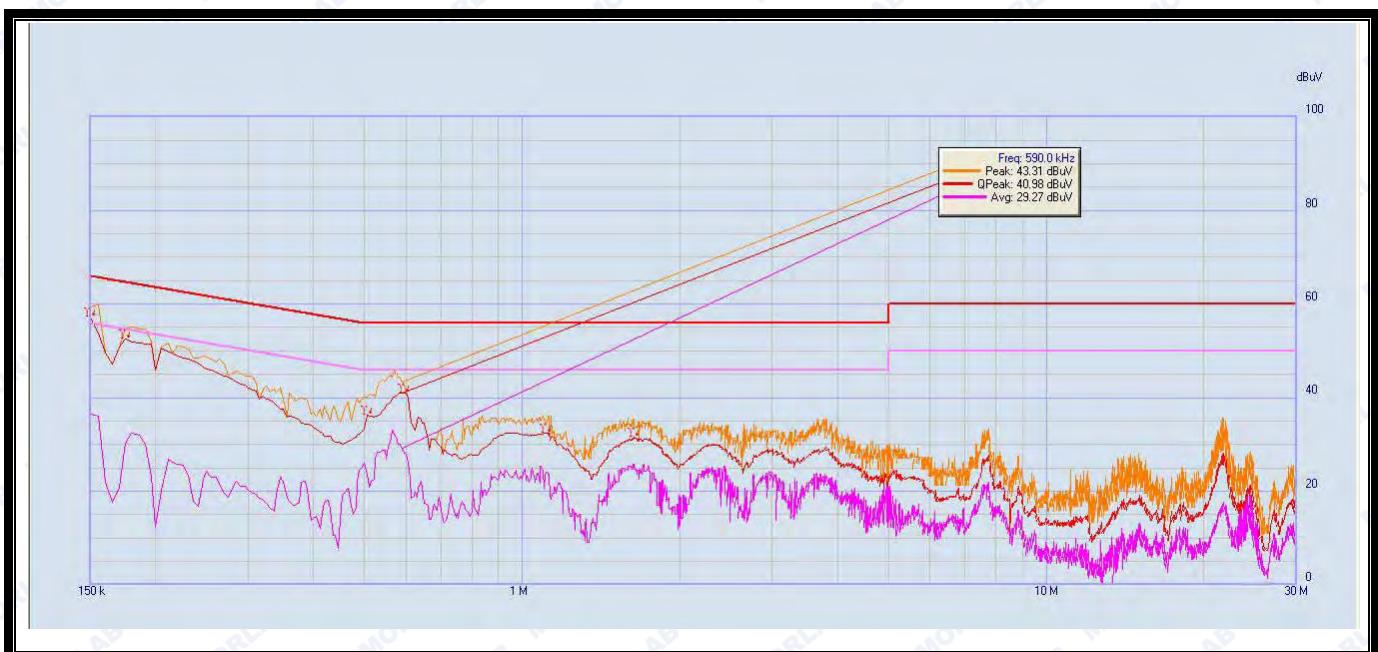

(Plot B: N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.15	57.17	36.38	66	56	Line	PASS
2	0.175	52.49	30.26	65.29	55.29		PASS
3	0.505	36.22	23.72	56	46		PASS
4	0.595	40.99	28.15	56	46		PASS
5	1.11	32.47	23.96	56	46		PASS
6	1.64	31.23	24.76	56	46		PASS



2.9 Radiated Emission

2.9.1 Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.9.2 Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

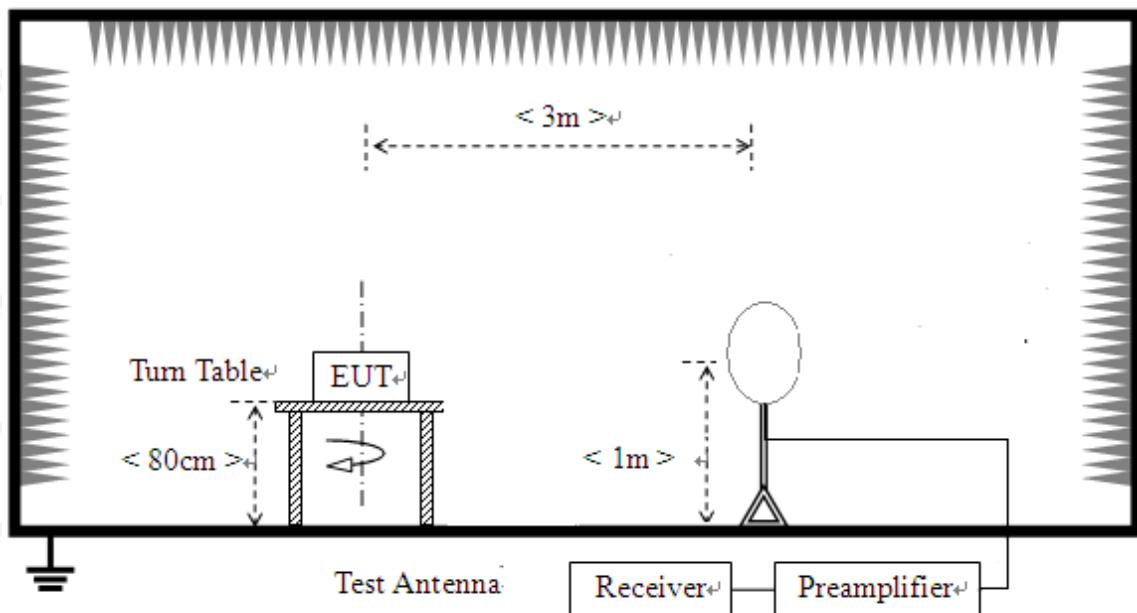

- 2) For radiated emissions from 30MHz to 1GHz

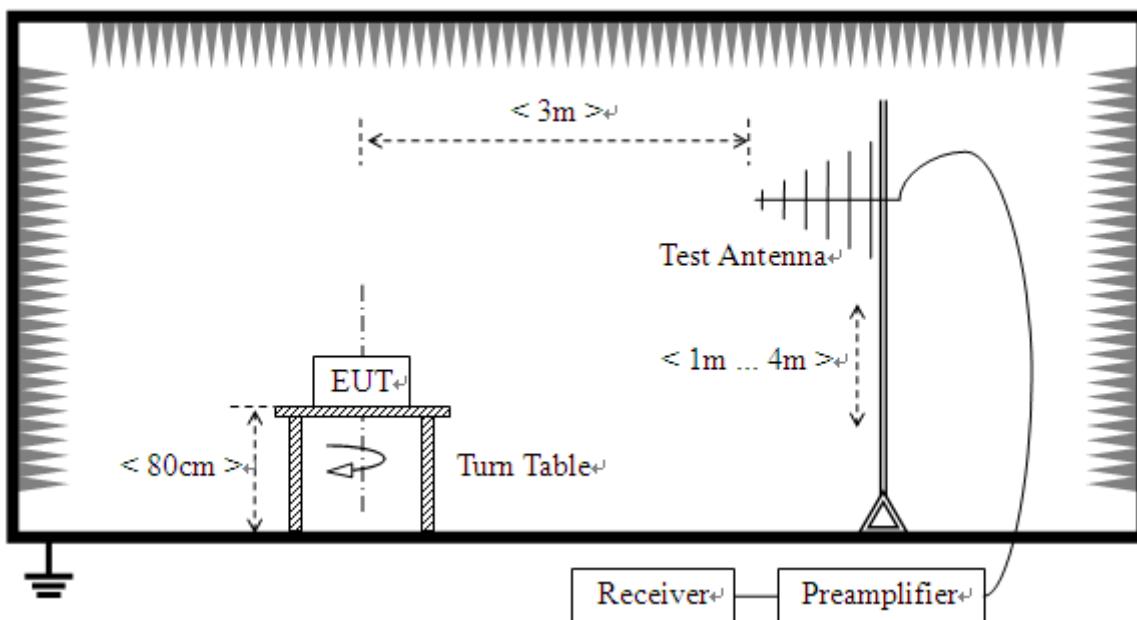

3) For radiated emissions above 1GHz

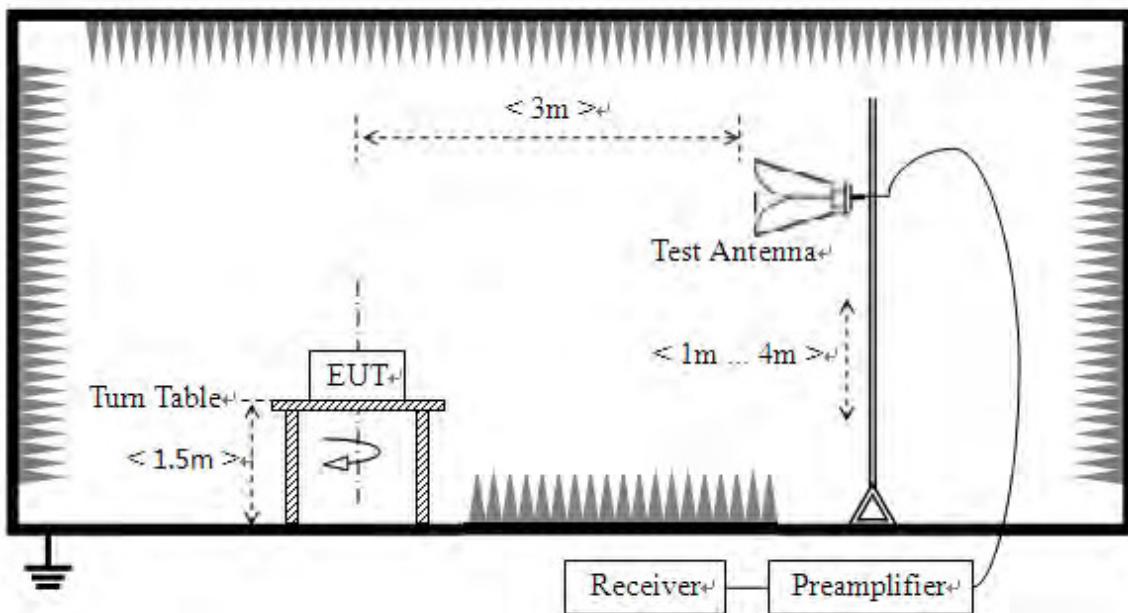

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10:2013. For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10:2013.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant



emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX A(1.5).

2.9.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.9.4 Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor AT and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

**A. Test Plots for the Whole Measurement Frequency Range:**

Plots for Channel = 1



Fre. (MHz)	Pk (dB μ V/m)	QP (dB μ V/m)	AV (dB μ V/m)	Limit-PK (dB μ V/m)	Limit-QP (dB μ V/m)	Limit-AV (dB μ V/m)	Antenna	Verdict
146.546	39.61	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
639.437	33.53	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
902.200	39.00	N.A	N.A	N.A	46.00	N.A	Horizontal	N.A
2440.576	46.09	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
4644.881	45.90	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
8445.426	47.43	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(Plot A.1: 30MHz to 10GHz, Antenna Horizontal @channel 1)




Fre. (MHz)	Pk (dB μ V/m)	QP (dB μ V/m)	AV (dB μ V/m)	Limit-PK (dB μ V/m)	Limit-QP (dB μ V/m)	Limit-AV (dB μ V/m)	Antenna	Verdict
146.546	28.99	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
269.161	29.24	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
902.200	34.43	N.A	N.A	N.A	46.00	N.A	Vertical	N.A
1804.162	42.71	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
2465.546	49.44	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
6555.337	45.69	N.A	N.A	74.0	N.A	54.00	Vertical	PASS


(Plot A.2: 30MHz to 10GHz, Antenna Vertical @ channel 1)



Plot for Channel = 27

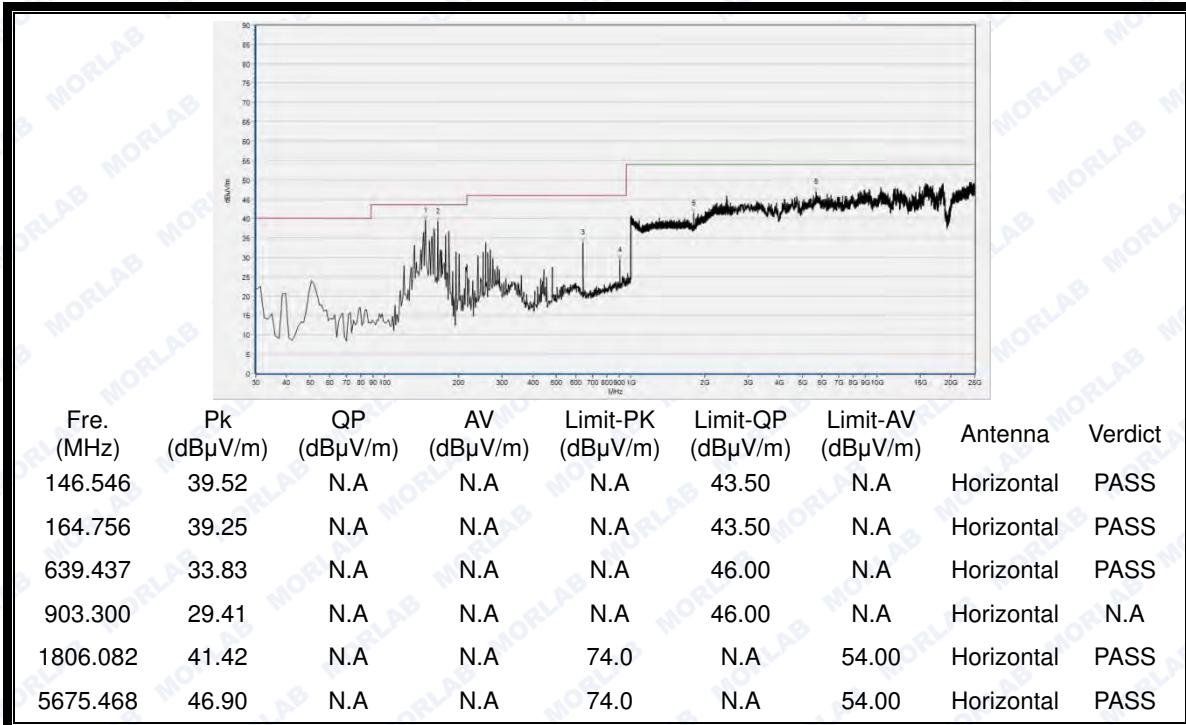


(Plot B.1: 30MHz to 10GHz, Antenna Horizontal @ channel 27)

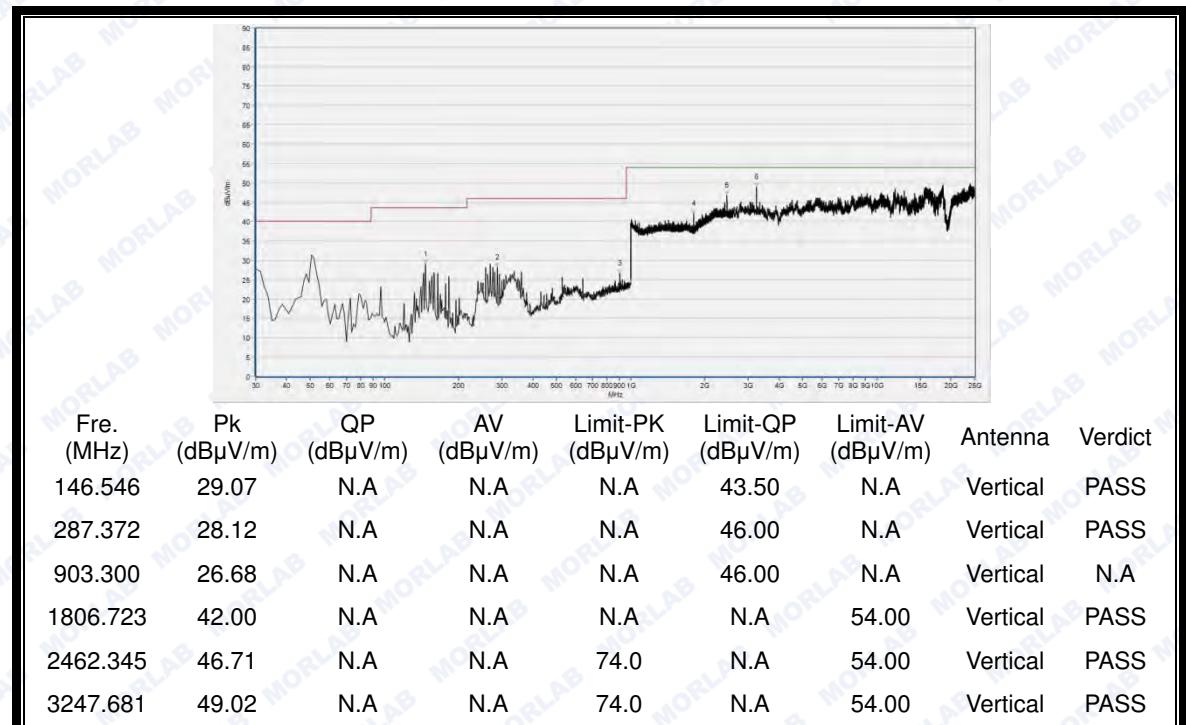


(Plot B.2: 30MHz to 10GHz, Antenna Vertical @ channel 27)



Plot for Channel = 54

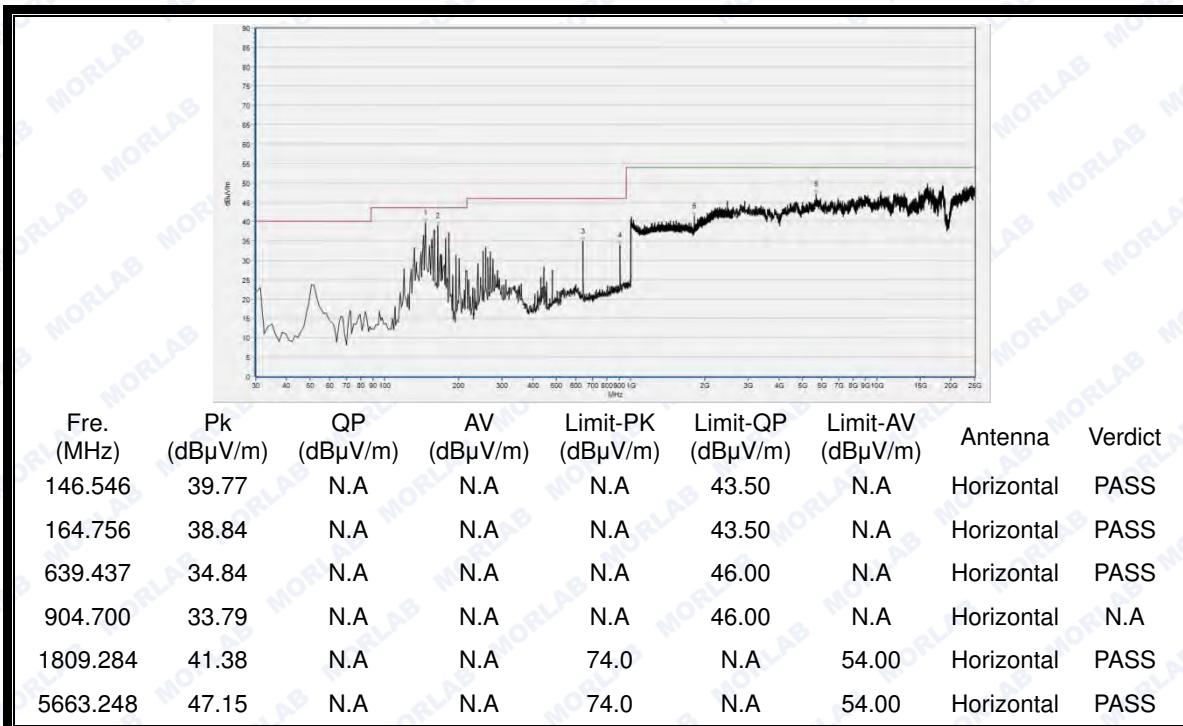

(Plot C.1: 30MHz to 10GHz, Antenna Horizontal @ channel 54)

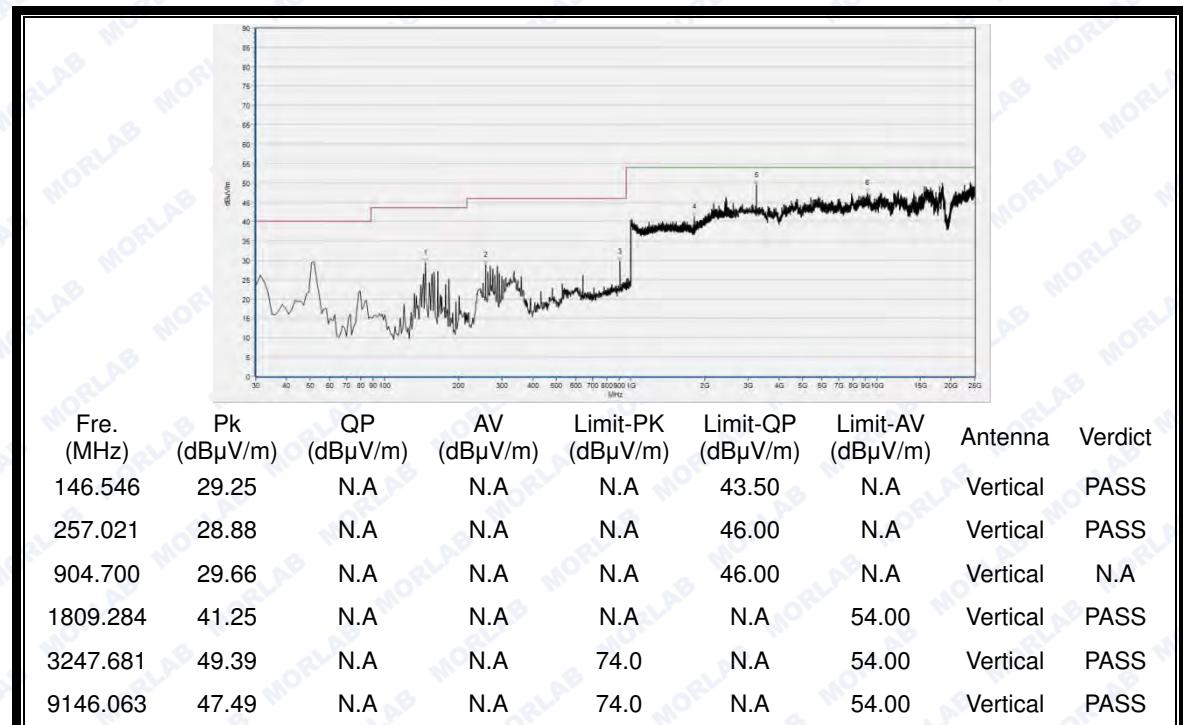

(Plot C.2: 30MHz to 10GHz, Antenna Vertical @channel 54)



ANNEX A GENERAL INFORMATION

1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

1.3 Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2013, ANSI C63.4 2009 and CISPR Publication 22; the FCC registration number is 695796.

1.4 Maximum measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Number of Hopping Frequency	±5%
Peak Output Power	±2.22dB
20dB Bandwidth	±5%
Carrier Frequency Separation	±5%
Time of Occupancy (Dwell time)	±5%
Conducted Spurious Emission	±2.77 dB
Restricted Frequency Bands	±5%



REPORT No.: SZ16120120W04

Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2

1.5 Test Equipments Utilized

1.5.1 Conducted Test Equipments

Conducted Test Equipment						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2016.06.02	2017.06.01
2	Power Splitter	NW521	1506A	Weinschel	2016.06.02	2017.06.01
3	Attenuator 1	(N/A.)	10dB	Resnet	2016.06.02	2017.06.01
4	Attenuator 2	(N/A.)	3dB	Resnet	2016.06.02	2017.06.01
5	EXA Signal Analyzer	MY53470836	N9010A	Agilent	2016.12.07	2017.12.06
6	RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
7	Coaxial cable	CB02	RF02	Morlab	N/A	N/A
8	SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.5.2 Conducted Emission Test Equipments

Conducted Emission Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Receiver	US44210471	E7405A	Agilent	2016.06.02	2017.06.01
2	LISN	812744	NSLK 8127	Schwarzbeck	2016.06.02	2017.06.01
3	Service Supplier	100448	CMU200	R&S	2016.06.02	2017.06.01
4	Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2016.06.02	2017.06.01
5	Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

1.5.3 Auxiliary Test Equipment

Auxiliary Test Equipment						
No.	Equipment Name	Model No.	Brand Name	Manufacturer	Cal.Date	Cal.Due Date
1	Computer	T430i	Think Pad	Lenovo	N/A	N/A



REPORT No.: SZ16120120W04

1.5.4 Radiated Test Equipments

Radiated Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
1	System Simulator	GB45360846	8960-E5515C	Agilent	2016.06.02	2017.06.01
2	Receiver	MY54130016	N9038A	Agilent	2016.06.02	2017.06.01
3	Test Antenna - Bi-Log	N/A	VULB9163	Schwarzbeck	2016.07.05	2017.07.04
4	Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2016.07.05	2017.07.04
5	Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2016.07.05	2017.07.04
6	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2016.07.05	2017.07.04
7	Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
8	Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
9	Coaxial cable(N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
10	1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2016.07.05	2017.07.04
11	18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2016.07.05	2017.07.04

1.5.5 Climate Chamber

Climate Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2016.03.25	2017.03.24

1.5.6 Vibration Table

Vibration Table						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000-S015L	CMI-COM	2016.03.25	2017.03.24

1.5.7 Anechoic Chamber

Anechoic Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Changning	2016.03.25	2017.03.24

***** END OF REPORT *****