

#01_WCDMA II_RMC 12.2Kbps_Bottom of Laptop_0mm_Ch9400

Communication System: WCDMA; Frequency: 1880.000 MHz

Medium: HSL_1900_231118 Medium parameters used: $f=1880.000$ MHz; $\sigma=1.40$ S/m; $\epsilon_r=39.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(8.6, 8.6, 8.6); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn703; Calibrated: 2023-05-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156-; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC


Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.531 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.14 dB

SAR (1g) = 1.16 W/kg; SAR (8g) = 0.628 W/kg; SAR (10g) = 0.573 W/kg

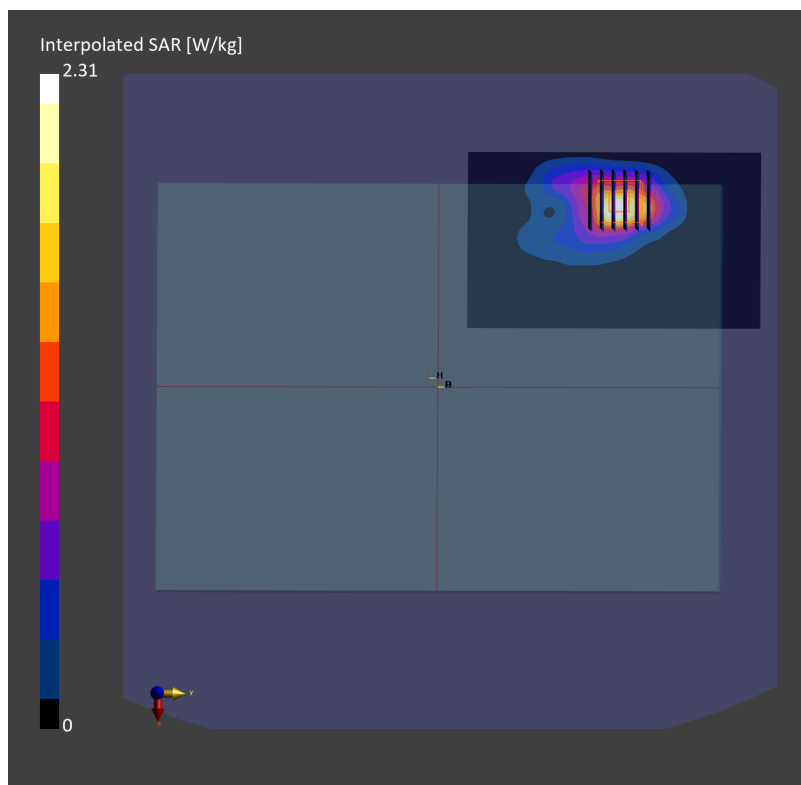

#02_WCDMA IV_RMC 12.2Kbps_Bottom of Laptop_0mm_Ch1312

Communication System: WCDMA; Frequency: 1712.400 MHz

Medium: HSL_1750_231119 Medium parameters used: $f=1712.400$ MHz; $\sigma=1.31$ S/m; $\epsilon_r=40.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(8.92, 8.92, 8.92); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn703; Calibrated: 2023-05-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156-; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC


Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.921 W/kg; SAR (10g) = 0.490 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.07 dB

SAR (1g) = 1.00 W/kg; SAR (8g) = 0.537 W/kg; SAR (10g) = 0.487 W/kg

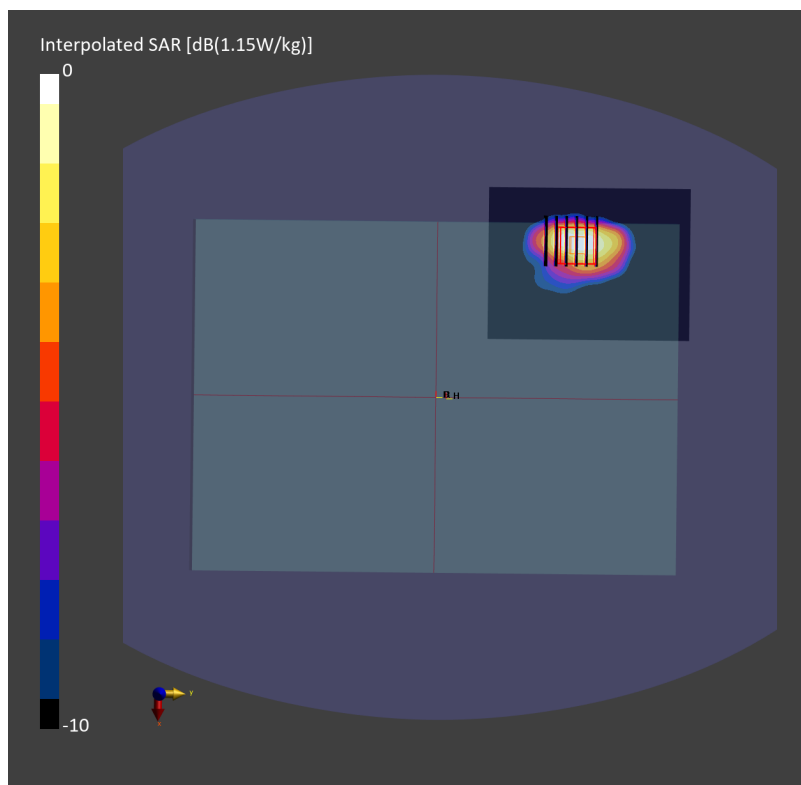

#03_WCDMA V_RMC 12.2Kbps_Bottom of Laptop_0mm_Ch4233

Communication System: WCDMA; Frequency: 846.600 MHz

Medium: HSL_835_231120 Medium parameters used: $f=846.600$ MHz; $\sigma=0.918$ S/m; $\epsilon_r=41.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(10.29, 10.29, 10.29); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn703; Calibrated: 2023-05-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156-; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC


Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.02 W/kg; SAR (10g) = 0.670 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 1.06 W/kg; SAR (8g) = 0.657 W/kg; SAR (10g) = 0.615 W/kg

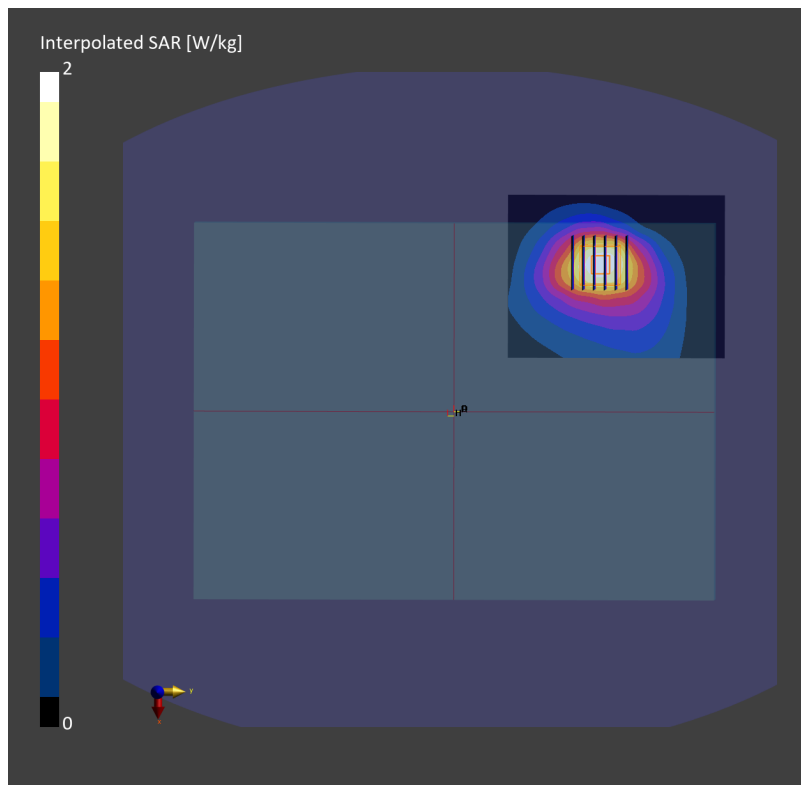

#04_LTE Band 7_20M_QPSK_1_0_Bottom Face_0mm_Ch21100

Communication System: LTE-FDD; Frequency: 2535.000 MHz

Medium: HSL_2600_231121 Medium parameters used: $f=2535.000$ MHz; $\sigma=1.91$ S/m; $\epsilon_r=38.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(7.78, 7.78, 7.78); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn703; Calibrated: 2023-05-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156-; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF


Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.07 W/kg; SAR (10g) = 0.540 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 1.12 W/kg; SAR (8g) = 0.612 W/kg; SAR (10g) = 0.558 W/kg

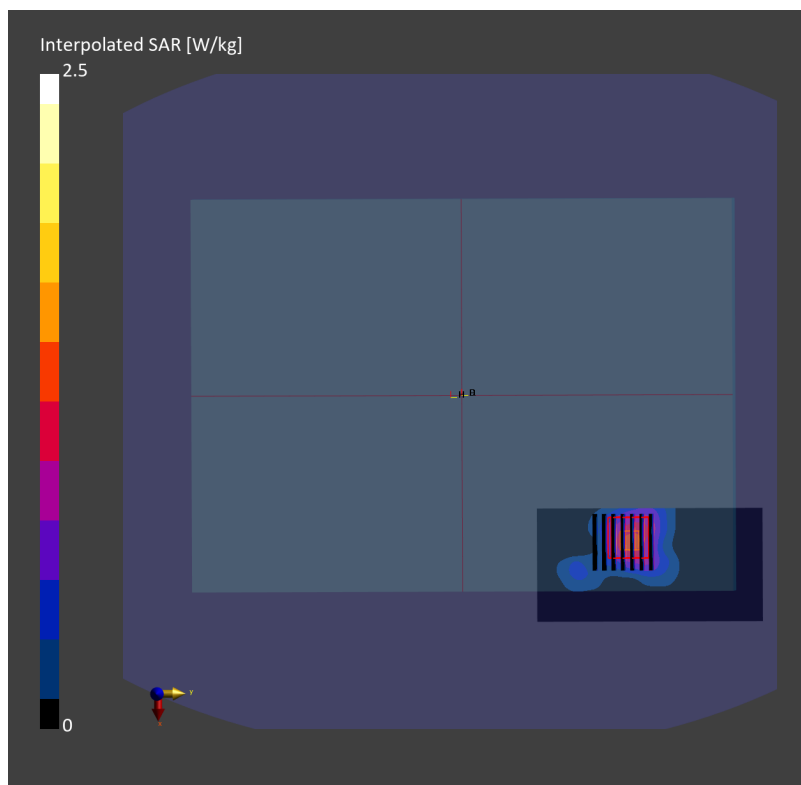

#05_LTE Band 12_10M_QPSK_1_0_Bottom of Laptop_0mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_750_231126 Medium parameters used: $f=707.500$ MHz; $\sigma=0.882$ S/m; $\epsilon_r=42.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(10.36, 10.36, 10.36); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn703; Calibrated: 2023-05-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156-; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH


Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.865 W/kg; SAR (10g) = 0.567 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.11 dB

SAR (1g) = 0.881 W/kg; SAR (8g) = 0.558 W/kg; SAR (10g) = 0.522 W/kg

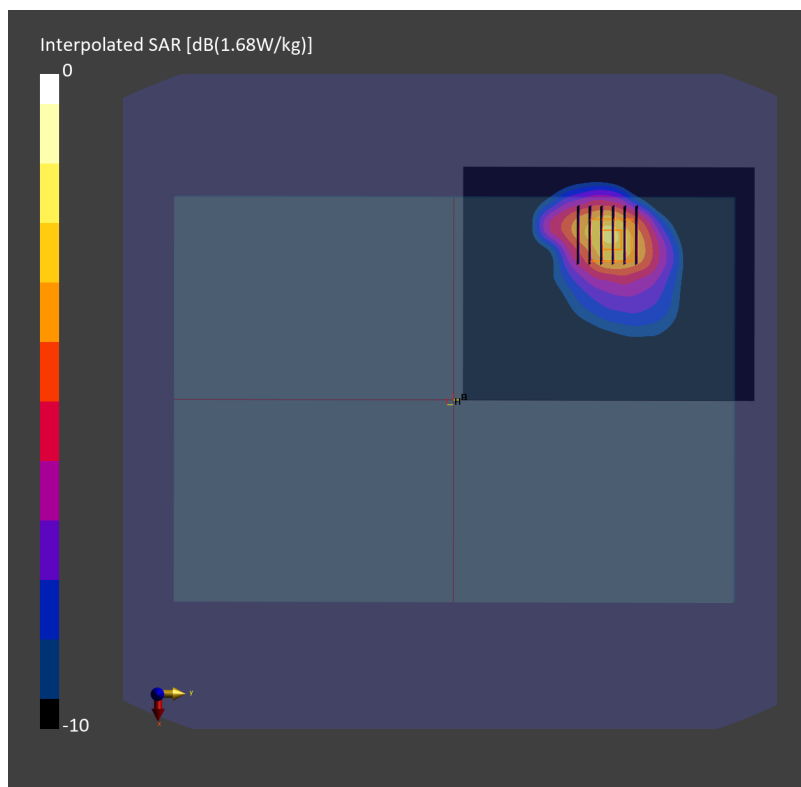

#06_LTE Band 13_10M_QPSK_1_0_Bottom of Laptop_0mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_750_231126 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 41.8$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(10.36, 10.36, 10.36); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn703; Calibrated: 2023-05-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156-; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH


Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.11 W/kg; SAR (10g) = 0.713 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 1.16 W/kg; SAR (8g) = 0.733 W/kg; SAR (10g) = 0.687 W/kg

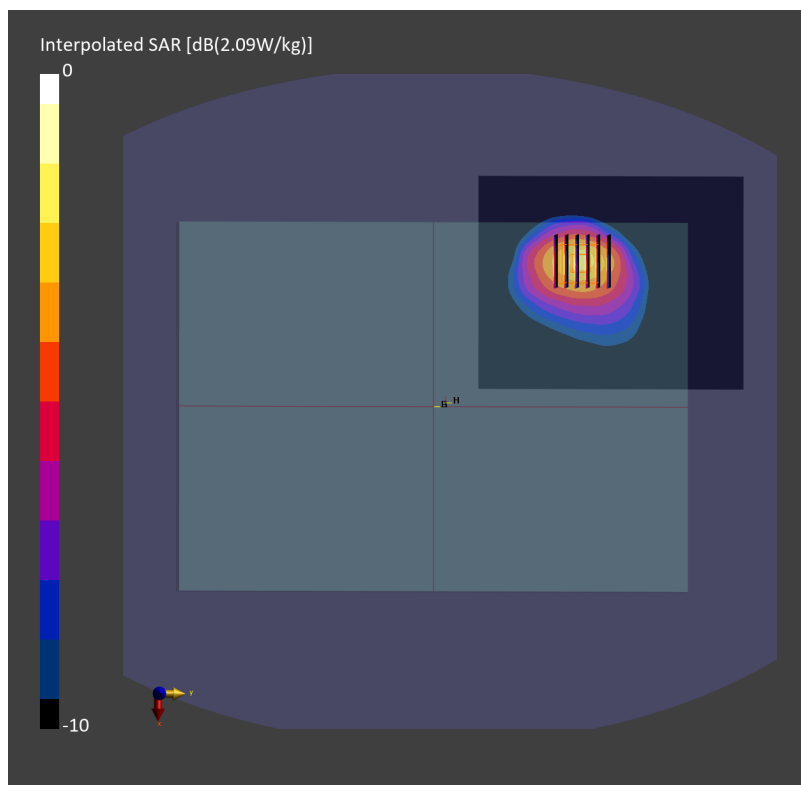

#07_LTE Band 14_10M_QPSK_1_0_Bottom of Laptop_0mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_750_231125 Medium parameters used: $f=793.000$ MHz; $\sigma=0.895$ S/m; $\epsilon_r=41.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(10.36, 10.36, 10.36); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn703; Calibrated: 2023-05-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156-; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH


Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.13 W/kg; SAR (10g) = 0.742 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.16 dB

SAR (1g) = 1.14 W/kg; SAR (8g) = 0.720 W/kg; SAR (10g) = 0.675 W/kg

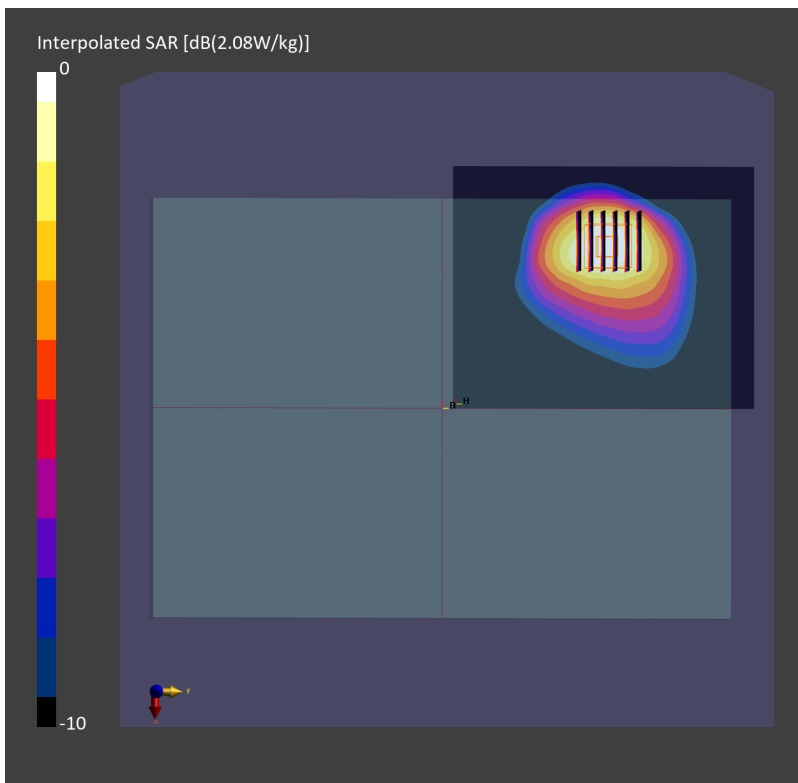

#08_LTE Band 25_20M_QPSK_1_0_Bottom of Laptop_0mm_Ch26340

Communication System: LTE-FDD; Frequency: 1880.000 MHz

Medium: HSL_1900_231118 Medium parameters used: $f=1880.000$ MHz; $\sigma=1.40$ S/m; $\epsilon_r=39.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(8.6, 8.6, 8.6); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn703; Calibrated: 2023-05-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156-; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF


Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.993 W/kg; SAR (10g) = 0.493 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 1.01 W/kg; SAR (8g) = 0.548 W/kg; SAR (10g) = 0.500 W/kg

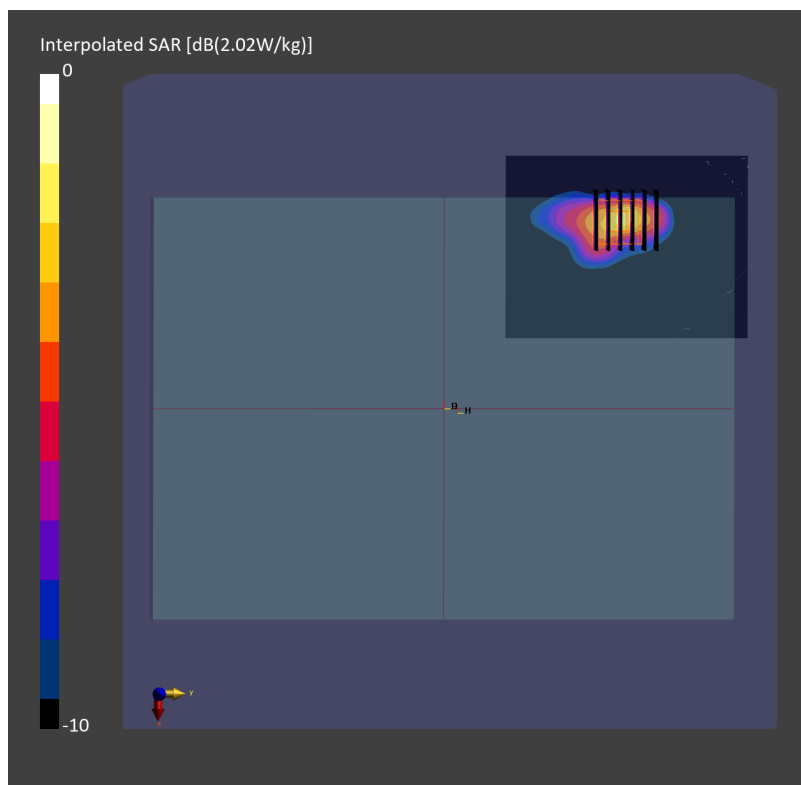

#09_LTE Band 26_15M_QPSK_1_0_Bottom of Laptop_0mm_Ch26865

Communication System: LTE-FDD ; Frequency: 831.500 MHz

Medium: HSL_835_231120 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(10.29, 10.29, 10.29); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn703; Calibrated: 2023-05-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156-; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10181-CAF


Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.985 W/kg; SAR (10g) = 0.634 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.07 dB

SAR (1g) = 0.971 W/kg; SAR (8g) = 0.612 W/kg; SAR (10g) = 0.573 W/kg

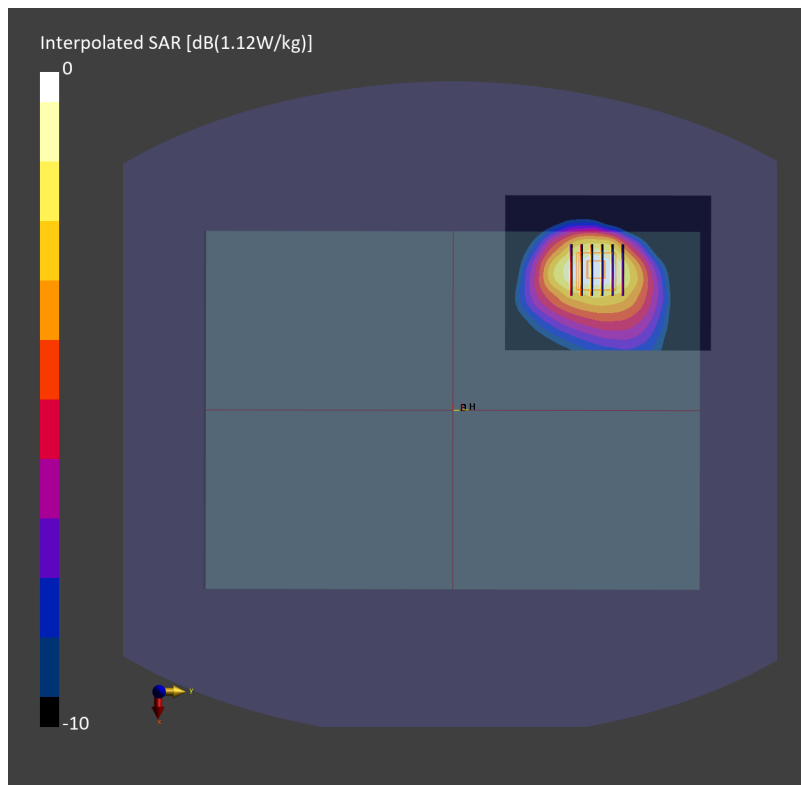

#10_LTE Band 30_10M_QPSK_1_0_Bottom Face_0mm_Ch27710

Communication System: LTE-FDD; Frequency: 2310.000 MHz

Medium: HSL_2300_231122 Medium parameters used: $f=2310.000$ MHz; $\sigma=1.66$ S/m; $\epsilon_r=39.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(8.34, 8.34, 8.34); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn703; Calibrated: 2023-05-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156-; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH


Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.02 W/kg; SAR (10g) = 0.537 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 1.03 W/kg; SAR (8g) = 0.580 W/kg; SAR (10g) = 0.533 W/kg

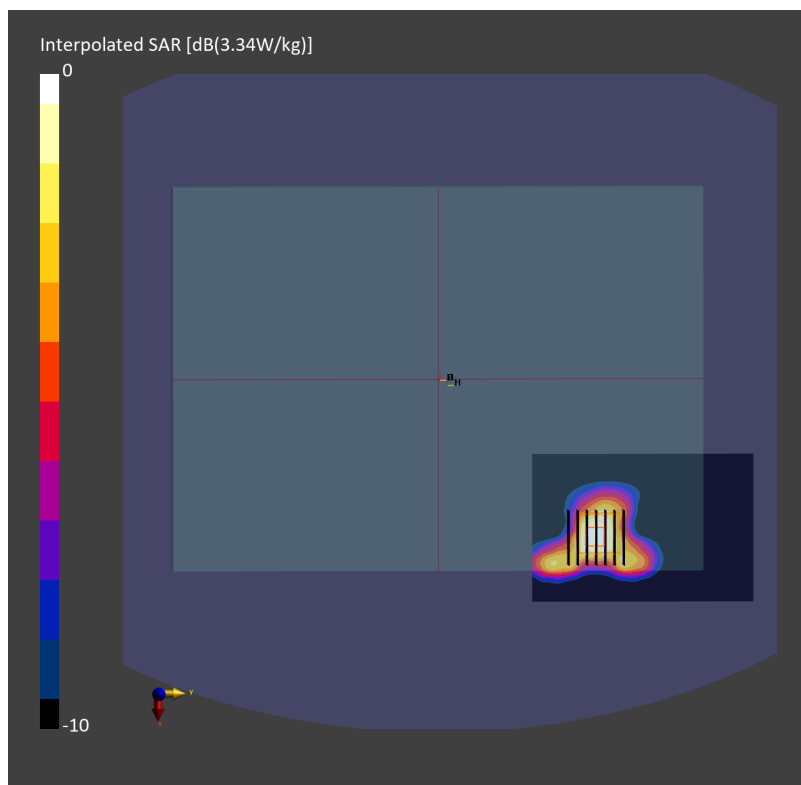

#11_LTE Band 41_20M_QPSK_1_0_Bottom Face_0mm_Ch39750

Communication System: LTE-TDD ; Frequency: 2506.000 MHz

Medium: HSL_2600_231123 Medium parameters used: $f= 2506.000$ MHz; $\sigma= 1.87$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(7.78, 7.78, 7.78); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn703; Calibrated: 2023-05-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156-; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10435-AAG


Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.965 W/kg; SAR (10g) = 0.482 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 1.00 W/kg; SAR (8g) = 0.555 W/kg; SAR (10g) = 0.508 W/kg

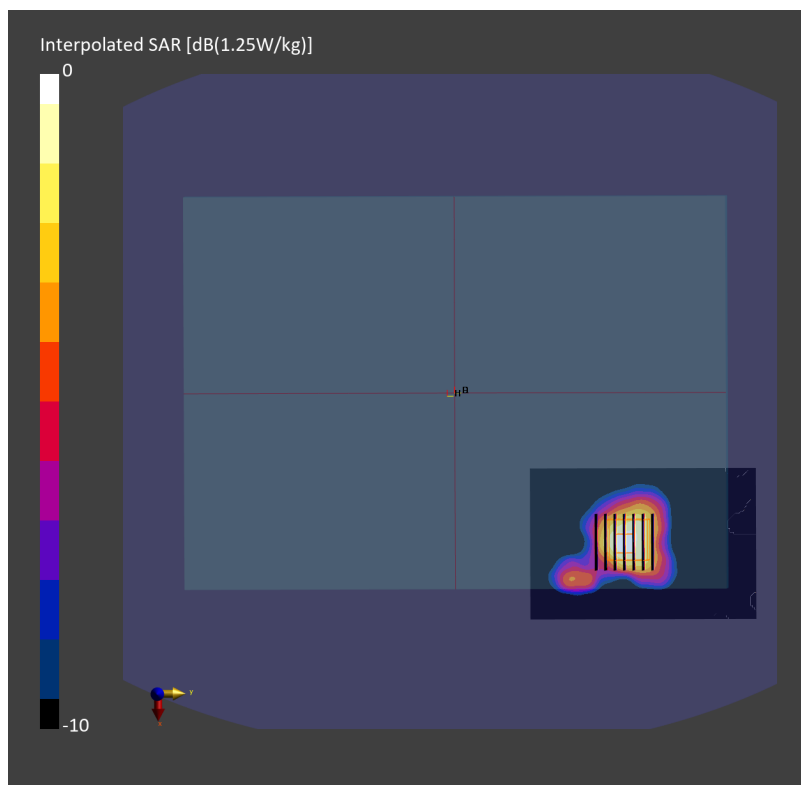

#12_LTE Band 42_20M_QPSK_1_0_Bottom of Laptop_0mm_Ch42990

Communication System: LTE-TDD ; Frequency: 3540.000 MHz

Medium: HSL_3500_231129 Medium parameters used: $f= 3540.000$ MHz; $\sigma= 2.93$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(7.05, 7.05, 7.05); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn703; Calibrated: 2023-05-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156-; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10435-AAG


Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.844 W/kg; SAR (10g) = 0.301 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 1.09 W/kg; SAR (8g) = 0.367 W/kg; SAR (10g) = 0.314 W/kg

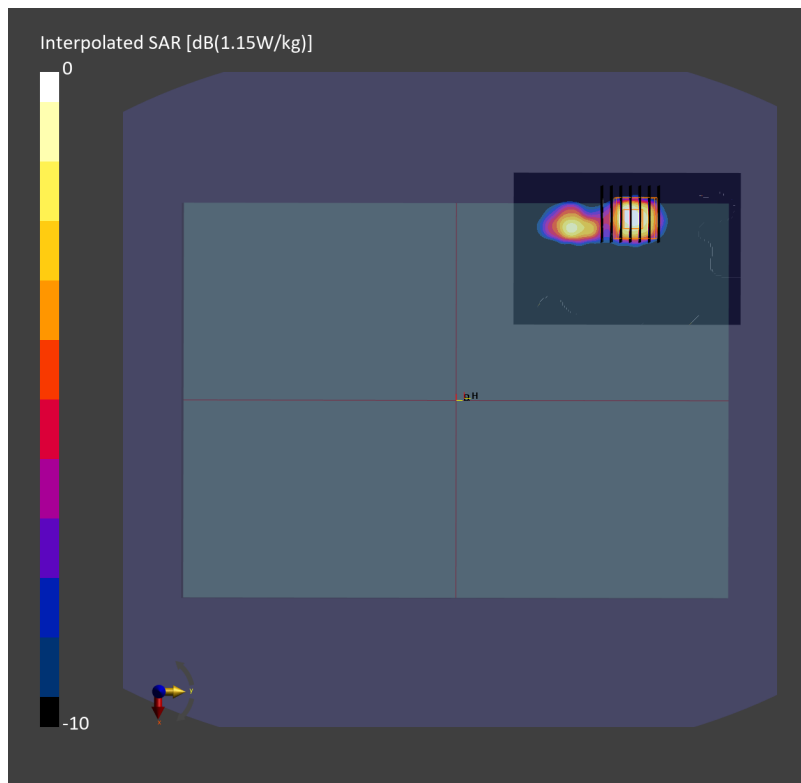

#13_LTE Band 43_20M_QPSK_1_0_Bottom of Laptop_0mm_Ch45490

Communication System: LTE-TDD ; Frequency: 3790.000 MHz

Medium: HSL_3700_231124 Medium parameters used: $f=3790.000$ MHz; $\sigma=3.21$ S/m; $\epsilon_r=38.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(6.91, 6.91, 6.91); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn703; Calibrated: 2023-05-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156-; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10435-AAG


Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.04 W/kg; SAR (10g) = 0.308 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.09 dB

SAR (1g) = 1.10 W/kg; SAR (8g) = 0.356 W/kg; SAR (10g) = 0.306 W/kg

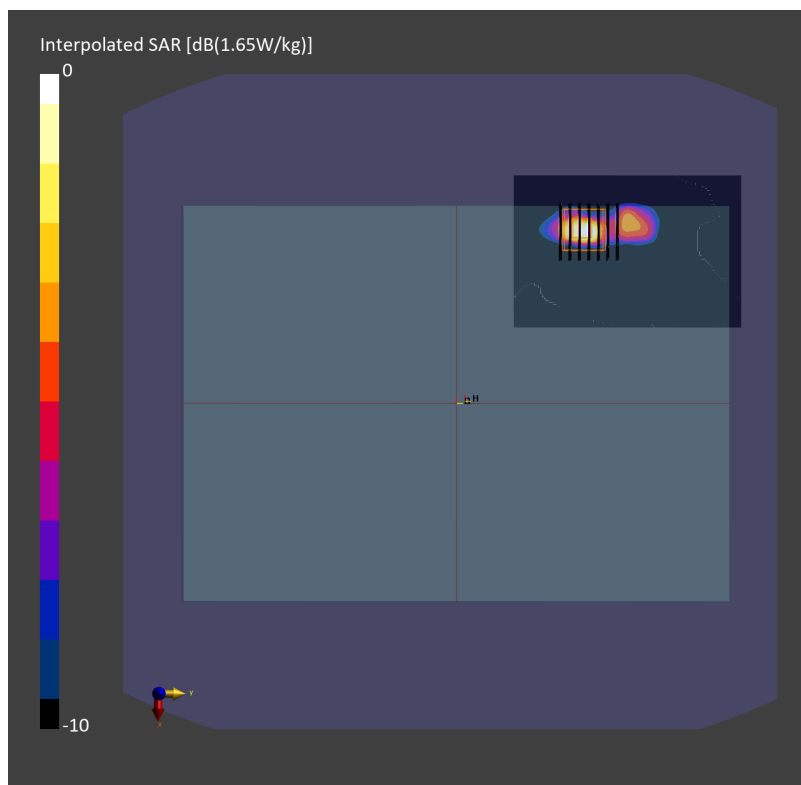

#14_LTE Band 48_20M_QPSK_1_0_Bottom of Laptop_0mm_Ch56640

Communication System: LTE-TDD ; Frequency: 3690.000 MHz

Medium: HSL_3700_231124 Medium parameters used: $f=3690.000$ MHz; $\sigma=3.17$ S/m; $\epsilon_r=38.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(6.91, 6.91, 6.91); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn703; Calibrated: 2023-05-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156-; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10473-AAF


Area Scan (80.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.975 W/kg; SAR (10g) = 0.270 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.07 dB

SAR (1g) = 0.964 W/kg; SAR (8g) = 0.324 W/kg; SAR (10g) = 0.279 W/kg

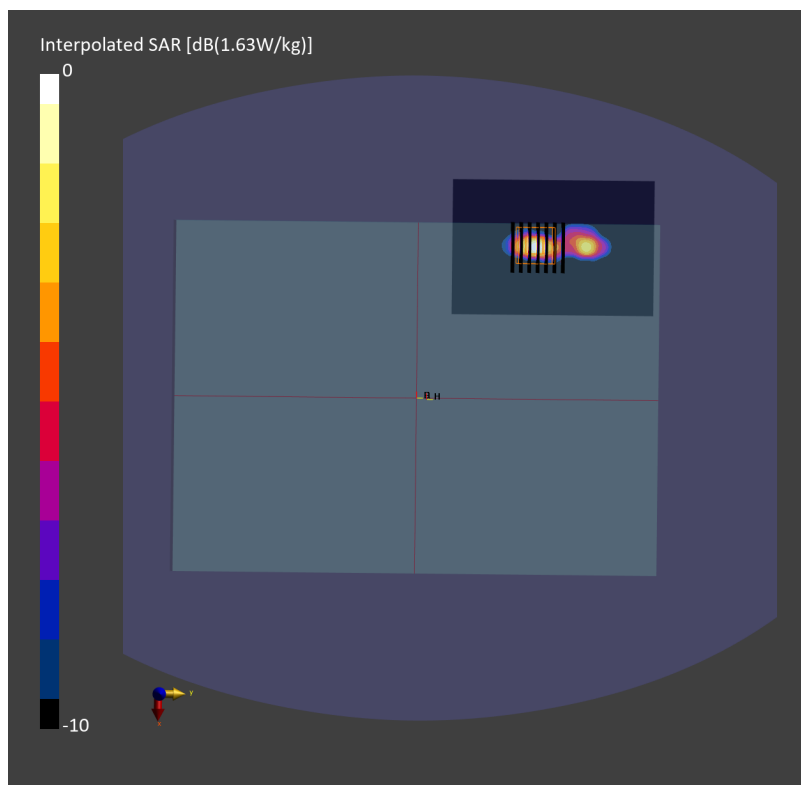

#15_LTE Band 66_20M_QPSK_1_0_Bottom of Laptop_0mm_Ch132072

Communication System: LTE-FDD ; Frequency: 1720.000 MHz

Medium: HSL_1750_231119 Medium parameters used: $f=1720.000$ MHz; $\sigma=1.32$ S/m; $\epsilon_r=40.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(8.92, 8.92, 8.92); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn703; Calibrated: 2023-05-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156-; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF


Area Scan (90.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.963 W/kg; SAR (10g) = 0.505 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.949 W/kg; SAR (8g) = 0.525 W/kg; SAR (10g) = 0.482 W/kg

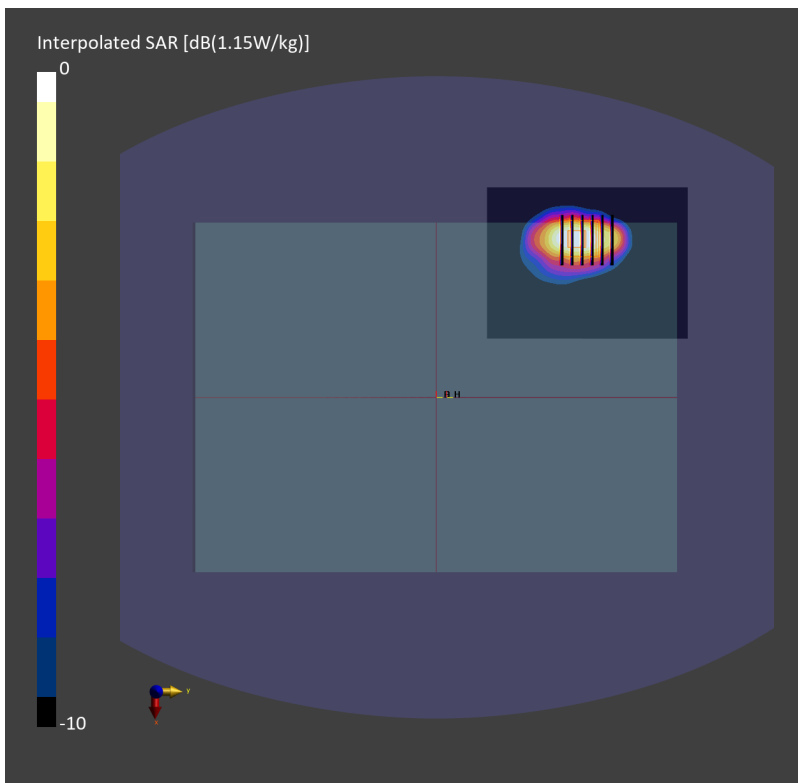

#16_LTE Ban 71_20M_QPSK_1_0_Bottom Face_0mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_750_231125 Medium parameters used: $f=680.500$ MHz; $\sigma=0.858$ S/m; $\epsilon_r=42.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(10.36, 10.36, 10.36); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn703; Calibrated: 2023-05-16
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156-; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.896 W/kg; SAR (10g) = 0.591 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.927 W/kg; SAR (8g) = 0.600 W/kg; SAR (10g) = 0.556 W/kg

