



# FCC RADIO TEST REPORT

**FCC ID** : 2AJN7-TP00128A  
**Equipment** : Notebook Computer  
**Brand Name** : Lenovo  
**Model Name** : TP00128A  
**Applicant** : LC Future Center Limited Taiwan Branch  
7F., No. 780, Bei'an Rd., Zhongshan Dist., Taipei  
City 104, Taiwan  
**Manufacturer** : LCFC (HeFei) Electronics Technology Co., Ltd.  
No. 3188-1, Yungu Road (Hefei Export Processing  
Zone), Hefei Economics & Technology  
Development Area, Anhui, CHINA  
**Standard** : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

Equipment: Quectel EM120R-GL tested inside of Lenovo Notebook Computer.

The product was received on Jun. 03, 2021 and testing was started from Jun. 26, 2021 and completed on Jun. 30, 2021. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**Sporton International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test .....	5
1.2 Product Specification of Equipment Under Test .....	5
1.3 Modification of EUT .....	5
1.4 Testing Location .....	6
1.5 Applicable Standards .....	6
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System .....	8
2.3 Support Unit used in test configuration .....	8
2.4 Frequency List of Low/Middle/High Channels.....	8
<b>3 Radiated Test Items .....</b>	<b>9</b>
3.1 Measuring Instruments.....	9
3.2 Test Setup .....	9
3.3 Test Result of Radiated Test.....	10
3.4 Field Strength of Spurious Radiation Measurement .....	11
<b>4 List of Measuring Equipment.....</b>	<b>12</b>
<b>5 Uncertainty of Evaluation .....</b>	<b>13</b>
<b>Appendix A. Test Results of Radiated Test</b>	
<b>Appendix B. Test Setup Photographs</b>	





## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	§2.1046	Conducted Output Power	Not Required	-
	§22.913 (a)(5)	Effective Radiated Power (WCDMA Band V)		
	§24.232 (c)	Equivalent Isotropic Radiated Power (WCDMA Band II)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)		
-	§24.232 (d)	Peak-to-Average Ratio	Not Required	-
-	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Not Required	-
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Not Required	-
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Not Required	-
-	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Not Required	-
3.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	Under limit 35.18 dB at 5137.000 MHz

**Note:**

1. Not required means after assessing, test items are not necessary to carry out.
2. This is a variant report by adding antenna. All the test cases were performed on original report which can be referred to Sporton Report Number FG0N2652A. Based on the original report, the test cases were verified.

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Sheng Kuo**

**Report Producer: Celery Wei**

# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Notebook Computer
Brand Name	Lenovo
Model Name	TP00128A
FCC ID	2AJN7-TP00128A
EUT supports Radios application	WCDMA/HSPA/LTE/GNSS/NFC/UWB
EUT Stage	Production Unit

**Remark:**

1. The above EUT's information was declared by manufacturer.
2. Equipment: Quectel EM120R-GL tested inside of Lenovo Notebook Computer.

WWAN Antenna Information				
Main Antenna	Manufacturer	JYT/NVC	Peak gain (dBi)	WCDMA Band II: -1.83 WCDMA Band IV: -1.18 WCDMA Band V: -2.02
	Part number	JYAAE0154HR	Type	PIFA

**Remark:** The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

## 1.2 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	<b>WCDMA:</b> Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz
Rx Frequency	<b>WCDMA:</b> Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz
Type of Modulation	WCDMA: BPSK (Uplink) HSDPA: 64QAM (Downlink) HSUPA: QPSK (Uplink)

## 1.3 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.4 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan
Test Site No.	<b>Sporton Site No.</b>
	03CH11-HY
Test Engineer	Harvey Guo, Fu Chen and Troye Hsieh
Temperature	18.1~23.1°C
Relative Humidity	55.3~69.9%

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW3786

### 1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

The measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in Tablet Type (three orthogonal axis (X: flat, Y: portrait, Z: landscape)) and Notebook Type, adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and find Y Plane for Cellular and PCS Band, Notebook Type for AWS Band as worst plane.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for WCDMA Band II

All modes, data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes	
Band	Radiated TCs
WCDMA Band V	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link

## 2.2 Connection Diagram of Test System

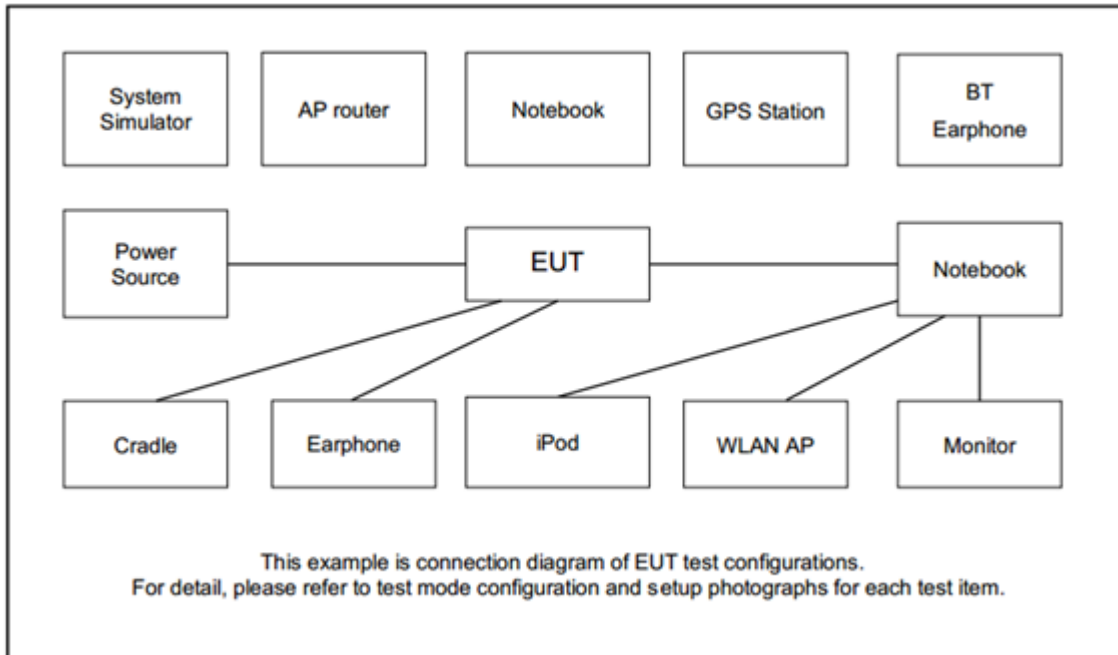

## 2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

## 2.4 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6



### 3 Radiated Test Items

#### 3.1 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.2 Test Setup


For radiated test below 30MHz



For radiated test from 30MHz to 1GHz



For radiated test above 1GHz

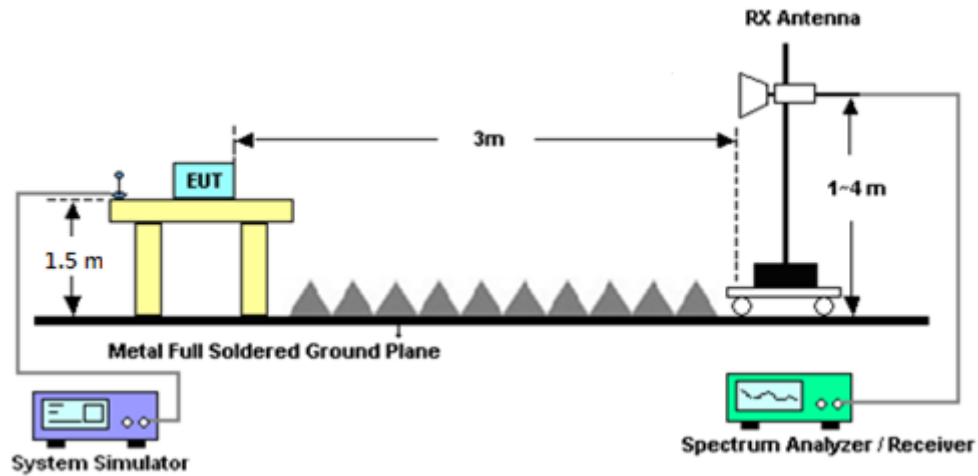

### 3.3 Test Result of Radiated Test

Please refer to Appendix A.

**Note:**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



### 3.4 Field Strength of Spurious Radiation Measurement

#### 3.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

#### 3.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1 MHz, VBW = 3 MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Take the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10.  $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11.  $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Nov. 03, 2020	Jun. 26, 2021~ Jun. 30, 2021	Nov. 02, 2021	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1212	1GHz ~ 18GHz	May 18, 2021	Jun. 26, 2021~ Jun. 30, 2021	May 17, 2022	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	00993	18GHz~40GHz	Nov. 19, 2020	Jun. 26, 2021~ Jun. 30, 2021	Nov. 18, 2021	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	00994	18GHz~40GHz	Nov. 19, 2020	Jun. 26, 2021~ Jun. 30, 2021	Nov. 18, 2021	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 11, 2020	Jun. 26, 2021~ Jun. 30, 2021	Oct. 10, 2021	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	37059 & 01	30MHz~1GHz	Oct. 11, 2020	Jun. 26, 2021~ Jun. 30, 2021	Oct. 10, 2021	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 04, 2021	Jun. 26, 2021~ Jun. 30, 2021	Jan. 03, 2022	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 12, 2020	Jun. 26, 2021~ Jun. 30, 2021	Nov. 11, 2021	Radiation (03CH11-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Oct. 27, 2020	Jun. 26, 2021~ Jun. 30, 2021	Oct. 26, 2022	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 22, 2021	Jun. 26, 2021~ Jun. 30, 2021	Jun. 21, 2022	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 02, 2020	Jun. 26, 2021~ Jun. 30, 2021	Dec. 01, 2021	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 23, 2020	Jun. 26, 2021~ Jun. 30, 2021	Oct. 22, 2021	Radiation (03CH11-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	Dec. 14, 2020	Jun. 26, 2021~ Jun. 30, 2021	Dec. 13, 2021	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jun. 26, 2021~ Jun. 30, 2021	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jun. 26, 2021~ Jun. 30, 2021	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jun. 26, 2021~ Jun. 30, 2021	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Jun. 26, 2021~ Jun. 30, 2021	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz-30MHz	Mar. 11, 2021	Jun. 26, 2021~ Jun. 30, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 11, 2021	Jun. 26, 2021~ Jun. 30, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	30M-18G	Mar. 11, 2021	Jun. 26, 2021~ Jun. 30, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 11, 2021	Jun. 26, 2021~ Jun. 30, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-900- 1000-15000-6 0SS	SN12	1GHz High Pass Filter	Nov. 05, 2020	Jun. 26, 2021~ Jun. 30, 2021	Nov. 04, 2021	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0SS	SN3	3GHz High Pass Filter	Sep. 14, 2020	Jun. 26, 2021~ Jun. 30, 2021	Sep. 13, 2021	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP140325	N/A	Nov. 18, 2020	Jun. 26, 2021~ Jun. 30, 2021	Nov. 17, 2021	Radiation (03CH11-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.29 dB
---	---------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.56 dB
---	---------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.08 dB
---	---------



### Appendix A. Test Results of Radiated Test

### WCDMA 850

WCDMA 850									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1653	-63.33	-13	-50.33	-73.36	-70.29	0.53	9.64	H
	2479	-60.82	-13	-47.82	-74.45	-68.8	0.65	10.78	H
	3306	-59.01	-13	-46.01	-75.49	-68.12	0.76	12.02	H
									H
									H
									H
	1653	-63.36	-13	-50.36	-73.1	-70.32	0.53	9.64	V
	2479	-60.01	-13	-47.01	-74.13	-67.99	0.65	10.78	V
	3306	-58.99	-13	-45.99	-75.42	-68.1	0.76	12.02	V
									V
									V
									V
Middle	1673	-62.41	-13	-49.41	-72.58	-69.41	0.53	9.68	H
	2509	-60.95	-13	-47.95	-74.56	-68.95	0.66	10.81	H
	3345	-58.87	-13	-45.87	-75.43	-68.09	0.76	12.14	H
									H
									H
									H
	1673	-63.27	-13	-50.27	-73.04	-70.27	0.53	9.68	V
	2509	-60.72	-13	-47.72	-74.73	-68.72	0.66	10.81	V
	3345	-59.14	-13	-46.14	-75.49	-68.36	0.76	12.14	V
									V
									V
									V



Highest	1693	-62.51	-13	-49.51	-72.97	-69.55	0.53	9.72	H
	2540	-61.08	-13	-48.08	-74.75	-69.09	0.67	10.82	H
	3386	-58.50	-13	-45.50	-75.16	-67.84	0.77	12.26	H
									H
									H
									H
	1693	-63.11	-13	-50.11	-72.93	-70.15	0.53	9.72	V
	2540	-60.73	-13	-47.73	-74.77	-68.74	0.67	10.82	V
	3386	-59.08	-13	-46.08	-75.32	-68.42	0.77	12.26	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA 1900

WCDMA 1900									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3704	-57.10	-13	-44.10	-74.37	-68.89	0.72	12.52	H
	5557	-52.97	-13	-39.97	-74.92	-65.14	1.00	13.17	H
	7409	-53.54	-13	-40.54	-78.41	-62.92	1.18	10.56	H
									H
									H
									H
	3704	-50.62	-13	-37.62	-69.1	-62.41	0.72	12.52	V
	5557	-51.77	-13	-38.77	-73.84	-63.94	1.00	13.17	V
	7409	-53.93	-13	-40.93	-78.64	-63.31	1.18	10.56	V
									V
									V
									V
Middle	3760	-55.31	-13	-42.31	-72.75	-67.12	0.69	12.50	H
	5640	-54.72	-13	-41.72	-76.64	-66.85	0.98	13.12	H
	7520	-53.61	-13	-40.61	-78.24	-62.89	1.18	10.46	H
									H
									H
									H
	3760	-50.80	-13	-37.80	-69.44	-62.61	0.69	12.50	V
	5640	-54.60	-13	-41.60	-76.7	-66.73	0.98	13.12	V
	7520	-53.82	-13	-40.82	-78.5	-63.1	1.18	10.46	V
									V
									V
									V





Highest	3815	-54.19	-13	-41.19	-71.76	-65.98	0.68	12.47	H
	5722	-55.73	-13	-42.73	-77.72	-67.81	0.99	13.07	H
	7630	-52.89	-13	-39.89	-77.77	-62.47	1.18	10.76	H
									H
									H
									H
	3815	-50.15	-13	-37.15	-68.93	-61.94	0.68	12.47	V
	5722	-55.05	-13	-42.05	-77.24	-67.13	0.99	13.07	V
	7630	-53.37	-13	-40.37	-77.98	-62.95	1.18	10.76	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**WCDMA 1700**

WCDMA 1700									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3424	-52.62	-13	-39.62	-69.98	-64.22	0.77	12.37	H
	5137	-48.18	-13	-35.18	-69.2	-59.68	0.97	12.47	H
	6849	-54.04	-13	-41.04	-77.99	-64.85	0.83	11.63	H
									H
									H
									H
	3424	-49.15	-13	-36.15	-66.39	-60.75	0.77	12.37	V
	5137	-51.07	-13	-38.07	-72.28	-62.57	0.97	12.47	V
	6849	-53.56	-13	-40.56	-78	-64.37	0.83	11.63	V
									V
									V
									V
Middle	3465	-50.90	-13	-37.90	-68.31	-62.62	0.78	12.50	H
	5197	-49.82	-13	-36.82	-70.94	-61.42	0.99	12.59	H
	6930	-53.18	-13	-40.18	-77.29	-63.63	1.01	11.45	H
									H
									H
									H
	3465	-48.49	-13	-35.49	-66.37	-60.21	0.78	12.50	V
	5197	-51.32	-13	-38.32	-72.6	-62.92	0.99	12.59	V
	6930	-52.30	-13	-39.30	-76.79	-62.75	1.01	11.45	V
									V
									V
									V



Highest	3505	-50.64	-13	-37.64	-68.09	-62.46	0.78	12.60	H
	5257	-49.38	-13	-36.38	-70.62	-61.08	1.01	12.71	H
	7010	-52.69	-13	-39.69	-76.91	-62.81	1.17	11.28	H
									H
									H
									H
	3505	-49.75	-13	-36.75	-68.16	-61.57	0.78	12.60	V
	5257	-51.57	-13	-38.57	-72.96	-63.27	1.01	12.71	V
	7010	-52.16	-13	-39.16	-76.72	-62.28	1.17	11.28	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.