


# FCC RADIO TEST REPORT

**FCC ID** : 2AJN7-TP00128A  
**Equipment** : Notebook Computer  
**Brand Name** : Lenovo  
**Model Name** : TP00128A  
**Applicant** : LC Future Center Limited Taiwan Branch  
7F., No. 780, Bei'an Rd., Zhongshan Dist.,  
Taipei City 104, Taiwan  
**Manufacturer** : LCFC (HeFei) Electronics Technology Co., Ltd.  
No. 3188-1, Yungu Road (Hefei Export  
Processing Zone), Hefei Economics &  
Technology Development Area, Anhui, CHINA  
**Standard** : FCC 47 CFR Part 2, 90(R)

Equipment: Quectel EM120R-GL tested inside of Lenovo Notebook Computer.

The product was received on Jun. 03, 2021 and testing was started from Jun. 26, 2021 and completed on Jun. 30, 2021. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

**Sporton International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT .....	5
1.4 Testing Site.....	6
1.5 Applied Standards .....	6
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System.....	7
2.3 Support Unit used in test configuration and system .....	8
2.4 Frequency List of Low/Middle/High Channels .....	8
<b>3 Radiated Test Items .....</b>	<b>9</b>
3.1 Measuring Instruments .....	9
3.2 Radiated Spurious Emission .....	11
<b>4 List of Measuring Equipment.....</b>	<b>12</b>
<b>5 Uncertainty of Evaluation.....</b>	<b>13</b>
<b>Appendix A. Test Results of Radiated Test</b>	
<b>Appendix B. Test Setup Photographs</b>	



### History of this test report

Report No.	Version	Description	Issued Date
FG0N2652-01D	01	Initial issue of report	Sep. 29, 2021
FG0N2652-01D	02	1. Revise Product Feature of Equipment Under Test 2. Revise Antenna Information	Oct. 20, 2021



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	§2.1046	Conducted Output Power	Not Required	-
-	§90.542 (a)(7)	Effective Radiated Power	Not Required	-
-	-	Peak-to-Average Ratio	Not Required	-
-	§2.1049	Occupied Bandwidth	Not Required	-
-	§2.1053 §90.543 (e)(2)	Conducted Band Edge Measurement	Not Required	-
-	§2.1051 §90.210 (n)	Emission Mask	Not Required	-
-	§2.1053 §90.543 (e)(3)	Conducted Spurious Emission	Not Required	-
-	§2.1055 §90.539 (e)	Frequency Stability Temperature & Voltage	Not Required	-
3.2	§2.1053 §90.543 (e)(3) §90.543 (f)	Radiated Spurious Emission	Pass	Under limit 16.01 dB at 1577.000 MHz

Note:

1. Not required means after assessing, test items are not necessary to carry out.
2. This is a variant report by adding antenna. All the test cases were performed on original report which can be referred to Sporton Report Number FG0N2652D. Based on the original report, the test cases were verified.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sheng Kuo  
Report Producer: Amy Chen

# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Notebook Computer
Brand Name	Lenovo
Model Name	TP00128A
FCC ID	2AJN7-TP00128A
EUT supports Radios application	WCDMA/HSPA/LTE/GNSS/NFC/UWB
EUT Stage	Production Unit

**Remark:**

1. The above EUT's information was declared by manufacturer.
2. Equipment: Quectel EM120R-GL tested inside of Lenovo Notebook Computer.

WWAN Antenna Information				
Main Antenna	Manufacturer	JYT/NVC	Peak gain (dBi)	-3.09
	Part number	JYAAE0154HR	Type	PIFA

**Remark:** The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

## 1.2 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	LTE Band 14 :790.5 MHz ~ 795.5 MHz
Rx Frequency	LTE Band 14 :760.5 MHz ~ 765.5 MHz
Bandwidth	5MHz / 10MHz
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM (Downlink only)

## 1.3 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.4 Testing Site

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan
Test Site No.	<b>Sporton Site No.</b>
	03CH11-HY
Test Engineer	Harvey Guo, Fu Chen, and Troye Hsieh
Temperature	18.1~23.1°C
Relative Humidity	55.3~69.9%

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW3786

### 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ FCC 47 CFR Part 2, Part 90(R)
- ♦ ANSI / TIA-603-E
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

## 2 Test Configuration of Equipment Under Test


### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

The measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in Tablet Type (three orthogonal axis (X: flat, Y: portrait, Z: landscape)) and Notebook Type, adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and find Y plane as worst plane.

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel			
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H	
Radiated Spurious Emission	14	-	-	v	v	-	-	v					v			v	v	v
Remark	<ol style="list-style-type: none"> <li>The mark "v" means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> </ol>																	

### 2.2 Connection Diagram of Test System

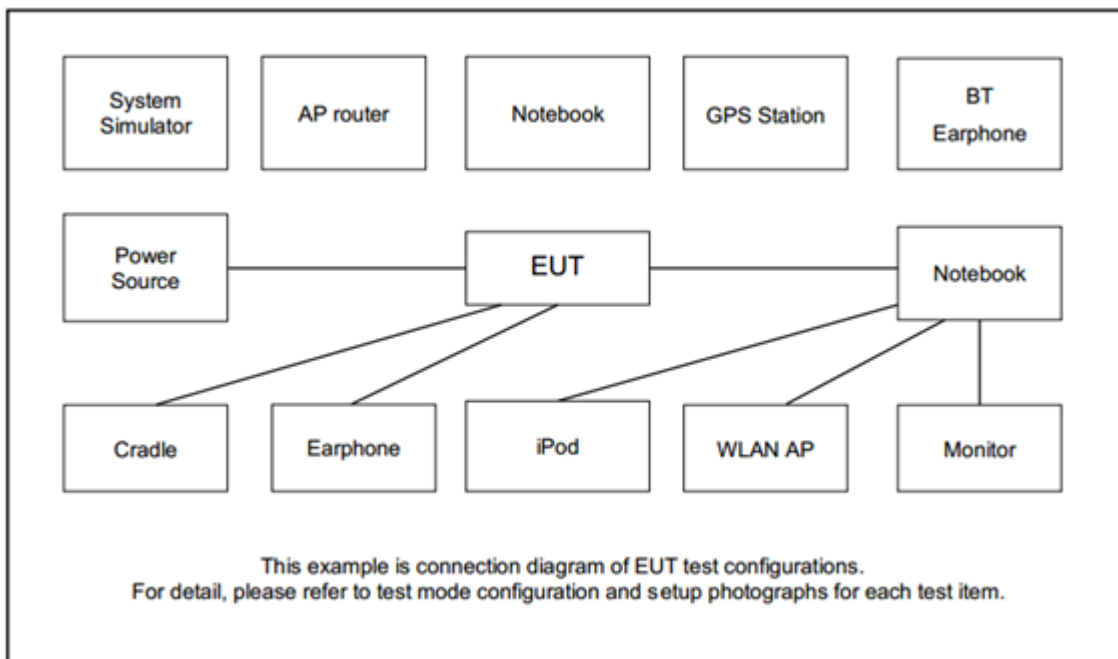



## 2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

## 2.4 Frequency List of Low/Middle/High Channels

LTE Band 14 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	23330	-
	Frequency	-	793	-
5	Channel	23305	23330	23355
	Frequency	790.5	793	795.5




### 3 Radiated Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

##### 3.1.1 Test Setup


For radiated test below 30MHz

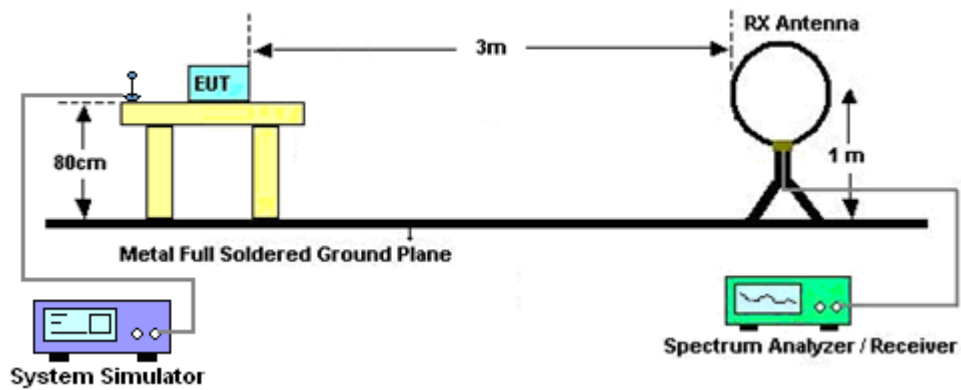

For radiated test from 30MHz to 1GHz

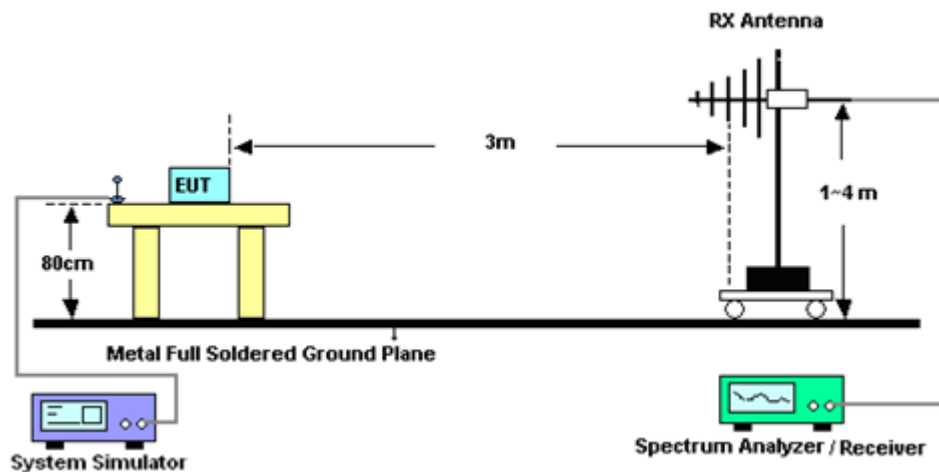

For radiated test above 1GHz

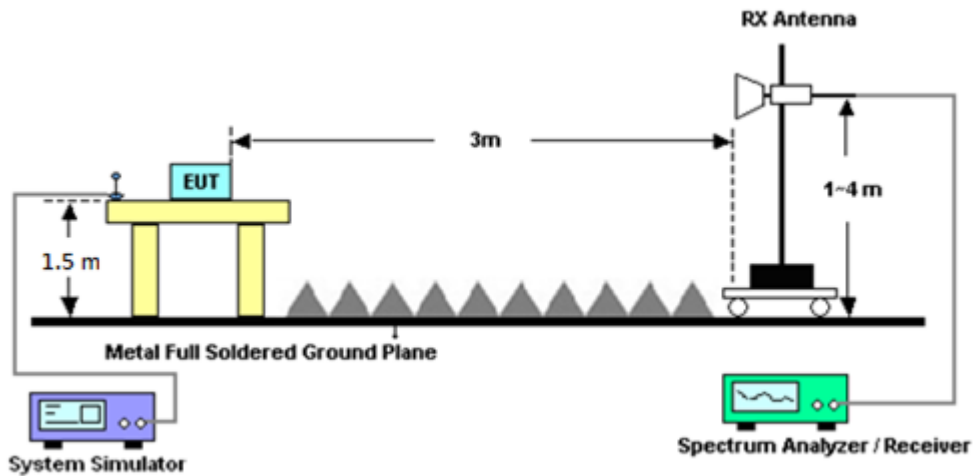

### 3.1.2 Test Result of Radiated Test

Please refer to Appendix A.

**Note:**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



## **3.2 Radiated Spurious Emission**

### **3.2.1 Description of Radiated Spurious Emission**

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### **3.2.2 Test Procedures**

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Nov. 03, 2020	Jun. 26, 2021~ Jun. 30, 2021	Nov. 02, 2021	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1212	1GHz ~ 18GHz	May 18, 2021	Jun. 26, 2021~ Jun. 30, 2021	May 17, 2022	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 11, 2020	Jun. 26, 2021~ Jun. 30, 2021	Oct. 10, 2021	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01 N-06	37059 & 01	30MHz~1GHz	Oct. 11, 2020	Jun. 26, 2021~ Jun. 30, 2021	Oct. 10, 2021	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 04, 2021	Jun. 26, 2021~ Jun. 30, 2021	Jan. 03, 2022	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 12, 2020	Jun. 26, 2021~ Jun. 30, 2021	Nov. 11, 2021	Radiation (03CH11-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Oct. 27, 2020	Jun. 26, 2021~ Jun. 30, 2021	Oct. 26, 2021	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 22, 2021	Jun. 26, 2021~ Jun. 30, 2021	Jun. 21, 2022	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 02, 2020	Jun. 26, 2021~ Jun. 30, 2021	Dec. 01, 2021	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 23, 2020	Jun. 26, 2021~ Jun. 30, 2021	Oct. 22, 2021	Radiation (03CH11-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	Dec. 14, 2020	Jun. 26, 2021~ Jun. 30, 2021	Dec. 13, 2021	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jun. 26, 2021~ Jun. 30, 2021	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1~4m	N/A	Jun. 26, 2021~ Jun. 30, 2021	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jun. 26, 2021~ Jun. 30, 2021	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Jun. 26, 2021~ Jun. 30, 2021	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz-30MHz	Mar. 11, 2021	Jun. 26, 2021~ Jun. 30, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 11, 2021	Jun. 26, 2021~ Jun. 30, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	30M-18G	Mar. 11, 2021	Jun. 26, 2021~ Jun. 30, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 11, 2021	Jun. 26, 2021~ Jun. 30, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-900- 1000-15000-6 0SS	SN12	1GHz High Pass Filter	Nov. 05, 2020	Jun. 26, 2021~ Jun. 30, 2021	Nov. 04, 2021	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-270 0-3000-18000- 60SS	SN3	3GHz High Pass Filter	Sep. 14, 2020	Jun. 26, 2021~ Jun. 30, 2021	Sep. 13, 2021	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP140325	N/A	Nov. 18, 2020	Jun. 26, 2021~ Jun. 30, 2021	Nov. 17, 2021	Radiation (03CH11-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.29 dB
-------------------------------------------------------------------------	---------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.56 dB
-------------------------------------------------------------------------	---------



Appendix A. Test Results of Radiated Test

LTE Band 14

LTE Band 14 / 5MHz / QPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1576	-59.48	-42.15	-17.33	-69.52	-66.28	0.52	9.47	H
	2365	-58.07	-13	-45.07	-72.09	-65.98	0.63	10.69	H
	3153	-58.75	-13	-45.75	-74.86	-67.42	0.74	11.56	H
									H
									H
									H
	1576	-59.79	-42.15	-17.64	-69.59	-66.59	0.52	9.47	V
	2365	-57.36	-13	-44.36	-72.00	-65.27	0.63	10.69	V
	3153	-58.18	-13	-45.18	-74.55	-66.85	0.74	11.56	V
									V
									V
									V
Middle	1581	-60.40	-42.15	-18.25	-70.44	-67.21	0.52	9.48	H
	2372	-56.30	-13	-43.30	-70.33	-64.22	0.63	10.70	H
	3163	-58.13	-13	-45.13	-74.24	-66.83	0.74	11.59	H
									H
									H
									H
	1581	-59.61	-42.15	-17.46	-69.38	-66.42	0.52	9.48	V
	2372	-57.44	-13	-44.44	-72.06	-65.36	0.63	10.70	V
	3163	-57.72	-13	-44.72	-74.16	-66.42	0.74	11.59	V
									V
									V
									V



LTE Band 14 / 5MHz / QPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Highest	1586	-62.58	-42.15	-20.43	-72.17	-69.40	0.52	9.49	H
	2380	-57.73	-13	-44.73	-71.63	-65.65	0.63	10.70	H
	3173	-58.05	-13	-45.05	-74.23	-66.78	0.74	11.62	H
									H
									H
									H
	1586	-61.71	-42.15	-19.56	-71.44	-68.53	0.52	9.49	V
	2380	-58.58	-13	-45.58	-73.17	-66.50	0.63	10.70	V
	3173	-57.94	-13	-44.94	-74.44	-66.67	0.74	11.62	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 14 / 10MHz / QPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1577	-58.81	-42.15	-16.66	-68.85	-65.61	0.52	9.47	H
	2365	-47.08	-13	-34.08	-61.10	-54.99	0.63	10.69	H
	3154	-58.76	-13	-45.76	-74.87	-67.43	0.74	11.56	H
									H
									H
									H
	1577	-58.16	-42.15	-16.01	-67.96	-64.96	0.52	9.47	V
	2365	-48.37	-13	-35.37	-63.01	-56.28	0.63	10.69	V
	3154	-58.55	-13	-45.55	-74.93	-67.22	0.74	11.56	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.