



# FCC RADIO TEST REPORT

**FCC ID** : 2AJN7-TP00130CU  
**Equipment** : Notebook Computer  
**Brand Name** : Lenovo  
**Model Name** : TP00130C; TP00130D  
**Applicant** : LC Future Center Limited Taiwan Branch  
7F., No.780, Beian Rd., Zhongshan Dist., Taipei 104, Taiwan  
**Manufacturer** : LCFC (HeFei) Electronics Technology Co., Ltd.  
No. 3188-1, Yungu Road (Hefei Export Processing Zone), Hefei  
Economics & Technology Development Area, Anhui, CHINA  
**Standard** : FCC 47 CFR Part 2, 96

Equipment: Fibocom FM350-GL tested inside of Lenovo Notebook Computer.

The product was received on Oct. 22, 2021 and testing was performed from Dec. 14, 2021 to Feb. 15, 2022. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

*Sporton International Inc. Wensan Laboratory*



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test .....	5
1.2 Product Specification of Equipment Under Test .....	6
1.3 Modification of EUT .....	6
1.4 Testing Location .....	6
1.5 Applied Standards .....	7
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>8</b>
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System .....	9
2.3 Support Unit used in test configuration .....	9
2.4 Frequency List of Low/Middle/High Channels.....	9
<b>3 Conducted Test Items.....</b>	<b>11</b>
3.1 Measuring Instruments.....	11
3.2 Conducted Output Power .....	12
3.3 EIRP .....	13
<b>4 Radiated Test Items .....</b>	<b>14</b>
4.1 Measuring Instruments.....	14
4.2 Test Setup .....	14
4.3 Test Result of Radiated Test.....	15
4.4 Radiated Spurious Emission .....	16
<b>5 List of Measuring Equipment.....</b>	<b>17</b>
<b>6 Uncertainty of Evaluation .....</b>	<b>19</b>
<b>Appendix A. Test Results of Conducted Test</b>	
<b>Appendix B. Test Results of Radiated Test</b>	
<b>Appendix C. Test Setup Photographs</b>	





### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
-	§96.41	Peak-to-Average Ratio	-	See Note
3.3	§96.41	Effective Isotropic Radiated Power	Pass	-
-	§2.1049 §96.41	Occupied Bandwidth	-	See Note
-	§2.1051 §96.41	Conducted Band Edge Measurement	-	See Note
-	§2.1051 §96.41	Conducted Spurious Emission	-	See Note
-	§2.1055	Frequency Stability for Temperature & Voltage	-	See Note
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 9.17 dB at 28556.000 MHz

**Note:**

1. The certified module (model: FM350-GL) which supports normal mode and TX switching mode being integrated into a notebook computer. Spot check on both modes were performed and no degradation occur. Thus the module test results were leveraged in this report and additionally reporting the spot check results in this report.
2. In normal mode, Conducted power was verified to be consistent with the original modular approval, so the output power level in the original modular grant is referenced in this report for determining EIRP of this host product, and verified the TX switching mode of Radiated Spurious Emission and Conducted power.

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Sheng Kuo**

**Report Producer: Ruby Zou**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Notebook Computer
Brand Name	Lenovo
Model Name	TP00130C; TP00130D
FCC ID	2AJN7-TP00130CU
Sample 1	EUT with Amphenol Antenna
Sample 2	EUT with Speed Antenna
EUT supports Radios application	WCDMA/HSPA/LTE/5G NR/GNSS/NFC/UWB WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
EUT Stage	Production Unit

**Remark:**

1. The above EUT's information was declared by manufacturer.
2. Equipment: Fibocom FM350-GL tested inside of Lenovo Notebook Computer.

	Normal mode	TX switching mode
	TX/RX	TX/RX
Ant_0 (Main)	WCDMA : 2/4/5 LTE : 2/4/5/7/12/13/14/17/25/26/30/38/66/71 NR : 2/5/7/25/30/38/66/71	WCDMA : 5 LTE : 5/12/13/14/17/26/41/48/71 NR : 5/41/71/77/78
Ant_2 (MIMO2)	LTE : 41/48 NR : 41/77/78	WCDMA : 2/4 LTE : 2/4/7/25/30/38/66 NR : 2/7/25/30/38/66

WWAN Antenna Information				
Main Antenna	Manufacturer	Amphenol	Peak gain (dBi)	LTE Band 48 : 0.9
	Part number	DC33001VG40	Type	PIFA
	Manufacturer	Speed	Peak gain (dBi)	LTE Band 48 : 0.9
	Part number	DC33001VH40	Type	PIFA
MIMO 2 Antenna	Manufacturer	Amphenol	Peak gain (dBi)	LTE Band 48 : 0.9
	Part number	DC33001VG30	Type	PIFA
	Manufacturer	Speed	Peak gain (dBi)	LTE Band 48 : 0.9
	Part number	DC33001VH30	Type	PIFA

**Remark:** The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.



## 1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	3552.5 MHz ~ 3697.5 MHz
Rx Frequency	3552.5 MHz ~ 3697.5 MHz
Bandwidth	5 MHz / 10 MHz / 15 MHz / 20 MHz
Maximum Output Power to Antenna	<b>Main Antenna:</b> LTE Band 48: 19.53 dBm LTE Band 48C: 21.30 dBm <b>MIMO 2 Antenna:</b> LTE Band 48: 21.32 dBm LTE Band 48C: 21.60 dBm
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM

## 1.3 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan
Test Site No.	<b>Sporton Site No.</b>
	TH03-HY (TAF Code: 1190)
Test Engineer	HaoEn Zhang
Temperature	22.1~23.4
Relative Humidity	51.8~55.6
Remark	The Conducted test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan
Test Site No.	<b>Sporton Site No.</b>
	03CH12-HY
Test Engineer	Jack Cheng, Lance Chiang, and Chuan Chu
Temperature	21.2~24.2°C
Relative Humidity	58.2~68.8%

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786



## 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS Eqpt v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Test Items	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel				
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H		
Max. Output Power	48	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
E.I.R.P.	48	-	-	v	v	v	v	v	v	v	v	Max. Power							
Radiated Spurious Emission	48	-	-					v	v					v			v	v	v
Remark	<ol style="list-style-type: none"> <li>The mark "v" means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> <li>For modulation of 256QAM, the maximum power of 256QAM is lower than other modulation (QPSK/16QAM/64QAM), therefore, for Normal Mode, according to engineering evaluation, we choose higher power (QPSK/16QAM/64QAM) to perform all tests and show in the report.</li> <li>All the radiated test cases were performed with Battery1 and Sample 1.</li> </ol>																		

Test Items	Band	Bandwidth (MHz)										Modulation				RB #			Test Channel			
		20+20	20+15	15+20	20+10	10+20	20+5	5+20	15+15	15+10	10+15	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H	
Max. Output Power	48_CA	v	v	v	v	v	v	v	-	-	-	v	v	v	v	v	v	v	v	v	v	
E.I.R.P.	48_CA	v	v	v	v	v	v	v	-	-	-	v	v	v	v	Max. Power						
Radiated Spurious Emission	48_CA	v							-	-	-	v					v			v	v	v
Remark	<ol style="list-style-type: none"> <li>The mark "v" means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> <li>For modulation of 256QAM, the maximum power of 256QAM is lower than other modulation (QPSK/16QAM/64QAM), therefore, according to engineering evaluation, we choose higher power (QPSK/16QAM/64QAM) to perform all tests and show in the report.</li> <li>All the radiated test cases were performed with Battery1 and Sample 1.</li> </ol>																					



## 2.2 Connection Diagram of Test System

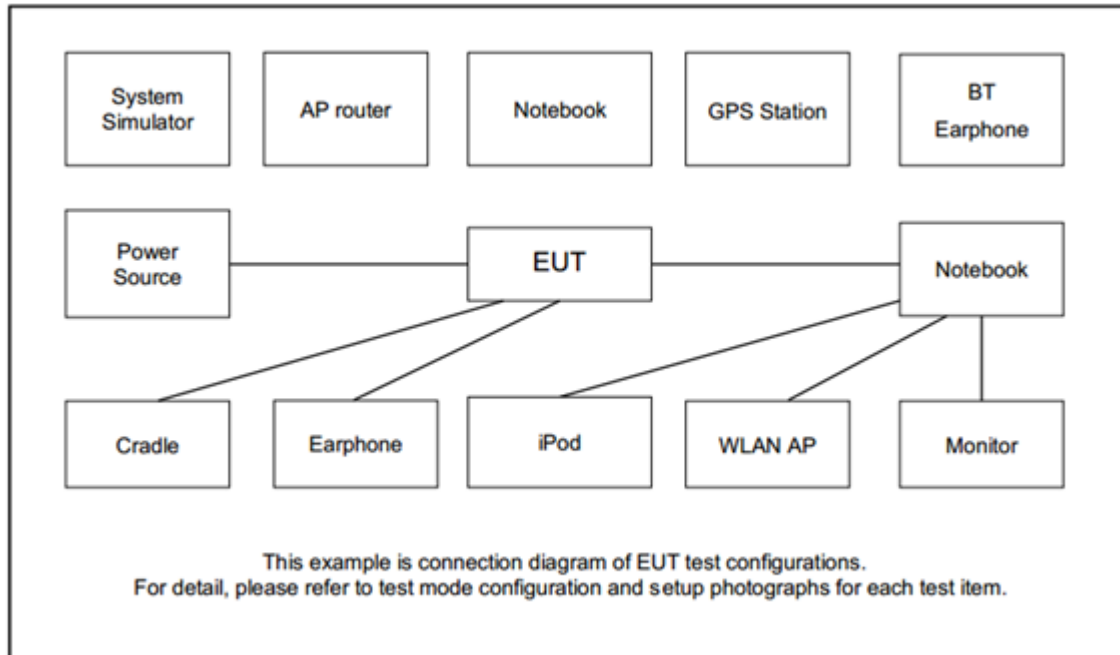

## 2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

## 2.4 Frequency List of Low/Middle/High Channels

LTE Band 48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	55340	55990	56640
	Frequency	3560.0	3625.0	3690.0
15	Channel	55315	55990	56665
	Frequency	3557.5	3625.0	3692.5
10	Channel	55290	55990	56690
	Frequency	3555.0	3625.0	3695.0
5	Channel	55265	55990	56715
	Frequency	3552.5	3625.0	3697.5



LTE Band 48C Channel and Frequency List_CA					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
5 + 20	PCC	Channel	55273	55898	56523
		Frequency	3553.3	3615.8	3678.3
	SCC	Channel	55390	56015	56640
		Frequency	3565	3627.5	3690
20 + 5	PCC	Channel	55340	55965	56590
		Frequency	3560	3622.5	3685
	SCC	Channel	55457	56082	56707
		Frequency	3571.7	3634.2	3696.7
10 + 20	PCC	Channel	55295	55896	56496
		Frequency	3555.5	3615.6	3675.6
	SCC	Channel	55439	56040	56640
		Frequency	3569.9	3630	3690
20 + 10	PCC	Channel	55340	55941	56541
		Frequency	3560	3620.1	3680.1
	SCC	Channel	55484	56085	56685
		Frequency	3574.4	3634.5	3694.5
15 + 20	PCC	Channel	55318	55893	56469
		Frequency	3557.8	3615.3	3672.9
	SCC	Channel	55489	56064	56640
		Frequency	3574.9	3632.4	3690
20 + 15	PCC	Channel	55340	55916	56491
		Frequency	3560	3617.6	3675.1
	SCC	Channel	55511	56087	56662
		Frequency	3577.1	3634.7	3692.2
20 + 20	PCC	Channel	55340	55891	56442
		Frequency	3560	3615.1	3670.2
	SCC	Channel	55538	56089	56640
		Frequency	3579.8	3634.9	3690


### 3 Conducted Test Items

#### 3.1 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.1 Test Setup

##### 3.1.2 Conducted Output Power

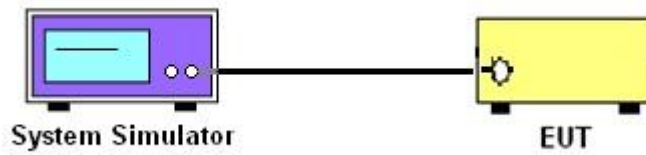

##### 3.1.3 Test Result of Conducted Test

Please refer to Appendix A.



## **3.2 Conducted Output Power**

### **3.2.1 Description of the Conducted Output Power Measurement**

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

### **3.2.2 Test Procedures**

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



### 3.3 EIRP

#### 3.3.1 Description of the EIRP Measurement

The EIRP of mobile transmitters must not exceed 23 dBm /10 megahertz.

The testing follows ANSI C63.26-2015 Section 5.2.5.5

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

Device	Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
End User Device	23	n/a

**Remark:** Total channel power is complied with EIRP limit 23dBm/10MHz.

#### 3.3.1 Test Procedures

The testing follows procedure in Section 5.2 of ANSI C63.26-2015 and KDB 940660 D01 Part 96 CBRS Eqpt v03 Section 3.2(b)(2)

Determine the EIRP by adding the effective antenna gain to the measured average conducted power level.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup


For radiated test below 30MHz

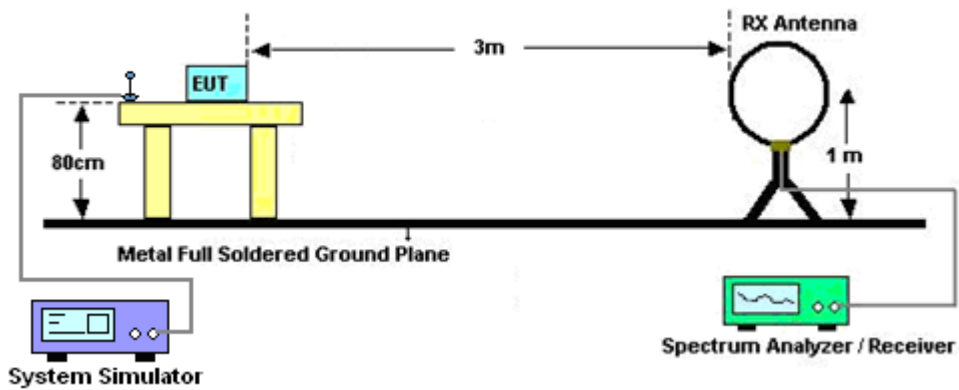


For radiated test from 30MHz to 1GHz

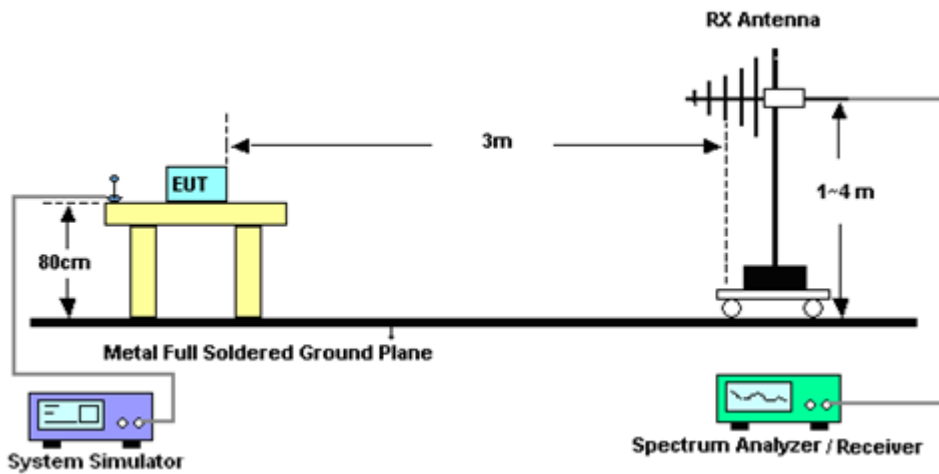

For radiated test from 1GHz to 18GHz

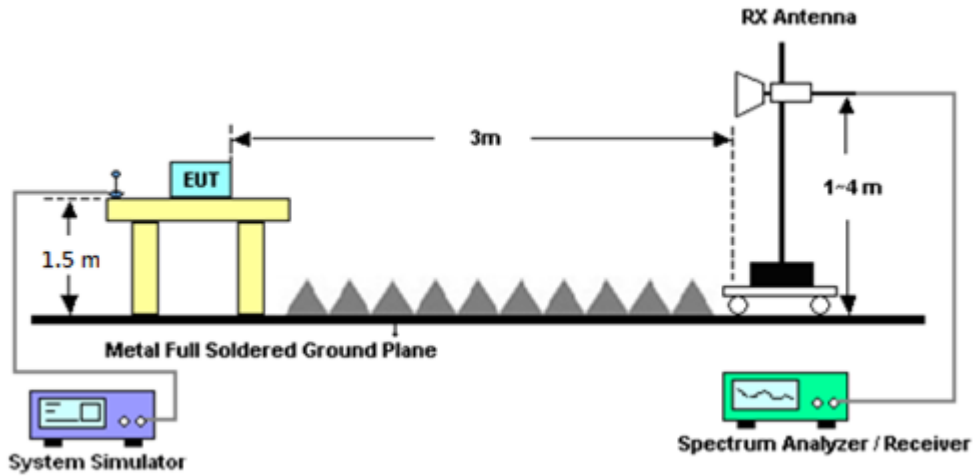

For radiated test above 18GHz

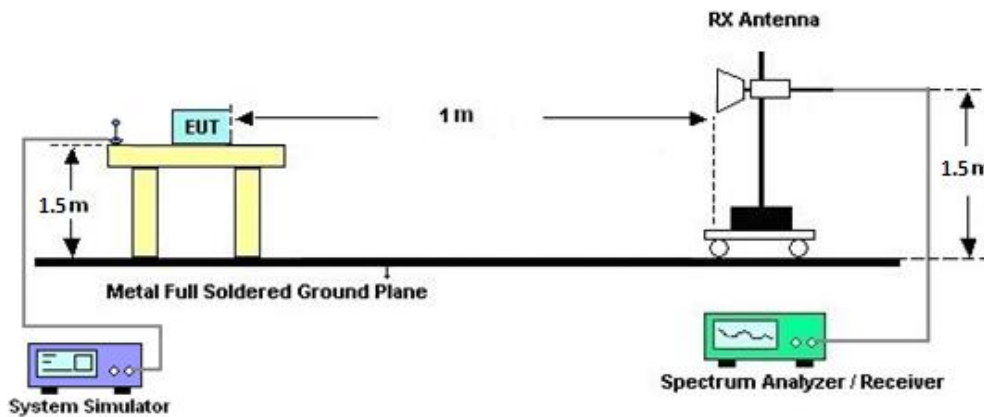

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.

**Note:**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



## 4.4 Radiated Spurious Emission

### 4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.  
EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain  
ERP (dBm) = EIRP - 2.15
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.  
The limit line is -40dBm/MHz





## 5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 04, 2021	Dec. 14, 2021~ Dec. 16, 2021	Jan. 03, 2022	Radiation (03CH12-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 07, 2022	Jan. 22, 2022~ Jan. 24, 2022	Jan. 06, 2023	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	37059 & 01	30MHz~1GHz	Oct. 09, 2021	Dec. 14, 2021~ Jan. 24, 2022	Oct. 08, 2022	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 09, 2021	Dec. 14, 2021~ Jan. 24, 2022	Oct. 08, 2022	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1326	1GHz~18GHz	Oct. 25, 2021	Dec. 14, 2021~ Jan. 24, 2022	Oct. 24, 2022	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1212	1GHz~18GHz	May 18, 2021	Dec. 14, 2021~ Jan. 24, 2022	May 17, 2022	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917025 1	18GHz~40GHz	Nov. 30, 2021	Dec. 14, 2021~ Jan. 24, 2022	Nov. 29, 2022	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917057 6	18GHz~40GHz	May 21, 2021	Dec. 14, 2021~ Jan. 24, 2022	May 20, 2022	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 24, 2021	Dec. 14, 2021~ Jan. 24, 2022	Mar. 23, 2022	Radiation (03CH12-HY)
Preamplifier	Aglient	8449B	3008A02375	1GHz~26.5GHz	May 25, 2021	Dec. 14, 2021~ Jan. 24, 2022	May 24, 2022	Radiation (03CH12-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03K	1710001800 054002	1GHz~18GHz	Jun. 16, 2021	Dec. 14, 2021~ Jan. 24, 2022	Jun. 15, 2022	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 22, 2021	Dec. 14, 2021~ Jan. 24, 2022	Jun. 21, 2022	Radiation (03CH12-HY)
Spectrum Analyzer	Keysight	N9010A	MY53470118	10Hz~44GHz	Mar. 05, 2021	Dec. 14, 2021~ Jan. 24, 2022	Mar. 04, 2022	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 22, 2021	Dec. 14, 2021~ Jan. 24, 2022	Feb. 21, 2022	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30MHz~40GHz	Feb. 22, 2021	Dec. 14, 2021~ Jan. 24, 2022	Feb. 21, 2022	Radiation (03CH12-HY)
Filter	Wainwright	WLKS1200-12 SS	SN2	1.2GHz Low Pass Filter	Mar. 17, 2021	Dec. 14, 2021~ Jan. 24, 2022	Mar. 16, 2022	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-1080 -1200-15000-6 OSS	SN1	1.2GHz High Pass Filter	Mar. 17, 2021	Dec. 14, 2021~ Jan. 24, 2022	Mar. 16, 2022	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 OST	SN2	3GHz High Pass Filter	Jul. 12, 2021	Dec. 14, 2021~ Jan. 24, 2022	Jul. 11, 2022	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP140349	N/A	Sep. 30, 2021	Dec. 14, 2021~ Jan. 24, 2022	Sep. 29, 2022	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Dec. 14, 2021~ Jan. 24, 2022	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Dec. 14, 2021~ Jan. 24, 2022	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Dec. 14, 2021~ Jan. 24, 2022	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Dec. 14, 2021~ Jan. 24, 2022	N/A	Radiation (03CH12-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Radio Communication Analyzer	Anritsu	MT8821C	6201664755	2/3/4G/LTE FDD/TDD with44)/LTE-3C C DLCA/2CC ULCA, CatM1/NB1/NB2	Jul. 21, 2021	Feb. 09, 2022~ Feb. 15, 2022	Jul. 20, 2022	Conducted (TH03-HY)



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.10 dB
---	---------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.39 dB
---	---------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.34 dB
---	---------



## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power & EIRP)

<Main Antenna>

LTE Band 48 Maximum Average Power [dBm] (GT - LC = 0.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
20	1	0	QPSK	19.19	19.27	19.53	20.43	0.1104
20	1	49		19.18	19.19	19.35		
20	1	99		19.07	19.22	19.20		
20	50	0		18.23	18.30	18.66		
20	50	24		18.20	18.32	18.65		
20	50	50		18.19	18.22	18.24		
20	100	0		18.22	18.36	18.65		
20	1	0	16-QAM	18.19	18.37	18.55	19.45	0.0881
20	1	49		18.27	18.29	18.33		
20	1	99		18.18	18.17	18.23		
20	50	0		17.25	17.34	17.55		
20	50	24		17.21	17.41	17.41		
20	50	50		17.19	17.35	17.18		
20	100	0		17.20	17.34	17.35		
20	1	0	64-QAM	17.15	17.12	17.36	18.26	0.0670
20	1	49		17.20	17.14	17.15		
20	1	99		17.18	17.19	17.23		
20	50	0		16.21	16.36	16.51		
20	50	24		16.17	16.40	16.37		
20	50	50		16.16	16.31	16.18		
20	100	0		16.18	16.33	16.30		
20	1	0	256-QAM	14.32	14.60	14.56	15.61	0.0364
20	1	49		14.30	14.60	14.47		
20	1	99		14.27	14.58	14.29		
20	50	0		14.22	14.44	14.33		
20	50	24		14.22	14.65	14.71		
20	50	50		14.35	14.54	14.48		
20	100	0		14.33	14.48	14.21		
Limit	EIRP < 23dBm/10MHz			Result			Pass	



LTE Band 48 Maximum Average Power [dBm] (GT - LC = 0.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
15	1	0	QPSK	19.04	19.04	19.35	20.25	0.1059
15	1	37		19.07	19.15	19.34		
15	1	74		19.06	19.13	19.09		
15	36	0		18.13	18.29	18.36		
15	36	20		18.10	18.20	18.50		
15	36	39		18.03	18.16	18.05		
15	75	0		18.05	18.30	18.28		
15	1	0	16-QAM	18.00	18.29	18.44	19.34	0.0859
15	1	37		18.24	18.12	18.30		
15	1	74		18.04	18.20	18.08		
15	36	0		17.24	17.23	17.37		
15	36	20		17.19	17.27	17.30		
15	36	39		17.04	17.22	17.11		
15	75	0		17.12	17.27	17.19		
15	1	0	64-QAM	17.13	17.11	17.18	18.08	0.0643
15	1	37		17.16	17.14	17.12		
15	1	74		17.00	17.08	17.16		
15	36	0		16.16	16.35	16.41		
15	36	20		16.13	16.22	16.30		
15	36	39		16.13	16.26	16.03		
15	75	0		16.11	16.24	16.17		
15	1	0	256-QAM	14.27	14.53	14.40	15.59	0.0362
15	1	37		14.29	14.50	14.37		
15	1	74		14.20	14.45	14.14		
15	36	0		14.18	14.38	14.32		
15	36	20		14.02	14.42	14.69		
15	36	39		14.27	14.45	14.47		
15	75	0		14.15	14.49	14.06		
Limit	EIRP < 23dBm/10MHz			Result			Pass	



LTE Band 48 Maximum Average Power [dBm] (GT - LC = 0.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
10	1	0	QPSK	19.01	19.15	19.36	20.26	0.1062
10	1	25		19.05	19.13	19.26		
10	1	49		19.03	19.10	19.13		
10	25	0		18.20	18.22	18.36		
10	25	12		18.04	18.13	18.63		
10	25	25		18.15	18.13	18.14		
10	50	0		18.04	18.29	18.29		
10	1	0	16-QAM	18.15	18.24	18.54	19.44	0.0879
10	1	25		18.08	18.26	18.17		
10	1	49		18.05	18.02	18.04		
10	25	0		17.19	17.32	17.44		
10	25	12		17.21	17.33	17.35		
10	25	25		17.07	17.30	17.12		
10	50	0		17.13	17.15	17.32		
10	1	0	64-QAM	17.18	16.98	17.33	18.23	0.0665
10	1	25		17.04	17.13	17.20		
10	1	49		17.12	17.13	17.04		
10	25	0		16.18	16.24	16.49		
10	25	12		16.12	16.26	16.26		
10	25	25		16.12	16.24	16.13		
10	50	0		16.16	16.27	16.22		
10	1	0	256-QAM	14.29	14.67	14.36	15.57	0.0361
10	1	25		14.20	14.63	14.43		
10	1	49		14.24	14.52	14.29		
10	25	0		14.11	14.34	14.16		
10	25	12		14.22	14.47	14.66		
10	25	25		14.34	14.53	14.48		
10	50	0		14.20	14.43	14.06		
Limit	EIRP < 23dBm/10MHz			Result			Pass	



LTE Band 48 Maximum Average Power [dBm] (GT - LC = 0.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
5	1	0	QPSK	19.00	19.13	19.46	20.36	0.1086
5	1	12		19.10	19.02	19.30		
5	1	24		19.07	19.17	19.14		
5	12	0		18.16	18.27	18.56		
5	12	7		18.06	18.08	18.45		
5	12	13		18.16	18.20	18.08		
5	25	0		18.16	18.08	18.33		
5	1	0	16-QAM	18.15	18.24	18.41	19.31	0.0853
5	1	12		18.15	18.14	18.32		
5	1	24		18.11	18.06	18.12		
5	12	0		17.06	17.21	17.51		
5	12	7		17.17	17.20	17.29		
5	12	13		17.12	17.21	17.07		
5	25	0		17.04	17.21	17.21		
5	1	0	64-QAM	17.00	17.17	17.17	18.07	0.0641
5	1	12		17.17	17.05	17.15		
5	1	24		17.03	17.13	17.16		
5	12	0		16.17	16.36	16.49		
5	12	7		16.07	16.29	16.22		
5	12	13		16.01	16.19	16.15		
5	25	0		16.15	16.15	16.24		
5	1	0	256-QAM	14.30	14.51	14.56	15.46	0.0352
5	1	12		14.29	14.56	14.42		
5	1	24		14.23	14.34	14.23		
5	12	0		14.20	14.42	14.13		
5	12	7		14.15	14.46	14.54		
5	12	13		14.18	14.53	14.28		
5	25	0		14.24	14.47	14.20		
Limit	EIRP < 23dBm/10MHz			Result			Pass	



LTE Band 48C_CA Maximum Average Power [dBm] (GT - LC = 0.9 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
20+20	100	0	100	0	QPSK	19.13	19.14	19.01	22.20	0.1660
20+20	1	0	1	99		12.77	12.76	12.55		
20+20	1	99	1	0		21.28	21.30	21.12		
20+20	100	0	100	0	16-QAM	19.19	19.16	19.03	21.67	0.1469
20+20	1	0	1	99		13.21	13.24	13.11		
20+20	1	99	1	0		20.69	20.77	20.61		
20+20	100	0	100	0	64-QAM	19.18	19.15	19.04	20.08	0.1019
20+20	1	0	1	99		12.89	12.99	12.76		
20+20	1	99	1	0		18.55	18.52	18.33		
20+20	100	0	100	0	256-QAM	17.27	17.25	17.12	18.17	0.0656
20+20	1	0	1	99		12.94	12.95	12.82		
20+20	1	99	1	0		16.61	16.57	16.55		
Limit	EIRP < 23dBm/10MHz					Result			Pass	





<MIMO2 Antenna>

LTE Band 48 Maximum Average Power [dBm] (GT - LC = 0.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
20	1	0	QPSK	21.08	21.10	20.92	22.22	0.1667
20	1	49		21.21	21.32	21.24		
20	1	99		21.05	21.02	21.12		
20	50	0		21.20	21.18	21.07		
20	50	24		21.21	21.21	21.16		
20	50	50		21.20	21.19	21.14		
20	100	0		21.12	21.17	21.16		
20	1	0	16-QAM	21.11	21.14	20.99	22.04	0.1600
20	1	0	64-QAM	21.00	21.04	20.90	21.94	0.1563
Limit	EIRP < 23dBm/10MHz			Result			Pass	

LTE Band 48 Maximum Average Power [dBm] (GT - LC = 0.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
15	1	0	QPSK	21.03	20.99	21.02	22.08	0.1614
15	1	37		21.17	21.08	21.15		
15	1	74		21.09	21.09	21.10		
15	36	0		21.12	21.06	21.10		
15	36	20		21.14	21.10	21.15		
15	36	39		21.14	21.09	21.18		
15	75	0		21.14	21.11	21.16		
15	1	0	16-QAM	21.09	21.06	21.10	22.00	0.1585
15	1	0	64-QAM	21.02	21.04	21.02	21.94	0.1563
Limit	EIRP < 23dBm/10MHz			Result			Pass	



LTE Band 48 Maximum Average Power [dBm] (GT - LC = 0.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
10	1	0	QPSK	21.00	20.98	21.05	22.05	0.1603
10	1	25		21.11	21.02	21.10		
10	1	49		21.08	21.06	21.10		
10	25	0		21.10	21.03	21.14		
10	25	12		21.10	21.00	21.13		
10	25	25		21.12	21.03	21.12		
10	50	0		21.14	21.06	21.15		
10	1	0	16-QAM	21.06	20.98	21.14	22.04	0.1600
10	1	0	64-QAM	20.98	20.97	21.05	21.95	0.1567
Limit	EIRP < 23dBm/10MHz			Result			Pass	

LTE Band 48 Maximum Average Power [dBm] (GT - LC = 0.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
5	1	0	QPSK	21.11	21.12	21.17	22.11	0.1626
5	1	12		21.17	21.13	21.20		
5	1	24		21.15	21.09	21.21		
5	12	0		21.14	21.13	21.21		
5	12	7		21.15	21.09	21.19		
5	12	13		21.14	21.12	21.21		
5	25	0		21.14	21.13	21.18		
5	1	0	16-QAM	21.16	21.12	21.21	22.11	0.1626
5	1	0	64-QAM	21.08	21.09	21.14	22.04	0.1600
Limit	EIRP < 23dBm/10MHz			Result			Pass	



LTE Band 48C_CA Maximum Average Power [dBm] (GT - LC = 0.9 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
20+20	100	0	100	0	QPSK	21.50	21.35	21.37	22.40	0.1738
20+20	1	0	1	99		20.79	20.68	20.71		
20+20	1	99	1	0		21.48	21.27	21.30		
20+20	100	0	100	0	16-QAM	21.57	21.42	21.42	22.47	0.1766
20+20	1	0	1	99		20.80	20.69	20.76		
20+20	1	99	1	0		21.49	21.29	21.34		
20+20	100	0	100	0	64-QAM	21.52	21.37	21.39	22.42	0.1746
20+20	1	0	1	99		20.74	20.64	20.69		
20+20	1	99	1	0		21.45	21.25	21.29		
20+15	100	0	75	0	QPSK	21.52	21.37	21.42	22.45	0.1758
20+15	1	0	1	74		21.02	20.88	20.96		
20+15	1	74	1	0		21.55	21.31	21.38		
20+15	100	0	75	0	16-QAM	21.60	21.44	21.47	22.50	0.1778
20+15	1	0	1	74		21.01	20.90	20.97		
20+15	1	74	1	0		21.57	21.36	21.42		
20+15	100	0	75	0	64-QAM	21.56	21.42	21.46	22.46	0.1762
20+15	1	0	1	74		21.00	20.88	20.91		
20+15	1	74	1	0		21.54	21.31	21.37		
15+20	75	0	100	0	QPSK	21.50	21.21	21.22	22.47	0.1766
15+20	1	0	1	99		21.00	20.70	20.78		
15+20	1	74	1	0		21.57	21.25	21.29		
15+20	75	0	100	0	16-QAM	21.44	21.37	21.36	22.39	0.1734
15+20	1	0	1	99		20.84	20.76	20.89		
15+20	1	74	1	0		21.49	21.26	21.36		
15+20	75	0	100	0	64-QAM	21.54	21.26	21.35	22.44	0.1754
15+20	1	0	1	99		20.88	20.74	20.72		
15+20	1	74	1	0		21.40	21.27	21.25		
Limit	EIRP < 23dBm/10MHz					Result			Pass	



LTE Band 48C_CA Maximum Average Power [dBm] (GT - LC = 0.9 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
20+10	100	0	50	0	QPSK	21.51	21.29	21.41	22.41	0.1742
20+10	1	0	1	49		21.00	20.74	20.81		
20+10	1	99	1	0		21.43	21.25	21.35		
20+10	100	0	50	0	16-QAM	21.55	21.27	21.37	22.46	0.1762
20+10	1	0	1	49		20.82	20.89	20.97		
20+10	1	99	1	0		21.56	21.24	21.42		
20+10	100	0	50	0	64-QAM	21.37	21.28	21.34	22.44	0.1754
20+10	1	0	1	49		20.95	20.73	20.77		
20+10	1	99	1	0		21.54	21.31	21.17		
10+20	50	0	100	0	QPSK	21.48	21.22	21.36	22.38	0.1730
10+20	1	0	1	99		21.00	20.75	20.79		
10+20	1	49	1	0		21.39	21.22	21.22		
10+20	50	0	100	0	16-QAM	21.52	21.28	21.46	22.42	0.1746
10+20	1	0	1	99		20.86	20.90	20.89		
10+20	1	49	1	0		21.50	21.36	21.36		
10+20	50	0	100	0	64-QAM	21.45	21.30	21.44	22.36	0.1722
10+20	1	0	1	99		20.90	20.80	20.84		
10+20	1	49	1	0		21.46	21.22	21.36		
20+5	100	0	25	0	QPSK	21.53	21.33	21.34	22.43	0.1750
20+5	1	0	1	24		21.09	20.70	20.82		
20+5	1	99	1	0		21.38	21.14	21.31		
20+5	100	0	25	0	16-QAM	21.51	21.37	21.34	22.41	0.1742
20+5	1	0	1	24		20.93	20.75	20.78		
20+5	1	99	1	0		21.45	21.16	21.30		
20+5	100	0	25	0	64-QAM	21.51	21.38	21.39	22.43	0.1750
20+5	1	0	1	24		20.80	20.71	20.71		
20+5	1	99	1	0		21.53	21.25	21.24		
5+20	25	0	100	0	QPSK	21.50	21.27	21.23	22.40	0.1738
5+20	1	0	1	99		21.11	20.72	20.77		
5+20	1	24	1	0		21.32	21.31	21.36		
5+20	25	0	100	0	16-QAM	21.54	21.35	21.42	22.44	0.1754
5+20	1	0	1	99		20.95	20.83	20.95		
5+20	1	24	1	0		21.45	21.16	21.39		
5+20	25	0	100	0	64-QAM	21.55	21.24	21.32	22.45	0.1758
5+20	1	0	1	99		20.84	20.76	20.79		
5+20	1	24	1	0		21.46	21.16	21.18		
Limit	EIRP < 23dBm/10MHz					Result			Pass	



## Appendix B. Test Results of Radiated Test

<Main Antenna>

### LTE Band 48

LTE Band 48 / 20MHz / QPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	7102	-56.31	-40	-16.31	-51.82	-66.27	1.78	11.74	H
	10653	-58.98	-40	-18.98	-56.48	-67.41	2.47	10.90	H
	14204	-55.03	-40	-15.03	-57.81	-63.87	2.87	11.71	H
	21307	-54.93	-40	-14.93	-76.94	-71.65	1.98	18.70	H
	24858	-52.42	-40	-12.42	-77.38	-68.43	2.07	18.07	H
	28409	-51.09	-40	-11.09	-76.6	-68.34	2.32	19.56	H
	7102	-52.59	-40	-12.59	-47.71	-62.55	1.78	11.74	V
	10653	-59.20	-40	-19.20	-56.45	-67.63	2.47	10.90	V
	14204	-55.37	-40	-15.37	-57.88	-64.21	2.87	11.71	V
	21307	-55.12	-40	-15.12	-77	-71.84	1.98	18.70	V
	24858	-51.26	-40	-11.26	-77.43	-67.27	2.07	18.07	V
	28409	-49.21	-40	-9.21	-76.54	-66.46	2.32	19.56	V
Middle	7232	-55.96	-40	-15.96	-51.58	-65.64	1.85	11.53	H
	10848	-58.00	-40	-18.00	-55.85	-66.33	2.57	10.90	H
	14464	-55.84	-40	-15.84	-58.54	-64.07	2.85	11.09	H
	18080	-54.06	-40	-14.06	-72.2	-70.29	1.76	17.98	H
	21697	-54.08	-40	-14.08	-75.72	-70.87	1.99	18.78	H
	25312	-51.84	-40	-11.84	-77.18	-68.44	2.14	18.74	H
	7232	-52.21	-40	-12.21	-47.56	-61.89	1.85	11.53	V
	10848	-58.19	-40	-18.19	-55.83	-66.52	2.57	10.90	V
	14464	-56.56	-40	-16.56	-58.43	-64.79	2.85	11.09	V
	18080	-54.81	-40	-14.81	-72.02	-71.04	1.76	17.98	V
	21697	-54.35	-40	-14.35	-75.98	-71.14	1.99	18.78	V
	25312	-50.67	-40	-10.67	-77.27	-67.27	2.14	18.74	V



Highest	7362	-52.20	-40	-12.20	-47.61	-61.61	1.92	11.32	H
	11043	-58.32	-40	-18.32	-56.55	-66.64	2.63	10.95	H
	14724	-54.54	-40	-14.54	-58.15	-63.34	2.91	11.72	H
	18405	-55.31	-40	-15.31	-73.79	-71.36	1.87	17.92	H
	22087	-54.78	-40	-14.78	-76.97	-71.57	2.08	18.87	H
	25768	-51.13	-40	-11.13	-77.22	-68.15	2.03	19.05	H
	7362	-51.87	-40	-11.87	-47.1	-61.28	1.92	11.32	V
	11043	-58.26	-40	-18.26	-56.33	-66.58	2.63	10.95	V
	14724	-56.04	-40	-16.04	-57.98	-64.84	2.91	11.72	V
	18405	-56.43	-40	-16.43	-74.03	-72.48	1.87	17.92	V
	22087	-51.50	-40	-11.50	-73.69	-68.29	2.08	18.87	V
	25768	-49.84	-40	-9.84	-77.12	-66.86	2.03	19.05	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 48C

LTE Band 48C / 20MHz + 20MHz / QPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	7140	-60.19	-40	-20.19	-55.76	-70.07	1.80	11.68	H
	10705	-58.69	-40	-18.69	-56.29	-67.09	2.50	10.90	H
	14279	-55.35	-40	-15.35	-58.1	-64.02	2.86	11.53	H
	21418	-54.91	-40	-14.91	-76.64	-71.66	1.95	18.70	H
	24981	-51.80	-40	-11.80	-76.76	-67.99	2.08	18.27	H
	28556	-51.49	-40	-11.49	-76.9	-68.71	2.31	19.53	H
	7140	-60.54	-40	-20.54	-55.76	-70.42	1.80	11.68	V
	10705	-59.16	-40	-19.16	-56.52	-67.56	2.50	10.90	V
	14279	-55.86	-40	-15.86	-58.18	-64.53	2.86	11.53	V
	21418	-54.87	-40	-14.87	-76.54	-71.62	1.95	18.70	V
	24981	-51.23	-40	-11.23	-77.34	-67.42	2.08	18.27	V
	28556	-49.17	-40	-9.17	-76.45	-66.39	2.31	19.53	V
Middle	7250	-59.05	-40	-19.05	-54.64	-68.70	1.86	11.50	H
	10870	-57.53	-40	-17.53	-55.41	-65.85	2.58	10.90	H
	14498	-55.69	-40	-15.69	-58.38	-63.84	2.85	11.00	H
	18122	-54.21	-40	-14.21	-72.4	-70.41	1.77	17.98	H
	21751	-55.16	-40	-15.16	-76.83	-71.95	2.01	18.80	H
	25370	-51.80	-40	-11.80	-77.21	-68.47	2.15	18.82	H
	7250	-57.29	-40	-17.29	-52.63	-66.94	1.86	11.50	V
	10870	-57.76	-40	-17.76	-55.44	-66.08	2.58	10.90	V
	14498	-56.81	-40	-16.81	-58.6	-64.96	2.85	11.00	V
	18122	-55.13	-40	-15.13	-72.4	-71.33	1.77	17.98	V
	21751	-55.14	-40	-15.14	-76.8	-71.93	2.01	18.80	V
	25370	-50.68	-40	-10.68	-77.38	-67.35	2.15	18.82	V



Highest	7360	-59.15	-40	-19.15	-54.56	-68.56	1.91	11.32	H
	11040	-58.58	-40	-18.58	-56.8	-66.89	2.63	10.95	H
	14718	-54.80	-40	-14.80	-58.38	-63.59	2.91	11.70	H
	18399	-55.04	-40	-15.04	-73.51	-71.09	1.87	17.92	H
	22073	-54.54	-40	-14.54	-76.67	-71.33	2.08	18.87	H
	25758	-51.47	-40	-11.47	-77.54	-68.49	2.04	19.05	H
	7360	-57.75	-40	-17.75	-52.97	-67.16	1.91	11.32	V
	11040	-58.00	-40	-18.00	-56.05	-66.31	2.63	10.95	V
	14718	-56.27	-40	-16.27	-58.21	-65.06	2.91	11.70	V
	18399	-56.18	-40	-16.18	-73.77	-72.23	1.87	17.92	V
	22073	-54.65	-40	-14.65	-76.78	-71.44	2.08	18.87	V
	25758	-50.22	-40	-10.22	-77.48	-67.24	2.04	19.05	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.





<MIMO2 Antenna>

**LTE Band 48**

LTE Band 48 / 20MHz / QPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	7102	-58.81	-40	-18.81	-59.68	-68.77	1.78	11.74	H
	10653	-58.46	-40	-18.46	-62.83	-66.89	2.47	10.90	H
	14204	-57.09	-40	-17.09	-67.45	-65.93	2.87	11.71	H
	21307	-54.94	-40	-14.94	-75.45	-71.66	1.98	18.70	H
	24858	-52.04	-40	-12.04	-77.01	-68.05	2.07	18.07	H
	28409	-51.00	-40	-11.00	-76.57	-68.25	2.32	19.56	H
	7102	-59.37	-40	-19.37	-59.85	-69.33	1.78	11.74	V
	10653	-59.10	-40	-19.10	-63.22	-67.53	2.47	10.90	V
	14204	-56.51	-40	-16.51	-66.6	-65.35	2.87	11.71	V
	21307	-55.41	-40	-15.41	-75.79	-72.13	1.98	18.70	V
	24858	-51.42	-40	-11.42	-77.6	-67.43	2.07	18.07	V
	28409	-49.64	-40	-9.64	-77.03	-66.89	2.32	19.56	V
Middle	7232	-59.67	-40	-19.67	-60.96	-69.35	1.85	11.53	H
	10848	-58.35	-40	-18.35	-63.15	-66.68	2.57	10.90	H
	14464	-57.13	-40	-17.13	-67.48	-65.36	2.85	11.09	H
	18080	-54.73	-40	-14.73	-71.07	-70.96	1.76	17.98	H
	21697	-54.77	-40	-14.77	-74.99	-71.56	1.99	18.78	H
	25312	-52.65	-40	-12.65	-78.15	-69.25	2.14	18.74	H
	7232	-59.84	-40	-19.84	-60.86	-69.52	1.85	11.53	V
	10848	-58.52	-40	-18.52	-63.11	-66.85	2.57	10.90	V
	14464	-58.11	-40	-18.11	-67.63	-66.34	2.85	11.09	V
	18080	-55.62	-40	-15.62	-71.03	-71.85	1.76	17.98	V
	21697	-54.32	-40	-14.32	-74.53	-71.11	1.99	18.78	V
	25312	-51.15	-40	-11.15	-77.91	-67.75	2.14	18.74	V



Highest	7362	-59.39	-40	-19.39	-60.77	-68.80	1.92	11.32	H
	11043	-59.02	-40	-19.02	-64.34	-67.34	2.63	10.95	H
	14724	-56.10	-40	-16.10	-67.59	-64.90	2.91	11.72	H
	18405	-56.37	-40	-16.37	-73.43	-72.42	1.87	17.92	H
	22087	-55.80	-40	-15.80	-76.71	-72.59	2.08	18.87	H
	25768	-51.53	-40	-11.53	-77.71	-68.55	2.03	19.05	H
	7362	-57.37	-40	-17.37	-58.57	-66.78	1.92	11.32	V
	11043	-58.86	-40	-18.86	-64.02	-67.18	2.63	10.95	V
	14724	-57.92	-40	-17.92	-67.74	-66.72	2.91	11.72	V
	18405	-57.53	-40	-17.53	-73.71	-73.58	1.87	17.92	V
	22087	-55.53	-40	-15.53	-76.44	-72.32	2.08	18.87	V
	25768	-50.41	-40	-10.41	-77.78	-67.43	2.03	19.05	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



### LTE Band 48C

LTE Band 48C / 2 MHz + 20MHz / QPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	7140	-59.82	-40	-19.82	-60.84	-69.70	1.80	11.68	H
	10705	-58.83	-40	-18.83	-63.32	-67.23	2.50	10.90	H
	14279	-57.04	-40	-17.04	-67.39	-65.71	2.86	11.53	H
	21418	-54.92	-40	-14.92	-75.15	-71.67	1.95	18.70	H
	24981	-52.21	-40	-12.21	-77.26	-68.40	2.08	18.27	H
	28556	-51.18	-40	-11.18	-76.66	-68.40	2.31	19.53	H
	7140	-60.24	-40	-20.24	-60.91	-70.12	1.80	11.68	V
	10705	-59.09	-40	-19.09	-63.34	-67.49	2.50	10.90	V
	14279	-57.36	-40	-17.36	-67.28	-66.03	2.86	11.53	V
	21418	-54.98	-40	-14.98	-75.15	-71.73	1.95	18.70	V
	24981	-51.74	-40	-11.74	-77.94	-67.93	2.08	18.27	V
	28556	-49.58	-40	-9.58	-76.93	-66.80	2.31	19.53	V
Middle	7250	-59.52	-40	-19.52	-60.82	-69.17	1.86	11.50	H
	10870	-58.80	-40	-18.80	-63.64	-67.12	2.58	10.90	H
	14498	-57.02	-40	-17.02	-67.37	-65.17	2.85	11.00	H
	18122	-55.06	-40	-15.06	-71.49	-71.26	1.77	17.98	H
	21751	-55.54	-40	-15.54	-75.81	-72.33	2.01	18.80	H
	25370	-51.41	-40	-11.41	-76.99	-68.08	2.15	18.82	H
	7250	-57.72	-40	-17.72	-58.77	-67.37	1.86	11.50	V
	10870	-58.33	-40	-18.33	-62.97	-66.65	2.58	10.90	V
	14498	-58.14	-40	-18.14	-67.59	-66.29	2.85	11.00	V
	18122	-55.98	-40	-15.98	-71.49	-72.18	1.77	17.98	V
	21751	-55.45	-40	-15.45	-75.71	-72.24	2.01	18.80	V
	25370	-50.90	-40	-10.90	-77.77	-67.57	2.15	18.82	V



Highest	7360	-59.42	-40	-19.42	-60.8	-68.83	1.91	11.32	H
	11040	-59.10	-40	-19.10	-64.41	-67.41	2.63	10.95	H
	14718	-55.84	-40	-15.84	-67.29	-64.63	2.91	11.70	H
	18399	-56.91	-40	-16.91	-73.96	-72.96	1.87	17.92	H
	22073	-56.35	-40	-16.35	-77.19	-73.14	2.08	18.87	H
	25758	-51.66	-40	-11.66	-77.83	-68.68	2.04	19.05	H
	7360	-59.03	-40	-19.03	-60.22	-68.44	1.91	11.32	V
	11040	-58.88	-40	-18.88	-64.02	-67.19	2.63	10.95	V
	14718	-57.65	-40	-17.65	-67.46	-66.44	2.91	11.70	V
	18399	-57.43	-40	-17.43	-73.6	-73.48	1.87	17.92	V
	22073	-55.44	-40	-15.44	-76.28	-72.23	2.08	18.87	V
	25758	-50.67	-40	-10.67	-78.03	-67.69	2.04	19.05	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.