



FCC RADIO TEST REPORT

FCC ID : 2AJN7-TP00144A
Equipment : Notebook
Brand Name : Lenovo
Model Name : TP00144A
Applicant : LC Future Center Limited Taiwan Branch
7F., No.780, Beian Rd., Zhongshan Dist., Taipei 104, Taiwan
Manufacturer : LCFC (HeFei) Electronics Technology Co., Ltd.
No. 3188-1, Yungu Road (Hefei Export Processing Zone), Hefei
Economics & Technology Development Area, Anhui, CHINA
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27

Equipment: Fibocom FM350-GL tested inside of Lenovo Notebook.

The product was received on Jul. 14, 2022 and testing was performed from Jul. 23, 2022 to Aug. 26, 2022. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	6
1.1 Product Feature of Equipment Under Test.....	6
1.2 Product Specification of Equipment Under Test.....	7
1.3 Modification of EUT	7
1.4 Testing Location	8
1.5 Applicable Standards.....	8
2 Test Configuration of Equipment Under Test	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System.....	10
2.3 Support Unit used in test configuration and system	10
2.4 Frequency List of Low/Middle/High Channels	11
3 Conducted Test Items.....	15
3.1 Measuring Instruments	15
3.2 Conducted Output Power and ERP/EIRP	16
4 Radiated Test Items	17
4.1 Measuring Instruments	17
4.2 Radiated Spurious Emission Measurement	19
5 List of Measuring Equipment.....	20
6 Uncertainty of Evaluation	22
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG271304C	01	Initial issue of report	Sep. 12, 2022
FG271304C	02	Revise Appendix A	Sep. 23, 2022



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§22.913 (a)(5)	Effective Radiated Power (n5)	Pass	
	§27.50 (c)(10)	Effective Radiated Power (n71)		
	§24.232 (c) §27.50 (h)(2)	Equivalent Isotropic Radiated Power (n2) (n25) (n7) (n38) (n41)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (n66)		
-	§24.232 (d) §27.50 (d)(5)	Peak-to-Average Ratio	-	See Note
-	§2.1049	Occupied Bandwidth	-	See Note
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g) §27.53 (h)	Conducted Band Edge Measurement (n2) (n5) (n25) (n66) (n71)	-	See Note
	§2.1051 §27.53 (m)(4)	Conducted Band Edge Measurement (n7) (n38) (n41)		
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g) §27.53 (h)	Conducted Spurious Emission (n2) (n5) (n25) (n66) (n71)	-	See Note
	§2.1051 §27.53 (m)(4)	Conducted Spurious Emission (n7) (n38) (n41)		
-	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	-	See Note



Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
4.2	§2.1053 §22.917 (a) §24.238 (a) §27.53 (g) §27.53 (h)	Radiated Spurious Emission (n2) (n5) (n25) (n66) (n71)	Pass	9.04 dB under the limit at 7666.000 MHz
	§2.1051 §27.53 (m)(4)	Radiated Spurious Emission (n7) (n38) (n41)		

Note:

1. The certified module (model: FM350-GL) which supports normal mode and TX switching mode being integrated into a notebook computer. Spot check on both modes were performed and no degradation occur. Thus the module test results were leveraged in this report and additionally reporting the spot check results in this report.
2. In normal mode, Conducted power was verified to be consistent with the original modular approval, so the output power level in the original modular grant is referenced in this report for determining EIRP of this host product, and verified the TX switching mode of Radiated Spurious Emission and Conducted power.

Declaration of Conformity:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sheng Kuo**Report Producer: Rachel Hsieh**



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Notebook
Brand Name	Lenovo
Model Name	TP00144A
FCC ID	2AJN7-TP00144A
EUT supports Radios application	WCDMA/HSPA/LTE/5G NR/GNSS
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer.
2. Equipment: Fibocom FM350-GL tested inside of Lenovo Notebook.

WWAN Antenna Information				
Main Antenna	Manufacturer	Amphenol	Peak gain (dBi)	5G NR n2: -0.62 5G NR n5: -1.06 5G NR n7: 1.93 5G NR n25: -0.27 5G NR n38: 1.93 5G NR n41: 1.74 5G NR n66: -2.51 5G NR n71: -1.71
	Part number	TKE427-12-000-R	Type	PIFA Antenna
MIMO 2 Antenna	Manufacturer	Amphenol	Peak gain (dBi)	5G NR n2: -0.74 5G NR n7: 1.95 5G NR n25: -0.43 5G NR n38: 1.84 5G NR n41: 1.76 5G NR n66: -1.29
	Part number	TKE423-16-000-R	Type	PIFA Antenna

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

	Normal mode	TX switching mode
	TX/RX	TX/RX
Ant_0 (Main)	WCDMA : 2/4/5 LTE : 2/4/5/7/12/13/14/17/25/26/30/38/66/71 NR : 2/5/7/25/30/38/66/71	WCDMA : 5 LTE : 5/12/13/14/17/26/41/48/71 NR : 5/41/71/77/78
Ant_2 (MIMO2)	LTE : 41/48 NR : 41/77/78	WCDMA : 2/4 LTE : 2/4/7/25/30/38/66 NR : 2/7/25/30/38/66

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	5G NR n2: 1852.5 MHz ~ 1907.5 MHz 5G NR n5: 826.5 MHz ~ 846.5 MHz 5G NR n7: 2502.5 MHz ~ 2567.5 MHz 5G NR n25: 1852.5 MHz ~ 1912.5 MHz 5G NR n38: 2575 MHz ~ 2615 MHz 5G NR n41: 2501.01 MHz ~ 2685 MHz 5G NR n66: 1712.5 MHz ~ 1777.5 MHz 5G NR n71: 665.5 MHz ~ 695.5 MHz
Rx Frequency	5G NR n2: 1932.5 MHz ~ 1987.5 MHz 5G NR n5: 871.5 MHz ~ 891.5 MHz 5G NR n7: 2622.5 MHz ~ 2687.5 MHz 5G NR n25: 1932.5 MHz ~ 1992.5 MHz 5G NR n38: 2575 MHz ~ 2615 MHz 5G NR n41: 2501.01 MHz ~ 2685 MHz 5G NR n66: 2112.5 MHz ~ 2197.5 MHz 5G NR n71: 619.5 MHz ~ 649.5 MHz
Bandwidth	5G NR n2: 5MHz / 10MHz / 15MHz / 20MHz 5G NR n5: 5MHz / 10MHz / 15MHz / 20MHz 5G NR n7: 5MHz / 10MHz / 15MHz / 20MHz 5G NR n25: 5MHz / 10MHz / 15MHz / 20MHz 5G NR n38: 5MHz / 10MHz / 15MHz / 20MHz 5G NR n41: 10MHz / 15MHz / 30MHz / 40MHz / 50MHz / 80MHz / 100MHz 5G NR n66: 5MHz / 10MHz / 15MHz / 20MHz / 40MHz 5G NR n71: 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	<Main Antenna> 5G NR n2: 23.27 dBm 5G NR n5: 24.59 dBm 5G NR n7: 23.38 dBm 5G NR n25: 22.78 dBm 5G NR n38: 23.27 dBm 5G NR n41: 26.50 dBm for HPUE 5G NR n66: 23.20 dBm 5G NR n71: 24.32 dBm <MIMO 2 Antenna> 5G NR n2: 23.64 dBm 5G NR n7: 23.63 dBm 5G NR n25: 23.68 dBm 5G NR n38: 22.98 dBm 5G NR n41: 26.61 dBm for HPUE 5G NR n66: 23.90 dBm
Type of Modulation	PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

1.3 Modification of EUT

No modifications made to the EUT during the testing.



1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333
Test Site No.	Sporton Site No.
	TH03-HY (TAF Code: 1190)
Test Engineer	Ivy Yeh
Temperature (°C)	20~24
Relative Humidity (%)	50~52
Remark	The Conducted test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010
Test Site No.	Sporton Site No.
	03CH13-HY
Test Engineer	Rain Lee, Jacky Hong and Mancy Chou
Temperature (°C)	20~25
Relative Humidity (%)	50~60

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in Tablet Type (three orthogonal axis (X: flat, Y: portrait, Z: landscape)) and Notebook Type, and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report..

Test Items	NR Band	Bandwidth (MHz)											Modulation					RB #			Test Channel				
		5	10	15	20	30	40	50	60	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H		
Max. Output Power	n2	v	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	n5	v	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	n7	v	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	n25	v	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	n38	v	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	n66	v	v	v	v	-	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	n71	v	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
E.R.P / E.I.R.P	n2	v	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v	Max Power							
	n5	v	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v								
	n7	v	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v								
	n25	v	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v								
	n38	v	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v								
	n66	v	v	v	v	-	v	-	-	-	-	-	v	v	v	v	v								
	n71	v	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v								
Radiated Spurious Emission	n2				v	-	-	-	-	-	-	-	v					v				v	v	v	
	n5				v	-	-	-	-	-	-	-	v					v				v	v	v	
	n7				v	-	-	-	-	-	-	-	v					v				v	v	v	
	n25				v	-	-	-	-	-	-	-	v					v				v	v	v	
	n38				v	-	-	-	-	-	-	-	v					v				v	v	v	
	n66					-	v	-	-	-	-	-	v					v				v	v	v	
	n71				v	-	-	-	-	-	-	-	v					v				v	v	v	
Remark	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. For radiated measurement, pre-scanned in two modes, DFT-s OFDM and CP OFDM. The worst cases (DFT-s OFDM) were recorded in this report, and the worst modes of FR1 and LTE for simultaneous transmission were verified and compliant. All the radiated test cases were performed with Battery 1. Test combination is EN-DC 5A-n2A, EN-DC 48A-n66A. 																								

Test Items	NR Band	Bandwidth (MHz)										Modulation					RB #			Test Channel		
		10	15	20	30	40	50	60	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	n41_HPUE	v	v	-	v	v	v	-	v	-	v	v	v	v	v	v	v	v		v	v	v
E.R.P / E.I.R.P	n41_HPUE	v	v	-	v	v	v	-	v	-	v	v	v	v	v	v	Max. Power					
Radiated Spurious Emission	n41_HPUE			-				-	v	-		v					v			v	v	v
Remark	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. All the radiated test cases were performed with Battery 1. Test combination is EN-DC 66A-n41A_HPUE. 																					

2.2 Connection Diagram of Test System

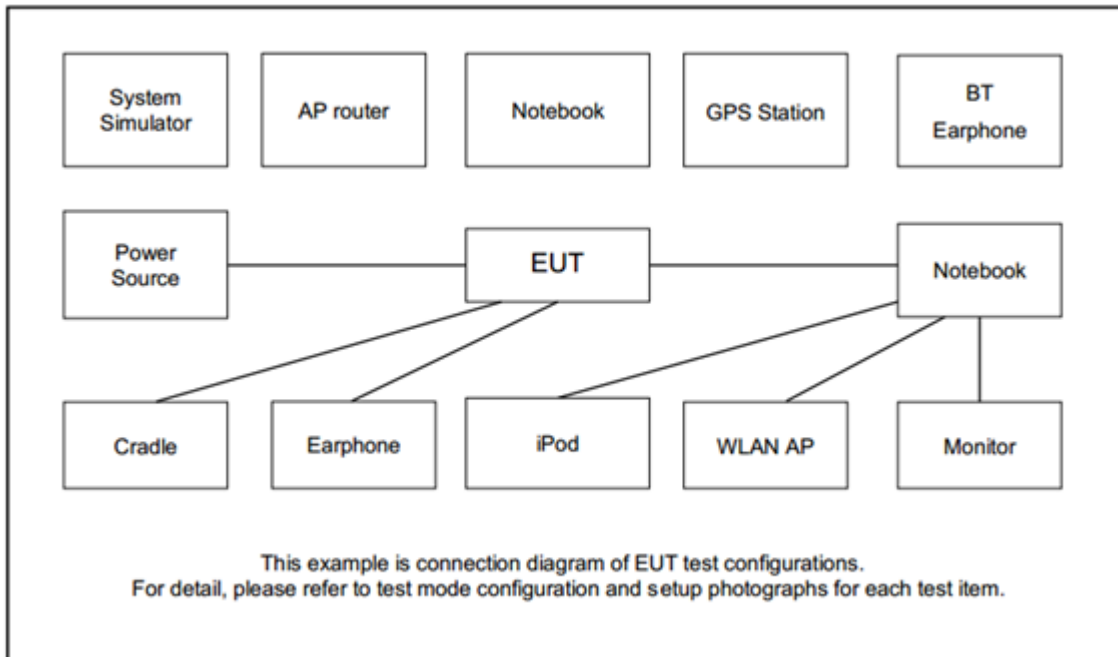

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	5G Wireless Test Platform	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	Earphone	SONY	MH750	N/A	Shielded, 1.2 m	N/A



2.4 Frequency List of Low/Middle/High Channels

5G NR n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	372000	376000	380000
	Frequency	1860	1880	1900
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5
10	Channel	371000	376000	381000
	Frequency	1855	1880	1905
5	Channel	370500	376000	381500
	Frequency	1852.5	1880	1907.5

5G NR n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5

5G NR n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	502000	507000	512000
	Frequency	2510	2535	2560
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5
10	Channel	501000	507000	513000
	Frequency	2505	2535	2565
5	Channel	500500	507000	513500
	Frequency	2502.5	2535	2567.5



5G NR n25 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	372000	376500	381000
	Frequency	1860	1882.5	1905
15	Channel	371500	376500	381500
	Frequency	1857.5	1882.5	1907.5
10	Channel	371000	376500	382000
	Frequency	1855	1882.5	1910
5	Channel	370500	376500	382500
	Frequency	1852.5	1882.5	1912.5

5G NR n38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	516000	519000	522000
	Frequency	2580	2595	2610
15	Channel	515500	519000	522500
	Frequency	2577.5	2595	2612.5
10	Channel	515000	519000	523000
	Frequency	2575	2595	2615
5	Channel	514500	519000	523500
	Frequency	2572.5	2595	2617.5



5G NR n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640
80	Channel	507204	518598	529998
	Frequency	2536.02	2592.99	2649.99
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
30	Channel	502200	518598	534996
	Frequency	2511	2592.99	2674.98
15	Channel	500700	518598	536496
	Frequency	2503.5	2592.99	2682.48
10	Channel	500202	518598	537000
	Frequency	2501.01	2592.99	2685

5G NR n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	346000	349000	352000
	Frequency	1730	1745	1760
20	Channel	344000	349000	354000
	Frequency	1720	1745	1770
15	Channel	343500	349000	354500
	Frequency	1717.5	1745	1772.5
10	Channel	343000	349000	355000
	Frequency	1715	1745	1775
5	Channel	342500	349000	355500
	Frequency	1712.5	1745	1777.5



5G NR n71 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	134600	136100	137600
	Frequency	673	680.5	688
15	Channel	134100	136100	138100
	Frequency	670.5	680.5	690.5
10	Channel	133600	136100	138600
	Frequency	668	680.5	693
5	Channel	133100	136100	139100
	Frequency	665.5	680.5	695.5


3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power

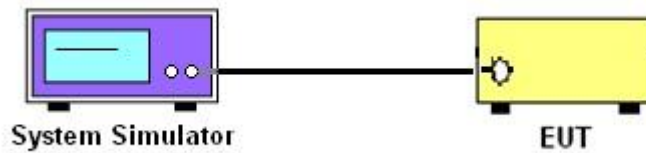

3.1.3 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5

The ERP of mobile transmitters must not exceed 3 Watts for 5G NR n71

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n2 and n25 and n7 and n38 and n41

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n66

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

The MIMO mode is completely uncorrelated, so the directional gain is selected the maximum gain among all antennas.

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated test below 30MHz

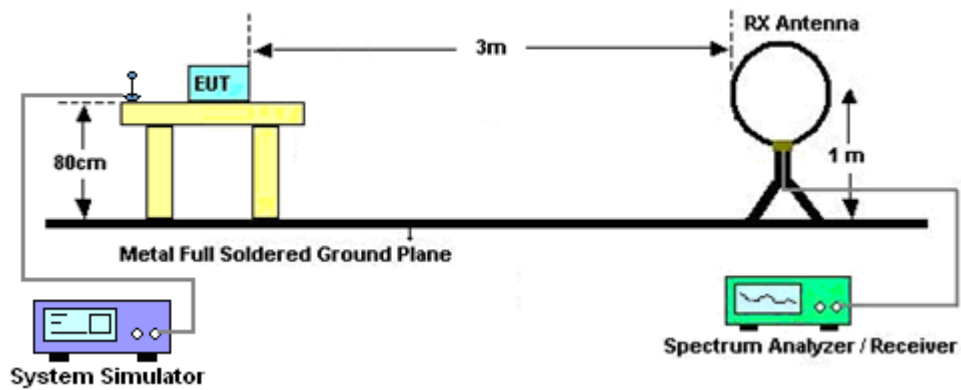


For radiated test from 30MHz to 1GHz

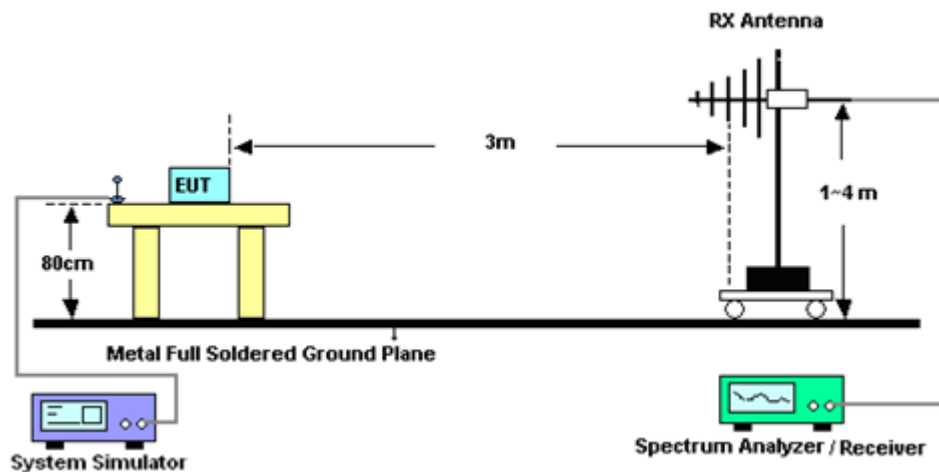

For radiated test from 1GHz to 18GHz

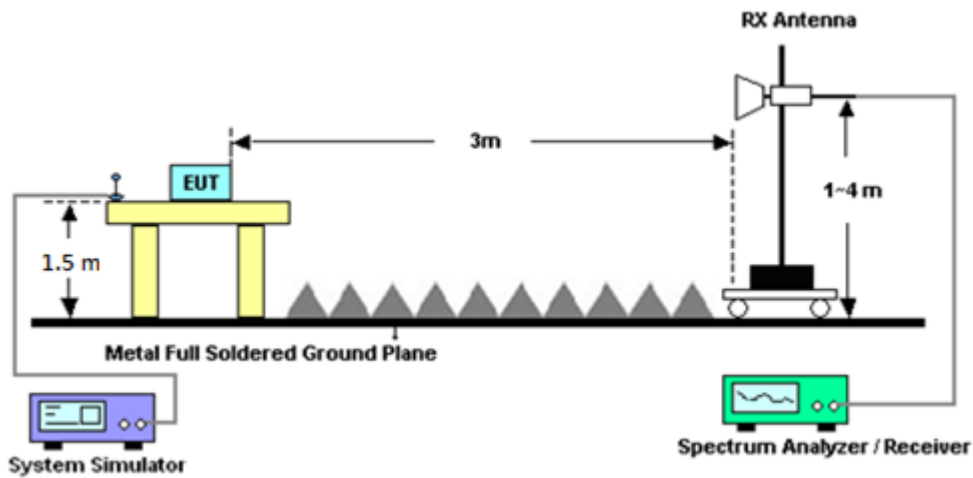

For radiated test above 18GHz

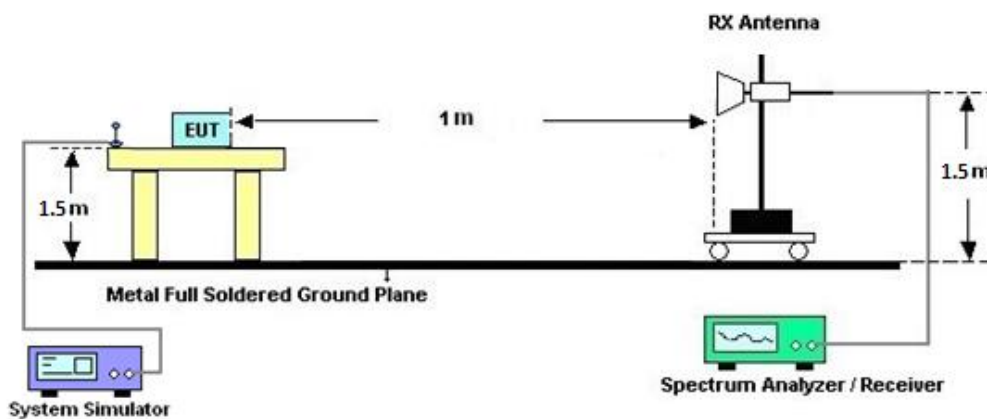

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7, n38, n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

For 5G NR n7, n38, n41

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain

ERP (dBm) = EIRP - 2.15



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	May 13, 2022	Jul. 23, 2022~ Aug. 23, 2022	May 12, 2023	Radiation (03CH13-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 24, 2021	Jul. 23, 2022~ Aug. 23, 2022	Dec. 23, 2022	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00993	18GHz~40GHz	Nov. 30, 2021	Jul. 23, 2022~ Aug. 23, 2022	Nov. 29, 2022	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 21, 2022	Jul. 23, 2022~ Aug. 23, 2022	Feb. 20, 2023	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz~40GHz	May 14, 2022	Jul. 23, 2022~ Aug. 23, 2022	May 13, 2023	Radiation (03CH13-HY)
Amplifier	SONOMA	310N	187282	9kHz~1GHz	Dec. 15, 2021	Jul. 23, 2022~ Aug. 23, 2022	Dec. 14, 2022	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	40103 & 07	30MHz~1GHz	Apr. 24, 2022	Jul. 23, 2022~ Aug. 23, 2022	Apr. 23, 2023	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	41912 & 05	30MHz~1GHz	Feb. 06, 2022	Jul. 23, 2022~ Aug. 23, 2022	Feb. 05, 2023	Radiation (03CH13-HY)
Hygrometer	TECPEL	DTM-303B	TP200889	N/A	Sep. 30, 2021	Jul. 23, 2022~ Aug. 23, 2022	Sep. 29, 2022	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 17, 2022	Jul. 23, 2022~ Aug. 23, 2022	May 16, 2023	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY53270147	1GHz~26.5GHz	Oct. 26, 2021	Jul. 23, 2022~ Aug. 23, 2022	Oct. 25, 2022	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Mar. 18, 2022	Jul. 23, 2022~ Aug. 23, 2022	Mar. 17, 2023	Radiation (03CH13-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN12	1.53GHz Low Pass Filter	Sep. 14, 2021	Jul. 23, 2022~ Aug. 23, 2022	Sep. 13, 2022	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-1080 -1200-15000-6 0SS	SN3	1.2GHz High Pass Filter	Jun. 30, 2022	Jul. 23, 2022~ Aug. 23, 2022	Jun. 29, 2023	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0SS	SN2	3GHz High Pass Filter	Jul. 12, 2022	Jul. 23, 2022~ Aug. 23, 2022	Jul. 11, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30MHz~18GHz	Feb. 09, 2022	Jul. 23, 2022~ Aug. 23, 2022	Feb. 08, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	804793/4	30MHz~18GHz	Feb. 09, 2022	Jul. 23, 2022~ Aug. 23, 2022	Feb. 08, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9 kHz~30 MHz	Mar. 10, 2022	Jul. 23, 2022~ Aug. 23, 2022	Mar. 09, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/4	30MHz~18GHz	Feb. 09, 2022	Jul. 23, 2022~ Aug. 23, 2022	Feb. 08, 2023	Radiation (03CH13-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Jul. 23, 2022~ Aug. 23, 2022	N/A	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Jul. 23, 2022~ Aug. 23, 2022	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Jul. 23, 2022~ Aug. 23, 2022	N/A	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02114	1-18GHz	Aug. 04, 2021	Jul. 23, 2022~ Aug. 02, 2022	Aug. 03, 2022	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02114	1-18GHz	Jul. 25, 2022	Aug. 03, 2022~ Aug. 23, 2022	Jul. 24, 2023	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1212	1GHz~18GHz	Mar. 10, 2022	Jul. 23, 2022~ Aug. 23, 2022	Mar. 09, 2023	Radiation (03CH13-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303B	TP200886	NA	Mar. 21, 2022	Aug. 25, 2022~ Aug. 26, 2022	Mar. 20, 2023	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8000A	6261940327	FR1	Oct. 29, 2021	Aug. 25, 2022~ Aug. 26, 2022	Oct. 28, 2022	Conducted (TH03-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.40 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.81 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.46 dB
---	---------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) and ERP/EIRP

<Main Antenna>

NR n2 Maximum Average Power [dBm] (GT - LC = -0.62 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	22.41	22.21	22.40	21.97	0.1574
5	1	23		22.35	22.29	22.41		
5	12	6		22.53	22.27	22.54		
5	1	1	QPSK	22.48	22.18	22.43		
5	1	23		22.29	22.22	22.45		
5	12	6		22.51	22.24	22.59		
5	1	1	16-QAM	21.85	21.87	21.94	21.32	0.1355
5	1	1	64-QAM	20.22	20.31	20.31		
5	1	1	256-QAM	18.32	18.33	18.65		
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = -0.62 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.29	22.03	22.15	21.76	0.1500
10	1	50		22.27	22.23	22.37		
10	25	12		22.34	22.08	22.37		
10	1	1	QPSK	22.27	22.02	22.33		
10	1	50		22.25	22.23	22.37		
10	25	12		22.32	22.07	22.38		
10	1	1	16-QAM	21.63	21.58	21.89	21.27	0.1340
10	1	1	64-QAM	20.12	20.10	20.21		
10	1	1	256-QAM	18.14	18.10	18.51		
Limit	EIRP < 2W			Result			Pass	



NR n2 Maximum Average Power [dBm] (GT - LC = -0.62 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.45	22.14	22.22	21.85	0.1531
15	1	77		22.27	22.19	22.32		
15	36	18		22.42	22.22	22.38		
15	1	1	QPSK	22.47	22.04	22.27		
15	1	77		22.28	22.15	22.35		
15	36	18		22.46	22.17	22.41		
15	1	1	16-QAM	21.75	21.64	21.86	21.24	0.1330
15	1	1	64-QAM	20.11	20.18	20.24		
15	1	1	256-QAM	18.23	18.17	18.31		
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = -0.62 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.83	23.19	23.02	22.65	0.1841
20	1	104		23.08	23.25	22.81		
20	50	25		23.12	23.27	22.96		
20	1	1	QPSK	22.98	23.09	23.03		
20	1	104		23.06	23.11	22.76		
20	50	25		23.25	23.27	23.01		
20	1	1	16-QAM	21.75	21.51	21.82	21.20	0.1318
20	1	1	64-QAM	19.98	20.09	20.29		
20	1	1	256-QAM	18.25	18.06	18.29		
Limit	EIRP < 2W			Result			Pass	



NR n5 Maximum Average Power [dBm] (GT - LC = -1.06 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	24.34	24.59	24.28	21.38	0.1374
5	1	23		24.41	24.53	24.32		
5	12	6		24.42	24.46	24.41		
5	1	1	QPSK	24.31	24.34	24.31		
5	1	23		24.32	24.31	24.21		
5	12	6		24.43	24.47	24.43		
5	1	1	16-QAM	23.01	23.21	23.23	20.02	0.1005
5	1	1	64-QAM	21.52	21.94	21.78		
5	1	1	256-QAM	19.46	19.61	19.75		
Limit	ERP < 7W			Result			Pass	

NR n5 Maximum Average Power [dBm] (GT - LC = -1.06 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	24.18	24.46	24.17	21.28	0.1343
10	1	50		24.38	24.49	24.28		
10	25	12		24.21	24.45	24.35		
10	1	1	QPSK	24.11	24.26	24.05		
10	1	50		24.28	24.42	24.00		
10	25	12		24.23	24.34	24.32		
10	1	1	16-QAM	23.02	23.11	23.01	19.90	0.0977
10	1	1	64-QAM	21.28	21.35	21.62		
10	1	1	256-QAM	19.48	19.59	19.62		
Limit	ERP < 7W			Result			Pass	



NR n5 Maximum Average Power [dBm] (GT - LC = -1.06 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	24.56	24.55	24.46	21.35	0.1365
15	1	77		24.49	24.51	24.52		
15	36	18		24.38	24.46	24.39		
15	1	1	QPSK	24.37	24.29	24.28		
15	1	77		24.39	24.39	24.42		
15	36	18		24.43	24.49	24.41		
15	1	1	16-QAM	23.20	23.23	23.35	20.14	0.1033
15	1	1	64-QAM	21.41	21.47	21.42		
15	1	1	256-QAM	19.63	19.58	19.56		
Limit	ERP < 7W			Result			Pass	

NR n5 Maximum Average Power [dBm] (GT - LC = -1.06 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
20	1	1	PI/2 BPSK	24.46	24.47	24.44	21.30	0.1349
20	1	104		24.51	24.50	24.47		
20	50	25		24.36	24.42	24.39		
20	1	1	QPSK	24.40	24.33	24.26		
20	1	104		24.30	24.38	24.35		
20	50	25		24.43	24.42	24.49		
20	1	1	16-QAM	22.58	23.12	22.63	19.91	0.0979
20	1	1	64-QAM	21.25	21.55	21.04		
20	1	1	256-QAM	18.93	19.54	19.17		
Limit	ERP < 7W			Result			Pass	



NR n7 Maximum Average Power [dBm] (GT - LC = 1.93 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	22.78	23.09	22.76	25.17	0.3289
5	1	23		23.01	23.18	22.46		
5	12	6		23.11	23.13	23.09		
5	1	1	QPSK	22.88	23.24	22.91		
5	1	23		22.91	23.09	22.44		
5	12	6		23.16	22.93	23.09		
5	1	1	16-QAM	21.55	21.92	21.67	23.85	0.2427
5	1	1	64-QAM	20.16	20.17	20.15		
5	1	1	256-QAM	18.36	21.48	18.34		
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = 1.93 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.77	23.17	22.71	25.15	0.3273
10	1	50		23.17	23.06	22.46		
10	25	12		22.97	23.01	22.94		
10	1	1	QPSK	22.91	23.21	22.81		
10	1	50		23.22	23.05	22.51		
10	25	12		22.99	23.03	22.91		
10	1	1	16-QAM	21.59	21.93	21.47	23.86	0.2432
10	1	1	64-QAM	20.15	20.03	20.14		
10	1	1	256-QAM	18.35	18.43	18.39		
Limit	EIRP < 2W			Result			Pass	



NR n7 Maximum Average Power [dBm] (GT - LC = 1.93 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.86	23.19	23.13	25.31	0.3396
15	1	77		23.38	23.16	22.66		
15	36	18		23.19	23.12	23.06		
15	1	1	QPSK	23.06	23.08	22.93		
15	1	77		23.15	23.18	22.53		
15	36	18		23.21	23.14	23.11		
15	1	1	16-QAM	21.47	21.81	21.68	23.74	0.2366
15	1	1	64-QAM	20.32	20.13	20.31		
15	1	1	256-QAM	18.46	18.72	18.12		
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = 1.93 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.86	22.98	23.12	25.24	0.3342
20	1	104		23.31	23.17	22.42		
20	50	25		23.17	23.18	23.11		
20	1	1	QPSK	22.94	23.01	23.04		
20	1	104		23.26	23.07	22.49		
20	50	25		23.17	23.21	23.10		
20	1	1	16-QAM	21.62	21.48	21.71	23.64	0.2312
20	1	1	64-QAM	20.18	19.97	20.23		
20	1	1	256-QAM	18.36	18.63	18.09		
Limit	EIRP < 2W			Result			Pass	



NR n25 Maximum Average Power [dBm] (GT - LC = -0.27 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	22.48	22.41	22.72	22.51	0.1782
5	1	23		22.41	22.52	22.71		
5	12	6		22.51	22.57	22.78		
5	1	1	QPSK	22.36	22.29	22.59		
5	1	23		22.32	22.34	22.57		
5	12	6		22.49	22.51	22.77		
5	1	1	16-QAM	21.73	21.75	21.65	21.48	0.1406
5	1	1	64-QAM	20.58	20.79	20.84		
5	1	1	256-QAM	18.39	18.41	18.27		
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = -0.27 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.48	22.25	22.61	22.36	0.1722
10	1	50		22.47	22.54	22.63		
10	25	12		22.49	22.29	22.54		
10	1	1	QPSK	22.37	22.17	22.48		
10	1	50		22.36	22.39	22.56		
10	25	12		22.51	22.32	22.57		
10	1	1	16-QAM	21.71	21.86	21.69	21.59	0.1442
10	1	1	64-QAM	20.67	20.73	20.56		
10	1	1	256-QAM	18.35	18.21	18.44		
Limit	EIRP < 2W			Result			Pass	



NR n25 Maximum Average Power [dBm] (GT - LC = -0.27 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.57	22.28	22.70	22.51	0.1782
15	1	77		22.46	22.10	22.71		
15	36	18		22.54	22.41	22.74		
15	1	1	QPSK	22.41	22.21	22.53		
15	1	77		22.31	22.42	22.66		
15	36	18		22.16	22.36	22.78		
15	1	1	16-QAM	21.79	21.87	21.73	21.60	0.1445
15	1	1	64-QAM	20.76	20.44	20.42		
15	1	1	256-QAM	18.25	18.24	18.36		
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = -0.27 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.37	22.21	22.62	22.50	0.1778
20	1	104		22.31	22.48	22.74		
20	50	25		22.52	22.49	22.76		
20	1	1	QPSK	22.43	22.13	22.44		
20	1	104		22.18	22.51	22.66		
20	50	25		22.54	22.52	22.77		
20	1	1	16-QAM	21.76	21.82	21.66	21.55	0.1429
20	1	1	64-QAM	20.41	20.43	20.46		
20	1	1	256-QAM	18.28	18.51	18.28		
Limit	EIRP < 2W			Result			Pass	



NR n66 Maximum Average Power [dBm] (GT - LC = -2.51 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	22.96	23.11	22.67	20.65	0.1161
5	1	23		23.07	23.13	22.56		
5	12	6		23.01	23.16	22.66		
5	1	1	QPSK	22.89	23.12	22.57		
5	1	23		22.99	23.08	22.52		
5	12	6		23.03	23.16	22.71		
5	1	1	16-QAM	21.81	21.98	21.93	19.47	0.0885
5	1	1	64-QAM	20.09	20.43	20.37		
5	1	1	256-QAM	17.91	18.11	18.12		
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = -2.51 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.91	22.95	22.68	20.53	0.1130
10	1	50		23.04	22.99	22.55		
10	25	12		22.94	22.96	22.57		
10	1	1	QPSK	22.81	22.98	22.58		
10	1	50		23.01	22.84	22.63		
10	25	12		22.98	23.02	22.64		
10	1	1	16-QAM	21.81	21.88	21.88	19.37	0.0865
10	1	1	64-QAM	20.10	20.16	20.27		
10	1	1	256-QAM	17.92	18.01	18.05		
Limit	EIRP < 1W			Result			Pass	



NR n66 Maximum Average Power [dBm] (GT - LC = -2.51 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.94	23.17	22.73	20.68	0.1169
15	1	77		23.08	23.09	22.64		
15	36	18		23.03	23.19	22.72		
15	1	1	QPSK	22.89	23.10	22.67		
15	1	77		23.04	22.95	22.55		
15	36	18		23.11	23.12	22.73		
15	1	1	16-QAM	21.87	21.98	21.84	19.47	0.0885
15	1	1	64-QAM	20.13	20.28	20.13		
15	1	1	256-QAM	17.92	18.16	18.04		
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = -2.51 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.92	23.02	22.70	20.67	0.1167
20	1	104		23.12	23.06	22.56		
20	50	25		23.03	23.15	22.81		
20	1	1	QPSK	22.79	23.05	22.65		
20	1	104		23.01	22.97	22.53		
20	50	25		23.04	23.18	22.81		
20	1	1	16-QAM	21.72	21.91	21.79	19.40	0.0871
20	1	1	64-QAM	20.03	20.21	20.33		
20	1	1	256-QAM	17.93	18.04	17.98		
Limit	EIRP < 1W			Result			Pass	



NR n66 Maximum Average Power [dBm] (GT - LC = -2.51 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	22.50	22.63	22.53	20.69	0.1172
40	1	214		22.67	22.53	22.16		
40	108	54		23.08	23.09	22.92		
40	1	1	QPSK	22.43	22.54	22.58		
40	1	214		22.55	22.44	22.16		
40	108	54		23.02	23.20	22.94		
40	1	1	16-QAM	21.48	21.13	21.49	18.98	0.0791
40	1	1	64-QAM	19.63	19.71	19.87		
40	1	1	256-QAM	17.59	17.63	17.66		
Limit	EIRP < 1W			Result			Pass	



NR n71 Maximum Average Power [dBm] (GT - LC = -1.71 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	24.23	24.09	24.22	20.42	0.1102
5	1	23		24.23	24.20	24.18		
5	12	6		24.21	24.15	24.26		
5	1	1	QPSK	24.18	24.10	24.19		
5	1	23		24.16	24.18	23.25		
5	12	6		24.18	24.21	24.28		
5	1	1	16-QAM	23.51	23.39	23.34	19.65	0.0923
5	1	1	64-QAM	21.89	21.82	21.62		
5	1	1	256-QAM	19.71	19.47	19.49		
Limit	ERP < 3W			Result			Pass	

NR n71 Maximum Average Power [dBm] (GT - LC = -1.71 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	24.10	23.99	23.99	20.30	0.1072
10	1	50		24.16	24.13	24.11		
10	25	12		23.99	24.04	24.06		
10	1	1	QPSK	24.07	23.92	23.98		
10	1	50		24.05	24.12	24.08		
10	25	12		24.06	24.04	24.12		
10	1	1	16-QAM	23.43	23.29	23.24	19.57	0.0906
10	1	1	64-QAM	21.82	21.63	21.48		
10	1	1	256-QAM	19.56	19.45	19.37		
Limit	ERP < 3W			Result			Pass	



NR n71 Maximum Average Power [dBm] (GT - LC = -1.71 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	24.20	24.28	24.18	20.43	0.1104
15	1	77		24.24	24.21	24.29		
15	36	18		24.17	24.23	24.21		
15	1	1	QPSK	24.16	23.43	24.21		
15	1	77		24.21	23.28	24.28		
15	36	18		24.14	23.32	24.27		
15	1	1	16-QAM	23.54	23.43	23.46	19.68	0.0929
15	1	1	64-QAM	21.82	21.74	21.76		
15	1	1	256-QAM	19.62	19.64	19.66		
Limit	ERP < 3W			Result			Pass	

NR n71 Maximum Average Power [dBm] (GT - LC = -1.71 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
20	1	1	PI/2 BPSK	24.09	24.10	24.12	20.46	0.1112
20	1	104		24.32	24.20	24.26		
20	50	25		24.15	24.28	24.23		
20	1	1	QPSK	24.02	24.06	24.16		
20	1	104		24.15	24.24	24.24		
20	50	25		24.18	24.27	24.28		
20	1	1	16-QAM	23.41	23.45	23.42	19.59	0.0910
20	1	1	64-QAM	21.71	21.71	21.84		
20	1	1	256-QAM	19.59	19.59	19.69		
Limit	ERP < 3W			Result			Pass	



NR n38 Maximum Average Power [dBm] (GT - LC = 1.93 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	22.82	23.04	23.02	25.19	0.3304
5	1	23		22.89	22.96	23.06		
5	12	6		23.22	23.19	23.26		
5	1	1	QPSK	23.10	23.03	23.03		
5	1	23		23.18	22.94	23.08		
5	12	6		23.07	22.23	23.21		
5	1	1	16-QAM	21.98	22.13	23.01	24.94	0.3119
5	1	1	64-QAM	20.46	20.52	20.88		
5	1	1	256-QAM	18.30	18.32	18.55		
Limit	EIRP < 2W			Result			Pass	

NR n38 Maximum Average Power [dBm] (GT - LC = 1.93 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.84	22.91	22.82	25.16	0.3281
10	1	50		22.99	22.96	22.99		
10	25	12		23.23	23.05	23.10		
10	1	1	QPSK	23.05	22.95	22.89		
10	1	50		23.14	22.90	23.05		
10	25	12		23.12	23.01	23.14		
10	1	1	16-QAM	21.93	22.26	22.18	24.19	0.2624
10	1	1	64-QAM	20.53	20.51	20.91		
10	1	1	256-QAM	18.21	18.33	18.33		
Limit	EIRP < 2W			Result			Pass	



NR n38 Maximum Average Power [dBm] (GT - LC = 1.93 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	23.02	23.06	22.92	25.19	0.3304
15	1	77		23.04	23.07	23.12		
15	36	18		23.16	23.15	23.26		
15	1	1	QPSK	23.14	23.14	23.01		
15	1	77		23.11	23.12	23.14		
15	36	18		23.25	23.11	23.21		
15	1	1	16-QAM	21.98	22.15	22.07	24.08	0.2559
15	1	1	64-QAM	20.42	20.65	20.79		
15	1	1	256-QAM	18.29	18.32	18.42		
Limit	EIRP < 2W			Result			Pass	

NR n38 Maximum Average Power [dBm] (GT - LC = 1.93 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.99	22.98	22.86	25.20	0.3311
20	1	104		23.04	23.02	23.02		
20	50	25		23.19	23.17	23.24		
20	1	1	QPSK	23.00	23.06	22.97		
20	1	104		23.03	23.01	23.10		
20	50	25		23.27	23.25	23.22		
20	1	1	16-QAM	21.91	22.16	22.12	24.09	0.2564
20	1	1	64-QAM	20.59	20.59	20.92		
20	1	1	256-QAM	18.46	18.26	18.51		
Limit	EIRP < 2W			Result			Pass	



NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.74 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	26.49	25.00	24.68	28.24	0.6668
10	1	50		26.20	25.29	23.71		
10	25	12		26.47	25.70	24.88		
10	1	1	QPSK	26.27	25.20	24.62		
10	1	50		26.29	25.41	23.60		
10	25	12		26.50	25.74	24.71		
10	1	1	16-QAM	25.56	24.54	24.34	27.30	0.537
10	1	1	64-QAM	24.51	23.01	22.68		
10	1	1	256-QAM	22.32	21.15	20.47		
Limit	EIRP < 2W			Result			Pass	

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.74 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	26.49	25.37	25.45	28.23	0.6653
15	1	77		26.04	25.77	23.85		
15	36	18		26.49	25.88	25.20		
15	1	1	QPSK	26.48	24.87	25.39		
15	1	77		26.20	25.34	23.78		
15	36	18		26.45	25.83	25.29		
15	1	1	16-QAM	25.62	24.43	24.72	27.36	0.5445
15	1	1	64-QAM	24.50	23.53	22.75		
15	1	1	256-QAM	22.75	21.12	21.10		
Limit	EIRP < 2W			Result			Pass	



NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.74 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	26.40	24.96	25.71	28.14	0.6516
30	1	158		24.23	25.63	24.44		
30	80	40		26.04	25.61	25.56		
30	1	1	QPSK	26.20	24.61	25.73		
30	1	158		24.07	25.53	24.50		
30	80	40		25.95	25.51	25.53		
30	1	1	16-QAM	25.57	24.26	24.93	27.31	0.5383
30	1	1	64-QAM	23.91	23.22	23.27		
30	1	1	256-QAM	22.01	21.25	21.33		
Limit	EIRP < 2W			Result			Pass	

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.74 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	26.09	24.67	25.28	27.85	0.6095
40	1	214		23.68	25.45	24.37		
40	108	54		25.50	25.54	25.68		
40	1	1	QPSK	26.11	24.82	25.18		
40	1	214		23.64	25.61	24.44		
40	108	54		25.26	25.53	25.66		
40	1	1	16-QAM	23.22	24.34	23.71	26.08	0.4055
40	1	1	64-QAM	20.32	22.69	22.19		
40	1	1	256-QAM	20.18	20.73	20.43		
Limit	EIRP < 2W			Result			Pass	



<SCS 30K>

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.74 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	25.61	25.47	25.03	28.22	0.6637
10	1	22		26.26	25.71	24.02		
10	12	6		26.48	25.63	24.87		
10	1	1	QPSK	25.55	25.39	25.01		
10	1	22		26.18	25.64	24.06		
10	12	6		25.52	25.64	24.88		
10	1	1	16-QAM	25.63	24.55	24.38	27.37	0.5458
10	1	1	64-QAM	24.03	22.94	22.35		
10	1	1	256-QAM	22.18	21.01	20.42		
Limit	EIRP < 2W			Result			Pass	

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.74 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	25.60	25.42	25.32	28.11	0.6471
15	1	36		25.91	25.84	24.22		
15	18	9		26.37	25.58	25.14		
15	1	1	QPSK	25.54	25.34	25.23		
15	1	36		25.88	25.75	24.24		
15	18	9		26.37	25.58	25.13		
15	1	1	16-QAM	26.04	24.31	25.26	27.78	0.5998
15	1	1	64-QAM	24.03	22.98	22.69		
15	1	1	256-QAM	22.18	21.01	20.88		
Limit	EIRP < 2W			Result			Pass	

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.74 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	25.31	25.08	25.62	28.00	0.6310
30	1	76		24.49	25.99	24.80		
30	36	18		25.96	25.44	25.37		
30	1	1	QPSK	26.26	25.03	25.67		
30	1	76		24.47	25.93	24.85		
30	36	18		25.93	25.47	24.41		
30	1	1	16-QAM	25.81	24.53	24.98	27.55	0.5689
30	1	1	64-QAM	23.82	22.59	23.05		
30	1	1	256-QAM	21.89	20.68	21.14		
Limit	EIRP < 2W			Result			Pass	



NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.74 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	25.11	24.96	25.58	27.71	0.5902
40	1	104		23.92	25.79	24.55		
40	50	25		25.61	25.49	25.45		
40	1	1	QPSK	25.97	24.95	25.48		
40	1	104		23.85	25.85	24.62		
40	50	25		25.58	25.47	25.46		
40	1	1	16-QAM	25.08	24.46	24.91	26.82	0.4808
40	1	1	64-QAM	23.63	22.44	23.01		
40	1	1	256-QAM	21.16	20.52	21.14		
Limit	EIRP < 2W			Result			Pass	

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.74 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	25.43	25.26	25.32	27.60	0.5754
50	1	131		24.11	25.56	24.89		
50	64	32		25.49	25.57	25.83		
50	1	1	QPSK	25.34	25.19	25.24		
50	1	131		24.01	25.58	24.86		
50	64	32		25.38	25.61	25.86		
50	1	1	16-QAM	25.46	24.69	24.78	27.20	0.5248
50	1	1	64-QAM	23.92	22.71	23.54		
50	1	1	256-QAM	21.99	20.92	21.43		
Limit	EIRP < 2W			Result			Pass	



NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.74 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	26.50	24.61	25.05	28.24	0.6668
80	1	215		24.22	25.05	24.51		
80	108	54		24.60	24.75	25.61		
80	1	1	QPSK	25.71	24.75	25.17		
80	1	215		24.07	24.98	24.58		
80	108	54		24.48	24.72	25.52		
80	1	1	16-QAM	23.78	24.10	24.27	26.01	0.3986
80	1	1	64-QAM	22.35	22.34	22.57		
80	1	1	256-QAM	20.34	20.41	20.62		
Limit	EIRP < 2W			Result			Pass	

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.74 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	25.46	24.23	24.01	27.39	0.5483
100	1	271		24.12	24.78	24.31		
100	135	67		24.61	24.86	25.65		
100	1	1	QPSK	25.43	24.07	24.21		
100	1	271		24.02	24.65	24.47		
100	135	67		24.48	24.76	25.51		
100	1	1	16-QAM	24.65	23.28	24.08	26.39	0.4355
100	1	1	64-QAM	23.30	21.94	21.62		
100	1	1	256-QAM	21.21	19.85	19.69		
Limit	EIRP < 2W			Result			Pass	



<MIMO 2 Antenna>

NR n2 Maximum Average Power [dBm] (GT - LC = -0.74 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	23.08	23.33	22.82	22.73	0.1875
5	1	23		23.14	23.40	22.89		
5	12	6		23.20	23.43	23.38		
5	1	1	QPSK	23.05	23.38	23.14		
5	1	23		23.11	23.42	23.11		
5	12	6		23.17	23.47	23.36		
5	1	1	16-QAM	22.35	22.54	22.00	21.80	0.1514
5	1	1	64-QAM	20.41	20.65	21.11		
5	1	1	256-QAM	18.65	18.93	18.72		
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = -0.74 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	23.08	23.14	22.77	22.63	0.1832
10	1	50		23.13	23.31	22.94		
10	25	12		23.17	23.28	23.23		
10	1	1	QPSK	23.06	23.19	23.05		
10	1	50		23.11	23.37	23.09		
10	25	12		23.15	23.33	23.28		
10	1	1	16-QAM	22.26	22.41	21.97	21.67	0.1469
10	1	1	64-QAM	20.37	20.45	20.98		
10	1	1	256-QAM	18.63	18.74	18.71		
Limit	EIRP < 2W			Result			Pass	



NR n2 Maximum Average Power [dBm] (GT - LC = -0.74 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	23.18	23.22	22.81	22.76	0.1888
15	1	77		23.19	23.50	22.95		
15	36	18		23.26	23.44	23.34		
15	1	1	QPSK	23.14	23.20	22.96		
15	1	77		23.18	23.45	23.14		
15	36	18		23.24	23.41	23.37		
15	1	1	16-QAM	22.36	22.54	22.19	21.80	0.1514
15	1	1	64-QAM	20.51	20.48	20.68		
15	1	1	256-QAM	18.72	18.86	18.75		
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = -0.74 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	23.07	23.18	23.20	22.90	0.1950
20	1	104		23.23	23.50	23.29		
20	50	25		23.21	23.43	23.32		
20	1	1	QPSK	23.04	23.19	23.17		
20	1	104		23.21	23.43	23.27		
20	50	25		23.19	23.45	23.64		
20	1	1	16-QAM	22.26	22.04	22.39	21.65	0.1462
20	1	1	64-QAM	20.41	20.45	20.52		
20	1	1	256-QAM	18.71	18.81	18.71		
Limit	EIRP < 2W			Result			Pass	



NR n7 Maximum Average Power [dBm] (GT - LC = 1.95 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	23.05	23.15	23.49	25.58	0.3614
5	1	23		23.20	23.14	23.55		
5	12	6		23.23	23.11	23.54		
5	1	1	QPSK	23.10	23.13	23.48		
5	1	23		23.15	23.11	23.47		
5	12	6		23.20	23.20	23.63		
5	1	1	16-QAM	22.17	22.01	22.59	24.54	0.2844
5	1	1	64-QAM	20.44	20.42	20.87		
5	1	1	256-QAM	18.56	18.64	19.02		
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = 1.95 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.84	23.00	23.20	25.32	0.3404
10	1	50		23.05	23.10	23.34		
10	25	12		22.96	23.04	23.35		
10	1	1	QPSK	22.83	23.01	23.20		
10	1	50		23.00	23.09	23.31		
10	25	12		22.95	23.05	23.37		
10	1	1	16-QAM	21.87	22.12	22.47	24.42	0.2767
10	1	1	64-QAM	20.17	20.39	20.48		
10	1	1	256-QAM	18.31	18.49	18.70		
Limit	EIRP < 2W			Result			Pass	



NR n7 Maximum Average Power [dBm] (GT - LC = 1.95 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	23.03	23.05	23.55	25.55	0.3589
15	1	77		23.29	23.15	23.57		
15	36	18		23.14	23.19	23.58		
15	1	1	QPSK	22.96	23.13	23.45		
15	1	77		23.26	23.20	23.54		
15	36	18		23.20	23.14	23.60		
15	1	1	16-QAM	21.87	22.14	22.81	24.76	0.2992
15	1	1	64-QAM	20.42	20.43	20.83		
15	1	1	256-QAM	18.47	18.62	19.06		
Limit	EIRP < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = 1.95 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.99	23.07	23.46	25.52	0.3565
20	1	104		23.22	23.10	23.50		
20	50	25		23.20	23.20	23.53		
20	1	1	QPSK	22.91	23.13	23.38		
20	1	104		23.14	23.15	23.44		
20	50	25		23.19	23.23	23.57		
20	1	1	16-QAM	22.09	22.00	22.66	24.61	0.2891
20	1	1	64-QAM	20.27	20.46	20.76		
20	1	1	256-QAM	18.34	18.53	19.05		
Limit	EIRP < 2W			Result			Pass	



NR n25 Maximum Average Power [dBm] (GT - LC = -0.43 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	23.28	23.36	23.08	23.25	0.2113
5	1	23		23.29	23.43	23.16		
5	12	6		23.41	23.48	23.68		
5	1	1	QPSK	23.24	23.42	23.34		
5	1	23		23.27	23.46	23.39		
5	12	6		23.40	23.53	23.66		
5	1	1	16-QAM	22.48	22.54	22.26	22.11	0.1626
5	1	1	64-QAM	20.60	20.80	21.31		
5	1	1	256-QAM	18.82	18.91	19.09		
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = -0.43 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	23.23	23.21	22.90	23.08	0.2032
10	1	50		23.28	23.40	23.04		
10	25	12		23.29	23.35	23.46		
10	1	1	QPSK	23.22	23.23	23.21		
10	1	50		23.26	23.38	23.40		
10	25	12		23.31	23.37	23.51		
10	1	1	16-QAM	22.49	22.31	22.12	22.06	0.1607
10	1	1	64-QAM	20.56	20.55	21.18		
10	1	1	256-QAM	18.78	18.81	18.85		
Limit	EIRP < 2W			Result			Pass	



NR n25 Maximum Average Power [dBm] (GT - LC = -0.43 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	23.31	23.34	23.16	23.23	0.2104
15	1	77		23.41	23.43	23.19		
15	36	18		23.44	23.57	23.58		
15	1	1	QPSK	23.32	23.39	23.46		
15	1	77		23.44	23.45	23.48		
15	36	18		23.48	23.61	23.66		
15	1	1	16-QAM	22.52	22.23	22.27	22.09	0.1618
15	1	1	64-QAM	20.63	20.71	21.23		
15	1	1	256-QAM	18.89	18.92	19.02		
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = -0.43 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	23.23	23.25	23.17	23.22	0.2099
20	1	104		23.31	23.40	23.15		
20	50	25		23.33	23.53	23.62		
20	1	1	QPSK	23.21	23.23	23.38		
20	1	104		23.35	23.36	23.50		
20	50	25		23.36	23.50	23.65		
20	1	1	16-QAM	22.44	22.36	22.48	22.05	0.1603
20	1	1	64-QAM	20.58	20.55	21.06		
20	1	1	256-QAM	18.83	18.80	19.15		
Limit	EIRP < 2W			Result			Pass	



NR n66 Maximum Average Power [dBm] (GT - LC = -1.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	23.34	23.48	23.58	22.61	0.1824
5	1	23		23.32	23.54	23.48		
5	12	6		23.47	23.75	23.87		
5	1	1	QPSK	23.30	23.43	23.67		
5	1	23		23.26	23.41	23.61		
5	12	6		23.55	23.80	23.90		
5	1	1	16-QAM	22.38	22.66	22.83	21.54	0.1426
5	1	1	64-QAM	20.85	21.03	21.38		
5	1	1	256-QAM	18.90	19.06	19.30		
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = -1.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	23.25	23.39	23.54	22.41	0.1742
10	1	50		23.44	23.55	23.42		
10	25	12		23.40	23.54	23.66		
10	1	1	QPSK	23.22	23.41	23.58		
10	1	50		23.32	23.52	23.56		
10	25	12		23.42	23.59	23.70		
10	1	1	16-QAM	22.42	22.50	22.75	21.46	0.1400
10	1	1	64-QAM	20.79	20.98	21.21		
10	1	1	256-QAM	18.81	19.01	19.20		
Limit	EIRP < 1W			Result			Pass	



NR n66 Maximum Average Power [dBm] (GT - LC = -1.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	23.40	23.51	23.65	22.551	0.1799
15	1	77		23.52	23.67	23.46		
15	36	18		23.61	23.70	23.82		
15	1	1	QPSK	23.36	23.45	23.62		
15	1	77		23.48	23.58	23.53		
15	36	18		23.63	23.72	23.84		
15	1	1	16-QAM	22.49	22.68	22.76	21.47	0.1403
15	1	1	64-QAM	20.87	21.13	21.32		
15	1	1	256-QAM	18.95	19.09	19.27		
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = -1.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	23.32	23.41	23.62	22.56	0.1803
20	1	104		23.38	23.62	23.44		
20	50	25		23.58	23.71	23.80		
20	1	1	QPSK	23.24	23.45	23.68		
20	1	104		23.32	23.58	23.46		
20	50	25		23.54	23.74	23.85		
20	1	1	16-QAM	22.47	22.59	22.80	21.51	0.1416
20	1	1	64-QAM	20.91	21.08	21.00		
20	1	1	256-QAM	18.86	19.04	19.17		
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = -1.29 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	23.16	23.27	23.25	22.51	0.1782
40	1	214		23.27	23.28	23.71		
40	108	54		23.53	23.71	23.80		
40	1	1	QPSK	23.11	23.29	23.22		
40	1	214		23.22	23.31	23.72		
40	108	54		23.52	23.78	23.77		
40	1	1	16-QAM	22.26	22.31	22.19	21.02	0.1265
40	1	1	64-QAM	20.40	20.48	20.64		
40	1	1	256-QAM	18.51	18.66	18.68		
Limit	EIRP < 1W			Result			Pass	



NR n38 Maximum Average Power [dBm] (GT - LC = 1.84 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	22.63	22.60	22.18	24.49	0.2812
5	1	23		22.01	22.54	22.03		
5	12	6		22.51	22.65	22.15		
5	1	1	QPSK	22.45	22.54	22.06		
5	1	23		22.56	22.63	22.06		
5	12	6		22.65	22.64	22.12		
5	1	1	16-QAM	21.69	21.66	21.25	23.53	0.2254
5	1	1	64-QAM	19.85	20.02	19.58		
5	1	1	256-QAM	17.92	18.07	17.78		
Limit	EIRP < 2W			Result			Pass	

NR n38 Maximum Average Power [dBm] (GT - LC = 1.84 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.65	22.56	22.45	24.49	0.2812
10	1	50		22.45	22.46	21.73		
10	25	12		22.45	22.54	22.01		
10	1	1	QPSK	22.35	22.45	22.24		
10	1	50		22.53	22.48	21.65		
10	25	12		22.26	22.45	22.04		
10	1	1	16-QAM	21.06	21.25	20.78	23.09	0.2037
10	1	1	64-QAM	19.65	19.98	19.38		
10	1	1	256-QAM	17.95	18.02	17.23		
Limit	EIRP < 2W			Result			Pass	



NR n38 Maximum Average Power [dBm] (GT - LC = 1.84 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	22.89	22.98	22.63	24.82	0.3034
15	1	77		22.53	22.59	22.38		
15	36	18		22.62	22.53	22.29		
15	1	1	QPSK	22.51	22.65	22.34		
15	1	77		22.65	22.68	22.46		
15	36	18		22.54	22.65	22.31		
15	1	1	16-QAM	21.38	21.35	21.25	23.22	0.2099
15	1	1	64-QAM	20.01	20.14	20.05		
15	1	1	256-QAM	17.98	18.03	17.85		
Limit	EIRP < 2W			Result			Pass	

NR n38 Maximum Average Power [dBm] (GT - LC = 1.84 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	22.54	22.53	22.24	24.59	0.2877
20	1	104		22.68	22.46	22.35		
20	50	25		22.62	22.68	22.35		
20	1	1	QPSK	22.54	22.56	22.35		
20	1	104		22.65	22.53	22.35		
20	50	25		22.63	22.75	22.35		
20	1	1	16-QAM	21.34	21.35	21.02	23.19	0.2084
20	1	1	64-QAM	20.01	19.80	19.67		
20	1	1	256-QAM	17.79	17.85	17.95		
Limit	EIRP < 2W			Result			Pass	



<SCS 15K>

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.76 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	26.23	26.29	26.24	28.17	0.6561
10	1	50		26.28	26.30	26.31		
10	25	12		26.31	26.35	26.39		
10	1	1	QPSK	26.24	26.30	26.26		
10	1	50		26.29	26.32	26.32		
10	25	12		26.33	26.36	26.41		
10	1	1	16-QAM	24.91	24.52	25.45	27.21	0.5260
10	1	1	64-QAM	23.79	23.79	24.21		
10	1	1	256-QAM	21.85	21.62	21.40		
Limit	EIRP < 2W			Result			Pass	

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.76 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	26.28	26.26	26.32	28.20	0.6607
15	1	77		26.36	26.29	26.36		
15	36	18		26.42	26.44	26.41		
15	1	1	QPSK	26.25	26.24	26.33		
15	1	77		26.36	26.31	26.35		
15	36	18		26.41	26.42	26.42		
15	1	1	16-QAM	25.09	25.55	25.03	27.31	0.5383
15	1	1	64-QAM	23.88	24.99	24.27		
15	1	1	256-QAM	21.62	21.71	21.82		
Limit	EIRP < 2W			Result			Pass	



NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.76 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	26.11	26.17	26.32	28.21	0.6622
30	1	158		26.24	26.18	26.27		
30	80	40		26.45	26.39	26.41		
30	1	1	QPSK	26.18	26.19	26.31		
30	1	158		26.27	26.15	26.29		
30	80	40		26.45	26.34	26.39		
30	1	1	16-QAM	24.95	24.72	25.01	26.77	0.4753
30	1	1	64-QAM	23.71	23.72	23.61		
30	1	1	256-QAM	21.64	21.54	21.72		
Limit	EIRP < 2W			Result			Pass	

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.76 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	26.09	26.16	26.16	28.24	0.6668
40	1	214		26.17	26.01	26.11		
40	108	54		26.41	26.32	26.48		
40	1	1	QPSK	25.97	26.08	26.13		
40	1	214		26.06	25.97	26.03		
40	108	54		26.46	26.34	26.44		
40	1	1	16-QAM	24.66	24.85	25.26	27.02	0.5035
40	1	1	64-QAM	23.44	23.93	23.41		
40	1	1	256-QAM	20.76	21.11	21.56		
Limit	EIRP < 2W			Result			Pass	



<SCS 30K>

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.76 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	26.17	26.24	26.57	28.37	0.6871
10	1	22		26.36	26.16	26.48		
10	12	6		26.14	26.33	26.61		
10	1	1	QPSK	26.15	26.20	26.56		
10	1	22		26.33	26.14	26.46		
10	12	6		26.09	26.27	26.53		
10	1	1	16-QAM	25.17	25.37	25.66	27.42	0.5521
10	1	1	64-QAM	23.63	23.73	24.11		
10	1	1	256-QAM	21.55	21.71	21.54		
Limit	EIRP < 2W			Result			Pass	

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.76 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	26.03	26.34	26.41	28.33	0.6808
15	1	36		26.22	26.25	26.44		
15	18	9		26.13	26.23	26.57		
15	1	1	QPSK	25.92	26.24	26.37		
15	1	36		26.18	26.22	26.35		
15	18	9		26.08	26.25	26.52		
15	1	1	16-QAM	25.16	25.25	25.51	27.27	0.5333
15	1	1	64-QAM	23.47	23.72	23.88		
15	1	1	256-QAM	21.56	22.97	21.55		
Limit	EIRP < 2W			Result			Pass	

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.76 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	25.93	26.15	26.26	28.26	0.6699
30	1	76		26.18	26.10	26.36		
30	36	18		26.19	26.28	26.50		
30	1	1	QPSK	25.88	26.11	26.22		
30	1	76		26.17	25.99	26.29		
30	36	18		26.21	26.22	26.41		
30	1	1	16-QAM	24.93	25.23	25.11	26.99	0.5000
30	1	1	64-QAM	23.37	23.38	23.53		
30	1	1	256-QAM	21.63	21.56	21.58		
Limit	EIRP < 2W			Result			Pass	



NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.76 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	25.63	25.86	26.16	28.24	0.6668
40	1	104		26.05	25.80	26.11		
40	50	25		26.31	26.21	26.48		
40	1	1	QPSK	25.57	25.84	26.13		
40	1	104		25.99	25.73	26.03		
40	50	25		26.26	26.23	26.44		
40	1	1	16-QAM	24.87	25.05	25.26	27.02	0.5035
40	1	1	64-QAM	23.10	23.52	23.41		
40	1	1	256-QAM	21.44	21.69	21.56		
Limit	EIRP < 2W			Result			Pass	

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.76 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	25.96	26.11	26.12	28.22	0.6637
50	1	131		26.41	26.13	26.33		
50	64	32		26.43	26.31	26.38		
50	1	1	QPSK	25.85	26.07	26.05		
50	1	131		26.39	26.11	26.29		
50	64	32		26.43	26.27	26.46		
50	1	1	16-QAM	25.16	25.25	25.37	27.13	0.5164
50	1	1	64-QAM	23.33	23.76	23.74		
50	1	1	256-QAM	21.61	21.61	21.57		
Limit	EIRP < 2W			Result			Pass	



NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.76 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	25.31	25.76	26.17	28.33	0.6808
80	1	215		25.83	25.71	25.84		
80	108	54		26.31	26.14	26.30		
80	1	1	QPSK	26.01	25.71	26.34		
80	1	215		26.12	25.69	26.57		
80	108	54		26.33	26.13	26.33		
80	1	1	16-QAM	24.77	24.88	25.03	26.79	0.4775
80	1	1	64-QAM	23.75	23.54	23.27		
80	1	1	256-QAM	22.24	21.48	21.41		
Limit	EIRP < 2W			Result			Pass	

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = 1.76 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	25.23	25.06	24.84	28.00	0.6310
100	1	271		25.09	25.91	25.74		
100	135	67		26.11	26.14	26.21		
100	1	1	QPSK	26.19	25.72	25.83		
100	1	271		25.40	26.24	25.97		
100	135	67		26.11	26.08	26.21		
100	1	1	16-QAM	24.45	24.27	24.27	26.21	0.4178
100	1	1	64-QAM	22.94	22.55	22.48		
100	1	1	256-QAM	20.73	20.54	20.30		
Limit	EIRP < 2W			Result			Pass	



Appendix B. Test Results of Radiated Test

5G NR n5 (Ant. Main)

5G NR n5 / 20MHz / BPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1650	-46.15	-13	-33.15	-62.15	-47.03	6.35	9.38	H
	2475	-52.01	-13	-39.01	-69.36	-52.19	8.05	10.38	H
	3301	-56.21	-13	-43.21	-76.14	-56.95	9.17	12.06	H
									H
									H
	1650	-48.11	-13	-35.11	-64.1	-48.99	6.35	9.38	V
	2475	-57.30	-13	-44.30	-75.5	-57.48	8.05	10.38	V
	3301	-56.47	-13	-43.47	-76.49	-57.21	9.17	12.06	V
									V
									V
Middle	1656	-51.41	-13	-38.41	-67.48	-52.30	6.36	9.40	H
	2483	-57.29	-13	-44.29	-74.6	-57.47	8.09	10.42	H
	3311	-56.63	-13	-43.63	-76.56	-57.40	9.19	12.11	H
									H
									H
	1656	-47.92	-13	-34.92	-63.98	-48.81	6.36	9.40	V
	2483	-58.83	-13	-45.83	-75.99	-59.01	8.09	10.42	V
	3311	-56.40	-13	-43.40	-76.42	-57.17	9.19	12.11	V
									V
									V



Highest	1660	-46.41	-13	-33.41	-62.54	-47.30	6.37	9.41	H
	2490	-48.80	-13	-35.80	-66.1	-48.97	8.13	10.45	H
	3321	-56.43	-13	-43.43	-76.37	-57.24	9.21	12.17	H
									H
									H
	1660	-46.81	-13	-33.81	-62.92	-47.70	6.37	9.41	V
	2490	-57.19	-13	-44.19	-74.33	-57.36	8.13	10.45	V
	3321	-56.20	-13	-43.20	-76.22	-57.01	9.21	12.17	V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n2 (Ant. Main)

5G NR n2 / 20MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-54.73	-13	-41.73	-76.53	-56.90	9.93	12.10	H
	5553	-53.21	-13	-40.21	-77.39	-52.69	13.67	13.15	H
	7405	-45.53	-13	-32.53	-76.35	-42.96	13.96	11.39	H
									H
									H
									H
									H
	3702	-54.57	-13	-41.57	-76.25	-56.74	9.93	12.10	V
	5553	-52.84	-13	-39.84	-77.57	-52.32	13.67	13.15	V
	7405	-45.92	-13	-32.92	-76.91	-43.35	13.96	11.39	V
									V
									V
									V
									V
Middle	3742	-53.94	-13	-40.94	-75.84	-56.06	10.02	12.14	H
	5613	-53.58	-13	-40.58	-77.63	-52.86	13.93	13.21	H
	7485	-46.76	-13	-33.76	-77.14	-43.38	14.61	11.23	H
									H
									H
									H
									H
	3742	-54.28	-13	-41.28	-76.1	-56.40	10.02	12.14	V
	5613	-52.74	-13	-39.74	-77.29	-52.02	13.93	13.21	V
	7485	-46.06	-13	-33.06	-76.53	-42.68	14.61	11.23	V
									V
									V
									V
									V
								V	



Highest	3782	-54.10	-13	-41.10	-76.09	-56.17	10.11	12.18	H
	5673	-52.96	-13	-39.96	-77.14	-52.39	13.84	13.27	H
	7565	-46.62	-13	-33.62	-76.56	-43.02	15.06	11.46	H
									H
									H
									H
									H
	3782	-53.82	-13	-40.82	-75.79	-55.89	10.11	12.18	V
	5673	-52.36	-13	-39.36	-77.06	-51.79	13.84	13.27	V
	7565	-46.60	-13	-33.60	-76.62	-43.00	15.06	11.46	V
									V
									V
									V
									V
								V	

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n25 (Ant. Main)

5G NR n25 / 20MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3705	-54.43	-13	-41.43	-76.24	-56.60	9.94	12.11	H
	5553	-53.08	-13	-40.08	-77.26	-52.56	13.67	13.15	H
	7405	-45.79	-13	-32.79	-76.61	-43.22	13.96	11.39	H
									H
									H
									H
									H
	3705	-54.58	-13	-41.58	-76.27	-56.75	9.94	12.11	V
	5553	-52.52	-13	-39.52	-77.25	-52.00	13.67	13.15	V
	7405	-45.58	-13	-32.58	-76.57	-43.01	13.96	11.39	V
									V
									V
									V
									V
Middle	3750	-54.07	-13	-41.07	-75.98	-56.18	10.04	12.15	H
	5621	-52.87	-13	-39.87	-76.94	-52.17	13.92	13.22	H
	7500	-45.78	-13	-32.78	-76.07	-42.25	14.73	11.20	H
									H
									H
									H
									H
	3750	-54.30	-13	-41.30	-76.14	-56.41	10.04	12.15	V
	5621	-52.45	-13	-39.45	-77.02	-51.75	13.92	13.22	V
	7495	-46.48	-13	-33.48	-76.88	-43.00	14.69	11.21	V
									V
									V
									V
									V



Highest	3795	-53.89	-13	-40.89	-75.91	-55.95	10.14	12.20	H
	5688	-52.60	-13	-39.60	-76.81	-52.08	13.81	13.29	H
	7585	-46.44	-13	-33.44	-76.28	-42.82	15.16	11.54	H
									H
									H
									H
									H
	3795	-53.76	-13	-40.76	-75.77	-55.82	10.14	12.20	V
	5688	-51.96	-13	-38.96	-76.69	-51.44	13.81	13.29	V
	7585	-46.35	-13	-33.35	-76.26	-42.73	15.16	11.54	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n66 (Ant. Main)

5G NR n66 / 40MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3420	-55.65	-13	-42.65	-76.61	-58.80	9.41	12.56	H
	5136	-51.95	-13	-38.95	-76.59	-52.51	12.11	12.67	H
	6849	-47.66	-13	-34.66	-76.83	-46.09	13.97	12.40	H
									H
									H
									H
									H
	3420	-55.43	-13	-42.43	-76.39	-58.58	9.41	12.56	V
	5136	-51.93	-13	-38.93	-76.83	-52.49	12.11	12.67	V
	6849	-48.13	-13	-35.13	-77.13	-46.56	13.97	12.40	V
									V
									V
									V
									V
Middle	3450	-54.92	-13	-41.92	-76.04	-57.97	9.45	12.50	H
	5181	-52.01	-13	-39.01	-76.75	-52.53	12.17	12.69	H
	6909	-47.02	-13	-34.02	-76.19	-45.17	14.01	12.16	H
									H
									H
									H
									H
	3450	-55.43	-13	-42.43	-76.53	-58.48	9.45	12.50	V
	5181	-51.46	-13	-38.46	-76.44	-51.98	12.17	12.69	V
	6909	-47.98	-13	-34.98	-76.99	-46.13	14.01	12.16	V
									V
									V
									V
									V
								V	



Highest	3480	-55.00	-13	-42.00	-76.28	-57.96	9.48	12.44	H
	5226	-52.45	-13	-39.45	-77.26	-52.91	12.32	12.78	H
	6969	-47.36	-13	-34.36	-76.51	-45.23	14.05	11.92	H
									H
									H
									H
									H
	3480	-55.38	-13	-42.38	-76.63	-58.34	9.48	12.44	V
	5226	-52.36	-13	-39.36	-77.45	-52.82	12.32	12.78	V
	6969	-47.26	-13	-34.26	-76.27	-45.13	14.05	11.92	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EN-DC 48A-n66A (Ant.MIMO 2 + Ant.Main)

EN-DC 48A-n66A / 20M+40MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3420	-55.28	-13	-42.28	-76.26	-58.43	9.41	12.56	H
	5136	-52.08	-13	-39.08	-76.72	-52.64	12.11	12.67	H
	6849	-48.37	-13	-35.37	-77.54	-46.80	13.97	12.40	H
									H
									H
									H
									H
	3420	-55.70	-13	-42.70	-76.69	-58.85	9.41	12.56	V
	5136	-51.81	-13	-38.81	-76.71	-52.37	12.11	12.67	V
	6849	-48.19	-13	-35.19	-77.19	-46.62	13.97	12.40	V
									V
									V
									V
									V
Middle	3454	-42.02	-13	-29.02	-76.17	-45.06	9.45	12.49	H
	5181	-52.17	-13	-39.17	-76.91	-52.69	12.17	12.69	H
	6909	-47.76	-13	-34.76	-76.93	-45.91	14.01	12.16	H
									H
									H
									H
									H
	3454	-55.32	-13	-42.32	-76.45	-58.36	9.45	12.49	V
	5181	-52.04	-13	-39.04	-77.02	-52.56	12.17	12.69	V
	6909	-48.16	-13	-35.16	-77.17	-46.31	14.01	12.16	V
									V
									V
									V
									V
								V	



Highest	3480	-54.69	-13	-41.69	-75.97	-57.65	9.48	12.44	H
	5226	-51.91	-13	-38.91	-76.72	-52.37	12.32	12.78	H
	6969	-46.51	-13	-33.51	-75.66	-44.38	14.05	11.92	H
									H
									H
									H
									H
	3480	-55.11	-13	-42.11	-76.36	-58.07	9.48	12.44	V
	5226	-52.13	-13	-39.13	-77.22	-52.59	12.32	12.78	V
	6969	-47.62	-13	-34.62	-76.63	-45.49	14.05	11.92	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n7 (Ant. Main)

5G NR n7 / 20MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4995	-51.85	-25	-26.85	-76.19	-52.53	11.92	12.60	H
	7503	-46.32	-25	-21.32	-76.59	-42.78	14.75	11.21	H
	10005	-43.14	-25	-18.14	-76.94	-37.07	17.17	11.10	H
									H
									H
									H
									H
	4995	-51.50	-25	-26.50	-76.15	-52.18	11.92	12.60	V
	7503	-46.04	-25	-21.04	-76.39	-42.50	14.75	11.21	V
	10005	-43.91	-25	-18.91	-77.05	-37.84	17.17	11.10	V
									V
									V
									V
									V
Middle	5055	-52.00	-25	-27.00	-76.44	-52.63	12.00	12.63	H
	7578	-46.24	-25	-21.24	-76.11	-42.62	15.13	11.51	H
	10105	-42.52	-25	-17.52	-76.33	-36.39	17.17	11.04	H
									H
									H
									H
									H
	5055	-51.14	-25	-26.14	-75.87	-51.77	12.00	12.63	V
	7578	-46.41	-25	-21.41	-76.35	-42.79	15.13	11.51	V
	10110	-43.15	-25	-18.15	-76.43	-37.01	17.17	11.03	V
									V
									V
									V
									V



Highest	5103	-51.79	-25	-26.79	-76.36	-52.38	12.06	12.65	H
	7654	-46.34	-25	-21.34	-76.06	-43.02	14.95	11.63	H
	10205	-42.42	-25	-17.42	-76.24	-36.23	17.17	10.98	H
									H
									H
									H
									H
	5103	-50.89	-25	-25.89	-75.72	-51.48	12.06	12.65	V
	7654	-45.94	-25	-20.94	-75.73	-42.62	14.95	11.63	V
	10205	-43.11	-25	-18.11	-76.51	-36.92	17.17	10.98	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n38 (Ant. Main)

5G NR n38 / 20MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5143	-51.87	-25	-26.87	-76.54	-52.42	12.12	12.67	H
	7714	-46.24	-25	-21.24	-75.92	-43.27	14.63	11.66	H
	10285	-42.65	-25	-17.65	-76.48	-36.42	17.16	10.93	H
									H
									H
									H
									H
	5143	-51.83	-25	-26.83	-76.75	-52.38	12.12	12.67	V
	7714	-45.96	-25	-20.96	-75.7	-42.99	14.63	11.66	V
	10285	-42.68	-25	-17.68	-76.19	-36.45	17.16	10.93	V
									V
									V
									V
									V
Middle	5173	-51.92	-25	-26.92	-76.66	-52.45	12.16	12.69	H
	7759	-45.68	-25	-20.68	-75.33	-42.97	14.39	11.68	H
	10345	-42.42	-25	-17.42	-76.25	-36.15	17.16	10.89	H
									H
									H
									H
									H
	5173	-51.43	-25	-26.43	-76.41	-51.96	12.16	12.69	V
	7759	-46.08	-25	-21.08	-75.79	-43.37	14.39	11.68	V
	10345	-42.80	-25	-17.80	-76.38	-36.53	17.16	10.89	V
									V
									V
									V
									V
								V	



Highest	5203	-52.35	-25	-27.35	-77.15	-52.85	12.21	12.71	H
	7804	-46.28	-25	-21.28	-75.91	-43.79	14.18	11.69	H
	10405	-42.42	-25	-17.42	-76.26	-36.12	17.16	10.86	H
									H
									H
									H
									H
	5203	-51.95	-25	-26.95	-76.98	-52.45	12.21	12.71	V
	7804	-46.33	-25	-21.33	-76.02	-43.84	14.18	11.69	V
	10405	-42.47	-25	-17.47	-76.13	-36.17	17.16	10.86	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n41 (HPUE) (Ant. Main)

5G NR n41 (HPUE) / 80MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4995	-49.32	-25	-24.32	-73.62	-50.00	11.92	12.60	H
	7494	-45.97	-25	-20.97	-76.29	-42.50	14.68	11.21	H
	9993	-43.46	-25	-18.46	-77.23	-37.40	17.16	11.10	H
									H
									H
									H
									H
	4995	-48.76	-25	-23.76	-73.38	-49.44	11.92	12.60	V
	7494	-46.22	-25	-21.22	-76.62	-42.75	14.68	11.21	V
	9993	-43.11	-25	-18.11	-76.21	-37.05	17.16	11.10	V
									V
									V
									V
									V
Middle	5115	-51.50	-25	-26.50	-76.09	-52.08	12.08	12.66	H
	7665	-46.69	-25	-21.69	-76.4	-43.43	14.89	11.63	H
	10221	-41.91	-25	-16.91	-75.73	-35.71	17.17	10.97	H
									H
									H
									H
									H
	5115	-50.32	-25	-25.32	-75.18	-50.90	12.08	12.66	V
	7665	-46.44	-25	-21.44	-76.22	-43.18	14.89	11.63	V
	10221	-43.20	-25	-18.20	-76.62	-37.00	17.17	10.97	V
									V
									V
									V
									V
								V	



Highest	5220	-52.38	-25	-27.38	-77.2	-52.85	12.29	12.76	H
	7836	-46.42	-25	-21.42	-76.16	-43.75	14.28	11.61	H
	10449	-42.26	-25	-17.26	-76.11	-35.93	17.16	10.83	H
									H
									H
									H
									H
	5220	-52.20	-25	-27.20	-77.28	-52.67	12.29	12.76	V
	7830	-46.27	-25	-21.27	-76.03	-43.64	14.26	11.63	V
	10449	-42.24	-25	-17.24	-75.96	-35.91	17.16	10.83	V
									V
									V
									V
									V
								V	

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n71 (Ant. Main)

5G NR n71 / 20MHz / BPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1328	-59.36	-13	-46.36	-73.96	-58.53	5.63	6.95	H
	1992	-57.32	-13	-44.32	-73.57	-58.22	6.95	10.00	H
	2657	-57.41	-13	-44.41	-75.90	-58.08	8.15	10.97	H
									H
									H
									H
									H
	1328	-58.69	-13	-45.69	-73.28	-57.86	5.63	6.95	V
	1992	-56.53	-13	-43.53	-72.63	-57.43	6.95	10.00	V
	2657	-57.45	-13	-44.45	-75.88	-58.12	8.15	10.97	V
									V
									V
									V
									V
Middle	1343	-58.91	-13	-45.91	-73.55	-58.10	5.66	7.00	H
	2015	-57.61	-13	-44.61	-73.95	-58.40	6.99	9.93	H
	2687	-57.28	-13	-44.28	-75.76	-57.84	8.25	10.96	H
									H
									H
									H
									H
	1343	-56.11	-13	-43.11	-70.82	-55.30	5.66	7.00	V
	2015	-53.44	-13	-40.44	-69.66	-54.23	6.99	9.93	V
	2687	-57.21	-13	-44.21	-75.62	-57.77	8.25	10.96	V
									V
									V
									V
									V
								V	



Highest	1358	-59.48	-13	-46.48	-74.15	-58.68	5.70	7.05	H
	2037	-54.85	-13	-41.85	-71.43	-55.49	7.03	9.82	H
	2717	-57.89	-13	-44.89	-76.34	-58.34	8.34	10.94	H
									H
									H
									H
									H
	1358	-57.80	-13	-44.80	-72.63	-57.00	5.70	7.05	V
	2037	-56.66	-13	-43.66	-73.16	-57.30	7.03	9.82	V
	2717	-57.81	-13	-44.81	-76.18	-58.26	8.34	10.94	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n41 (HPUE) (Ant. MIMO 1 SRS)

5G NR n41 (HPUE) / 80MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4995	-50.91	-25	-25.91	-75.21	-51.59	11.92	12.60	H
	7494	-46.03	-25	-21.03	-76.35	-42.56	14.68	11.21	H
	9993	-43.51	-25	-18.51	-77.28	-37.45	17.16	11.10	H
									H
									H
									H
									H
	4995	-51.05	-25	-26.05	-75.67	-51.73	11.92	12.60	V
	7494	-45.45	-25	-20.45	-75.85	-41.98	14.68	11.21	V
	9993	-44.05	-25	-19.05	-77.15	-37.99	17.16	11.10	V
									V
									V
									V
									V
Middle	5115	-51.94	-25	-26.94	-76.53	-52.52	12.08	12.66	H
	7665	-46.35	-25	-21.35	-76.06	-43.09	14.89	11.63	H
	10221	-42.56	-25	-17.56	-76.38	-36.36	17.17	10.97	H
									H
									H
									H
									H
	5115	-51.24	-25	-26.24	-76.1	-51.82	12.08	12.66	V
	7665	-46.27	-25	-21.27	-76.05	-43.01	14.89	11.63	V
	10215	-41.99	-25	-16.99	-75.39	-35.79	17.17	10.97	V
									V
									V
									V
									V



Highest	5220	-49.17	-25	-24.17	-73.99	-49.64	12.29	12.76	H
	7836	-46.24	-25	-21.24	-75.98	-43.57	14.28	11.61	H
	10449	-42.37	-25	-17.37	-76.22	-36.04	17.16	10.83	H
									H
									H
									H
									H
	5220	-47.22	-25	-22.22	-72.3	-47.69	12.29	12.76	V
	7836	-46.53	-25	-21.53	-76.32	-43.86	14.28	11.61	V
	10449	-42.45	-25	-17.45	-76.17	-36.12	17.16	10.83	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n25 (Ant. MIMO 2)

5G NR n25 / 20MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-53.89	-13	-40.89	-75.69	-56.06	9.93	12.10	H
	5553	-47.10	-13	-34.10	-71.27	-46.58	13.67	13.15	H
	7405	-46.17	-13	-33.17	-76.99	-43.60	13.96	11.39	H
									H
									H
									H
									H
	3702	-54.74	-13	-41.74	-76.42	-56.91	9.93	12.10	V
	5553	-48.26	-13	-35.26	-72.9	-47.74	13.67	13.15	V
	7405	-45.57	-13	-32.57	-76.56	-43.00	13.96	11.39	V
									V
									V
									V
									V
Middle	3747	-54.38	-13	-41.38	-76.29	-56.50	10.03	12.15	H
	5621	-52.98	-13	-39.98	-77.05	-52.28	13.92	13.22	H
	7495	-46.55	-13	-33.55	-76.86	-43.07	14.69	11.21	H
									H
									H
									H
									H
	3747	-54.34	-13	-41.34	-76.18	-56.46	10.03	12.15	V
	5621	-52.45	-13	-39.45	-77.02	-51.75	13.92	13.22	V
	7495	-46.32	-13	-33.32	-76.72	-42.84	14.69	11.21	V
									V
									V
									V
									V



Highest	3792	-53.88	-13	-40.88	-75.89	-55.94	10.13	12.19	H
	5688	-50.44	-13	-37.44	-74.65	-49.92	13.81	13.29	H
	7585	-46.75	-13	-33.75	-76.59	-43.13	15.16	11.54	H
									H
									H
									H
									H
	3792	-54.04	-13	-41.04	-76.04	-56.10	10.13	12.19	V
	5688	-48.39	-13	-35.39	-73.12	-47.87	13.81	13.29	V
	7585	-46.76	-13	-33.76	-76.67	-43.14	15.16	11.54	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EN-DC 5A-n2A (Ant. Main + Ant. MIMO 2)

EN-DC 5A-n2A / 10M+20MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-54.01	-13	-41.01	-75.81	-56.18	9.93	12.10	H
	5553	-38.06	-13	-25.06	-62.24	-37.54	13.67	13.15	H
	7405	-45.81	-13	-32.81	-76.63	-43.24	13.96	11.39	H
									H
									H
									H
									H
	3702	-54.01	-13	-41.01	-75.69	-56.18	9.93	12.10	V
	5553	-40.08	-13	-27.08	-64.81	-39.56	13.67	13.15	V
	7405	-45.35	-13	-32.35	-76.34	-42.78	13.96	11.39	V
									V
									V
									V
									V
Middle	3742	-54.03	-13	-41.03	-75.93	-56.15	10.02	12.14	H
	5613	-40.41	-13	-27.41	-64.46	-39.69	13.93	13.21	H
	7485	-46.44	-13	-33.44	-76.82	-43.06	14.61	11.23	H
									H
									H
									H
									H
	3742	-53.79	-13	-40.79	-75.61	-55.91	10.02	12.14	V
	5613	-39.72	-13	-26.72	-64.27	-39.00	13.93	13.21	V
	7485	-46.43	-13	-33.43	-76.9	-43.05	14.61	11.23	V
									V
									V
									V
									V



Highest	3782	-53.19	-13	-40.19	-75.18	-55.26	10.11	12.18	H
	5673	-40.39	-13	-27.39	-64.57	-39.82	13.84	13.27	H
	7565	-46.31	-13	-33.31	-76.25	-42.71	15.06	11.46	H
									H
									H
									H
									H
	3782	-53.41	-13	-40.41	-75.38	-55.48	10.11	12.18	V
	5673	-42.15	-13	-29.15	-66.85	-41.58	13.84	13.27	V
	7565	-46.45	-13	-33.45	-76.47	-42.85	15.06	11.46	V
									V
									V
									V
									V
								V	

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n66 (Ant. MIMO 2)

5G NR n66 / 40MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3424	-51.20	-13	-38.20	-72.18	-54.33	9.42	12.55	H
	5136	-38.09	-13	-25.09	-62.73	-38.65	12.11	12.67	H
	6849	-48.11	-13	-35.11	-77.28	-46.54	13.97	12.40	H
									H
									H
									H
									H
	3424	-52.60	-13	-39.60	-73.59	-55.73	9.42	12.55	V
	5136	-37.28	-13	-24.28	-62.18	-37.84	12.11	12.67	V
	6849	-48.01	-13	-35.01	-77.01	-46.44	13.97	12.40	V
									V
									V
									V
									V
Middle	3545	-55.10	-13	-42.10	-76.26	-57.73	9.59	12.22	H
	5181	-52.17	-13	-39.17	-76.91	-52.69	12.17	12.69	H
	6909	-47.78	-13	-34.78	-76.95	-45.93	14.01	12.16	H
									H
									H
									H
									H
	3454	-55.37	-13	-42.37	-76.5	-58.41	9.45	12.49	V
	5181	-51.86	-13	-38.86	-76.84	-52.38	12.17	12.69	V
	6909	-47.59	-13	-34.59	-76.6	-45.74	14.01	12.16	V
									V
									V
									V
									V



Highest	3484	-55.47	-13	-42.47	-76.77	-58.42	9.48	12.43	H
	5226	-52.34	-13	-39.34	-77.15	-52.80	12.32	12.78	H
	6969	-47.59	-13	-34.59	-76.74	-45.46	14.05	11.92	H
									H
									H
									H
									H
	3484	-55.56	-13	-42.56	-76.82	-58.51	9.48	12.43	V
	5226	-52.21	-13	-39.21	-77.3	-52.67	12.32	12.78	V
	6969	-47.82	-13	-34.82	-76.83	-45.69	14.05	11.92	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n7 (Ant. MIMO 2)

5G NR n7 / 20MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4995	-52.36	-25	-27.36	-76.66	-53.04	11.92	12.60	H
	7503	-45.90	-25	-20.90	-76.18	-42.36	14.75	11.21	H
	10005	-42.86	-25	-17.86	-76.66	-36.79	17.17	11.10	H
									H
									H
									H
									H
	4995	-52.22	-25	-27.22	-76.84	-52.90	11.92	12.60	V
	7503	-46.23	-25	-21.23	-76.59	-42.69	14.75	11.21	V
	10005	-43.99	-25	-18.99	-77.13	-37.92	17.17	11.10	V
									V
									V
									V
									V
Middle	5055	-51.89	-25	-26.89	-76.33	-52.52	12.00	12.63	H
	7578	-46.31	-25	-21.31	-76.17	-42.69	15.13	11.51	H
	10105	-42.74	-25	-17.74	-76.55	-36.61	17.17	11.04	H
									H
									H
									H
									H
	5055	-51.54	-25	-26.54	-76.27	-52.17	12.00	12.63	V
	7578	-46.16	-25	-21.16	-76.1	-42.54	15.13	11.51	V
	10110	-43.43	-25	-18.43	-76.7	-37.29	17.17	11.03	V
									V
									V
									V
									V
								V	



Highest	5103	-52.23	-25	-27.23	-76.8	-52.82	12.06	12.65	H
	7654	-46.15	-25	-21.15	-75.87	-42.83	14.95	11.63	H
	10205	-42.44	-25	-17.44	-76.26	-36.25	17.17	10.98	H
									H
									H
									H
									H
	5103	-51.79	-25	-26.79	-76.62	-52.38	12.06	12.65	V
	7654	-46.09	-25	-21.09	-75.88	-42.77	14.95	11.63	V
	10205	-43.10	-25	-18.10	-76.5	-36.91	17.17	10.98	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n38 (Ant. MIMO 2)

5G NR n38 / 20MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5142	-52.30	-25	-27.30	-76.96	-52.85	12.12	12.67	H
	7713	-45.99	-25	-20.99	-75.67	-43.01	14.64	11.66	H
	10285	-42.19	-25	-17.19	-76.02	-35.96	17.16	10.93	H
									H
									H
									H
									H
	5142	-51.89	-25	-26.89	-76.8	-52.44	12.12	12.67	V
	7713	-46.13	-25	-21.13	-75.87	-43.15	14.64	11.66	V
	10285	-43.02	-25	-18.02	-76.53	-36.79	17.16	10.93	V
									V
									V
									V
									V
Middle	5172	-51.72	-25	-26.72	-76.45	-52.25	12.16	12.69	H
	7758	-46.16	-25	-21.16	-75.81	-43.45	14.39	11.68	H
	10345	-42.44	-25	-17.44	-76.27	-36.17	17.16	10.89	H
									H
									H
									H
									H
	5172	-51.66	-25	-26.66	-76.63	-52.19	12.16	12.69	V
	7758	-46.23	-25	-21.23	-75.94	-43.52	14.39	11.68	V
	10345	-42.76	-25	-17.76	-76.34	-36.49	17.16	10.89	V
									V
									V
									V
									V
								V	



Highest	5202	-52.81	-25	-27.81	-77.6	-53.31	12.21	12.71	H
	7803	-46.54	-25	-21.54	-76.17	-44.05	14.18	11.69	H
	10405	-42.29	-25	-17.29	-76.13	-35.99	17.16	10.86	H
									H
									H
									H
									H
	5202	-52.55	-25	-27.55	-77.58	-53.05	12.21	12.71	V
	7803	-46.78	-25	-21.78	-76.17	-44.29	14.18	11.69	V
	10405	-42.89	-25	-17.89	-76.55	-36.59	17.16	10.86	V
									V
									V
									V
									V
								V	

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n41 (HPUE) (Ant. MIMO 2)

5G NR n41 (HPUE) / 80MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4997	-51.39	-25	-26.39	-75.69	-52.07	11.92	12.60	H
	7495	-46.02	-25	-21.02	-76.33	-42.54	14.69	11.21	H
	9993	-43.77	-25	-18.77	-77.54	-37.71	17.16	11.10	H
									H
									H
									H
									H
	4997	-50.77	-25	-25.77	-75.5	-51.45	11.92	12.60	V
	7495	-46.05	-25	-21.05	-76.42	-42.57	14.69	11.21	V
	9993	-43.93	-25	-18.93	-77.04	-37.87	17.16	11.10	V
									V
									V
									V
									V
Middle	5115	-52.00	-25	-27.00	-76.59	-52.58	12.08	12.66	H
	7665	-46.40	-25	-21.40	-76.11	-43.14	14.89	11.63	H
	10215	-42.19	-25	-17.19	-76	-35.99	17.17	10.97	H
									H
									H
									H
									H
	5115	-51.71	-25	-26.71	-76.57	-52.29	12.08	12.66	V
	7665	-46.14	-25	-21.14	-75.92	-42.88	14.89	11.63	V
	10221	-43.24	-25	-18.24	-76.66	-37.04	17.17	10.97	V
									V
									V
									V
									V
								V	



Highest	5225	-50.46	-25	-25.46	-75.28	-50.93	12.31	12.78	H
	7837	-46.39	-25	-21.39	-76.14	-43.72	14.28	11.61	H
	10449	-42.49	-25	-17.49	-76.34	-36.16	17.16	10.83	H
									H
									H
									H
									H
	5225	-49.06	-25	-24.06	-74.14	-49.53	12.31	12.78	V
	7837	-45.42	-25	-20.42	-75.21	-42.75	14.28	11.61	V
	10449	-42.33	-25	-17.33	-76.05	-36.00	17.16	10.83	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EN-DC 66A-n41A (Ant. Main + Ant. MIMO2)

EN-DC 66A-n41A / 20M+80MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4997	-58.31	-25	-33.31	-76.61	-58.99	11.92	12.60	H
	7495	-45.98	-25	-20.98	-76.29	-42.50	14.69	11.21	H
	9993	-43.45	-25	-18.45	-77.22	-37.39	17.16	11.10	H
									H
									H
									H
									H
	4997	-51.89	-25	-26.89	-76.51	-52.57	11.92	12.60	V
	7495	-45.52	-25	-20.52	-75.92	-42.04	14.69	11.21	V
	9993	-43.85	-25	-18.85	-76.94	-37.79	17.16	11.10	V
									V
									V
									V
									V
Middle	5115	-51.82	-25	-26.82	-76.41	-52.40	12.08	12.66	H
	7665	-46.18	-25	-21.18	-75.89	-42.92	14.89	11.63	H
	10215	-41.94	-25	-16.94	-75.76	-35.74	17.17	10.97	H
									H
									H
									H
									H
	5115	-51.69	-25	-26.69	-76.55	-52.27	12.08	12.66	V
	7665	-45.98	-25	-20.98	-75.76	-42.72	14.89	11.63	V
	10221	-42.67	-25	-17.67	-76.09	-36.47	17.17	10.97	V
									V
									V
									V
									V
								V	



Highest	5224	-51.76	-25	-26.76	-76.58	-52.22	12.31	12.77	H
	7836	-46.14	-25	-21.14	-75.88	-43.47	14.28	11.61	H
	10449	-42.15	-25	-17.15	-76	-35.82	17.16	10.83	H
									H
									H
									H
									H
	5224	-51.75	-25	-26.75	-76.84	-52.21	12.31	12.77	V
	7836	-45.45	-25	-20.45	-75.24	-42.78	14.28	11.61	V
	10449	-42.27	-25	-17.27	-75.99	-35.94	17.16	10.83	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n41 MIMO (HPUE) (Ant. MIMO 1 + Ant. MIMO 2)

5G NR n41 MIMO (HPUE) / 80MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5107	-51.79	-25	-26.79	-76.37	-61.60	2.32	12.12	H
	7665	-46.02	-25	-21.02	-75.73	-54.50	2.11	10.59	H
	10224	-42.33	-25	-17.33	-76.15	-52.07	2.15	11.89	H
									H
									H
									H
									H
	5107	-51.56	-25	-26.56	-76.41	-61.37	2.32	12.12	V
	7665	-46.04	-25	-21.04	-75.82	-54.52	2.11	10.59	V
	10224	-42.92	-25	-17.92	-76.34	-52.66	2.15	11.89	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n41 (HPUE) (Ant. Aux SRS)

5G NR n41 (HPUE) / 80MHz / BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4997	-47.89	-25	-22.89	-72.19	-48.57	11.92	12.60	H
	7495	-38.45	-25	-13.45	-68.74	-34.97	14.69	11.21	H
	9993	-43.22	-25	-18.22	-76.97	-37.16	17.16	11.10	H
									H
									H
									H
									H
	4997	-47.28	-25	-22.28	-71.9	-47.96	11.92	12.60	V
	7495	-45.16	-25	-20.16	-76.12	-41.68	14.69	11.21	V
	9993	-43.95	-25	-18.95	-77.04	-37.89	17.16	11.10	V
									V
									V
									V
									V
Middle	5111	-47.30	-25	-22.30	-71.89	-47.88	12.08	12.66	H
	7666	-34.04	-25	-9.04	-63.75	-30.78	14.89	11.63	H
	10221	-42.41	-25	-17.41	-76.22	-36.21	17.17	10.97	H
									H
									H
									H
									H
	5111	-47.65	-25	-22.65	-72.51	-48.23	12.08	12.66	V
	7666	-40.37	-25	-15.37	-70.15	-37.11	14.89	11.63	V
	10221	-42.59	-25	-17.59	-75.99	-36.39	17.17	10.97	V
									V
									V
									V
									V



Highest	5225	-49.33	-25	-24.33	-74.15	-49.80	12.31	12.78	H
	7837	-42.16	-25	-17.16	-71.87	-39.49	14.28	11.61	H
	10449	-42.20	-25	-17.20	-76.05	-35.87	17.16	10.83	H
									H
									H
									H
									H
	5225	-47.30	-25	-22.30	-72.38	-47.77	12.31	12.78	V
	7837	-40.53	-25	-15.53	-70.29	-37.86	14.28	11.61	V
	10449	-42.26	-25	-17.26	-75.99	-35.93	17.16	10.83	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.