

### #01\_WCDMA II\_RMC 12.2Kbps\_Bottom of Laptop\_0mm\_Ch9538


Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_230102 Medium parameters used:  $f = 1908 \text{ MHz}$ ;  $\sigma = 1.46 \text{ S/m}$ ;  $\epsilon_r = 39.199$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.6 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.6 \text{ }^\circ\text{C}$

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.42, 8.42, 8.42) @ 1907.6 MHz; Calibrated: 2022/11/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2022/3/29
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1041
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (81x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.929 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $21.01 \text{ V/m}$ ; Power Drift =  $-0.11 \text{ dB}$   
Peak SAR (extrapolated) =  $1.67 \text{ W/kg}$   
**SAR(1 g) =  $0.834 \text{ W/kg}$ ; SAR(10 g) =  $0.415 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $1.25 \text{ W/kg}$

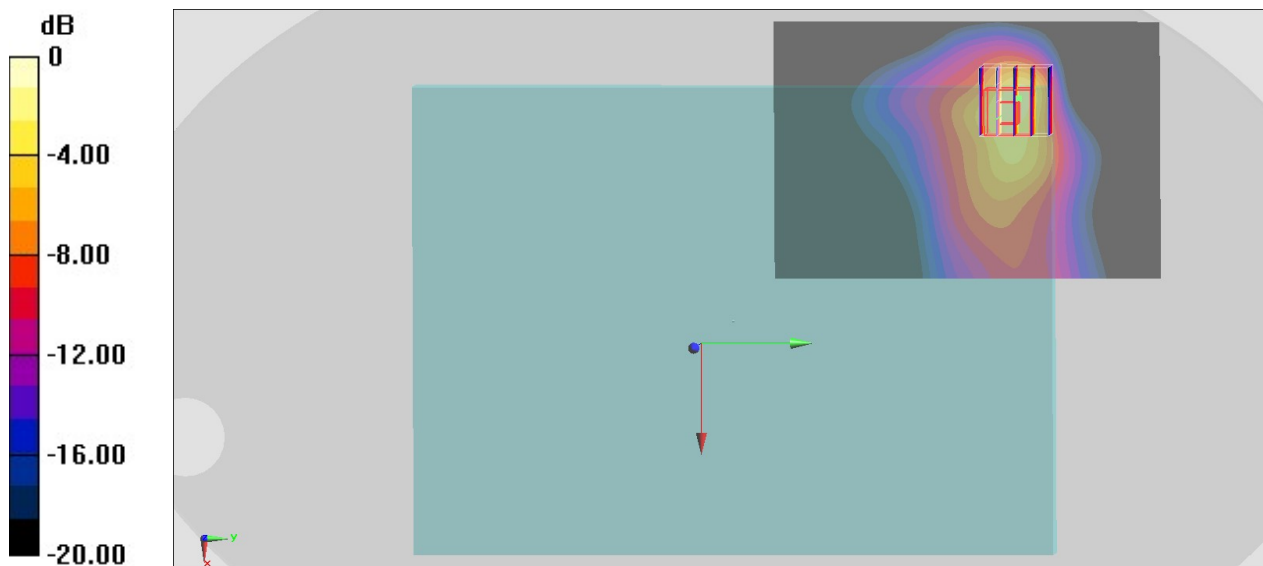

0 dB =  $1.25 \text{ W/kg} = 0.97 \text{ dBW/kg}$

## #02\_WCDMA IV\_RMC 12.2Kbps\_Bottom of Laptop\_0mm\_Ch1513

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: HSL\_1750\_230102 Medium parameters used:  $f = 1753$  MHz;  $\sigma = 1.377$  S/m;  $\epsilon_r = 40.767$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.86, 8.86, 8.86) @ 1752.6 MHz; Calibrated: 2022/11/15

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1512; Calibrated: 2022/3/29

- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1041

- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.844 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.69 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.776 W/kg; SAR(10 g) = 0.413 W/kg**

Maximum value of SAR (measured) = 1.10 W/kg

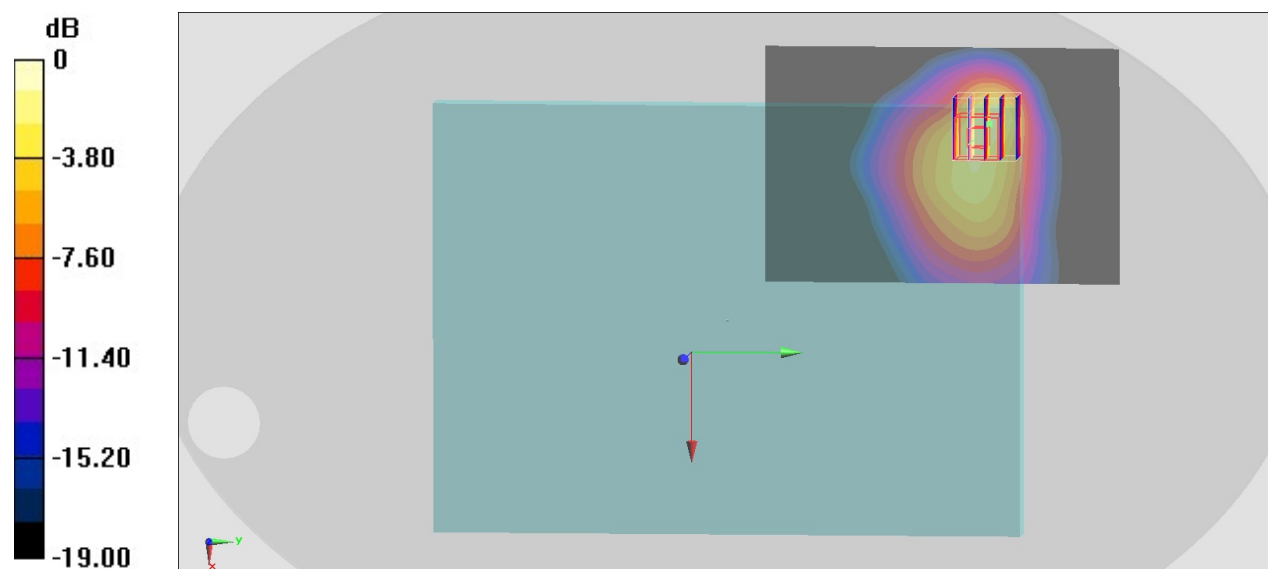

0 dB = 1.10 W/kg = 0.41 dBW/kg

### #03\_WCDMA V\_RMC 12.2Kbps\_Bottom of Laptop\_0mm\_Ch4233


Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_850\_230104 Medium parameters used:  $f = 847 \text{ MHz}$ ;  $\sigma = 0.92 \text{ S/m}$ ;  $\epsilon_r = 41.938$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.4 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.4 \text{ }^\circ\text{C}$

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.57, 9.57, 9.57) @ 846.6 MHz; Calibrated: 2022/11/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2022/3/29
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1041
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (81x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $1.24 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $37.45 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$   
Peak SAR (extrapolated) =  $1.45 \text{ W/kg}$   
**SAR(1 g) = 0.808 W/kg; SAR(10 g) = 0.451 W/kg**  
Maximum value of SAR (measured) =  $1.08 \text{ W/kg}$

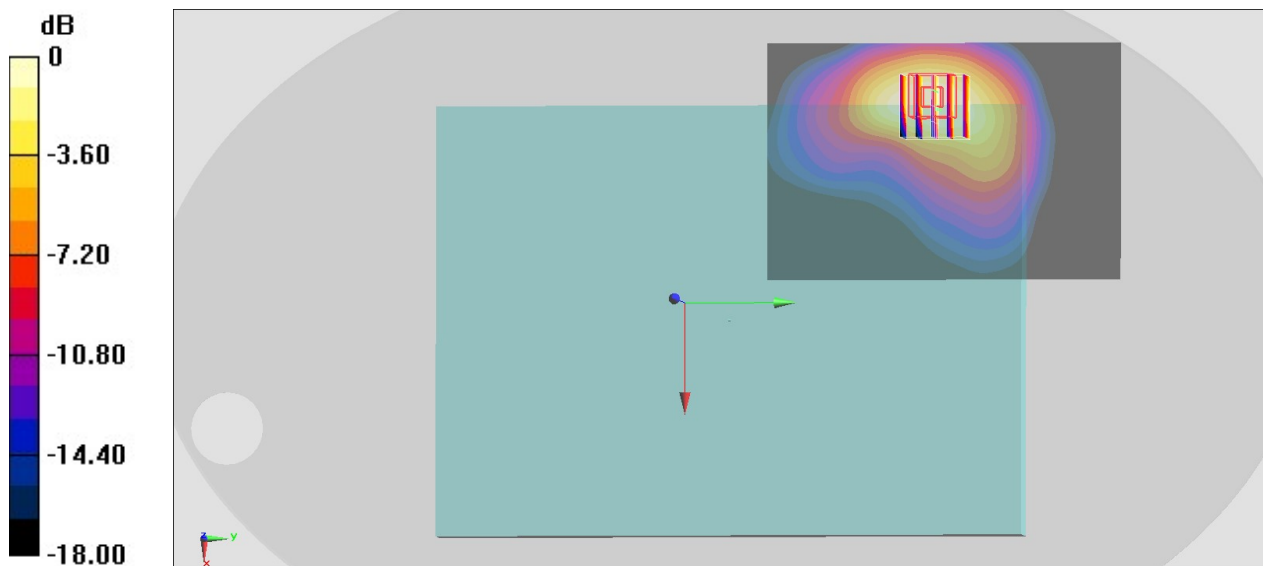

0 dB =  $1.08 \text{ W/kg} = 0.33 \text{ dBW/kg}$

### #04\_LTE Band 7\_20M\_QPSK\_1\_0\_Bottom of Laptop\_0mm\_Ch20850


Communication System: LTE; Frequency: 2510 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600\_230101 Medium parameters used:  $f = 2510$  MHz;  $\sigma = 1.883$  S/m;  $\epsilon_r = 39.521$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.47, 7.47, 7.47) @ 2510 MHz; Calibrated: 2022/11/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2022/3/29
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1041
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (101x141x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.679 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 17.47 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 2.01 W/kg  
**SAR(1 g) = 0.856 W/kg; SAR(10 g) = 0.346 W/kg**  
Maximum value of SAR (measured) = 1.54 W/kg

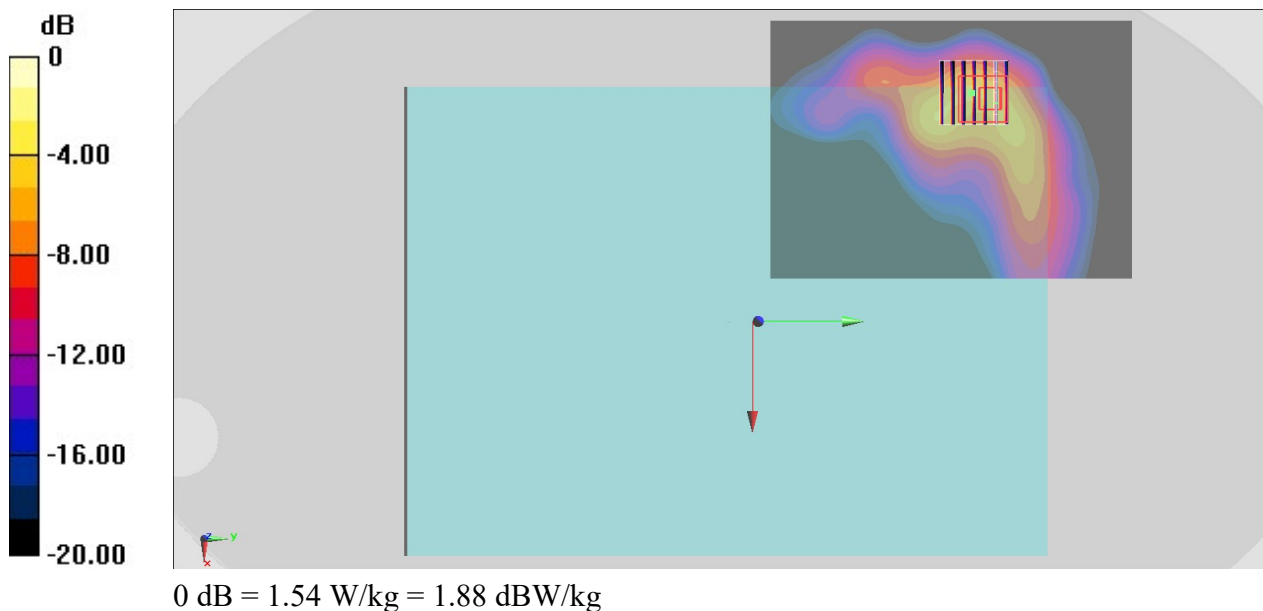

### #05\_LTE Band 12\_10M\_QPSK\_1\_0\_Bottom of Laptop\_0mm\_Ch23095


Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_230103 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.874$  S/m;  $\epsilon_r = 42.737$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.82, 9.82, 9.82) @ 707.5 MHz; Calibrated: 2022/11/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2022/3/29
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1041
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (101x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.26 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 32.34 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 1.79 W/kg  
**SAR(1 g) = 0.934 W/kg; SAR(10 g) = 0.537 W/kg**  
Maximum value of SAR (measured) = 1.47 W/kg

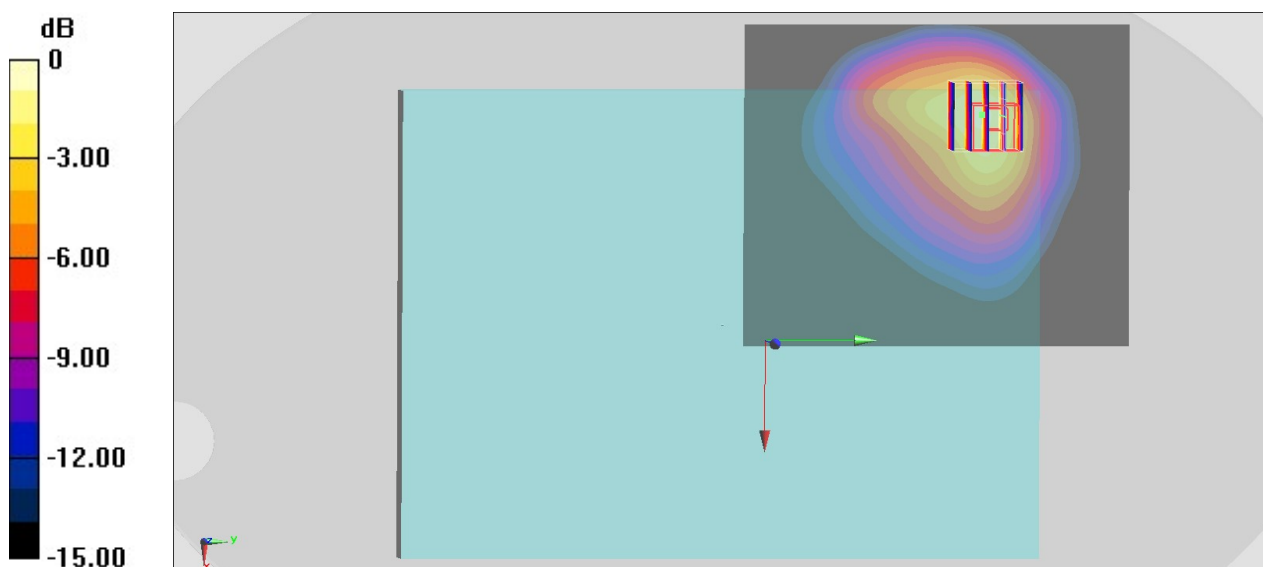

0 dB = 1.47 W/kg = 1.67 dBW/kg

### #06\_LTE Band 13\_10M\_QPSK\_1\_0\_Bottom of Laptop\_0mm\_Ch23230


Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_230103 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.898 \text{ S/m}$ ;  $\epsilon_r = 42.262$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.82, 9.82, 9.82) @ 782 MHz; Calibrated: 2022/11/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2022/3/29
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1041
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $1.50 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $39.48 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$   
Peak SAR (extrapolated) =  $1.62 \text{ W/kg}$   
**SAR(1 g) =  $0.877 \text{ W/kg}$ ; SAR(10 g) =  $0.513 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $1.30 \text{ W/kg}$

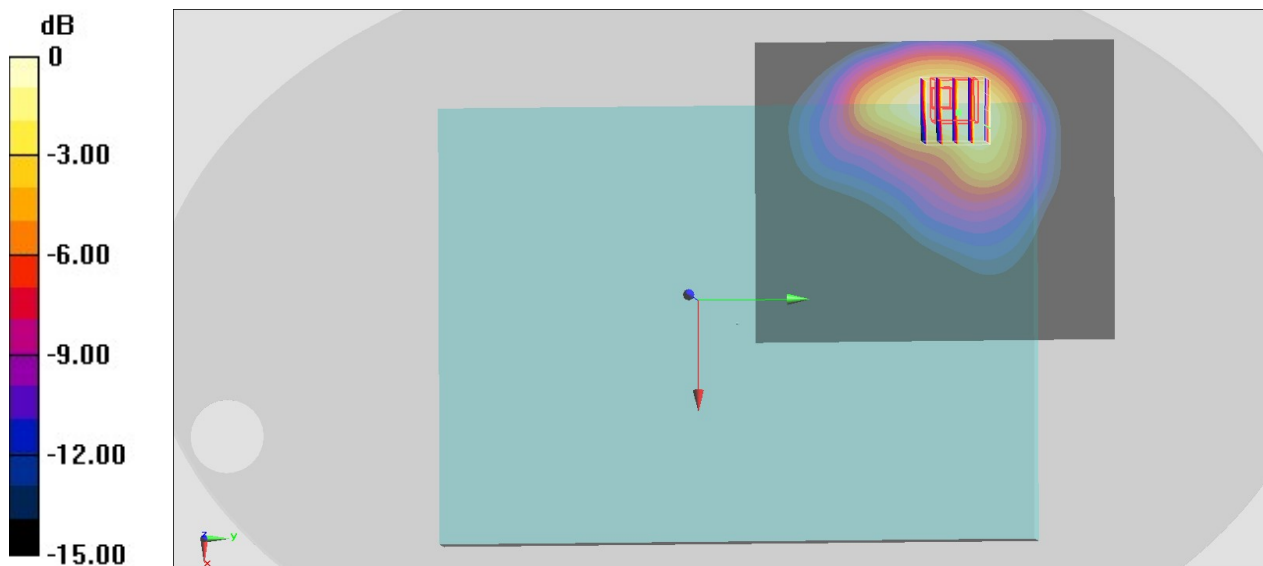

0 dB =  $1.30 \text{ W/kg} = 1.14 \text{ dBW/kg}$

### #07\_LTE Band 14\_10M\_QPSK\_1\_0\_Bottom of Laptop\_0mm\_Ch23330


Communication System: LTE; Frequency: 793 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_230103 Medium parameters used:  $f = 793$  MHz;  $\sigma = 0.902$  S/m;  $\epsilon_r = 42.224$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.82, 9.82, 9.82) @ 793 MHz; Calibrated: 2022/11/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2022/3/29
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1041
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.23 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 38.46 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 1.44 W/kg  
**SAR(1 g) = 0.802 W/kg; SAR(10 g) = 0.467 W/kg**  
Maximum value of SAR (measured) = 1.20 W/kg

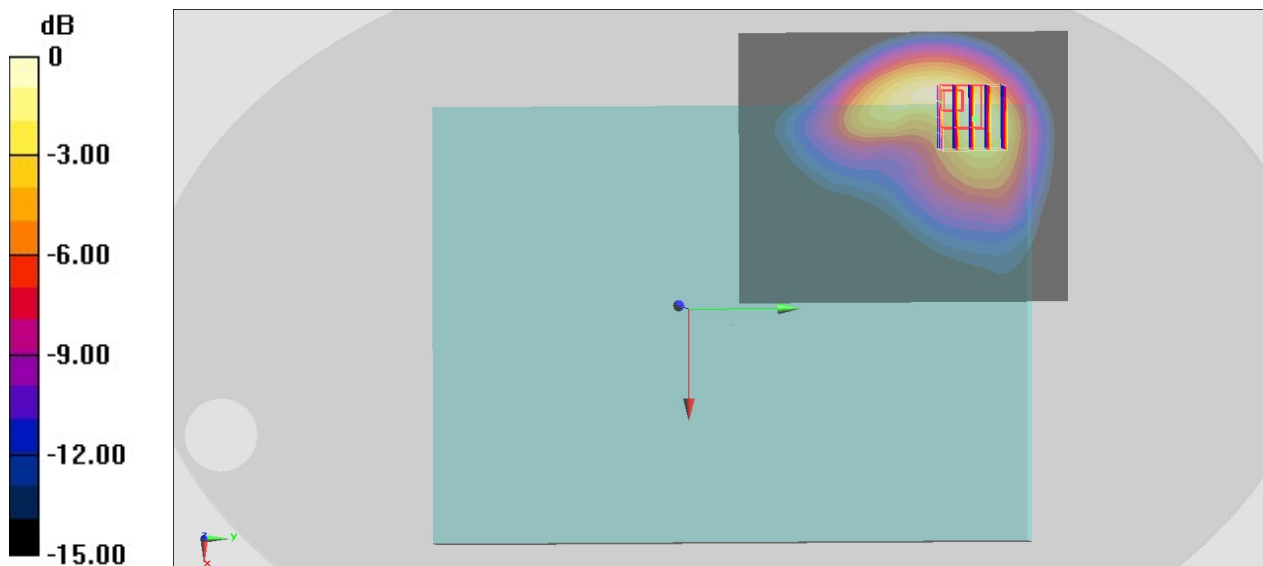

0 dB = 1.20 W/kg = 0.79 dBW/kg

### #08\_LTE Band 25\_20M\_QPSK\_1\_0\_Bottom of Laptop\_0mm\_Ch26590


Communication System: LTE; Frequency: 1905 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_230102 Medium parameters used:  $f = 1905$  MHz;  $\sigma = 1.457$  S/m;  $\epsilon_r = 39.211$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.42, 8.42, 8.42) @ 1905 MHz; Calibrated: 2022/11/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2022/3/29
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1041
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.812 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 19.68 V/m; Power Drift = -0.09 dB  
Peak SAR (extrapolated) = 1.41 W/kg  
**SAR(1 g) = 0.709 W/kg; SAR(10 g) = 0.354 W/kg**  
Maximum value of SAR (measured) = 1.06 W/kg

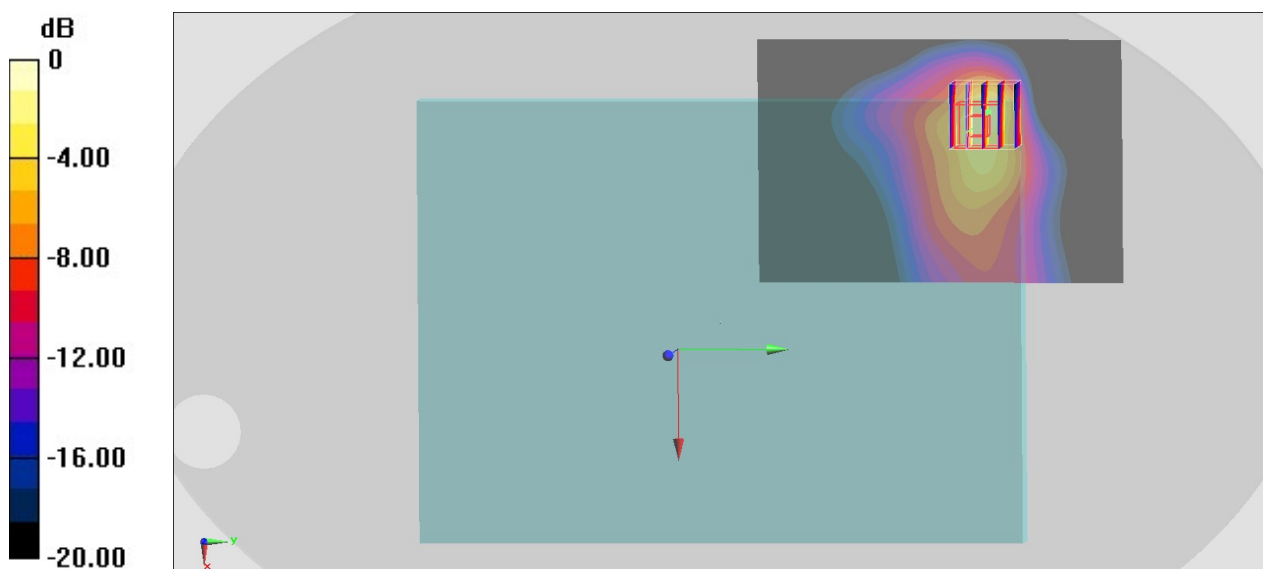

0 dB = 1.06 W/kg = 0.25 dBW/kg



### #09\_LTE Band 26\_15M\_QPSK\_1\_0\_Bottom of Laptop\_0mm\_Ch26865


Communication System: LTE; Frequency: 831.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_850\_230104 Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.914$  S/m;  $\epsilon_r = 42.044$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.57, 9.57, 9.57) @ 831.5 MHz; Calibrated: 2022/11/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2022/3/29
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1041
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (81x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.14 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 36.50 V/m; Power Drift = -0.13 dB  
Peak SAR (extrapolated) = 1.54 W/kg  
**SAR(1 g) = 0.863 W/kg; SAR(10 g) = 0.492 W/kg**  
Maximum value of SAR (measured) = 1.20 W/kg

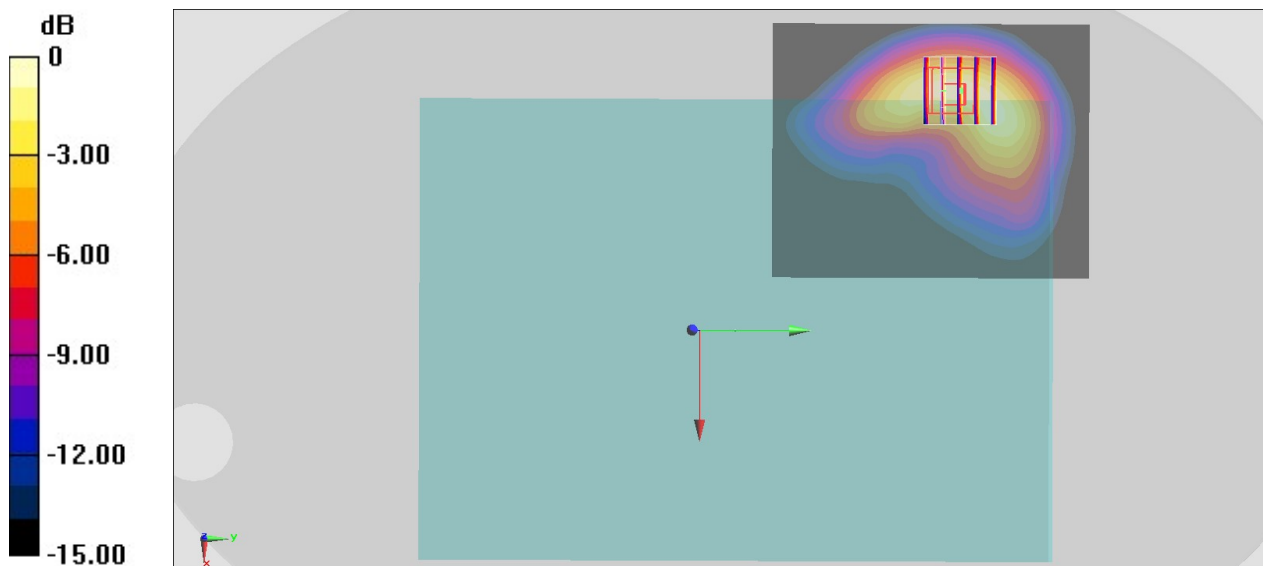

0 dB = 1.20 W/kg = 0.79 dBW/kg

### #10\_LTE Band 30\_10M\_QPSK\_1\_0\_Bottom of Laptop\_0mm\_Ch27710


Communication System: LTE; Frequency: 2310 MHz; Duty Cycle: 1:1  
Medium: HSL\_2300\_230101 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.67$  S/m;  $\epsilon_r = 39.871$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8, 8, 8) @ 2310 MHz; Calibrated: 2022/11/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2022/3/29
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1041
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (101x141x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.03 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 21.56 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 1.99 W/kg  
**SAR(1 g) = 0.963 W/kg; SAR(10 g) = 0.466 W/kg**  
Maximum value of SAR (measured) = 1.58 W/kg

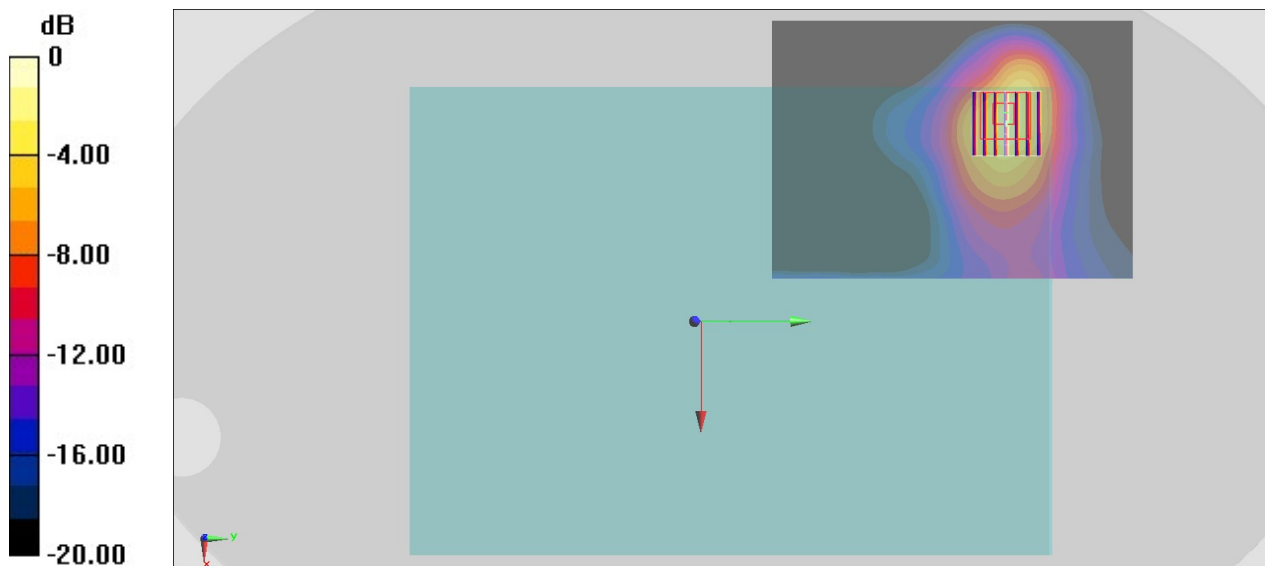

0 dB = 1.58 W/kg = 1.99 dBW/kg

### #11\_LTE Band 66\_20M\_QPSK\_1\_0\_Bottom of Laptop\_0mm\_Ch132572


Communication System: LTE; Frequency: 1770 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_230102 Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.392$  S/m;  $\epsilon_r = 40.715$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.86, 8.86, 8.86) @ 1770 MHz; Calibrated: 2022/11/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2022/3/29
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1041
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.863 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 24.36 V/m; Power Drift = -0.16 dB  
Peak SAR (extrapolated) = 1.13 W/kg  
**SAR(1 g) = 0.580 W/kg; SAR(10 g) = 0.307 W/kg**  
Maximum value of SAR (measured) = 0.941 W/kg

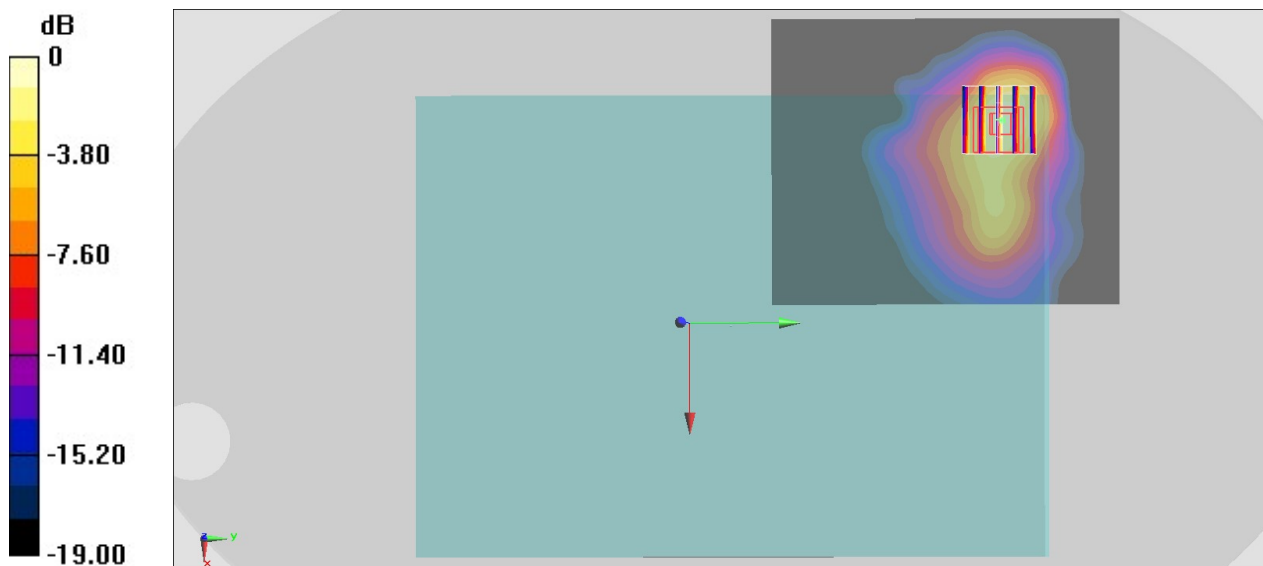

0 dB = 0.941 W/kg = -0.26 dBW/kg

### #12\_LTE Band 71\_20M\_QPSK\_1\_0\_Bottom of Laptop\_0mm\_Ch133297


Communication System: LTE; Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_230103 Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.863$  S/m;  $\epsilon_r = 42.849$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.82, 9.82, 9.82) @ 680.5 MHz; Calibrated: 2022/11/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2022/3/29
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1041
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (101x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.02 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 30.26 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 1.38 W/kg  
**SAR(1 g) = 0.752 W/kg; SAR(10 g) = 0.443 W/kg**  
Maximum value of SAR (measured) = 1.15 W/kg

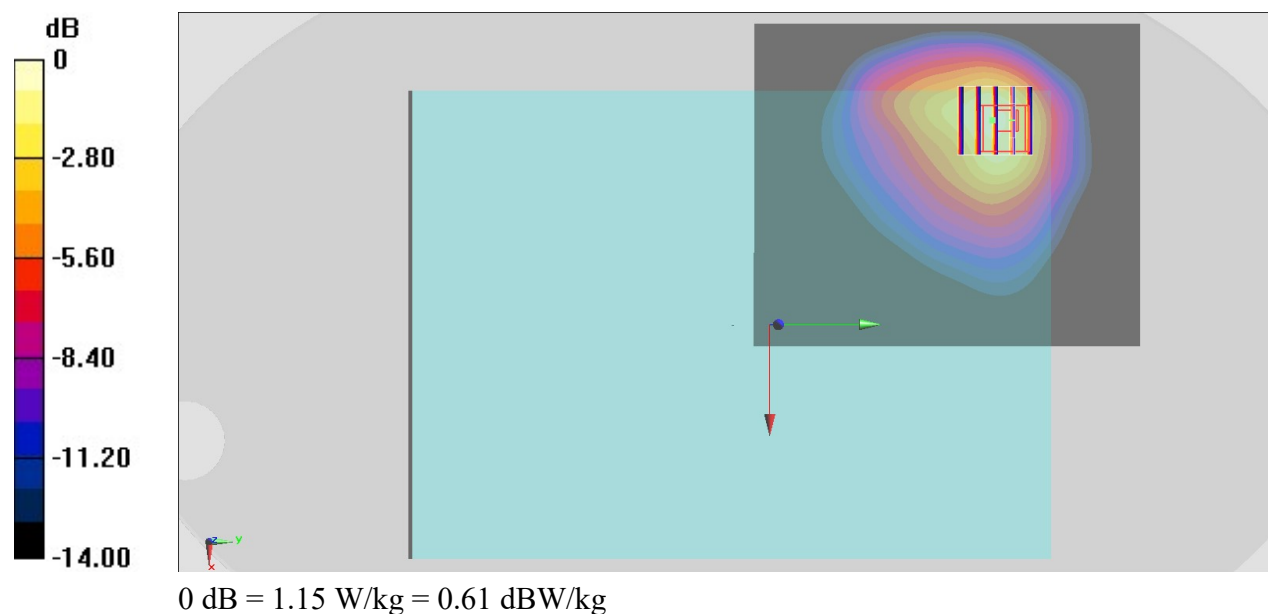

### #13\_LTE Band 41\_HPUE\_20M\_QPSK\_1\_0\_Bottom of Laptop\_0mm\_Ch41490

Communication System: LTE; Frequency: 2680 MHz; Duty Cycle: 1:2.33  
Medium: HSL\_2600\_221231 Medium parameters used:  $f = 2680$  MHz;  $\sigma = 2.105$  S/m;  $\epsilon_r = 38.732$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.47, 7.47, 7.47) @ 2680 MHz; Calibrated: 2022/11/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2022/3/29
- Phantom: ELI V4.0\_Right; Type: QD OVA 001 BB; Serial: TP:1041
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (101x141x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.864 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.60 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.13 W/kg

**SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.492 W/kg**

Maximum value of SAR (measured) = 1.60 W/kg

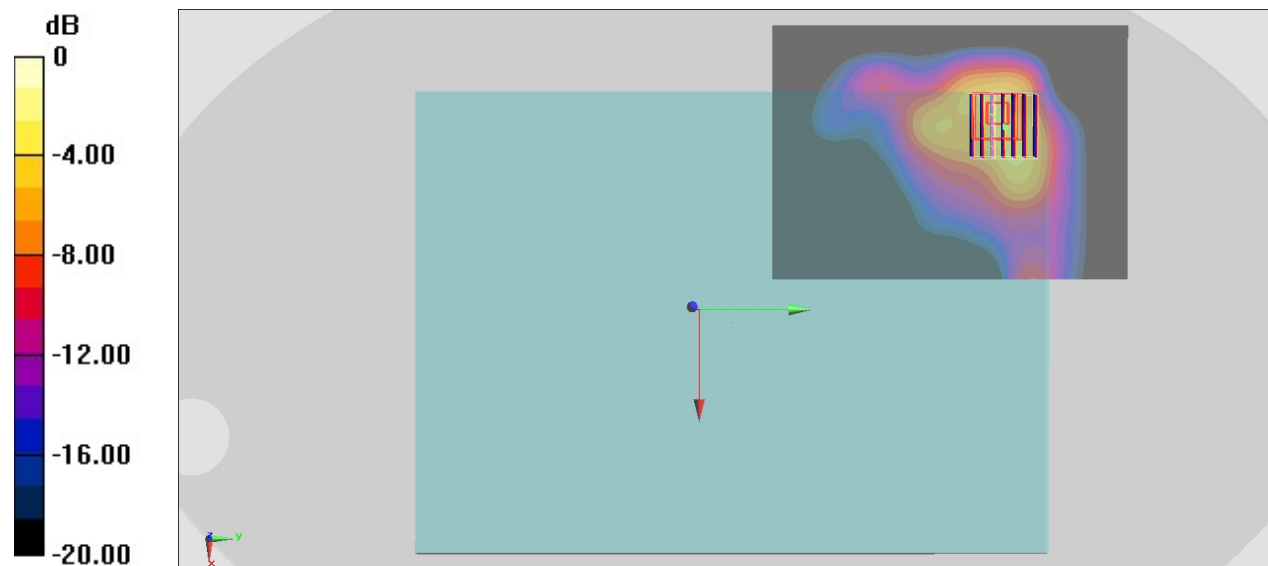

0 dB = 1.60 W/kg = 2.04 dBW/kg

### #14\_LTE Band 48\_20M\_QPSK\_1\_0\_Bottom of Laptop\_0mm\_Ch56640


Communication System: LTE; Frequency: 3690 MHz; Duty Cycle: 1:1.59  
Medium: HSL\_3700\_230105 Medium parameters used:  $f = 3690$  MHz;  $\sigma = 3.165$  S/m;  $\epsilon_r = 36.796$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(6.94, 6.94, 6.94) @ 3690 MHz; Calibrated: 2022/11/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2022/3/29
- Phantom: ELI V4.0\_Left; Type: QD OVA 001 BB; Serial: TP:1164
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (141x141x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.02 W/kg

**Zoom Scan (7x7x8)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm  
Reference Value = 19.54 V/m; Power Drift = -0.13 dB  
Peak SAR (extrapolated) = 1.27 W/kg  
**SAR(1 g) = 0.517 W/kg; SAR(10 g) = 0.213 W/kg**  
Maximum value of SAR (measured) = 0.934 W/kg

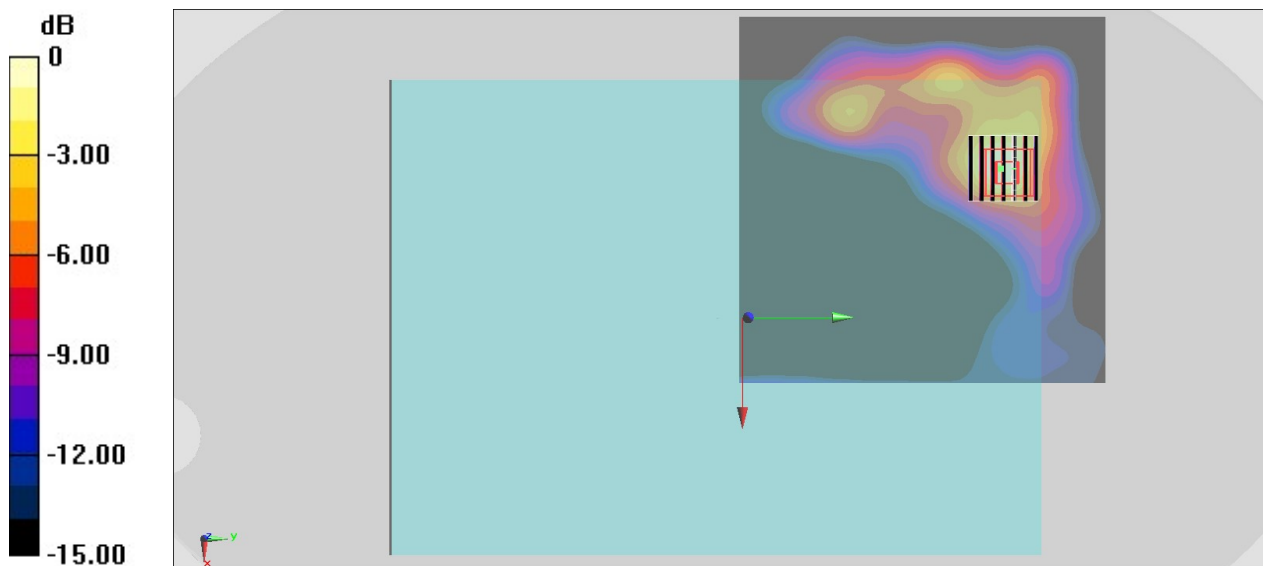

0 dB = 0.934 W/kg = -0.30 dBW/kg