




# FCC RADIO TEST REPORT

FCC ID : 2AJN7-TP00145AU  
Equipment : Notebook Computer  
Brand Name : Lenovo  
Compliance ID : TP00145A; TP00145B  
Applicant : LC Future Center Limited Taiwan Branch  
7F., No.780, Beian Rd., Zhongshan Dist., Taipei  
104, Taiwan  
Manufacturer : LCFC (HeFei) Electronics Technology Co., Ltd.  
No. 3188-1, Yungu Road (Hefei Export Processing  
Zone), Hefei Economics & Technology  
Development Area, Anhui, CHINA  
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

Equipment: Fibocom FM350-GL tested inside of Lenovo Notebook Computer.

The product was received on Nov. 14, 2022 and testing was performed from Dec. 16, 2022 to Jan. 18, 2023. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

*Sporton International Inc. Wensan Laboratory*



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test .....	5
1.2 Product Specification of Equipment Under Test .....	6
1.3 Modification of EUT .....	7
1.4 Testing Location .....	7
1.5 Applicable Standards .....	7
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>8</b>
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System .....	9
2.3 Support Unit used in test configuration .....	9
2.4 Frequency List of Low/Middle/High Channels.....	9
<b>3 Conducted Test Result .....</b>	<b>10</b>
3.1 Measuring Instruments.....	10
3.2 Conducted Output Power and ERP/EIRP .....	11
<b>4 Radiated Test Items .....</b>	<b>12</b>
4.1 Measuring Instruments.....	12
4.2 Test Setup .....	12
4.3 Test Result of Radiated Test.....	13
4.4 Field Strength of Spurious Radiation Measurement .....	14
<b>5 List of Measuring Equipment.....</b>	<b>15</b>
<b>6 Uncertainty of Evaluation.....</b>	<b>16</b>
<b>Appendix A. Test Results of Conducted Test</b>	
<b>Appendix B. Test Results of Radiated Test</b>	
<b>Appendix C. Test Setup Photographs</b>	



### History of this test report

Report No.	Version	Description	Issue Date
FG2N1462A	01	Initial issue of report	Jan. 19, 2023
FG2N1462A	02	Revise Product Feature	Feb. 20, 2023
FG2N1462A	03	Revise cover page and Product Feature	Feb. 22, 2023



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(5)	Effective Radiated Power (WCDMA Band V)		
	§24.232 (c)	Equivalent Isotropic Radiated Power (WCDMA Band II)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)		
-	§24.232 (d)	Peak-to-Average Ratio	-	See Note
-	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	-	See Note
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	-	See Note
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	-	See Note
-	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	-	See Note
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	28.44 dB under the limit at 3504.000 MHz

**Note:** The certified module (model: FM350-GL) which supports normal mode and TX switching mode being integrated into a notebook computer. Spot check on both modes were performed and no degradation occur. Thus additionally reporting the spot check results in this report.

### Declaration of Conformity:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
- The measurement uncertainty please refer to report "Uncertainty of Evaluation".

### Comments and Explanations:

- The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.
- The purpose of different model name is for CPU (Intel/AMD).

**Reviewed by: Sheng Kuo**

**Report Producer: Ruby Zou**

# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Notebook Computer
Brand Name	Lenovo
Compliance ID	TP00145A; TP00145B
FCC ID	2AJN7-TP00145AU
Sample 1	EUT with Amphenol Taiwan Corporation Antenna
Sample 2	EUT with Speed Antenna
Integrated WLAN Module	Brand Name: Qualcomm Model Name: QCNFA725 FCC ID: A5M-QCNFA725
	Brand Name: Intel Model Name: AX211D2W FCC ID: PD9AX211D2
Integrated NFC Module	Brand Name: Foxconn Model Name: T77H747
EUT supports Radios application	WCDMA/HSPA/LTE/5G NR/GNSS/NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
EUT Stage	Production Unit

**Remark:**

1. The above EUT's information was declared by manufacturer.
2. Equipment: Fibocom FM350-GL tested inside of Lenovo Notebook Computer.
3. All the test results were performed with TP00145A.

	Normal mode	TX switching mode
	TX/RX	TX/RX
Ant_0 (Main)	WCDMA : 2/4/5 LTE : 2/4/5/7/12/13/14/17/25/26/30/38/66/71 NR : 2/5/7/25/30/38/66/71	WCDMA : 5 LTE : 5/12/13/14/17/26/41/48/71 NR : 5/41/71/77/78
Ant_2 (MIMO2)	LTE : 41/48 NR : 41/77/78	WCDMA : 2/4 LTE : 2/4/7/25/30/38/66 NR : 2/7/25/30/38/66

WWAN Antenna Information				
Main Antenna	Manufacturer	Amphenol Taiwan Corporation	Peak gain (dBi)	WCDMA Band II: 0.4 WCDMA Band IV: 1.6 WCDMA Band V: -0.4
	Part number	DC33001YS50	Type	PIFA
	Manufacturer	Speed	Peak gain (dBi)	WCDMA Band II: 0.4 WCDMA Band IV: 1.6 WCDMA Band V: -0.4
	Part number	DC33001YT50	Type	PIFA
MIMO 2 Antenna	Manufacturer	Amphenol Taiwan Corporation	Peak gain (dBi)	WCDMA Band II: -0.2 WCDMA Band IV: -0.2
	Part number	DC33001YS40	Type	PIFA
	Manufacturer	Speed	Peak gain (dBi)	WCDMA Band II: -0.2 WCDMA Band IV: -0.2
	Part number	DC33001YT40	Type	PIFA

**Remark:** The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

## 1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
<b>Tx Frequency</b>	<b>WCDMA:</b> Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz
<b>Rx Frequency</b>	<b>WCDMA:</b> Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz
<b>Maximum Output Power to Antenna</b>	<b>WCDMA:</b> <b>&lt;Main Antenna&gt;</b> Band V: 23.20 dBm Band II: 23.16 dBm Band IV: 23.30 dBm <b>&lt;MIMO 2 Antenna&gt;</b> Band II: 23.06 dBm Band IV: 23.07 dBm
<b>Type of Modulation</b>	WCDMA: BPSK (Uplink) HSDPA: 64QAM (Downlink) HSUPA: QPSK (Uplink)



### 1.3 Modification of EUT

No modifications made to the EUT during the testing.

### 1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333
Test Site No.	<b>Sporton Site No.</b>
	TH03-HY (TAF Code: 1190)
Test Engineer	Mike Yeh
Temperature (°C)	22.2~23.1
Relative Humidity (%)	51~56
Remark	The Conducted test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010
Test Site No.	<b>Sporton Site No.</b>
	03CH15-HY
Test Engineer	Eric Xiao, Quentin Liu and Bigshow Wang
Temperature (°C)	21~26
Relative Humidity (%)	45~60

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

### 1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for WCDMA Band II

All modes, data rates and positions were investigated.


Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

**Remark:** All the radiated test cases were performed with Battery 1 and Sample 2.



## 2.2 Connection Diagram of Test System

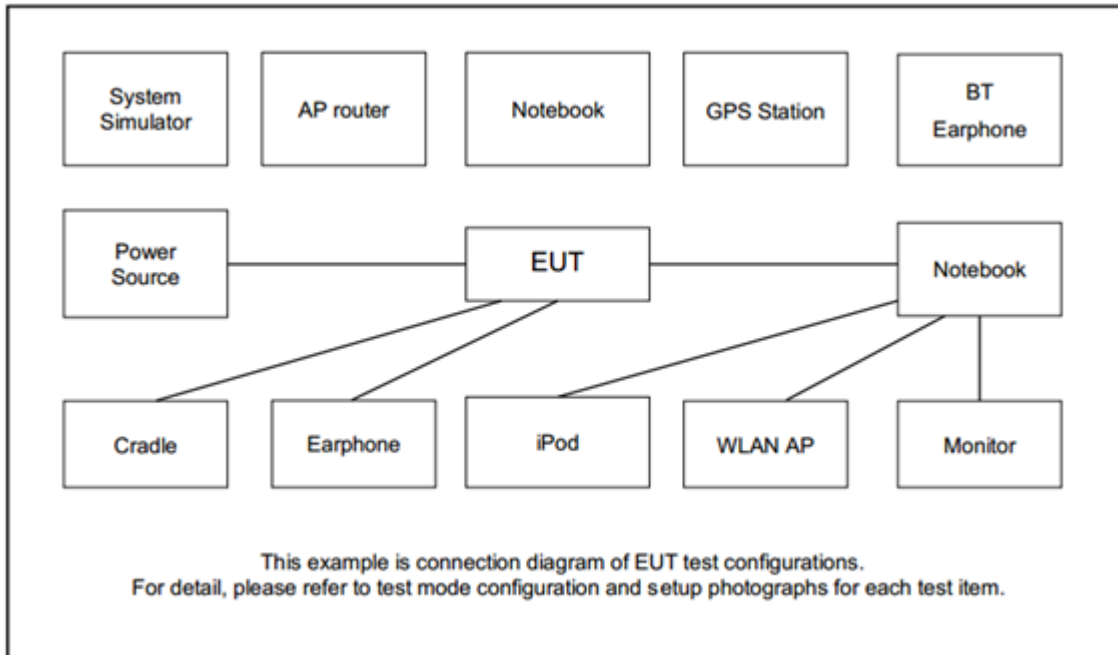

## 2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

## 2.4 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6

### 3 Conducted Test Result

#### 3.1 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.1 Test Setup

##### 3.1.2 Conducted Output Power



##### 3.1.3 Test Result of Conducted Test

Please refer to Appendix A.



## 3.2 Conducted Output Power and ERP/EIRP

### 3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

### 3.2.2 Test Procedures

1. The transmitter output port is connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select the lowest, middle, and the highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


Please refer to the measuring equipment list in this test report.

### 4.2 Test Setup


For radiated test below 30MHz

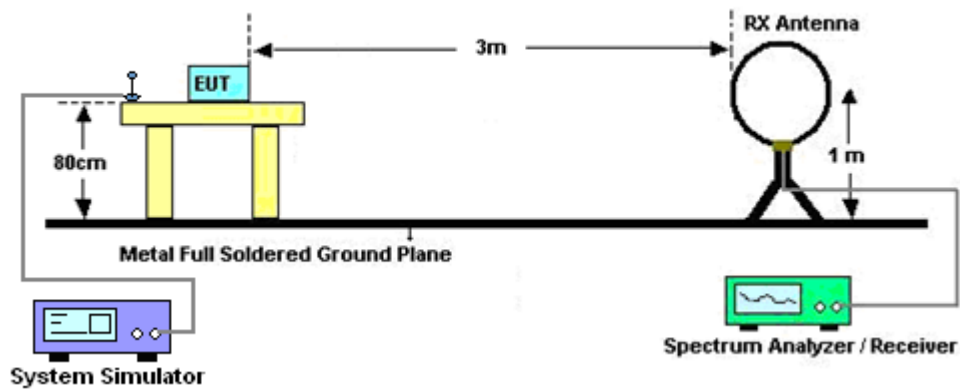


For radiated test from 30MHz to 1GHz

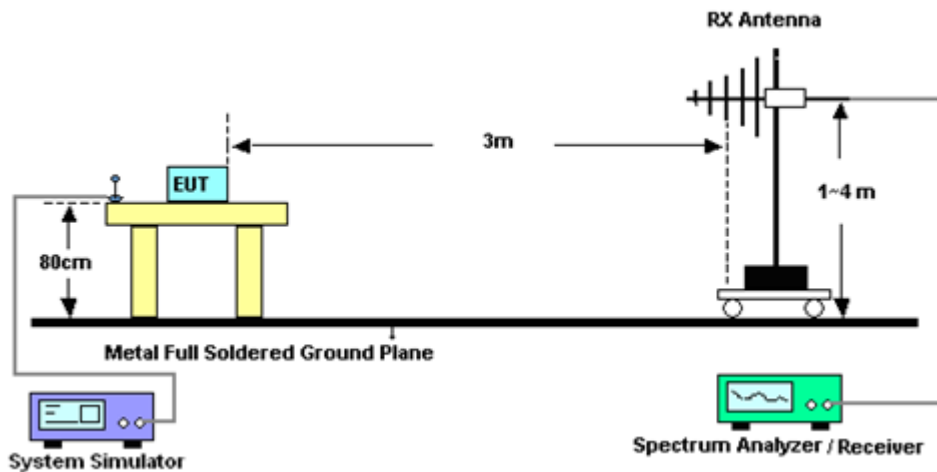

For radiated test from 1GHz to 18GHz

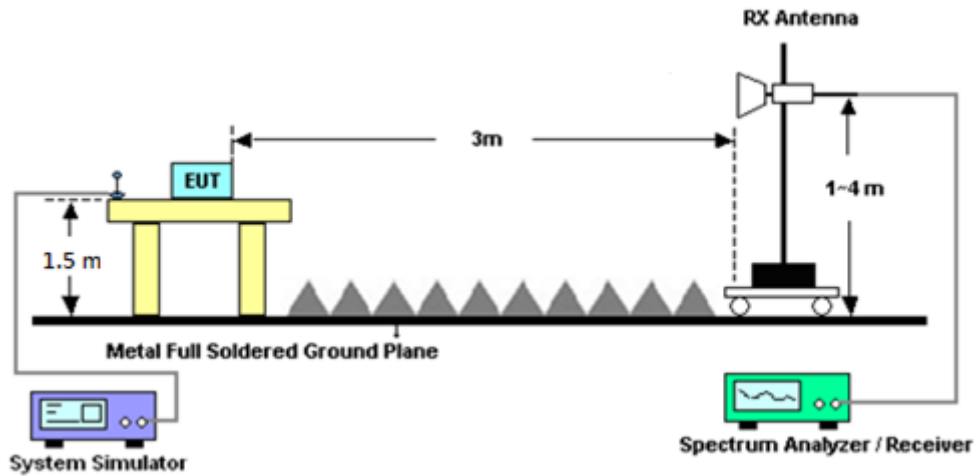

For radiated test above 18GHz

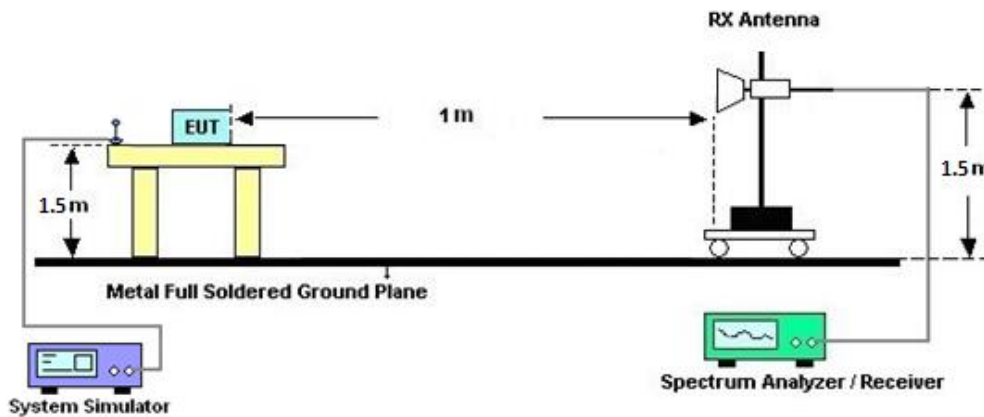

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.

**Note:**

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



## 4.4 Field Strength of Spurious Radiation Measurement

### 4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT is placed on a rotatable wooden table 0.8 meters for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz above the ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the antenna tower.
3. The table is rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1 MHz, VBW = 3 MHz, taking record of maximum spurious emission.
6. A horn antenna is substituted in place of the EUT and is driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Take the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10.  $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11.  $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
13. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)



## 5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 20, 2022	Jan. 01, 2023~ Jan. 18, 2023	Sep. 19, 2023	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	41912 & 05	30MHz~1GHz	Feb. 06, 2022	Jan. 01, 2023~ Jan. 18, 2023	Feb. 05, 2023	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	40103 & 07	30MHz~1GHz	Apr. 24, 2022	Jan. 01, 2023~ Jan. 18, 2023	Apr. 23, 2023	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 26, 2022	Jan. 01, 2023~ Jan. 18, 2023	Dec. 25, 2023	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1241	1GHz~18GHz	Jul. 25, 2022	Jan. 01, 2023~ Jan. 18, 2023	Jul. 24, 2023	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-02294	1GHz~18GHz	Jun. 23, 2022	Jan. 01, 2023~ Jan. 18, 2023	Jun. 22, 2023	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917057 6	18GHz~40GHz	May 14, 2022	Jan. 01, 2023~ Jan. 18, 2023	May 13, 2023	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	00993	18GHz~40GHz	Nov. 24, 2022	Jan. 01, 2023~ Jan. 18, 2023	Nov. 23, 2023	Radiation (03CH15-HY)
Preamplifier	E-INSTRUME NT TECH LTD.	ERA-100M-18 G-56-01-A70	EC1900269	1GHz~18GHz	Dec. 26, 2022	Jan. 01, 2023~ Jan. 18, 2023	Dec. 25, 2023	Radiation (03CH15-HY)
Preamplifier	EMEC	EM18G40G	060802	1GHz-18GHz	Mar. 08, 2022	Jan. 01, 2023~ Jan. 18, 2023	Mar. 07, 2023	Radiation (03CH15-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	20MHz~8.4GHz	Oct. 18, 2022	Jan. 01, 2023~ Jan. 18, 2023	Oct. 17, 2023	Radiation (03CH15-HY)
Spectrum Analyzer	Agilent	E4446A	MY50180136	3Hz~44GHz	May 11, 2022	Jan. 01, 2023~ Jan. 18, 2023	May 10, 2023	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jan. 01, 2023~ Jan. 18, 2023	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jan. 01, 2023~ Jan. 18, 2023	N/A	Radiation (03CH15-HY)
Software	Audix	E3 6.2009-8-24(k 5)	RK-000451	N/A	N/A	Jan. 01, 2023~ Jan. 18, 2023	N/A	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104, 102E	MY582185/4, MY9838/4PE ,519228/2	30MHz~18G	Jun. 21, 2022	Jan. 01, 2023~ Jan. 18, 2023	Jun. 20, 2023	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804 012/2	30MHz-40GHz	Jan. 04, 2022	Jan. 01, 2023~ Jan. 02, 2023	Jan. 03, 2023	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804 012/2	30MHz-40GHz	Jan. 03, 2023	Jan. 03, 2023~ Jan. 07, 2023	Jan. 02, 2024	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz~30MHz	Mar. 10, 2022	Jan. 01, 2023~ Jan. 18, 2023	Mar. 09, 2023	Radiation (03CH15-HY)
Radio Communicatio n Analyzer	Anritsu	MT8821C	6262025353	LTE FDD/TDD LTE-2CC DLCA/ULCA	Oct. 13, 2022	Dec. 16, 2022~ Dec. 23, 2022	Oct. 12, 2023	Conducted (TH03-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#B	1-18GHz	Jan. 07, 2022	Dec. 16, 2022~ Dec. 23, 2022	Jan. 06, 2023	Conducted (TH03-HY)



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.27 dB
---	---------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.72 dB
---	---------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.12 dB
---	---------





### Appendix A. Test Results of Conducted Test

#### Conducted Output Power(Average power) & ERP / EIRP

<Main Antenna>

WCDMA Band V Maximum Average Power [dBm] (GT - LC = -0.4 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
RMC 12.2K	23.19	23.20	23.18	20.65	0.1161
Limit	ERP < 7W			Result	Pass

WCDMA Band II Maximum Average Power [dBm] (GT - LC = 0.4 dB)					
Channel	9262	9400	9538	EIRP (dBm)	EIRP (W)
Frequency	1852.4	1880	1907.6		
RMC 12.2K	23.16	23.12	23.12	23.56	0.2270
Limit	EIRP < 2W			Result	Pass

WCDMA Band IV Maximum Average Power [dBm] (GT - LC = 1.6 dB)					
Channel	1312	1413	1513	EIRP (dBm)	EIRP (W)
Frequency	1712.4	1732.6	1752.6		
RMC 12.2K	23.30	23.19	23.29	24.90	0.3090
Limit	EIRP < 1W			Result	Pass



<MIMO2 Antenna>

WCDMA Band II Maximum Average Power [dBm] (GT - LC = -0.2 dB)					
Channel	9262	9400	9538	EIRP (dBm)	EIRP (W)
Frequency	1852.4	1880	1907.6		
RMC 12.2K	23.06	23.00	23.01	22.86	0.1932
Limit	EIRP < 2W			Result	Pass

WCDMA Band IV Maximum Average Power [dBm] (GT - LC = -0.2 dB)					
Channel	1312	1413	1513	EIRP (dBm)	EIRP (W)
Frequency	1712.4	1732.6	1752.6		
RMC 12.2K	23.07	23.03	23.06	22.87	0.1936
Limit	EIRP < 1W			Result	Pass



# Appendix B. Test Results of Radiated Test

<Main Antenna>

## WCDMA 850

WCDMA 850									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-56.37	-13	-43.37	-32.53	-61.67	1.83	9.28	H
	2472	-57.64	-13	-44.64	-37.98	-63.87	2.25	10.63	H
	3304	-65.45	-13	-52.45	-47.9	-73.01	2.63	12.33	H
									H
									H
									H
	1648	-61.94	-13	-48.94	-38.56	-67.24	1.83	9.28	V
	2472	-62.23	-13	-49.23	-42.8	-68.46	2.25	10.63	V
	3304	-65.59	-13	-52.59	-48.44	-73.15	2.63	12.33	V
									V
									V
									V
Middle	1672	-57.95	-13	-44.95	-34.27	-63.38	1.85	9.43	H
	2504	-63.91	-13	-50.91	-44.42	-70.30	2.26	10.80	H
	3344	-66.76	-13	-53.76	-49.06	-74.61	2.65	12.65	H
									H
									H
									H
	1672	-56.68	-13	-43.68	-33.47	-62.11	1.85	9.43	V
	2504	-62.61	-13	-49.61	-43.22	-69.00	2.26	10.80	V
	3344	-66.10	-13	-53.10	-48.78	-73.95	2.65	12.65	V
									V
									V
									V



Highest	1696	-59.32	-13	-46.32	-35.81	-64.89	1.86	9.58	H
	2544	-64.24	-13	-51.24	-44.64	-70.61	2.28	10.80	H
	3386	-66.30	-13	-53.30	-48.43	-74.11	2.67	12.63	H
									H
									H
									H
	1696	-58.71	-13	-45.71	-35.68	-64.28	1.86	9.58	V
	2544	-62.70	-13	-49.70	-43.28	-69.07	2.28	10.80	V
	3386	-66.36	-13	-53.36	-48.87	-74.17	2.67	12.63	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**WCDMA 1700**

WCDMA 1700									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3427	-54.68	-13	-41.68	-37.83	-64.60	2.68	12.60	H
	5135	-43.28	-13	-30.28	-31.06	-52.40	3.32	12.44	H
	6849	-60.46	-13	-47.46	-53.43	-69.00	3.86	12.40	H
									H
									H
									H
	3427	-55.27	-13	-42.27	-38.79	-65.19	2.68	12.60	V
	5135	-46.80	-13	-33.80	-35.16	-55.92	3.32	12.44	V
	6849	-59.69	-13	-46.69	-53.01	-68.23	3.86	12.40	V
									V
									V
									V
Middle	3469	-45.71	-13	-32.71	-29.18	-55.53	2.71	12.52	H
	5191	-47.32	-13	-34.32	-35.35	-56.73	3.34	12.75	H
	6930	-59.21	-13	-46.21	-52.35	-67.32	3.89	12.00	H
									H
									H
									H
	3469	-47.86	-13	-34.86	-31.7	-57.68	2.71	12.52	V
	5191	-45.92	-13	-32.92	-34.44	-55.33	3.34	12.75	V
	6930	-59.01	-13	-46.01	-52.24	-67.12	3.89	12.00	V
									V
									V
									V



Highest	3504	-41.44	-13	-28.44	-25.17	-51.10	2.72	12.38	H
	5254	-49.66	-13	-36.66	-37.76	-59.51	3.36	13.22	H
	7010	-58.75	-13	-45.75	-52.05	-66.68	3.91	11.84	H
									H
									H
									H
	3504	-43.96	-13	-30.96	-28.06	-53.62	2.72	12.38	V
	5254	-48.62	-13	-35.62	-37.12	-58.47	3.36	13.22	V
	7010	-58.93	-13	-45.93	-52.12	-66.86	3.91	11.84	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**WCDMA 1900**

WCDMA 1900									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3700	-52.81	-13	-39.81	-37.09	-62.44	2.77	12.40	H
	5555	-50.40	-13	-37.40	-39.07	-60.33	3.46	13.39	H
	7409	-58.79	-13	-45.79	-52.58	-65.97	3.98	11.16	H
									H
									H
									H
	3700	-51.61	-13	-38.61	-36.3	-61.24	2.77	12.40	V
	5555	-49.35	-13	-36.35	-38.1	-59.28	3.46	13.39	V
	7409	-58.08	-13	-45.08	-52.33	-65.26	3.98	11.16	V
									V
									V
									V
Middle	3756	-57.26	-13	-44.26	-43.94	-66.97	2.78	12.49	H
	5639	-48.34	-13	-35.34	-37.16	-58.31	3.48	13.46	H
	7520	-59.62	-13	-46.62	-53.3	-66.81	4.01	11.20	H
									H
									H
									H
	3756	-55.57	-13	-42.57	-42.65	-65.28	2.78	12.49	V
	5639	-49.40	-13	-36.40	-38.44	-59.37	3.48	13.46	V
	7520	-58.83	-13	-45.83	-52.9	-66.02	4.01	11.20	V
									V
									V
									V



Highest	3812	-60.32	-13	-47.32	-44.87	-69.90	2.79	12.38	H
	5723	-57.38	-13	-44.38	-46.86	-67.28	3.50	13.40	H
	7630	-60.03	-13	-47.03	-53.36	-67.44	4.05	11.46	H
									H
									H
									H
	3812	-60.97	-13	-47.97	-45.91	-70.55	2.79	12.38	V
	5723	-52.11	-13	-39.11	-41.82	-62.01	3.50	13.40	V
	7630	-59.28	-13	-46.28	-53.15	-66.69	4.05	11.46	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.





<MIMO2 Antenna>

**WCDMA 1700**

WCDMA 1700									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3427	-52.18	-13	-39.18	-35.33	-62.10	2.68	12.60	H
	5142	-61.61	-13	-48.61	-49.42	-70.76	3.32	12.47	H
	6849	-60.39	-13	-47.39	-53.36	-68.93	3.86	12.40	H
									H
									H
									H
	3427	-48.48	-13	-35.48	-32	-58.40	2.68	12.60	V
	5142	-60.47	-13	-47.47	-48.81	-69.62	3.32	12.47	V
	6849	-60.19	-13	-47.19	-53.51	-68.73	3.86	12.40	V
									V
									V
									V
Middle	3469	-52.16	-13	-39.16	-35.63	-61.98	2.71	12.52	H
	5197	-62.40	-13	-49.40	-50.45	-71.84	3.34	12.78	H
	6930	-58.70	-13	-45.70	-51.84	-66.81	3.89	12.00	H
									H
									H
									H
	3469	-49.38	-13	-36.38	-33.22	-59.20	2.71	12.52	V
	5197	-61.77	-13	-48.77	-50.31	-71.21	3.34	12.78	V
	6930	-59.05	-13	-46.05	-52.28	-67.16	3.89	12.00	V
									V
									V
									V



Highest	3504	-51.48	-13	-38.48	-35.21	-61.14	2.72	12.38	H
	5257	-62.74	-13	-49.74	-50.84	-72.61	3.36	13.23	H
	7010	-58.74	-13	-45.74	-52.04	-66.67	3.91	11.84	H
									H
									H
									H
	3504	-49.42	-13	-36.42	-33.52	-59.08	2.72	12.38	V
	5257	-62.29	-13	-49.29	-50.79	-72.16	3.36	13.23	V
	7010	-58.84	-13	-45.84	-52.03	-66.77	3.91	11.84	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA 1900

WCDMA 1900									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3700	-54.52	-13	-41.52	-38.8	-64.15	2.77	12.40	H
	5555	-55.56	-13	-42.56	-44.23	-65.49	3.46	13.39	H
	7409	-58.24	-13	-45.24	-52.03	-65.42	3.98	11.16	H
									H
									H
									H
	3700	-51.53	-13	-38.53	-36.22	-61.16	2.77	12.40	V
	5555	-55.82	-13	-42.82	-44.57	-65.75	3.46	13.39	V
	7409	-57.91	-13	-44.91	-52.16	-65.09	3.98	11.16	V
									V
									V
									V
Middle	3756	-52.15	-13	-39.15	-36.58	-61.86	2.78	12.49	H
	5639	-57.28	-13	-44.28	-446.1	-67.25	3.48	13.46	H
	7520	-59.40	-13	-46.40	-53.08	-66.59	4.01	11.20	H
									H
									H
									H
	3756	-48.81	-13	-35.81	-33.65	-58.52	2.78	12.49	V
	5639	-52.98	-13	-39.98	-42.02	-62.95	3.48	13.46	V
	7520	-58.98	-13	-45.98	-53.05	-66.17	4.01	11.20	V
									V
									V
									V



Highest	3812	-48.84	-13	-35.84	-33.39	-58.42	2.79	12.38	H
	5716	-59.64	-13	-46.64	-49.06	-69.54	3.50	13.40	H
	7630	-59.65	-13	-46.65	-52.98	-67.06	4.05	11.46	H
									H
									H
									H
	3812	-47.95	-13	-34.95	-352.89	-57.53	2.79	12.38	V
	5716	-58.21	-13	-45.21	-47.92	-68.11	3.50	13.40	V
	7630	-59.40	-13	-46.40	-53.27	-66.81	4.05	11.46	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.