

## RF MEASUREMENT REPORT

---

**FCC ID:** XMR2022EM120KGL  
**Application:** Quectel Wireless Solutions Company Limited  
**Product:** LTE-A Cat 12 M.2 Module  
**Model No.:** EM120K-GL  
**Brand Name:** Quectel  
**FCC Rule Part(s):** Part 90 Subpart S  
**Result:** Complies  
**Test Date:** 2022-03-22 ~ 2022-05-12

**Reviewed By:**

\_\_\_\_\_  
Sunny Sun

**Approved By:**

\_\_\_\_\_  
Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

### Revision History

Report No.	Version	Description	Issue Date	Note
2203RSU046-U4	Rev. 01	Initial Report	2022-05-28	Valid

---

## CONTENTS

Description	Page
<b>1. General Information.....</b>	<b>5</b>
1.1. Applicant .....	5
1.2. Manufacturer .....	5
1.3. Testing Facility .....	5
1.4. Product Information.....	6
1.5. Product Specification under Test .....	6
1.6. Description of Available Antennas.....	7
1.7. Test Methodology .....	7
1.8. Configuration of Tested System .....	8
1.9. Test Environment Condition .....	8
<b>2. Test Equipment Calibration Date.....</b>	<b>9</b>
<b>3. Measurement Uncertainty .....</b>	<b>11</b>
<b>4. Test Result .....</b>	<b>12</b>
4.1. Summary.....	12
4.2. Occupied Bandwidth Measurement.....	13
4.2.1. Test Limit .....	13
4.2.2. Test Procedure .....	13
4.2.3. Test Setting .....	13
4.2.4. Test Setup .....	13
4.2.5. Test Result .....	13
4.3. Frequency Stability Measurement .....	14
4.3.1. Test Limit .....	14
4.3.2. Test Procedure .....	14
4.3.3. Test Setting .....	14
4.3.4. Test Setup .....	15
4.3.5. Test Result .....	15
4.4. Conducted Output Power Measurement .....	16
4.4.1. Test Limit .....	16
4.4.2. Test Procedure .....	16
4.4.3. Test Setting .....	16
4.4.4. Test Setup .....	16
4.4.5. Test Result .....	16
4.5. Band Edge Measurement .....	17
4.5.1. Test Limit .....	17
4.5.2. Test Procedure .....	17

---

4.5.3.	Test Setting .....	17
4.5.4.	Test Setup .....	18
4.5.5.	Test Result .....	18
4.6.	Conducted Spurious Emissions Measurement.....	19
4.6.1.	Test Limit .....	19
4.6.2.	Test Procedure .....	19
4.6.3.	Test Setting .....	19
4.6.4.	Test Setup .....	20
4.6.5.	Test Result .....	20
4.7.	Radiated Spurious Emissions Measurement.....	21
4.7.1.	Test Limit .....	21
4.7.2.	Test Procedure .....	21
4.7.3.	Test Setting .....	21
4.7.4.	Test Setup .....	22
4.7.5.	Test Result .....	22
<b>Appendix A - Test Result .....</b>		<b>23</b>
A.1	Occupied Bandwidth Test Result.....	23
A.2	Frequency Stability Test Result .....	27
A.3	Conducted Output Power Test Result .....	28
A.4	Band Edge Test Result .....	34
A.5	Conducted Spurious Emissions Test Result .....	38
A.6	Radiated Spurious Emissions Test Result .....	42
<b>Appendix B - Test Setup Photograph .....</b>		<b>43</b>
<b>Appendix C - EUT Photograph .....</b>		<b>44</b>



#### 1.4. Product Information

Product Name	LTE-A Cat 12 M.2 Module
Model No.	EM120K-GL
Brand Name	Quectel
IMEI	861293060003570
UTRA Specification	Band 2, 4, 5
E-UTRA Specification	FDD Band: 2, 4, 5, 7, 12, 13, 14, 17, 25, 26, 30, 66, 71 TDD Band: 38, 41, 46
GNSS Specification	GPS, GLONASS, Bei Dou, Galileo
Supply Voltage	3.135 ~ 4.4Vdc, typical 3.7Vdc
Operating Temperature:	-25 ~ 75 °C
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

#### 1.5. Product Specification under Test

E-UTRA Specification	
Single Band	FDD Band: 26
Modulation	UL up to 64QAM, DL up to 256QAM
FDD Tx Frequency Range	Band 26: 814 ~ 824 MHz
FDD Rx Frequency Range	Band 26: 859 ~ 869 MHz

Note: LTE band 26 transmit frequency for part 90 rule is 814 ~ 824MHz and part 22 rule is 824 ~ 849MHz. ERP over 15MHz bandwidth complies the ERP limit line of part 22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies.

### 1.6. Description of Available Antennas

Technology	Frequency Range (MHz)	Antenna Type	Max Peak Gain (dBi)
LTE Band 2	1850 ~ 1910	Dipole	0.25
LTE Band 4	1710 ~ 1755		1.47
LTE Band 5	824 ~ 849		2.68
LTE Band 7	2500 ~ 2570		0.55
LTE Band 12	699 ~ 716		-0.20
LTE Band 13	777 ~ 787		1.54
LTE Band 14	788 ~ 798		2.42
LTE Band 17	704 ~ 716		-0.20
LTE Band 25	1850 ~ 1915		0.25
LTE Band 26	814 ~ 849		2.87
LTE Band 30	2305 ~ 2315		-3.06
LTE Band 38	2570 ~ 2620		-0.23
LTE Band 41	2496 ~ 2690		0.78
LTE Band 66	1710 ~ 1780		1.47
LTE Band 71	663 ~ 698		1.22


Note: The typical antennas use to calculate the ERP (EIRP).

### 1.7. Test Methodology

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC CFR 47 Part 90
- ANSI C63.26:2015
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 971168 D02 v02r01: Misc Rev Approv License Devices
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP

### 1.8. Configuration of Tested System

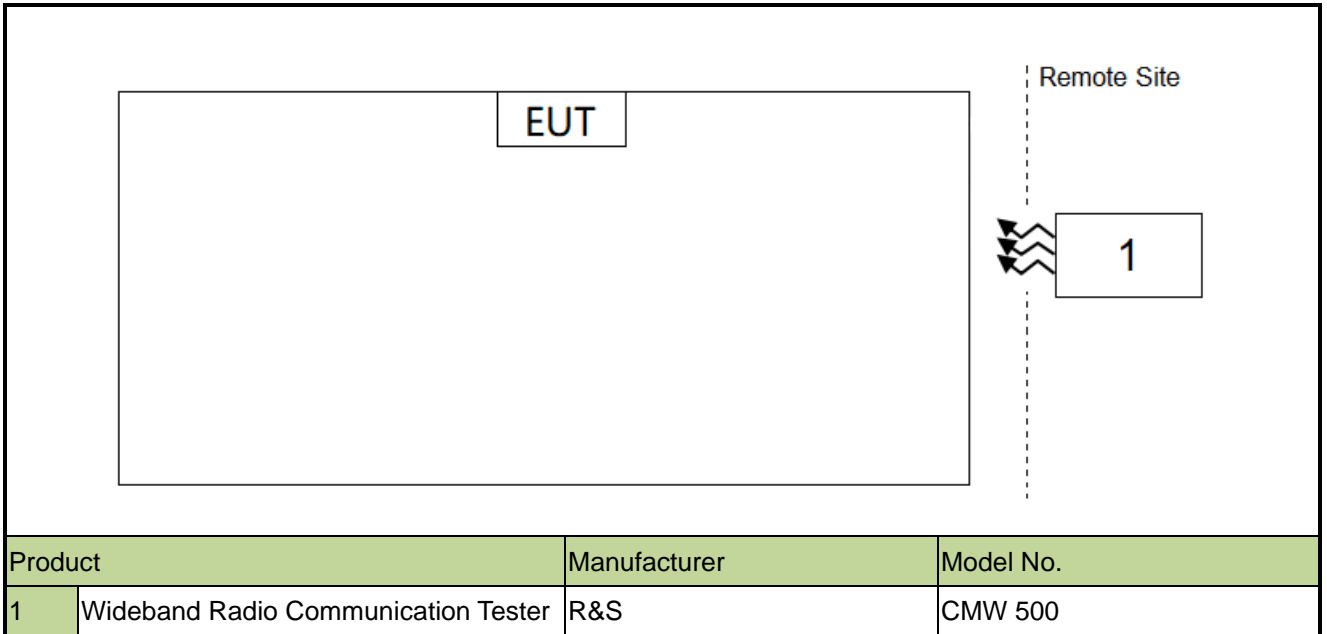

### 1.9. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20% ~ 75%RH



## 2. Test Equipment Calibration Date

Instrument	Manufacturer	Model No.	Asset No.	Last Cali. Date	Cali. Due Date	Test Site
Communication Tester	R&S	CMU 200	MRTSUE06009	1 year	2022/9/7	SIP-SR1
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2022/10/10	WZ-TR3
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2022/12/29	SIP-AC1
Vibration Test System	DongLing	ES-1-150	MRTSUE06206	1 year	2022/8/8	WZ-TR3
Communication Tester	R&S	CMW500	MRTSUE06243	1 year	2022/10/10	SIP-SR1
Thermohygrometer	testo	608-H1	MRTSUE06362	1 year	2023/2/15	WZ-SR6
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2022/6/28	WZ-TR3
Shielding Room	HUAMING	WZ-SR6	MRTSUE06443	/	/	WZ-SR6
Signal Generator	Keysight	E8257D	MRTSUE06453	1 year	2022/6/24	SIP-SR1
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2022/12/23	SIP-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2022/6/24	SIP-AC1
Signal Analyzer	Keysight	N9020B	MRTSUE06583	1 year	2022/10/10	WZ-SR6
Preamplifier	EMCI	EMC051845SE	MRTSUE06600	1 year	2022/11/8	SIP-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06603	1 year	2022/10/31	SIP-AC1
Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2022/9/7	SIP-AC1
Signal Generator	Keysight	N5173B	MRTSUE06606	1 year	2022/11/29	WZ-SR6
Horn Antenna	R&S	HF907	MRTSUE06610	1 year	2022/8/5	SIP-AC1
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2022/6/24	SIP-AC1
Thermohygrometer	testo	608-H1	MRTSUE06616	1 year	2022/11/2	SIP-AC1
Thermohygrometer	testo	608-H1	MRTSUE06620	1 year	2022/11/28	SIP-AC1
Thermohygrometer	testo	622	MRTSUE06629	1 year	2023/1/6	SIP-SR1
Preamplifier	EMCI	EMC001330	MRTSUE06643	1 year	2023/1/13	SIP-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06645	1 year	2022/8/26	SIP-AC1
5G Wireless Test Platform	Keysight	E7515B	MRTSUE06903	1 year	2022/11/23	SIP-SR1
Signal Generator	Keysight	E8257D	MRTSUE06904	1 year	2022/11/23	SIP-SR1
DC POWER MODULE	Keysight	N6743B	MRTSUE06905	/	/	SIP-SR1
DC POWER MODULE	Keysight	N6743B	MRTSUE06906	/	/	SIP-SR1
Low-Profile Modular Power System Mainframe	Keysight	N6700C	MRTSUE06907	/	/	SIP-SR1
FR1 Switching Unit	Keysight	C8880A	MRTSUE06908	/	/	SIP-SR1
Signal Analyzer	Keysight	N9021B	MRTSUE06915	1 year	2022/12/29	SIP-SR1
Temperature Chamber	BAOYT	BYG-80CL	MRTSUE06932	1 year	2023/2/27	SIP-SR1
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2023/3/14	SIP-AC1
5G Wireless Test Platform	Keysight	E7515B	MRTSUE06942	1 year	2023/3/3	WZ-SR6
Shielding Room	MIX-BEP	SIP-SR1	MRTSUE06948	/	/	SIP-SR1

Millimeter-Wave Transceiver for 5G	Keysight	M1740A	MRTSUE06954	1 year	2022/6/2	SIP-SR1
Millimeter-Wave Transceiver for 5G	Keysight	M1740A	MRTSUE06955	1 year	2022/6/2	SIP-SR1
5G Wireless Test Platform	Keysight	E7515B	MRTSUE06956	1 year	2022/6/10	SIP-SR1
Common Interface Unit	Keysight	E7770A	MRTSUE06957	/	/	SIP-SR1
USB Power Sensor	Keysight	U8488A	MRTSUE06958	1 year	2022/7/8	SIP-SR1
Radio Communication Analyzer	Anritsu	MT8821C	MRTSUE06960	1 year	2022/7/1	WZ-SR6
Radio Communication Test Station	Anritsu	MT8000A	MRTSUE06961	1 year	2022/7/1	WZ-SR6
Signal Analyzer	Keysight	N9010B	MRTSUE07028	1 year	2022/12/9	SIP-SR1

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software

### 3. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

Radiated Spurious Emissions
Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): Horizontal: 9kHz ~ 300MHz: 5.04dB 300MHz ~ 1GHz: 4.95dB 1GHz ~ 40GHz: 6.40dB Vertical: 9kHz ~ 300MHz: 5.24dB 300MHz ~ 1GHz: 6.03dB 1GHz ~ 40GHz: 6.40dB
Conducted Spurious Emissions
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.13dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.28%
Frequency Stability
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 76.2Hz

## 4. Test Result

### 4.1. Summary

FCC Part Section(s)	Test Description	Test Condition	Verdict
2.1049	Occupied Bandwidth	Conducted	Pass
2.1055, 90.213	Frequency Stability		Pass
90.635	Conducted Output Power		Pass
2.1051, 90.691(a)	Band Edge		Pass
2.1051, 90.691(a)	Spurious Emission		Pass
2.1053, 90.691(a)	Spurious Emissions	Radiated	Pass

#### Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All supported modulation types were evaluated. The worst-case emission of modulation was selected. Therefore, the Frequency Stability, Channel Band Edge, Radiated & Conducted Spurious Emission were presented worst-case in the test report.

## 4.2. Occupied Bandwidth Measurement

### 4.2.1. Test Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


### 4.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.4

### 4.2.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

### 4.2.4. Test Setup

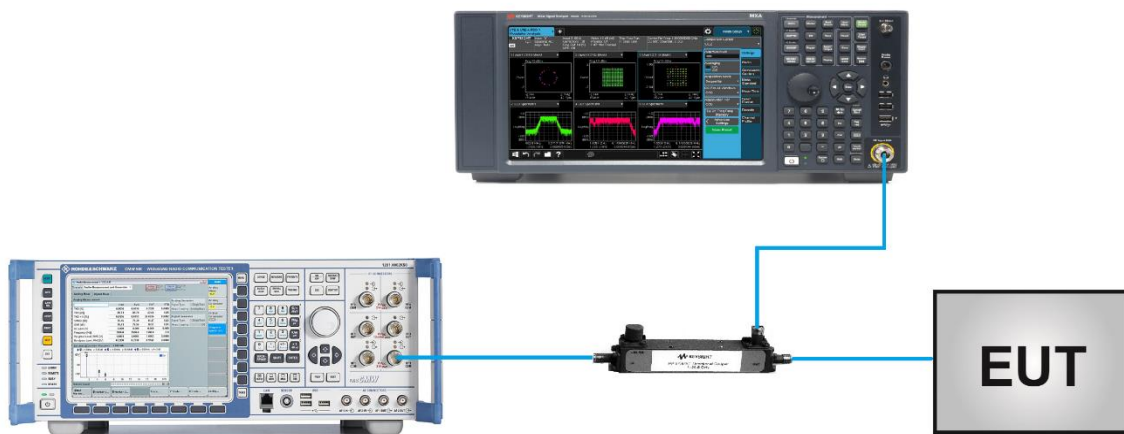

### 4.2.5. Test Result

Refer to Appendix A.1.

### **4.3. Frequency Stability Measurement**

#### **4.3.1. Test Limit**

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

#### **4.3.2. Test Procedure**

ANSI C63.26-2015 - Section 5.6

#### **4.3.3. Test Setting**

##### **Frequency Stability Under Temperature Variations:**


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

##### **Frequency Stability Under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

#### 4.3.4. Test Setup

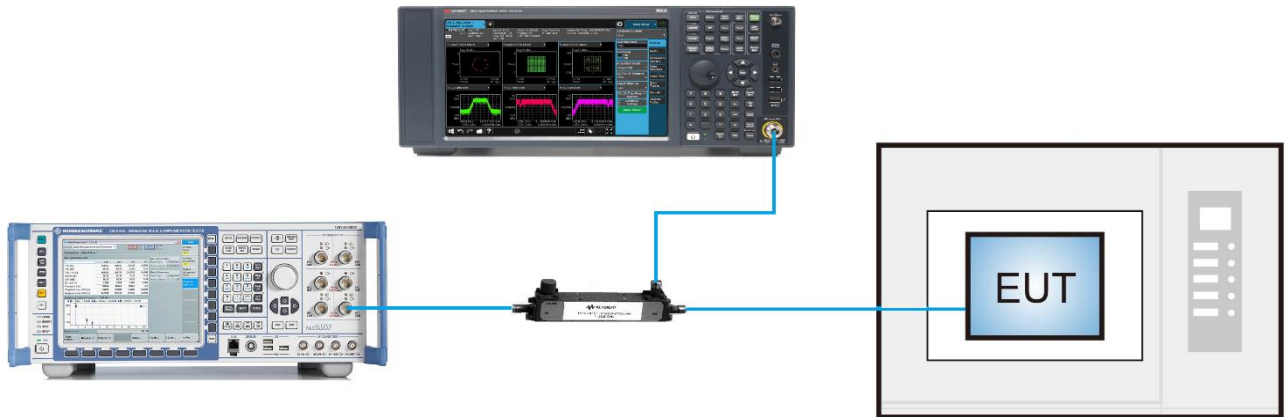

#### 4.3.5. Test Result

Refer to Appendix A.2.

#### 4.4. Conducted Output Power Measurement

##### 4.4.1. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts (20dBw).


##### 4.4.2. Test Procedure

ANSI C63.26-2015 - Section 5.2

##### 4.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

##### 4.4.4. Test Setup

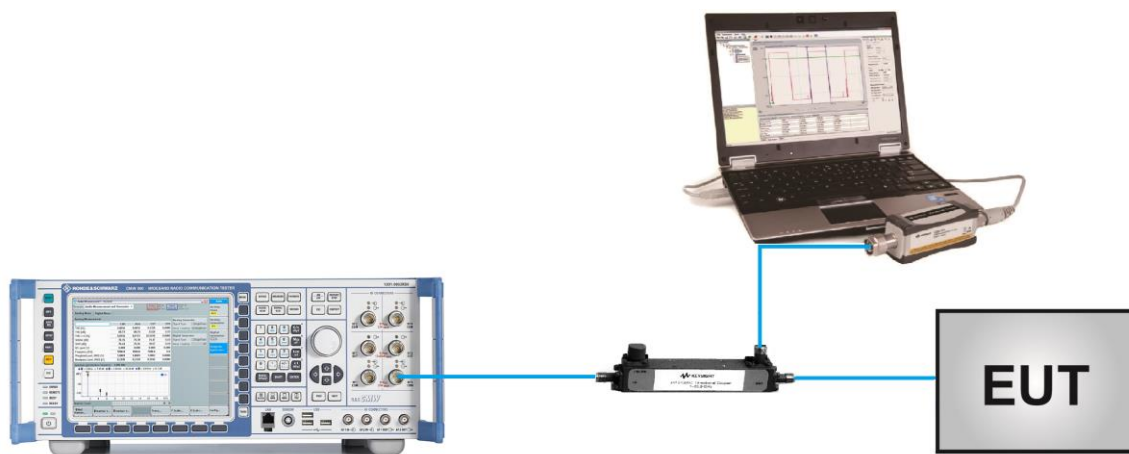

##### 4.4.5. Test Result

Refer to Appendix A.3.



## 4.5. Band Edge Measurement

### 4.5.1. Test Limit

Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \text{ Log}(f/6.1)$  decibels or  $50 + 10 \text{ Log}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10\text{Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

### 4.5.2. Test Procedure


ANSI C63.26-2015 - Section 5.7

### 4.5.3. Test Setting

1. Set the analyzer frequency to low or high channel
2.  $\text{RBW} \geq$  The nominal RBW shall be in the range of 1% of the anticipated OBW (in the 1MHz band immediately outside and adjacent to the band edge). For improvement of the accuracy in the measurement of the average power of a noise-like emission, a RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW), provided that a subsequent integration is performed over the full required measurement bandwidth. This integration should be performed using the spectrum analyzer's band power functions.
3.  $\text{VBW} \geq 3 \cdot \text{RBW}$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to “free run.”
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to

increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

#### 4.5.4. Test Setup

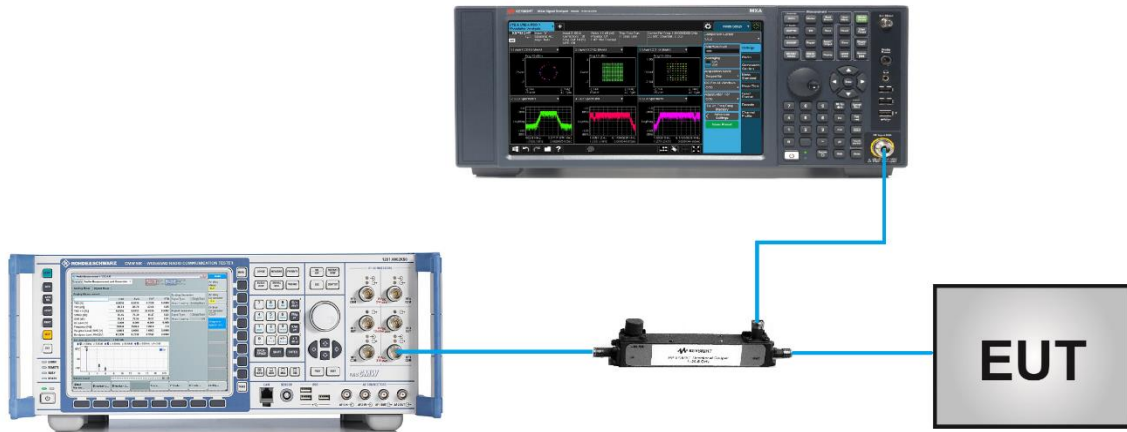

#### 4.5.5. Test Result

Refer to Appendix A.4.

## **4.6. Conducted Spurious Emissions Measurement**

### **4.6.1. Test Limit**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated, and the worst-case configuration results are reported in this section.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10\text{Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

### **4.6.2. Test Procedure**

ANSI C63.26-2015 - Section 5.7

### **4.6.3. Test Setting**

1. Set the analyzer frequency to low, mid, high channel.
2. RBW = 1MHz
3. VBW  $\geq 3 \cdot$ RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

#### 4.6.4. Test Setup



#### 4.6.5. Test Result

Refer to Appendix A.5.

## **4.7. Radiated Spurious Emissions Measurement**

### **4.7.1. Test Limit**

Out of band emissions: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to -13dBm.

$E$  (dB $\mu$ V/m) = EIRP (dBm) - 20 log D + 104.8; where D is the measurement distance in meters. The emission limit equal to 82.3dB $\mu$ V/m.

### **4.7.2. Test Procedure**


ANSI C63.26-2015 - Section 5.2.7 & 5.5

### **4.7.3. Test Setting**


1. RBW = 1MHz
2. VBW  $\geq$  3\*RBW
3. Sweep time  $\geq$  10  $\times$  (number of points in sweep)  $\times$  (transmission symbol period)
4. Detector = Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize

#### 4.7.4. Test Setup

Below 1GHz Test Setup:

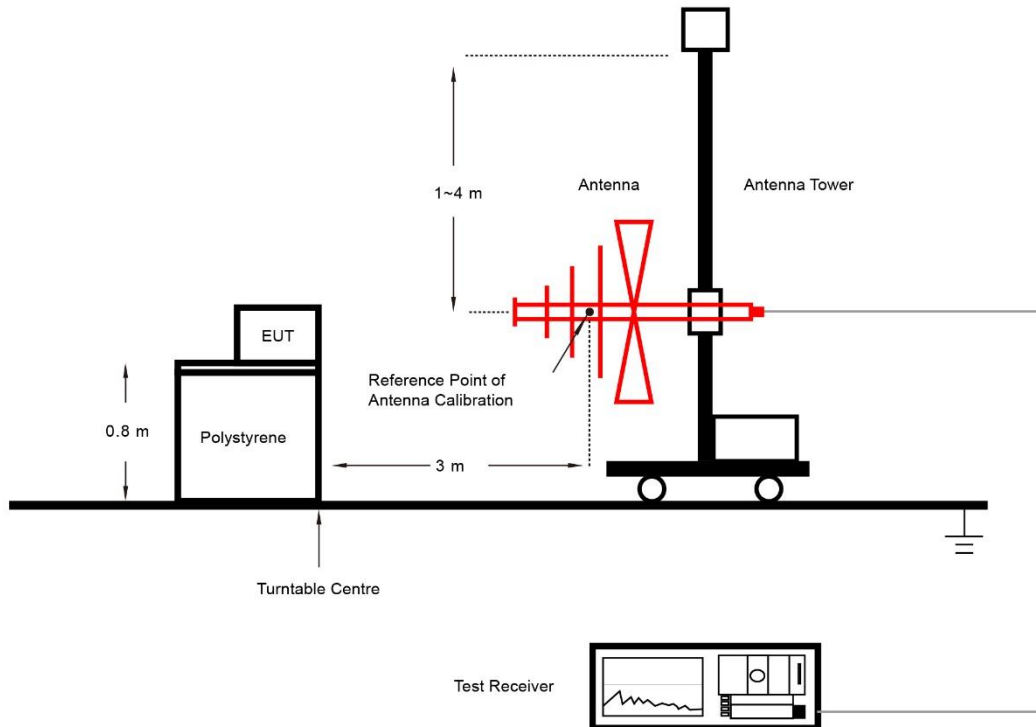

Above 1GHz Test Setup:

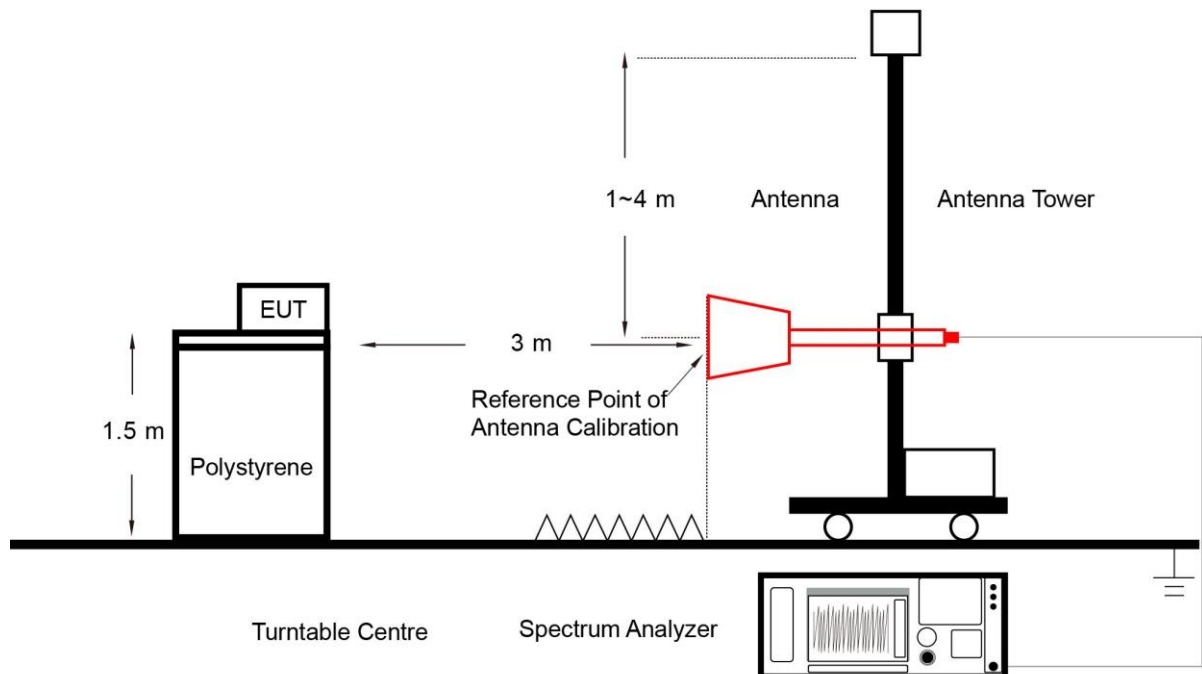

#### 4.7.5. Test Result

Refer to Appendix A.6.


**Appendix A - Test Result**
**A.1 Occupied Bandwidth Test Result**

Test Site	WZ-SR6	Test Engineer	Caitlin Chen
Test Date	2022/04/02	Test Band	LTE Band 26


Modulation	Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK	819.0	1.4	1.08
		3	2.68
		5	4.47
		10	8.92
16QAM	819.0	1.4	1.08
		3	2.68
		5	4.47
		10	8.90
64QAM	819.0	1.4	1.08
		3	2.68
		5	4.48
		10	8.92
QPSK	821.5	15	13.40
16QAM			13.38
64QAM			13.37

99% Bandwidth - QPSK

1.4MHz Channel Bandwidth

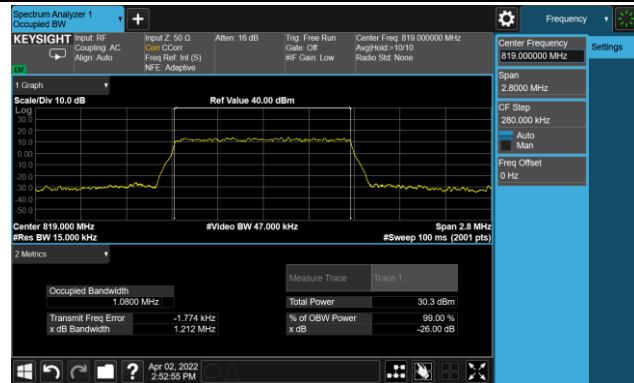


3MHz Channel Bandwidth

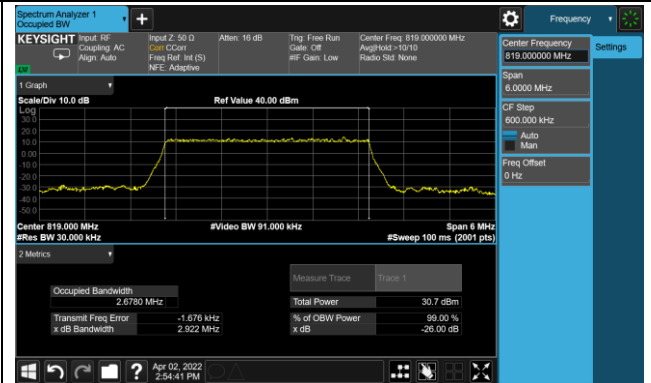


5MHz Channel Bandwidth



10MHz Channel Bandwidth

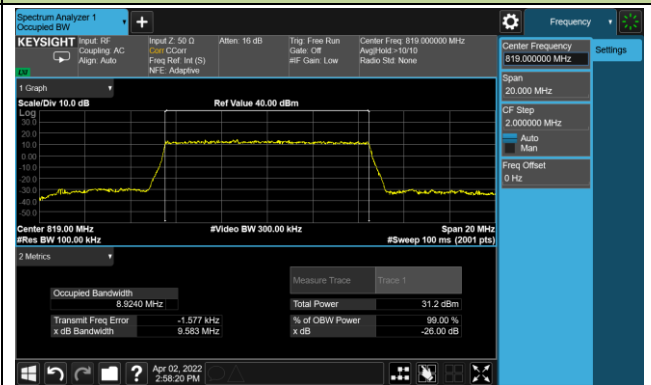


15MHz Channel Bandwidth

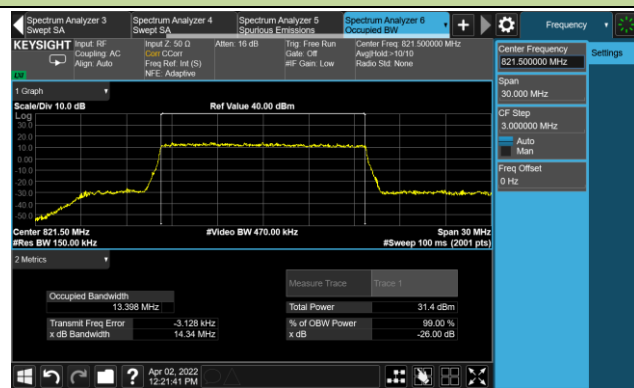




## 99% Bandwidth - 16QAM


## 1.4MHz Channel Bandwidth

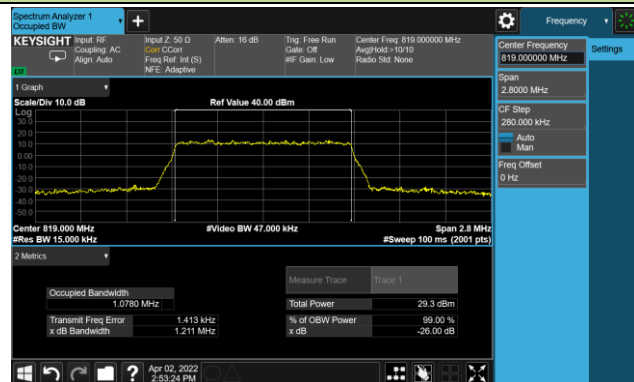


## 3MHz Channel Bandwidth

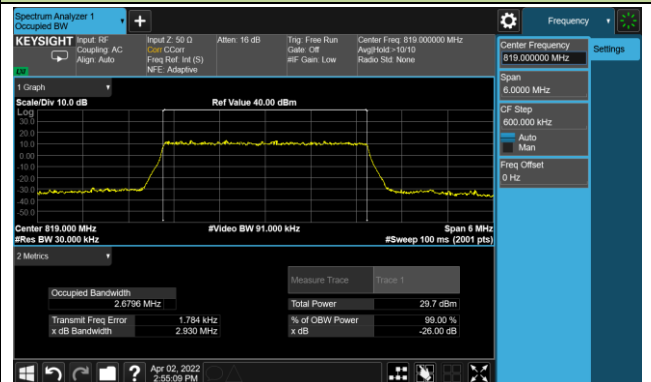


## 5MHz Channel Bandwidth

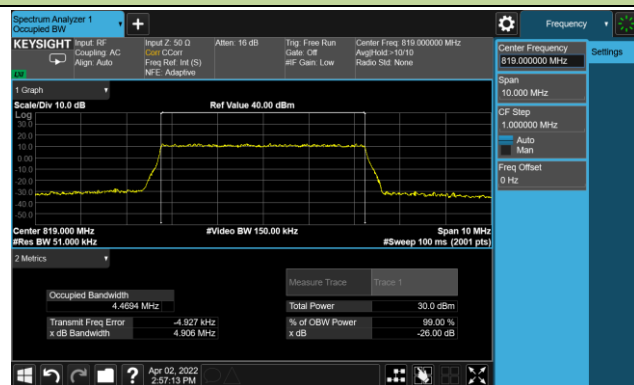

## 10MHz Channel Bandwidth

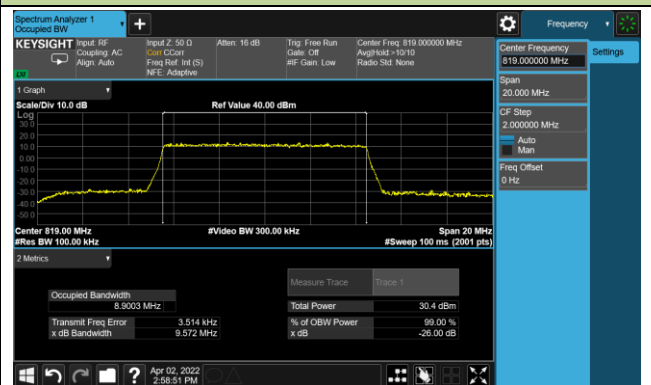


## 15MHz Channel Bandwidth

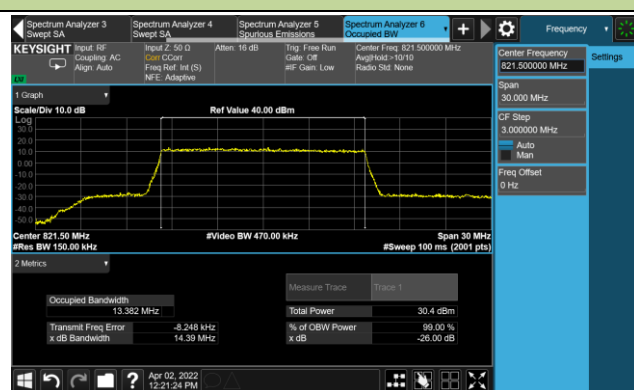


99% Bandwidth - 64QAM


1.4MHz Channel Bandwidth

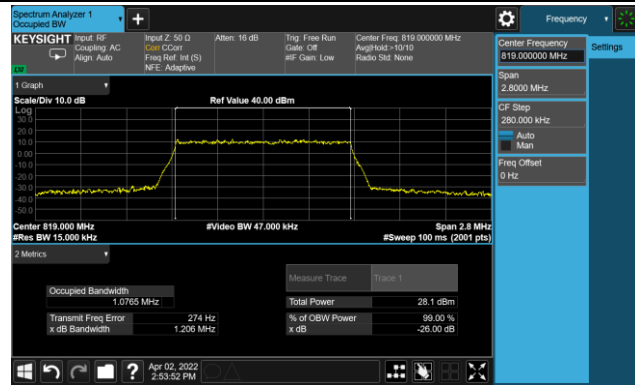


3MHz Channel Bandwidth

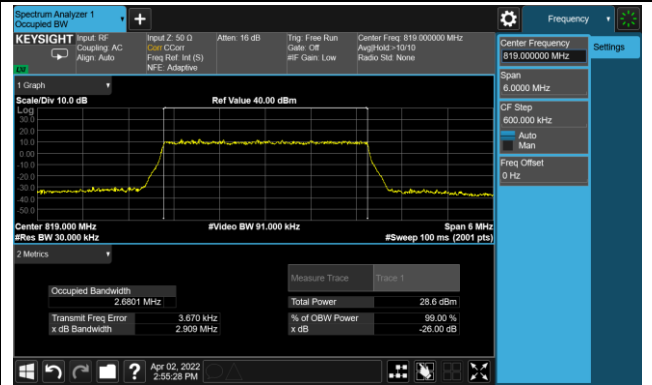


5MHz Channel Bandwidth

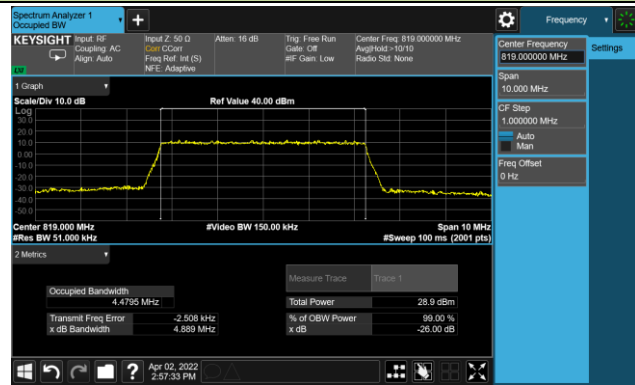

10MHz Channel Bandwidth

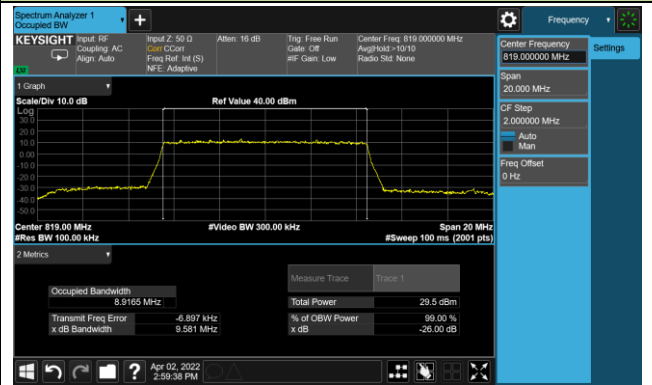

15MHz Channel Bandwidth

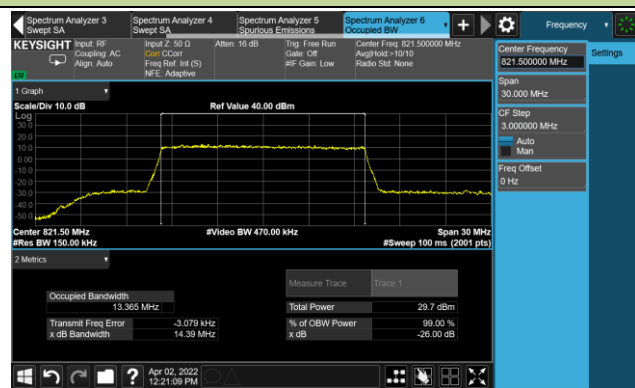

**A.2 Frequency Stability Test Result**

Test Site	WZ-TR3	Test Engineer	Caitlin Chen
Test Date	2022/04/11~2022/04/13	Test Band	LTE Band 26

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.7	- 30	-0.0086
	- 20	-0.0018
	- 10	-0.0058
	0	0.0012
	+ 10	-0.0029
	+ 20	-0.0047
	+ 30	-0.0046
	+ 40	-0.0047
	+ 50	-0.0016
4.4	+ 20	-0.0056
3.135	+ 20	-0.0028

**A.3 Conducted Output Power Test Result**

Test Site	WZ-SR6	Test Engineer	Caitlin Chen
Test Date	2022/03/21	Test Band	LTE Band 26

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
<b>QPSK</b>						
814.7	1.4	1	0	23.01	0.2000	< 100
819.0				22.98	0.1986	< 100
823.3				22.89	0.1945	< 100
814.7	1.4	1	2	23.09	0.2037	< 100
819.0				22.98	0.1986	< 100
823.3				23.01	0.2000	< 100
814.7	1.4	1	6	22.95	0.1972	< 100
819.0				22.91	0.1954	< 100
823.3				22.98	0.1986	< 100
814.7	1.4	6	0	22.13	0.1633	< 100
819.0				22.07	0.1611	< 100
823.3				22.03	0.1596	< 100
815.5	3	1	0	23.06	0.2023	< 100
819.0				23.05	0.2018	< 100
822.5				23.02	0.2004	< 100
815.5	3	1	7	23.15	0.2065	< 100
819.0				23.09	0.2037	< 100
822.5				23.07	0.2028	< 100
815.5	3	1	14	22.98	0.1986	< 100
819.0				22.99	0.1991	< 100
822.5				23.01	0.2000	< 100
815.5	3	15	0	22.25	0.1679	< 100
819.0				22.16	0.1644	< 100
822.5				22.22	0.1667	< 100

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
QPSK						
816.5	5	1	0	23.08	0.2032	< 100
819.0				23.05	0.2018	< 100
821.5				23.00	0.1995	< 100
816.5	5	1	12	23.02	0.2004	< 100
819.0				23.07	0.2028	< 100
821.5				22.98	0.1986	< 100
816.5	5	1	24	23.06	0.2023	< 100
819.0				23.00	0.1995	< 100
821.5				23.10	0.2042	< 100
816.5	5	25	0	22.19	0.1656	< 100
819.0				22.16	0.1644	< 100
821.5				22.22	0.1667	< 100
819.0	10	1	0	23.07	0.2028	< 100
		1	24	23.04	0.2014	< 100
		1	49	23.03	0.2009	< 100
		50	0	22.22	0.1667	< 100
821.5	15	1	0	23.17	0.2075	< 100
		1	36	23.02	0.2004	< 100
		1	74	22.99	0.1991	< 100
		75	0	22.22	0.1667	< 100

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
16QAM						
814.7	1.4	1	0	22.18	0.1652	< 100
819.0				22.06	0.1607	< 100
823.3				22.21	0.1663	< 100
814.7	1.4	1	2	22.27	0.1687	< 100
819.0				22.11	0.1626	< 100
823.3				22.10	0.1622	< 100
814.7	1.4	1	6	22.12	0.1629	< 100
819.0				22.09	0.1618	< 100
823.3				22.13	0.1633	< 100
814.7	1.4	6	0	21.09	0.1285	< 100
819.0				21.03	0.1268	< 100
823.3				21.04	0.1271	< 100
815.5	3	1	0	22.35	0.1718	< 100
819.0				22.30	0.1698	< 100
822.5				22.30	0.1698	< 100
815.5	3	1	7	22.49	0.1774	< 100
819.0				22.35	0.1718	< 100
822.5				22.42	0.1746	< 100
815.5	3	1	14	22.31	0.1702	< 100
819.0				22.26	0.1683	< 100
822.5				22.44	0.1754	< 100
815.5	3	15	0	21.19	0.1315	< 100
819.0				21.11	0.1291	< 100
822.5				21.25	0.1334	< 100

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
16QAM						
816.5	5	1	0	22.46	0.1762	< 100
819.0				22.17	0.1648	< 100
821.5				22.30	0.1698	< 100
816.5	5	1	12	22.39	0.1734	< 100
819.0				22.19	0.1656	< 100
821.5				22.40	0.1738	< 100
816.5	5	1	24	22.24	0.1675	< 100
819.0				22.23	0.1671	< 100
821.5				22.36	0.1722	< 100
816.5	5	25	0	21.10	0.1288	< 100
819.0				21.07	0.1279	< 100
821.5				21.25	0.1334	< 100
819.0	10	1	0	22.25	0.1679	< 100
		1	24	22.20	0.1660	< 100
		1	49	22.21	0.1663	< 100
		50	0	21.21	0.1321	< 100
821.5	15	1	0	22.36	0.1722	< 100
		1	36	22.27	0.1687	< 100
		1	74	22.41	0.1742	< 100
		75	0	21.25	0.1334	< 100

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
64QAM						
814.7	1.4	1	0	21.23	0.1327	< 100
819.0				21.21	0.1321	< 100
823.3				21.11	0.1291	< 100
814.7	1.4	1	2	21.29	0.1346	< 100
819.0				21.27	0.1340	< 100
823.3				21.38	0.1374	< 100
814.7	1.4	1	6	21.23	0.1327	< 100
819.0				21.26	0.1337	< 100
823.3				21.10	0.1288	< 100
814.7	1.4	6	0	20.09	0.1021	< 100
819.0				20.18	0.1042	< 100
823.3				20.05	0.1012	< 100
815.5	3	1	0	21.25	0.1334	< 100
819.0				21.22	0.1324	< 100
822.5				21.21	0.1321	< 100
815.5	3	1	7	21.35	0.1365	< 100
819.0				21.27	0.1340	< 100
822.5				21.35	0.1365	< 100
815.5	3	1	14	21.29	0.1346	< 100
819.0				21.26	0.1337	< 100
822.5				21.27	0.1340	< 100
815.5	3	15	0	20.14	0.1033	< 100
819.0				20.14	0.1033	< 100
822.5				20.22	0.1052	< 100




Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
64QAM						
816.5	5	1	0	21.38	0.1374	< 100
819.0				21.25	0.1334	< 100
821.5				21.32	0.1355	< 100
816.5	5	1	12	21.37	0.1371	< 100
819.0				21.30	0.1349	< 100
821.5				21.24	0.1330	< 100
816.5	5	1	24	21.15	0.1303	< 100
819.0				21.17	0.1309	< 100
821.5				21.27	0.1340	< 100
816.5	5	25	0	20.15	0.1035	< 100
819.0				20.09	0.1021	< 100
821.5				20.23	0.1054	< 100
819.0	10	1	0	21.37	0.1371	< 100
		1	24	21.27	0.1340	< 100
		1	49	21.36	0.1368	< 100
		50	0	20.22	0.1052	< 100
821.5	15	1	0	21.49	0.1409	< 100
		1	36	21.19	0.1315	< 100
		1	74	21.36	0.1368	< 100
		75	0	20.24	0.1057	< 100


### A.4 Band Edge Test Result

Test Site	WZ-SR6	Test Engineer	Caitlin Chen
Test Date	2022/04/06	Test Band	LTE Band 26


#### 1.4MHz Channel Bandwidth - 1RB

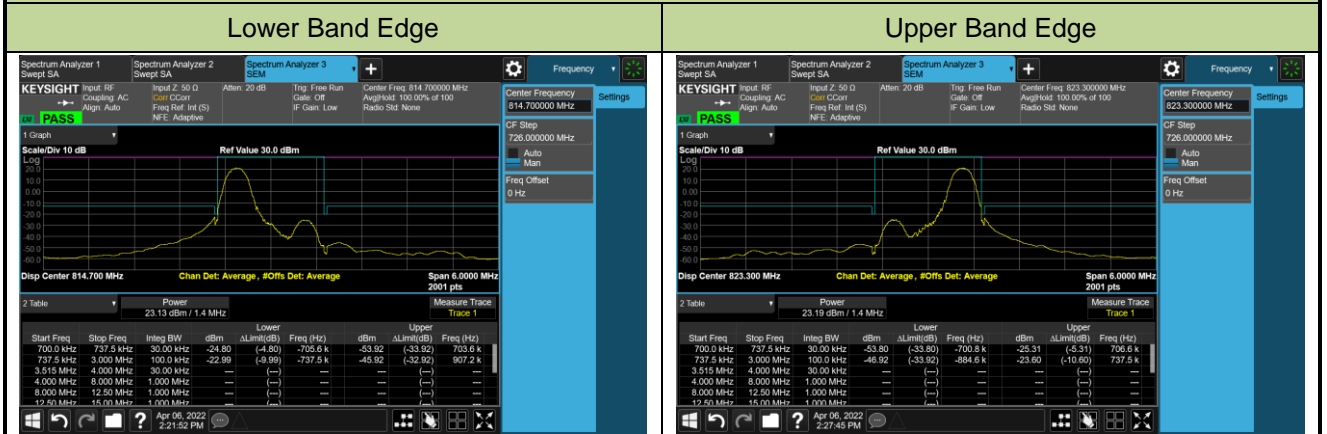

#### 3MHz Channel Bandwidth - 1RB

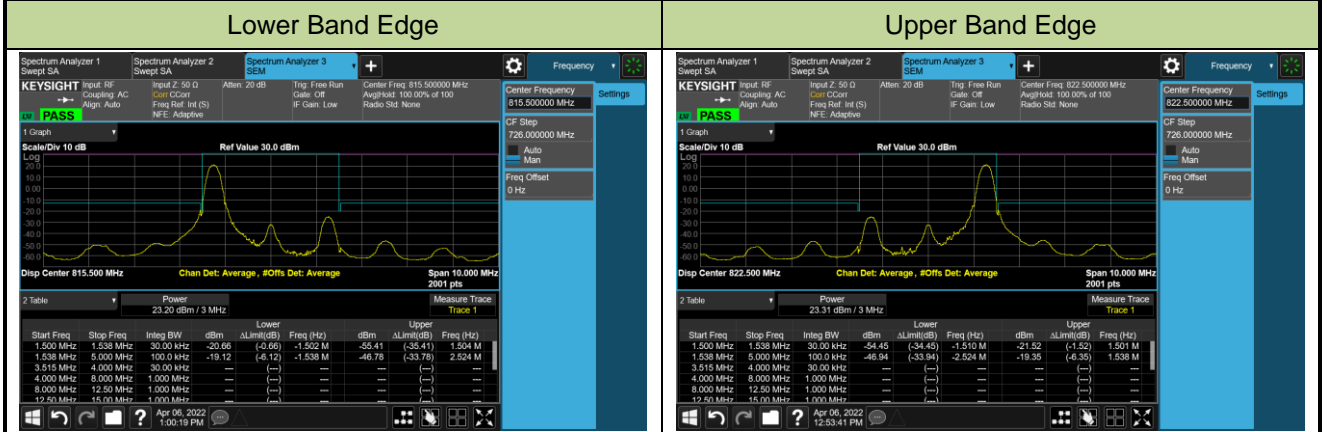


#### 5MHz Channel Bandwidth - 1RB

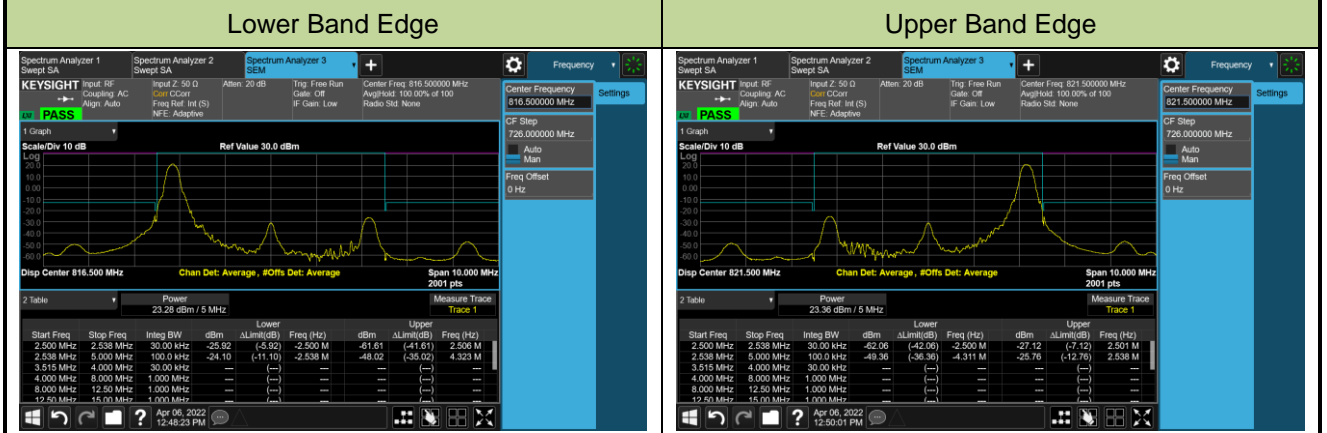


### 10MHz Channel Bandwidth - 1RB

#### Lower Band Edge

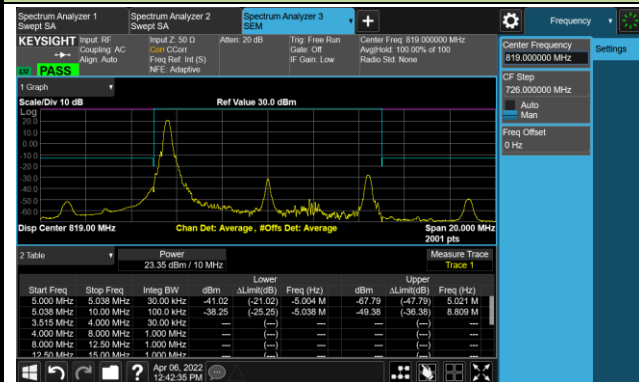


#### Upper Band Edge

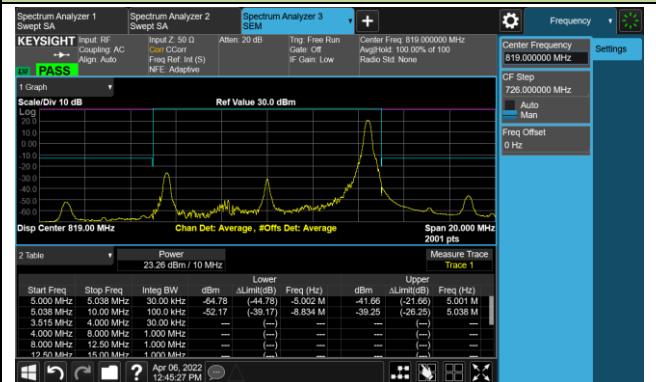


### 15MHz Channel Bandwidth - 1RB

#### Lower Band Edge

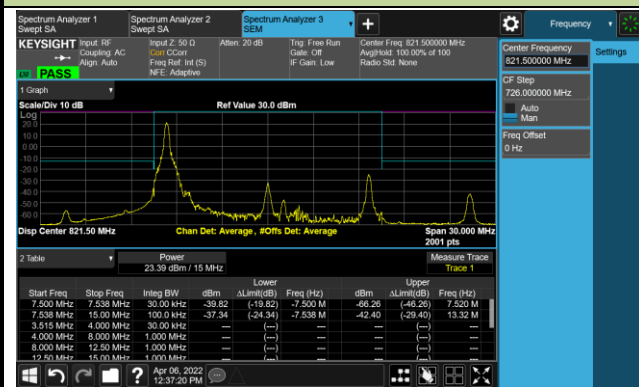


#### Upper Band Edge

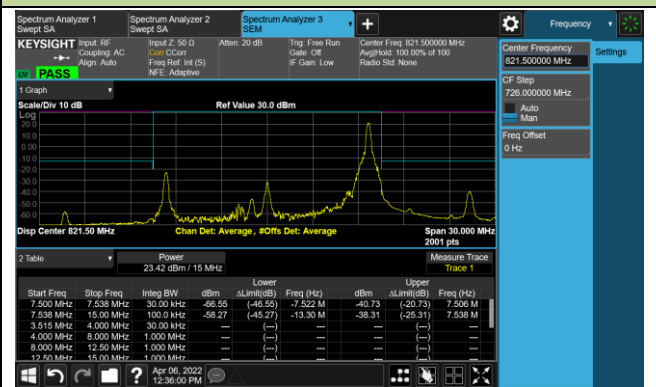


### 1.4MHz Channel Bandwidth - Full RB

#### Lower Band Edge

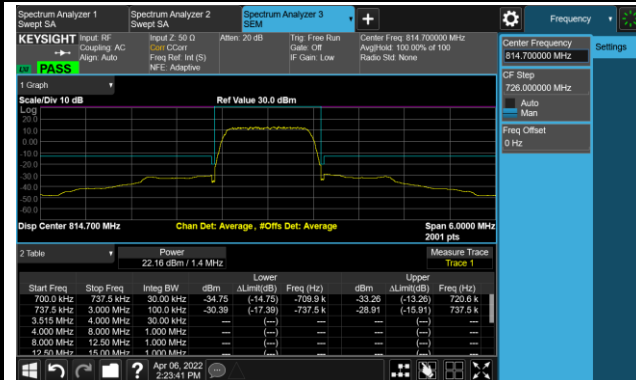


#### Upper Band Edge

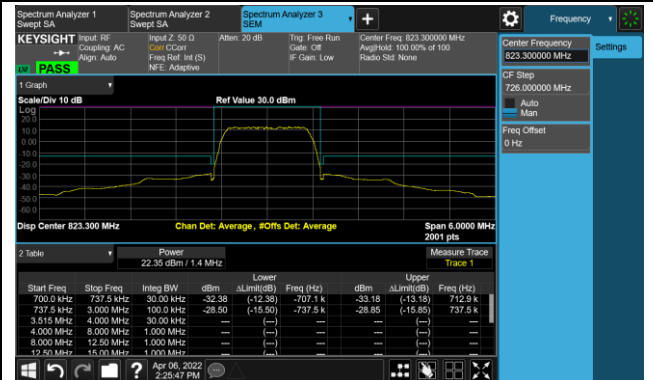


### 3MHz Channel Bandwidth - Full RB

#### Lower Band Edge

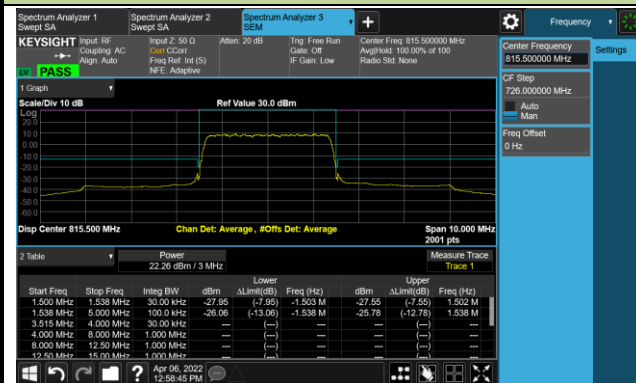


#### Upper Band Edge

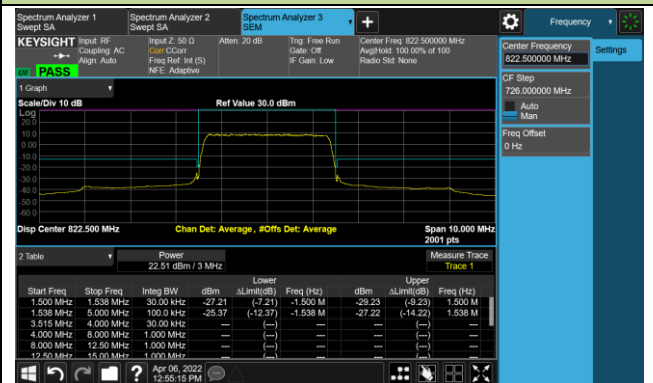


### 5MHz Channel Bandwidth - Full RB

#### Lower Band Edge

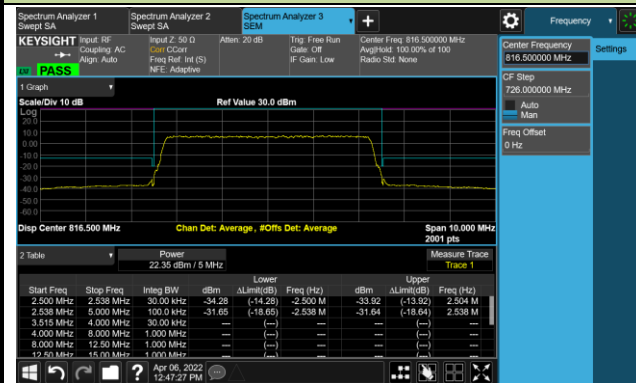


#### Upper Band Edge

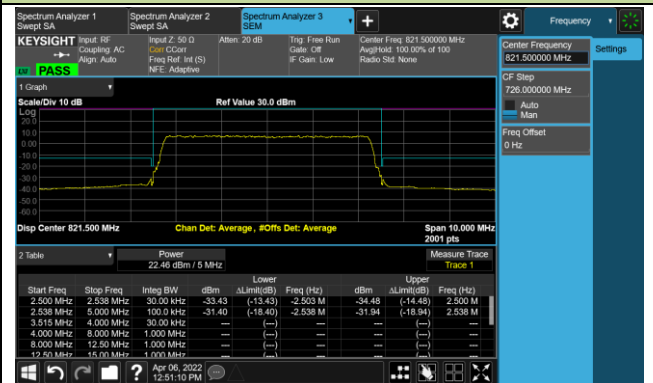

### 10MHz Channel Bandwidth - Full RB

#### Band Edge

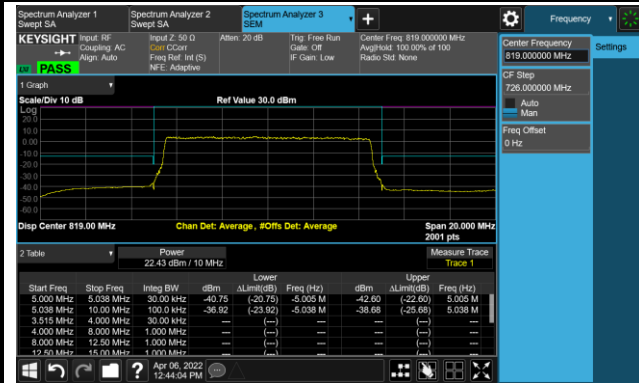

### 15MHz Channel Bandwidth - Full RB

#### Band Edge




**A.5 Conducted Spurious Emissions Test Result**

Test Site	WZ-SR6	Test Engineer	Caitlin Chen
Test Date	2022/04/07	Test Band	LTE Band 26


Frequency (MHz)	Channel Bandwidth (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
QPSK					
814.7	1.4	30 ~ 10000	-45.10	≤ -13.00	Pass
819.0	1.4	30 ~ 10000	-44.16	≤ -13.00	Pass
823.3	1.4	30 ~ 10000	-44.79	≤ -13.00	Pass
815.5	3	30 ~ 10000	-44.13	≤ -13.00	Pass
819.0	3	30 ~ 10000	-43.81	≤ -13.00	Pass
822.5	3	30 ~ 10000	-43.91	≤ -13.00	Pass
816.5	5	30 ~ 10000	-44.04	≤ -13.00	Pass
819.0	5	30 ~ 10000	-46.66	≤ -13.00	Pass
821.5	5	30 ~ 10000	-43.78	≤ -13.00	Pass
819.0	10	30 ~ 10000	-44.89	≤ -13.00	Pass
821.5	15	30 ~ 10000	-44.25	≤ -13.00	Pass

### 1.4MHz Channel Bandwidth


#### Low Channel

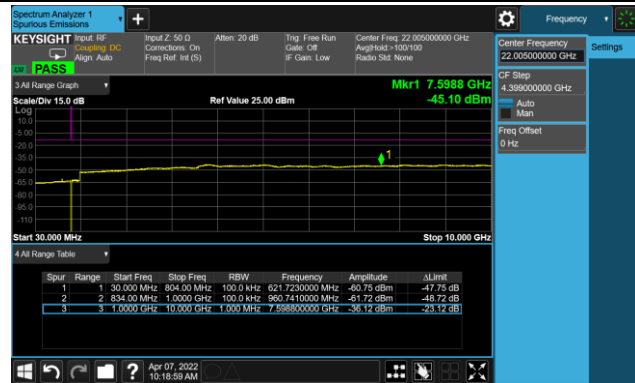

#### Middle Channel

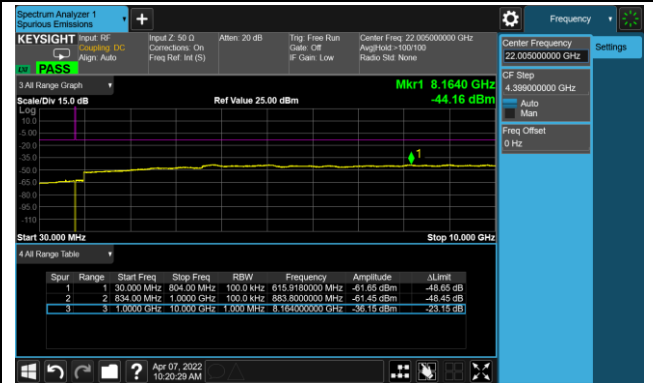


#### High Channel

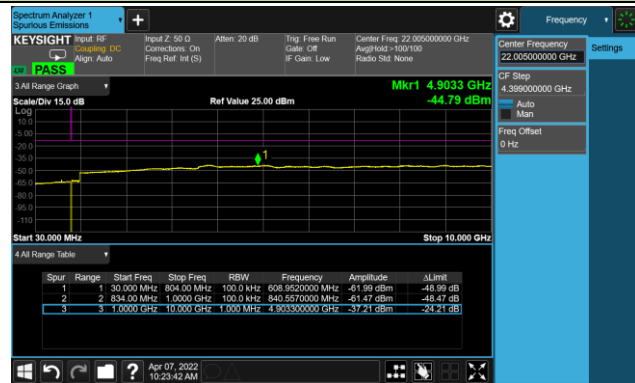


### 3MHz Channel Bandwidth


#### Low Channel

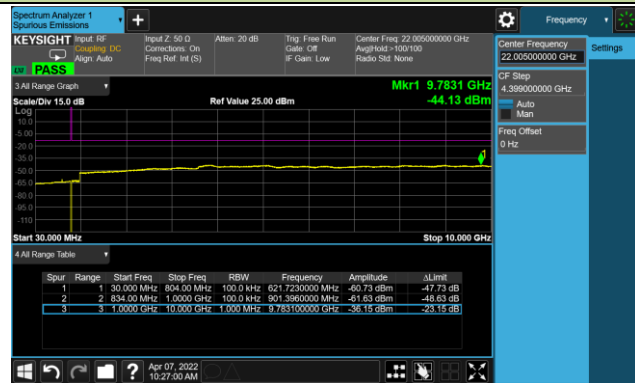


#### Middle Channel

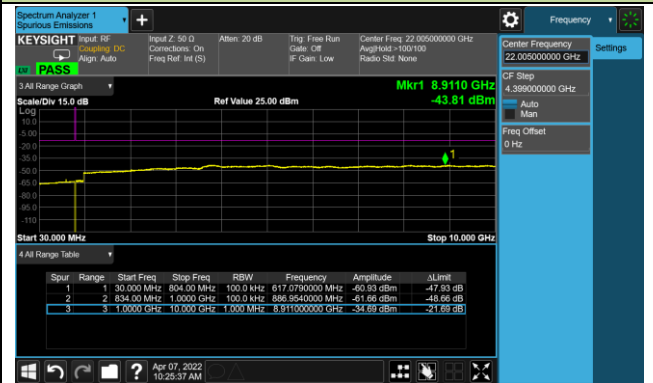

#### High Channel

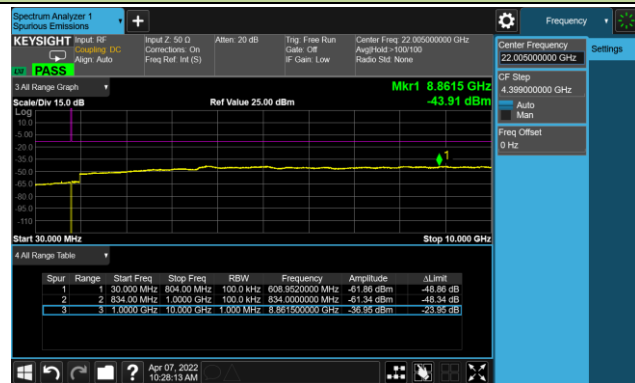


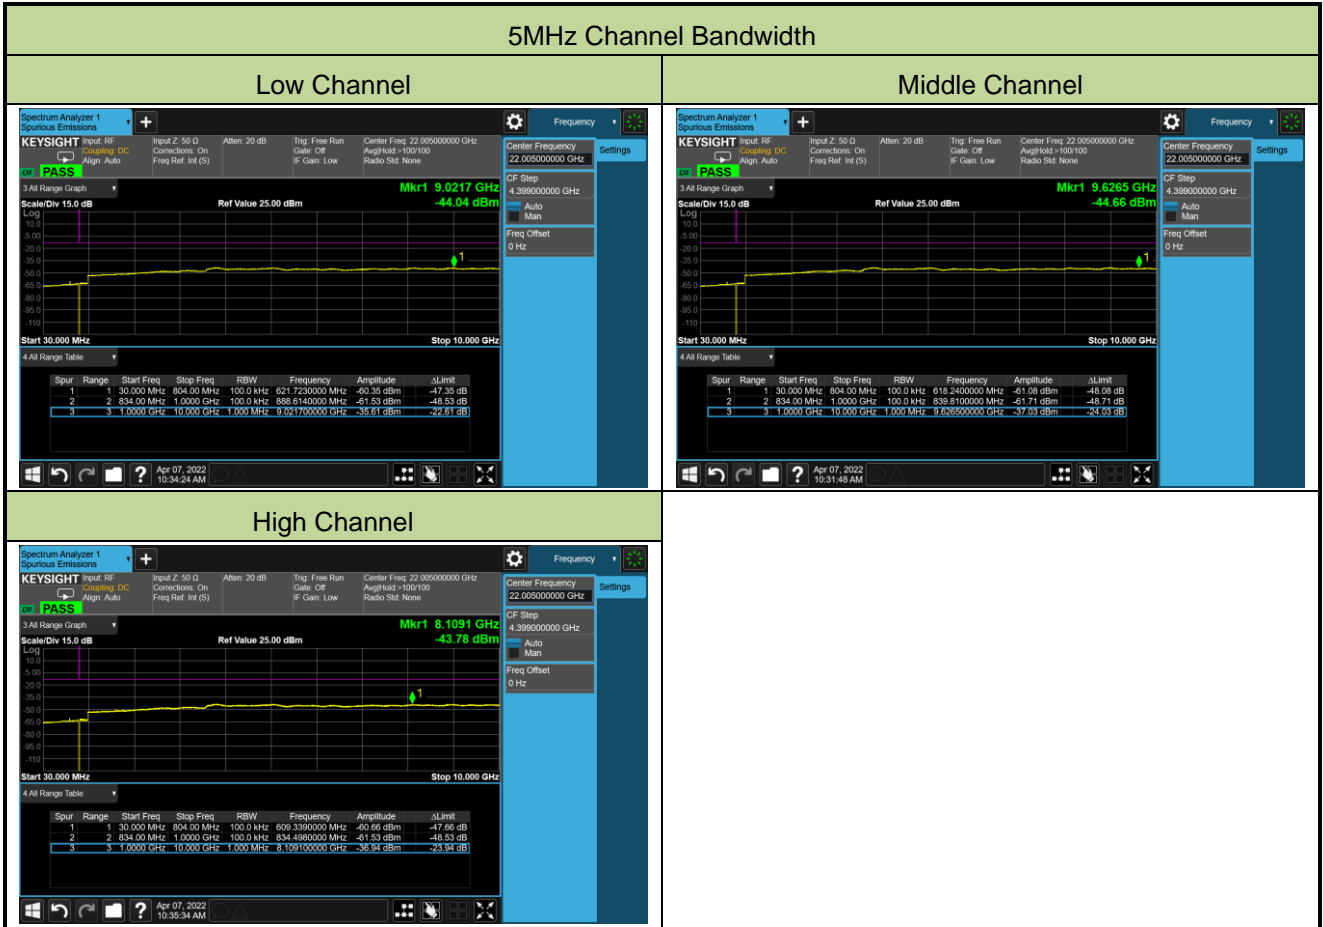




10MHz Channel Bandwidth

Middle Channel

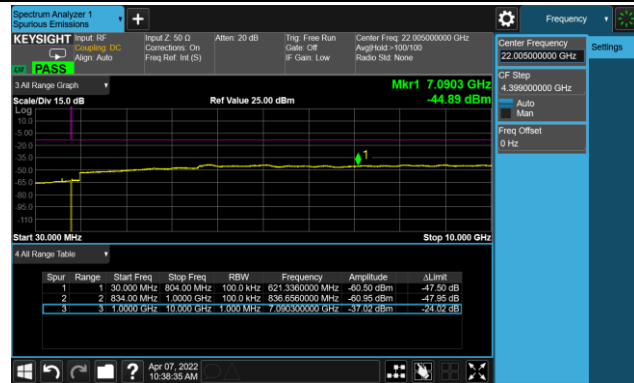

15MHz Channel Bandwidth

Middle Channel

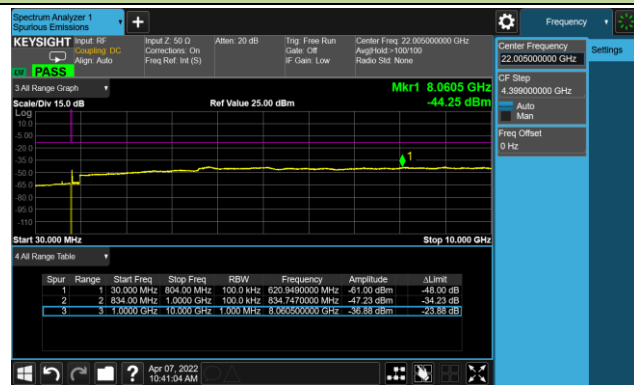

**A.6 Radiated Suprious Emissions Test Result**

Test Site	SIP-AC2	Test Engineer	Allen Zhou
Test Date	2022/03/25~2022/04/07	Test Band	LTE Band 26, 1.4MHz, 1RB

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
<b>Low Channel</b>							
357.4	18.7	19.5	38.2	82.3	-44.1	Peak	Horizontal
466.5	19.5	22.3	41.8	82.3	-40.5	Peak	Horizontal
165.3	18.1	17.6	35.7	82.3	-46.6	Peak	Vertical
360.3	18.8	19.7	38.5	82.3	-43.8	Peak	Vertical
9466.0	44.2	5.7	49.9	82.3	-32.4	Peak	Horizontal
10766.5	43.7	7.4	51.1	82.3	-31.2	Peak	Horizontal
10358.5	43.6	6.7	50.3	82.3	-32.0	Peak	Vertical
11378.5	43.3	8.0	51.3	82.3	-31.0	Peak	Vertical
<b>Middle Channel</b>							
144.0	17.9	17.9	35.8	82.3	-46.5	Peak	Horizontal
367.1	18.6	19.9	38.5	82.3	-43.8	Peak	Horizontal
426.7	19.2	21.5	40.7	82.3	-41.6	Peak	Vertical
509.2	19.2	23.3	42.5	82.3	-39.8	Peak	Vertical
10358.5	43.7	6.7	50.4	82.3	-31.9	Peak	Horizontal
11421.0	42.9	8.4	51.3	82.3	-31.0	Peak	Horizontal
7315.5	45.1	1.7	46.8	82.3	-35.5	Peak	Vertical
10341.5	44.6	6.6	51.2	82.3	-31.1	Peak	Vertical
<b>High Channel</b>							
347.7	19.4	19.3	38.7	82.3	-43.6	Peak	Horizontal
531.5	19.3	23.8	43.1	82.3	-39.2	Peak	Horizontal
379.7	19.1	20.3	39.4	82.3	-42.9	Peak	Vertical
547.5	19.3	23.6	42.9	82.3	-39.4	Peak	Vertical
10401.0	44.3	6.6	50.9	82.3	-31.4	Peak	Horizontal
11421.0	43.7	8.4	52.1	82.3	-30.2	Peak	Horizontal
9015.5	44.4	3.9	48.3	82.3	-34.0	Peak	Vertical
10868.5	44.1	7.6	51.7	82.3	-30.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB).

**Appendix B - Test Setup Photograph**

Refer to "2203RSU046-UT" file.

**Appendix C - EUT Photograph**

Refer to "2203RSU046-UE" file.

---

The End