

# RF MEASUREMENT REPORT

---

**FCC ID:** XMR2022EM120KGL  
**Application:** Quectel Wireless Solutions Company Limited  
**Product:** LTE-A Cat 12 M.2 Module  
**Model No.:** EM120K-GL  
**Brand Name:** Quectel  
**FCC Rule Part(s):** Part 2, 22 (H), 24 (E), 27  
**Result:** Complies  
**Test Date:** 2022-03-22 ~ 2022-05-12

**Reviewed By:**

\_\_\_\_\_  
Sunny Sun

**Approved By:**

\_\_\_\_\_  
Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

### Revision History

Report No.	Version	Description	Issue Date	Note
2203RSU046-U6	Rev. 01	Initial Report	2022-05-28	Valid

---

## CONTENTS

Description	Page
<b>1. General Information.....</b>	<b>5</b>
1.1. Applicant.....	5
1.2. Manufacturer .....	5
1.3. Testing Facility.....	5
1.4. Product Information .....	6
1.5. Product Specification under Test.....	6
1.6. Description of Available Antennas .....	6
1.7. Test Methodology .....	7
1.8. Configuration of Tested System .....	7
1.9. Test Environment Condition .....	7
<b>2. Test Equipment Calibration Date.....</b>	<b>8</b>
<b>3. Measurement Uncertainty .....</b>	<b>10</b>
<b>4. Test Result.....</b>	<b>11</b>
4.1. Summary .....	11
4.2. Occupied Bandwidth Measurement .....	12
4.2.1. Test Limit .....	12
4.2.2. Test Procedure .....	12
4.2.3. Test Setting.....	12
4.2.4. Test Setup.....	12
4.2.5. Test Result.....	12
4.3. Frequency Stability Measurement.....	13
4.3.1. Test Limit .....	13
4.3.2. Test Procedure .....	13
4.3.3. Test Setting.....	13
4.3.4. Test Setup.....	14
4.3.5. Test Result.....	14
4.4. Equivalent Isotropically Radiated Power Measurement.....	15
4.4.1. Test Limit .....	15
4.4.2. Test Procedure .....	15
4.4.3. Test Setting.....	15
4.4.4. Test Setup.....	16
4.4.5. Test Result.....	16
4.5. Band Edge Measurement.....	17
4.5.1. Test Limit .....	17
4.5.2. Test Procedure .....	17

4.5.3.	Test Setting.....	17
4.5.4.	Test Setup.....	18
4.5.5.	Test Result.....	18
4.6.	Peak to Average Ratio Measurement.....	19
4.6.1.	Test Limit .....	19
4.6.2.	Test Procedure .....	19
4.6.3.	Test Setting.....	19
4.6.4.	Test Setup.....	19
4.6.5.	Test Result.....	19
4.7.	Conducted Spurious Emissions Measurement .....	20
4.7.1.	Test Limit .....	20
4.7.2.	Test Procedure .....	20
4.7.3.	Test Setting.....	20
4.7.4.	Test Setup.....	21
4.7.5.	Test Result.....	21
4.8.	Radiated Spurious Emissions Measurement .....	22
4.8.1.	Test Limit .....	22
4.8.2.	Test Procedure .....	22
4.8.3.	Test Setting.....	22
4.8.4.	Test Setup.....	23
4.8.5.	Test Result.....	23
<b>Appendix A - Test Result .....</b>		<b>24</b>
A.1	Occupied Bandwidth Test Result.....	24
A.2	Frequency Stability Test Result.....	27
A.3	Equivalent Isotropically Radiated Power Test Result .....	30
A.4	Band Edge Test Result.....	33
A.5	Peak to Average Ratio Test Result.....	34
A.6	Conducted Spurious Emissions Test Result .....	37
A.7	Radiated Spurious Emissions Test Result .....	41
<b>Appendix B - Test Setup Photograph .....</b>		<b>44</b>
<b>Appendix C - EUT Photograph .....</b>		<b>45</b>



#### 1.4. Product Information

Product Name	LTE-A Cat 12 M.2 Module
Model No.	EM120K-GL
Brand Name	Quectel
IMEI	861293060003570
UTRA Specification	Band 2, 4, 5
E-UTRA Specification	FDD Band: 2, 4, 5, 7, 12, 13, 14, 17, 25, 26, 30, 66, 71 TDD Band: 38, 41, 46
GNSS Specification	GPS, GLONASS, Bei Dou, Galileo
Supply Voltage	3.135 ~ 4.4Vdc, typical 3.7Vdc
Operating Temperature:	-25 ~ 75 °C
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

#### 1.5. Product Specification under Test

UTRA Specification	
Single Band	Band 2, 4, 5
Modulation	UL up to 16QAM, DL up to 64QAM
FDD Tx Frequency Range	Band II: 1850 ~ 1910MHz, Band IV: 1710 ~ 1755MHz Band V: 824 ~ 849MHz
FDD Rx Frequency Range	Band II: 1930 ~ 1990MHz, Band IV: 2110 ~ 2155MHz Band V: 869 ~ 894MHz

#### 1.6. Description of Available Antennas

Technology	Frequency Range (MHz)	Antenna Type	Max Peak Gain (dBi)
WCDMA Band II	1850 ~ 1910	Dipole	0.25
WCDMA Band IV	1710 ~ 1755		1.47
WCDMA Band V	824 ~ 849		2.68


Note: The typical antennas use to calculate the ERP (EIRP).

### 1.7. Test Methodology

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC CFR 47 Part 22, Part 24, Part 27
- ANSI C63.26: 2015
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 971168 D02 v02r01: Misc Rev Approv License Devices
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP

### 1.8. Configuration of Tested System

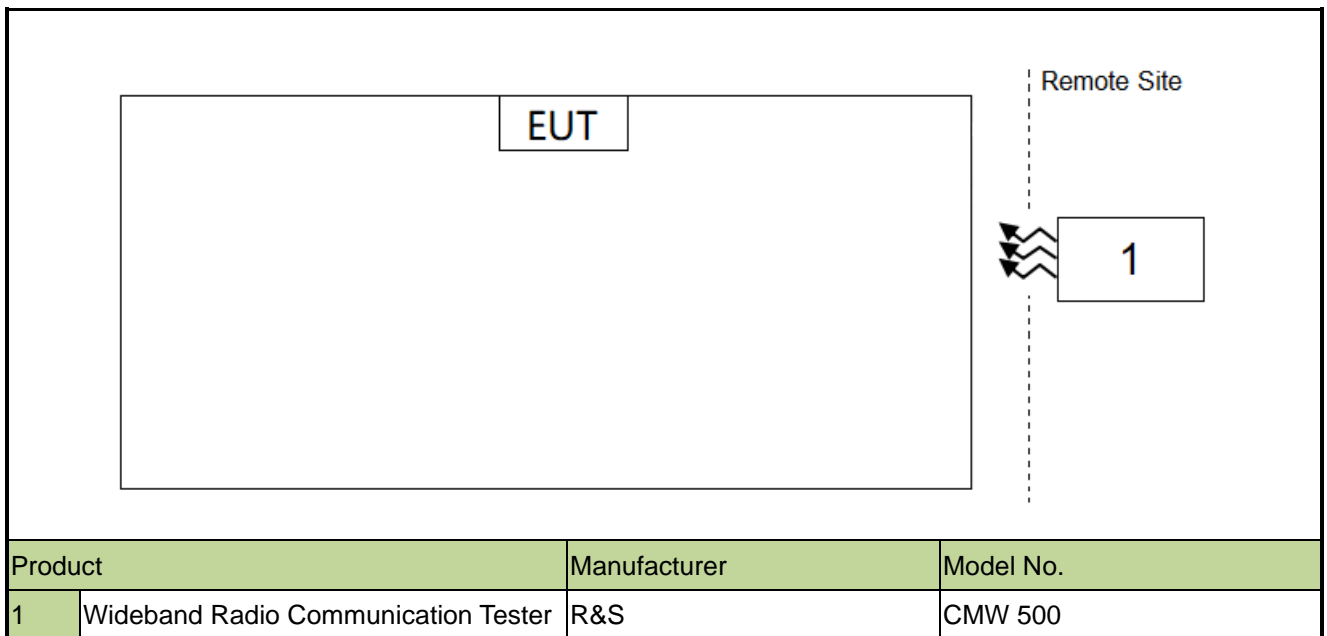

### 1.9. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20% ~ 75%RH

## 2. Test Equipment Calibration Date

Instrument	Manufacturer	Model No.	Asset No.	Last Cali. Date	Cali. Due Date	Test Site
Communication Tester	R&S	CMU 200	MRTSUE06009	1 year	2022/9/7	SIP-SR1
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2022/10/10	WZ-TR3
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2022/12/29	SIP-AC1
Vibration Test System	DongLing	ES-1-150	MRTSUE06206	1 year	2022/8/8	WZ-TR3
Communication Tester	R&S	CMW500	MRTSUE06243	1 year	2022/10/10	SIP-SR1
Thermohygrometer	testo	608-H1	MRTSUE06362	1 year	2023/2/15	WZ-SR6
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2022/6/28	WZ-TR3
Shielding Room	HUAMING	WZ-SR6	MRTSUE06443	/	/	WZ-SR6
Signal Generator	Keysight	E8257D	MRTSUE06453	1 year	2022/6/24	SIP-SR1
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2022/12/23	SIP-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2022/6/24	SIP-AC1
Signal Analyzer	Keysight	N9020B	MRTSUE06583	1 year	2022/10/10	WZ-SR6
Preamplifier	EMCI	EMC051845SE	MRTSUE06600	1 year	2022/11/8	SIP-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06603	1 year	2022/10/31	SIP-AC1
Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2022/9/7	SIP-AC1
Signal Generator	Keysight	N5173B	MRTSUE06606	1 year	2022/11/29	WZ-SR6
Horn Antenna	R&S	HF907	MRTSUE06610	1 year	2022/8/5	SIP-AC1
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2022/6/24	SIP-AC1
Thermohygrometer	testo	608-H1	MRTSUE06616	1 year	2022/11/2	SIP-AC1
Thermohygrometer	testo	608-H1	MRTSUE06620	1 year	2022/11/28	SIP-AC1
Thermohygrometer	testo	622	MRTSUE06629	1 year	2023/1/6	SIP-SR1
Preamplifier	EMCI	EMC001330	MRTSUE06643	1 year	2023/1/13	SIP-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06645	1 year	2022/8/26	SIP-AC1
5G Wireless Test Platform	Keysight	E7515B	MRTSUE06903	1 year	2022/11/23	SIP-SR1
Signal Generator	Keysight	E8257D	MRTSUE06904	1 year	2022/11/23	SIP-SR1
DC POWER MODULE	Keysight	N6743B	MRTSUE06905	/	/	SIP-SR1
DC POWER MODULE	Keysight	N6743B	MRTSUE06906	/	/	SIP-SR1
Low-Profile Modular Power System Mainframe	Keysight	N6700C	MRTSUE06907	/	/	SIP-SR1
FR1 Switching Unit	Keysight	C8880A	MRTSUE06908	/	/	SIP-SR1
Signal Analyzer	Keysight	N9021B	MRTSUE06915	1 year	2022/12/29	SIP-SR1
Temperature Chamber	BAOYT	BYG-80CL	MRTSUE06932	1 year	2023/2/27	SIP-SR1
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2023/3/14	SIP-AC1
5G Wireless Test Platform	Keysight	E7515B	MRTSUE06942	1 year	2023/3/3	WZ-SR6
Shielding Room	MIX-BEP	SIP-SR1	MRTSUE06948	/	/	SIP-SR1



Millimeter-Wave Transceiver for 5G	Keysight	M1740A	MRTSUE06954	1 year	2022/6/2	SIP-SR1
Millimeter-Wave Transceiver for 5G	Keysight	M1740A	MRTSUE06955	1 year	2022/6/2	SIP-SR1
5G Wireless Test Platform	Keysight	E7515B	MRTSUE06956	1 year	2022/6/10	SIP-SR1
Common Interface Unit	Keysight	E7770A	MRTSUE06957	/	/	SIP-SR1
USB Power Sensor	Keysight	U8488A	MRTSUE06958	1 year	2022/7/8	SIP-SR1
Radio Communication Analyzer	Anritsu	MT8821C	MRTSUE06960	1 year	2022/7/1	WZ-SR6
Radio Communication Test Station	Anritsu	MT8000A	MRTSUE06961	1 year	2022/7/1	WZ-SR6
Signal Analyzer	Keysight	N9010B	MRTSUE07028	1 year	2022/12/9	SIP-SR1

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software

### 3. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>Radiated Spurious Emissions</b>
Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): Horizontal: 9kHz ~ 300MHz: 5.04dB 300MHz ~ 1GHz: 4.95dB 1GHz ~ 40GHz: 6.40dB Vertical: 9kHz ~ 300MHz: 5.24dB 300MHz ~ 1GHz: 6.03dB 1GHz ~ 40GHz: 6.40dB
<b>Conducted Spurious Emissions</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.78dB
<b>Output Power</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.13dB
<b>Occupied Bandwidth</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.28%
<b>Frequency Stability</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 76.2Hz

## 4. Test Result

### 4.1. Summary

FCC Part Section(s)	Test Description	Test Condition	Verdict
2.1049	Occupied Bandwidth	Conducted	Pass
2.1055, 22.355 24.235, 27.54	Frequency Stability		Pass
22.913(a)(5), 27.50(d)(4) 24.232(c)	Equivalent Radiated Power, Equivalent Isotropic Radiated Power		Pass
2.1051, 22.917(a) 24.238(a), 27.53(h)	Band Edge		Pass
2.1051, 22.917(a) 24.238(a), 27.53(h)	Spurious Emission		Pass
24.232(d), 27.50(d)(5)	Peak to Average Ratio		Pass
2.1053, 22.917(a) 24.238(a), 27.53(h)	Spurious Emissions	Radiated	Pass

#### Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All supported modulation types were evaluated. The worst-case emission of modulation was selected. Therefore, the Frequency Stability, Channel Band Edge, Radiated & Conducted Spurious Emission were presented worst-case in the test report.

## 4.2. Occupied Bandwidth Measurement

### 4.2.1. Test Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


### 4.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.4

### 4.2.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

### 4.2.4. Test Setup

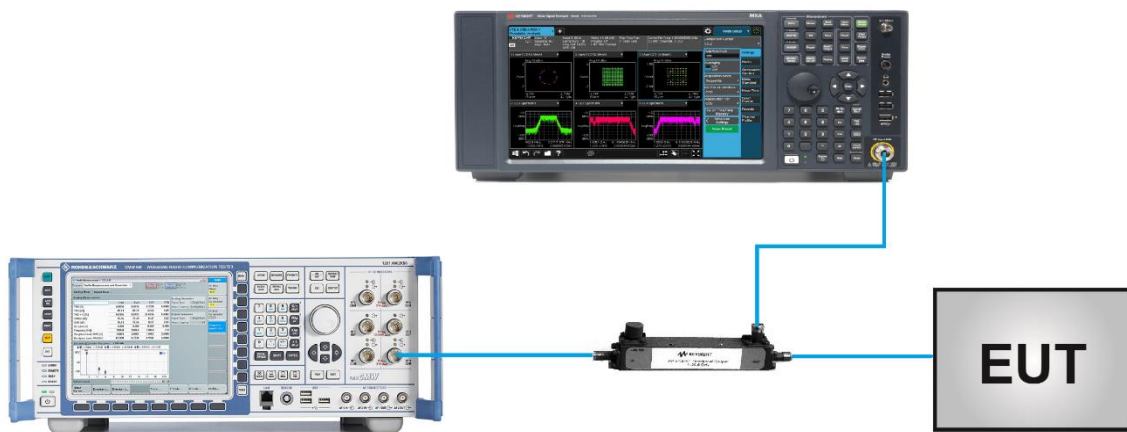

### 4.2.5. Test Result

Refer to Appendix A.1.

### **4.3. Frequency Stability Measurement**

#### **4.3.1. Test Limit**

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

#### **4.3.2. Test Procedure**

ANSI C63.26-2015 - Section 5.6

#### **4.3.3. Test Setting**

##### **Frequency Stability Under Temperature Variations:**


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to High. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the Low temperature reached.

##### **Frequency Stability Under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

#### 4.3.4. Test Setup

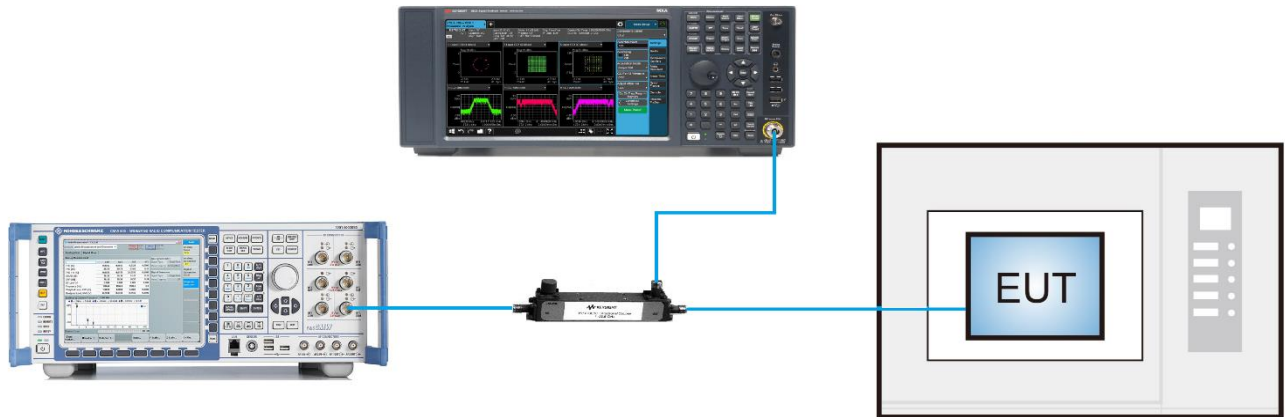

#### 4.3.5. Test Result

Refer to Appendix A.2.

#### 4.4. Equivalent Isotropically Radiated Power Measurement

##### 4.4.1. Test Limit

###### Band 2:

Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

###### Band 4:

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

###### Band 5:

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

##### 4.4.2. Test Procedure

ANSI C63.26-2015 - Section 5.2

##### 4.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}}$$

where


ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as  $P_{\text{Meas}}$ , e.g., dBm or dBW)

$P_{\text{Meas}}$  measured transmitter output power or PSD, in dBm or dBW

$G_{\text{T}}$  gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

$$\text{ERP} = \text{EIRP} - 2.15$$

#### 4.4.4. Test Setup

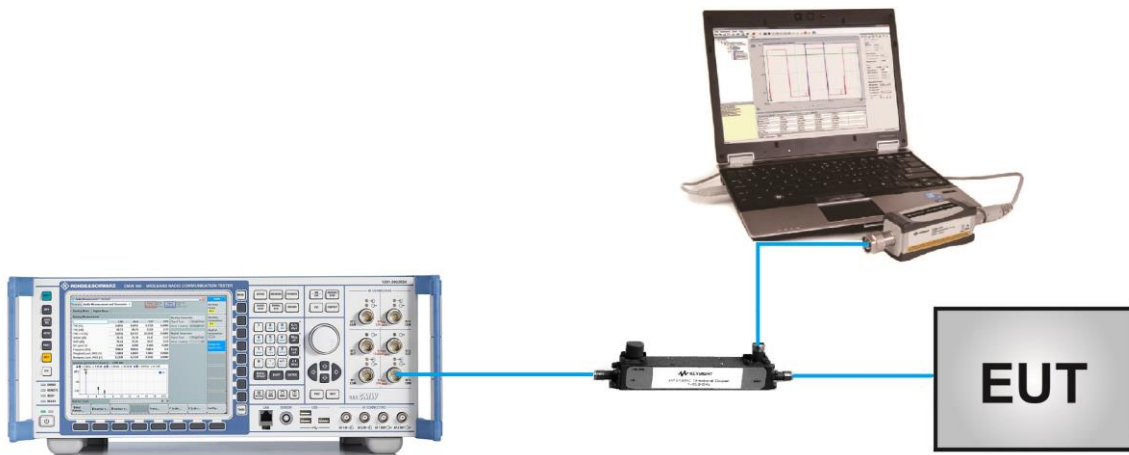

#### 4.4.5. Test Result

Refer to Appendix A.3.



## **4.5. Band Edge Measurement**

### **4.5.1. Test Limit**

For operations in the 824 ~ 849 MHz, 1850 ~ 1910 MHz, 1930 ~ 1990 MHz, 698 ~ 746 MHz and 1710 ~ 1755 MHz, the FCC limit is  $43 + 10\log_{10}(P_{\text{Watts}})$  dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


### **4.5.2. Test Procedure**

ANSI C63.26-2015 - Section 5.7

### **4.5.3. Test Setting**

1. Set the analyzer frequency to low or high channel
2.  $RBW \geq$  The nominal RBW shall be in the range of 1% of the anticipated OBW (in the 1MHz band immediately outside and adjacent to the band edge). For improvement of the accuracy in the measurement of the average power of a noise-like emission, a RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW), provided that a subsequent integration is performed over the full required measurement bandwidth. This integration should be performed using the spectrum analyzer's band power functions.
3.  $VBW \geq 3*RBW$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

#### 4.5.4. Test Setup

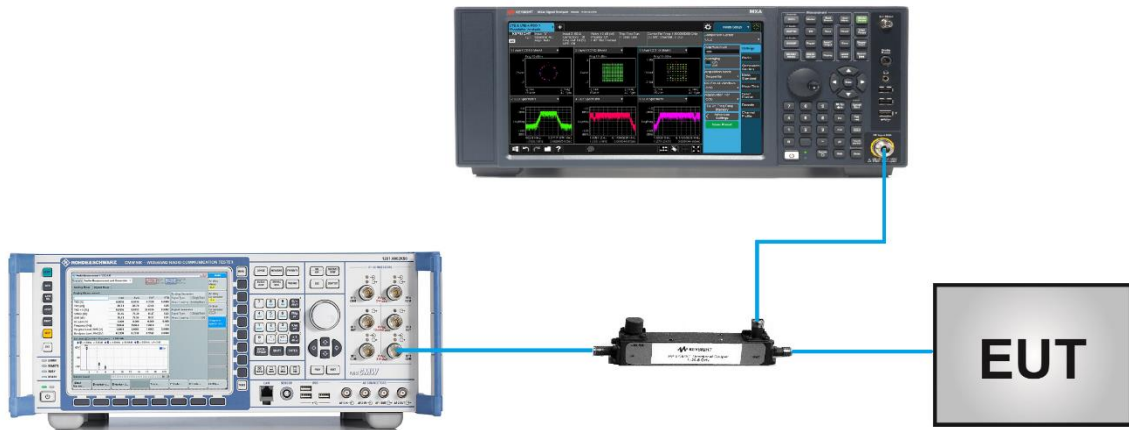

#### 4.5.5. Test Result

Refer to Appendix A.4.

## 4.6. Peak to Average Ratio Measurement

### 4.6.1. Test Limit

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.


### 4.6.2. Test Procedure

ANSI C63.26-2015 - Section 5.2.3.4 (CCDF).

### 4.6.3. Test Setting

1. Set the resolution / measurement bandwidth  $\geq$  signal's occupied bandwidth
2. Set the number of counts to a value that stabilizes the measured CCDF curve
3. Record the maximum PARR level associated with a probability of 0.1%

### 4.6.4. Test Setup

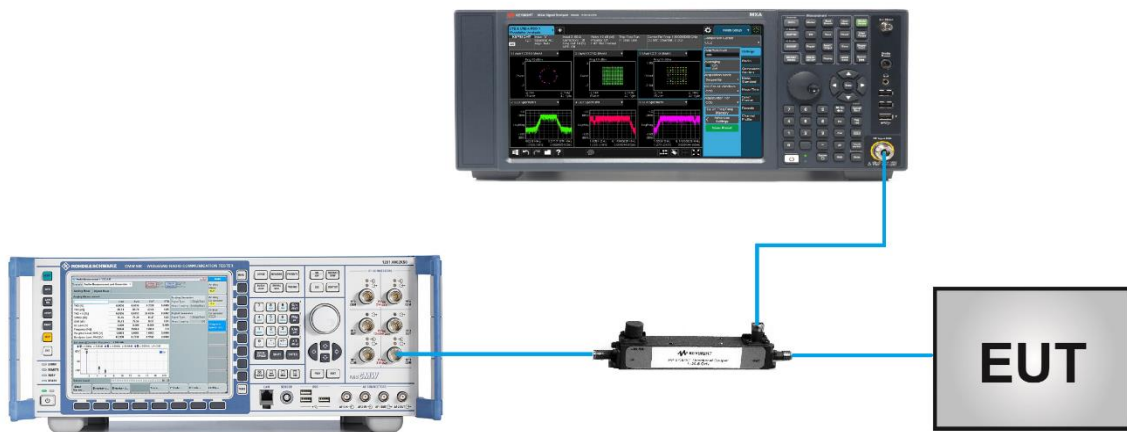

### 4.6.5. Test Result

Refer to Appendix A.5.

## **4.7. Conducted Spurious Emissions Measurement**

### **4.7.1. Test Limit**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the Low frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### **4.7.2. Test Procedure**

ANSI C63.26-2015 - Section 5.7

### **4.7.3. Test Setting**

1. Set the analyzer frequency to low, mid, high channel.
2. RBW = 1MHz
3. VBW  $\geq 3 \cdot$ RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

#### 4.7.4. Test Setup



#### 4.7.5. Test Result

Refer to Appendix A.6.

## **4.8. Radiated Spurious Emissions Measurement**

### **4.8.1. Test Limit**

Out of band emissions: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to -13dBm.

$E$  (dB $\mu$ V/m) = EIRP (dBm) - 20 log D + 104.8; where D is the measurement distance in meters. The emission limit equal to 82.3dB $\mu$ V/m.

### **4.8.2. Test Procedure**


ANSI C63.26-2015 - Section 5.2.7 & 5.5

### **4.8.3. Test Setting**


1. RBW = 1MHz
2. VBW  $\geq$  3\*RBW
3. Sweep time  $\geq$  10  $\times$  (number of points in sweep)  $\times$  (transmission symbol period)
4. Detector = Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize

#### 4.8.4. Test Setup

Below 1GHz Test Setup:

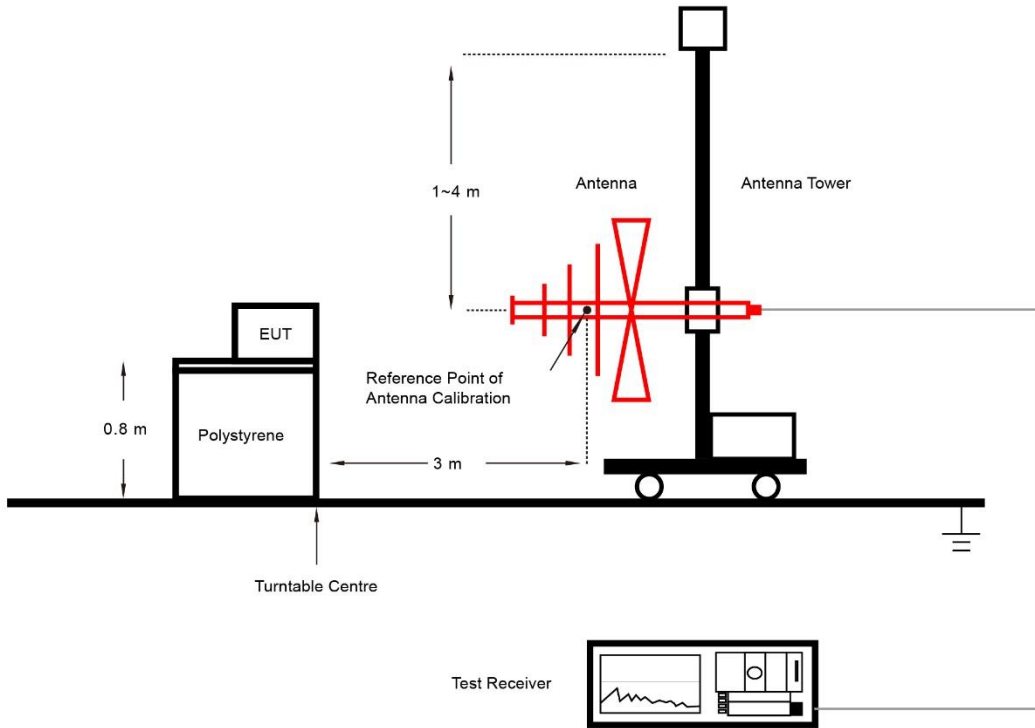

Above 1GHz Test Setup:

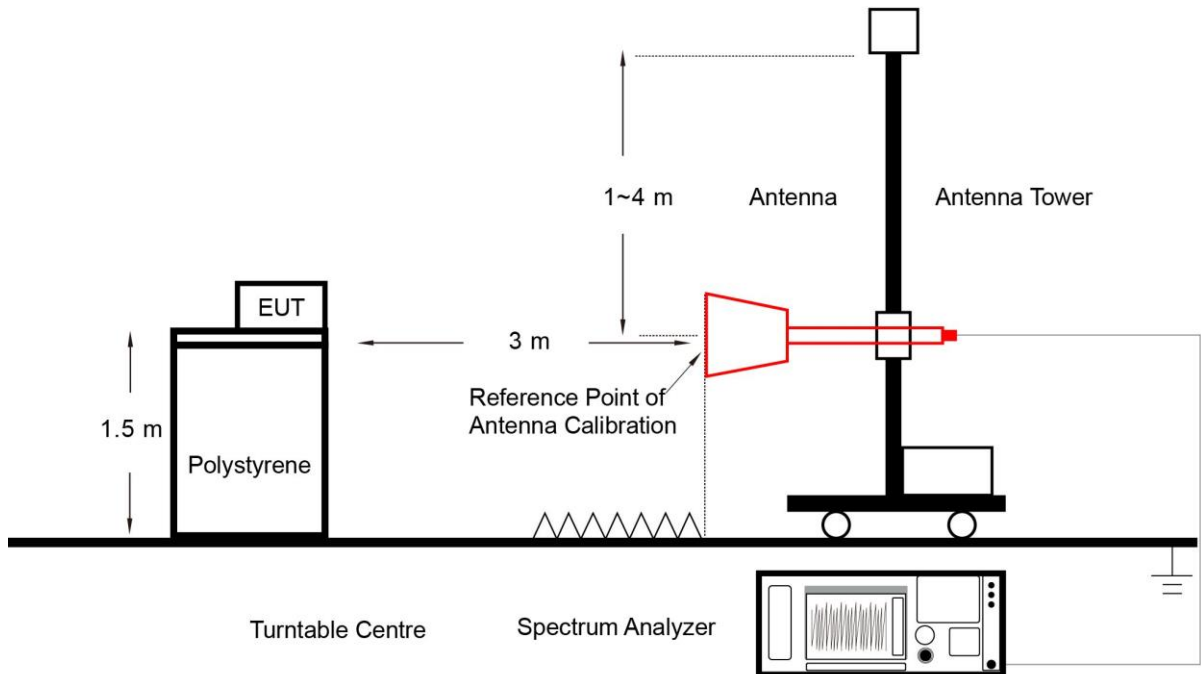

#### 4.8.5. Test Result


Refer to Appendix A.7.

## Appendix A - Test Result

### A.1 Occupied Bandwidth Test Result

Test Site	WZ-SR6	Test Engineer	Caitlin Chen
Test Date	2022/04/11 ~ 2022/04/12	Test Band	WCDMA Band II


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	1852.4	4.13
Middle	1880.0	4.13
High	1907.6	4.12

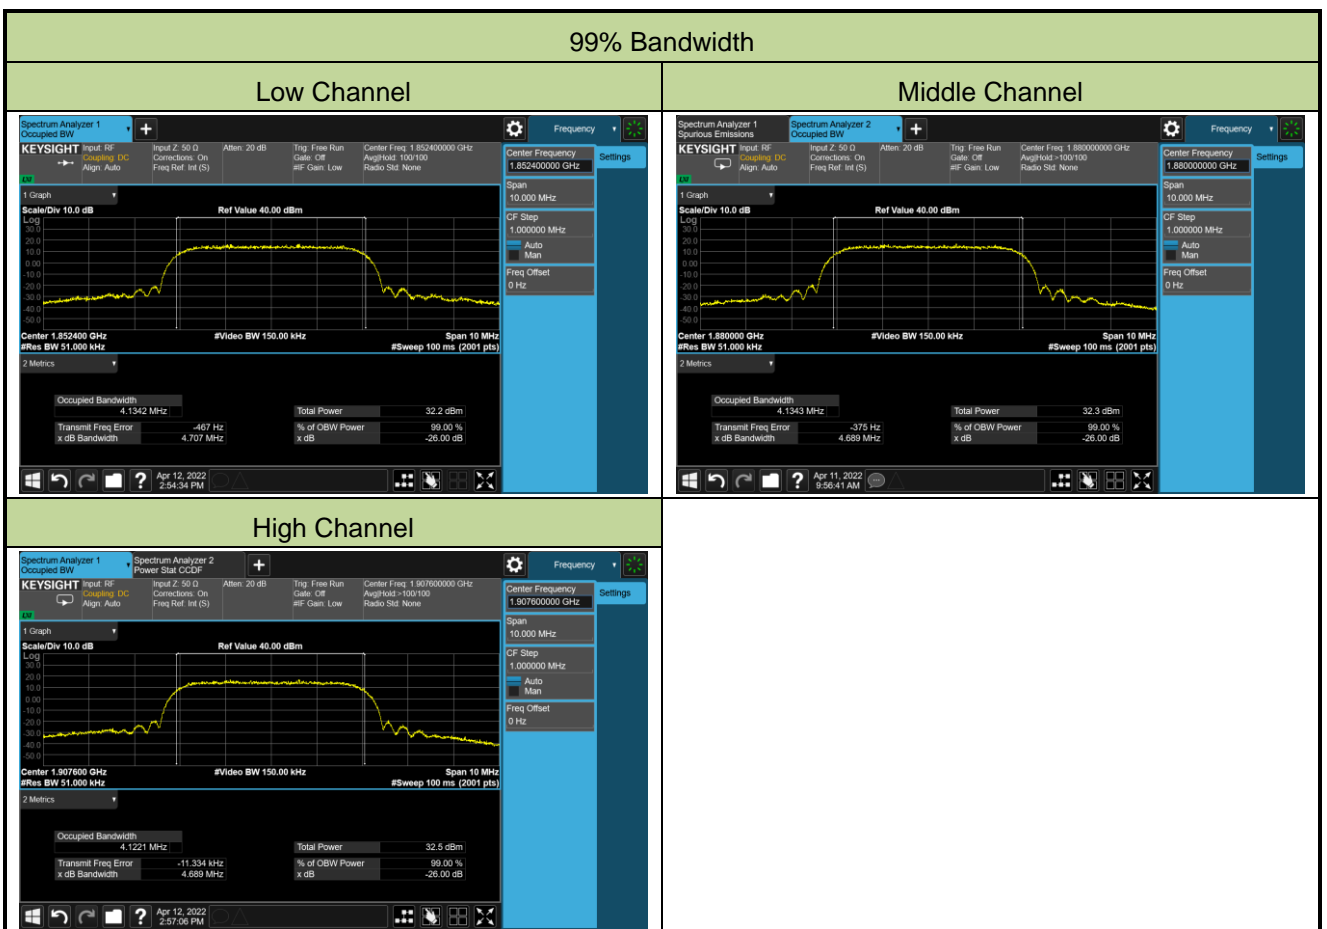



Test Site	WZ-SR6	Test Engineer	Caitlin Chen
Test Date	2022/04/11 ~ 2022/04/12	Test Band	WCDMA Band IV

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	1712.4	4.13
Middle	1732.4	4.14
High	1752.6	4.13

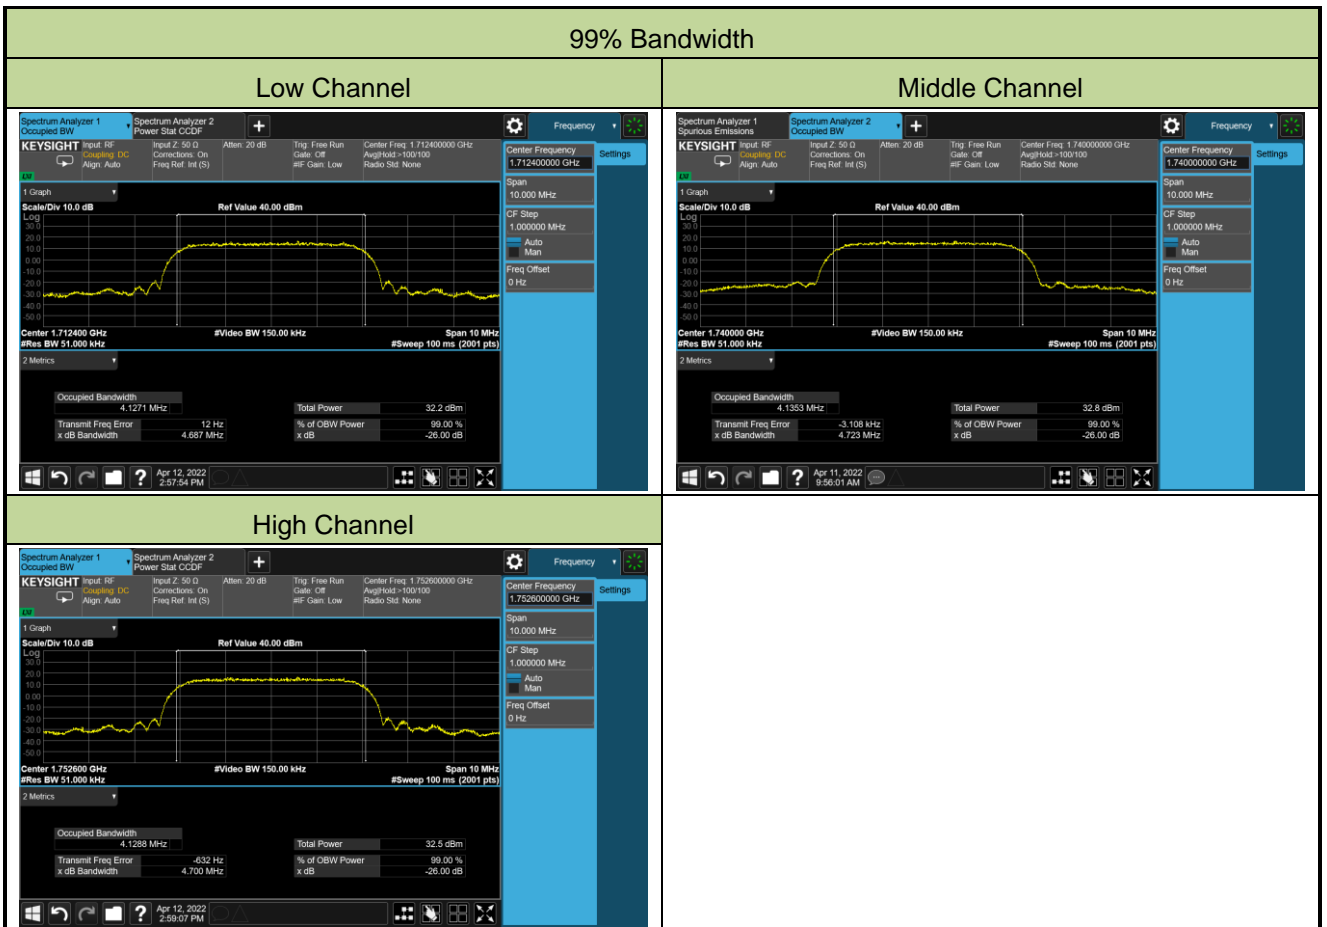

Test Site	WZ-SR6	Test Engineer	Caitlin Chen
Test Date	2022/04/11 ~ 2022/04/12	Test Band	WCDMA Band V

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	826.4	4.13
Middle	836.4	4.13
High	846.6	4.13



**A.2 Frequency Stability Test Result**

Test Site	WZ-TR3	Test Engineer	Caitlin Chen
Test Date	2022/03/29 ~ 2022/04/12	Test Band	WCDMA Band II

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.7	- 30	0.0090
	- 20	0.0082
	- 10	0.0069
	0	0.0066
	+ 10	0.0062
	+ 20	0.0061
	+ 30	0.0053
	+ 40	0.0063
	+ 50	0.0073
4.4	+ 20	0.0000
3.135	+ 20	0.0064

Test Site	WZ-TR3	Test Engineer	Caitlin Chen
Test Date	2022/03/29~2022/04/12	Test Band	WCDMA Band IV

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.7	- 30	0.0007
	- 20	0.0029
	- 10	0.0054
	0	0.0056
	+ 10	0.0042
	+ 20	0.0012
	+ 30	0.0010
	+ 40	-0.0002
	+ 50	-0.0012
4.4	+ 20	0.0007
3.135	+ 20	0.0003

Test Site	WZ-TR3	Test Engineer	Caitlin Chen
Test Date	2022/03/29~2022/04/12	Test Band	WCDMA Band V

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.7	- 30	0.0026
	- 20	0.0024
	- 10	0.0004
	0	-0.0005
	+ 10	0.0001
	+ 20	-0.0004
	+ 30	-0.0007
	+ 40	-0.0002
	+ 50	0.0007
4.4	+ 20	-0.0001
3.135	+ 20	0.0000

**A.3 Equivalent Isotropically Radiated Power Test Result**

Test Site	WZ-SR6	Test Engineer	Caitlin Chen
Test Date	2022/03/23	Test Band	WCDMA Band II

Mode	3GPP Subtest	Conducted Power (dBm)			Antenna Gain (dBi)	EIRP (dBm)		
		Band II Channel				Band II Channel		
		9262	9400	9538		9262	9400	9538
WCDMA R99	1	23.14	23.07	23.24	0.25	23.39	23.32	23.49
HSDPA	1	21.99	22.10	22.14	0.25	22.24	22.35	22.39
	2	22.08	22.08	22.13	0.25	22.33	22.33	22.38
	3	21.53	21.55	21.64	0.25	21.78	21.80	21.89
	4	21.55	21.58	21.45	0.25	21.80	21.83	21.70
HSUPA	1	21.95	22.07	22.14	0.25	22.20	22.32	22.39
	2	20.02	20.08	20.13	0.25	20.27	20.33	20.38
	3	21.00	21.07	21.12	0.25	21.25	21.32	21.37
	4	20.03	20.06	20.18	0.25	20.28	20.31	20.43
	5	21.86	21.97	21.98	0.25	22.11	22.22	22.23
Limit	33.01dBm							

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Test Site	WZ-SR6	Test Engineer	Caitlin Chen
Test Date	2022/03/23	Test Band	WCDMA Band IV

Mode	3GPP Subtest	Conducted Power (dBm)			Antenna Gain (dBi)	EIRP (dBm)		
		Band IV Channel				Band IV Channel		
		1312	1412	1513		1312	1412	1513
WCDMA R99	1	23.01	23.06	23.17	1.47	24.48	24.53	24.64
HSDPA	1	21.99	22.11	22.11	1.47	23.46	23.58	23.58
	2	21.99	22.06	21.96	1.47	23.46	23.53	23.43
	3	21.48	21.57	21.62	1.47	22.95	23.04	23.09
	4	21.32	21.59	21.59	1.47	22.79	23.06	23.06
HSUPA	1	22.03	22.08	22.13	1.47	23.50	23.55	23.60
	2	19.97	20.09	20.09	1.47	21.44	21.56	21.56
	3	21.02	21.09	21.10	1.47	22.49	22.56	22.57
	4	20.01	20.11	20.15	1.47	21.48	21.58	21.62
	5	21.86	21.98	21.97	1.47	23.33	23.45	23.44
Limit	30.00dBm							

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Test Site	WZ-SR6	Test Engineer	Caitlin Chen
Test Date	2022/03/23	Test Band	WCDMA Band V

Mode	3GPP Subtest	Conducted Power (dBm)			Antenna Gain (dBi)	ERP (dBm)		
		Band V Channel				Band V Channel		
		4132	4182	4233		4132	4182	4233
WCDMA R99	1	23.09	23.04	22.99	2.68	23.62	23.57	23.52
HSDPA	1	22.04	22.04	21.98	2.68	22.57	22.57	22.51
	2	21.91	22.04	22.04	2.68	22.44	22.57	22.57
	3	21.58	21.54	21.56	2.68	22.11	22.07	22.09
	4	21.59	21.56	21.47	2.68	22.12	22.09	22.00
HSUPA	1	22.09	22.02	22.02	2.68	22.62	22.55	22.55
	2	20.10	20.06	20.01	2.68	20.63	20.59	20.54
	3	21.10	21.07	21.00	2.68	21.63	21.60	21.53
	4	20.09	20.05	19.99	2.68	20.62	20.58	20.52
	5	21.92	21.94	21.93	2.68	22.45	22.47	22.46
Limit	38.45dBm							


Note: The ERP (dBm) = Output Power (dBm) + Antenna Gain (dBi) – 2.15




### A.4 Band Edge Test Result

Test Site	WZ-SR6	Test Engineer	Caitlin Chen
Test Date	2022/04/02	Test Band	WCDMA Band II, IV, V


#### WCDMA Band II

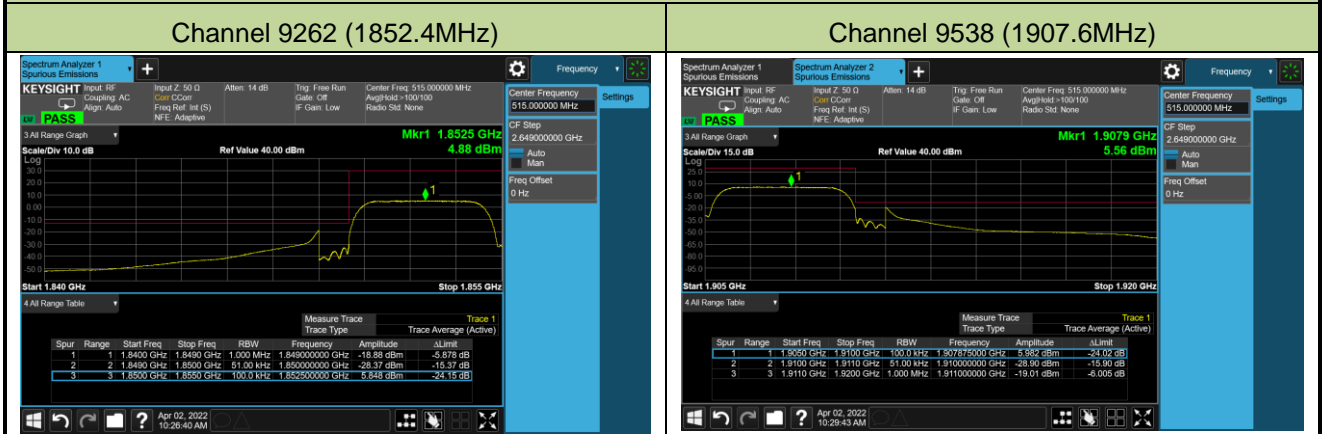

#### WCDMA Band IV

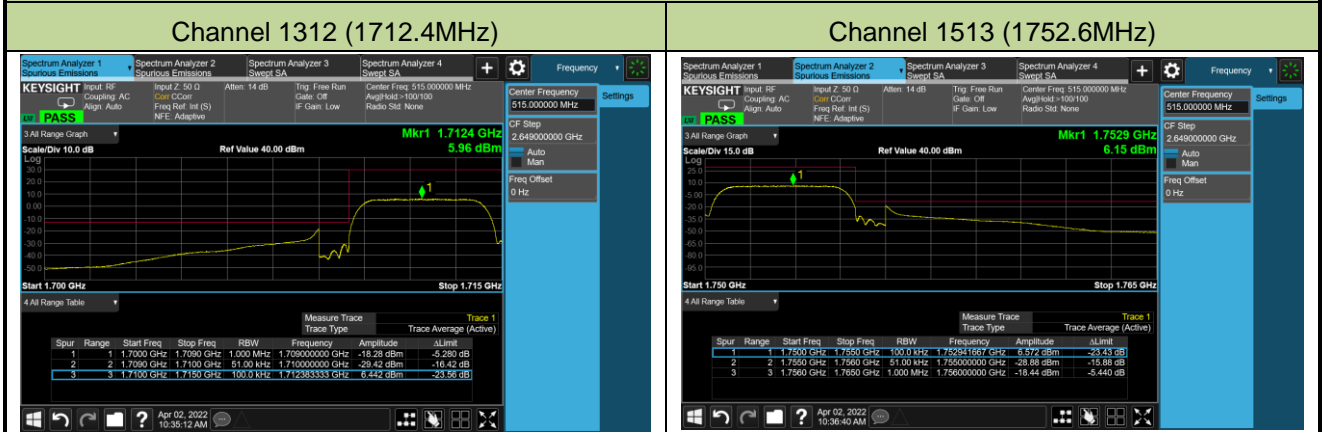

#### WCDMA Band V

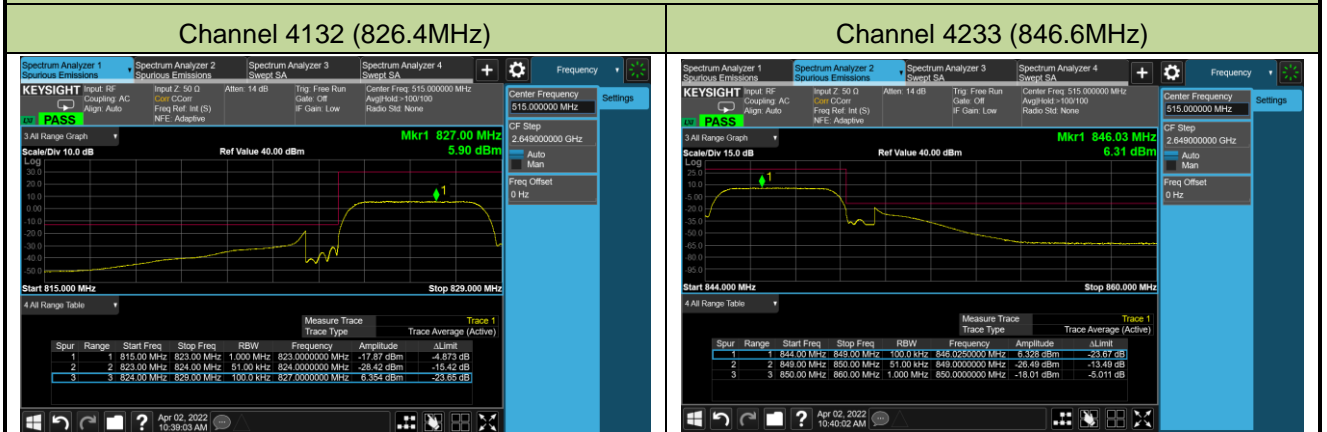


**A.5 Peak to Average Ratio Test Result**

Test Site	WZ-SR6	Test Engineer	Caitlin Chen
Test Date	2022/04/11 ~ 2022/04/12	Test Band	WCDMA Band II, IV, V


Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
1852.5	5	2.81	≤ 13.00	Pass
1880.0	5	2.93	≤ 13.00	Pass
1907.6	5	2.93	≤ 13.00	Pass
1712.4	5	2.86	≤ 13.00	Pass
1732.4	5	2.46	≤ 13.00	Pass
1752.6	5	2.78	≤ 13.00	Pass
826.4	5	2.76	≤ 13.00	Pass
836.4	5	2.68	≤ 13.00	Pass
846.6	5	2.56	≤ 13.00	Pass

## WCDMA Band II


## Channel 9262 (1852.4MHz)

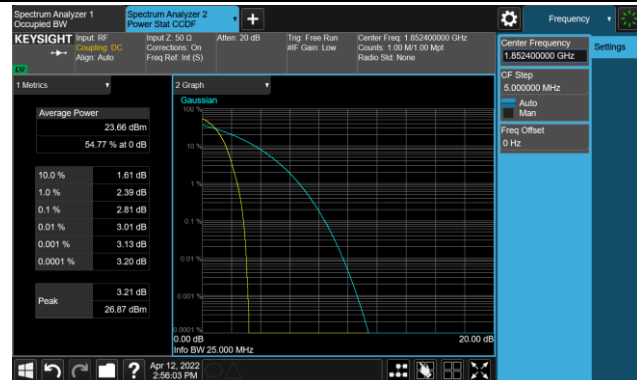

## Channel 9400 (1880.0MHz)

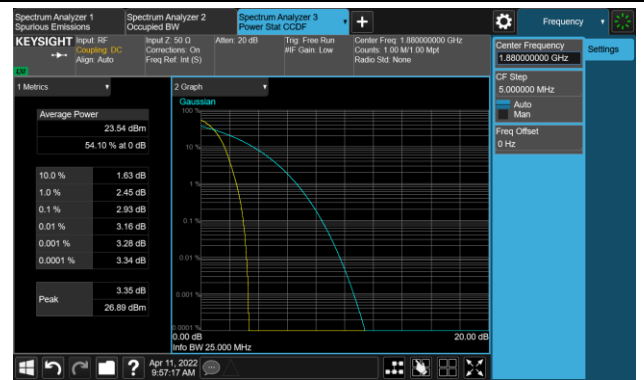


## Channel 9538 (1907.6MHz)

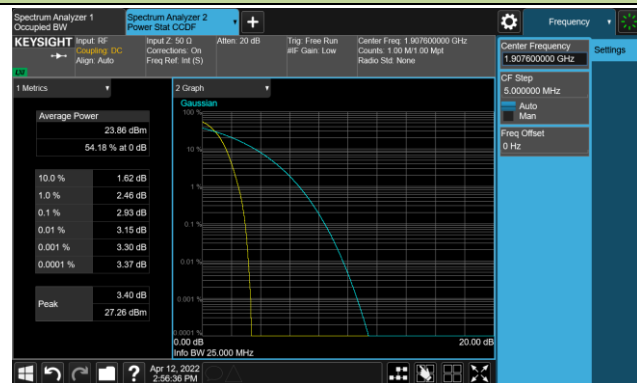


## WCDMA Band IV


## Channel 1312 (1712.4MHz)

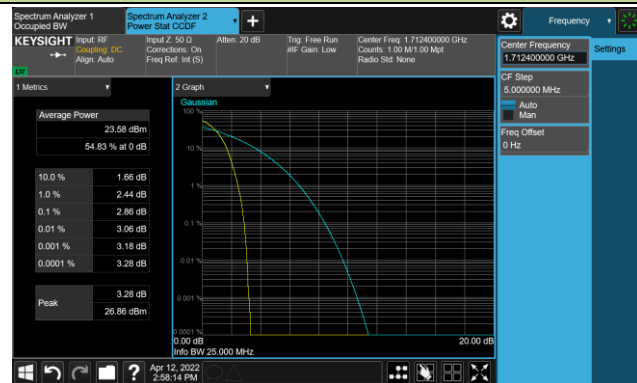

## Channel 1412 (1732.4MHz)

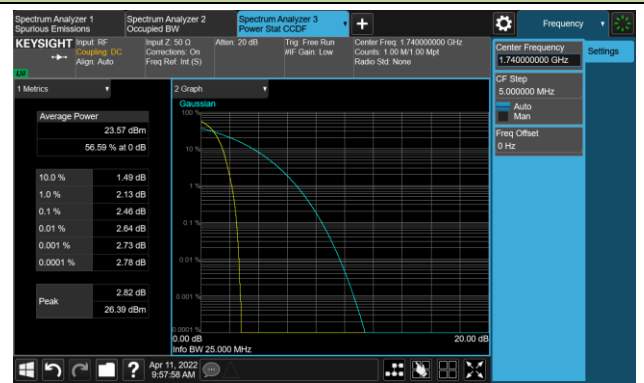


## Channel 1513 (1752.6MHz)

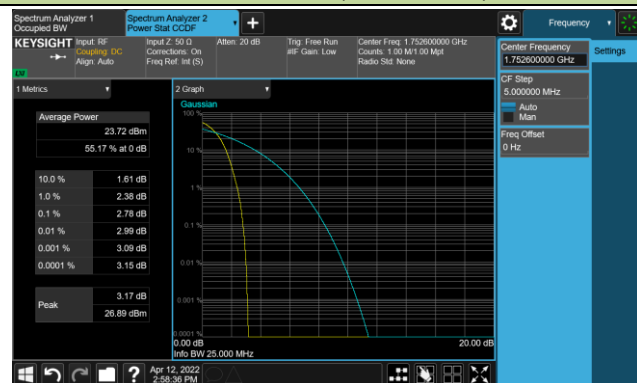


WCDMA Band V


Channel 4132 (826.4MHz)

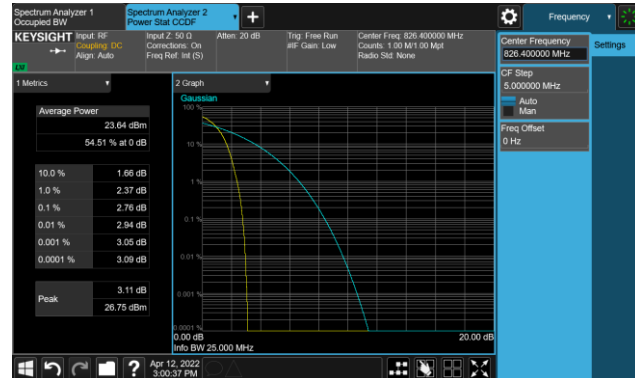

Channel 4183 (836.4MHz)

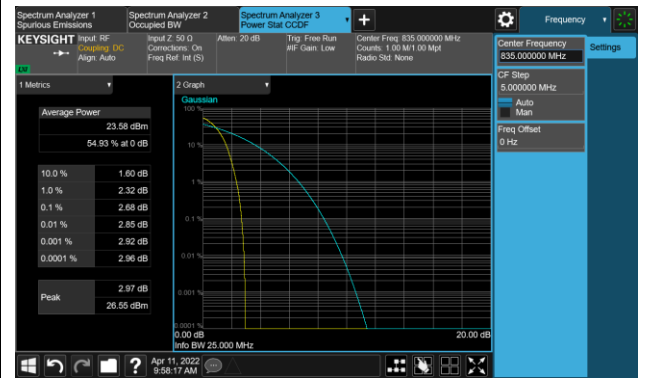


Channel 4233 (846.6MHz)

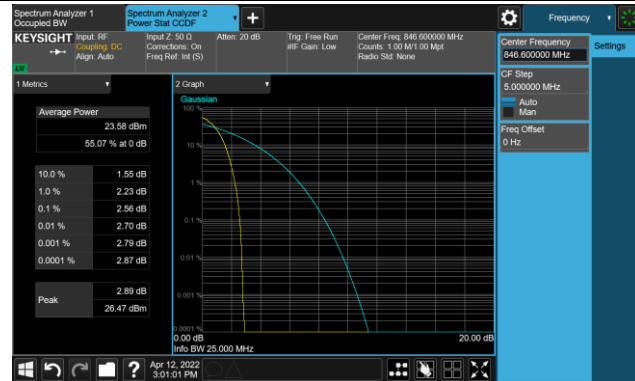



**A.6 Conducted Spurious Emissions Test Result**

Test Site	WZ-SR6	Test Engineer	Caitlin Chen
Test Date	2022/04/02 ~ 2022/04/11	Test Band	WCDMA Band II, IV, V

Mode	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
WCDMA Band II	1852.4	30 ~ 20000	-45.59	≤ -13.00	Pass
	1880.0	30 ~ 20000	-40.68	≤ -13.00	Pass
	1907.6	30 ~ 20000	-46.34	≤ -13.00	Pass
WCDMA Band IV	1712.4	30 ~ 20000	40.07	≤ -13.00	Pass
	1732.4	30 ~ 20000	-40.51	≤ -13.00	Pass
	1752.6	30 ~ 20000	-40.83	≤ -13.00	Pass
WCDMA Band V	826.4	30 ~ 10000	-44.66	≤ -13.00	Pass
	836.4	30 ~ 10000	-44.22	≤ -13.00	Pass
	846.6	30 ~ 10000	-45.50	≤ -13.00	Pass

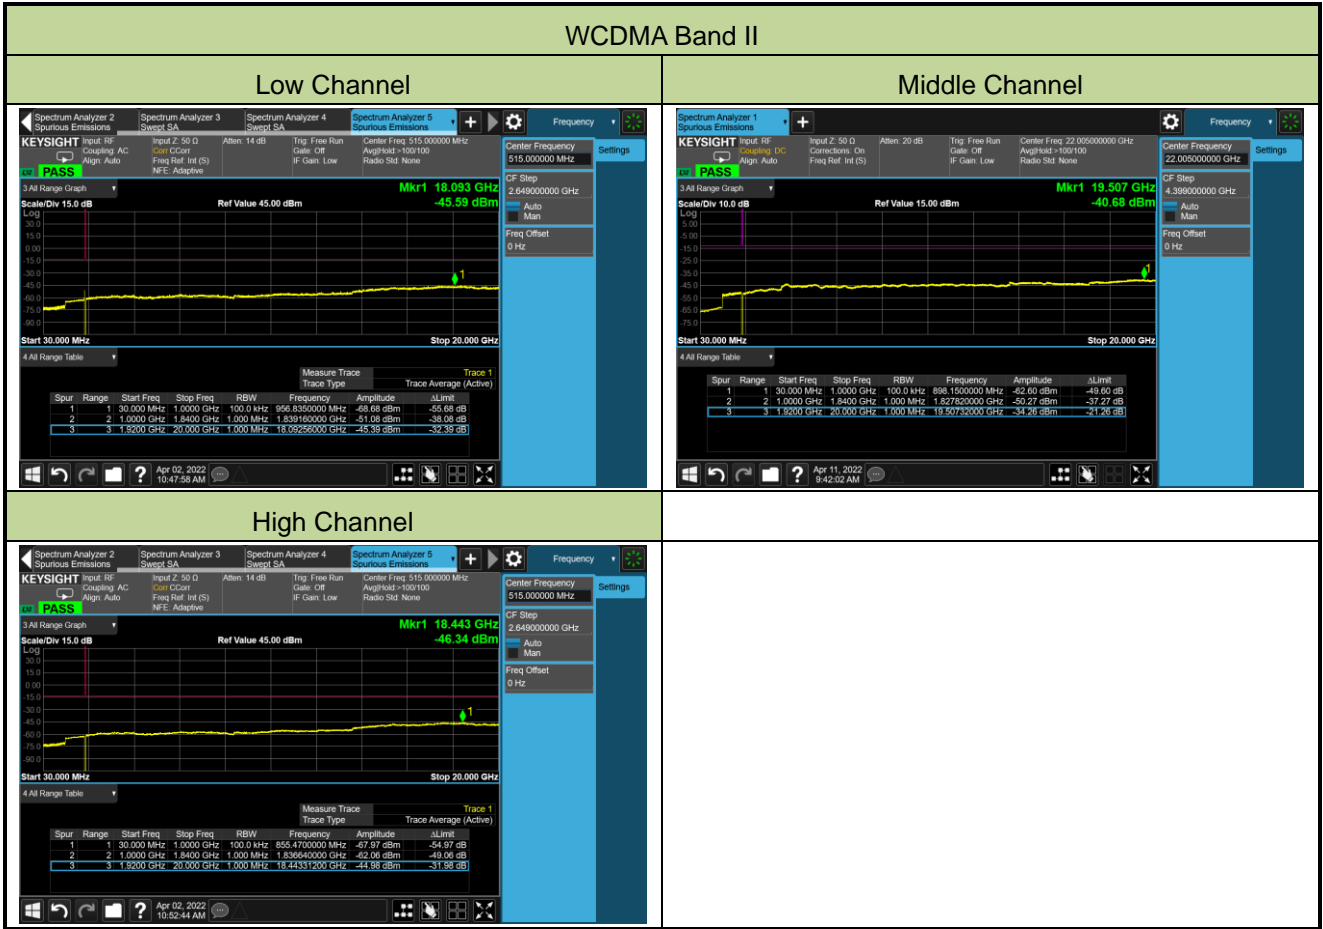

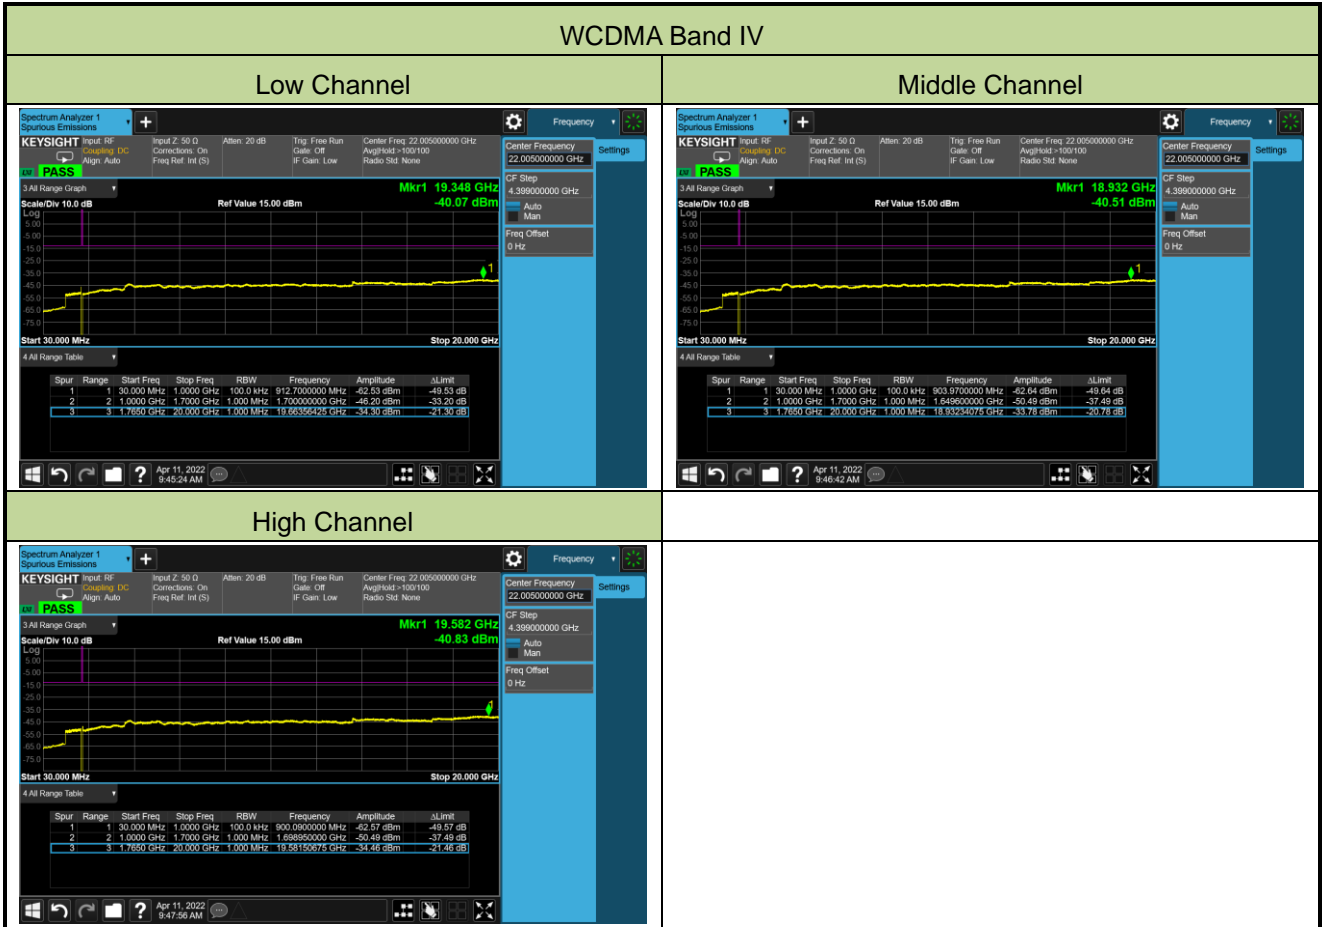

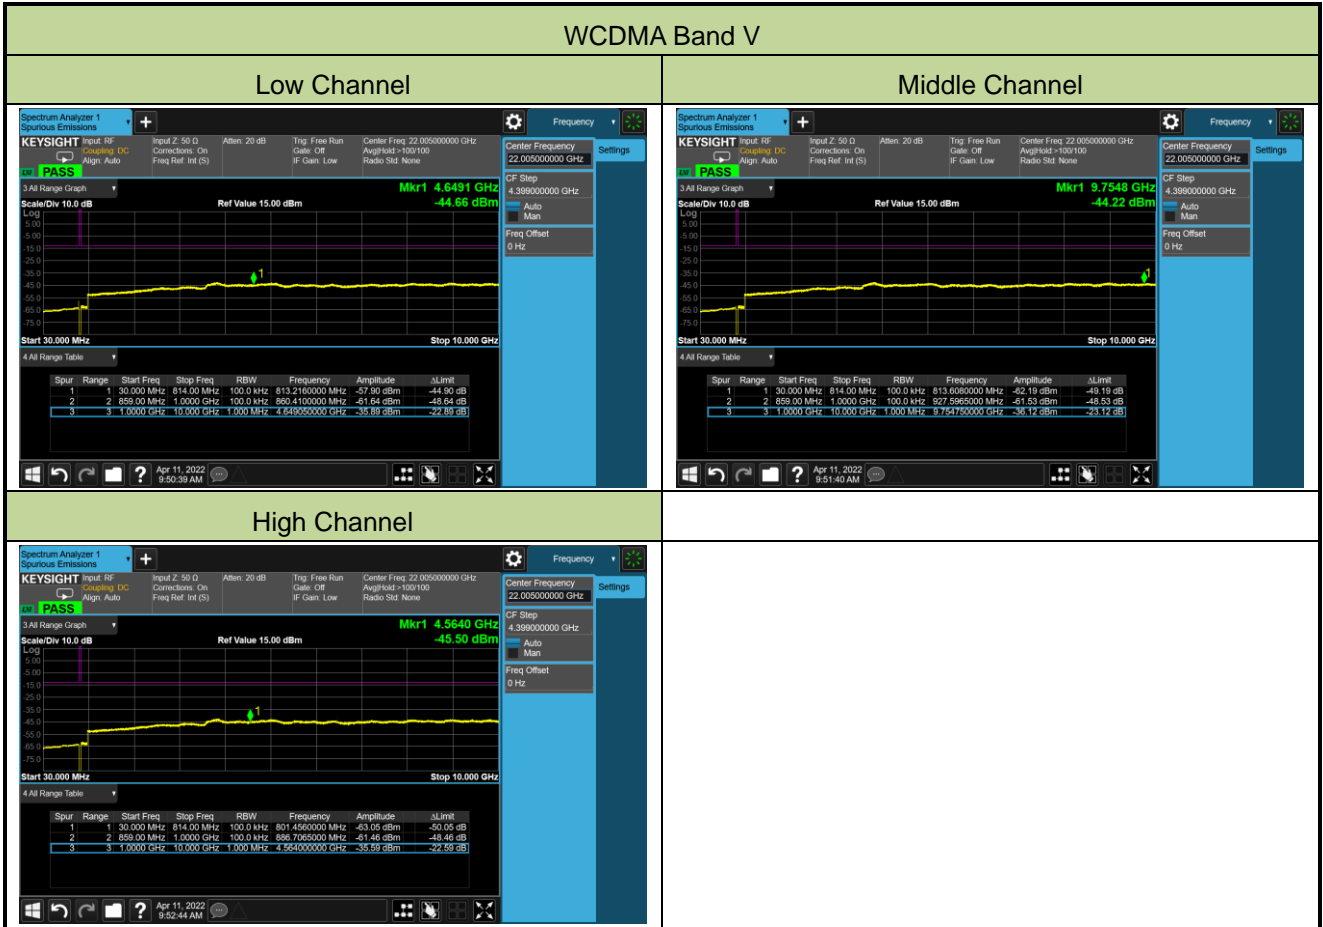



**A.7 Radiated Spurious Emissions Test Result**

Test Site	SIP-AC2	Test Engineer	Allen Zhou
Test Date	2022/04/22 ~ 2022/05/12	Test Band	WCDMA Band II

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
<b>Low Channel</b>							
138.2	4.9	17.5	22.4	82.3	-59.9	Peak	Horizontal
938.9	4.5	30.1	34.6	82.3	-47.7	Peak	Horizontal
42.6	12.1	18.1	30.2	82.3	-52.1	Peak	Vertical
64.9	13.4	16.6	30.0	82.3	-52.3	Peak	Vertical
5556.0	52.1	-8.1	44.0	82.3	-38.3	Peak	Horizontal
16130.0	46.7	4.2	50.9	82.3	-31.4	Peak	Horizontal
5556.0	59.4	-8.1	51.3	82.3	-31.0	Peak	Vertical
16631.5	46.6	5.1	51.7	82.3	-30.6	Peak	Vertical
<b>Middle Channel</b>							
154.2	3.8	18.2	22.0	82.3	-60.3	Peak	Horizontal
780.3	4.7	28.3	33.0	82.3	-49.3	Peak	Horizontal
42.6	11.8	18.1	29.9	82.3	-52.4	Peak	Vertical
937.9	4.9	30.1	35.0	82.3	-47.3	Peak	Vertical
5641.0	51.7	-8.1	43.6	82.3	-38.7	Peak	Horizontal
8352.5	50.2	-4.2	46.0	82.3	-36.3	Peak	Horizontal
5641.0	61.2	-8.1	53.1	82.3	-29.2	Peak	Vertical
14251.5	46.9	2.5	49.4	82.3	-32.9	Peak	Vertical
<b>High Channel</b>							
64.9	5.5	16.6	22.1	82.3	-60.2	Peak	Horizontal
958.3	4.9	30.1	35.0	82.3	-47.3	Peak	Horizontal
42.6	11.7	18.1	29.8	82.3	-52.5	Peak	Vertical
942.8	5.0	30.1	35.1	82.3	-47.2	Peak	Vertical
5717.5	52.5	-8.0	44.5	82.3	-37.8	Peak	Horizontal
16529.5	46.6	5.0	51.6	82.3	-30.7	Peak	Horizontal
5726.0	61.1	-8.0	53.1	82.3	-29.2	Peak	Vertical
15305.5	46.7	4.2	50.9	82.3	-31.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB).

Test Site	SIP-AC2	Test Engineer	Allen Zhou
Test Date	2022/03/25~2022/04/07	Test Band	WCDMA Band IV

Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
<b>Low Channel</b>							
99.8	8.1	13.3	21.4	82.3	-60.9	Peak	Horizontal
148.3	3.1	18.2	21.3	82.3	-61.0	Peak	Horizontal
34.4	12.2	16.8	29.0	82.3	-53.3	Peak	Vertical
42.6	12.0	17.6	29.6	82.3	-52.7	Peak	Vertical
3422.5	54.2	-11.0	43.2	82.3	-39.1	Peak	Horizontal
10775.0	41.8	7.5	49.3	82.3	-33.0	Peak	Horizontal
3422.5	54.5	-11.0	43.5	82.3	-38.8	Peak	Vertical
6856.5	49.9	0.0	49.9	82.3	-32.4	Peak	Vertical
<b>Middle Channel</b>							
99.8	6.4	13.3	19.7	82.3	-62.6	Peak	Horizontal
148.3	3.6	18.2	21.8	82.3	-60.5	Peak	Horizontal
34.4	11.6	16.8	28.4	82.3	-53.9	Peak	Vertical
42.6	12.7	17.6	30.3	82.3	-52.0	Peak	Vertical
3482.0	52.8	-10.6	42.2	82.3	-40.1	Peak	Horizontal
6958.5	45.8	0.7	46.5	82.3	-35.8	Peak	Horizontal
5216.0	47.0	-4.9	42.1	82.3	-40.2	Peak	Vertical
6958.5	51.9	0.7	52.6	82.3	-29.7	Peak	Vertical
<b>High Channel</b>							
42.6	1.9	17.6	19.5	82.3	-62.8	Peak	Horizontal
99.8	6.5	13.3	19.8	82.3	-62.5	Peak	Horizontal
33.9	11.4	16.8	28.2	82.3	-54.1	Peak	Vertical
42.6	12.7	17.6	30.3	82.3	-52.0	Peak	Vertical
3507.5	53.7	-10.3	43.4	82.3	-38.9	Peak	Horizontal
7434.5	42.7	2.3	45.0	82.3	-37.3	Peak	Horizontal
3507.5	54.9	-10.3	44.6	82.3	-37.7	Peak	Vertical
7009.5	50.2	0.3	50.5	82.3	-31.8	Peak	Vertical

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB).

Test Site	SIP-AC2	Test Engineer	Allen Zhou
Test Date	2022/03/25~2022/04/07	Test Band	WCDMA Band V

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
<b>Low Channel</b>							
42.6	1.8	17.6	19.4	82.3	-62.9	Peak	Horizontal
99.8	7.2	13.3	20.5	82.3	-61.8	Peak	Horizontal
33.9	12.6	16.8	29.4	82.3	-52.9	Peak	Vertical
42.6	11.8	17.6	29.4	82.3	-52.9	Peak	Vertical
5029.0	45.3	-4.9	40.4	82.3	-41.9	Peak	Horizontal
7332.5	43.2	1.7	44.9	82.3	-37.4	Peak	Horizontal
7460.0	42.8	2.5	45.3	82.3	-37.0	Peak	Vertical
8624.5	43.3	3.2	46.5	82.3	-35.8	Peak	Vertical
<b>Middle Channel</b>							
99.8	7.3	13.3	20.6	82.3	-61.7	Peak	Horizontal
148.3	4.3	18.2	22.5	82.3	-59.8	Peak	Horizontal
33.9	12.3	16.8	29.1	82.3	-53.2	Peak	Vertical
42.6	12.8	17.6	30.4	82.3	-51.9	Peak	Vertical
7060.5	43.7	0.6	44.3	82.3	-38.0	Peak	Horizontal
8106.0	43.4	3.0	46.4	82.3	-35.9	Peak	Horizontal
7613.0	41.1	1.6	42.7	82.3	-39.6	Peak	Vertical
9806.0	42.5	5.6	48.1	82.3	-34.2	Peak	Vertical
<b>High Channel</b>							
42.6	2.4	17.6	20.0	82.3	-62.3	Peak	Horizontal
99.8	7.5	13.3	20.8	82.3	-61.5	Peak	Horizontal
34.4	12.3	16.8	29.1	82.3	-53.2	Peak	Vertical
42.6	12.1	17.6	29.7	82.3	-52.6	Peak	Vertical
8726.5	42.5	3.5	46.0	82.3	-36.3	Peak	Horizontal
10860.0	41.6	7.6	49.2	82.3	-33.1	Peak	Horizontal
7451.5	42.6	2.4	45.0	82.3	-37.3	Peak	Vertical
10401.0	43.1	6.6	49.7	82.3	-32.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB).

## **Appendix B - Test Setup Photograph**

Refer to "2203RSU046-UT" file.

## Appendix C - EUT Photograph

Refer to "2203RSU046-UE" file.

---

The End