

FCC Part 15C Measurement and Test Report

For

TIC Audio Inc

15224 Stafford Street, City of Industry, CA 91744

FCC ID: 2AJNG-AMP100

FCC Rule(s):	<u>FCC Part 15.247</u>
Product Description:	<u>Outdoor Wifi&Bluetooth Receiver-Amplifier</u>
Tested Model:	<u>AMP100</u>
Report No.:	<u>STRD1806065I-3</u>
Sample Receipt Date:	<u>2018-07-09</u>
Tested Date:	<u>2018-07-10 to 2018-07-26</u>
Issued Date:	<u>2018-07-26</u>
Tested By:	<u>Long Tang/ Engineer</u> <i>Long Tang</i>
Reviewed By:	<u>Silin Chen / EMC Manager</u> <i>Silin Chen</i>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> <i>Jandy So</i>
Prepared By:	

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	6
1.7 TEST EQUIPMENT LIST AND DETAILS	7
2. SUMMARY OF TEST RESULTS	8
3. RF EXPOSURE	9
3.1 STANDARD APPLICABLE	9
3.2 TEST RESULT	9
4. ANTENNA REQUIREMENT	10
4.1 STANDARD APPLICABLE	10
4.2 EVALUATION INFORMATION	10
5. POWER SPECTRAL DENSITY	11
5.1 STANDARD APPLICABLE	11
5.2 TEST PROCEDURE	11
5.3 SUMMARY OF TEST RESULTS/PLOTS	11
6. 6DB BANDWIDTH	13
6.1 STANDARD APPLICABLE	13
6.2 TEST PROCEDURE	13
6.3 SUMMARY OF TEST RESULTS/PLOTS	13
7. RF OUTPUT POWER	15
7.1 STANDARD APPLICABLE	15
7.2 TEST PROCEDURE	15
7.3 SUMMARY OF TEST RESULTS/PLOTS	15
8. FIELD STRENGTH OF SPURIOUS EMISSIONS	17
8.1 STANDARD APPLICABLE	17
8.2 TEST PROCEDURE	17
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	18
8.4 SUMMARY OF TEST RESULTS/PLOTS	18
9. OUT OF BAND EMISSIONS	26
9.1 STANDARD APPLICABLE	26
9.2 TEST PROCEDURE	26
9.3 SUMMARY OF TEST RESULTS/PLOTS	27
10. CONDUCTED EMISSIONS	32
10.1 TEST PROCEDURE	32
10.2 BASIC TEST SETUP BLOCK DIAGRAM	32
10.3 TEST RECEIVER SETUP	32
10.4 SUMMARY OF TEST RESULTS/PLOTS	32

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: TIC Audio Inc
 Address of applicant: 15224 Stafford Street, City of Industry, CA 91744

Manufacturer: ZhangZhou Yile Electronics Technology Co., Ltd
 Address of manufacturer: Lantian Industrial District, Zhangzhou, Fujian, China

General Description of EUT	
Product Name:	Outdoor Wifi&Bluetooth Receiver-Amplifier
Brand Name:	TIC
Model No.:	AMP100
Adding Model(s):	APM50, AMP6, AMP8, AMP10, AMP16, AMP18, AMP28, AMP150, AMP200, AMP66, AMP68, AMP86, AMP88, AMP98, WBR1, WBR2, WBR5, WBR6, WBR8, WBR10, WBR12, WBR16, WBR66, WBR68, WBR86, WBR88, WB6, WB8, WB16, WB18, WB66, WB60, WB68, WB86, WB88, WB98, WB80, WB36, WB38, WB5, WB4, WB3, WB1, WB2, WB7, WB17, WB26, WB28, WB38, WB48, WBLS6, WBLS8, WBLS10, WBLS16, WBLS66, WBLS68, WBLS88, WBLS98, WBLS86, WBLS78, WBLS77, WBLS80, WBP6, WBP5, WBP8, WBP10, WBP16, WBP18, WBP66, WBP68, WBP86, WBP88, WBP77, WBP98
Rated Voltage:	DC20V,4.5A
Battery:	/
Power Adapter:	Model:OWA-90U-20 INPUT:AC100-240V 1.1A 50/60Hz OUTPUT:DC20V,4.5A
<p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model AMP100, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Bluetooth Version:	V4.2 (BLE mode)
Frequency Range:	2402-2480MHz
RF Output Power:	6.404dBm (Conducted)
Data Rate:	1Mbps
Modulation:	GFSK
Quantity of Channels:	40
Channel Separation:	2MHz
Type of Antenna:	SMA-reverse
Antenna Gain:	3.0dBi
Lowest Internal Frequency of EUT:	26MHz

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

558074 D01 DTS Meas Guidance v04: GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER SECTION 15.247

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 DTS Meas Guidance v04

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low	2402MHz
TM2	Middle	2440MHz
TM3	High	2480MHz

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	±0.42dB
Occupied Bandwidth	Conducted	±1.5%
Power Spectral Density	Conducted	±1.8dB
Conducted Spurious Emission	Conducted	±2.17dB
Conducted Emissions	Conducted	9-150kHz ±3.74dB
		0.15-30MHz ±3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz ±4.52dB
		0.2-1GHz ±5.56dB
		1-6GHz ±3.84dB
		6-18GHz ±3.92dB

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has a SMA-reverse antenna, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure




According to the KDB 558074, the test method of power spectral density as below:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 Summary of Test Results/Plots

Test Mode	Test Channel	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
GFSK(BLE)	Low	-9.453	8
	Middle	-8.492	8
	High	-8.426	8

Please refer to the following test plots:
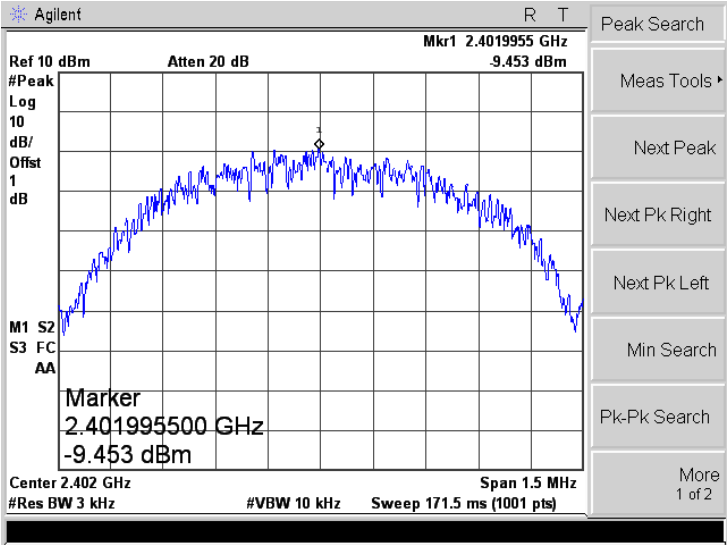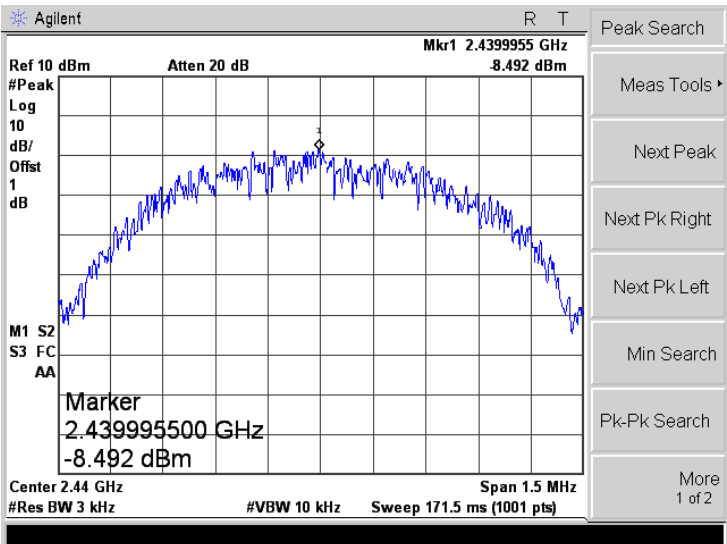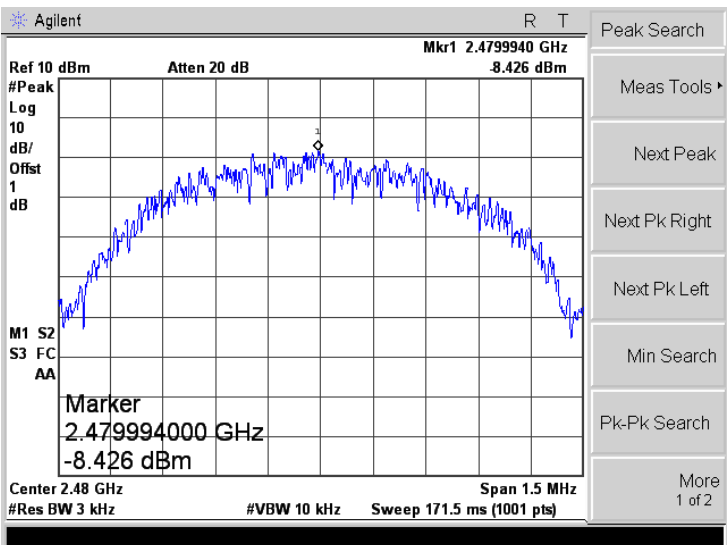
<p>Low</p>	 <p>Agilent R T Peak Search Ref 10 dBm Atten 20 dB Mkr1 2.4019955 GHz -9.453 dBm #Peak Log 10 dB/ Offst 1 dB Marker 2.401995500 GHz -9.453 dBm Center 2.402 GHz Span 1.5 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 171.5 ms (1001 pts)</p>
<p>Middle</p>	 <p>Agilent R T Peak Search Ref 10 dBm Atten 20 dB Mkr1 2.4399955 GHz -8.492 dBm #Peak Log 10 dB/ Offst 1 dB Marker 2.439995500 GHz -8.492 dBm Center 2.44 GHz Span 1.5 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 171.5 ms (1001 pts)</p>
<p>High</p>	 <p>Agilent R T Peak Search Ref 10 dBm Atten 20 dB Mkr1 2.4799940 GHz -8.426 dBm #Peak Log 10 dB/ Offst 1 dB Marker 2.479994000 GHz -8.426 dBm Center 2.48 GHz Span 1.5 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 171.5 ms (1001 pts)</p>

6. 6dB Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.




6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 Summary of Test Results/Plots

Test Mode	Test Channel	6 dB Bandwidth kHz	Limit kHz
GFSK(BLE)	Low	734.558	≥ 500
	Middle	734.136	≥ 500
	High	735.417	≥ 500

Please refer to the following test plots:
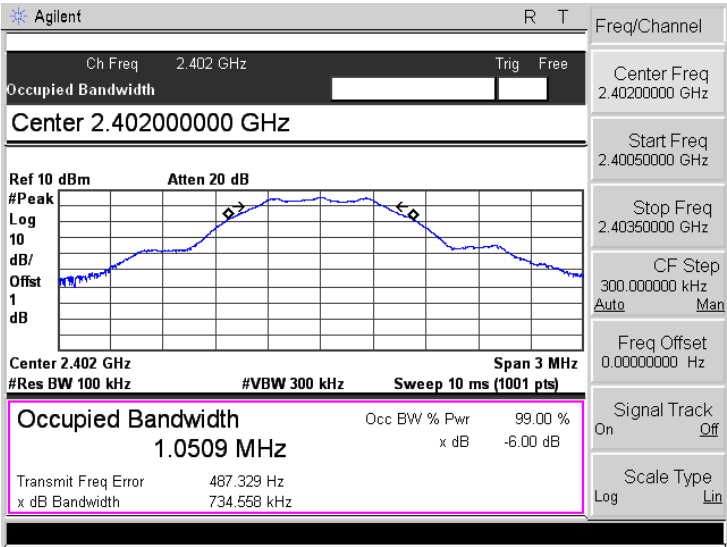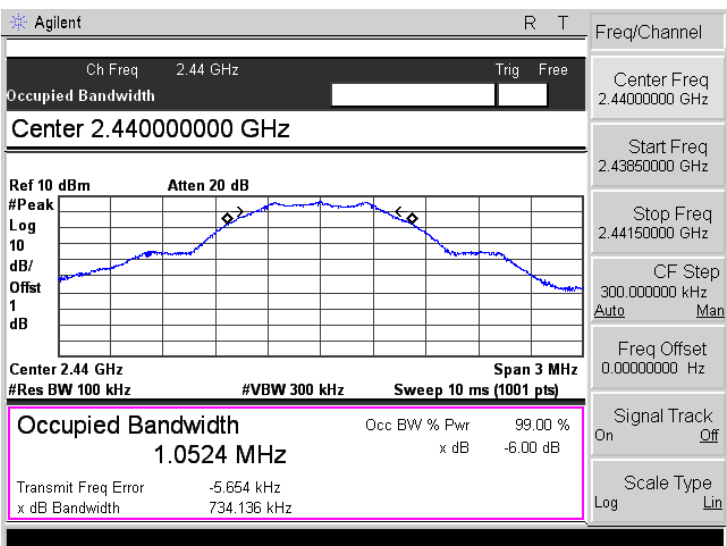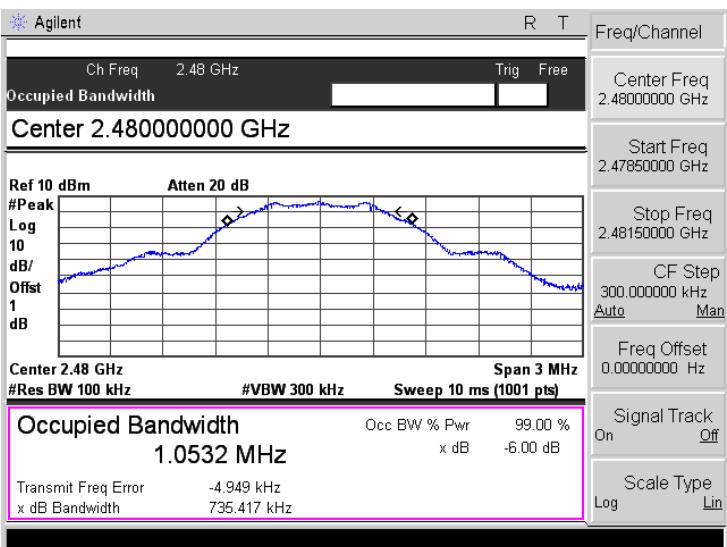
<p style="text-align: center;">Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.40200000 GHz</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 1.0509 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 487.329 Hz x dB Bandwidth 734.568 kHz</p> <p>Freq/Channel</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.40050000 GHz</p> <p>Stop Freq 2.40350000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p style="text-align: center;">Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.44 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.44000000 GHz</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.44 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 1.0524 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -5.654 kHz x dB Bandwidth 734.136 kHz</p> <p>Freq/Channel</p> <p>Center Freq 2.44000000 GHz</p> <p>Start Freq 2.43850000 GHz</p> <p>Stop Freq 2.44150000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p style="text-align: center;">High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.48000000 GHz</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.48 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 1.0532 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -4.949 kHz x dB Bandwidth 735.417 kHz</p> <p>Freq/Channel</p> <p>Center Freq 2.48000000 GHz</p> <p>Start Freq 2.47850000 GHz</p> <p>Stop Freq 2.48150000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Procedure




According to section KDB-558074 D01 v04 section 9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

7.3 Summary of Test Results/Plots

Test Mode	Test Channel	Reading dBm	Output Power mW	Limit mW
GFSK(BLE)	Low	5.445	3.50	1000
	Middle	6.384	4.35	1000
	High	6.404	4.37	1000

Note: the antenna gain of 3.0dBi less than 6dBi maximum permission antenna gain value based on 1 watt peak output power limit.
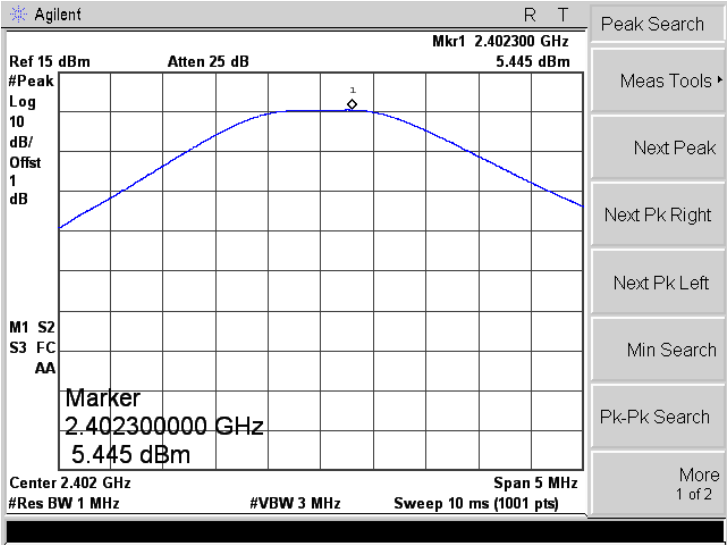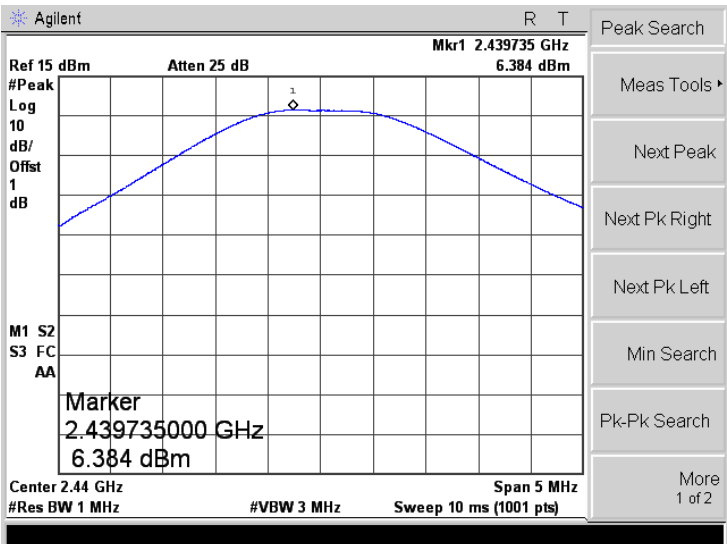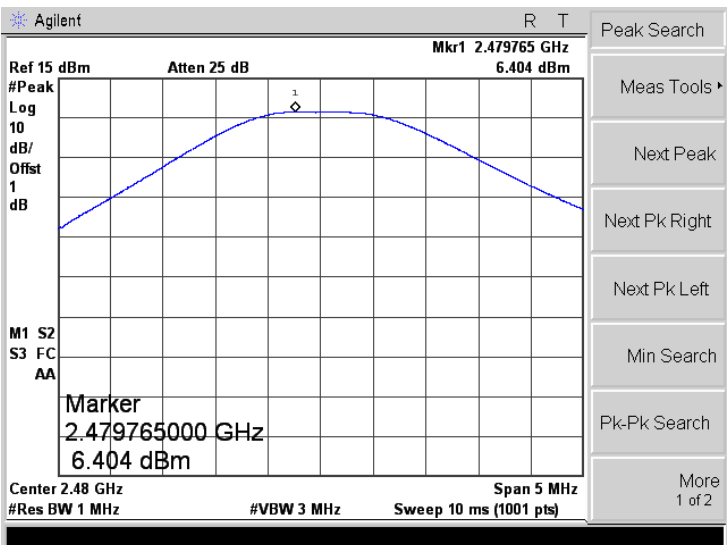
<p>Low</p>	 <p>Agilent R T Peak Search Ref 15 dBm Atten 25 dB Mkr1 2.402300 GHz 5.445 dBm #Peak Log 10 dB/Offst 1 dB Marker 2.402300000 GHz 5.445 dBm Center 2.402 GHz Span 5 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p>
<p>Middle</p>	 <p>Agilent R T Peak Search Ref 15 dBm Atten 25 dB Mkr1 2.439735 GHz 6.384 dBm #Peak Log 10 dB/Offst 1 dB Marker 2.439735000 GHz 6.384 dBm Center 2.44 GHz Span 5 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p>
<p>High</p>	 <p>Agilent R T Peak Search Ref 15 dBm Atten 25 dB Mkr1 2.479765 GHz 6.404 dBm #Peak Log 10 dB/Offst 1 dB Marker 2.479765000 GHz 6.404 dBm Center 2.48 GHz Span 5 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p>

8. Field Strength of Spurious Emissions

8.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

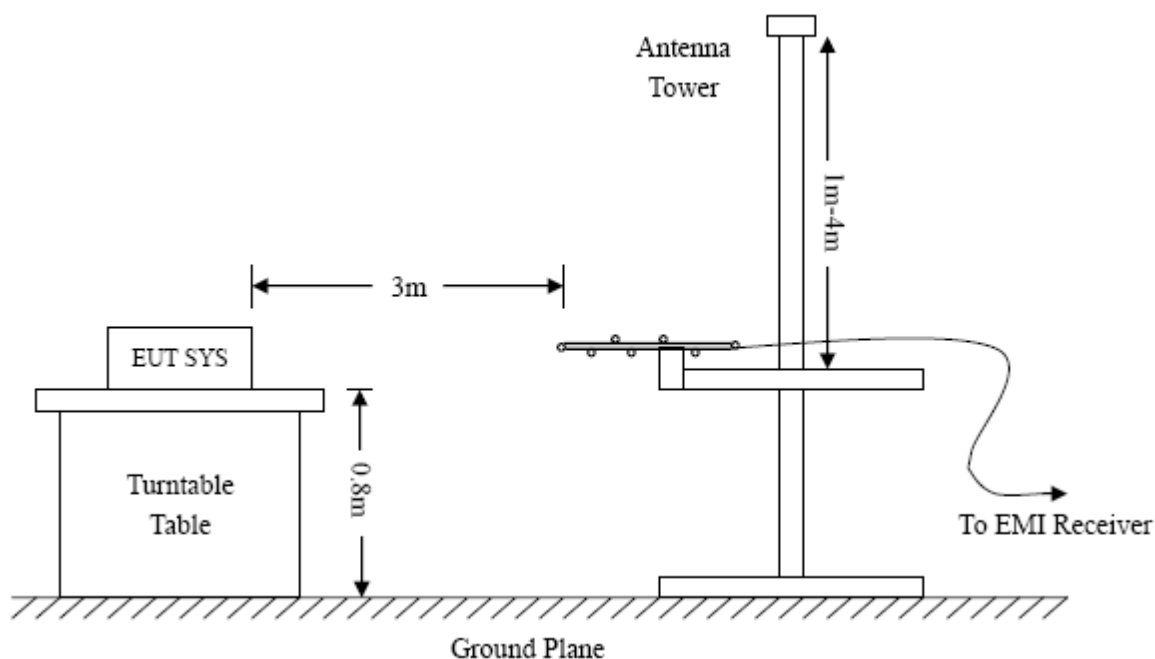

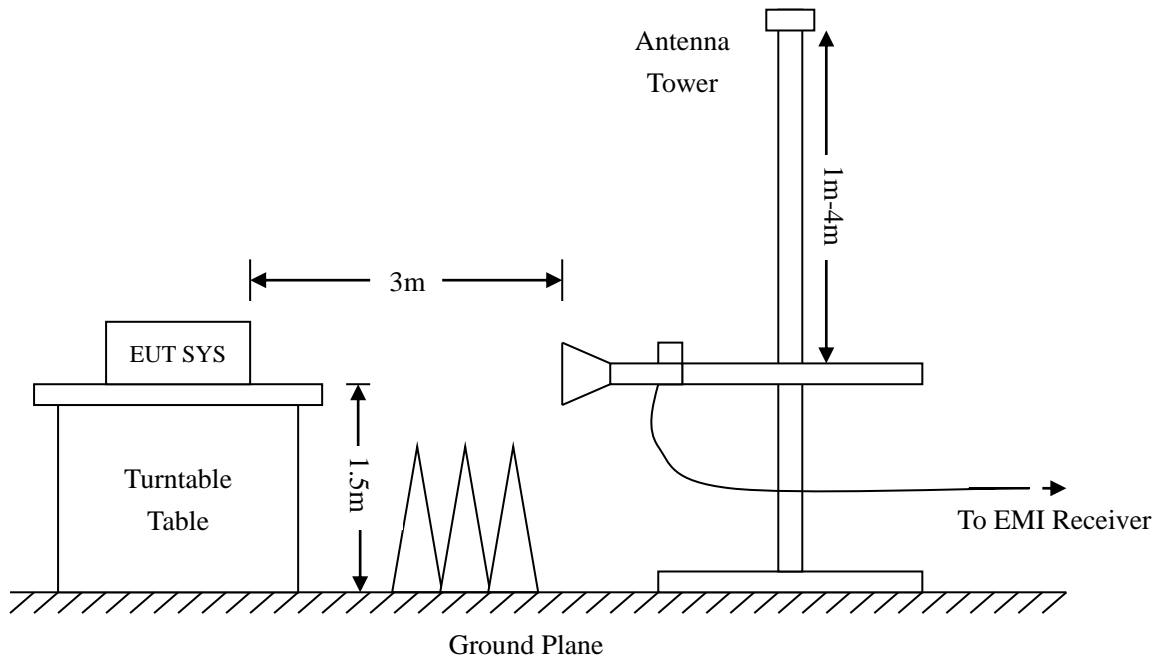

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of $-6\text{dB}\mu\text{V}$ means the emission is $6\text{dB}\mu\text{V}$ below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.4 Summary of Test Results/Plots

Note: This EUT was tested in 3 orthogonal positions and the external antenna was manipulated. Then the worst case position data was reported.


➤ Spurious Emissions Below 1GHz

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

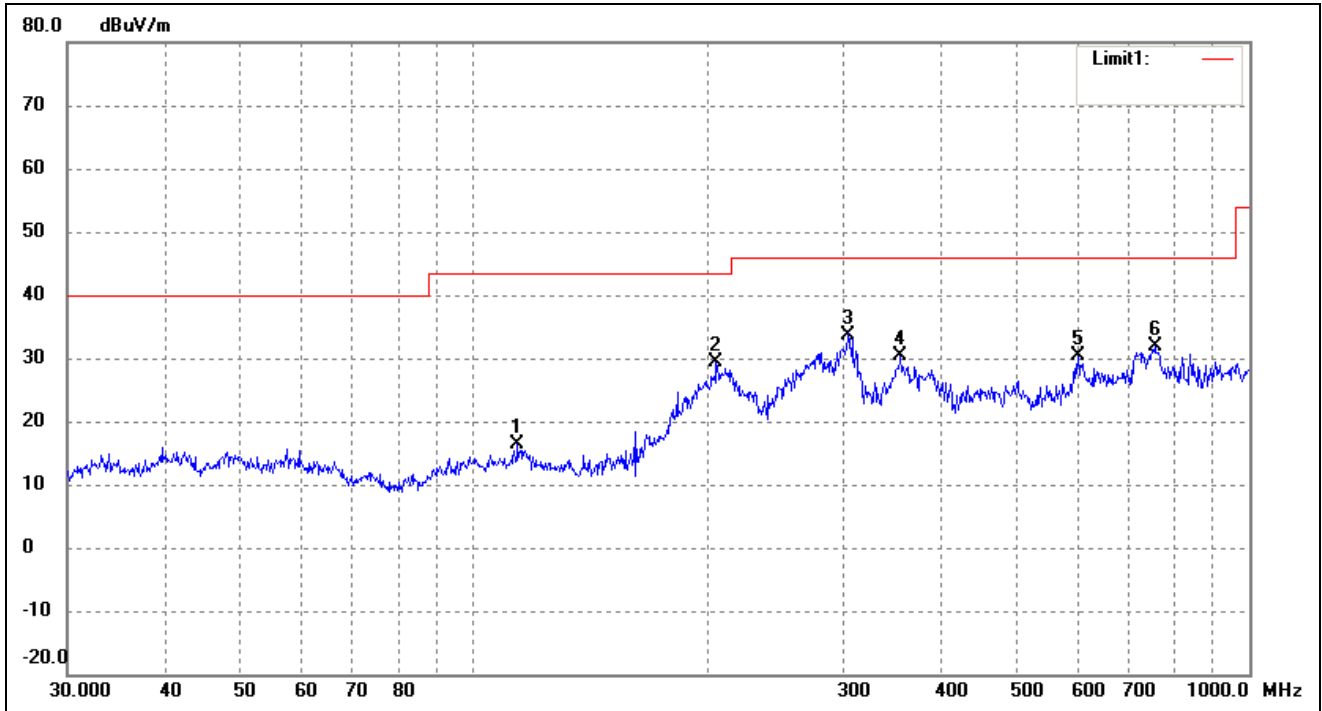


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	114.1138	34.26	-17.94	16.32	43.50	-27.18	324	100	peak
2	205.6751	46.54	-17.26	29.28	43.50	-14.22	98	100	peak
3	304.6099	41.66	-7.91	33.75	46.00	-12.25	291	100	peak
4	355.4273	38.62	-8.34	30.28	46.00	-15.72	90	100	peak
5	601.4265	32.93	-2.66	30.27	46.00	-15.73	353	100	peak
6	755.3873	35.07	-3.07	32.00	46.00	-14.00	110	100	peak

Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

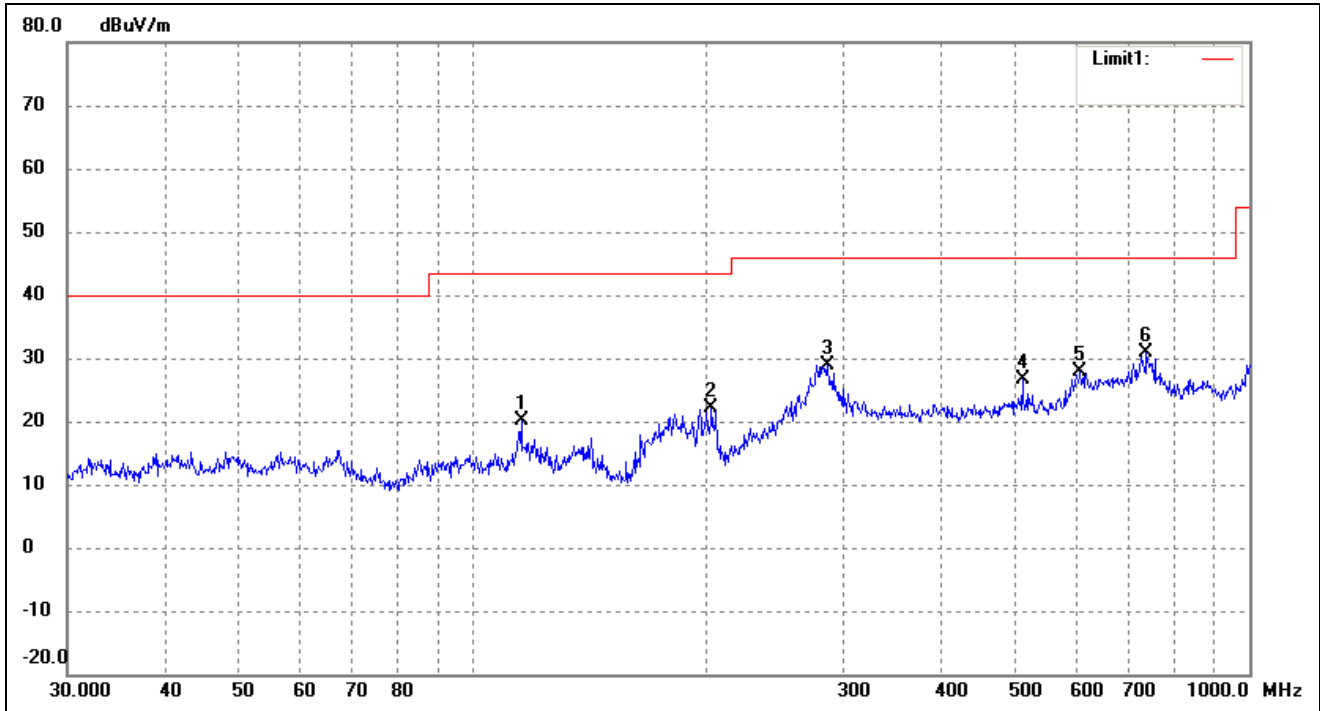


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	115.3205	38.06	-17.91	20.15	43.50	-23.35	181	100	peak
2	202.8104	40.04	-17.97	22.07	43.50	-21.43	206	100	peak
3	285.9778	37.63	-8.70	28.93	46.00	-17.07	85	100	peak
4	510.0436	34.07	-7.47	26.60	46.00	-19.40	209	100	peak
5	605.6592	30.79	-2.96	27.83	46.00	-18.17	339	100	peak
6	737.0714	33.31	-2.54	30.77	46.00	-15.23	121	100	peak

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

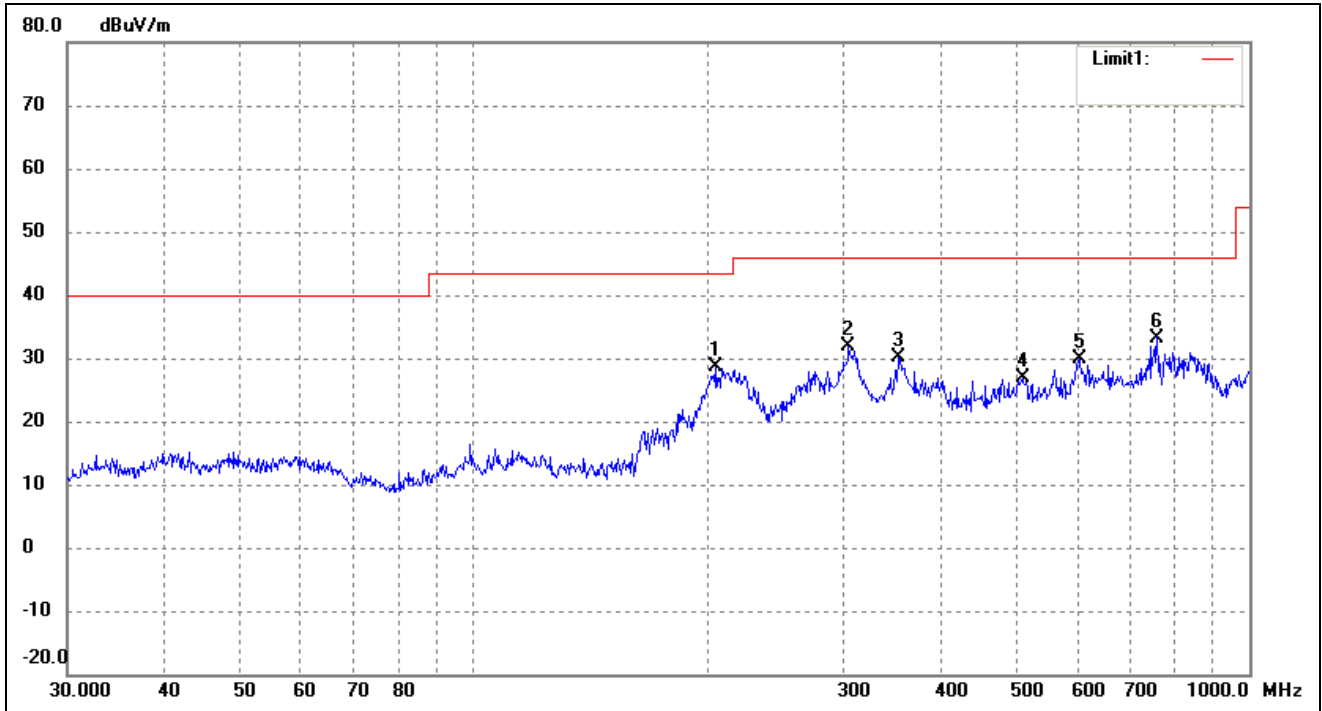


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	205.6751	45.90	-17.26	28.64	43.50	-14.86	81	100	peak
2	304.6099	39.78	-7.91	31.87	46.00	-14.13	100	100	peak
3	352.9433	38.52	-8.39	30.13	46.00	-15.87	55	100	peak
4	510.0436	34.23	-7.47	26.76	46.00	-19.24	119	100	peak
5	603.5392	32.56	-2.80	29.76	46.00	-16.24	260	100	peak
6	760.7036	36.57	-3.32	33.25	46.00	-12.75	111	100	peak

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

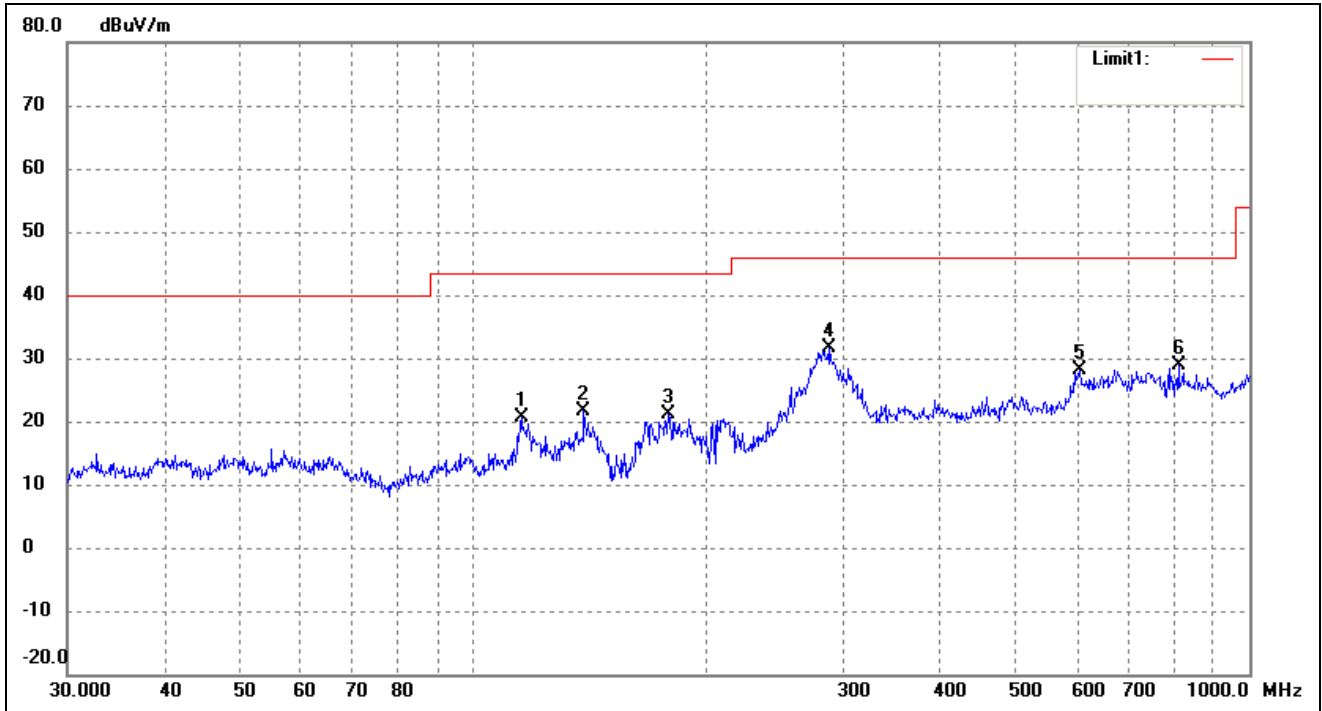


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	115.3205	38.60	-17.91	20.69	43.50	-22.81	245	100	peak
2	138.8735	40.57	-19.06	21.51	43.50	-21.99	96	100	peak
3	178.1327	40.69	-19.62	21.07	43.50	-22.43	55	100	peak
4	287.9904	40.17	-8.58	31.59	46.00	-14.41	102	100	peak
5	605.6592	30.99	-2.96	28.03	46.00	-17.97	286	100	peak
6	810.2654	33.75	-4.77	28.98	46.00	-17.02	102	100	peak

Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

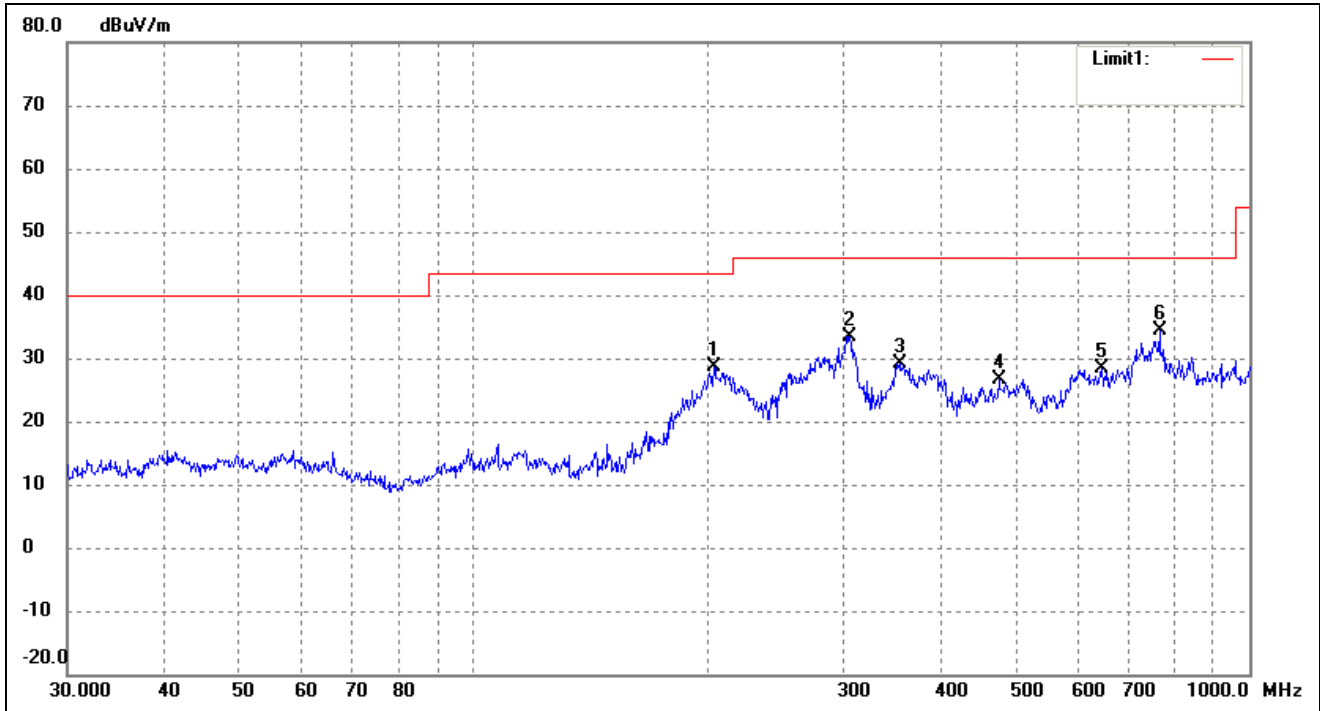

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	204.2377	46.28	-17.62	28.66	43.50	-14.84	311	100	peak
2	305.6800	41.33	-7.91	33.42	46.00	-12.58	332	100	peak
3	354.1831	37.56	-8.36	29.20	46.00	-16.80	73	100	peak
4	475.4991	34.79	-8.16	26.63	46.00	-19.37	258	100	peak
5	645.1195	31.86	-3.38	28.48	46.00	-17.52	129	100	peak
6	766.0571	37.95	-3.64	34.31	46.00	-11.69	197	100	peak

Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

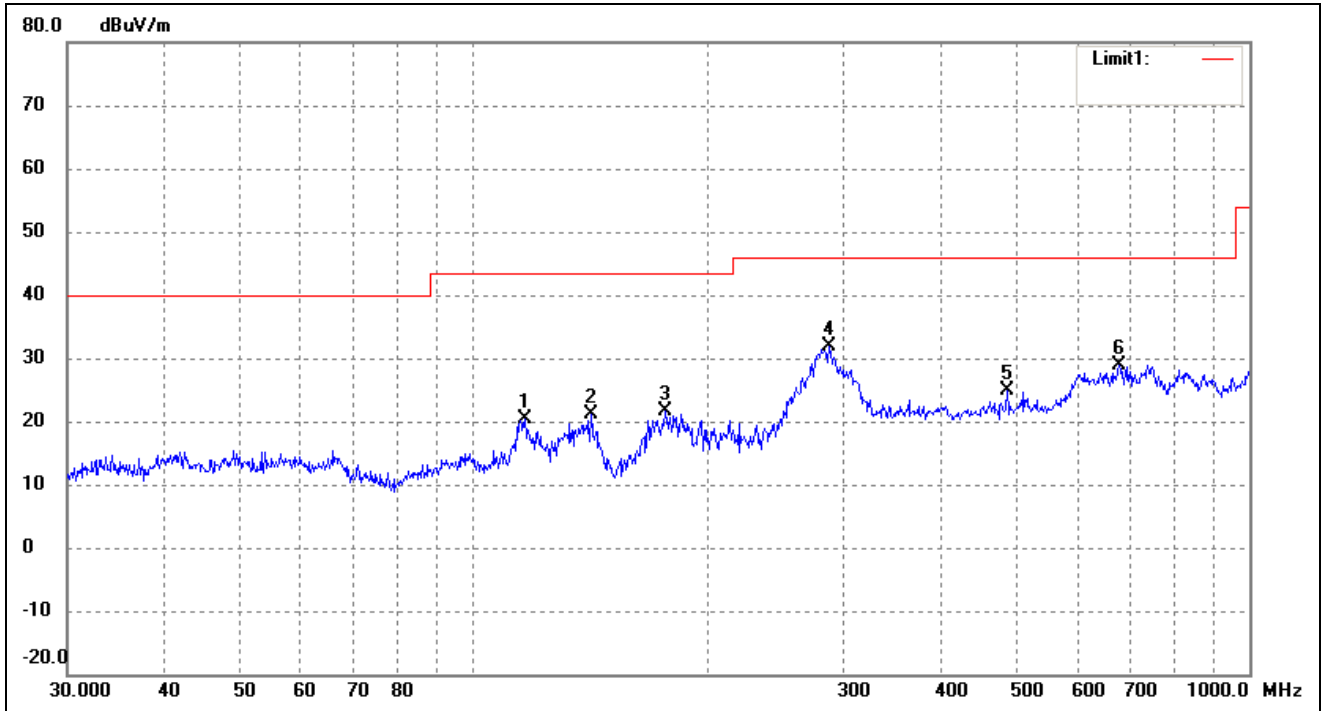

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	116.5401	38.30	-17.91	20.39	43.50	-23.11	80	100	peak
2	141.8262	40.30	-19.17	21.13	43.50	-22.37	169	100	peak
3	176.8878	41.25	-19.63	21.62	43.50	-21.88	145	100	peak
4	286.9823	40.54	-8.65	31.89	46.00	-14.11	98	100	peak
5	487.3151	33.00	-8.08	24.92	46.00	-21.08	219	100	peak
6	679.9600	31.63	-2.65	28.98	46.00	-17.02	231	100	peak

➤ Spurious Emissions Below 1GHz

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2402MHz							
4804	61.66	-3.59	58.07	74	-15.93	H	PK
4804	39.55	-3.59	35.96	54	-18.04	H	AV
7206	60.32	-0.52	59.8	74	-14.2	H	PK
7206	38.77	-0.52	38.25	54	-15.75	H	AV
4804	61	-3.59	57.41	74	-16.59	V	PK
4804	40.17	-3.59	36.58	54	-17.42	V	AV
7206	59.27	-0.52	58.75	74	-15.25	V	PK
7206	38.61	-0.52	38.09	54	-15.91	V	AV
Middle Channel-2440MHz							
4880	60.2	-3.49	56.71	74	-17.29	H	PK
4880	39.83	-3.49	36.34	54	-17.66	H	AV
7320	61.59	-0.47	61.12	74	-12.88	H	PK
7320	39.84	-0.47	39.37	54	-14.63	H	AV
4880	61.76	-3.49	58.27	74	-15.73	V	PK
4880	41.02	-3.49	37.53	54	-16.47	V	AV
7320	61.62	-0.47	61.15	74	-12.85	V	PK
7320	41.7	-0.47	41.23	54	-12.77	V	AV
High Channel-2480MHz							
4960	60.16	-3.41	56.75	74	-17.25	H	PK
4960	38.61	-3.41	35.2	54	-18.8	H	AV
7440	59.59	-0.42	59.17	74	-14.83	H	PK
7440	39.87	-0.42	39.45	54	-14.55	H	AV
4960	58.85	-3.41	55.44	74	-18.56	V	PK
4960	40.99	-3.41	37.58	54	-16.42	V	AV
7440	61.64	-0.42	61.22	74	-12.78	V	PK
7440	41.7	-0.42	41.28	54	-12.72	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074 D01 v04, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 v04, the conducted spurious emissions test method as follows:


1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW \geq 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.3 Summary of Test Results/Plots


➤ Radiated test

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

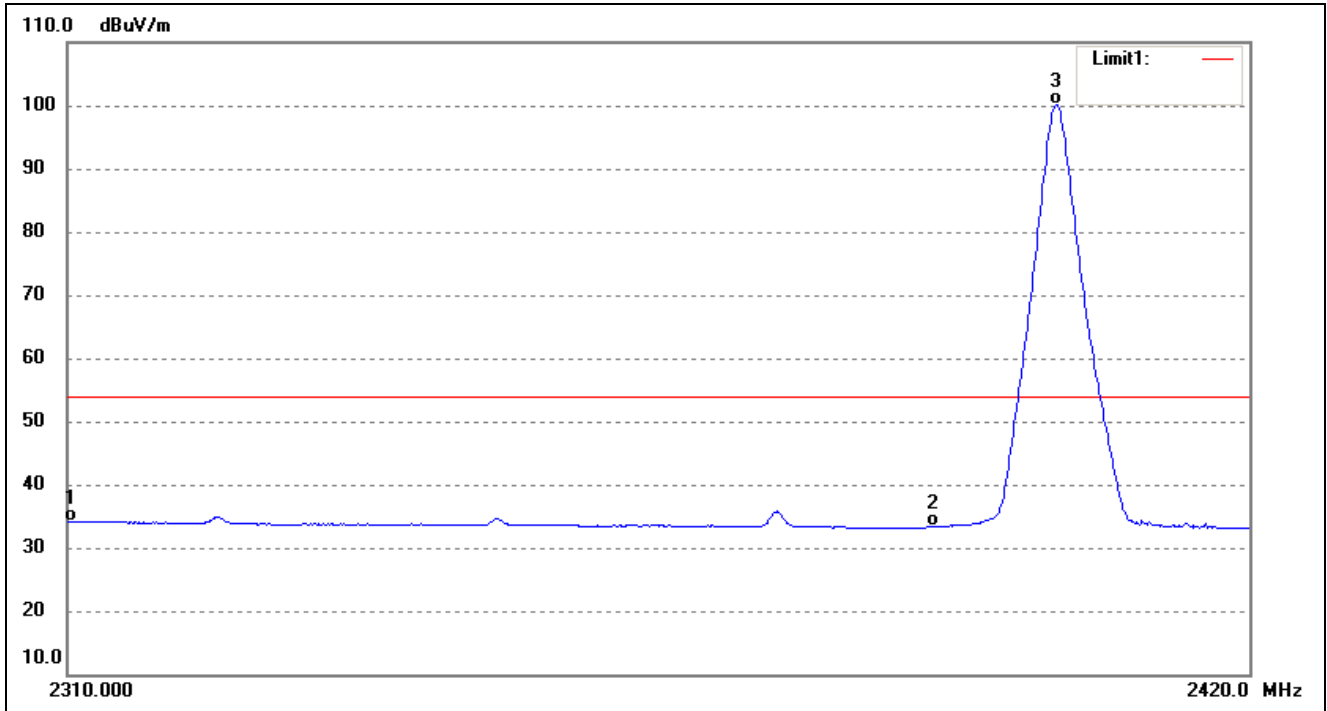


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	39.40	-5.28	34.12	54.00	-19.88	Average Detector
	2310.000	51.53	-5.28	46.25	74.00	-27.75	Peak Detector
2	2390.000	39.44	-6.12	33.32	54.00	-20.68	Average Detector
	2390.000	51.15	-6.12	45.03	74.00	-28.97	Peak Detector
3	2401.719	106.46	-6.24	100.22	/	/	Average Detector
	2401.719	111.24	-6.24	105.00	/	/	Peak Detector

Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------


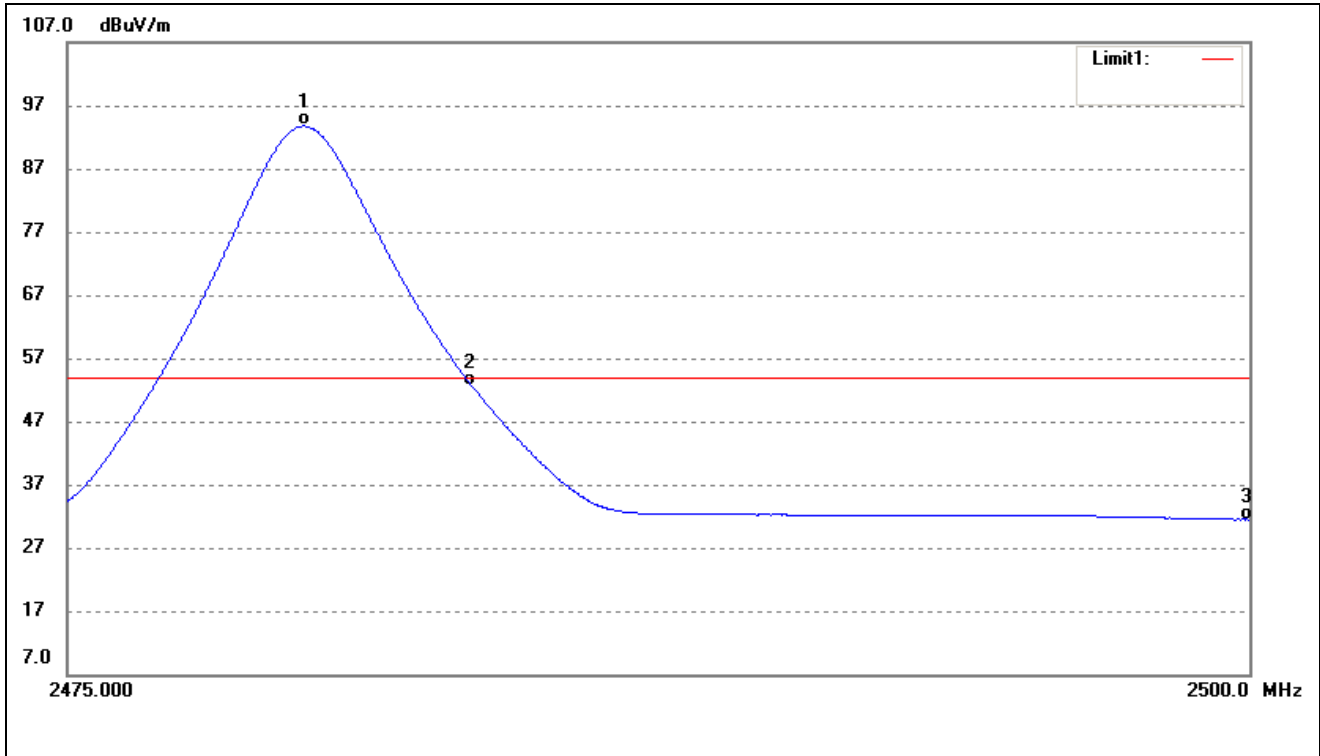


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.980	99.85	-6.08	93.77	/	/	Average Detector
	2479.830	113.24	-6.08	107.16	/	/	Peak Detector
2	2483.500	58.80	-6.08	52.72	54.00	-1.28	Average Detector
	2483.500	73.54	-6.08	67.46	74.00	-6.54	Peak Detector
3	2500.000	37.52	-6.04	31.48	54.00	-22.52	Average Detector
	2500.000	51.71	-6.04	45.67	74.00	-28.33	Peak Detector



➤ Conducted test

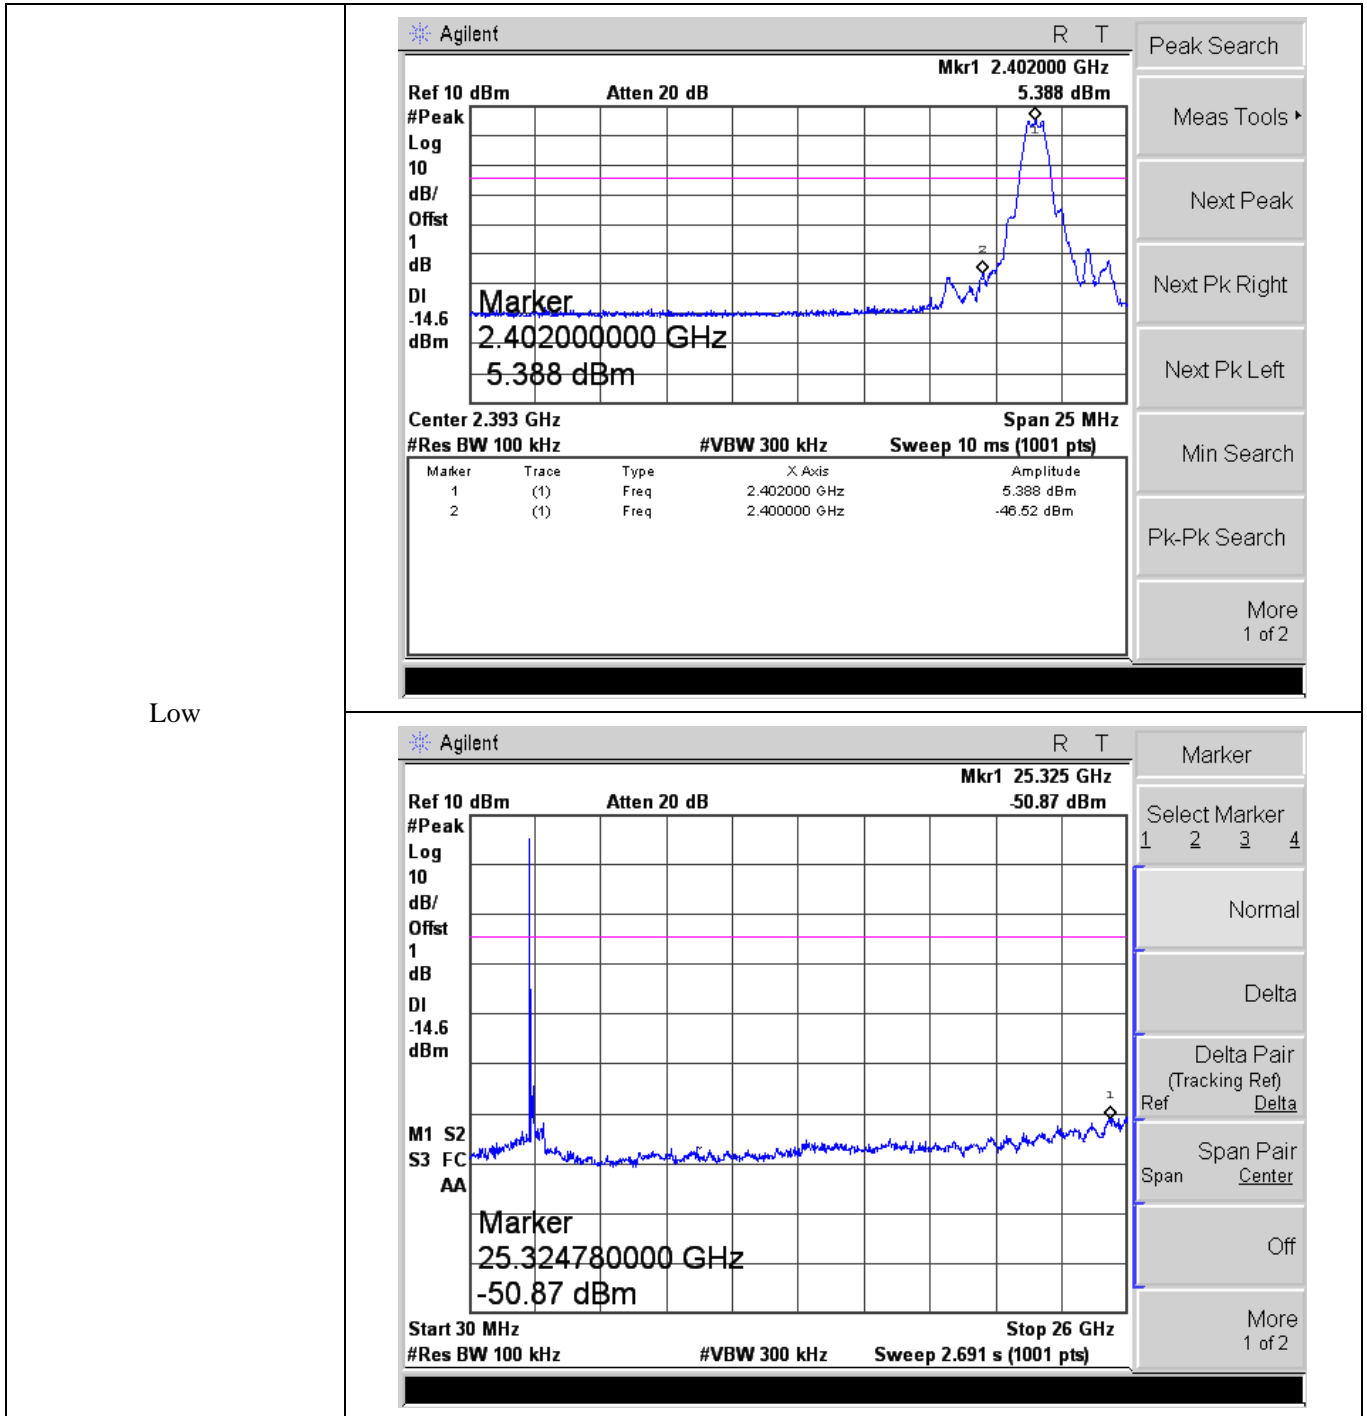

Middle

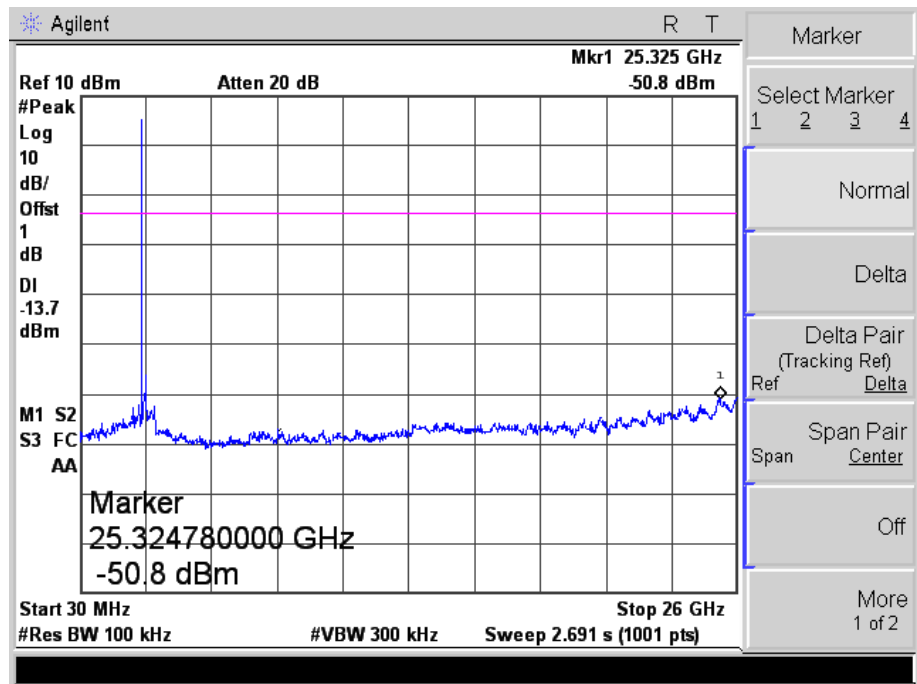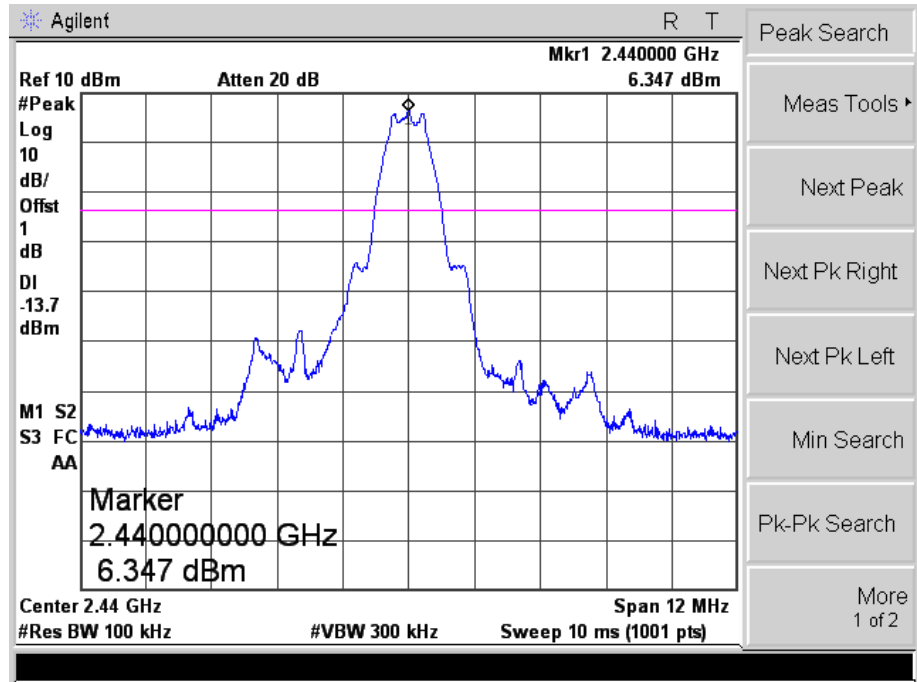

High

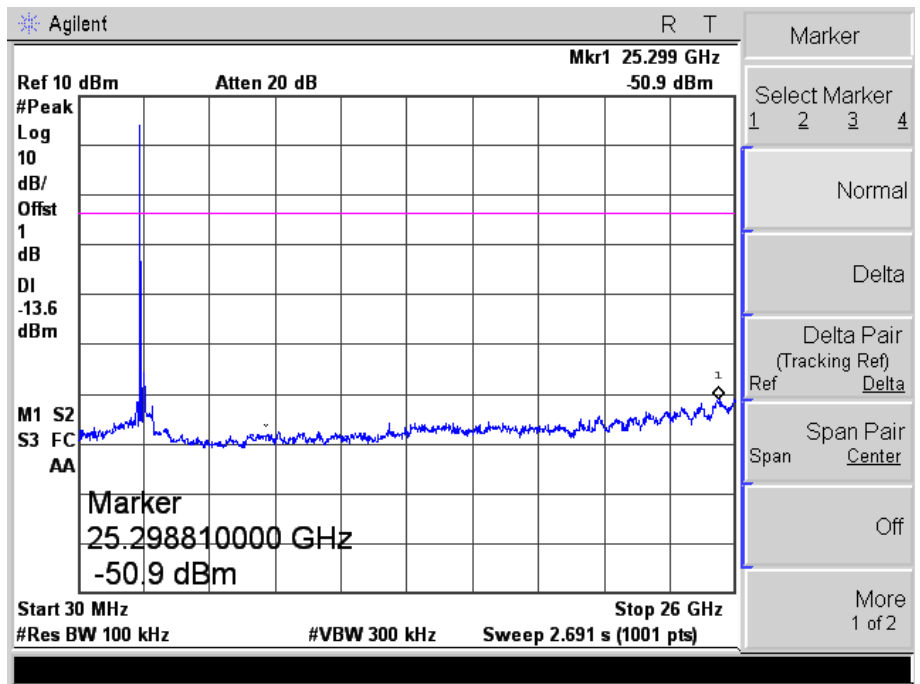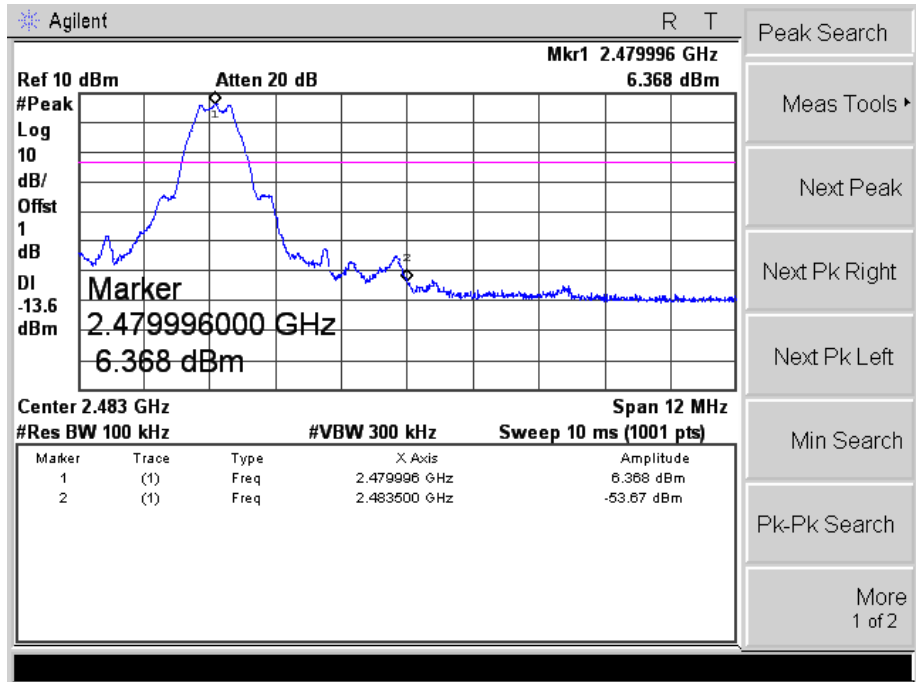


10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram

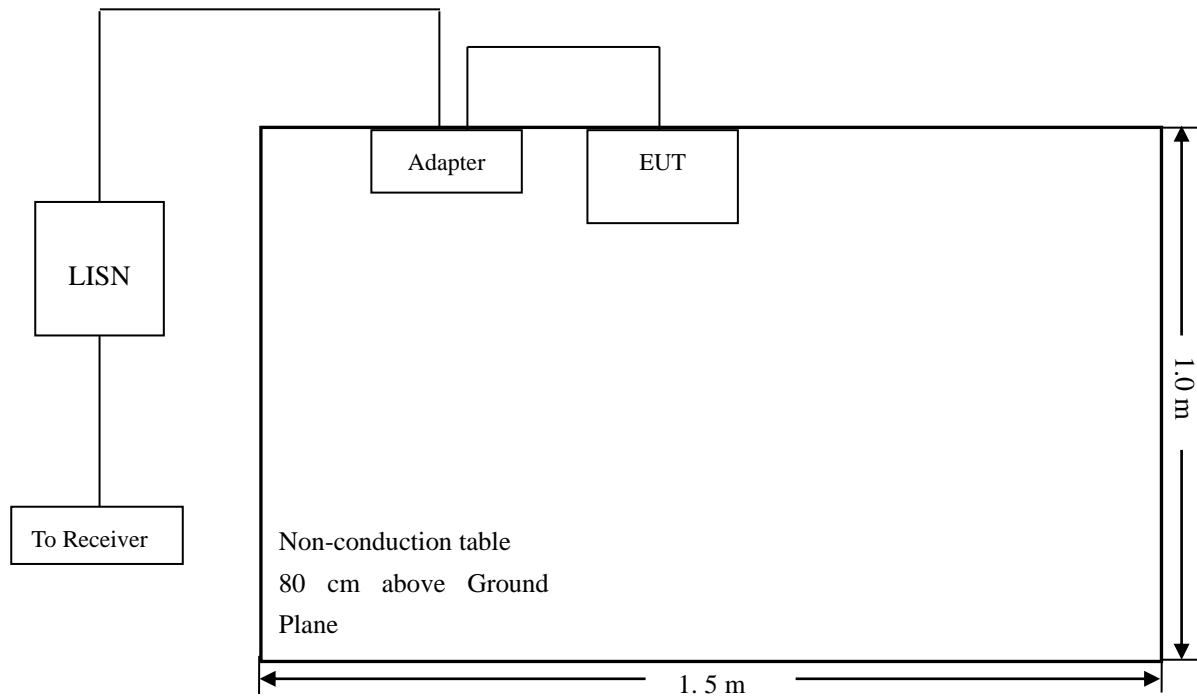


10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
 Stop Frequency 30 MHz
 Sweep Speed Auto
 IF Bandwidth..... 10 kHz
 Quasi-Peak Adapter Bandwidth 9 kHz
 Quasi-Peak Adapter Mode Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

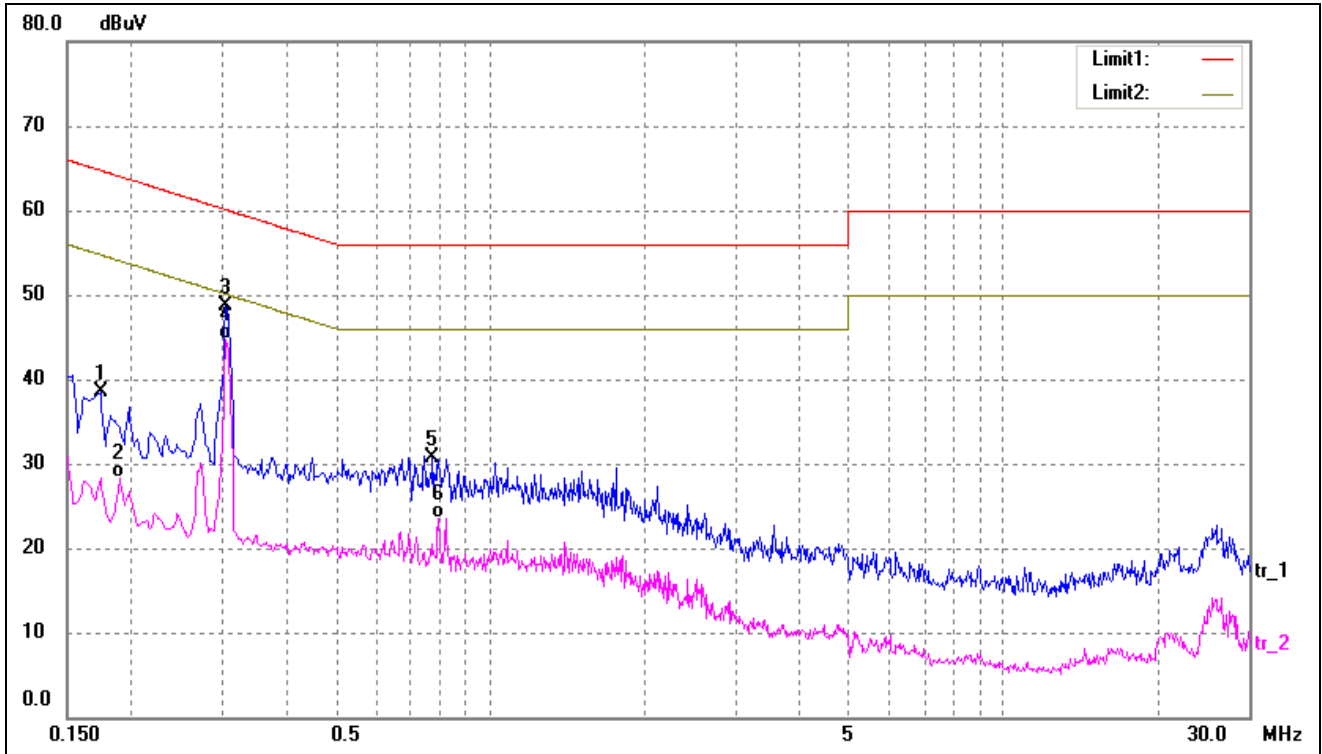

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1740	28.41	10.11	38.52	64.76	-26.24	peak
2	0.1900	18.11	10.12	28.23	54.03	-25.80	AVG
3	0.3060	38.49	10.19	48.68	60.08	-11.40	peak
4*	0.3060	34.45	10.19	44.64	50.08	-5.44	AVG
5	0.7740	20.25	10.41	30.66	56.00	-25.34	peak
6	0.7940	13.00	10.43	23.43	46.00	-22.57	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

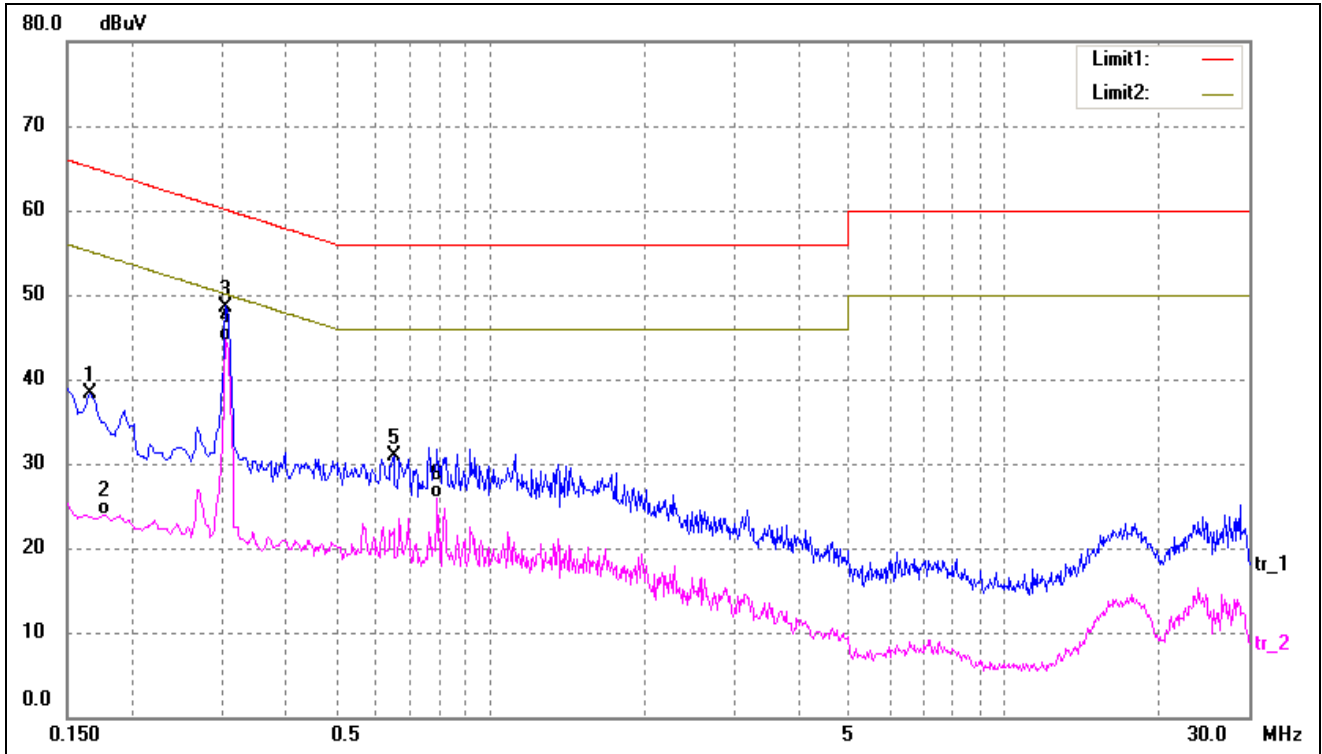

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1660	28.22	10.11	38.33	65.15	-26.82	peak
2	0.1780	13.89	10.11	24.00	54.57	-30.57	AVG
3	0.3060	38.41	10.19	48.60	60.08	-11.48	peak
4*	0.3060	34.41	10.19	44.60	50.08	-5.48	AVG
5	0.6500	20.60	10.36	30.96	56.00	-25.04	peak
6	0.7900	15.43	10.43	25.86	46.00	-20.14	AVG

***** END OF REPORT *****