

TEST REPORT

Applicant: Hunan GM innovation technology co.,Ltd

Address of Applicant: No.46 Jiefang East Road,Furong District,Changsha City,Hunan Province,China

Manufacturer/Factory: Hunan GM innovation technology co.,Ltd

Address of Manufacturer/Factory: No.46 Jiefang East Road,Furong District,Changsha City,Hunan Province,China

Equipment Under Test (EUT)

Product Name: Vaxis wireless video system

Model No.: Vaxis Atom 600 KV TX; Vaxis Atom 600 KG TX
Vaxis Atom 600 ZV TX; Vaxis Atom 600 ZG TX

Trade Mark: N/A

FCC ID: 2AJOF-ATOM600KV-TX

Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407

Date of sample receipt: April 28, 2021


Date of Test: April 28 ~ May 12, 2021

Date of report issued: May 12, 2021

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

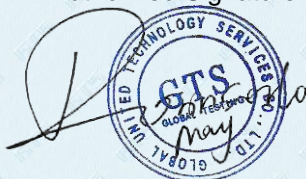

Robinson Luo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	2021-5-12	Original

Prepared By:




Date:

2012-5-12

Project Engineer

Check By:

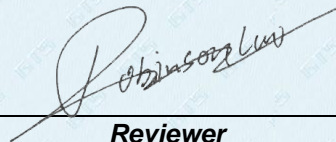

Reviewer

Date:

2012-5-12

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 DEVIATION FROM STANDARDS	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.6 TEST FACILITY	8
5.7 TEST LOCATION	8
6 TEST INSTRUMENTS LIST	9
7 TEST RESULTS AND MEASUREMENT DATA	11
7.1 ANTENNA REQUIREMENT	11
7.2 CONDUCTED EMISSIONS	12
7.3 CONDUCTED PEAK OUTPUT POWER	14
7.4 CHANNEL BANDWIDTH	20
7.5 POWER SPECTRAL DENSITY	25
7.6 BAND EDGE	28
7.6.1 Radiated Emission Method	28
7.7 SPURIOUS EMISSION	38
7.7.1 Radiated Emission Method	38
7.8 FREQUENCY STABILITY	73
8 TEST SETUP PHOTO	76
9 EUT CONSTRUCTIONAL DETAILS	76

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.407(a)(3)	Pass
Channel Bandwidth	15.407(e)	Pass
Power Spectral Density	15.407(a)(3)	Pass
Band Edge	15.407(b)(4)	Pass
Spurious Emission	15.205/15.209/15.407(b)(4)	Pass
Frequency Stability	15.407(g)	Pass

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Vaxis wireless video system
Model No.:	Vaxis Atom 600 KV TX; Vaxis Atom 600 KG TX Vaxis Atom 600 ZV TX; Vaxis Atom 600 ZG TX
Serial No.:	N/A
Hardware Version:	HDIP_SDI_TX
Software Version:	1.1.5S
Test sample(s) ID:	GTSL202104000288-1
Sample(s) Status:	Engineer sample
Operation Frequency:	802.11a/802.11n(HT20): 5745MHz ~ 5825MHz
Channel numbers:	802.11a/802.11n(HT20): 5
Channel bandwidth:	802.11a/802.11n(HT20): 20MHz
Modulation technology:	802.11a/802.11n(H20): OFDM(BPSK/QPSK/16QAM/64QAM) MIMO: 802.11n SISO: 802.11a
Antenna Type:	External Antenna
Antenna gain:	Antenna number: 2 ANTA:2.96dBi ANTB:2.96dBi MIMO technology Directional gain=5.97dBi
Power supply:	DC 16.8V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745MHz	151	/	153	5765MHz	155	/
157	5785MHz	159	/	161	5805MHz	163	/
165	5825MHz						

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)		
	802.11 a/n		
Lowest channel	5745		
Middle channel	/		
Highest channel	5825		

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a (SISI mode)	6 Mbps
802.11n(HT20) (SISI mode)	MCS 0
802.11n(HT20) (MIMO mode)	MCS 8

5.3 Description of Support Units

<p>None. 1. Vaxis wireless video system Manufacturer: Lenovo Model: Vaxis Atom 500 SDI S/N: K600R21010063</p> <p>2. LED TV Manufacturer: Hisense Model: LED32K300 S/N: N/A</p> <p>3. Digital high definition infrared hemisphere camera Manufacturer: OSUN Model: HD-SD S/N: N/A</p> <p>4. HDMI Cable Manufacturer: PHILIPS Model: 6118E S/N: N/A</p> <p>5. Lithium Ion Rechargeable Battery Manufacturer: YINCHEM Model: YC-135S Output: DC 16.8V</p>

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

● **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A

● **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.7 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone,
Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021


Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 25 2020	June. 24 2021
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 25 2020	June. 24 2021
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 25 2020	June. 24 2021
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 25 2020	June. 24 2021
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 25 2020	June. 24 2021

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

7 Test results and Measurement Data

7.1 Antenna requirement


Standard requirement:	FCC Part15 C Section 15.203
<p><i>15.203 requirement:</i></p> <p><i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i></p>	
E.U.T Antenna:	
<p><i>The antennas are external antenna, the best case gain of the antennas are 2.96dBi.</i></p>	
	

7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
	5-30		60		50	
* Decreases with the logarithm of the frequency.						
Test setup:	<p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>					
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	DC 16.8V					
Test results:	Pass					
Remark: EUT is only power by battery, So it is not applicable for this test.						



7.3 Conducted Peak Output Power

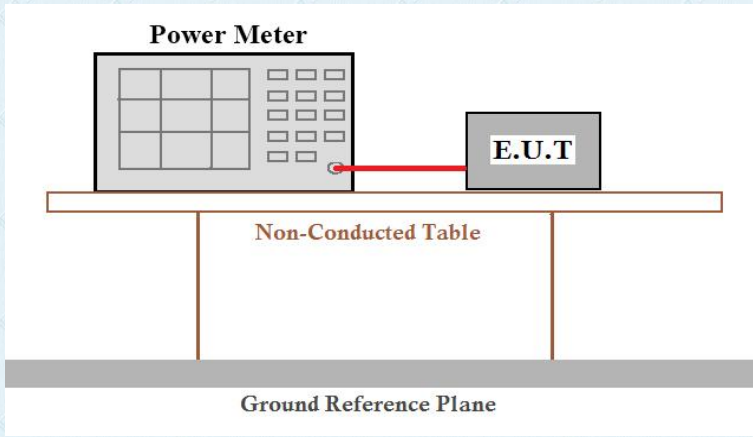Test Requirement:	FCC Part15 E Section 15.407(a)(3)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	30dBm
Test setup:	 <p>The diagram illustrates the test setup. A Power Meter is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Modulation	Frequency (MHz)	Duty cycle		Duty Factor	
		ANTENNA-A	ANTENNA-B	ANTENNA-A	ANTENNA-B
802.11a	5745	95.28%	95.26%	0.21	0.21
	5825	95.28%	95.26%	0.21	0.21
802.11n(HT20)	5745	95.27%	95.30%	0.21	0.21
	5825	95.18%	95.27%	0.21	0.21


802.11a mode										
CH No.	Frequency (MHz)	Measured Power (dBm)			Duty Factor	Output Power (dBm)			Limit (dBm)	Result
		ANT A	ANT B	ANT A+B		ANT A	ANT B	ANT A+B		
36	5745	12.30	12.30	--	0.21	12.51	12.51	--	30	Pass
48	5825	12.35	12.35	--	0.21	12.56	12.56	--		
802.11n(HT20) mode										
CH No.	Frequency (MHz)	Measured Power (dBm)			Duty Factor	Output Power (dBm)			Limit (dBm)	Result
		ANT A	ANT B	ANT A+B		ANT A	ANT B	ANT A+B		
36	5745	12.17	12.11	15.653	0.21	12.38	12.32	15.863	30	Pass
48	5825	12.34	12.23	15.219	0.21	12.55	12.44	15.429		

Note: Output Power = Measured Power + Duty Factor

Duty Factor = 10 log (1/Duty Cycle)


“---“is not applicable

Test plots as followed:

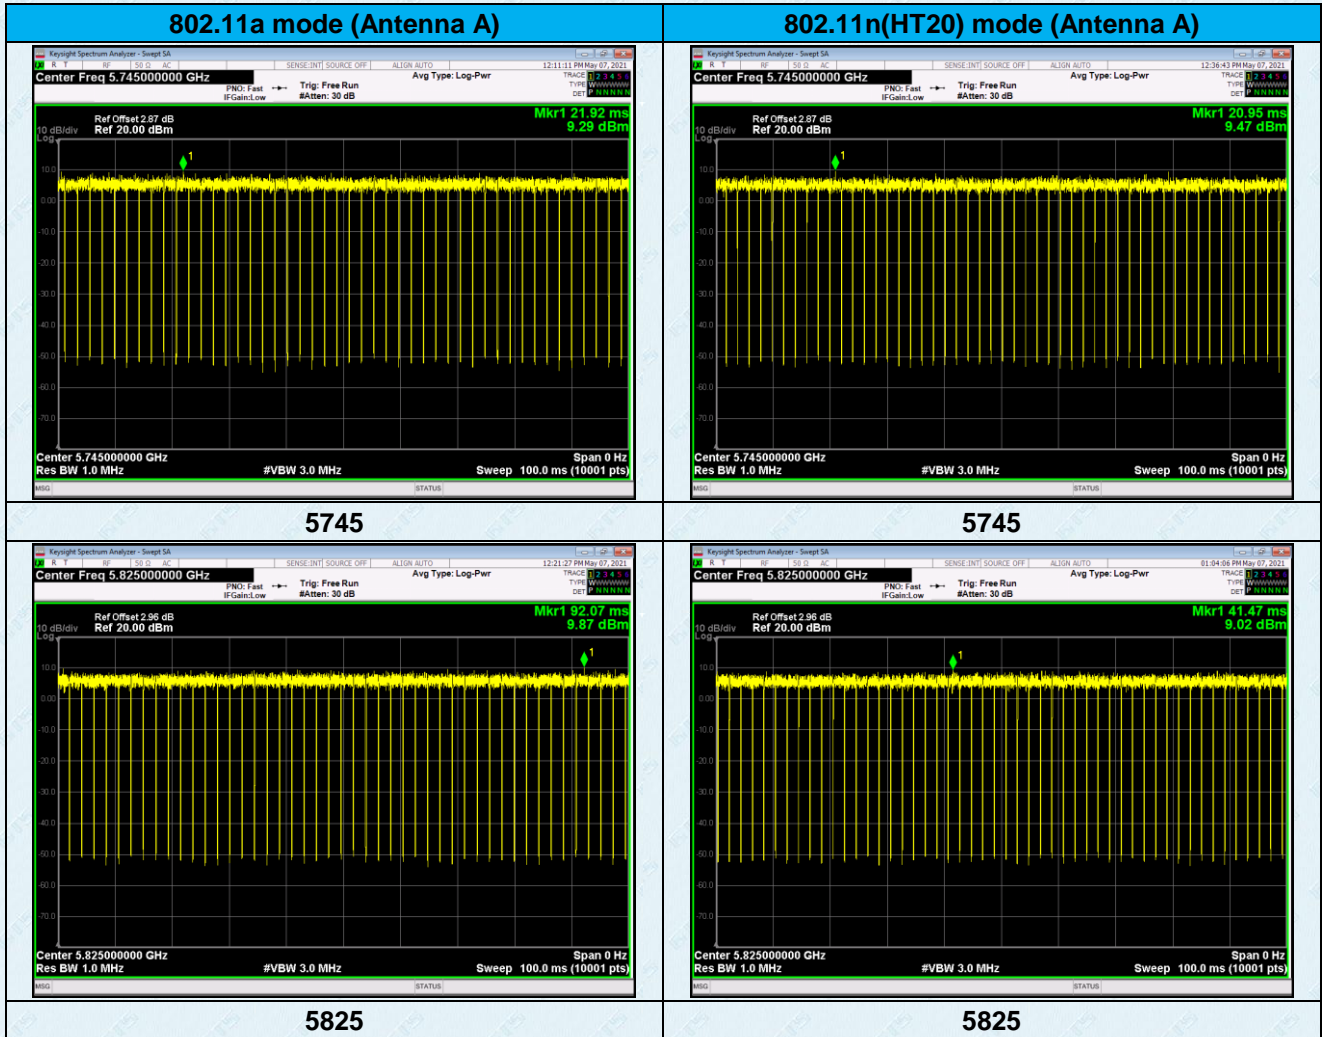




Note: We tested 802.11a/n mode the all data rate and recorded the worst case data for this channel to be 6Mbps for 802.11a mode and MCS0 for 802.11n mode.

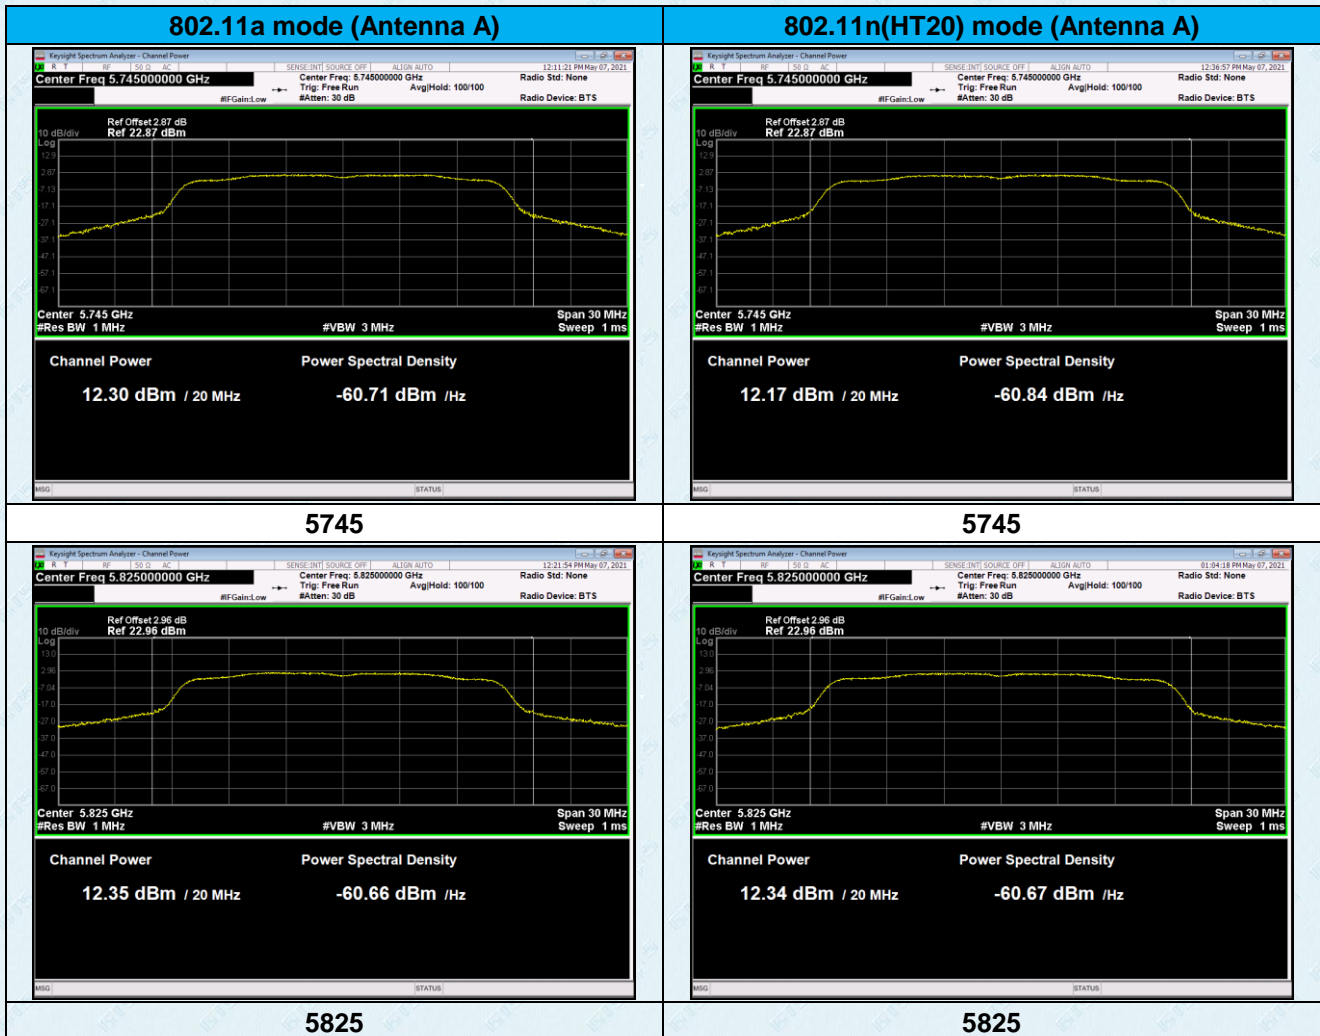



Note: We tested 802.11a/n mode the all data rate and recorded the worst case data for this channel to be 6Mbps for 802.11a mode and MCS0 for 802.11n mode.

7.4 Channel Bandwidth

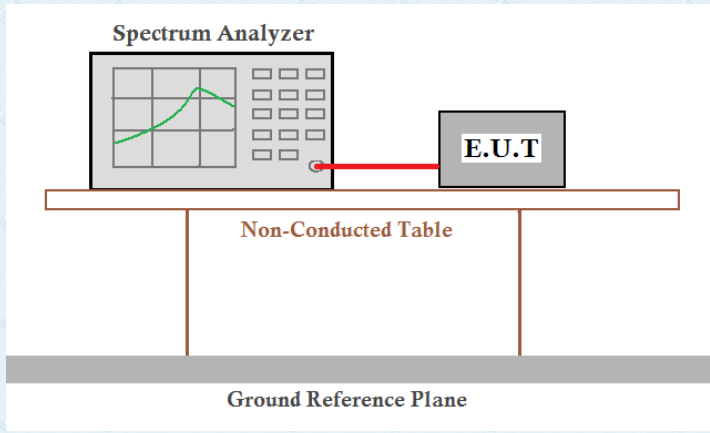Test Requirement:	FCC Part15 E Section 15.407(e)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	>500KHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


CH. No.	Frequency (MHz)	99% Occupied Bandwidth (MHz)				6dB Occupied Bandwidth (MHz)				Limit (MHz)
		802.11a		802.11n(HT20)		802.11a		802.11n(HT20)		
		ANT-A	ANT-B	ANT-A	ANT-B	ANT-A	ANT-B	ANT-A	ANT-B	
36	5180	16.516	16.492	17.667	17.687	15.35	13.22	17.28	13.81	> 0.5MHz
48	5240	16.574	16.582	17.707	17.723	14.07	15.41	14.20	14.96	> 0.5MHz

Remark: “---“is not applicable

Test plot as follows:


99% Occupied Bandwidth (MHz)




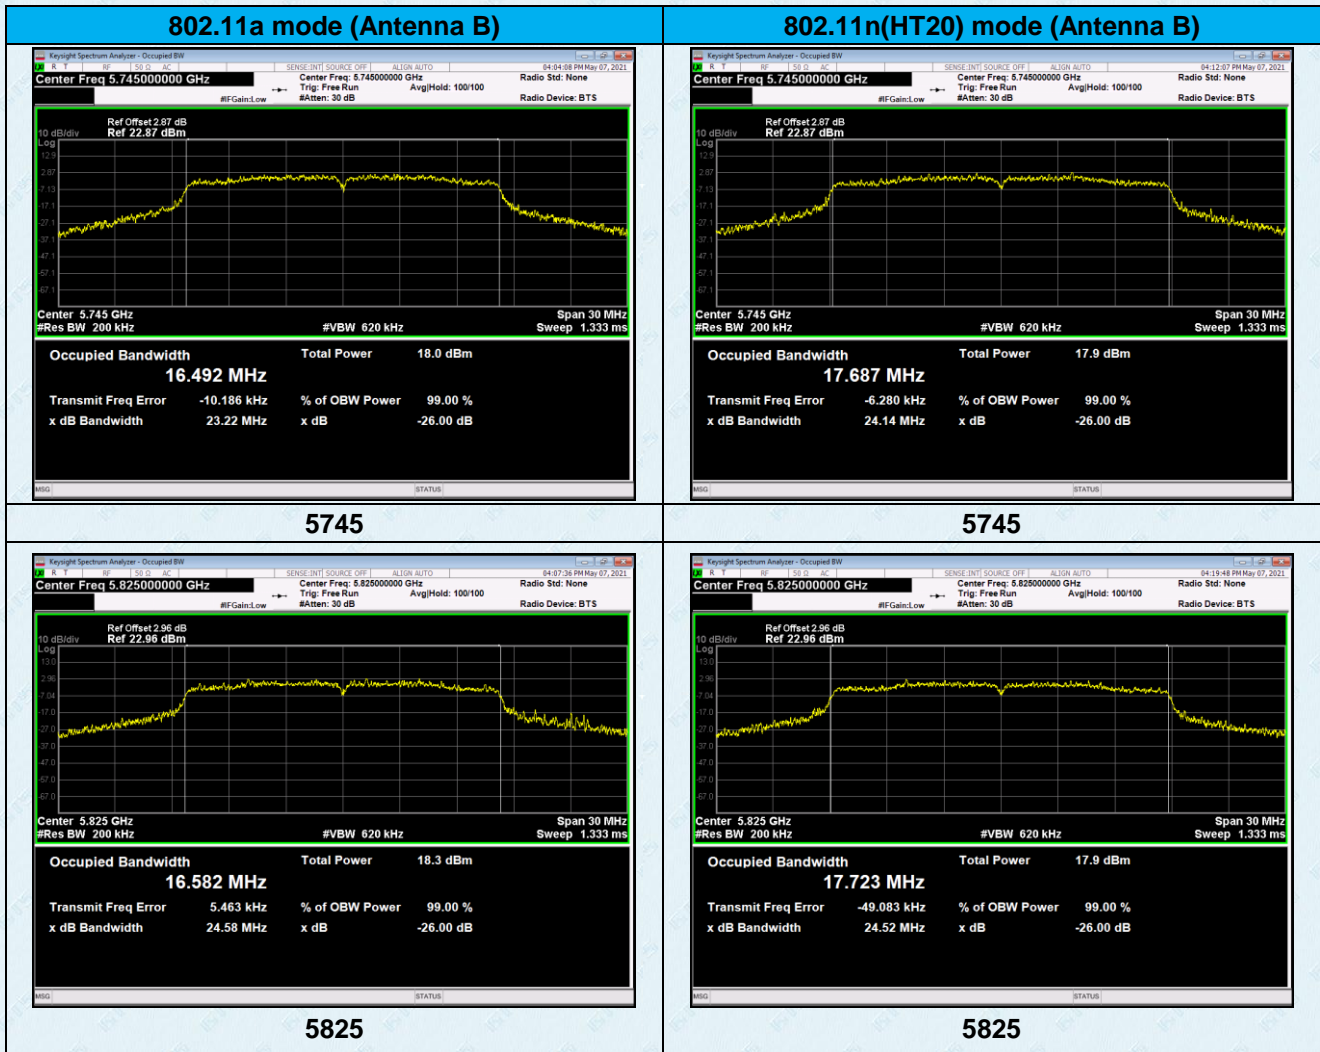

Note: We tested 802.11a/n mode the all data rate and recorded the worst case data for this channel to be 6Mbps for 802.11a mode and MCS0 for 802.11n mode.


6dB Occupied Bandwidth (MHz)

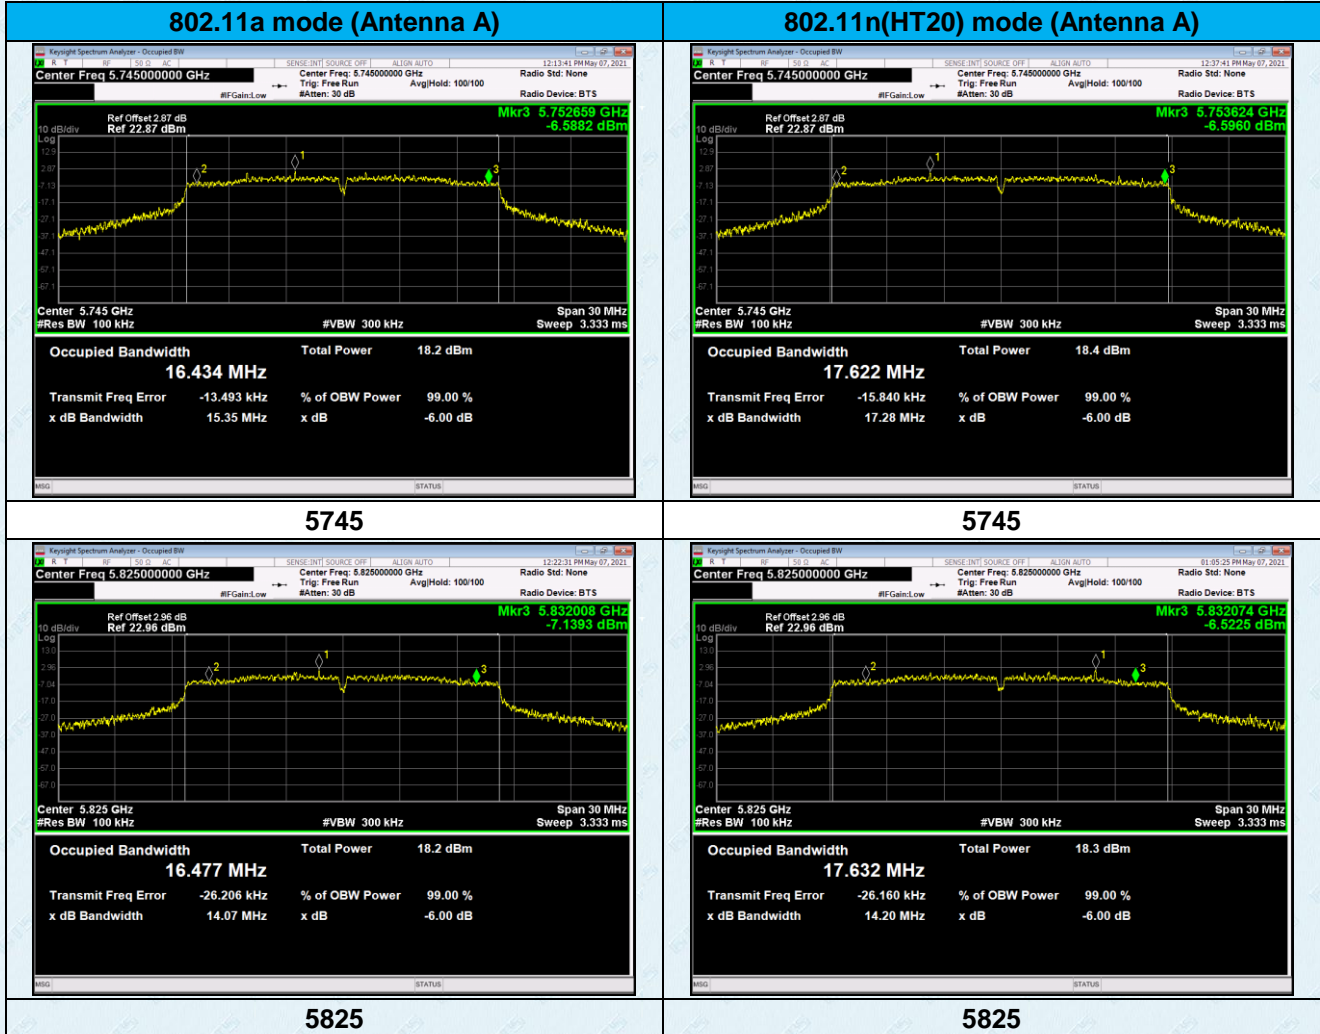

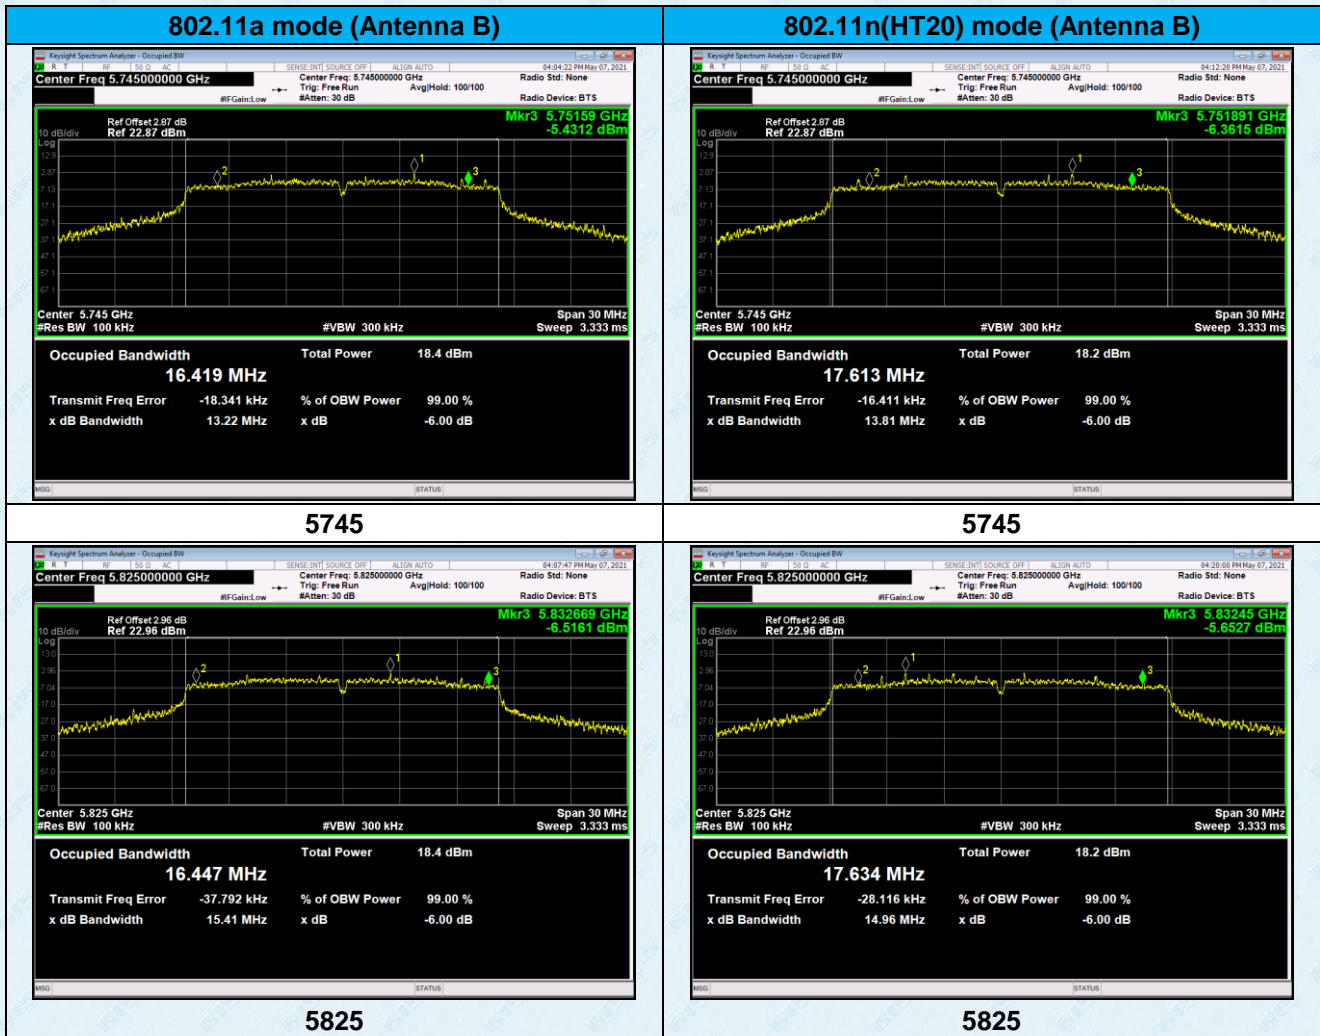

Note: We tested 802.11a/n mode the all data rate and recorded the worst case data for this channel to be 6Mbps for 802.11a mode and MCS0 for 802.11n mode.

7.5 Power Spectral Density

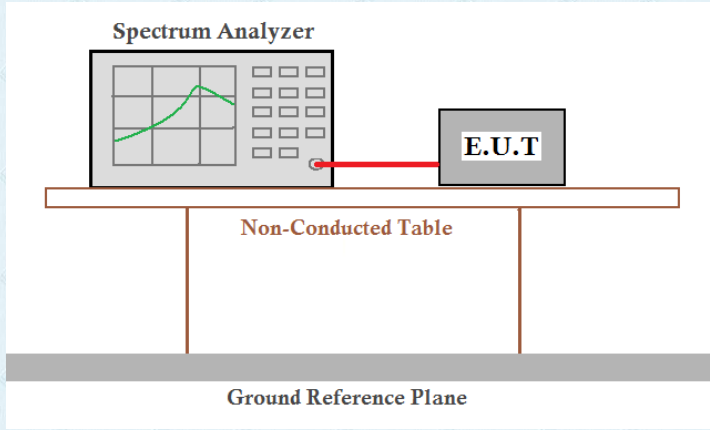
Test Requirement:	FCC Part15 E Section 15.407(a)(3)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	30dBm/500kHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test CH	Power Spectral Density (dBm)						Limit (dBm/500k Hz)	Result
	802.11a			802.11n(HT40)				
	ANT A	ANT B	ANT A+B	ANT A	ANT B	ANT A+B		
5745	-0.550	-0.558	---	-0.490	-1.082	2.492	30.00	Pass
5825	-0.499	-0.486	---	-0.765	-0.772	2466		

Remark: "---"is not applicable

Test plot as follows:

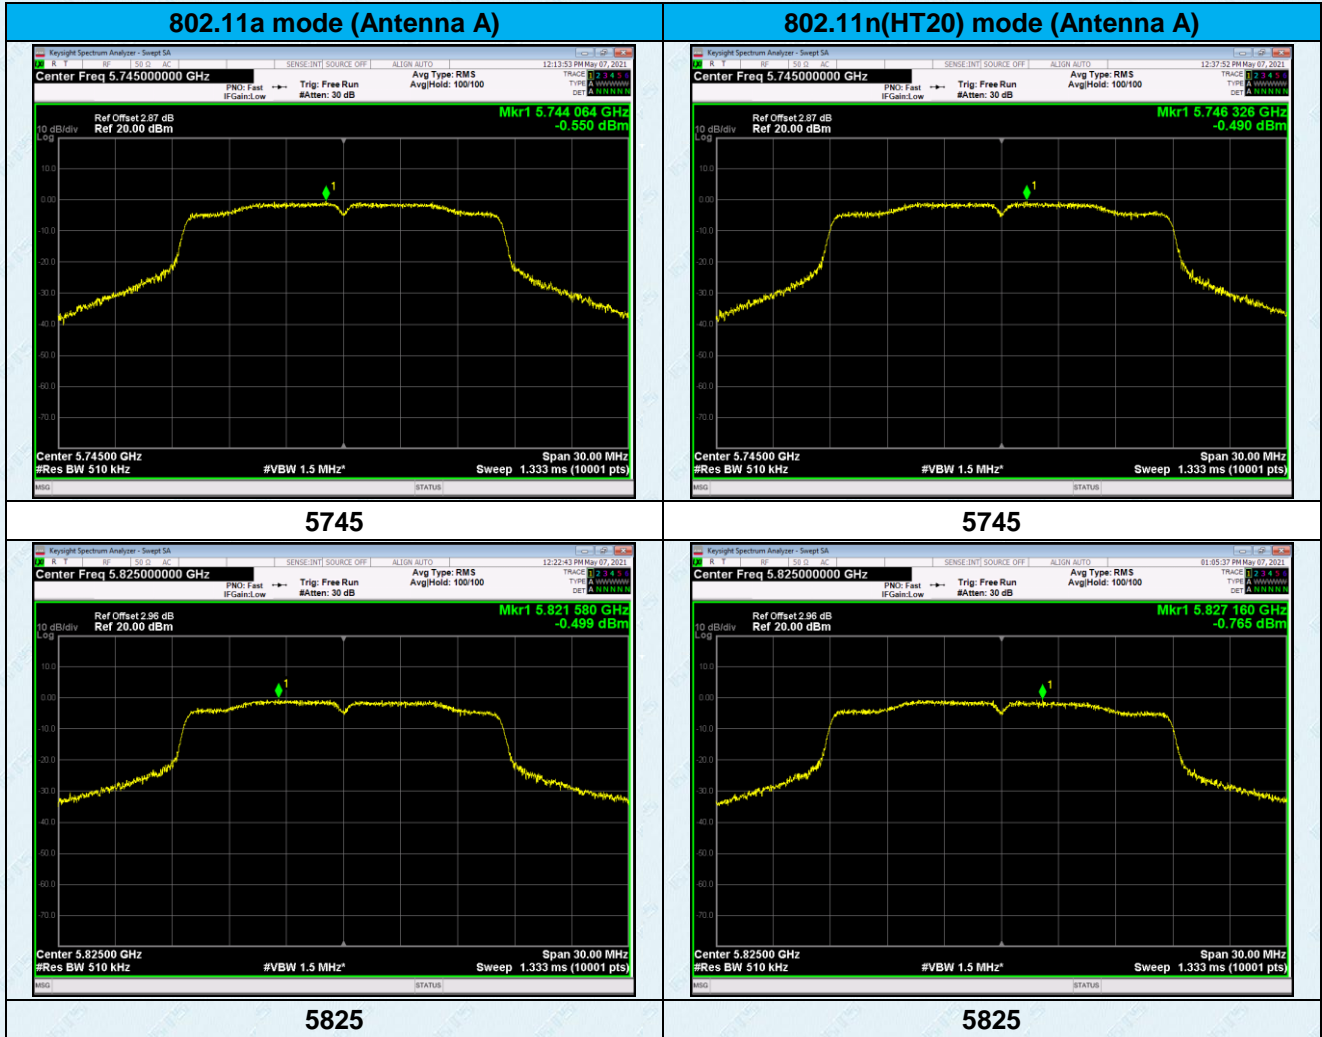

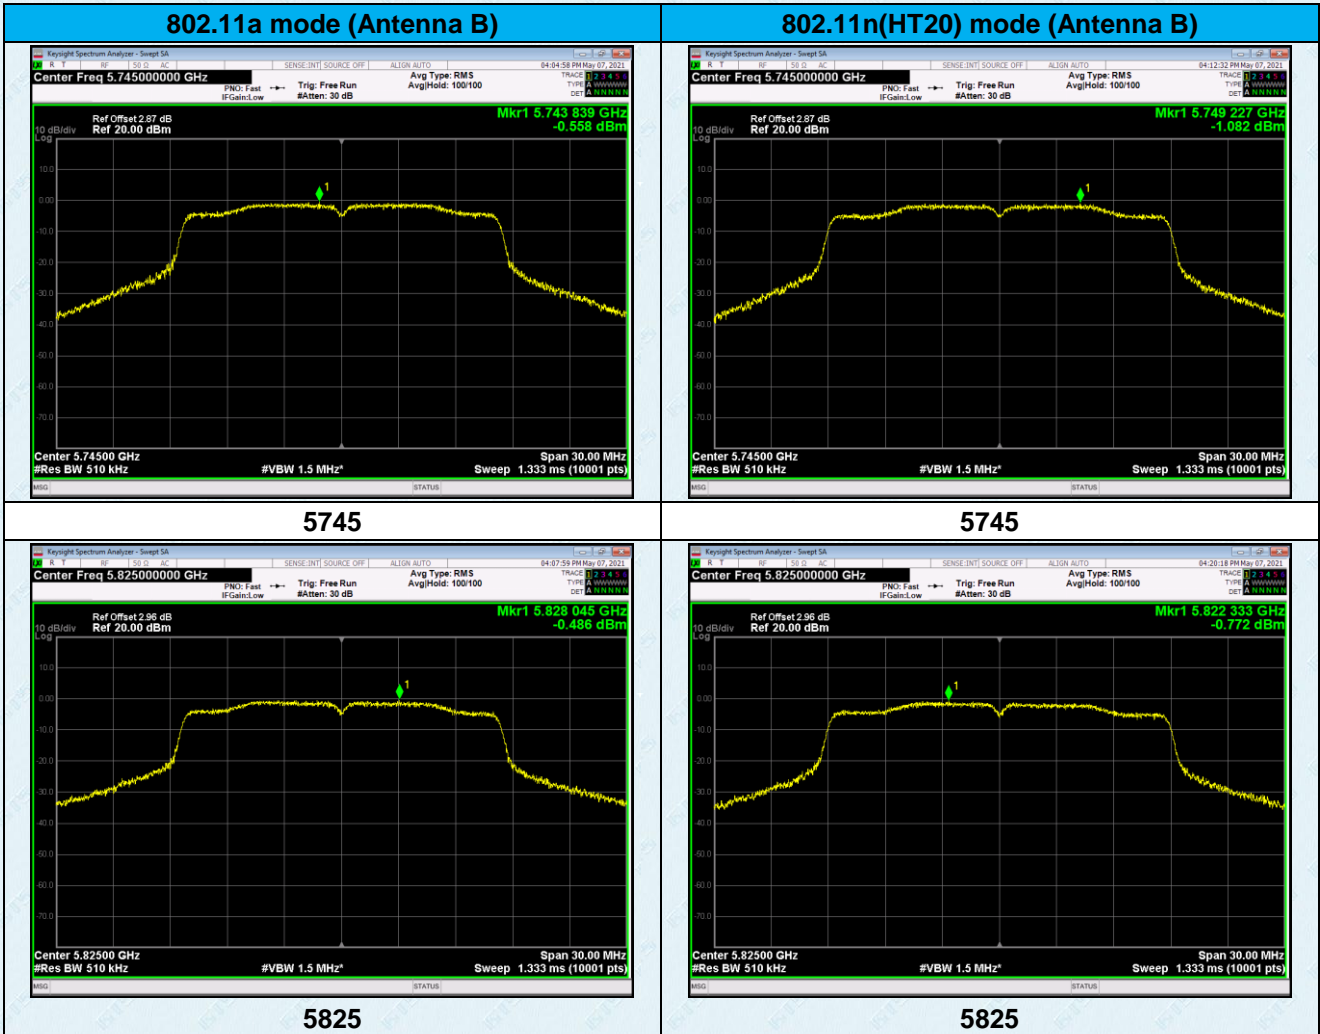

7.6 Band edge

7.6.1 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	9kHz to 40GHz, only worse case is reported				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak RMS	1MHz 1MHz	3MHz 3MHz	Peak RMS
Limit:	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.				
Test setup:					
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report. 				

Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remarks:

1. Only the worst case Main Antenna test data..
2. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
5. According to KDB 789033 D02v02r01 section G) 1) d),for measurements above 1000 MHz @3m distance, the limit of field strength is computed as follows:

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2;$$

$$E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$$

$$E[\text{dBuV/m}] = 10 + 95.2 = 105.2\text{dBuV/m}.$$


$$E[\text{dBuV/m}] = 15.6 + 95.2 = 110.8\text{dBuV/m}.$$

$$E[\text{dBuV/m}] = 27 + 95.2 = 122.2\text{dBuV/m}$$


Measurement data:

Radiated Band Edge Result


Horizontal: 802.11a (TX 5745MHz)

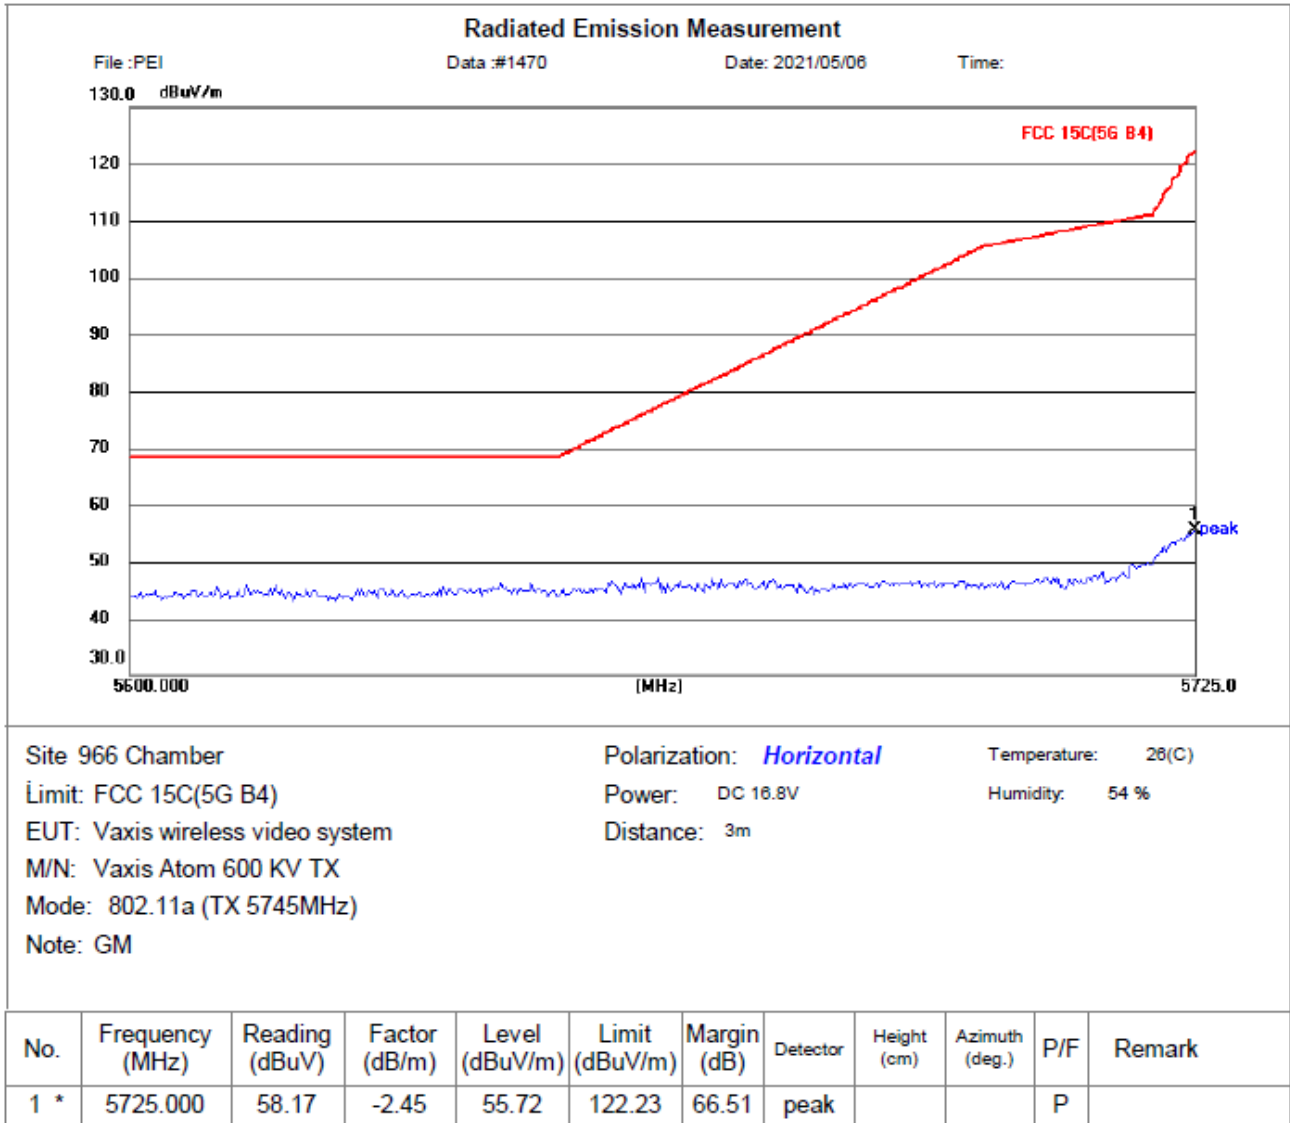


Vertical: 802.11a (TX 5745MHz)

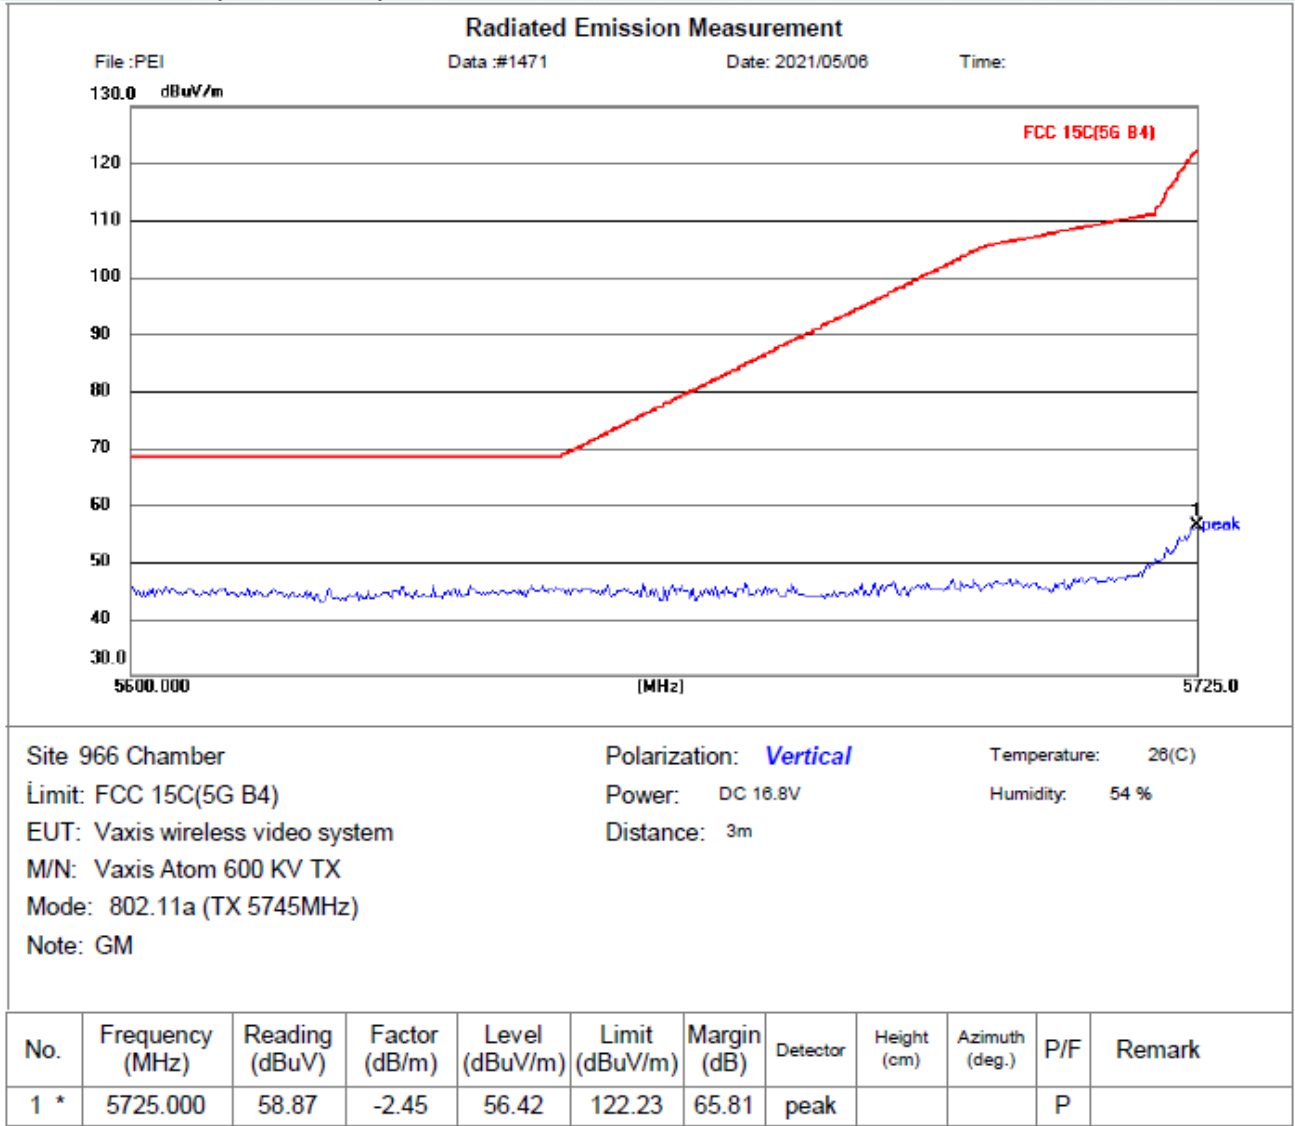

Horizontal: 802.11a (TX 5825MHz)

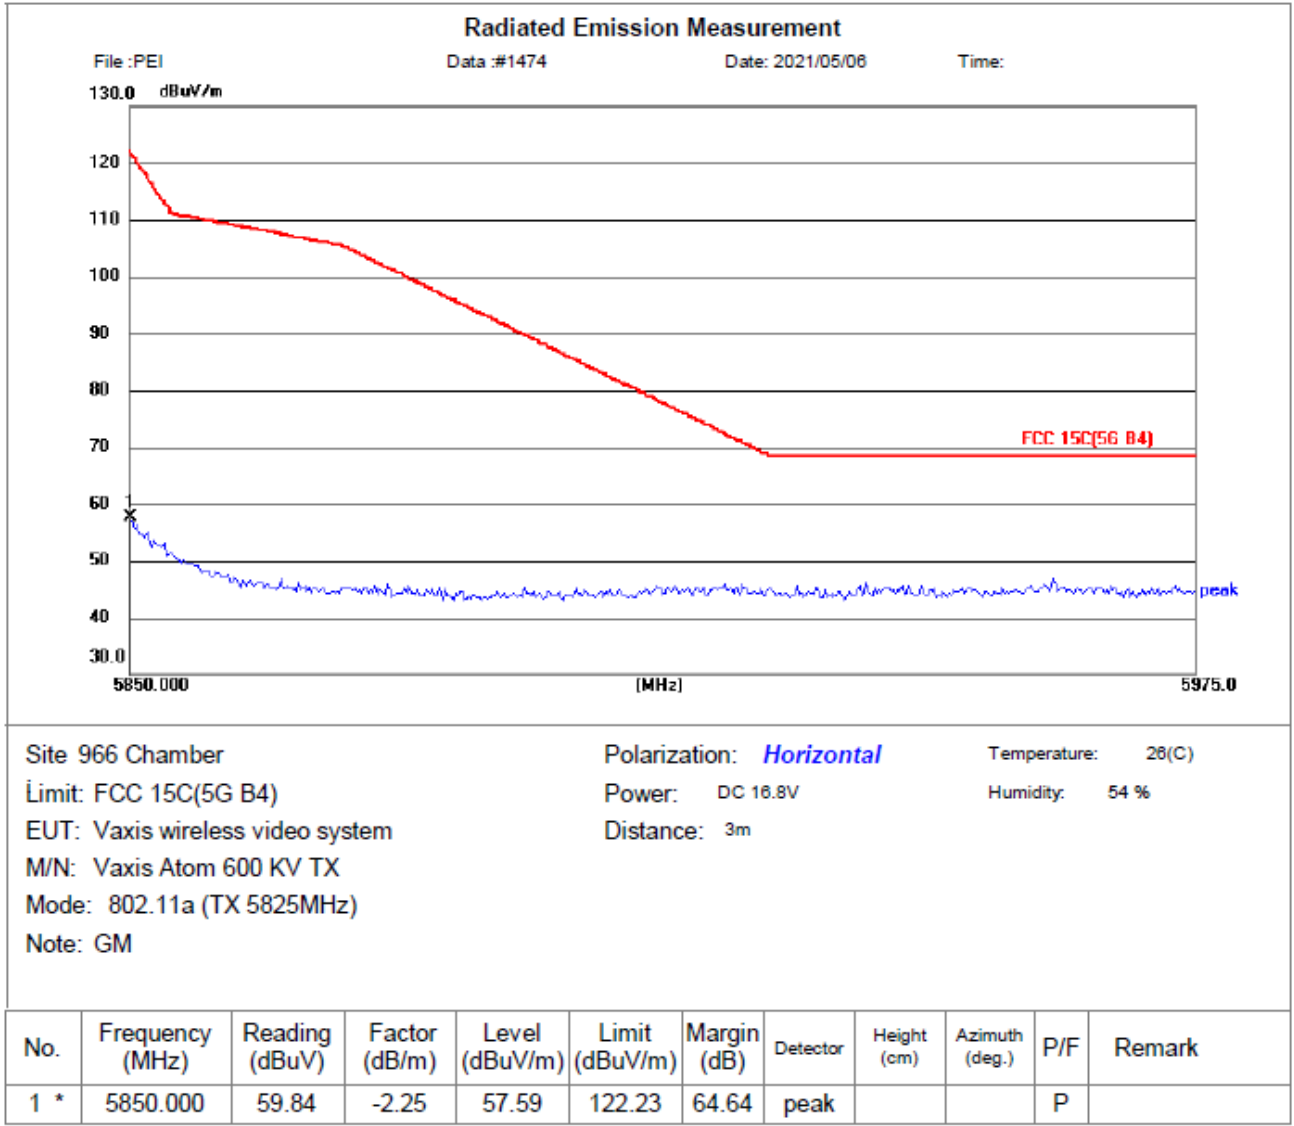


Vertical: 802.11a (TX 5825MHz)

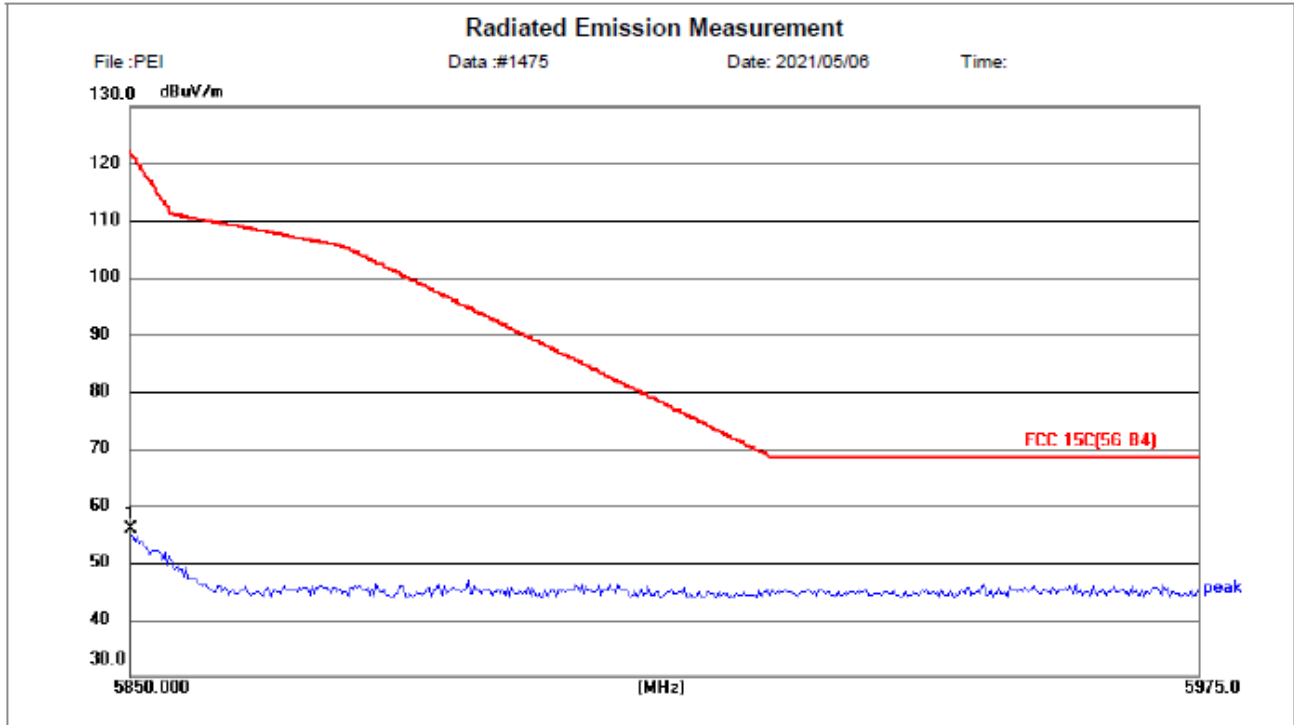

Site 966 Chamber	Polarization: Vertical	Temperature: 26(C)
Limit: FCC 15C(5G B4)	Power: DC 16.8V	Humidity: 54 %
EUT: Vaxis wireless video system	Distance: 3m	
M/N: Vaxis Atom 600 KV TX		
Mode: 802.11a (TX 5825MHz)		
Note: GM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5850.000	58.22	-2.25	55.97	122.23	66.26	peak			P	


Horizontal: 802.11n (HT20) (TX 5745MHz)

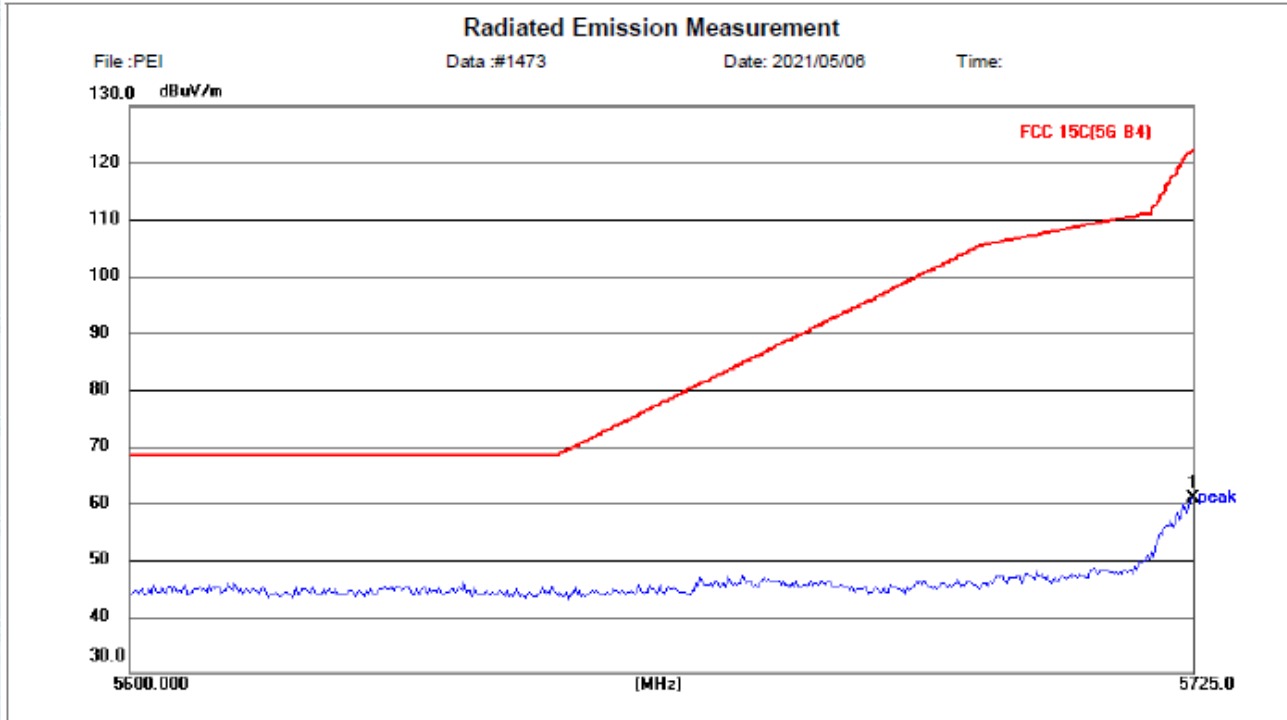


Site 966 Chamber Polarization: *Horizontal* Temperature: 28(C)
 Limit: FCC 15C(5G B4) Power: DC 18.8V Humidity: 54 %
 EUT: Vaxis wireless video system Distance: 3m
 M/N: Vaxis Atom 600 KV TX
 Mode: 802.11n (TX 5745MHz)
 Note: GM

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5725.000	63.34	-2.45	60.89	122.23	61.34	peak			P	

Vertical: 802.11n (HT20) (TX 5745MHz)

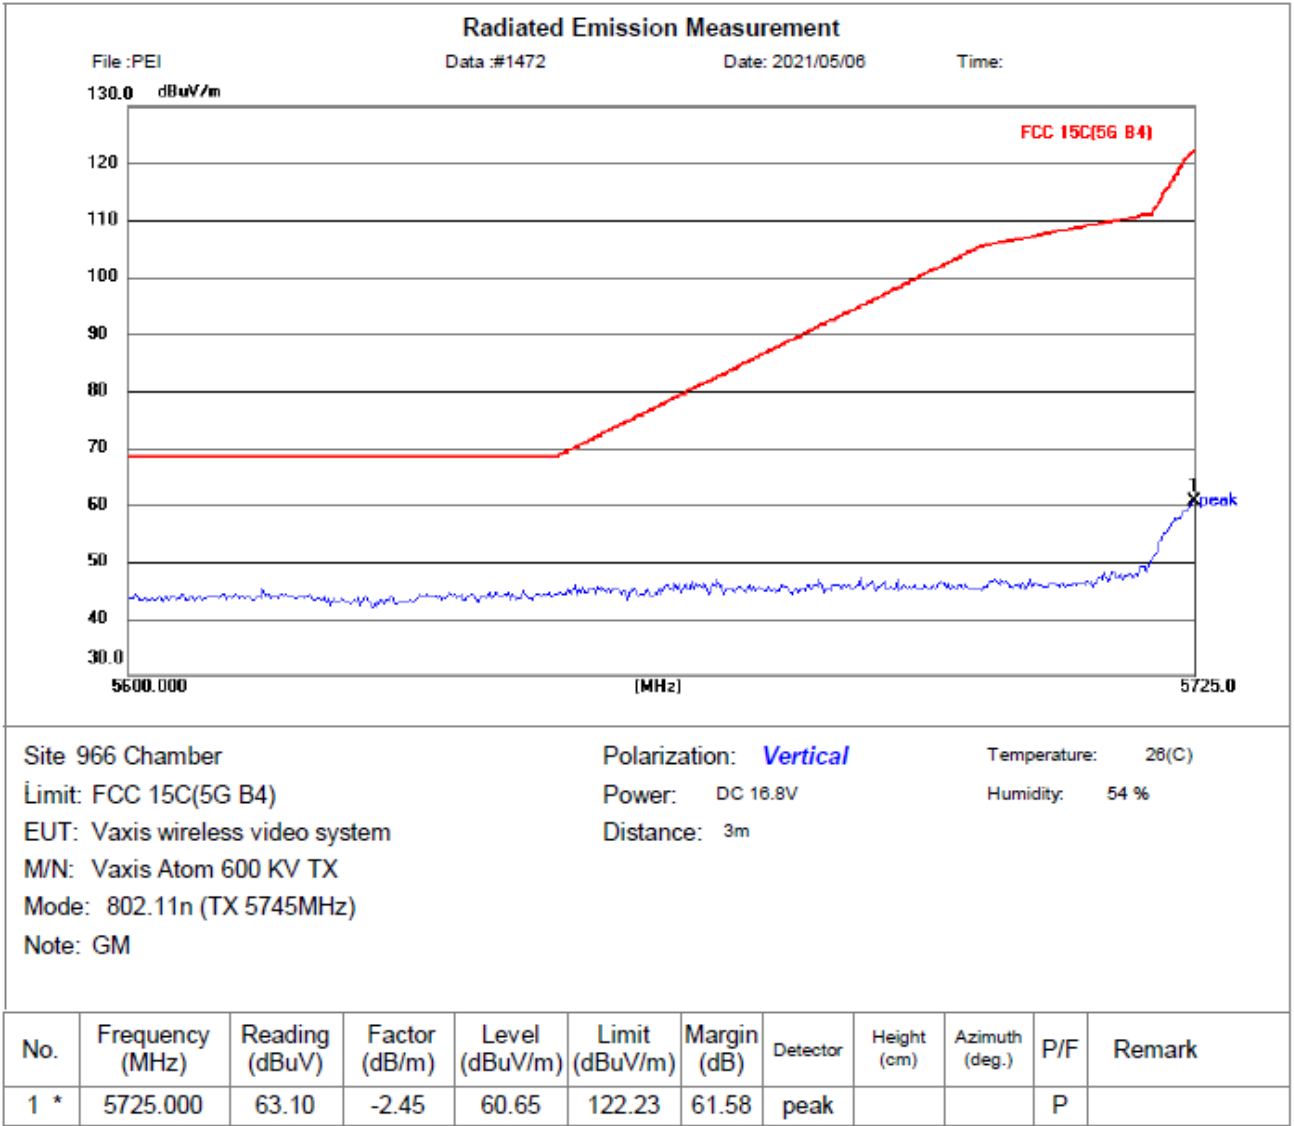


Horizontal: 802.11n (HT20) (TX 5825MHz)

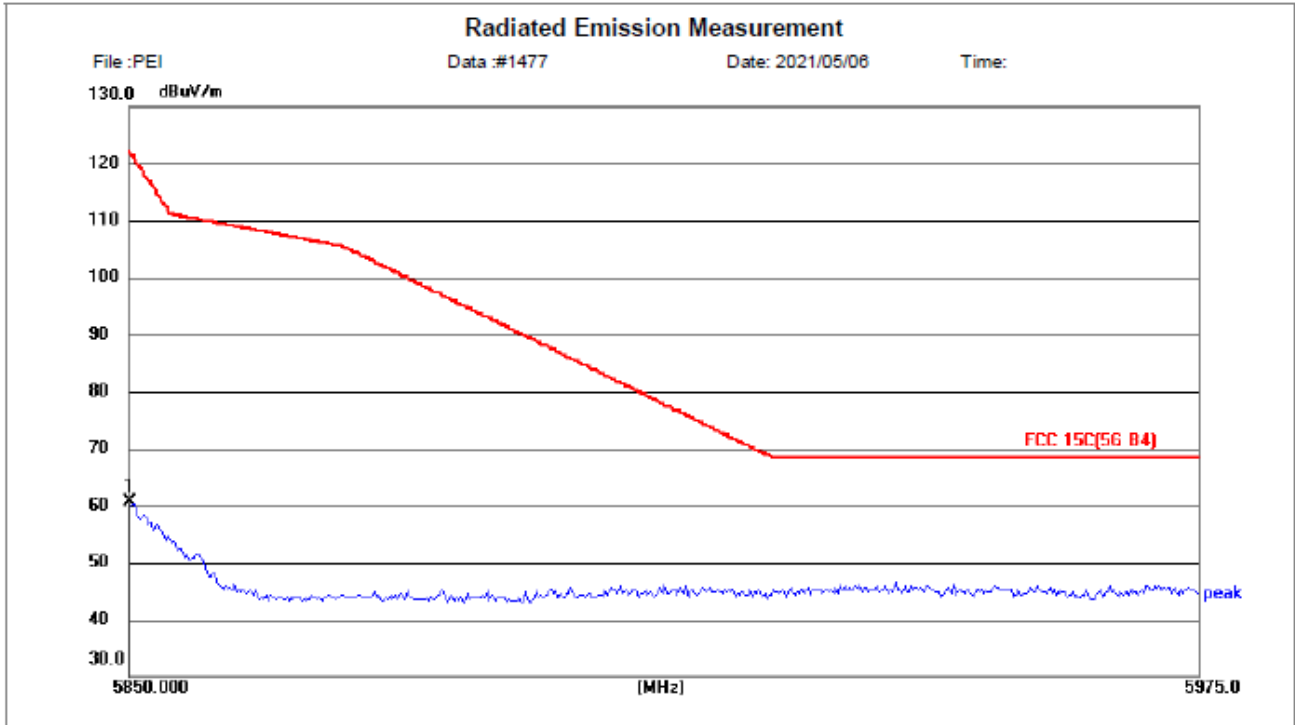

Site 966 Chamber Polarization: **Horizontal** Temperature: 28(C)
 Limit: FCC 15C(5G B4) Power: DC 16.8V Humidity: 54 %
 EUT: Vaxis wireless video system Distance: 3m
 M/N: Vaxis Atom 600 KV TX
 Mode: 802.11n (TX 5825MHz)
 Note: GM

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5850.000	62.78	-2.25	60.53	122.23	61.70	peak			P	


Vertical: 802.11n (HT20) (TX 5825MHz)

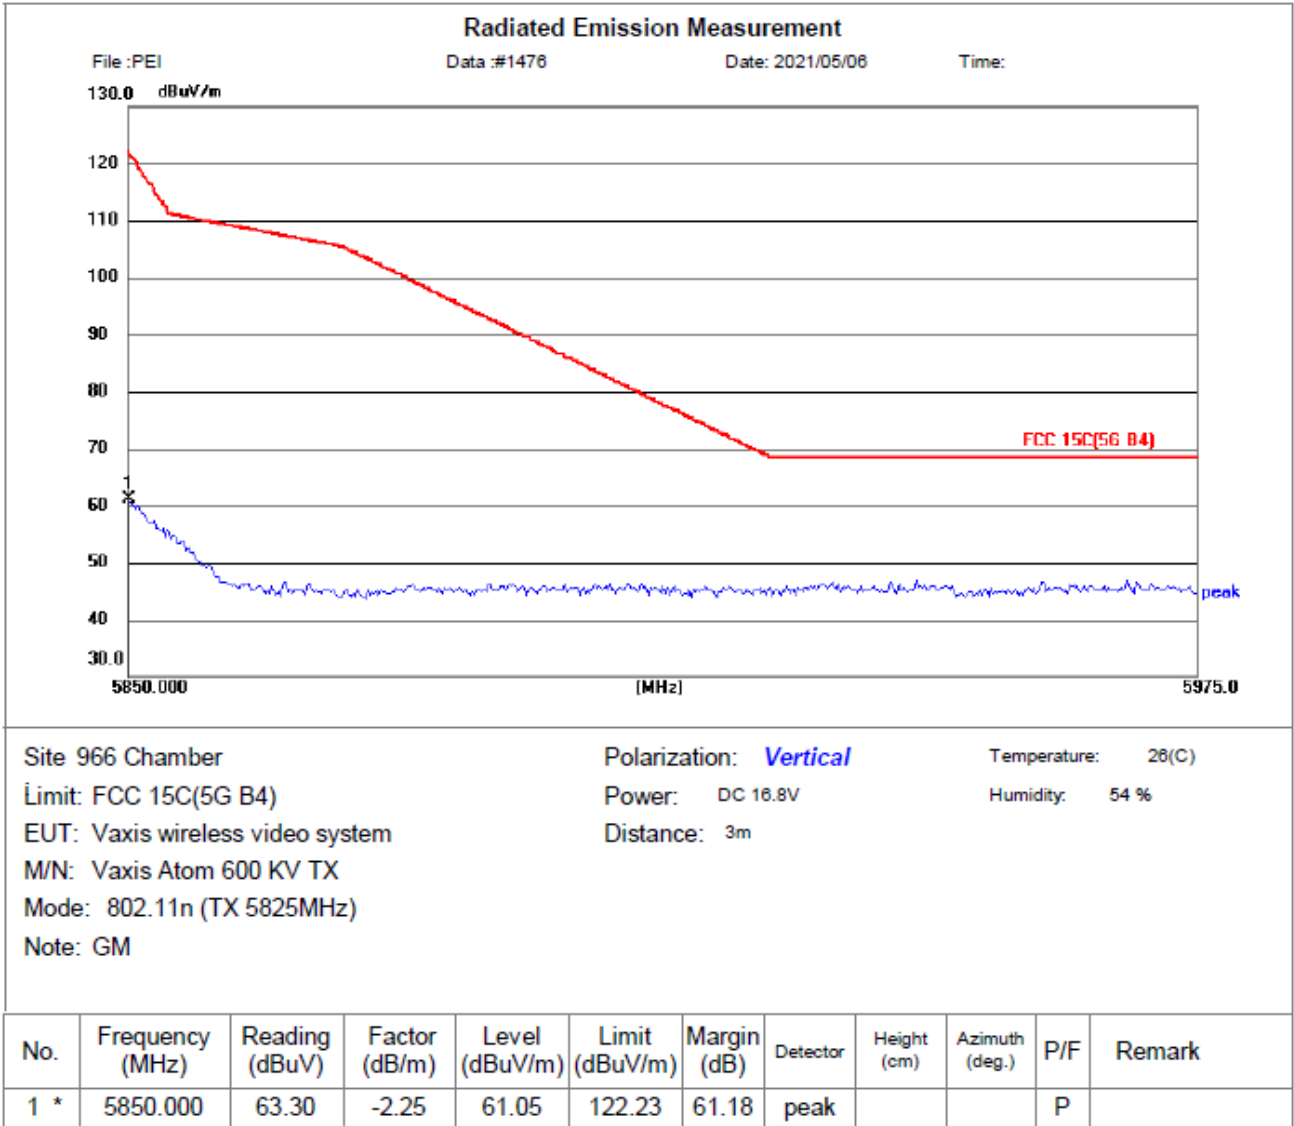


Note: We tested 802.11a/n mode the all data rate and recorded the worst case data for this channel to be 6Mbps for 802.11a mode and MCS0 for 802.11n mode.


7.7 Spurious Emission

7.7.1 Radiated Emission Method

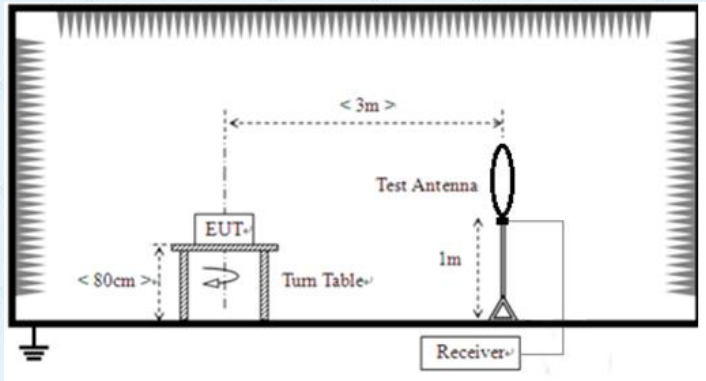Test Requirement:	FCC Part15 C Section 15.209, Part 15E Section 15.407(b)(4)				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 40GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9kHz-150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
AV		1MHz	3MHz	Average Value	
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	300m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
		Frequency	Limit (dBm/MHz)	Remark	
	Above 1GHz	-27.0	Peak Value		
Test setup:	For radiated emissions from 9kHz to 30MHz				
					
	For radiated emissions from 30MHz to 1GHz				

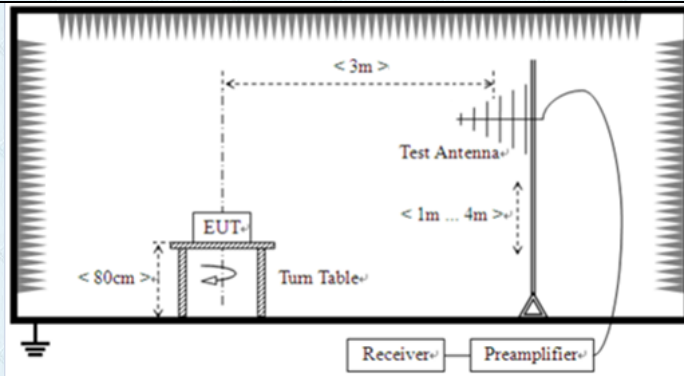

For radiated emissions above 1GHz

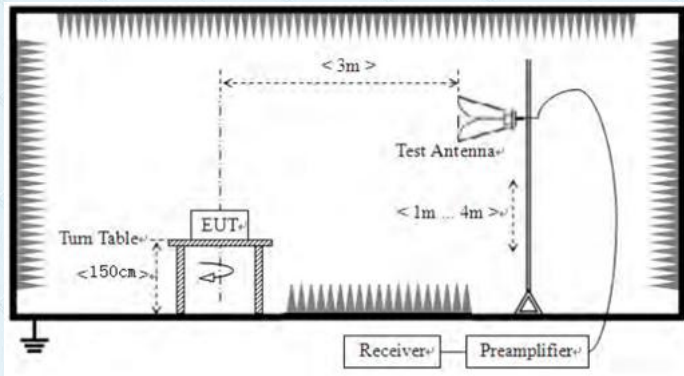

Test Procedure:

1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test

	worst case mode is recorded in the report.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	26 °C	Humid.:	54%	Press.:	1012mbar
Test voltage:	DC 16.8V					
Test results:	Pass					

Remarks:


1. *Only the worst case Main Antenna test data.*
2. *Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*

Measurement Data:

9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


30MHz~ 1GHz
Horizontal: 802.11a (TX 5745MHz)

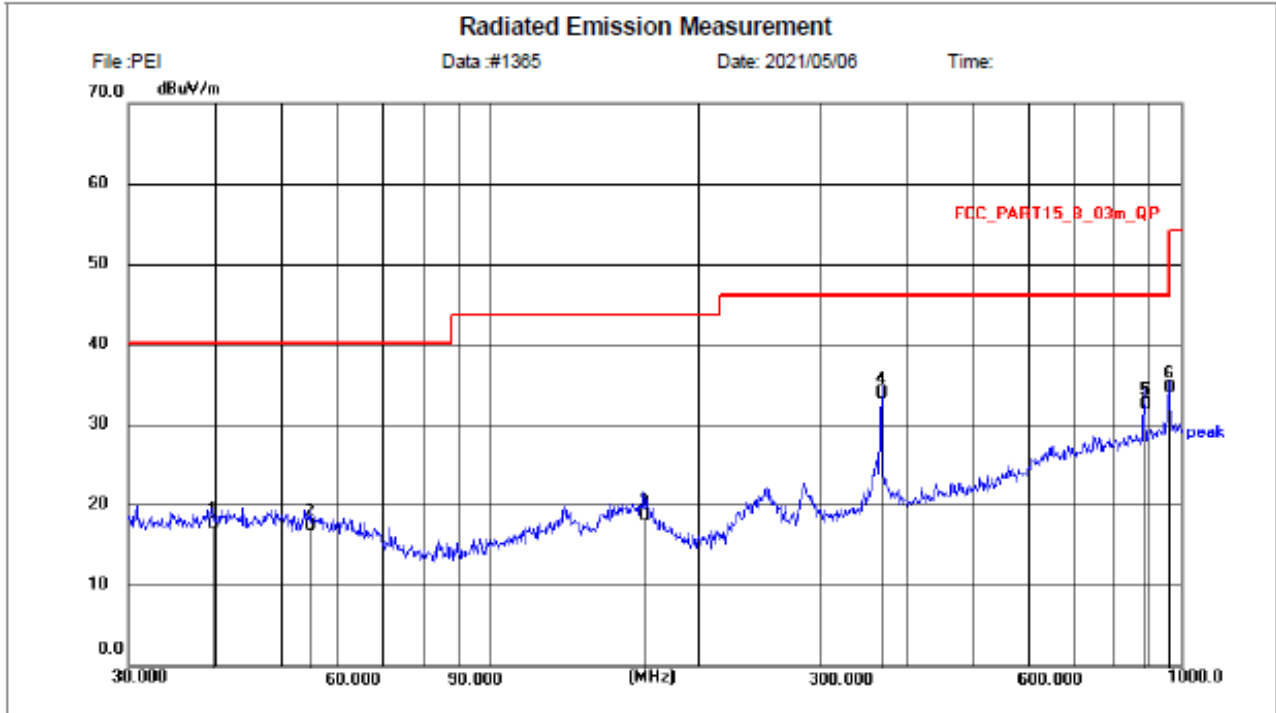

Site: 966 Chamber Polarization: *Horizontal* Temperature: 26(C)
Limit: FCC_PART15_B_03m_QP Power: DC 16.8V Humidity: 54 %
EUT: Vaxis wireless video system Distance: 3m
M/N: Vaxis Atom 600 KV TX
Mode: TX 5745MHz
Note: GM
802.11a

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	39.5757	2.39	15.27	17.66	40.00	22.34	QP	205	178	P	
2	55.0274	2.81	14.54	17.35	40.00	22.65	QP	185	27	P	
3	166.6513	3.28	15.35	18.63	43.50	24.87	QP	190	236	P	
4	368.1116	17.72	16.19	33.91	46.00	12.09	QP	200	31	P	
5	884.5028	8.66	23.86	32.52	46.00	13.48	QP	205	223	P	
6 *	958.7943	9.87	24.63	34.50	46.00	11.50	QP	170	55	P	


Vertical: 802.11a (TX 5745MHz)

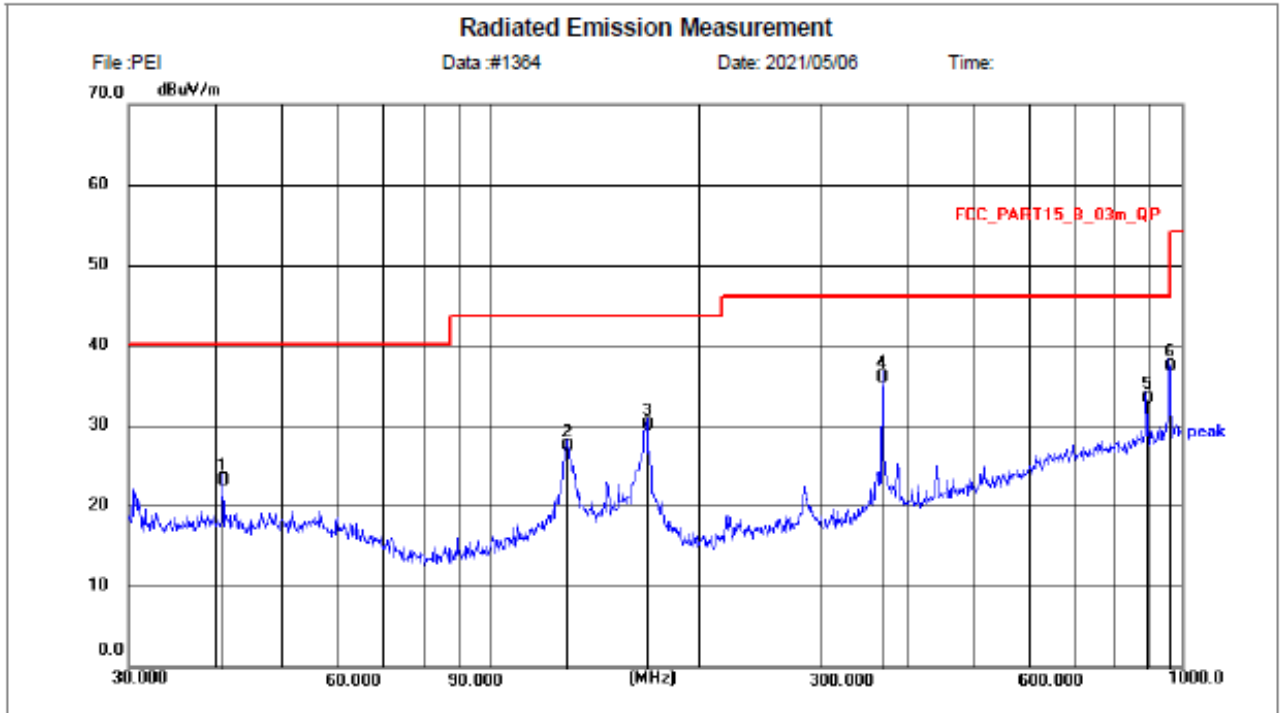

Site 966 Chamber Polarization: *Vertical* Temperature: 26(C)
 Limit: FCC_PART15_B_03m_QP Power: DC 16.8V Humidity: 54 %
 EUT: Vaxis wireless video system Distance: 3m
 M/N: Vaxis Atom 600 KV TX
 Mode: TX 5745MHz
 Note: GM
 802.11a

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	41.1319	7.89	15.25	23.14	40.00	16.86	QP	100	42	P	
2	129.4677	12.75	14.58	27.33	43.50	16.17	QP	100	48	P	
3	168.4137	14.75	15.18	29.93	43.50	13.57	QP	105	340	P	
4	368.1116	19.72	16.19	35.91	46.00	10.09	QP	105	350	P	
5	887.6097	9.43	23.90	33.33	46.00	12.67	QP	100	58	P	
6 *	955.4380	12.82	24.62	37.44	46.00	8.56	QP	100	335	P	

Horizontal: 802.11a (TX 5825MHz)

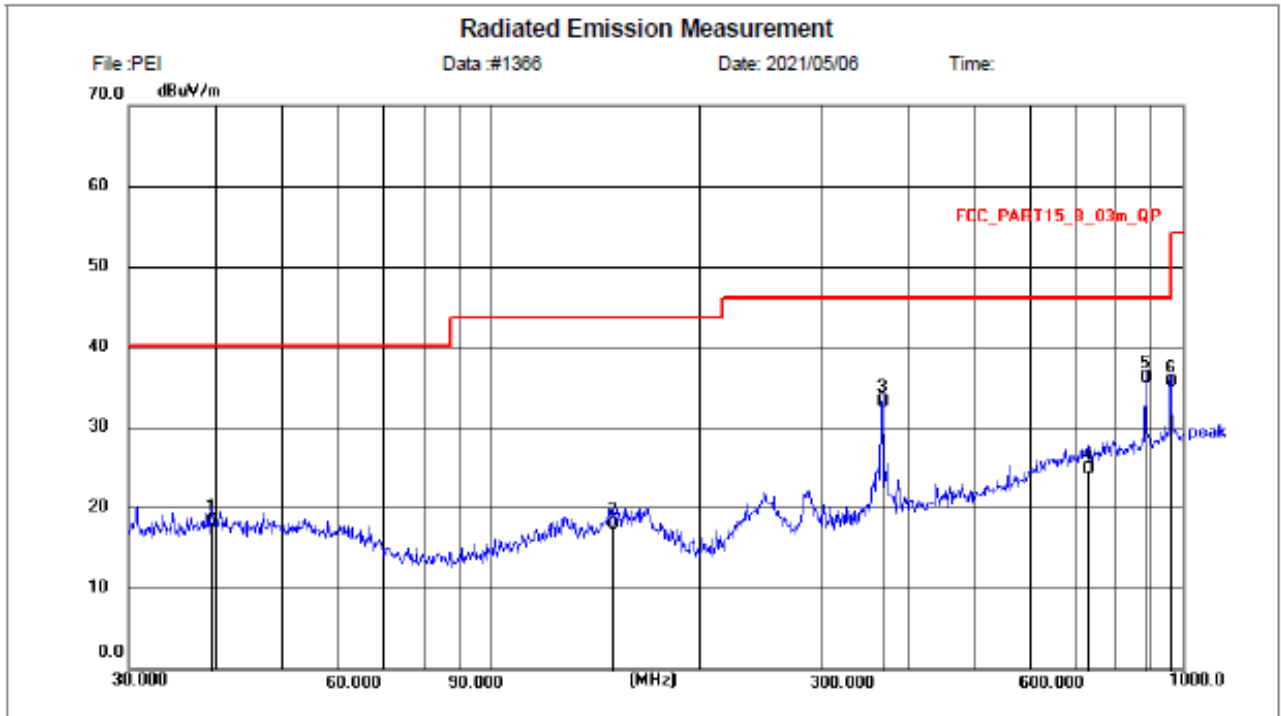


Site: 966 Chamber
 Limit: FCC_PART15_B_03m_QP
 EUT: Vaxis wireless video system
 M/N: Vaxis Atom 600 KV TX
 Mode: TX 5825MHz
 Note: GM
 802.11a

Polarization: *Horizontal*
 Power: DC 16.8V
 Distance: 3m

Temperature: 26(C)
 Humidity: 54 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	39.5756	2.94	15.27	18.21	40.00	21.79	QP	185	36	P	
2	150.0107	2.01	16.00	18.01	43.50	25.49	QP	205	189	P	
3	368.1116	17.01	16.19	33.20	46.00	12.80	QP	225	208	P	
4	729.3582	2.44	22.30	24.74	46.00	21.26	QP	200	248	P	
5 *	881.4067	12.25	23.83	36.08	46.00	9.92	QP	159	277	P	
6	958.7943	11.04	24.63	35.67	46.00	10.33	QP	196	24	P	


Vertical: 802.11a (TX 5825MHz)

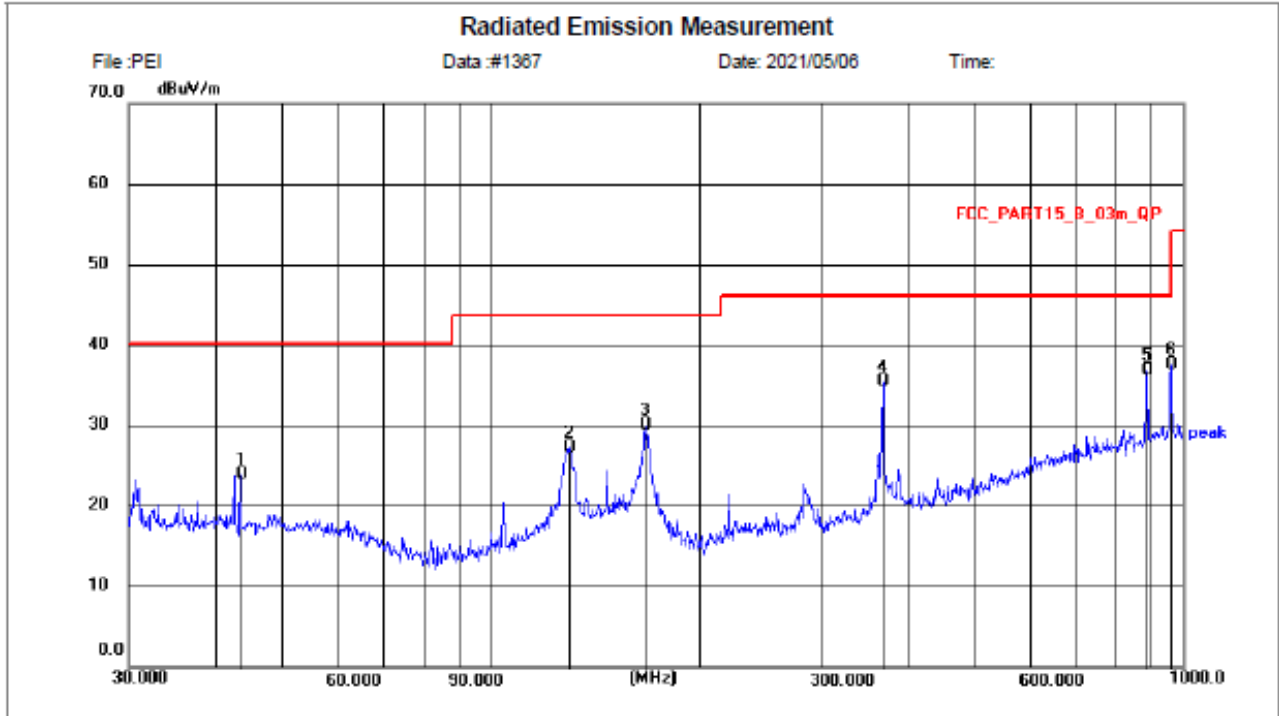

Site 966 Chamber Polarization: **Vertical** Temperature: 26(C)
 Limit: FCC_PART15_B_03m_QP Power: DC 16.8V Humidity: 54 %
 EUT: Vaxis wireless video system Distance: 3m
 MN: Vaxis Atom 600 KV TX
 Mode: TX 5825MHz
 Note: GM
 802.11a

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	43.5057	8.83	15.08	23.91	40.00	16.09	QP	120	49	P	
2	129.9225	12.68	14.61	27.29	43.50	16.21	QP	105	19	P	
3	167.2366	14.63	15.30	29.93	43.50	13.57	QP	100	158	P	
4	368.1116	19.29	16.19	35.48	46.00	10.52	QP	100	55	P	
5	884.5028	12.98	23.86	36.84	46.00	9.16	QP	110	247	P	
6 *	958.7943	12.86	24.63	37.49	46.00	8.51	QP	105	37	P	


Horizontal: 802.11n (HT20) (TX 5745MHz)

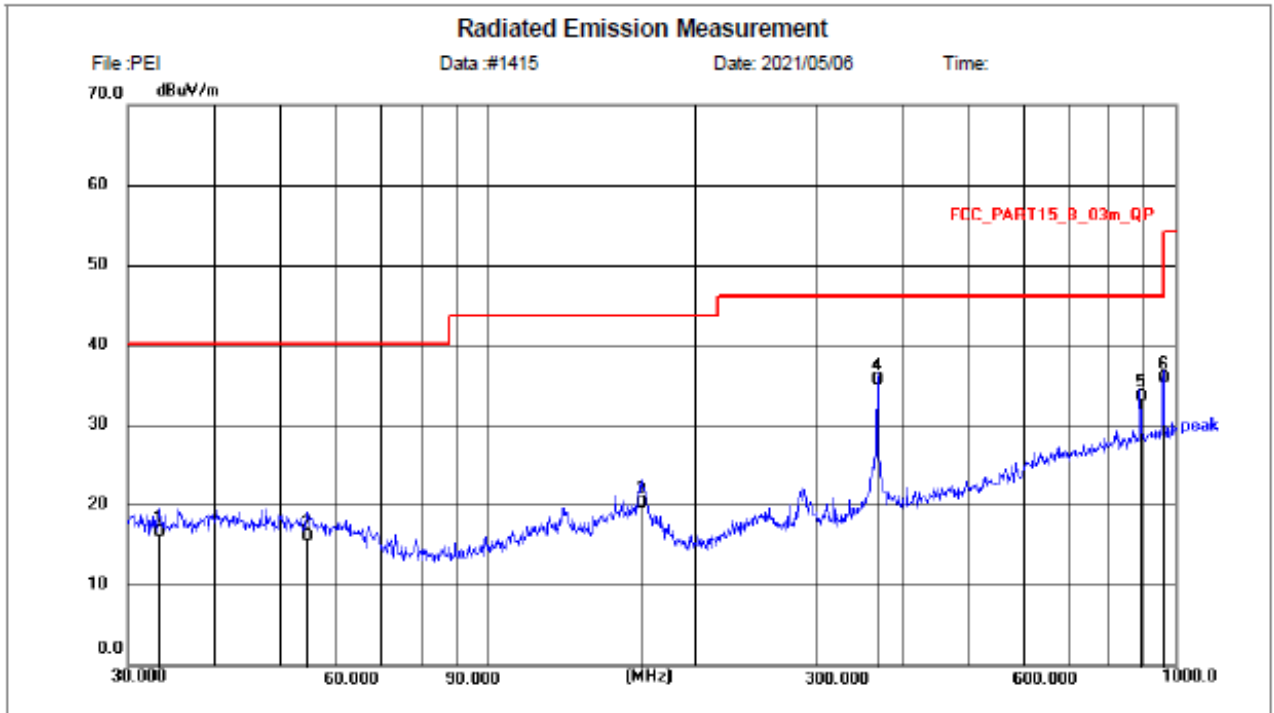

Site 966 Chamber	Polarization: <i>Horizontal</i>	Temperature: 26(C)
Limit: FCC_PART15_B_03m_QP	Power: DC 16.8V	Humidity: 54 %
EUT: Vaxis wireless video system	Distance: 3m	
M/N: Vaxis Atom 600 KV TX		
Mode: TX 5745MHz		
Note: GM		
802.11n		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	33.3278	1.98	14.54	16.52	40.00	23.48	QP	205	145	P	
2	54.6428	1.51	14.57	16.08	40.00	23.92	QP	200	173	P	
3	167.2366	4.87	15.30	20.17	43.50	23.33	QP	190	58	P	
4	368.1116	19.47	16.19	35.66	46.00	10.34	QP	195	224	P	
5	887.6098	9.58	23.90	33.48	46.00	12.52	QP	205	58	P	
6 *	958.7943	11.20	24.63	35.83	46.00	10.17	QP	210	107	P	


Vertical: 802.11n (HT20) (TX 5745MHz)

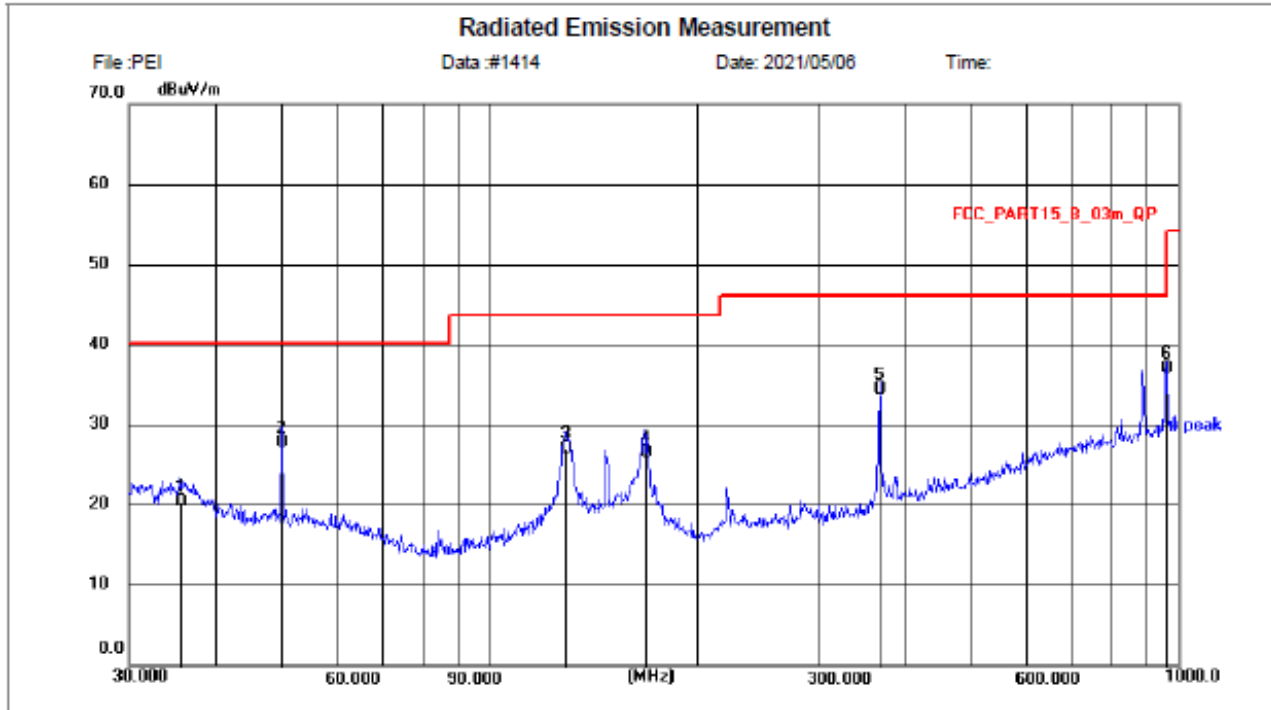

Site 966 Chamber	Polarization: <i>Vertical</i>	Temperature: 26(C)
Limit: FCC_PART15_B_03m_QP	Power: DC 16.8V	Humidity: 54 %
EUT: Vaxis wireless video system	Distance: 3m	
M/N: Vaxis Atom 600 KV TX		
Mode: TX 5745MHz		
Note: GM		
802.11n		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	35.6239	5.63	14.70	20.33	40.00	19.67	QP	100	344	P	
2	50.0566	12.92	14.90	27.82	40.00	12.18	QP	105	282	P	
3	129.4677	12.47	14.58	27.05	43.50	16.45	QP	110	335	P	
4	167.8242	11.33	15.24	26.57	43.50	16.93	QP	185	63	P	
5	368.1116	18.17	16.19	34.36	46.00	11.64	QP	210	178	P	
6 *	958.7943	12.34	24.63	36.97	46.00	9.03	QP	225	185	P	


Horizontal: 802.11n (HT20) (TX 5825MHz)

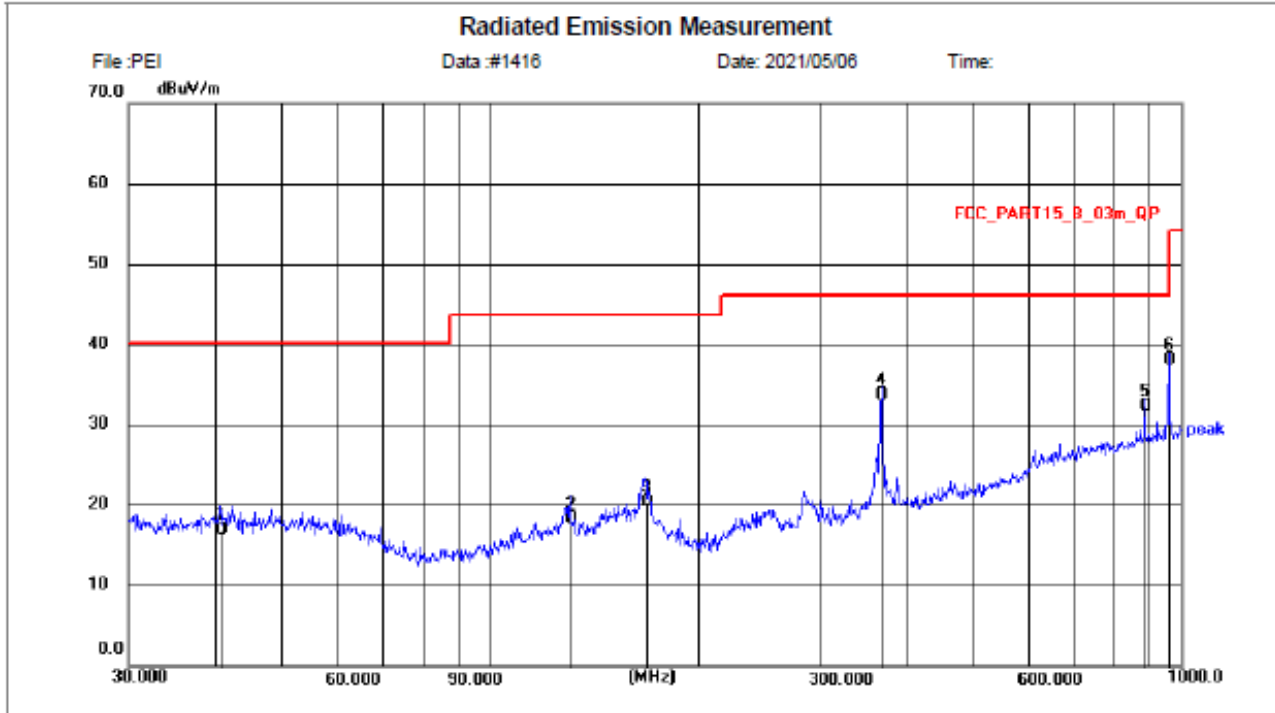

Site: 966 Chamber Polarization: *Horizontal* Temperature: 26(C)
 Limit: FCC_PART15_B_03m_QP Power: DC 16.8V Humidity: 54 %
 EUT: Vaxis wireless video system Distance: 3m
 M/N: Vaxis Atom 600 KV TX
 Mode: TX 5825MHz
 Note: GM
 802.11n

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	40.7016	1.62	15.28	16.90	40.00	23.10	QP	210	208	P	
2	130.3789	3.76	14.58	18.34	43.50	25.16	QP	220	185	P	
3	167.8242	5.08	15.24	20.32	43.50	23.18	QP	205	247	P	
4	368.1116	17.47	16.19	33.66	46.00	12.34	QP	220	174	P	
5	884.5028	8.47	23.86	32.33	46.00	13.67	QP	210	85	P	
6 *	958.7943	13.38	24.63	38.01	46.00	7.99	QP	185	155	P	


Vertical: 802.11n (HT20) (TX 5825MHz)

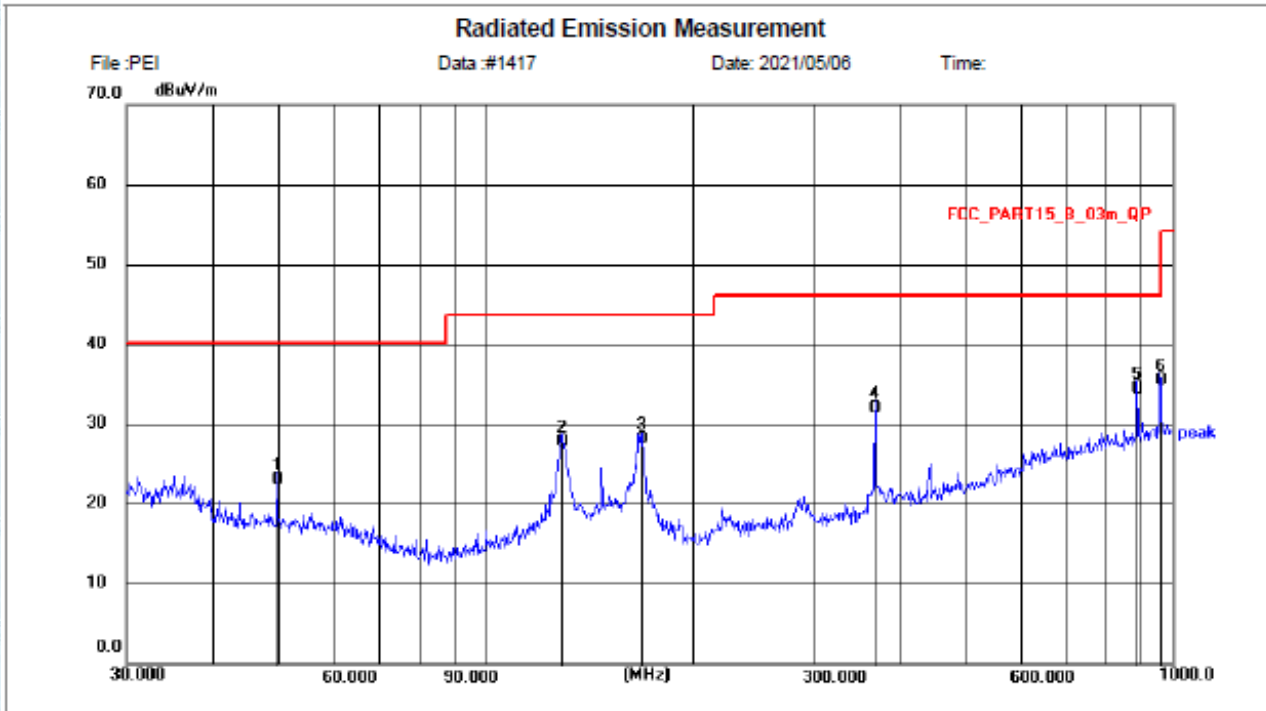

Site 966 Chamber Polarization: *Vertical* Temperature: 26(C)
 Limit: FCC_PART15_B_03m_QP Power: DC 16.8V Humidity: 54 %
 EUT: Vaxis wireless video system Distance: 3m
 M/N: Vaxis Atom 600 KV TX
 Mode: TX 5825MHz
 Note: GM
 802.11n

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	49.7066	8.17	14.90	23.07	40.00	16.93	QP	100	23	P	
2	129.0145	13.19	14.56	27.75	43.50	15.75	QP	100	251	P	
3	169.0053	12.91	15.13	28.04	43.50	15.46	QP	105	26	P	
4	368.1116	15.80	16.19	31.99	46.00	14.01	QP	100	260	P	
5	884.5028	10.61	23.86	34.47	46.00	11.53	QP	100	242	P	
6 *	955.4381	10.84	24.62	35.46	46.00	10.54	QP	100	289	P	

1GHz~ 18GHz
Horizontal: 802.11a (TX 5745MHz)

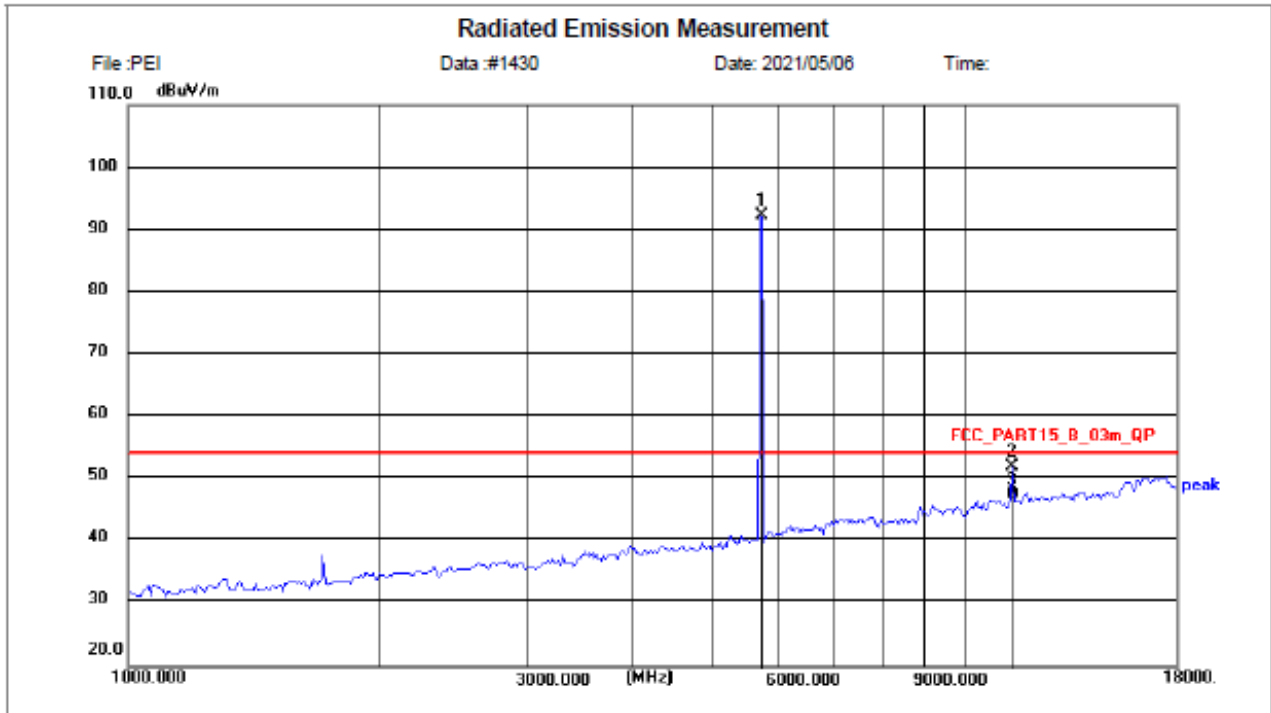


Site: 966 Chamber
 Limit: FCC_PART15_B_03m_QP
 EUT: Vaxis wireless video system
 M/N: Vaxis Atom 600 KV TX
 Mode: 802.11a (TX 5745MHz)
 Note: GM

Polarization: *Horizontal*
 Power: DC 16.8V
 Distance: 3m


Temperature: 26(C)
 Humidity: 54 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5745.000	94.67	-2.41	92.26	/	/	peak			/	
2	11490.279	39.60	12.35	51.95	74.00	22.05	peak			P	
3	11490.279	35.25	12.35	47.60	54.00	6.40	AVG			P	


Vertical: 802.11a (TX 5745MHz)

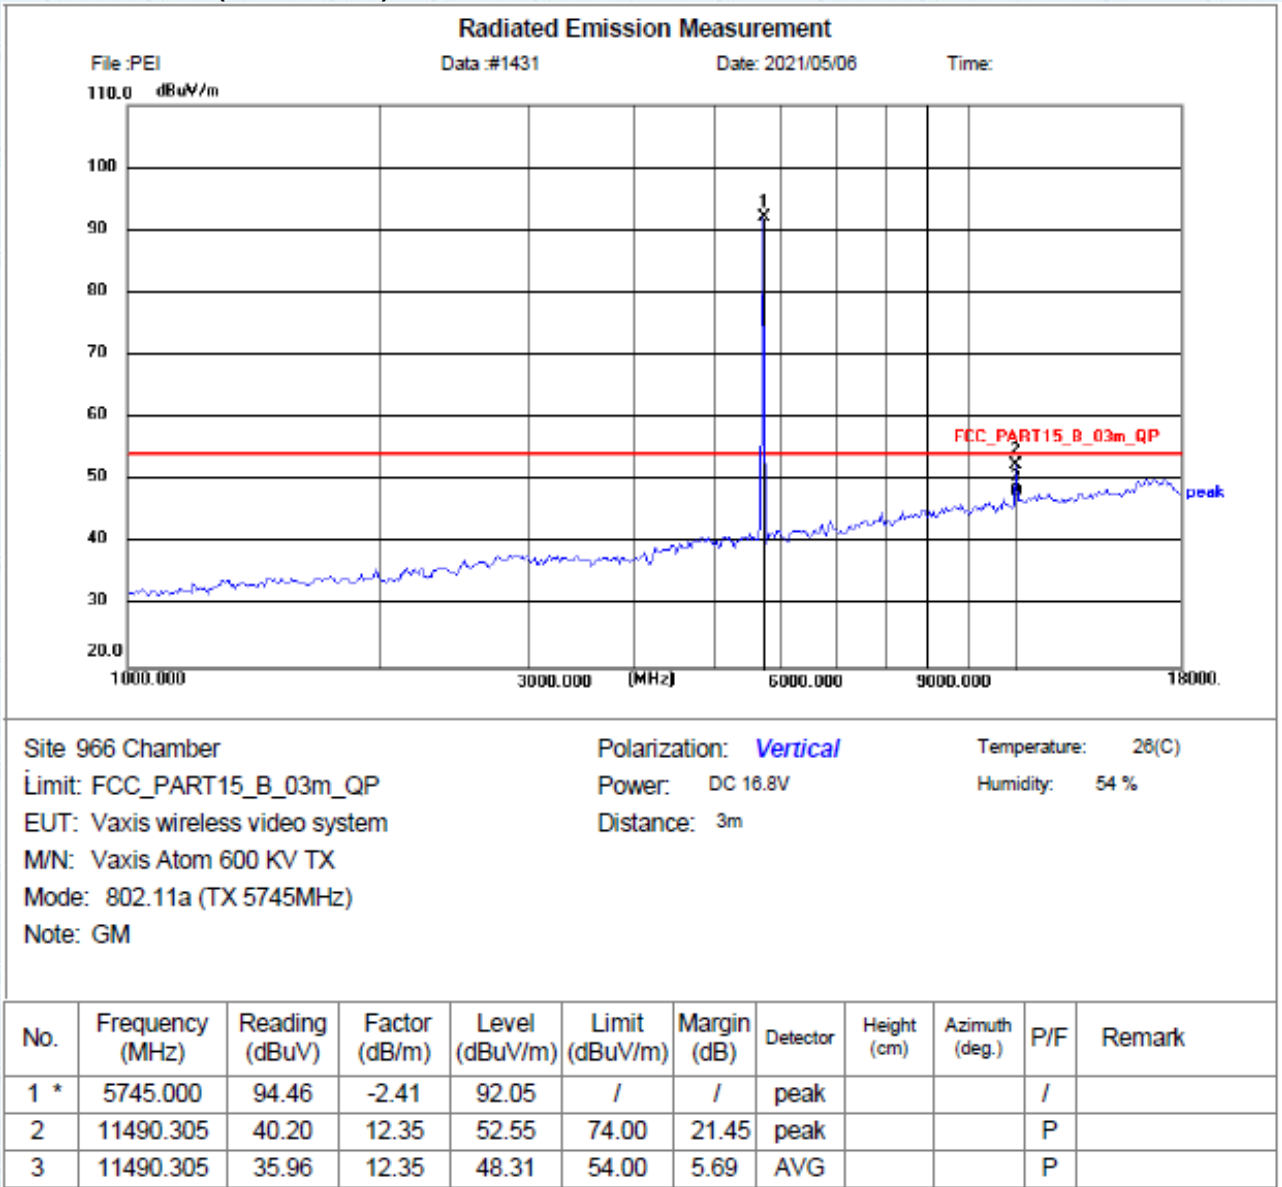


Horizontal: 802.11a (TX 5825MHz)

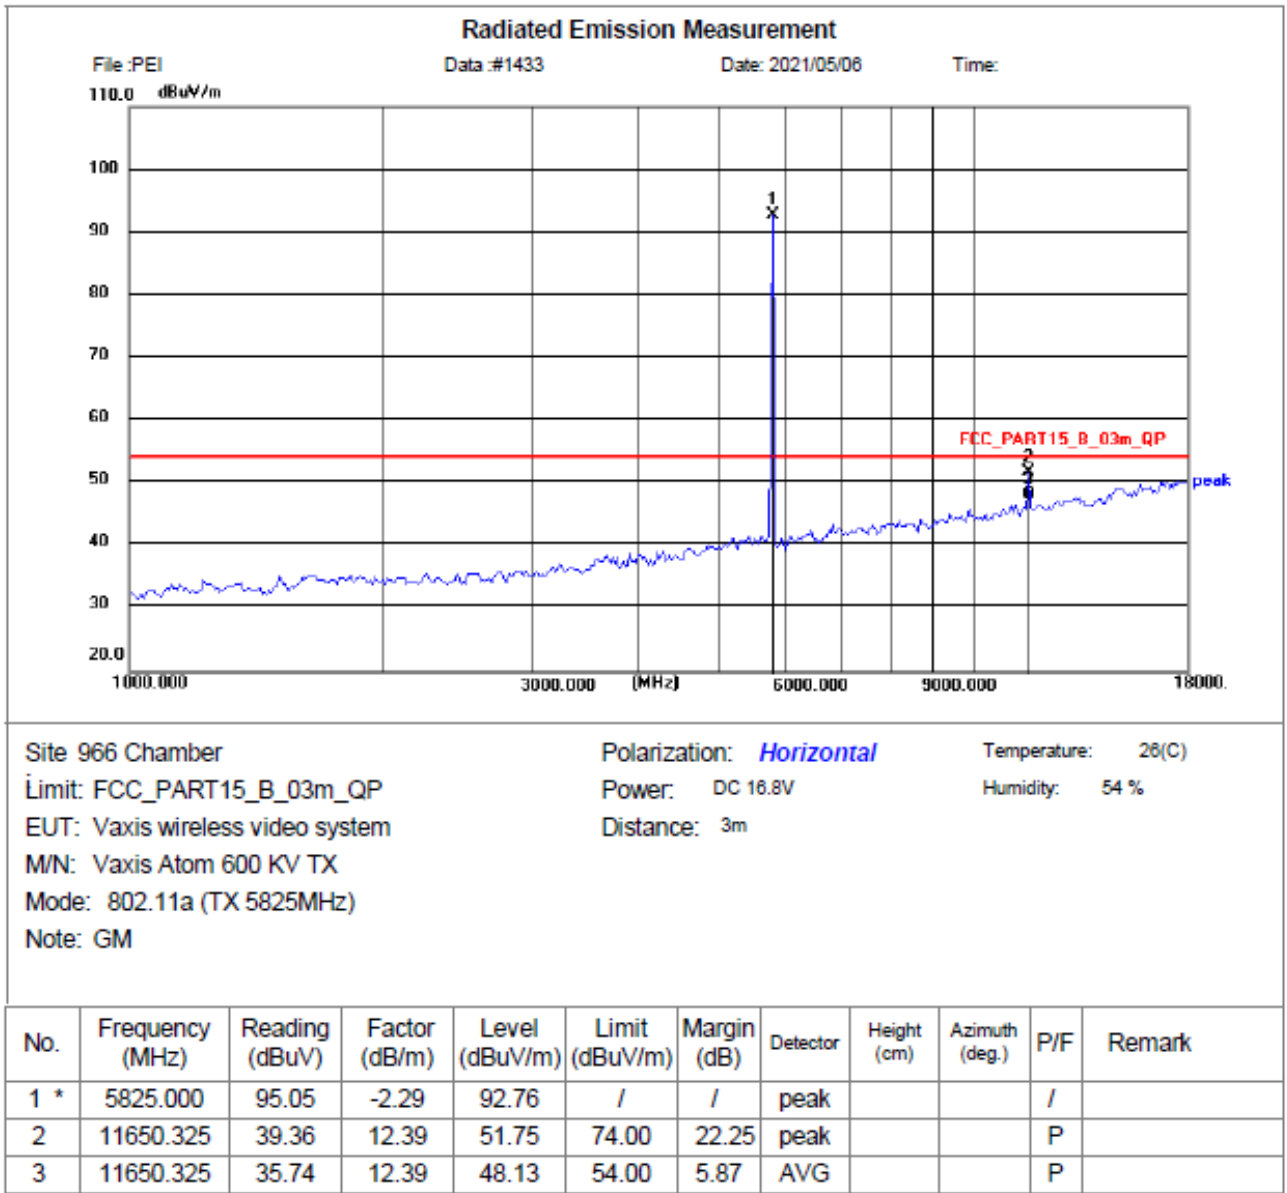

Vertical: 802.11a (TX 5825MHz)

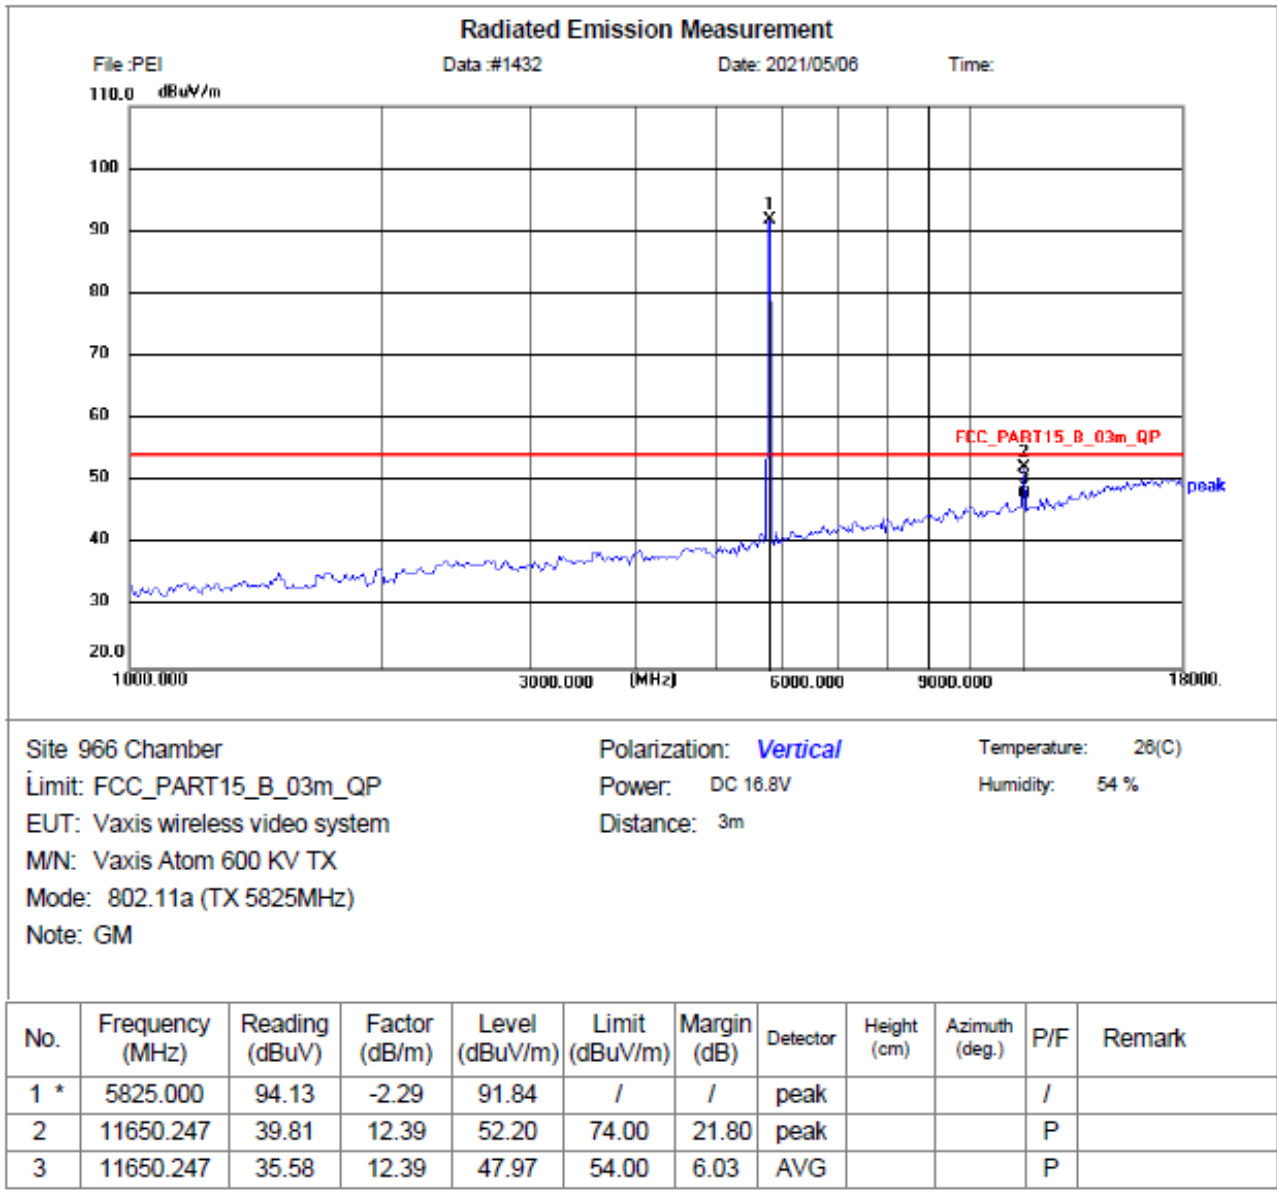


Horizontal: 802.11n (HT20) (TX 5745MHz)

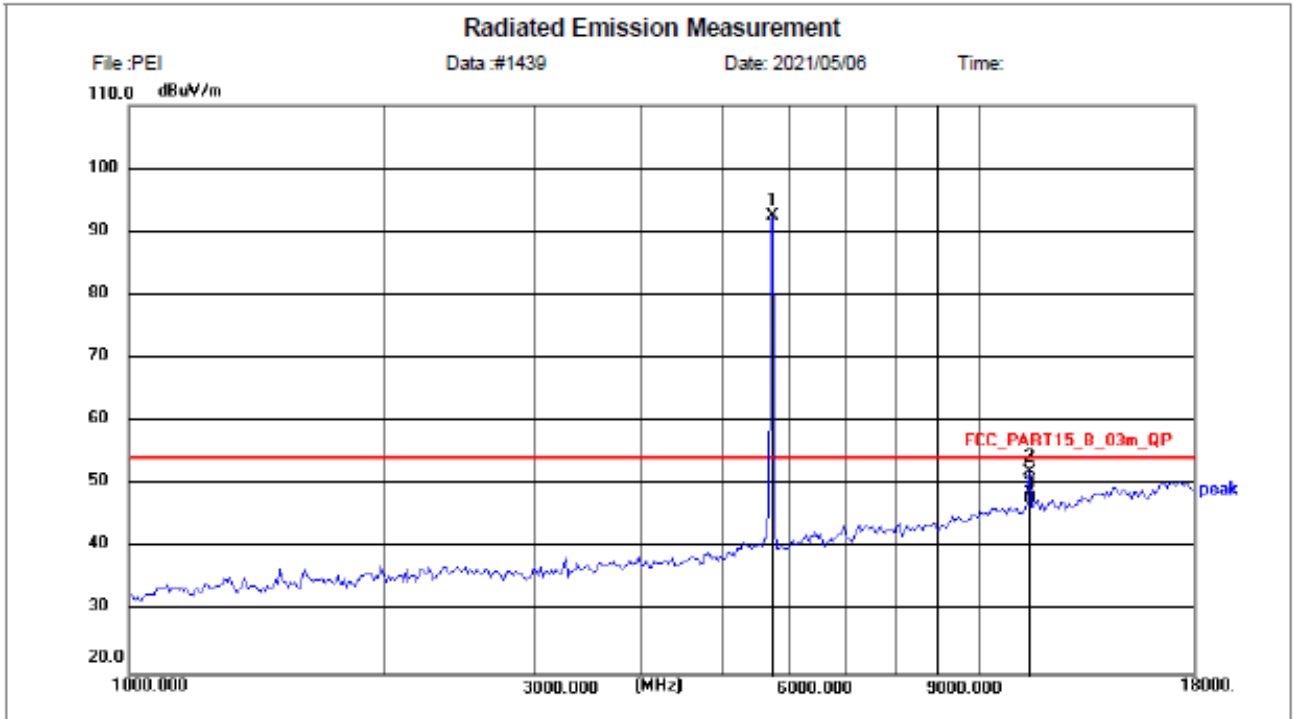

Site 966 Chamber Polarization: *Horizontal* Temperature: 26(C)
 Limit: FCC_PART15_B_03m_QP Power: DC 16.8V Humidity: 54 %
 EUT: Vaxis wireless video system Distance: 3m
 M/N: Vaxis Atom 600 KV TX
 Mode: 802.11n (TX 5745MHz)
 Note: GM

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5745.000	95.03	-2.41	92.62	/	/	peak			/	
2	11490.315	39.72	12.35	52.07	74.00	21.93	peak			P	
3	11490.315	35.38	12.35	47.73	54.00	6.27	AVG			P	


Vertical: 802.11n (HT20) (TX 5745MHz)

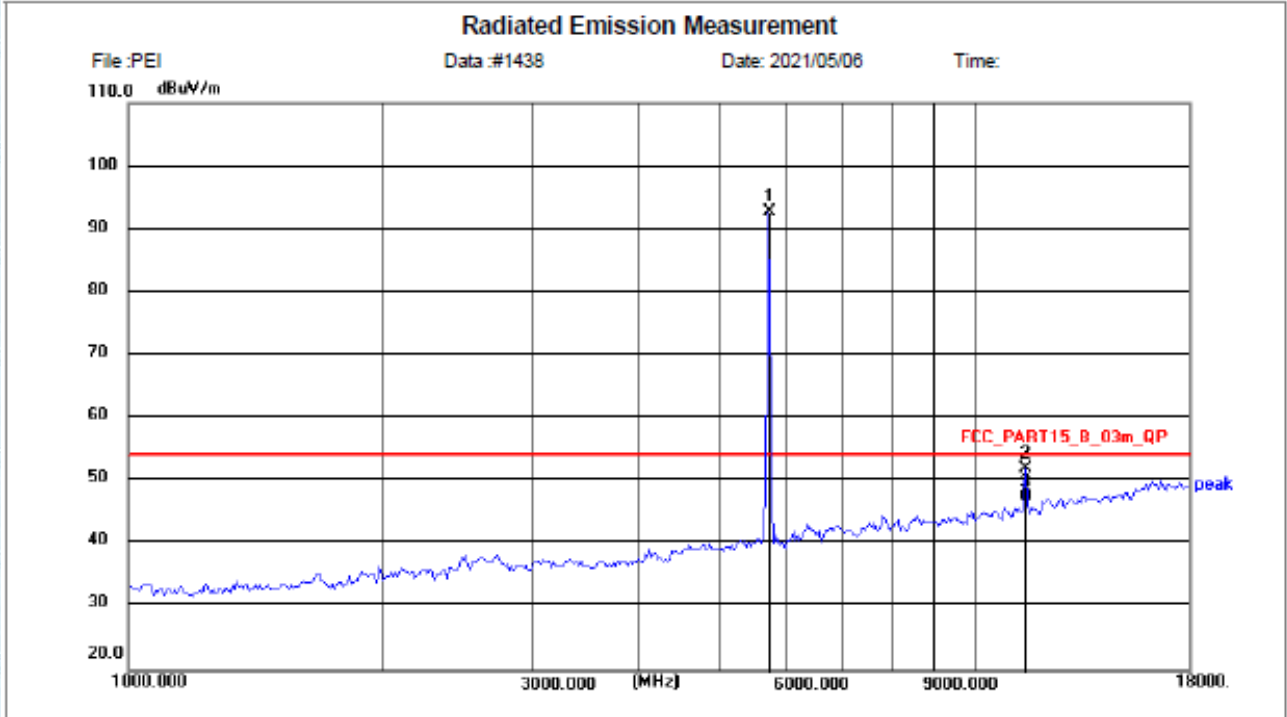

Site 966 Chamber	Polarization: Vertical	Temperature: 26(C)
Limit: FCC_PART15_B_03m_QP	Power: DC 16.8V	Humidity: 54 %
EUT: Vaxis wireless video system	Distance: 3m	
M/N: Vaxis Atom 600 KV TX		
Mode: 802.11n (TX 5745MHz)		
Note: GM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5745.000	95.30	-2.41	92.89	/	/	peak			/	
2	11490.251	39.82	12.35	52.17	74.00	21.83	peak			P	
3	11490.251	35.28	12.35	47.63	54.00	6.37	AVG			P	

Horizontal: 802.11n (HT20) (TX 5825MHz)

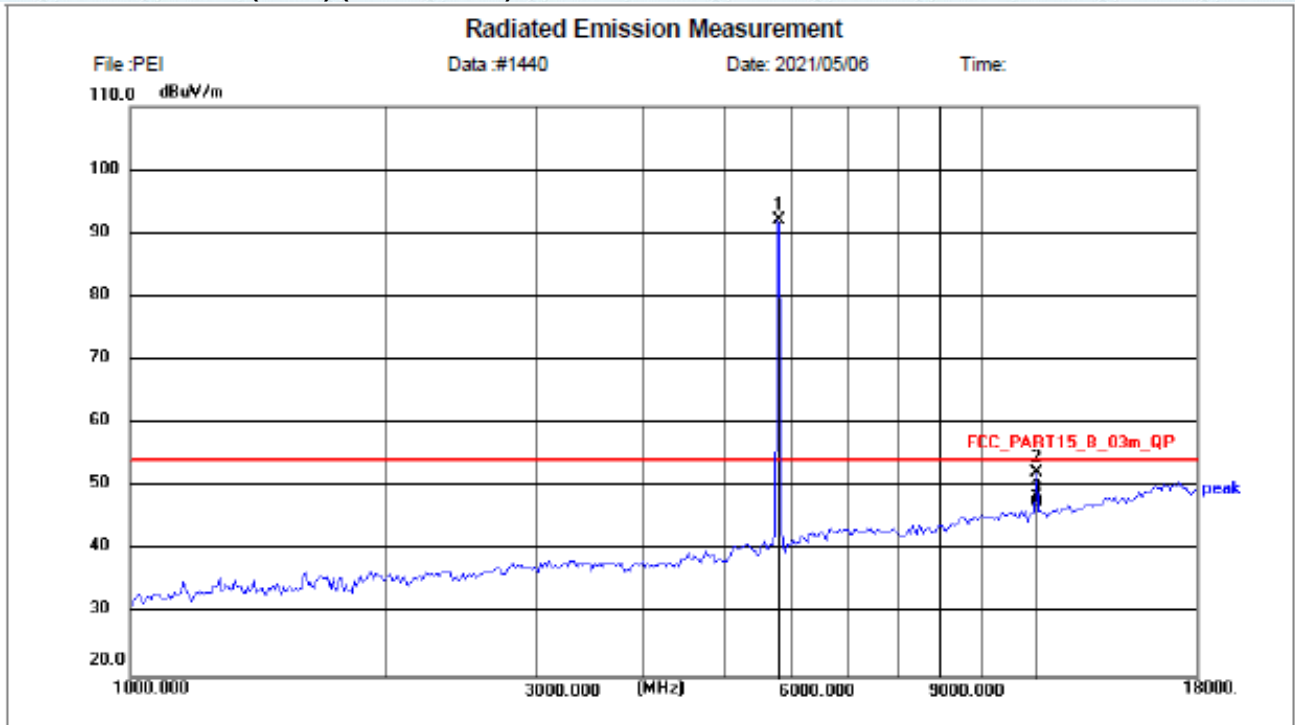


Site: 966 Chamber
 Limit: FCC_PART15_B_03m_QP
 EUT: Vaxis wireless video system
 M/N: Vaxis Atom 600 KV TX
 Mode: 802.11n (TX 5825MHz)
 Note: GM

Polarization: *Horizontal*
 Power: DC 18.8V
 Distance: 3m

Temperature: 26(C)
 Humidity: 54 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5825.000	94.35	-2.29	92.06	/	/	peak			/	
2	11650.287	39.83	12.39	52.22	74.00	21.78	peak			P	
3	11650.287	35.27	12.39	47.66	54.00	6.34	AVG			P	

Vertical: 802.11n (HT20) (TX 5825MHz)

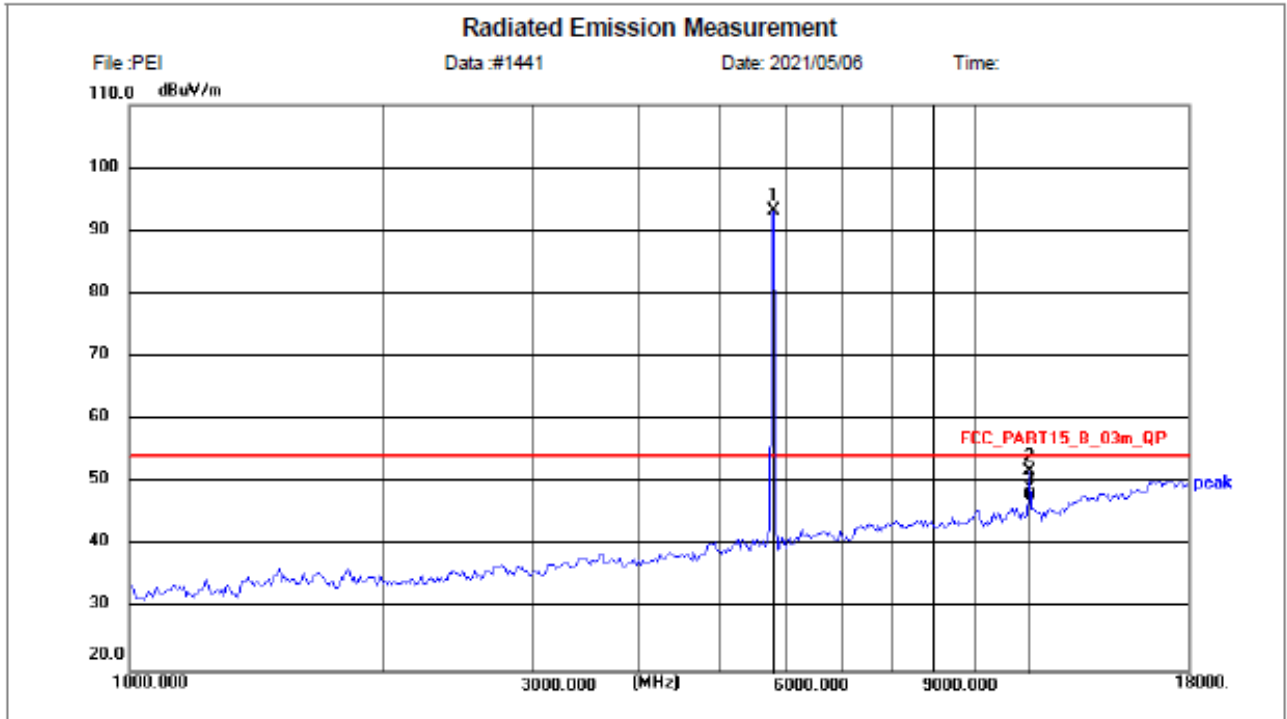

Site: 966 Chamber Polarization: **Vertical** Temperature: 26(C)

Limit: FCC_PART15_B_03m_QP Power: DC 16.8V Humidity: 54 %

EUT: Vaxis wireless video system Distance: 3m


M/N: Vaxis Atom 600 KV TX

Mode: 802.11n (TX 5825MHz)


Note: GM

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5825.000	95.47	-2.29	93.18	/	/	peak			/	
2	11650.308	39.53	12.39	51.92	74.00	22.08	peak			P	
3	11650.308	35.61	12.39	48.00	54.00	6.00	AVG			P	

18GHz~ 26.5GHz
Horizontal: 802.11a (TX 5745MHz)

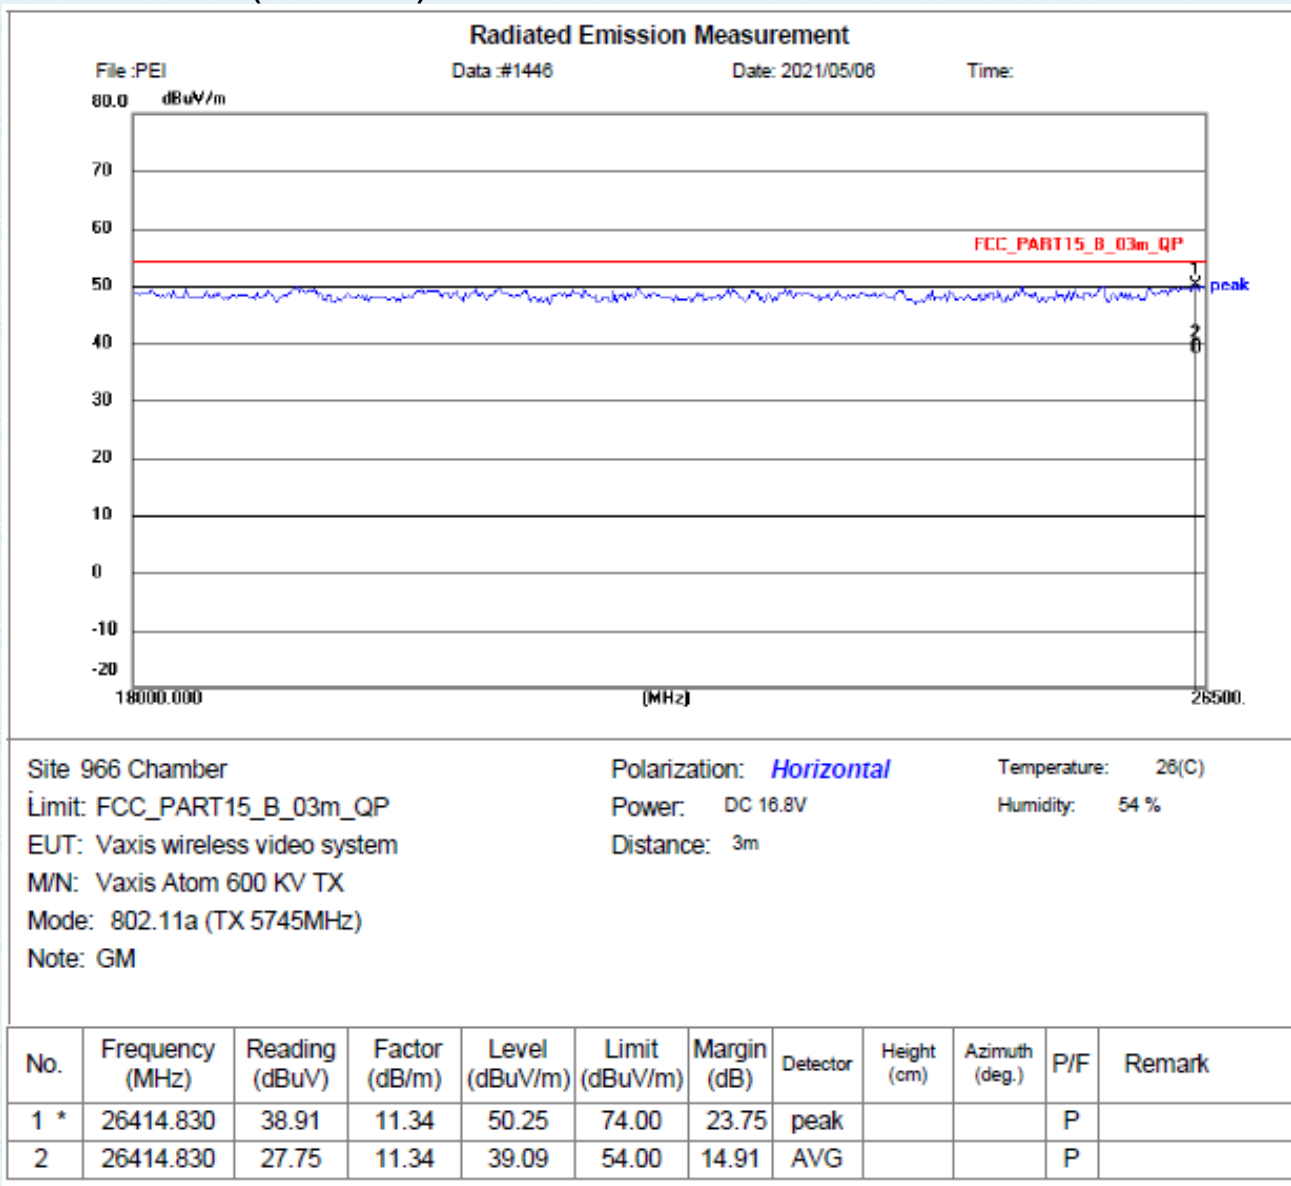


Vertical: 802.11a (TX 5745MHz)

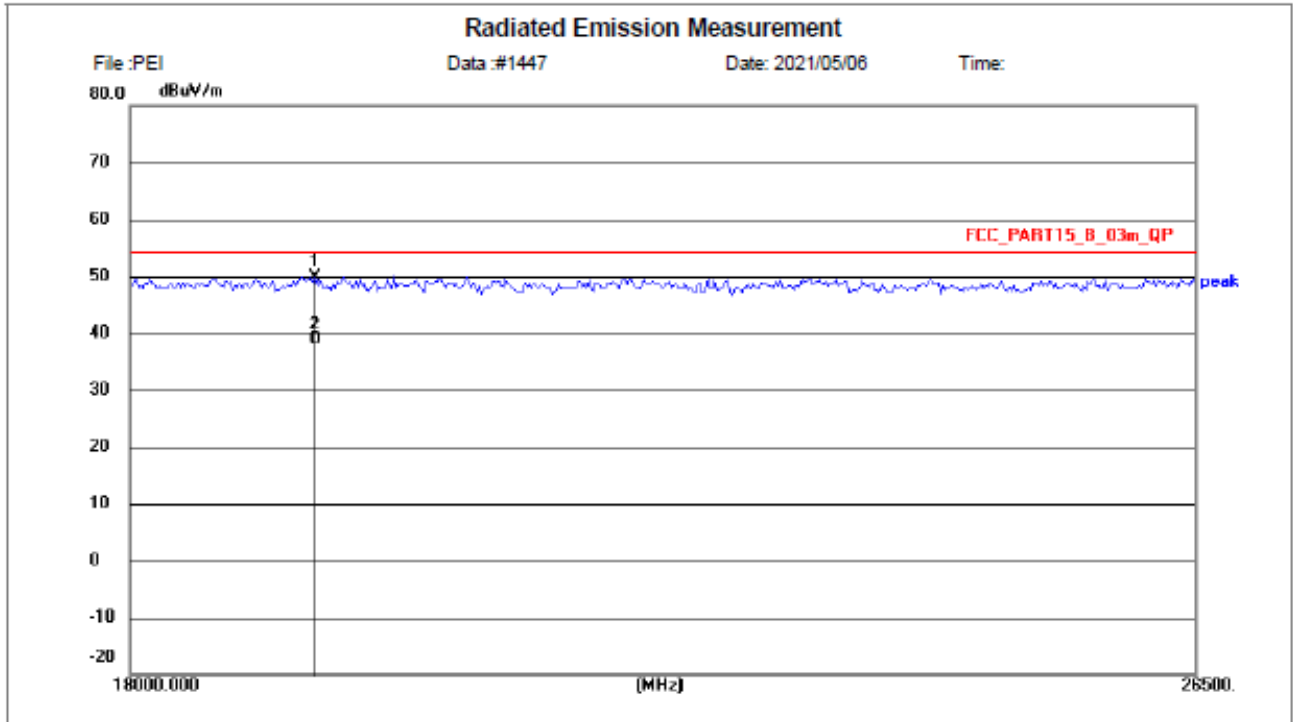


Site 966 Chamber	Polarization: Vertical	Temperature: 26(C)
Limit: FCC_PART15_B_03m_QP	Power: DC 16.8V	Humidity: 54 %
EUT: Vaxis wireless video system	Distance: 3m	
M/N: Vaxis Atom 600 KV TX		
Mode: 802.11a (TX 5745MHz)		
Note: GM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	19260.521	38.75	11.16	49.91	74.00	24.09	peak			P	
2	19260.521	27.60	11.16	38.76	54.00	15.24	AVG			P	

Horizontal: 802.11a (TX 5825MHz)

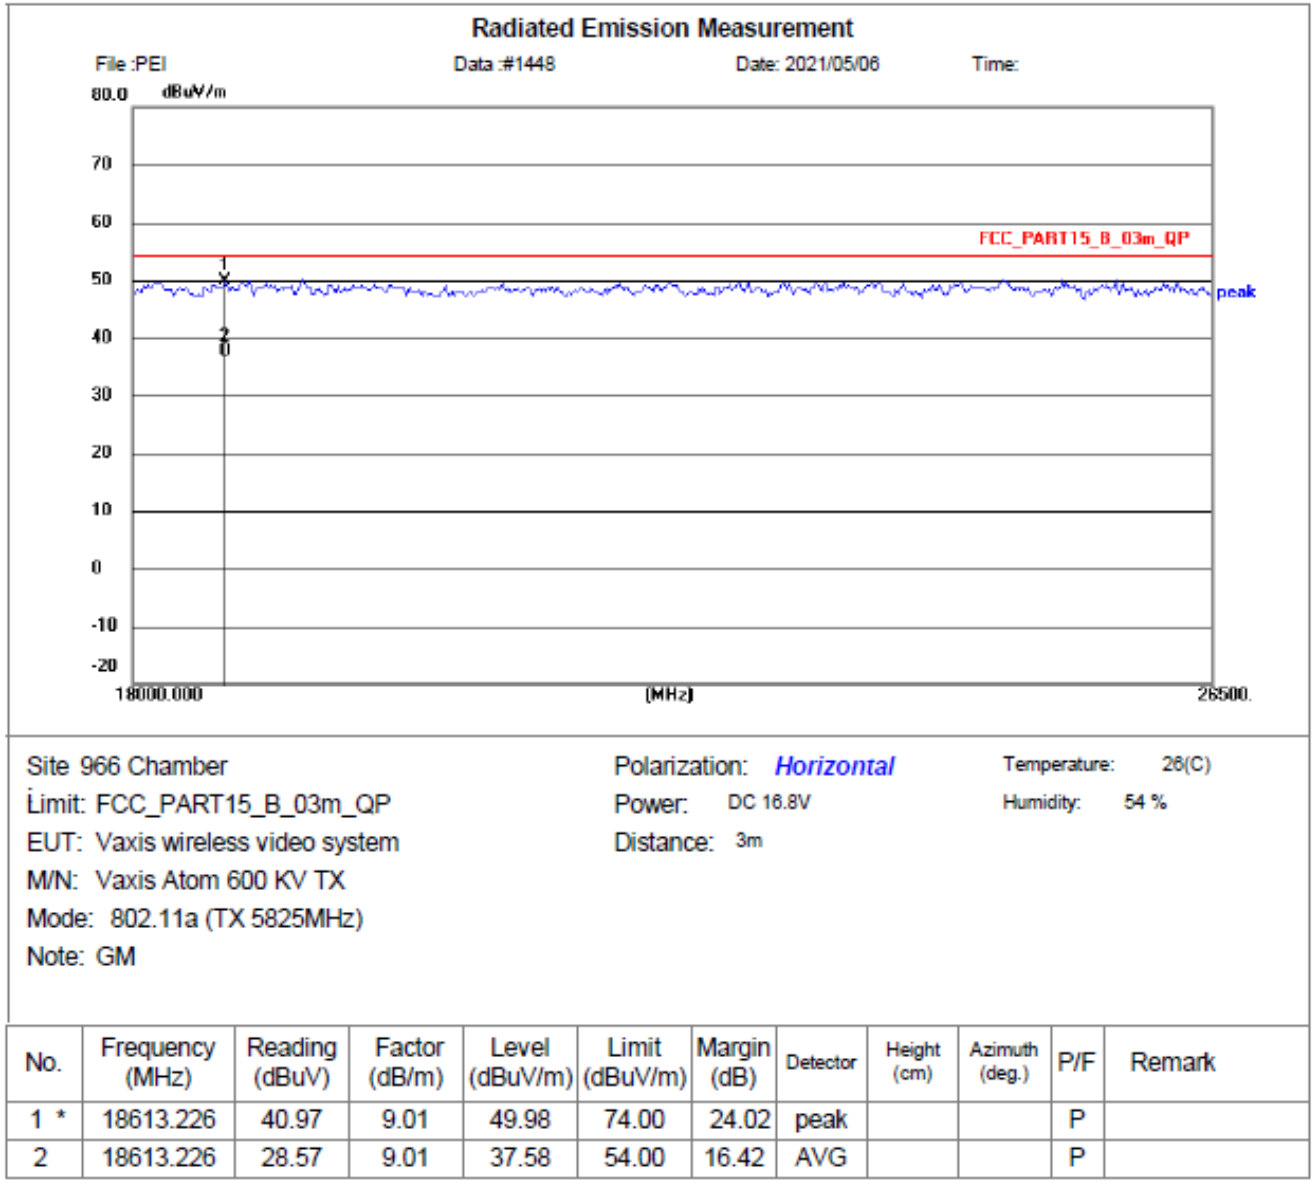

Vertical: 802.11a (TX 5825MHz)

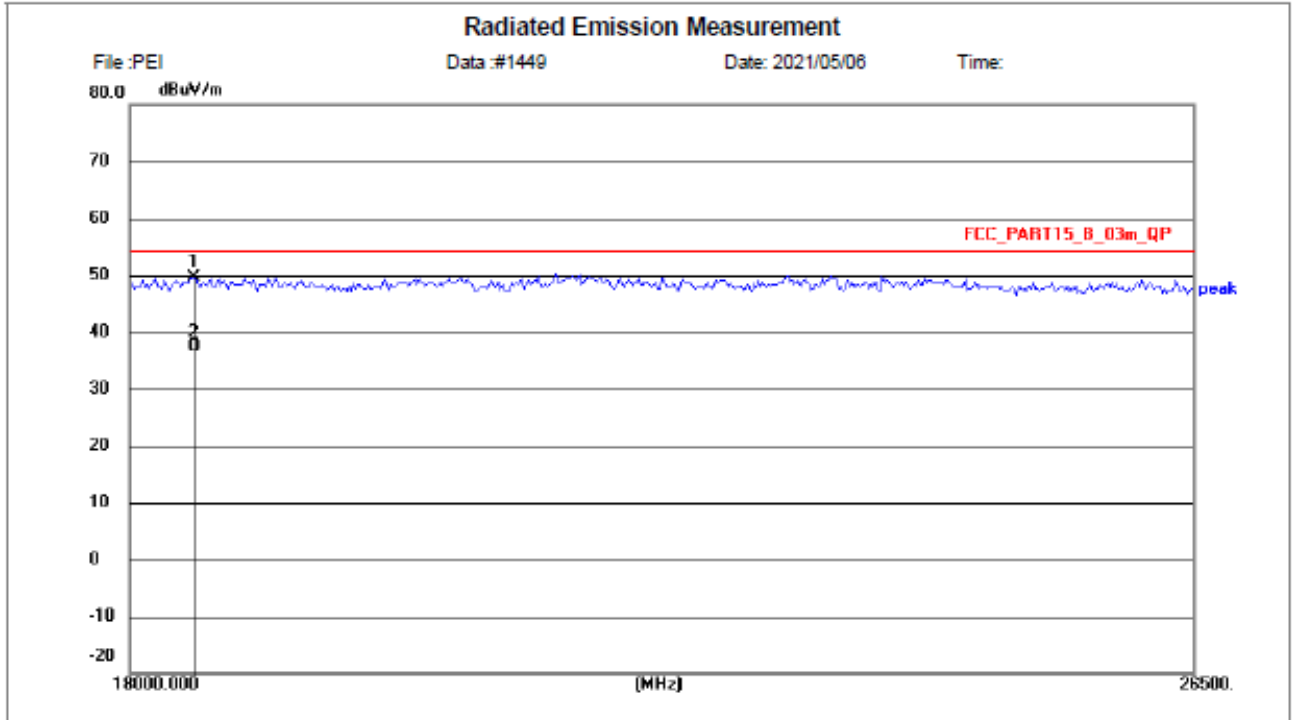


Site: 966 Chamber
 Limit: FCC_PART15_B_03m_QP
 EUT: Vaxis wireless video system
 M/N: Vaxis Atom 600 KV TX
 Mode: 802.11a (TX 5825MHz)
 Note: GM

Polarization: **Vertical**
 Power: DC 16.8V
 Distance: 3m

Temperature: 26(C)
 Humidity: 54 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	18409.182	41.43	8.27	49.70	74.00	24.30	peak			P	
2	18409.182	29.09	8.27	37.36	54.00	16.64	AVG			P	

Horizontal: 802.11n (HT20) (TX 5745MHz)

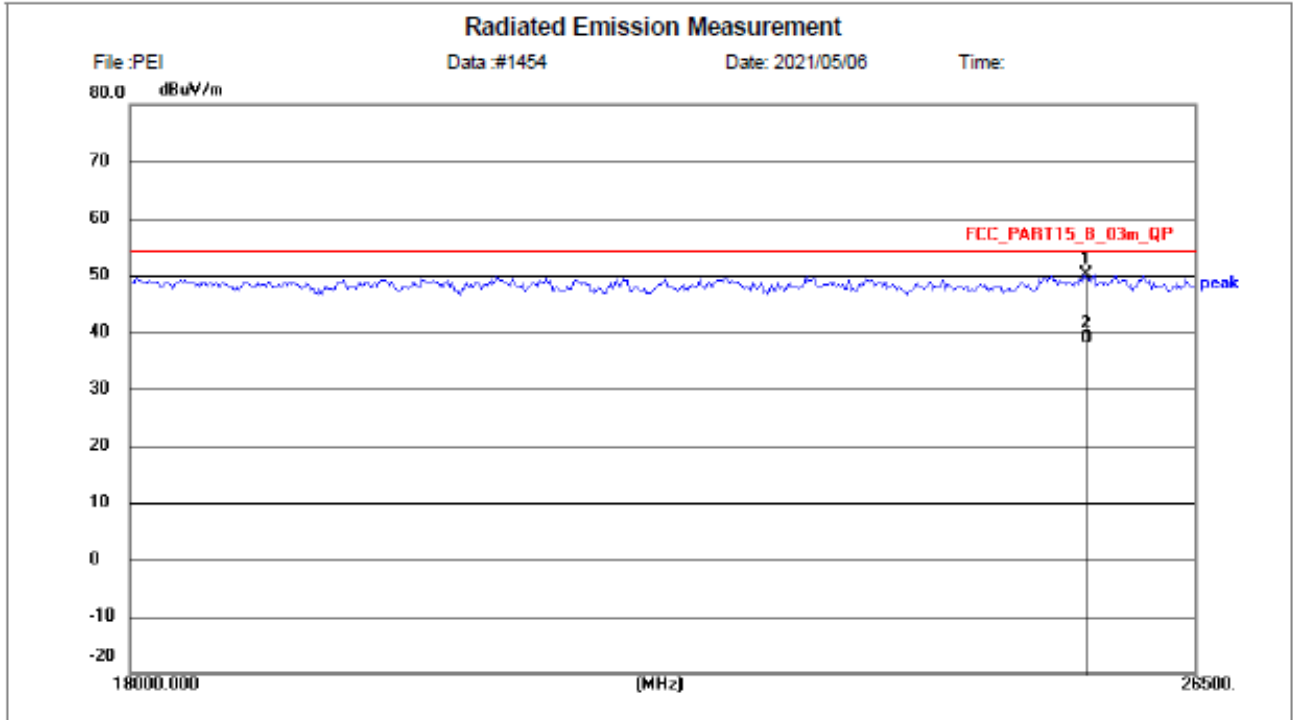


Site: 966 Chamber
 Limit: FCC_PART15_B_03m_QP
 EUT: Vaxis wireless video system
 M/N: Vaxis Atom 600 KV TX
 Mode: 802.11n (TX 5745MHz)
 Note: GM

Polarization: *Horizontal*
 Power: DC 16.8V
 Distance: 3m

Temperature: 26(C)
 Humidity: 54 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	25460.922	39.40	10.78	50.18	74.00	23.82	peak			P	
2	25460.922	28.05	10.78	38.83	54.00	15.17	AVG			P	


Vertical: 802.11n (HT20) (TX 5745MHz)

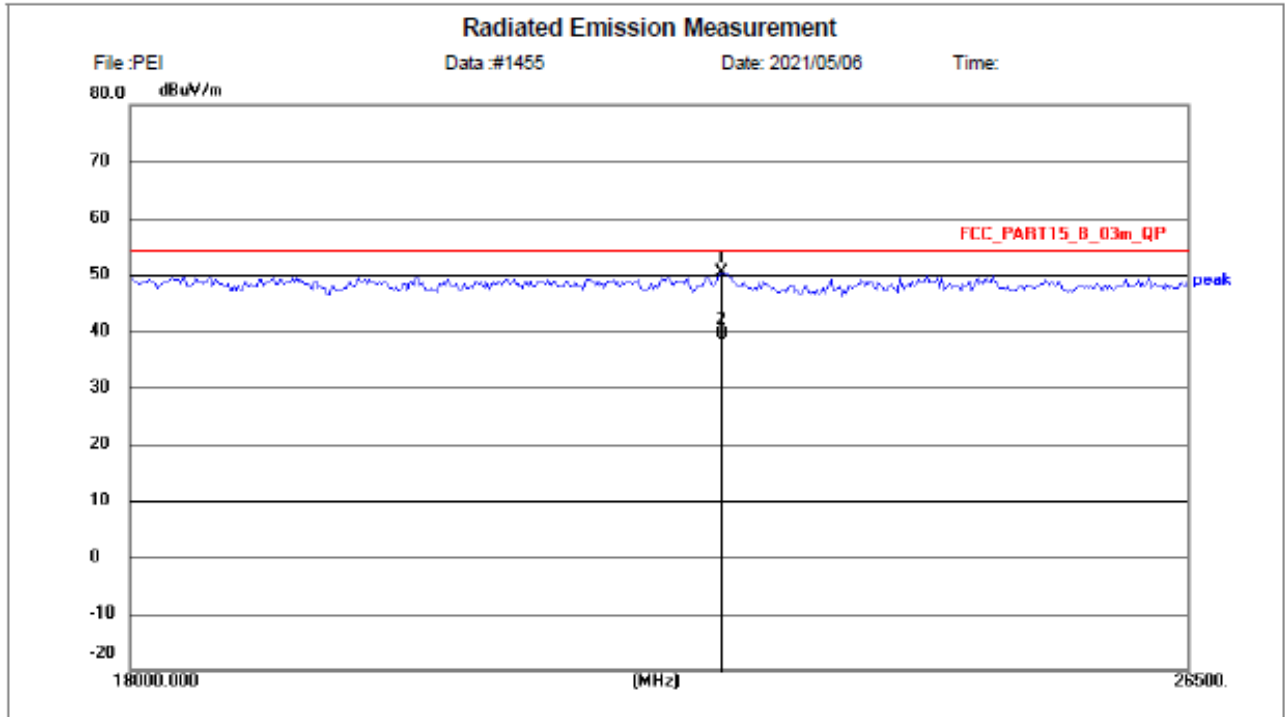

Site: 966 Chamber	Polarization: Vertical	Temperature: 26(C)
Limit: FCC_PART15_B_03m_QP	Power: DC 16.8V	Humidity: 54 %
EUT: Vaxis wireless video system	Distance: 3m	
M/N: Vaxis Atom 600 KV TX		
Mode: 802.11n (TX 5745MHz)		
Note: GM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	22360.721	38.20	12.29	50.49	74.00	23.51	peak			P	
2	22360.721	27.16	12.29	39.45	54.00	14.55	AVG			P	


Horizontal: 802.11n (HT20) (TX 5825MHz)

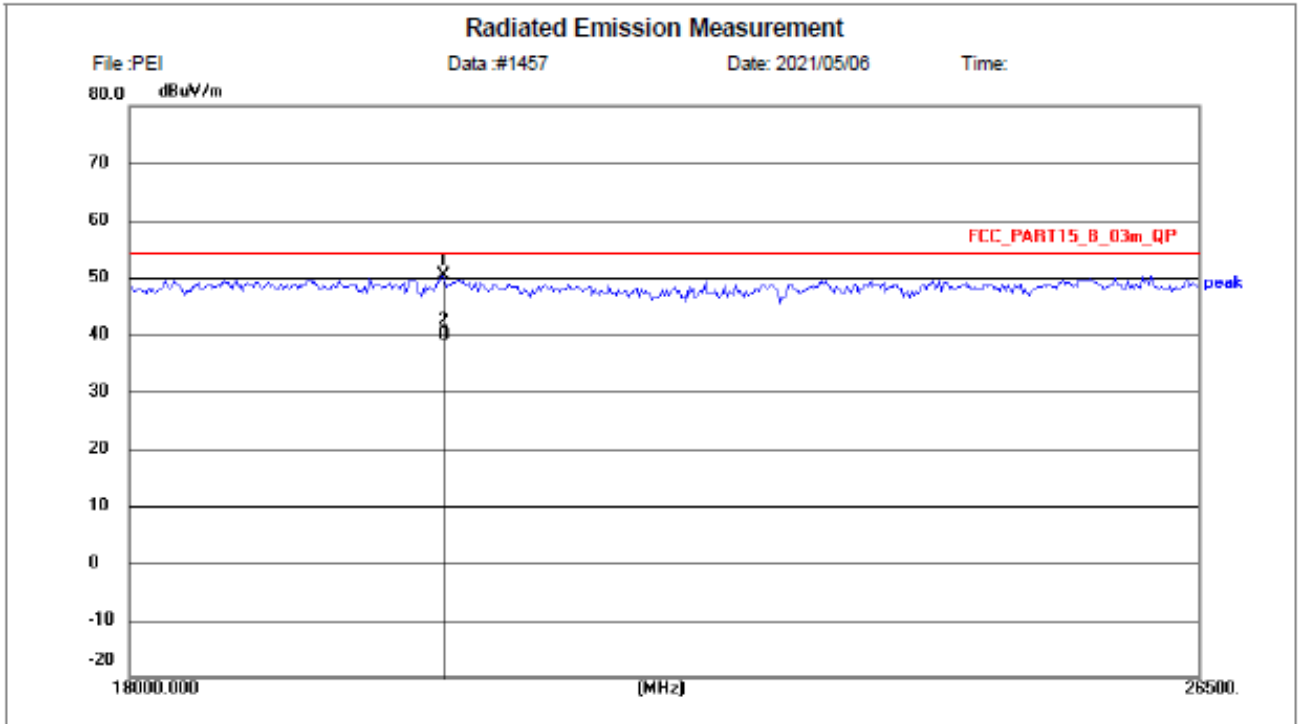

Site 966 Chamber	Polarization: <i>Horizontal</i>	Temperature: 26(C)
Limit: FCC_PART15_B_03m_QP	Power: DC 16.8V	Humidity: 54 %
EUT: Vaxis wireless video system	Distance: 3m	
M/N: Vaxis Atom 600 KV TX		
Mode: 802.11n (TX 5825MHz)		
Note: GM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	20163.327	37.17	13.17	50.34	74.00	23.66	peak			P	
2	20163.327	26.64	13.17	39.81	54.00	14.19	AVG			P	

Vertical: 802.11n (HT20) (TX 5825MHz)

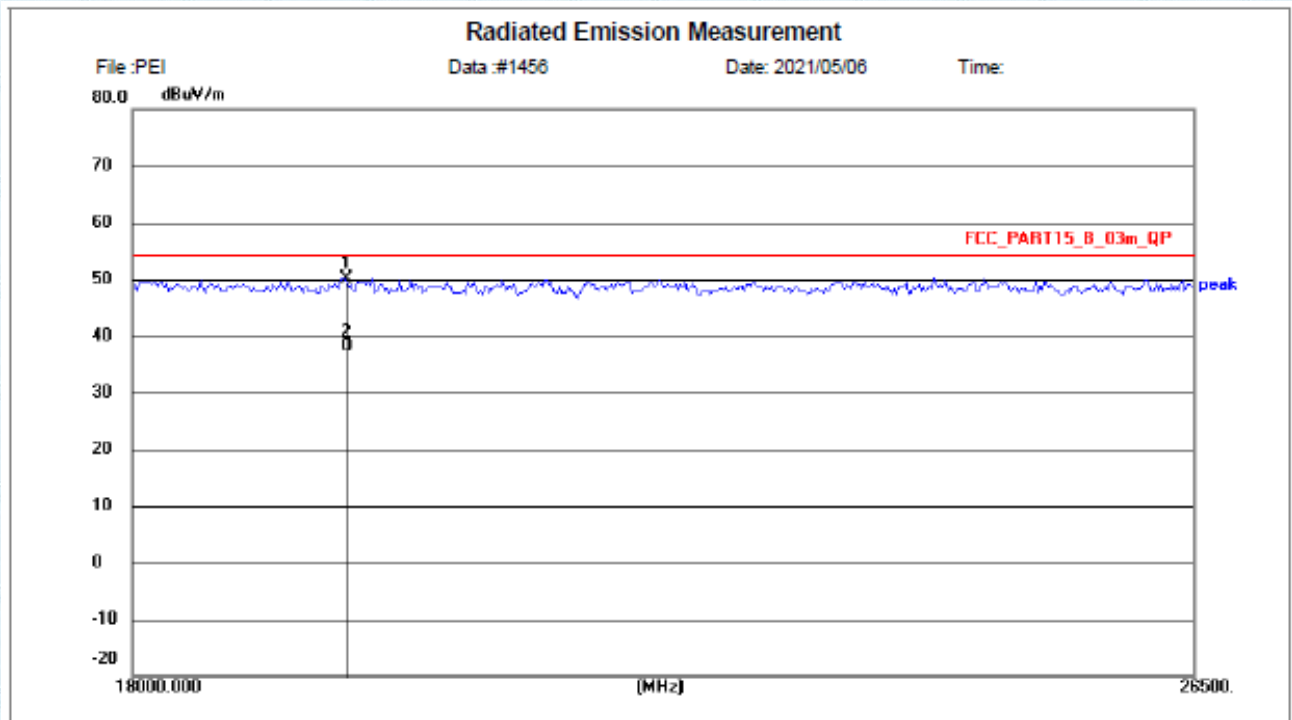

Site: 966 Chamber
 Limit: FCC_PART15_B_03m_QP
 EUT: Vaxis wireless video system
 M/N: Vaxis Atom 600 KV TX
 Mode: 802.11n (TX 5825MHz)
 Note: GM

Polarization: **Vertical**
 Power: DC 16.8V
 Distance: 3m


Temperature: 26(C)
 Humidity: 54 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	19464.930	38.38	11.75	50.13	74.00	23.87	peak			P	
2	19464.930	26.48	11.75	38.23	54.00	15.77	AVG			P	


Notes:

1. Measure Level = Reading Level + Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. We tested 802.11a/n mode the all data rate and recorded the worst case data for this channel to be 6Mbps for 802.11a mode and MCS0 for 802.11n mode.

**Spurious Emission in restricted band:
Horizontal: 802.11a (TX 5745MHz)**

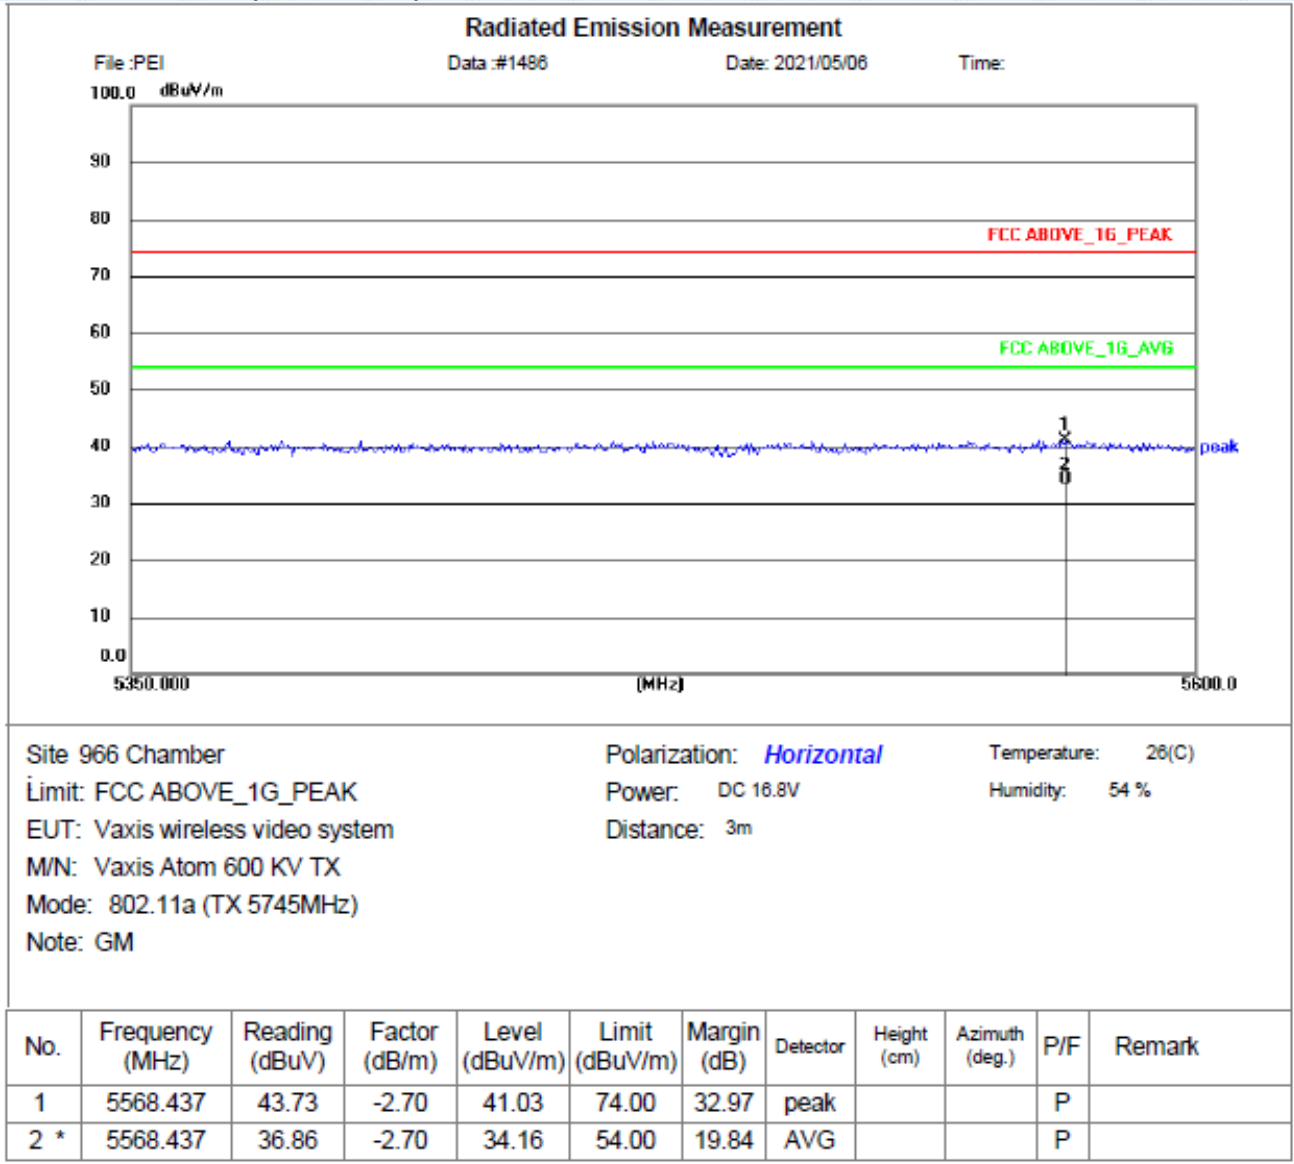


Vertical: 802.11a (TX 5745MHz)

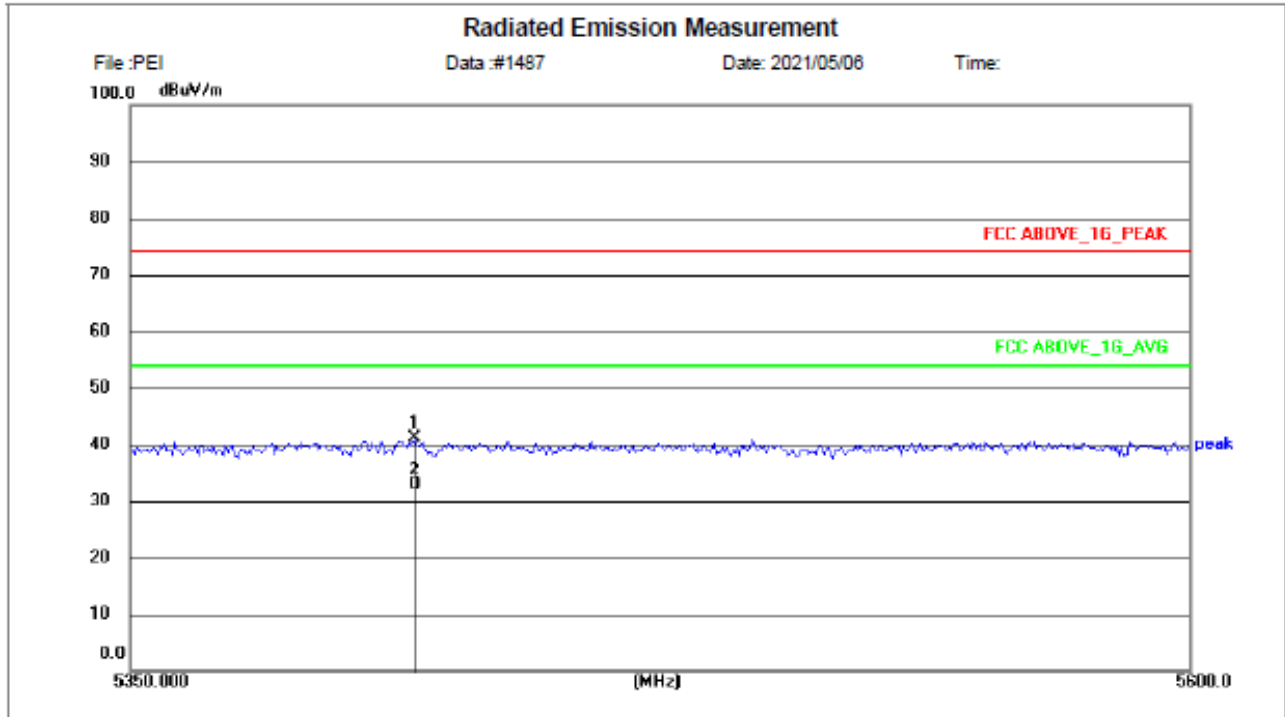

Site: 966 Chamber	Polarization: <i>Vertical</i>	Temperature: 26(C)
Limit: FCC ABOVE_1G_PEAK	Power: DC 16.8V	Humidity: 54 %
EUT: Vaxis wireless video system	Distance: 3m	
M/N: Vaxis Atom 600 KV TX		
Mode: 802.11a (TX 5745MHz)		
Note: GM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5416.132	44.11	-3.09	41.02	74.00	32.98	peak			P	
2 *	5416.132	35.89	-3.09	32.80	54.00	21.20	AVG			P	


Vertical: 802.11a (TX 5240MHz)

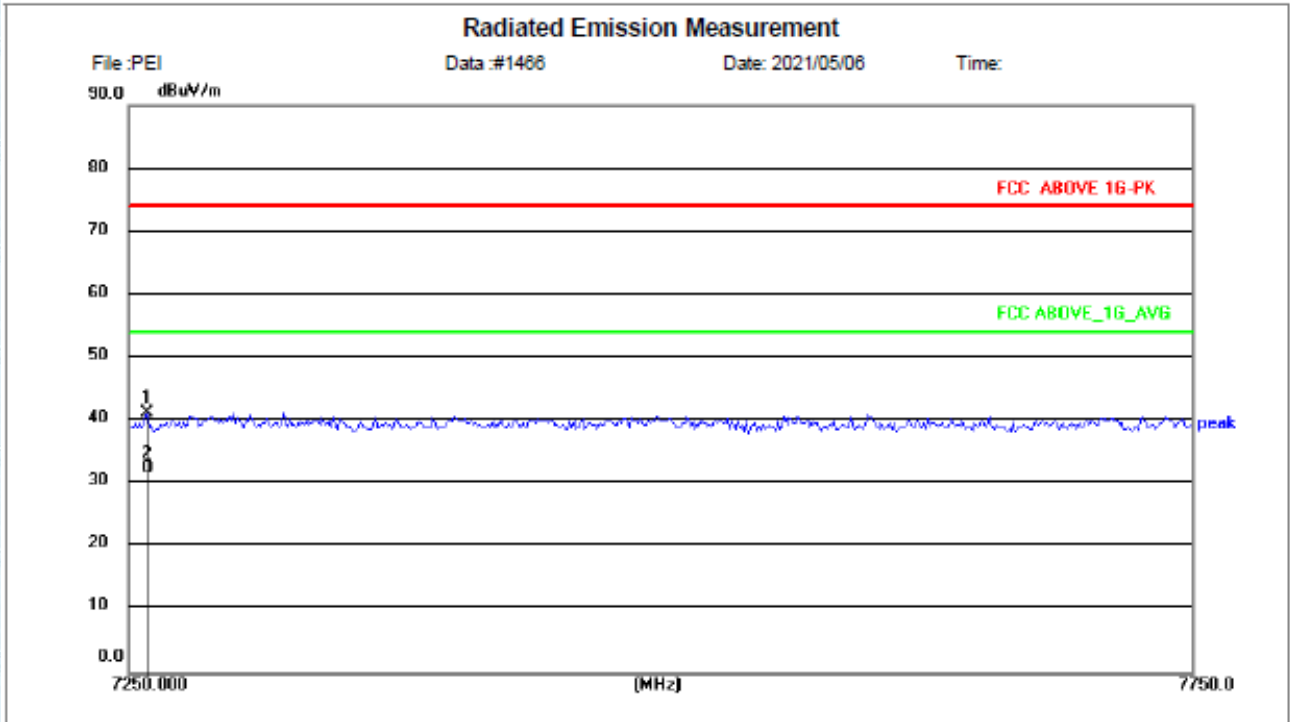

Site 966 Chamber	Polarization: <i>Vertical</i>	Temperature: 26(C)
Limit: FCC ABOVE 1G-PK	Power: DC 16.8V	Humidity: 54 %
EUT: Vaxis wireless video system	Distance: 3m	
M/N: Vaxis Atom 600 KV TX		
Mode: 802.11a (TX 5825MHz)		
Note: GM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	7259.018	36.16	5.03	41.19	74.00	32.81	peak			P	
2 *	7259.018	27.46	5.03	32.49	54.00	21.51	AVG			P	

Horizontal: 802.11n (HT20) (TX 5745MHz)

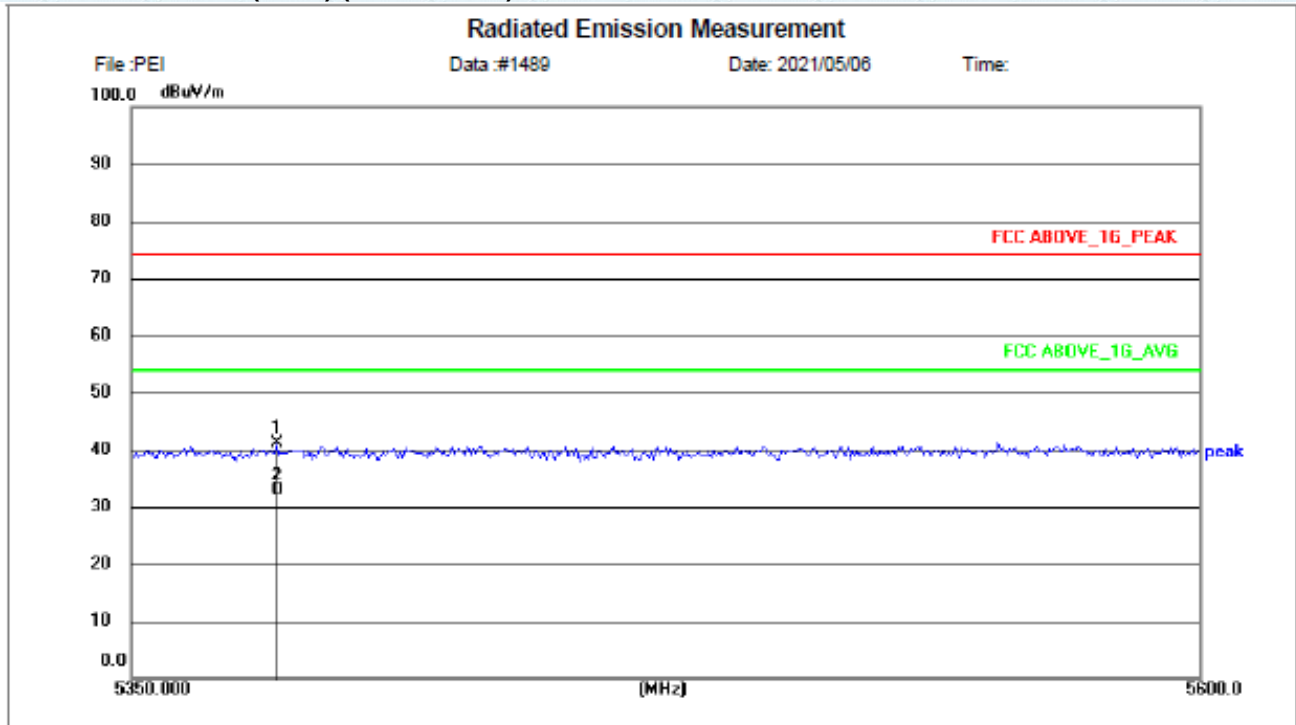


Site 966 Chamber
 Limit: FCC ABOVE_1G_PEAK
 EUT: Vaxis wireless video system
 M/N: Vaxis Atom 600 KV TX
 Mode: 802.11n (TX 5745MHz)
 Note: GM

Polarization: *Horizontal*
 Power: DC 16.8V
 Distance: 3m

Temperature: 26(C)
 Humidity: 54 %

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5383.567	44.27	-3.19	41.08	74.00	32.92	peak			P	
2 *	5383.567	36.07	-3.19	32.88	54.00	21.12	AVG			P	


Vertical: 802.11n (HT20) (TX 5745MHz)

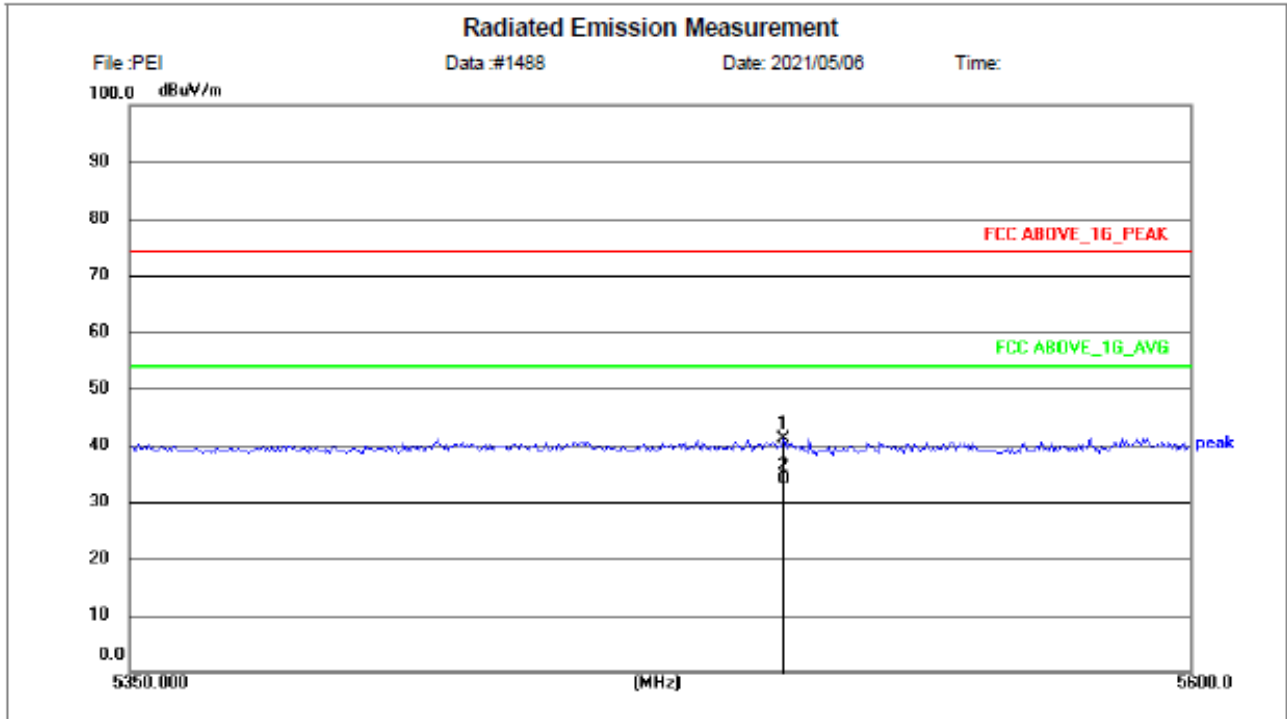

Site: 966 Chamber	Polarization: Vertical	Temperature: 26(C)
Limit: FCC ABOVE_1G_PEAK	Power: DC 16.8V	Humidity: 54 %
EUT: Vaxis wireless video system	Distance: 3m	
M/N: Vaxis Atom 600 KV TX		
Mode: 802.11n (TX 5745MHz)		
Note: GM		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5503.306	44.02	-2.80	41.22	74.00	32.78	peak			P	
2 *	5503.306	36.72	-2.80	33.92	54.00	20.08	AVG			P	

7.8 Frequency stability

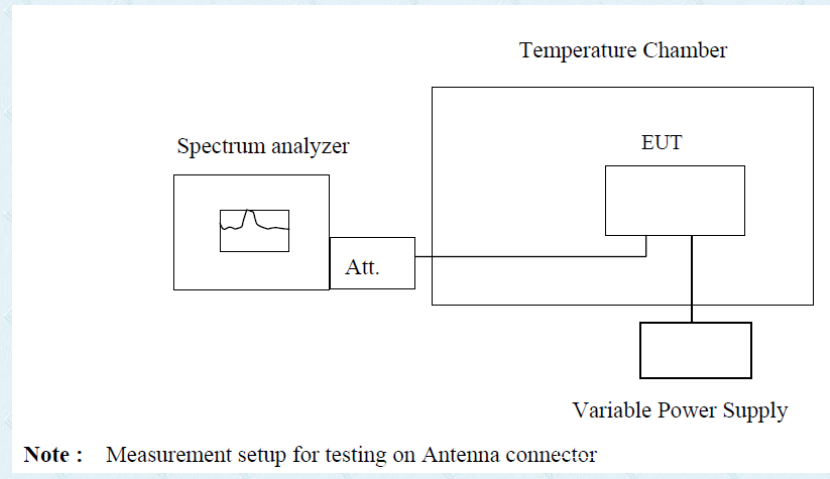Test Requirement:	FCC Part15 C Section 15.407(g)
Test Method:	ANSI C63.10:2013, FCC Part 2.1055
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.4, 2003; tested to 2.1055 for compliance to FCC Part 15.407(g) requirements.
Test setup:	 <p>Note : Measurement setup for testing on Antenna connector</p>
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data: Frequencies Stability test result: 5745MHz

Test Conditions	Measured Frequency(MHz) 5745
V nor(V)	5745.0038
V max(V)	5745.0048
V min(V)	5745.0057
Max. Deviation Frequency	0.0057
Max. Frequency Error (ppm)	0.99

Frequency Error vs. Temperature:

Test Conditions (°C)	Measured Frequency(MHz) 5745
-5	5745.0047
5	5745.0063
15	5745.0082
25	5745.0071
35	5745.0070
45	5745.0085
50	5745.0048
Max. Deviation Frequency	0.0082
Max. Frequency Error (ppm)	1.43

Frequencies Stability test result: 5825MHz

Test Conditions	Measured Frequency(MHz) 5825
V nor(V)	5825.0051
V max(V)	5825.0047
V min(V)	5825.0036
Max. Deviation Frequency	0.0051
Max. Frequency Error (ppm)	0.88

Frequency Error vs. Temperature:

Test Conditions (°C)	Measured Frequency(MHz) 5825
-5	5825.0027
5	5825.0035
15	5825.0049
25	5825.0036
35	5825.0068
45	5825.0032
50	5825.0048
Max. Deviation Frequency	0.0068
Max. Frequency Error (ppm)	1.17

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----END-----