


REVISIONS			DATE
REV.	EQ#	DESCRIPTION	
A	N/A	NEW ISSUE	2016.01.26

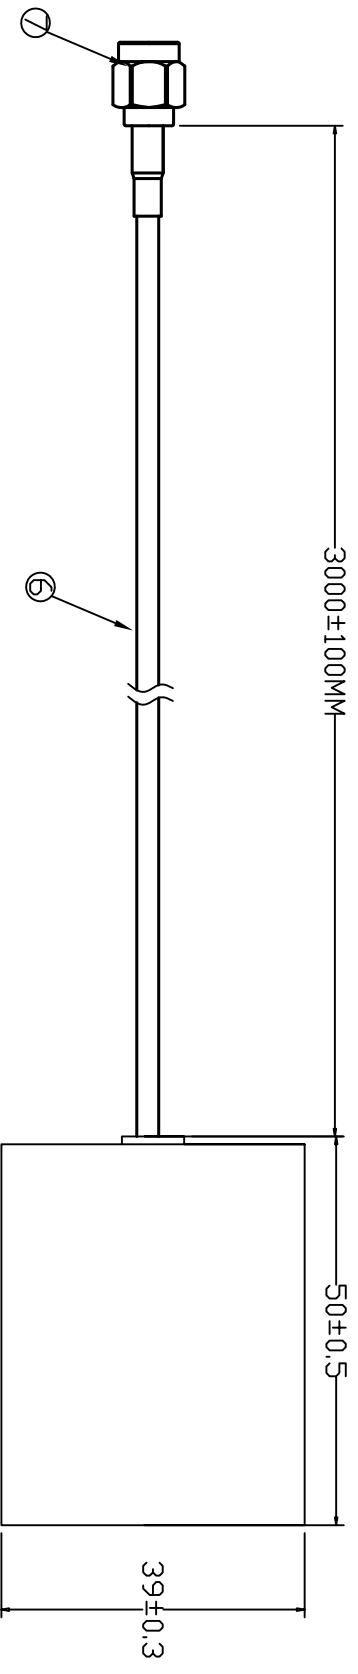

ELECTRONIC TEST CONDITION:
 Frequency: 1575.42±3 MHz
 Impedance: 50 Ω
 VSWR: ≤1.5
 Gain: 28±2db Typical
 Noise Figure: 1.5db
 DC Voltage: 2.7-5V
 DC Current: 5-15mA

ITEM	TITLE	DESCRIPTION	QTY
⑦	CONNECTOR	SMA S/T PLUG CONN OR EQUIVALENT	1PC
⑥	CABLE	RG174 BLACK CABLE OR EQUIVALENT	1PC
⑤	LABEL	49*39mm LABEL	1PC
④	MAGNET	Ø12.5mm MAGNET RING	1PC
③	SHIELDING COVER	SHIELDING COVER	1PC
②	PCB	PCB&LNA	1PC
①	DIELECTRIC	2.5*2.5*4mm	1PC

<p>THIRD ANGLE PROJECTION</p>		<p>DRAWING APPROVAL</p>	
<p>TOLERANCES UNLESS OTHERWISE SPECIFIED</p>		<p>DWN: Andy</p>	
ONE PLACE DECIMAL .X	±0.10	CHKD: Billy	CUS: SANY
TWO PLACE DECIMAL .XX	±0.05	APPD: Alan	BON P/N: BN-SI-ANK0006
THREE PLACE DECIMAL .XXX	N/A	SIZE: A4	CUS P/N: N/A
HOLE DIA. VARIATION .XX	N/A	UNIT: mm	ITEM: GPS ANTENNA L=3M RG174 BLACK CABLE
ANGULAR DIMENSION (ENG)	N/A	SCALE: -- : --	SHEET: 1 OF 1
		CUS REV: N/A	BN REV: A

BONE Electronics Co., Ltd.

A B C D E F

1 2 3 4