

## FCC Test Report

**Report No.:** RF170808C06-1

**FCC ID:** 2AJOTTA-1005

**Test Model:** TA-1005

**Received Date:** Aug. 08, 2017

**Test Date:** Sep. 04, 2017 ~ Oct. 05, 2017

**Issued Date:** Nov. 16, 2017

**Applicant:** HMD Global Oy

**Address:** Karaportti 2, 02610 Espoo, Finland

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan  
( R.O.C )

**Test Location (1):** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan  
Hsien 333, Taiwan, R.O.C.

**Test Location (2):** No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan,  
R.O.C

**FCC Registration /**  
**Designation Number:** 427177 / TW0011



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record .....</b>	<b>4</b>
<b>1 Certificate of Conformity .....</b>	<b>5</b>
<b>2 Summary of Test Results.....</b>	<b>6</b>
2.1 Measurement Uncertainty.....	6
2.2 Modification Record .....	6
<b>3 General Information .....</b>	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Duty Cycle of Test Signal .....	11
3.4 Description of Support Units .....	12
3.4.1 Configuration of System under Test .....	12
3.5 General Description of Applied Standards.....	12
<b>4 Test Types and Results .....</b>	<b>13</b>
4.1 Radiated Emission and Bandedge Measurement .....	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	13
4.1.2 Test Instruments .....	14
4.1.3 Test Procedures.....	15
4.1.4 Deviation from Test Standard .....	15
4.1.5 Test Set Up .....	16
4.1.6 EUT Operating Conditions.....	17
4.1.7 Test Results .....	18
4.2 Conducted Emission Measurement.....	26
4.2.1 Limits of Conducted Emission Measurement .....	26
4.2.2 Test Instruments .....	26
4.2.3 Test Procedures.....	26
4.2.4 Deviation from Test Standard .....	27
4.2.5 TEST SETUP.....	27
4.2.6 EUT Operating Conditions.....	27
4.2.7 Test Results .....	28
4.3 6 dB Bandwidth Measurement.....	32
4.3.1 Limits of 6 dB Bandwidth Measurement.....	32
4.3.2 Test Setup.....	32
4.3.3 Test Instruments .....	32
4.3.4 Test Procedure .....	32
4.3.5 Deviation fromTest Standard .....	32
4.3.6 EUT Operating Conditions.....	32
4.3.7 Test Result .....	33
4.4 Occupied Bandwidth Measurement.....	35
4.4.1 Test SetUp .....	35
4.4.2 Test Instruments .....	35
4.4.3 Test Procedure .....	35
4.4.4 Deviation From Test Standard .....	35
4.4.5 EUT Operating Conditions.....	35
4.4.6 Test Results .....	36
4.5 Conducted Output Power Measurement .....	38
4.5.1 Limits of Conducted Output Power Measurement.....	38
4.5.2 Test Setup.....	38
4.5.3 Test Instruments .....	38
4.5.4 Test Procedures.....	38
4.5.5 Deviation from Test Standard .....	38
4.5.6 EUT Operating Conditions.....	38
4.5.7 Test Results .....	39

4.6 Power Spectral Density Measurement .....	40
4.6.1 Limits of Power Spectral Density Measurement.....	40
4.6.2 Test Setup.....	40
4.6.3 Test Instruments .....	40
4.6.4 Test Procedure .....	40
4.6.5 Deviation from Test Standard .....	40
4.6.6 EUT Operating Condition .....	40
4.6.7 Test Results .....	41
4.7 Conducted Out of Band Emission Measurement .....	43
4.7.1 Limits of Conducted Out of Band Emission Measurement.....	43
4.7.2 Test Setup.....	43
4.7.3 Test Instruments .....	43
4.7.4 Test Procedure .....	43
4.7.5 Deviation from Test Standard .....	43
4.7.6 EUT Operating Condition .....	43
4.7.7 TEST RESULTS .....	44
<b>5 Pictures of Test Arrangements.....</b>	<b>48</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>49</b>

### Release Control Record

Issue No.	Description	Date Issued
RF170808C06-1	Original Release	Nov. 16, 2017

## 1 Certificate of Conformity

**Product:** Smart Phone

**Brand:** Nokia

**Test Model:** TA-1005

**Sample Status:** Identical Prototype

**Applicant:** HMD Global Oy

**Test Date:** Sep. 04, 2017 ~ Oct. 05, 2017

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :**   
\_\_\_\_\_, **Date:** Nov. 16, 2017

Ivonne Wu / Supervisor

**Approved by :**   
\_\_\_\_\_, **Date:** Nov. 16, 2017

Dylan Chiou / Project Engineer

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -15.56 dB at 0.17346 MHz.
15.205 & 209	Radiated Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -9.08 dB at 47.55 MHz.
15.247(d)	Band Edge Measurement	Pass	Meet the requirement of limit.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Frequency	Expended Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.44 dB
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.0153 dB
	200 MHz ~ 1000 MHz	2.0224 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	1.0121 dB
	18 GHz ~ 40 GHz	1.1508 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	Smart Phone
<b>Brand</b>	Nokia
<b>Test Model</b>	TA-1005
<b>Status of EUT</b>	Identical Prototype
<b>Power Supply Rating</b>	5 Vdc or 9 Vdc or 12 Vdc (adapter) 5 Vdc (host equipment) 3.85 Vdc (battery)
<b>Modulation Type</b>	GFSK
<b>Transfer Rate</b>	LE 4.0: 1 Mbps LE 5.0: 2 Mbps
<b>Operating Frequency</b>	2402 ~ 2480 MHz
<b>Number of Channel</b>	40
<b>Output Power</b>	LE 4.0: 0.8035 mW LE 5.0: 0.877 mW
<b>Antenna Type</b>	PIFA antenna with -2 dBi gain
<b>Antenna Connector</b>	N/A
<b>Accessory Device</b>	Refer to Note as below
<b>Data Cable Supplied</b>	Refer to Note as below

Note:

1. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter 1	Salcomp	FC0302	I/P: 100-240 Vac, 0.5 A O/P: 5 Vdc, 2.5 A or 9 Vdc, 2 A or 12 Vdc, 1.5 A
Adapter 2	DVE	AD-18WU	I/P: 100-240 Vac, 0.5 A O/P: 5 Vdc, 3 A or 9 Vdc, 2 A or 12 Vdc, 1.5 A
Battery	SCUD	HE333	3.85 Vdc, 3250 mAh
Earphone 1	NOKIA	HS-A01	1.15 meter
Earphone 2	NOKIA	HS-A01C	1.15 meter
USB Cable 1	Foxconn	CUDT01E-FA210-EH	0.95 meter Manufacturer: FIT
USB Cable 2	Foxconn	CA-18W	0.95 meter Manufacturer: YinRun
LCD Panel	LG Display	LH546QH1-EDD1-QG1	5.5" OLED
Front Camera	Chicony	CBFH51020005020LH	5M
Main Camera	Primay	FCDC1N	12+13M
eMMC 1 (=ROM 1)	SAMSUNG	IC_UFS2.1_128G	128G
Main Board	AT&S	FIH1883	--
BT/WLAN Module	murata	LBDD5QA1MS-119	--
WWAN Module	Qualcomm	MSM8998	--

2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 Description of Test Modes

40 channels are provided to this EUT:

Channel	Freq. (MHz)						
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

### 3.2.1 Test Mode Applicability and Tested Channel Detail

**<LE 4.0>**

EUT Configure Mode	Applicable To				Description
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where      RE≥1G: Radiated Emission above 1 GHz      RE<1G: Radiated Emission below 1 GHz  
 PLC: Power Line Conducted Emission      APCM: Antenna Port Conducted Measurement

Note: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.

Note: “-”means no effect.

#### Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0, 19, 39	GFSK	1

#### Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	39	GFSK	1

#### Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	39	GFSK	1

#### Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0, 19, 39	GFSK	1

**<LE 5.0>**

EUT Configure Mode	Applicable To				Description
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where    **RE≥1G:** Radiated Emission above 1 GHz

**RE<1G:** Radiated Emission below 1 GHz

**PLC:** Power Line Conducted Emission

**APCM:** Antenna Port Conducted Measurement

**Note:** The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.

**Note:** “-”means no effect.

**Radiated Emission Test (Above 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0, 19, 39	GFSK	1

**Radiated Emission Test (Below 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	19	GFSK	1

**Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	19	GFSK	1

**Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0, 19, 39	GFSK	1


**Test Condition:**

Applicable To	Environmental Conditions	Input Power	Tested by
RE≥1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Charles Hsiao
RE<1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Charles Hsiao
PLC	25 deg. C, 65 % RH	120 Vac, 60 Hz	Getaz Yang
APCM	25 deg. C, 65 % RH	3.85 Vdc	Carlos Chen

**3.3 Duty Cycle of Test Signal**
**<LE 4.0>**


Duty cycle of test signal is < 98 %

$$\text{Duty cycle} = 389/626 = 0.621, \text{ Duty factor} = 10 * \log(1/0.621) = 2.07$$

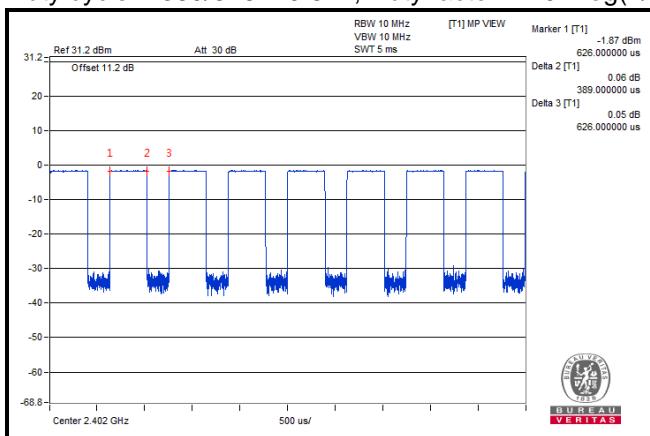
**<LE 5.0>**

Duty cycle of test signal is < 98 %


$$\text{Duty cycle} = 205.13/628.21 = 0.327, \text{ Duty factor} = 10 * \log(1/0.327) = 4.86$$

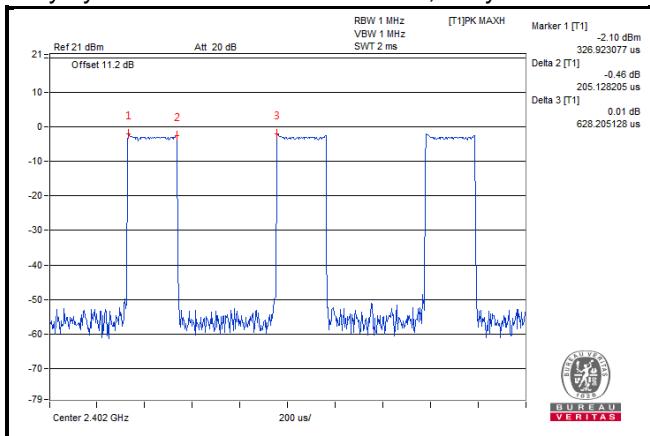

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

#### 3.4.1 Configuration of System under Test

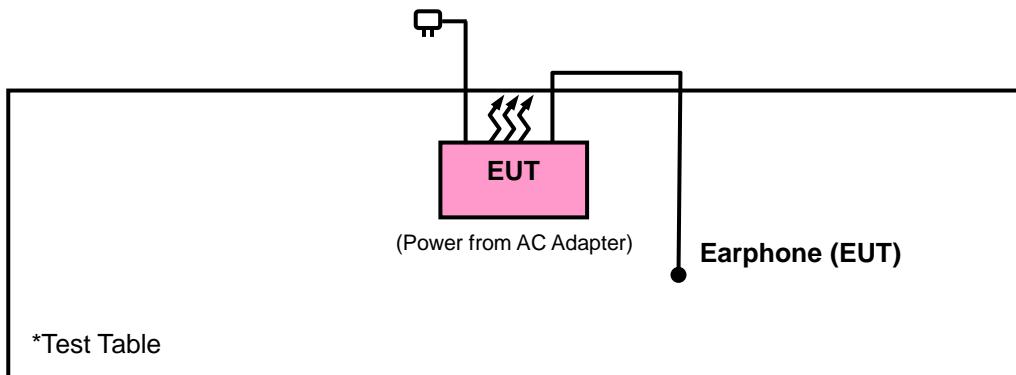

### 3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**

**558074 D01 DTS Meas Guidance v04**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

**Note:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).

The test report has been issued separately.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**Note:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB<sub>uV</sub>/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

#### 4.1.2 Test Instruments

<b>Description &amp; Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Date of Calibration</b>	<b>Due Date of Calibration</b>
Test Receiver Agilent Technologies	N9038A	MY52260177	Jul. 05, 2017	Jul. 04, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 13, 2016	Dec. 12, 2017
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Dec. 13, 2016	Dec. 12, 2017
HORN Antenna ETS-Lindgren	3117	00143293	Jun. 26, 2017	Jun. 25, 2018
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 14, 2016	Dec. 13, 2017
Fixed Attenuator Mini-Circuits	BW-N10W5+	NA	Jul. 07, 2017	Jul. 06, 2018
Bluetooth Tester	CBT	100980	Jun. 28, 2017	Jun. 27, 2019
Loop Antenna	EM-6879	269	Aug. 11, 2017	Aug. 10, 2018
Preamplifier Agilent	310N	187226	Jun. 23, 2017	Jun. 22, 2018
Preamplifier Agilent	83017A	MY39501357	Jun. 23, 2017	Jun. 22, 2018
Power Meter Anritsu	ML2495A	1012010	Aug. 15, 2017	Aug. 14, 2018
Power Sensor Anritsu	MA2411B	1315050	Aug. 15, 2017	Aug. 14, 2018
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(R FC-SMS-100-SM S-120+RFC-SMS -100-SMS-400)	Jun. 26, 2017	Jun. 25, 2018
RF signal cable ETS-LINDGREN	8D-FB	Cable-CH1-02(R FC-SMS-100-SM S-24)	Jun. 26, 2017	Jun. 25, 2018
Software BV ADT	E3 8.130425b	NA	NA	NA
Antenna Tower MF	NA	NA	NA	NA
Turn Table MF	NA	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HsinTien Chamber 1.
  3. The horn antenna and preamplifier (model: 83017A) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The IC Site Registration No. is IC7450I-1.

#### 4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1/T for Average (Duty cycle < 98 %) detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Set Up


**<Radiated emission below 30 MHz>**

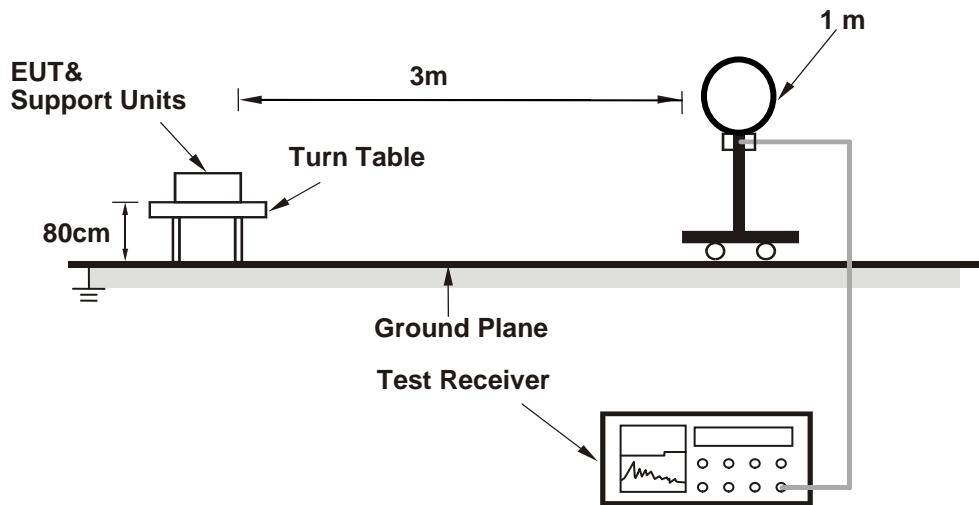

**<Frequency Range below 1 GHz>**

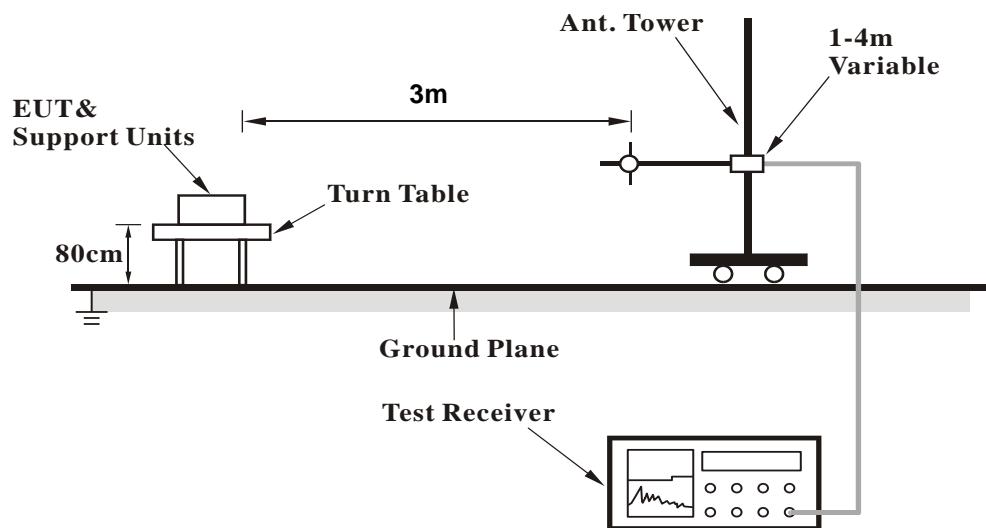

<Frequency Range above 1 GHz>

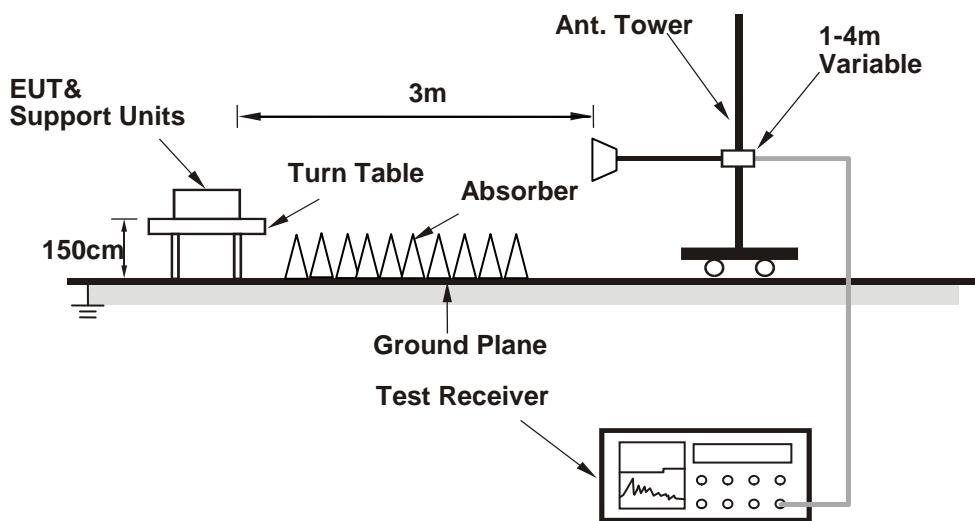

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.

#### 4.1.7 Test Results

**<LE 4.0>**

**Above 1 GHz Data:**

EUT Test Condition			Measurement Detail						
<b>Channel</b>		Channel 0			<b>Frequency Range</b>		1 GHz ~ 25 GHz		
<b>Input Power</b>		120 Vac, 60 Hz			<b>Detector Function</b>		Peak (PK) Average (AV)		
<b>Environmental Conditions</b>		25 deg. C, 65 % RH			<b>Tested By</b>		Charles Hsiao		

#### Antennal Polarity & Test Distance: Horizontal at 3 m

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2384.61	41.19	39.5	54	-12.81	31.78	5.4	35.49	100	137	Average
2384.61	51.62	49.93	74	-22.38	31.78	5.4	35.49	100	137	Peak
2402	76.49	74.76			31.8	5.4	35.47	100	137	Average
2402	77.54	75.81			31.8	5.4	35.47	100	137	Peak
4804	40.52	32.43	54	-13.48	33.96	8.25	34.12	119	246	Average
4804	47.75	39.66	74	-26.25	33.96	8.25	34.12	119	246	Peak

#### Antenna Polarity & Test Distance: Vertical at 3 m

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2382.63	41.18	39.49	54	-12.82	31.78	5.4	35.49	200	182	Average
2382.63	51.55	49.86	74	-22.45	31.78	5.4	35.49	200	182	Peak
2402	81.44	79.71			31.8	5.4	35.47	200	182	Average
2402	82.84	81.11			31.8	5.4	35.47	200	182	Peak
4804	39.99	31.9	54	-14.01	33.96	8.25	34.12	124	207	Average
4804	47.57	39.48	74	-26.43	33.96	8.25	34.12	124	207	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value

2. 2402 MHz: Fundamental frequency.

EUT Test Condition			Measurement Detail			
<b>Channel</b>		Channel 19			<b>Frequency Range</b>	1 GHz ~ 25 GHz
<b>Input Power</b>		120 Vac, 60 Hz			<b>Detector Function</b>	Peak (PK) Average (AV)
<b>Environmental Conditions</b>		25 deg. C, 65 % RH			<b>Tested By</b>	Charles Hsiao

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2386.05	41.19	39.48	54	-12.81	31.8	5.4	35.49	100	137	Average
2386.05	51.7	49.99	74	-22.3	31.8	5.4	35.49	100	137	Peak
2440	76.35	74.5			31.85	5.46	35.46	100	137	Average
2440	77.85	76			31.85	5.46	35.46	100	137	Peak
2498.56	41.68	39.66	54	-12.32	31.9	5.53	35.41	100	137	Average
2498.56	51.94	49.92	74	-22.06	31.9	5.53	35.41	100	137	Peak
Antenna Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2380.56	41	39.31	54	-13	31.78	5.4	35.49	200	182	Average
2380.56	51.65	49.96	74	-22.35	31.78	5.4	35.49	200	182	Peak
2440	81.42	79.57			31.85	5.46	35.46	200	182	Average
2440	82.88	81.03			31.85	5.46	35.46	200	182	Peak
2495.68	41.64	39.62	54	-12.36	31.9	5.53	35.41	200	182	Average
2495.68	52.58	50.56	74	-21.42	31.9	5.53	35.41	200	182	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2440 MHz: Fundamental frequency.

EUT Test Condition			Measurement Detail			
<b>Channel</b>		Channel 39			<b>Frequency Range</b>	
<b>Input Power</b>		120 Vac, 60 Hz			<b>Detector Function</b>	
<b>Environmental Conditions</b>		25 deg. C, 65 % RH			<b>Tested By</b>	

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2480	76.03	74.07			31.88	5.5	35.42	100	137	Average
2480	77.02	75.06			31.88	5.5	35.42	100	137	Peak
2491.68	41.66	39.65	54	-12.34	31.9	5.53	35.42	100	137	Average
2491.68	52.39	50.38	74	-21.61	31.9	5.53	35.42	100	137	Peak
4960	39.17	30.9	54	-14.83	33.99	8.29	34.01	151	285	Average
4960	48.05	39.78	74	-25.95	33.99	8.29	34.01	151	285	Peak
Antenna Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2480	81.25	79.29			31.88	5.5	35.42	200	182	Average
2480	82.49	80.53			31.88	5.5	35.42	200	182	Peak
2494.44	41.68	39.66	54	-12.32	31.9	5.53	35.41	200	182	Average
2494.44	52.26	50.24	74	-21.74	31.9	5.53	35.41	200	182	Peak
4960	40.64	32.37	54	-13.36	33.99	8.29	34.01	124	222	Average
4960	48.1	39.83	74	-25.9	33.99	8.29	34.01	124	222	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2480 MHz: Fundamental frequency.

**9 kHz ~ 30 MHz Data:**

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

**30 MHz ~ 1 GHz Worst-Case Data:**

EUT Test Condition		Measurement Detail							
Channel	Channel 39	Frequency Range			30 MHz ~ 1 GHz				
Input Power	120 Vac, 60 Hz	Detector Function			Peak (PK) Quasi-peak (QP)				
Environmental Conditions	25 deg. C, 65 % RH	Tested By			Charles Hsiao				

**Antennal Polarity & Test Distance: Horizontal at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
47.55	30.92	47.73	40	-9.08	14.51	0.9	32.22	163	125	Peak
93.72	24.76	44.19	43.5	-18.74	11.39	1.11	31.93	115	184	Peak
195.51	26.96	46.66	43.5	-16.54	10.97	1.61	32.28	102	184	Peak
440.7	15.62	29.87	46	-30.38	15.42	2.49	32.16	112	114	Peak
670.3	20.22	30.52	46	-25.78	18.77	3.05	32.12	103	214	Peak
798.4	21.14	29.57	46	-24.86	20.31	3.32	32.06	163	162	Peak

**Antenna Polarity & Test Distance: Vertical at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
59.43	23.42	41.23	40	-16.58	13.52	0.9	32.23	166	195	Peak
83.19	20.98	43.13	40	-19.02	8.8	1.11	32.06	122	162	Peak
178.5	17.5	38.51	43.5	-26	9.62	1.61	32.24	188	174	Peak
384	14.32	29.49	46	-31.68	14.67	2.34	32.18	125	195	Peak
534.5	18.4	31.07	46	-27.6	16.8	2.7	32.17	159	147	Peak
729.8	29.28	38.63	46	-16.72	19.61	3.16	32.12	133	162	Peak

**Remarks:**

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value

<LE 5.0>

**Above 1 GHz Data:**

EUT Test Condition		Measurement Detail						
Channel	Channel 0	<b>Frequency Range</b>				1 GHz ~ 25 GHz		
Input Power	120 Vac, 60 Hz	<b>Detector Function</b>				Peak (PK) Average (AV)		
Environmental Conditions	25 deg. C, 65 % RH	<b>Tested By</b>				Charles Hsiao		

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2368.68	41	39.34	54	-13	31.78	5.37	35.49	100	137	Average
2368.68	51.57	49.91	74	-22.43	31.78	5.37	35.49	100	137	Peak
2402	74.49	72.76			31.8	5.4	35.47	100	137	Average
2402	76.05	74.32			31.8	5.4	35.47	100	137	Peak
4804	40.06	31.97	54	-13.94	33.96	8.25	34.12	114	342	Average
4804	47.84	39.75	74	-26.16	33.96	8.25	34.12	114	342	Peak
Antenna Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2387.49	41.19	39.48	54	-12.81	31.8	5.4	35.49	200	182	Average
2387.49	52.06	50.35	74	-21.94	31.8	5.4	35.49	200	182	Peak
2402	79.35	77.62			31.8	5.4	35.47	200	182	Average
2402	81.54	79.81			31.8	5.4	35.47	200	182	Peak
4804	40.2	32.11	54	-13.8	33.96	8.25	34.12	124	207	Average
4804	47.82	39.73	74	-26.18	33.96	8.25	34.12	124	207	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2402 MHz: Fundamental frequency.

EUT Test Condition			Measurement Detail			
<b>Channel</b>		Channel 19			<b>Frequency Range</b>	
<b>Input Power</b>		120 Vac, 60 Hz			<b>Detector Function</b>	
<b>Environmental Conditions</b>		25 deg. C, 65 % RH			<b>Tested By</b>	

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2363.19	41.13	39.5	54	-12.87	31.76	5.37	35.5	100	137	Average
2363.19	52.59	50.96	74	-21.41	31.76	5.37	35.5	100	137	Peak
2440	74.42	72.57			31.85	5.46	35.46	100	137	Average
2440	76.62	74.77			31.85	5.46	35.46	100	137	Peak
2500	41.65	39.63	54	-12.35	31.9	5.53	35.41	100	137	Average
2500	52.64	50.62	74	-21.36	31.9	5.53	35.41	100	137	Peak
Antenna Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2364.18	41.15	39.52	54	-12.85	31.76	5.37	35.5	200	182	Average
2364.18	51.67	50.04	74	-22.33	31.76	5.37	35.5	200	182	Peak
2440	79.25	77.4			31.85	5.46	35.46	200	182	Average
2440	81.46	79.61			31.85	5.46	35.46	200	182	Peak
2498.28	41.66	39.64	54	-12.34	31.9	5.53	35.41	200	182	Average
2498.28	52.55	50.53	74	-21.45	31.9	5.53	35.41	200	182	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2440 MHz: Fundamental frequency.

EUT Test Condition			Measurement Detail			
<b>Channel</b>		Channel 39			<b>Frequency Range</b>	
<b>Input Power</b>		120 Vac, 60 Hz			<b>Detector Function</b>	
<b>Environmental Conditions</b>		25 deg. C, 65 % RH			<b>Tested By</b>	

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2480	74.35	72.39			31.88	5.5	35.42	100	137	Average
2480	76.08	74.12			31.88	5.5	35.42	100	137	Peak
2497.88	41.48	39.46	54	-12.52	31.9	5.53	35.41	100	137	Average
2497.88	52.16	50.14	74	-21.84	31.9	5.53	35.41	100	137	Peak
4960	40.17	31.9	54	-13.83	33.99	8.29	34.01	105	85	Average
4960	48.24	39.97	74	-25.76	33.99	8.29	34.01	105	85	Peak
Antenna Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2480	79.62	77.66			31.88	5.5	35.42	200	182	Average
2480	81.4	79.44			31.88	5.5	35.42	200	182	Peak
2499.56	41.59	39.57	54	-12.41	31.9	5.53	35.41	200	182	Average
2499.56	52.21	50.19	74	-21.79	31.9	5.53	35.41	200	182	Peak
4960	40.28	32.01	54	-13.72	33.99	8.29	34.01	131	159	Average
4960	48.19	39.92	74	-25.81	33.99	8.29	34.01	131	159	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2480 MHz: Fundamental frequency.

**9 kHz ~ 30 MHz Data:**

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

**30 MHz ~ 1 GHz Worst-Case Data:**

EUT Test Condition		Measurement Detail							
Channel	Channel 19	Frequency Range			30 MHz ~ 1 GHz				
Input Power	120 Vac, 60 Hz	Detector Function			Peak (PK) Quasi-peak (QP)				
Environmental Conditions	25 deg. C, 65 % RH	Tested By			Charles Hsiao				

**Antennal Polarity & Test Distance: Horizontal at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
56.19	25.77	43.11	40	-14.23	13.99	0.9	32.23	102	166	Peak
92.91	23.99	43.6	43.5	-19.51	11.16	1.11	31.88	122	154	Peak
195.24	24.34	44.07	43.5	-19.16	10.94	1.61	32.28	184	175	Peak
442.1	15.59	29.81	46	-30.41	15.45	2.49	32.16	101	121	Peak
668.9	20.54	30.86	46	-25.46	18.76	3.05	32.13	110	10	Peak
843.9	23.14	30.65	46	-22.86	20.94	3.38	31.83	125	20	Peak

**Antenna Polarity & Test Distance: Vertical at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
66.72	29.26	49.27	40	-10.74	11.31	0.9	32.22	162	195	Peak
89.67	20.92	41.06	43.5	-22.58	10.46	1.11	31.71	132	162	Peak
181.47	17.42	38.22	43.5	-26.08	9.83	1.61	32.24	122	162	Peak
428.1	15.87	30.34	46	-30.13	15.3	2.41	32.18	105	184	Peak
755.7	20.9	29.95	46	-25.1	19.87	3.22	32.14	116	195	Peak
851.6	23.39	30.69	46	-22.61	21.04	3.44	31.78	148	175	Peak

**Remarks:**

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.  
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Due Date Of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Nov. 21, 2016	Nov. 20, 2017
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond1-01	Sep. 05, 2017	Sep. 04, 2018
LISN/AMN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Mar. 10, 2017	Mar. 09, 2018
LISN/AMN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 15, 2017	Aug. 14, 2018
Software ADT	BV ADT_Cond_V7.3.7.3	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Shielded Room 1.  
 3. The VCCI Site Registration No. is C-2040.

### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

**Note:** All modes of operation were investigated and the worst-case emissions are reported.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 TEST SETUP

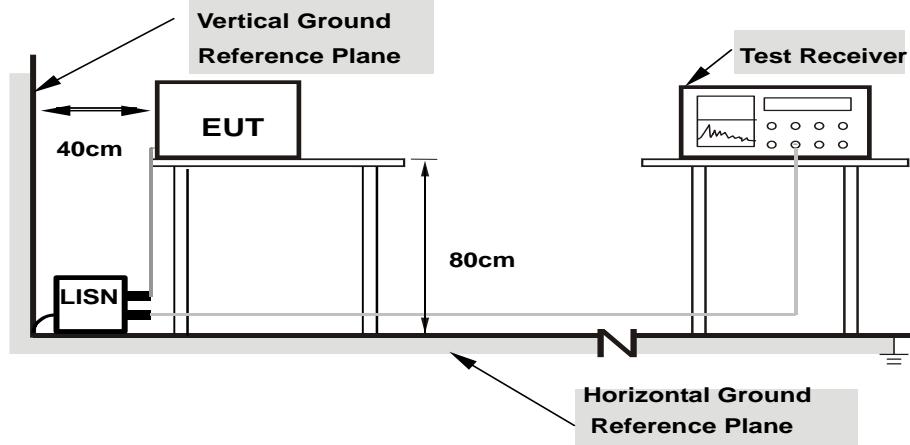

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

#### 4.2.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Set the EUT under transmission condition continuously at specific channel frequency.

#### 4.2.7 Test Results

##### CONDUCTED WORST-CASE DATA


<LE 4.0>

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	Getaz Yang	Test Date	2017/10/4

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17346	10.10	39.13	25.58	49.23	35.68	64.79	54.79	-15.56	-19.11
2	0.20084	10.10	37.78	23.20	47.88	33.30	63.58	53.58	-15.70	-20.28
3	0.22434	10.11	35.51	22.01	45.62	32.12	62.66	52.66	-17.04	-20.54
4	0.27903	10.11	31.08	13.51	41.19	23.62	60.84	50.84	-19.65	-27.22
5	0.59158	10.12	21.08	6.59	31.20	16.71	56.00	46.00	-24.80	-29.29
6	11.66104	10.72	26.97	18.39	37.69	29.11	60.00	50.00	-22.31	-20.89

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

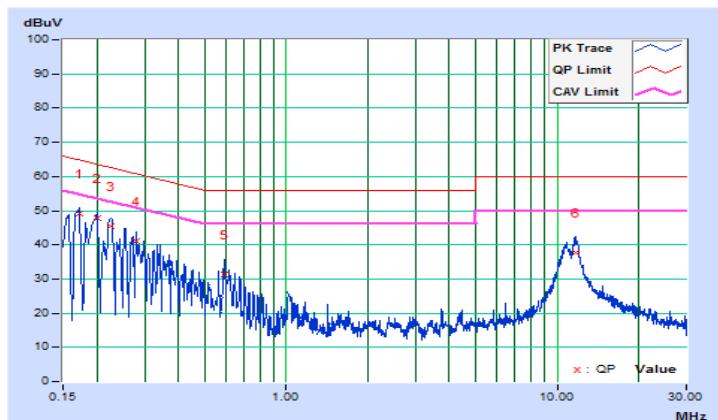


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	Getaz Yang	Test Date	2017/10/4

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	10.10	27.99	12.51	38.09	22.61	65.79	55.79	-27.70	-33.18
2	0.23961	10.11	21.70	8.30	31.81	18.41	62.11	52.11	-30.30	-33.70
3	0.50581	10.12	13.35	4.31	23.47	14.43	56.00	46.00	-32.53	-31.57
4	1.15878	10.14	14.02	-2.67	24.16	7.47	56.00	46.00	-31.84	-38.53
5	2.70714	10.21	11.87	-2.96	22.08	7.25	56.00	46.00	-33.92	-38.75
6	11.35606	10.58	21.86	16.43	32.44	27.01	60.00	50.00	-27.56	-22.99

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

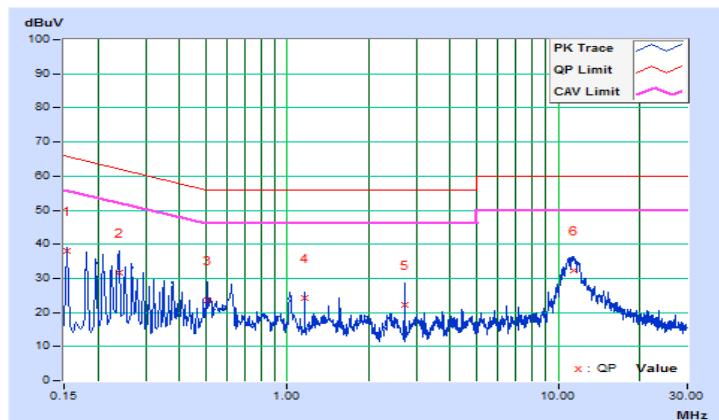


<LE 5.0>

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	Getaz Yang	Test Date	2017/10/4

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17737	10.10	37.92	23.03	48.02	33.13	64.61	54.61	-16.59	-21.48
2	0.19301	10.10	36.54	19.98	46.64	30.08	63.91	53.91	-17.27	-23.83
3	0.29076	10.11	29.91	12.80	40.02	22.91	60.50	50.50	-20.48	-27.59
4	0.34550	10.11	25.45	11.75	35.56	21.86	59.07	49.07	-23.51	-27.21
5	0.59965	10.12	20.73	8.32	30.85	18.44	56.00	46.00	-25.15	-27.56
6	11.71187	10.72	26.10	17.77	36.82	28.49	60.00	50.00	-23.18	-21.51

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

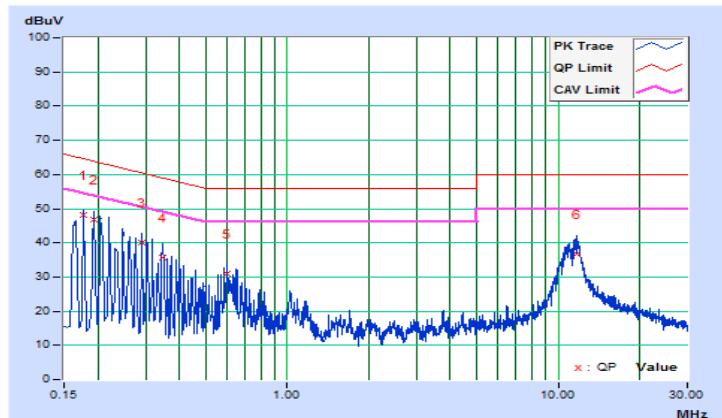


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	Getaz Yang	Test Date	2017/10/4

**Phase Of Power : Neutral (N)**

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.10	26.55	11.41	36.65	21.51	66.00	56.00	-29.35	-34.49
2	0.21647	10.10	22.58	8.64	32.68	18.74	62.95	52.95	-30.27	-34.21
3	0.37287	10.11	15.45	4.96	25.56	15.07	58.44	48.44	-32.88	-33.37
4	0.61138	10.12	12.40	9.05	22.52	19.17	56.00	46.00	-33.48	-26.83
5	1.54978	10.16	13.54	-0.29	23.70	9.87	56.00	46.00	-32.30	-36.13
6	10.88686	10.56	22.72	16.37	33.28	26.93	60.00	50.00	-26.72	-23.07

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

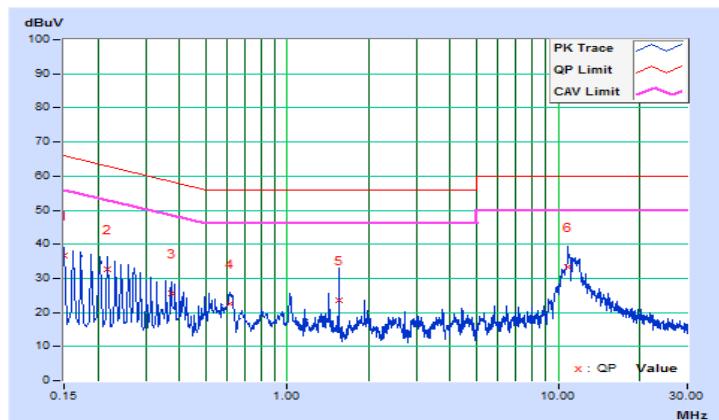


### 4.3 6 dB Bandwidth Measurement

#### 4.3.1 Limits of 6 dB Bandwidth Measurement

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100 kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 Deviation from Test Standard

No deviation.


#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Result

<LE 4.0>


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	0.73	0.5	Pass
19	2440	0.67	0.5	Pass
39	2480	0.67	0.5	Pass

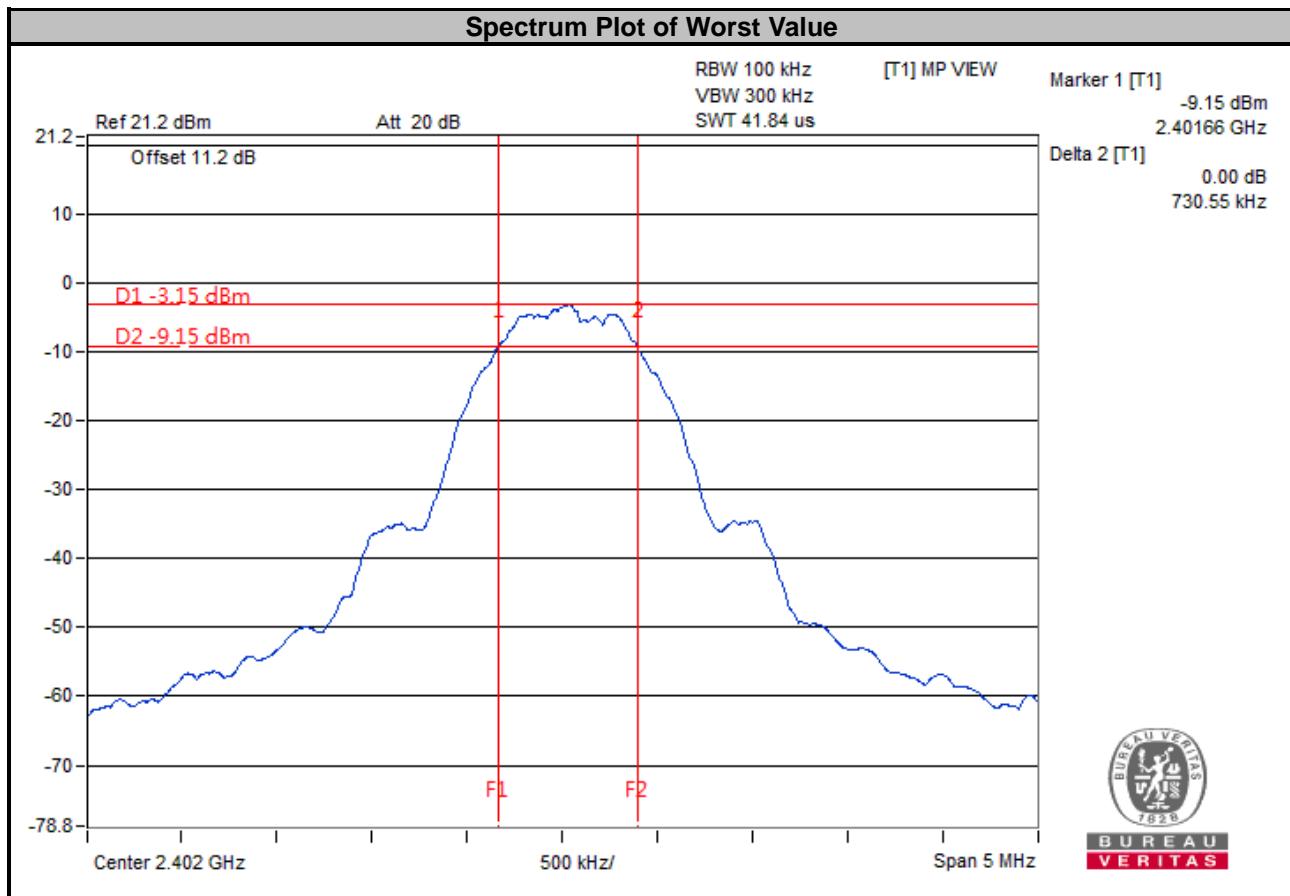

<LE 5.0>

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	1.15	0.5	Pass
19	2440	1.16	0.5	Pass
39	2480	1.15	0.5	Pass

### Spectrum Plot of Worst Value

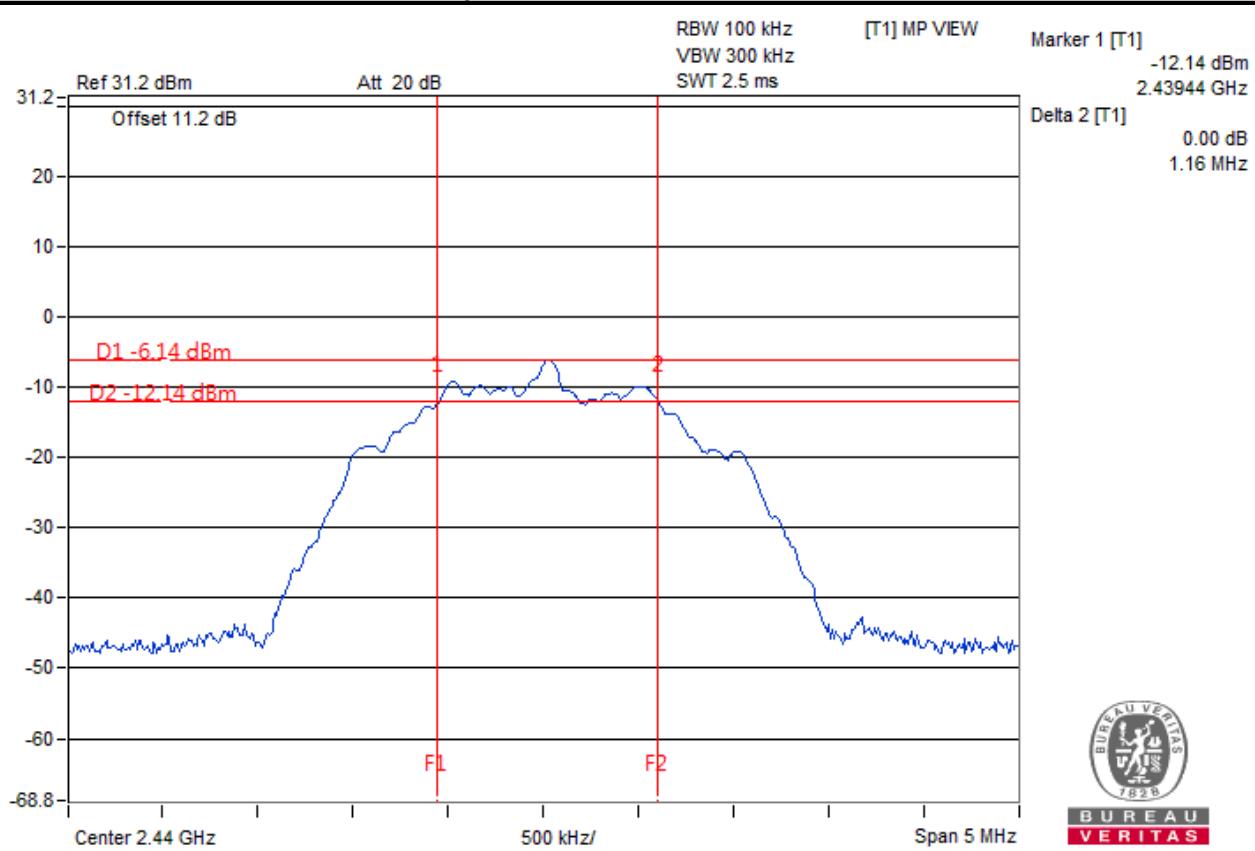

## 4.4 Occupied Bandwidth Measurement

### 4.4.1 Test Setup



### 4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

### 4.4.4 Deviation From Test Standard

No deviation.


### 4.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.4.6 Test Results


<LE 4.0>

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
0	2402	1.07	Pass
19	2440	1.06	Pass
39	2480	1.08	Pass

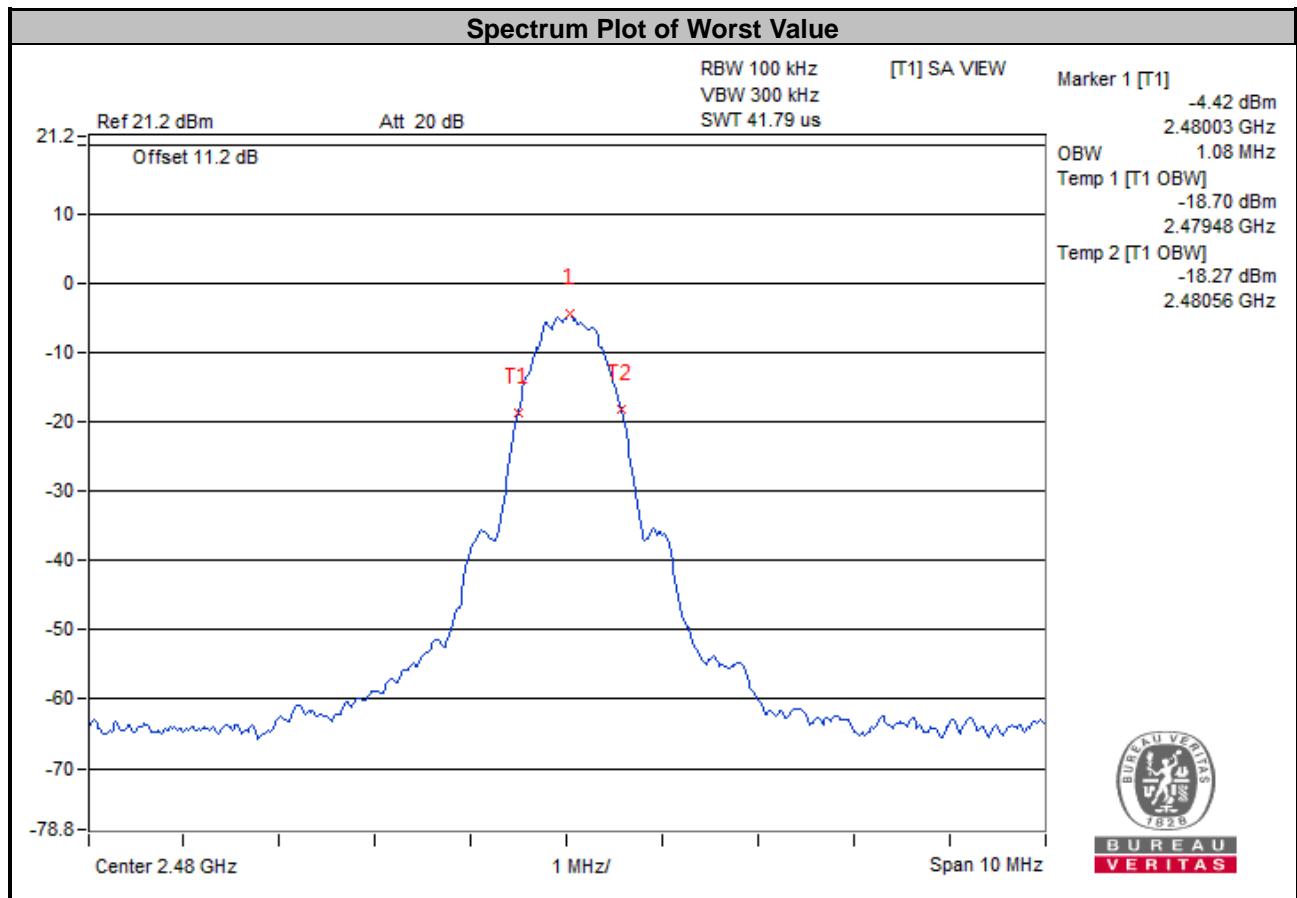

<LE 5.0>

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
0	2402	2.06	Pass
19	2440	2.08	Pass
39	2480	2.06	Pass

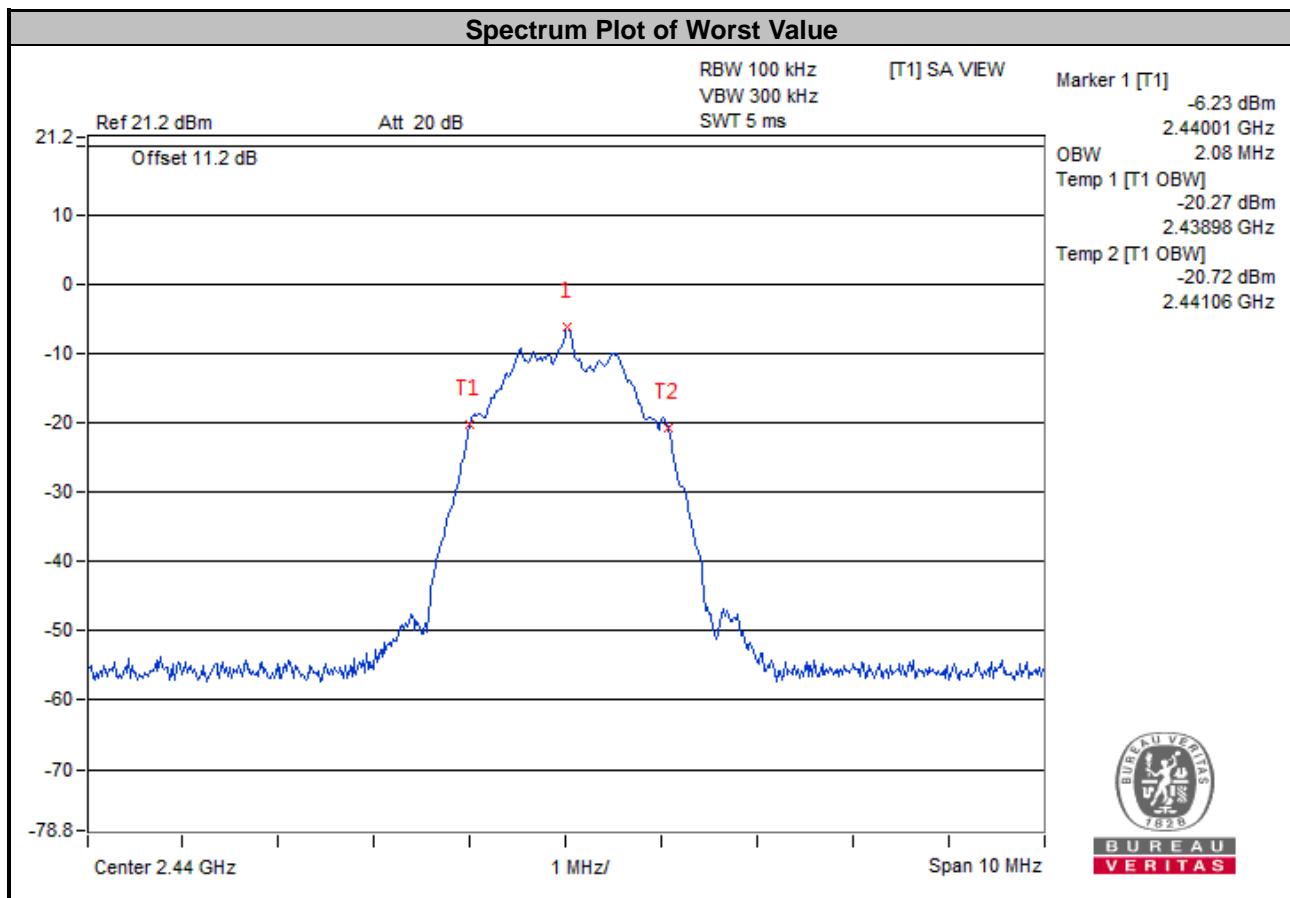


## 4.5 Conducted Output Power Measurement

### 4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

### 4.5.2 Test Setup

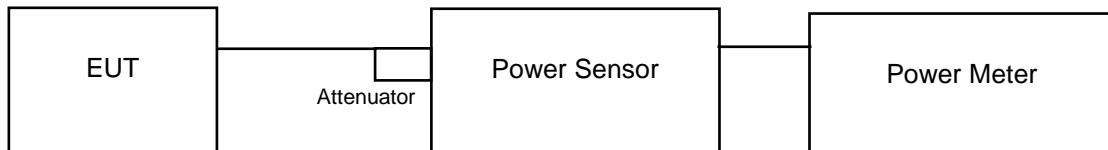

### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedures

A peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the power level.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.5.7 Test Results

<LE 4.0>

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
0	2402	0.7998	-0.97	30	Pass
19	2440	0.4943	-3.06	30	Pass
39	2480	0.8035	-0.95	30	Pass

<LE 5.0>


Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
0	2402	0.863	-0.64	30	Pass
19	2440	0.4613	-3.36	30	Pass
39	2480	0.877	-0.57	30	Pass

## 4.6 Power Spectral Density Measurement

### 4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8 dBm.

### 4.6.2 Test Setup



### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

- a. Set the RBW = 3 kHz, VBW = 10 kHz, Detector = peak.
- b. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- c. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

### 4.6.5 Deviation from Test Standard

No deviation.


### 4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.6.7 Test Results


<LE 4.0>

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	2402	-16.90	8	Pass
19	2440	-18.86	8	Pass
39	2480	-17.69	8	Pass

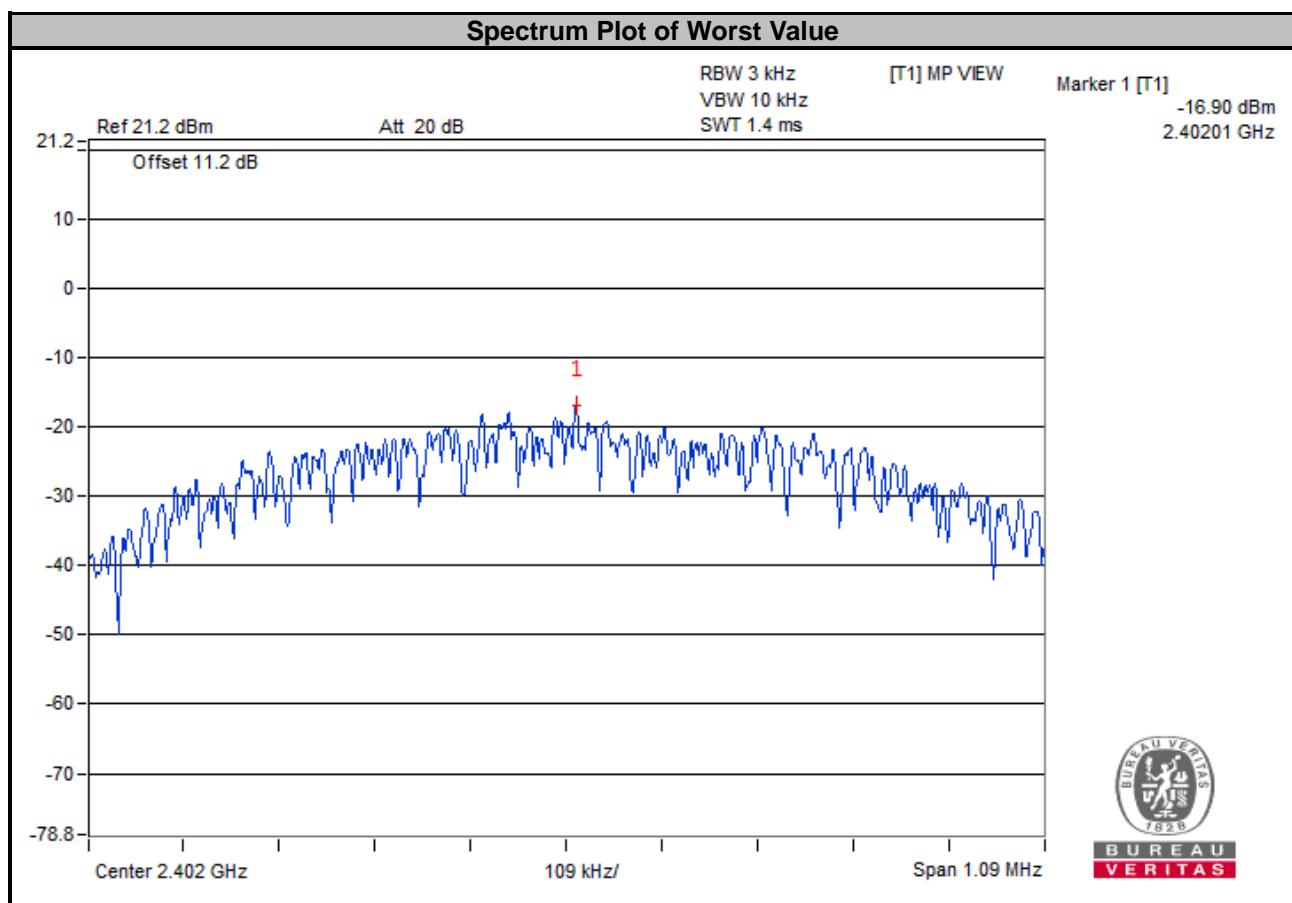

<LE 5.0>

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	2402	-20.95	8	Pass
19	2440	-24.42	8	Pass
39	2480	-22.59	8	Pass

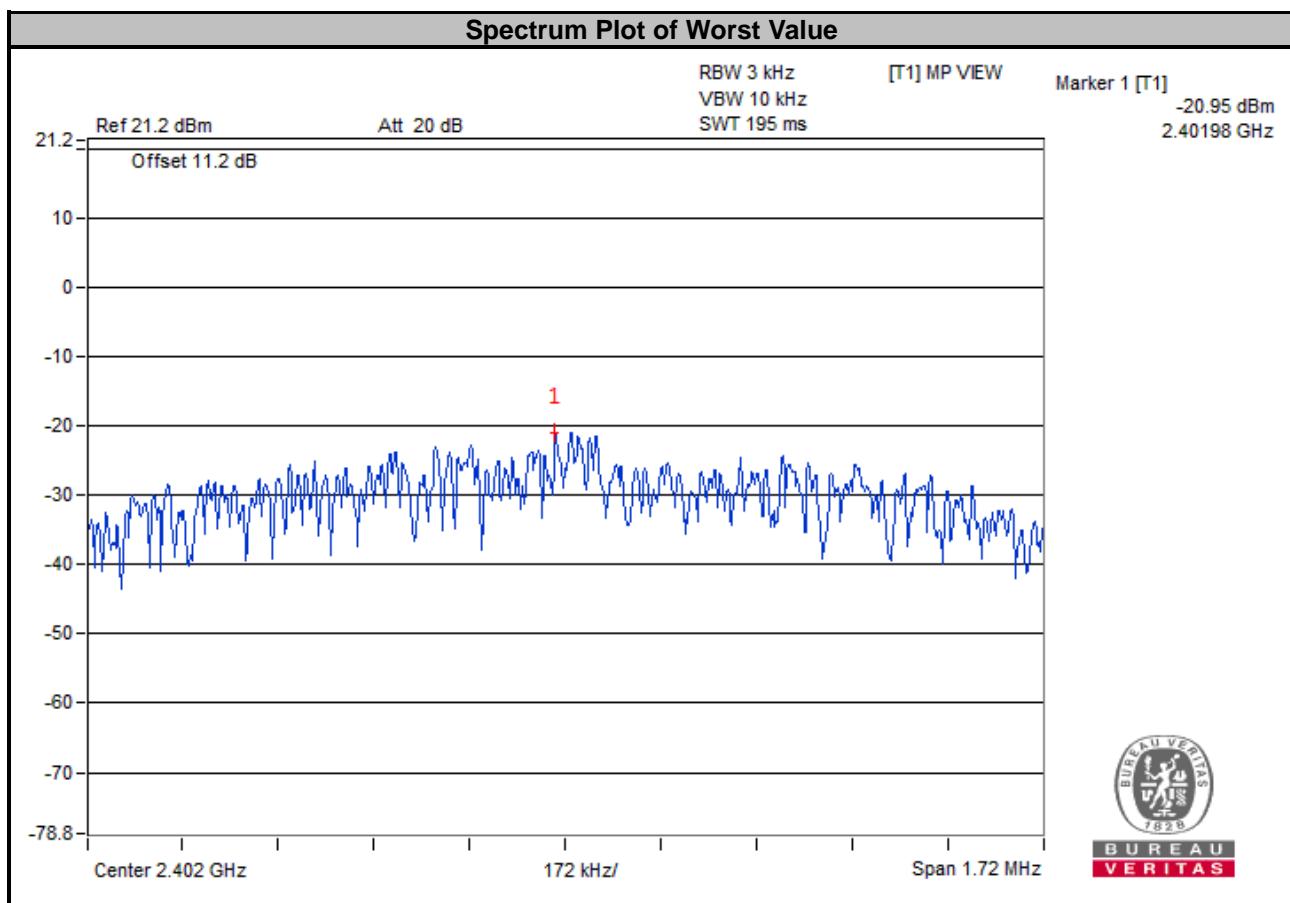


## **4.7 Conducted Out of Band Emission Measurement**

### **4.7.1 Limits of Conducted Out of Band Emission Measurement**

Below –20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

### **4.7.2 Test Setup**



### **4.7.3 Test Instruments**

Refer to section 4.1.2 to get information of above instrument.

### **4.7.4 Test Procedure**

#### **MEASUREMENT PROCEDURE REF**

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### **MEASUREMENT PROCEDURE OOB**

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### **4.7.5 Deviation from Test Standard**


No deviation.


### **4.7.6 EUT Operating Condition**

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 4.7.7 TEST RESULTS


<LE 4.0>

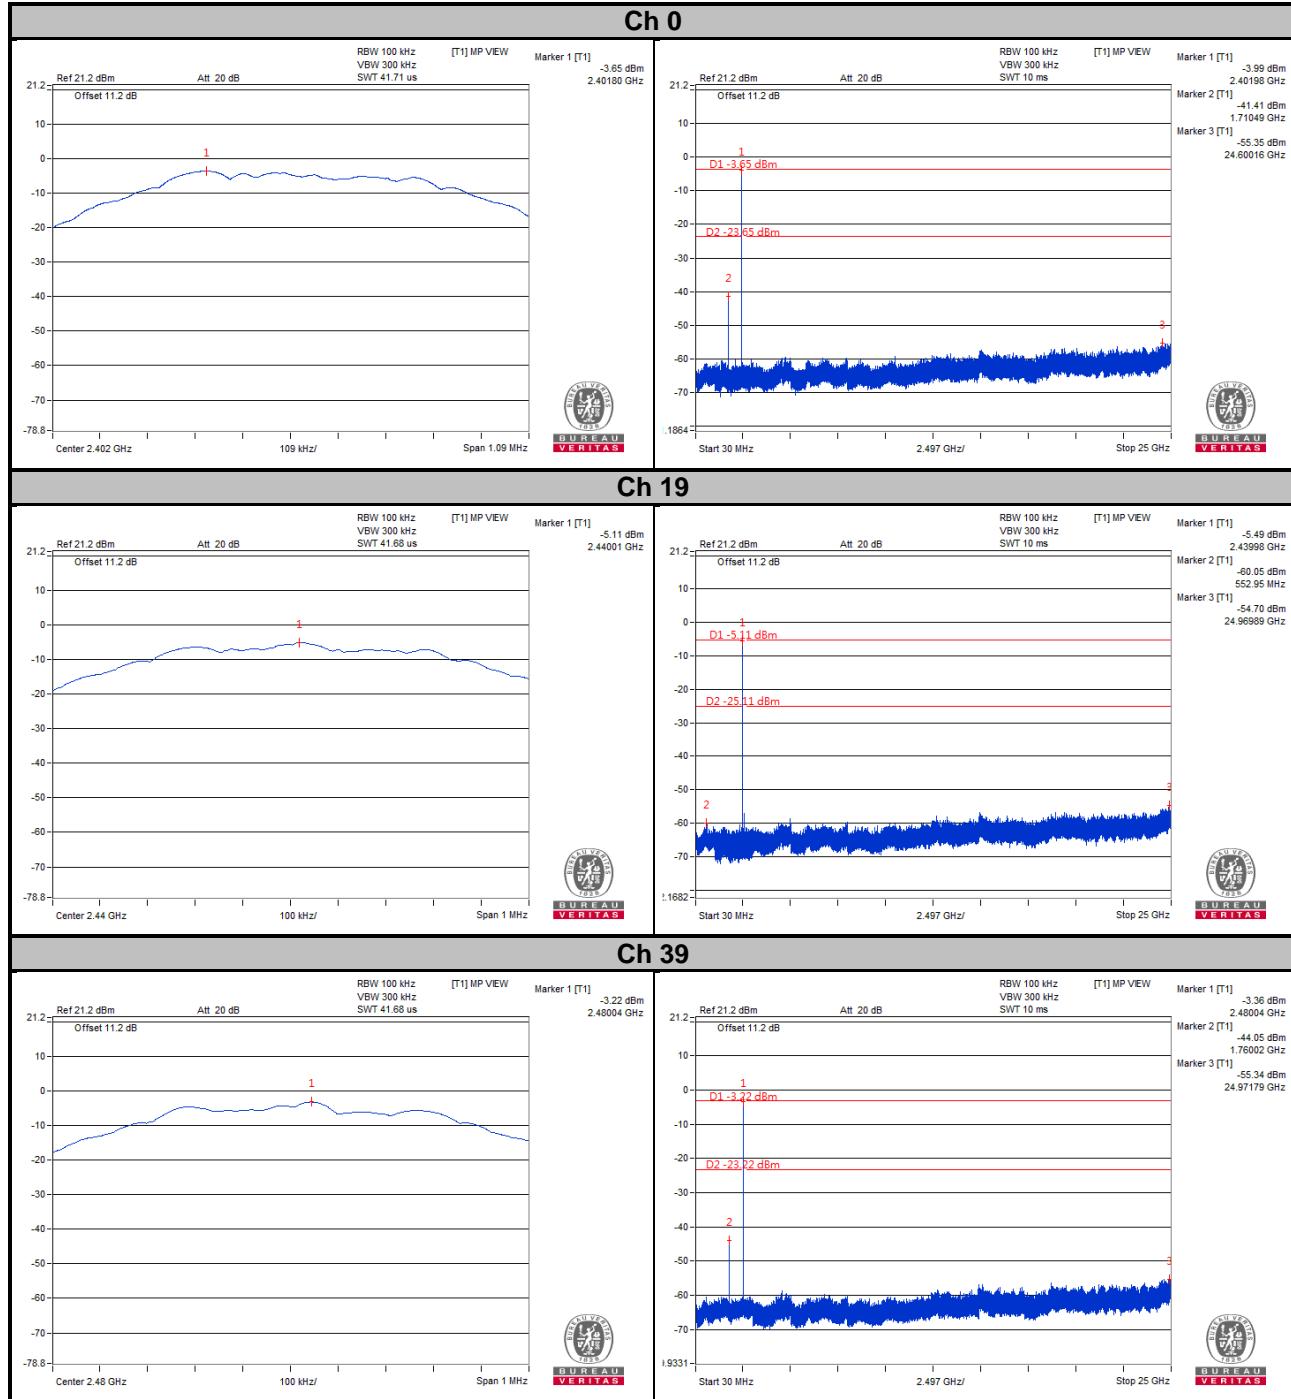

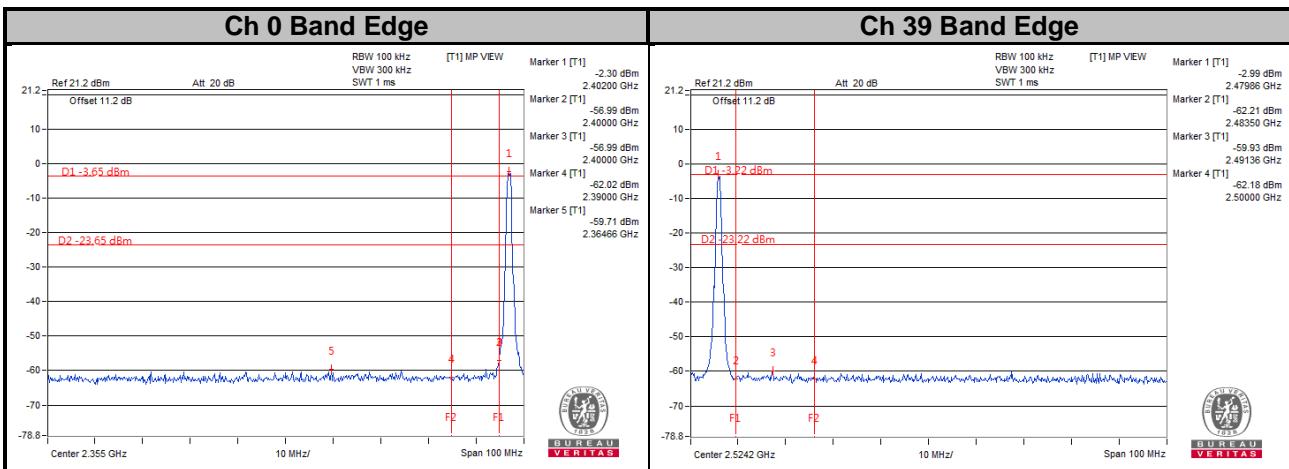


<LE 5.0>


### Ch 0

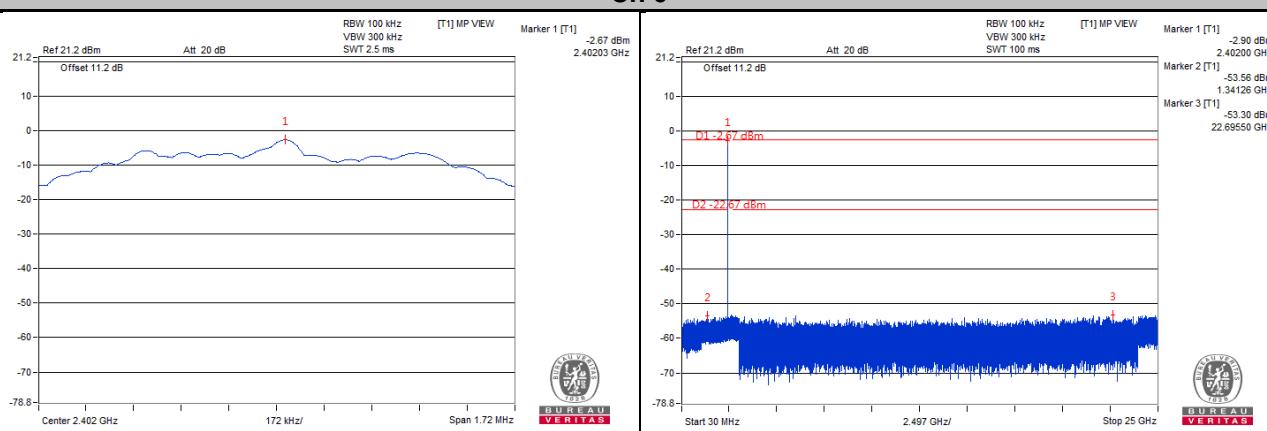


### Ch 19

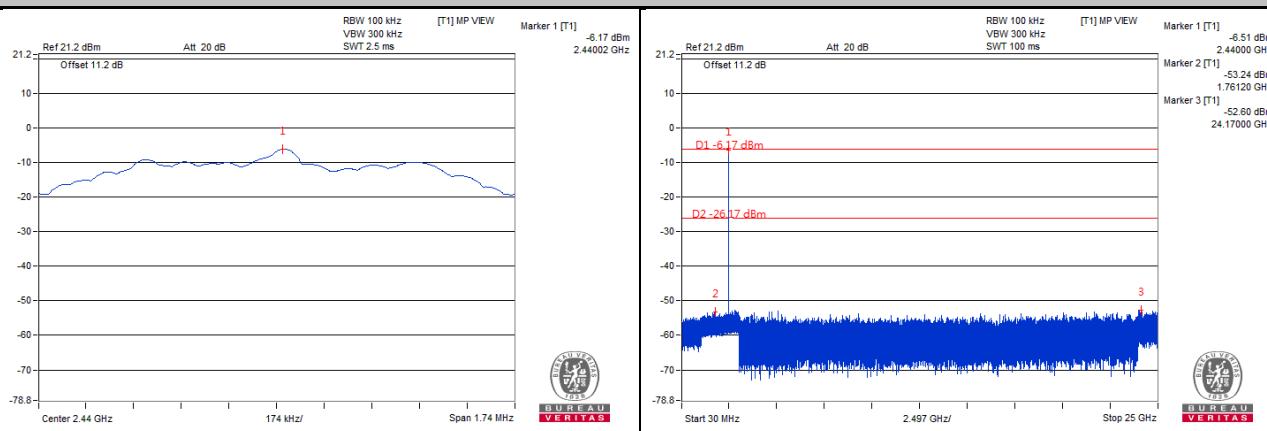

### Ch 39

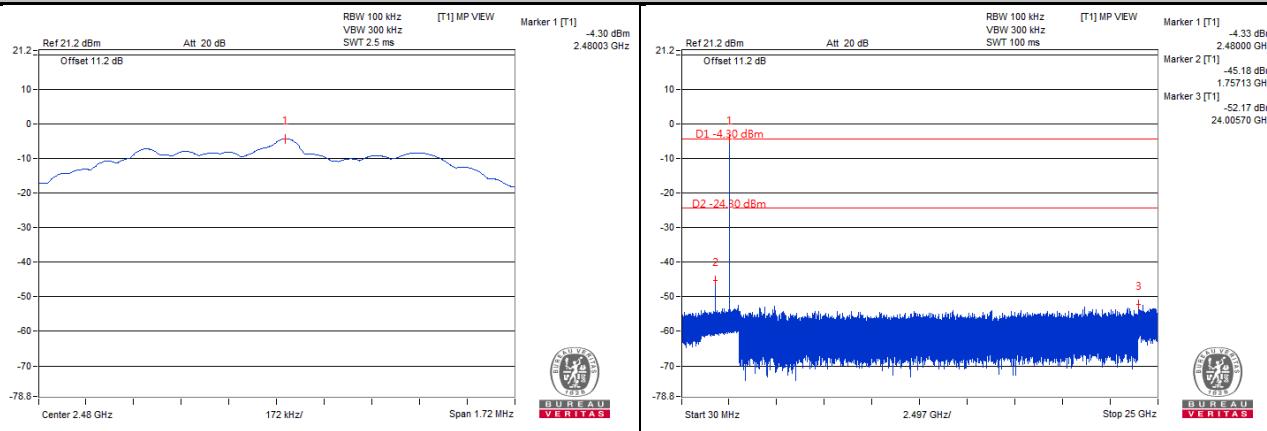

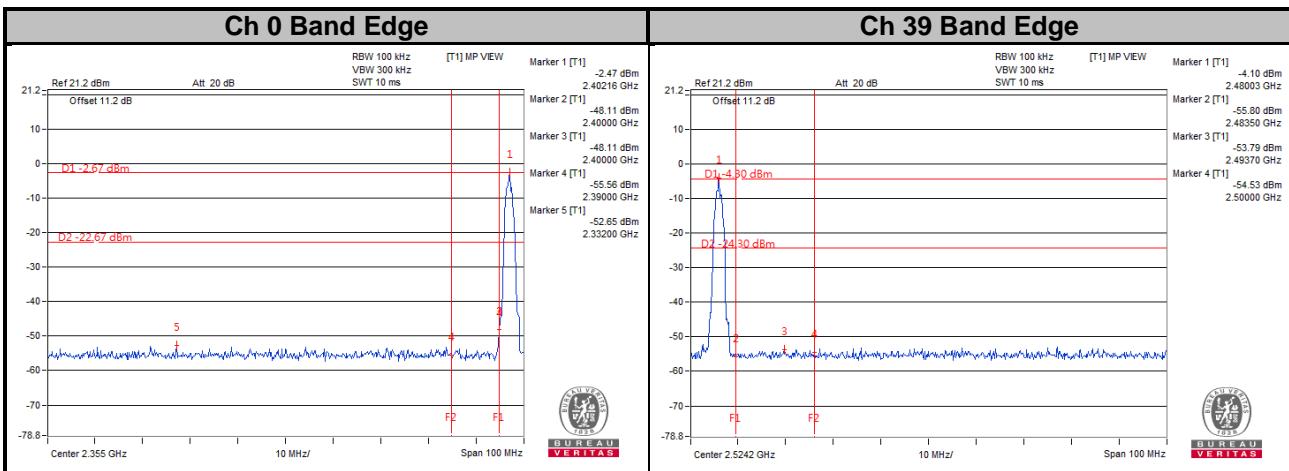

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180  
Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565  
Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety**

Tel: 886-3-3183232  
Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---