



Test Report No.: RF180604W006-6



VARIANT FCC TEST REPORT (PART 27)

Applicant:	FIH International Co., Ltd.
Address:	No.18, Tongji zhonglu, Beijing Economic & Technological Development Area

Manufacturer or Supplier:	HMD Global Oy
Address:	Karaportti 2 02610 Espoo FINLAND
Product:	GSM/WCDMA/LTE Mobile Phone
Brand Name:	Nokia
Model Name:	TA-1049
FCC ID:	2AJOTTA-1049
Date of tests:	Jun. 05, 2018 ~ Jun. 25, 2018

The tests have been carried out according to the requirements of the following standard:

- FCC Part 27, Subpart C, M ANSI/TIA/EIA-603-D
- FCC Part 2 ANSI/TIA/EIA-603-E ANSI C63.26-2015

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Roger Li Engineer / Mobile Department	Approved by Sam Tung Manager / Mobile Department
Date: Jul. 02, 2018	Date: Jul. 02, 2018

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD 3

1 SUMMARY OF TEST RESULTS..... 4

1.1 MEASUREMENT UNCERTAINTY 4

1.2 TEST SITE AND INSTRUMENTS 5

2 GENERAL INFORMATION 6

2.1 GENERAL DESCRIPTION OF EUT 6

2.2 CONFIGURATION OF SYSTEM UNDER TEST 8

2.3 DESCRIPTION OF SUPPORT UNITS 9

2.4 TEST ITEM AND TEST CONFIGURATION..... 9

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS11

3 TEST TYPES AND RESULTS..... 12

3.1 OUTPUT POWER MEASUREMENT 12

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT 12

3.1.2 TEST PROCEDURES 12

3.1.3 TEST SETUP 13

3.1.4 TEST RESULTS..... 14

3.2 RADIATED EMISSION MEASUREMENT 19

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT 19

3.2.2 TEST PROCEDURES 19

3.2.3 DEVIATION FROM TEST STANDARD..... 19

3.2.4 TEST SETUP 20

3.2.5 TEST RESULTS..... 22

4 INFORMATION ON THE TESTING LABORATORIES 28

**5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT
BY THE LAB 29**



Test Report No.: RF180604W006-6

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF180604W006-6	Original release	Jul. 02, 2018

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 27 & Part 2			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
2.1046 27.50(h)(2)	Equivalent Isotropically Radiated Power	PASS	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	N/A	N/A
2.1049 27.53(m)(6)	Occupied Bandwidth	N/A	N/A
27.50(d)(5)	Peak to average ratio	N/A	N/A
2.1051 27.53(m)(4)(6)	Band Edge Measurements	N/A	N/A
2.1051 27.53(m)(4)(6)	Conducted Spurious Emissions	N/A	N/A
2.1053 27.53(m)(4)(6)	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -9.41dB at 36.790MHz.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.66dB
Radiated emissions	9KHz ~ 30MHz	2.68dB
	30MHz ~ 1GMHz	3.26dB
	1GHz ~ 18GHz	4.48dB
	18GHz ~ 40GHz	4.12dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 16,18	Mar. 15,19
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Jun. 28,17	Jun. 27,18
Bilog Antenna 1	ETS-LINDGREN	3143B	00161964	Nov. 26,16	Nov. 25,18
Bilog Antenna 2	ETS-LINDGREN	3143B	00161965	Nov. 26,16	Nov. 25,18
Horn Antenna 1	ETS-LINDGREN	3117	00168728	Nov. 26,16	Nov. 25,18
Horn Antenna 2	ETS-LINDGREN	3117	00168692	Nov. 26,16	Nov. 25,18
Loop antenna	Daze	ZN30900A	0708	Nov. 20,17	Nov. 19,18
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40 -K-SG/QMS-00 361	15433	Dec. 16,16	Dec. 15,18
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Mar. 02,18	Mar. 01,19
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jul. 24,17	Jul. 23,18
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jul. 24,17	Jul. 23,18
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Jul. 24,17	Jul. 23,18
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn- CT0001143-1216	Apr. 21,18	Apr. 20,19
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated _V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SM A	1505	Jul. 24,17	Jul. 23,18
Power Meter	Anritsu	ML2495A	1506002	Mar. 02,18	Mar. 01,19
Power Sensor	Anritsu	MA2411B	1339352	Mar. 16,18	Mar. 15,19
Humid & Temp Programmable Tester	Juyi	ITH-120-45-CP -AR	IAA1504-001	Jul. 18,17	Jul. 17,18
MXG Analog Microvave Signal Generator	KEYSIGHT	N5183A	MY50143024	Mar. 13,18	Mar. 12,19

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 525120.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	GSM/WCDMA/LTE Mobile Phone	
MODEL NAME	TA-1049	
POWER SUPPLY	5.0Vdc (adapter or host equipment) 3.9Vdc (Li-ion, battery)	
MODULATION TECHNOLOGY	LTE Band 7	QPSK, 16QAM
FREQUENCY RANGE	LTE Band 7 Channel Bandwidth: 5MHz	2502.5MHz ~ 2567.5MHz
	LTE Band 7 Channel Bandwidth: 10MHz	2505MHz ~ 2565MHz
	LTE Band 7 Channel Bandwidth: 15MHz	2507.5MHz ~ 2562.5MHz
	LTE Band 7 Channel Bandwidth: 20MHz	2510MHz ~ 2560MHz
	LTE Band 38 Channel Bandwidth: 5MHz	2572.5MHz ~ 2617.5MHz
	LTE Band 38 Channel Bandwidth: 10MHz	2575MHz ~ 2615MHz
	LTE Band 38 Channel Bandwidth: 15MHz	2577.5MHz ~ 2612.5MHz
	LTE Band 38 Channel Bandwidth: 20MHz	2580MHz ~ 2610MHz
MAX. EIRP POWER	LTE Band 7 Channel Bandwidth: 10MHz	214mW
	LTE Band 38 Channel Bandwidth: 15MHz	373mW
ANTENNA TYPE	Fixed Internal Antenna with 2.27dBi gain	
HW VERSION	HW0309	
SW VERSION	000C_0_34A	
I/O PORTS	Refer to user's manual	
DATA CABLE	USB cable: non-shielded, detachable, 1.0meter Earphone cable: non-shielded, detachable, 1.5meter	

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. This report is issued as a supplementary report to the original report RF180131W003-6. The differences compared with original report are updated HW and adding 2nd Manufacturer of components and antenna.



**BUREAU
VERITAS**


Test Report No.: RF180604W006-6

List of Accessories:


ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
Adapter 1	Salcomp	Salcomp (Shenzhen) Co., Ltd.	FC0202	I/P: 100-240Vac, 150mA O/P: 5Vdc, 1000mA
Adapter 2	Aohai	DONGGUAN AOHA TECHNOLOGY CO., LTD.	AD-5WU	I/P: 100-240Vac, 150mA O/P: 5Vdc, 1000mA
Battery	SCUD	SCUD (Fujian) Electronics CO., Ltd.	HE336	Rating: 3.85Vdc, 2900mAh
Earphone 1	Nokia	FIT	WH-108	1.5m non-shielded cable w/o core
Earphone 2	Nokia	OBO	WH-108	1.5m non-shielded cable w/o core
USB Cable	Nokia	FIH	CA-190CD	1.0m non-shielded cable w/o core

2.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

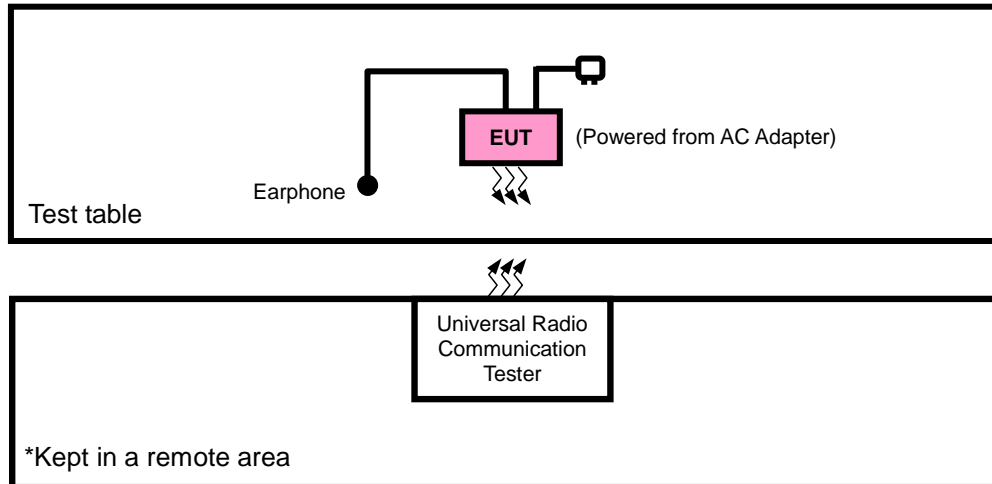

FOR CONDUCTED & E.I.R.P TEST

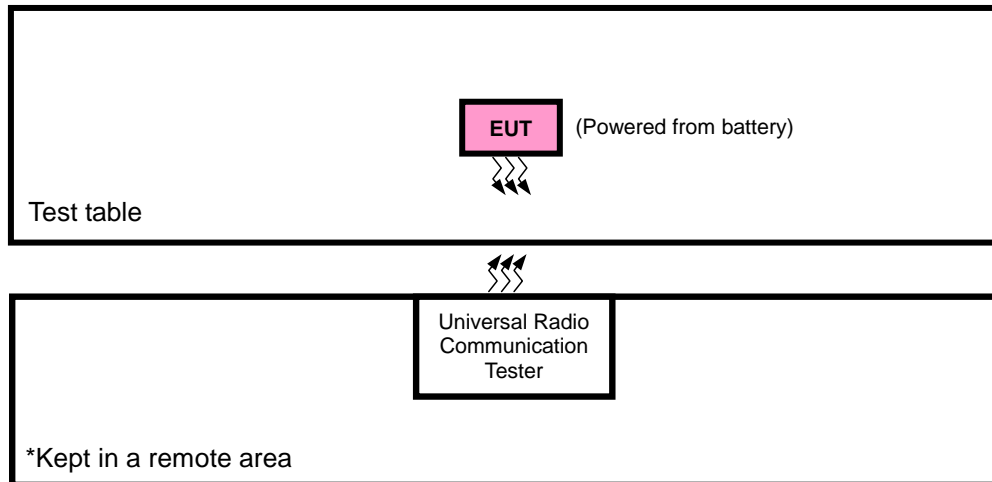

2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	AC Line: Unshielded, Detachable 1.5m

NOTE: All power cords of the above support units are non shielded (1.8m).

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + USB Cable + Earphone with LTE link
B	EUT + Battery with LTE link



LTE BAND 7

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
B	EIRP	20775 to 21425	20775, 21100, 21425	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20800 to 21400	20800, 21100, 21400	10MHz	QPSK, 16QAM	1 RB / 0RB Offset
		20825 to 21375	20825, 21100, 21375	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20850 to 21350	20850, 21100, 21350	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	20775 to 21425	21100	5MHz	QPSK	1 RB / 0 RB Offset
		20800 to 21400	21100	10MHz	QPSK	1 RB / 0RB Offset
		20825 to 21375	20825, 21100, 21375	15MHz	QPSK	1 RB / 0 RB Offset
		20850 to 21350	21100	20MHz	QPSK	1 RB / 0 RB Offset

LTE BAND 38 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
B	EIRP	37775 to 38225	37775, 38000, 38225	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10MHz	QPSK, 16QAM	1 RB / 0RB Offset
		37825 to 38175	37825, 38000, 38175	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	37775 to 38225	38000	5MHz	QPSK	1 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10MHz	QPSK	1 RB / 0RB Offset
		37825 to 38175	38000	15MHz	QPSK	1 RB / 0 RB Offset
		37850 to 38150	38000	20MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	24deg. C, 60%RH	3.9Vdc from Battery	Vincent
RADIATED EMISSION	24deg. C, 60%RH	5Vdc from adapter	Vincent



Test Report No.: RF180604W006-6

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v03

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “User stations are limited to 2 watts” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$


CONDUCTED POWER MEASUREMENT:

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


3.1.3 TEST SETUP

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

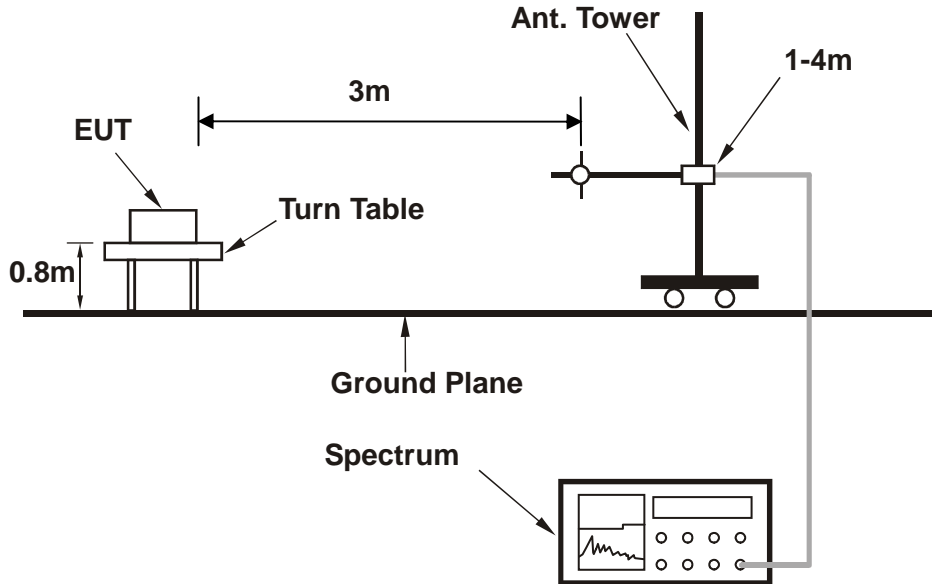


<Radiated Emission above 1 GHz>

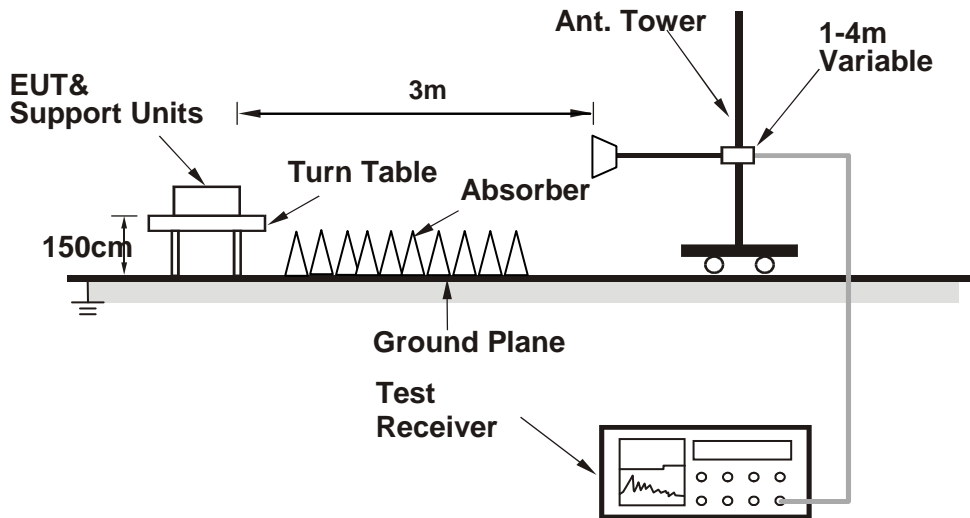

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:



3.1.4 TEST RESULTS

AVERAGE CONDUCTED OUTPUT POWER (dBm)

LTE Band 7							
BW	Modulation	RB Size	RB Offset	Low CH 20775	Mid CH 21100	High CH 21425	MPR
				Frequency 2502.5 MHz	Frequency 2535 MHz	Frequency 2567.5 MHz	
5 MHz	QPSK	1	0	22.19	22.00	21.81	0
		1	12	22.16	21.97	21.78	0
		1	24	22.09	21.90	21.71	0
		12	0	21.32	21.13	20.94	1
		12	6	21.24	21.05	20.86	1
		12	13	21.06	20.87	20.68	1
		25	0	21.20	21.01	20.82	1
	16QAM	1	0	21.32	21.13	20.94	1
		1	12	21.29	21.10	20.91	1
		1	24	21.20	21.01	20.82	1
		12	0	20.32	20.13	19.94	2
		12	6	20.31	20.12	19.93	2
		12	13	20.18	19.99	19.80	2
		25	0	20.26	20.07	19.88	2
BW	Modulation	RB Size	RB Offset	Low CH 20800	Mid CH 21100	High CH 21400	MPR
				Frequency 2505 MHz	Frequency 2535 MHz	Frequency 2565 MHz	
10 MHz	QPSK	1	0	22.23	22.04	21.85	0
		1	24	22.20	22.01	21.82	0
		1	49	22.13	21.94	21.75	0
		25	0	21.36	21.17	20.98	1
		25	12	21.28	21.09	20.90	1
		25	25	21.10	20.91	20.72	1
		50	0	21.24	21.05	20.86	1
	16QAM	1	0	21.36	21.17	20.98	1
		1	24	21.33	21.14	20.95	1
		1	49	21.24	21.05	20.86	1
		25	0	20.36	20.17	19.98	2
		25	12	20.35	20.16	19.97	2
		25	25	20.22	20.03	19.84	2
		50	0	20.30	20.11	19.92	2

LTE Band 7							
BW	Modulation	RB Size	RB Offset	Low CH 20825	Mid CH 21100	High CH 21375	MPR
				Frequency 2507.5 MHz	Frequency 2535 MHz	Frequency 2562.5 MHz	
15 MHz	QPSK	1	0	22.29	22.10	21.91	0
		1	37	22.26	22.07	21.88	0
		1	74	22.19	22.00	21.81	0
		36	0	21.42	21.23	21.04	1
		36	19	21.34	21.15	20.96	1
		36	39	21.16	20.97	20.78	1
		75	0	21.30	21.11	20.92	1
	16QAM	1	0	21.42	21.23	21.04	1
		1	37	21.39	21.20	21.01	1
		1	74	21.30	21.11	20.92	1
		36	0	20.42	20.23	20.04	2
		36	19	20.41	20.22	20.03	2
		36	39	20.28	20.09	19.90	2
		75	0	20.36	20.17	19.98	2
BW	Modulation	RB Size	RB Offset	Low CH 20850	Mid CH 21100	High CH 21350	MPR
				Frequency 2510 MHz	Frequency 2535 MHz	Frequency 2560 MHz	
20 MHz	QPSK	1	0	22.32	22.13	21.94	0
		1	50	22.29	22.10	21.91	0
		1	99	22.22	22.03	21.84	0
		50	0	21.45	21.26	21.07	1
		50	25	21.37	21.18	20.99	1
		50	50	21.19	21.00	20.81	1
		100	0	21.33	21.14	20.95	1
	16QAM	1	0	21.45	21.26	21.07	1
		1	50	21.42	21.23	21.04	1
		1	99	21.33	21.14	20.95	1
		50	0	20.45	20.26	20.07	2
		50	25	20.44	20.25	20.06	2
		50	50	20.31	20.12	19.93	2
		100	0	20.39	20.20	20.01	2

LTE Band 38							
BW	Modulation	RB Size	RB Offset	Low CH 37775	Mid CH 38000	High CH 38225	3GPP MPR (dB)
				Frequency 2572.5 MHz	Frequency 2595 MHz	Frequency 2617.5MHz	
5MHz	QPSK	1	0	21.95	21.94	21.97	0
		1	12	21.91	21.90	21.93	0
		1	24	21.83	21.82	21.85	0
		12	0	20.97	20.96	20.99	1
		12	6	20.93	20.92	20.95	1
		12	13	20.87	20.86	20.89	1
		25	0	20.94	20.93	20.96	1
	16QAM	1	0	20.99	20.98	21.01	1
		1	12	20.93	20.92	20.95	1
		1	24	20.87	20.86	20.89	1
		12	0	20.02	20.01	20.04	2
		12	6	19.98	19.97	20.00	2
		12	13	19.95	19.94	19.97	2
		25	0	20.01	20.00	20.03	2
LTE Band 38							
BW	Modulation	RB Size	RB Offset	Low CH 37800	Mid CH 38000	High CH 38200	3GPP MPR (dB)
				Frequency 2575 MHz	Frequency 2595 MHz	Frequency 2615 MHz	
10MHz	QPSK	1	0	21.99	21.98	22.01	0
		1	24	21.95	21.94	21.97	0
		1	49	21.87	21.86	21.89	0
		25	0	21.01	21.00	21.03	1
		25	12	20.97	20.96	20.99	1
		25	25	20.91	20.90	20.93	1
		50	0	20.98	20.97	21.00	1
	16QAM	1	0	21.03	21.02	21.05	1
		1	24	20.97	20.96	20.99	1
		1	49	20.91	20.90	20.93	1
		25	0	20.06	20.05	20.08	2
		25	12	20.02	20.01	20.04	2
		25	25	19.99	19.98	20.01	2
		50	0	20.05	20.04	20.07	2

LTE Band 38							
BW	Modulation	RB Size	RB Offset	Low CH 37825	Mid CH 38000	High CH 38175	3GPP MPR (dB)
				Frequency 2577.5 MHz	Frequency 2595 MHz	Frequency 2612.5MHz	
15MHz	QPSK	1	0	22.02	22.01	22.04	0
		1	37	21.98	21.97	22.00	0
		1	74	21.90	21.89	21.92	0
		36	0	21.04	21.03	21.06	1
		36	19	21.00	20.99	21.02	1
		36	39	20.94	20.93	20.96	1
		75	0	21.01	21.00	21.03	1
	16QAM	1	0	21.06	21.05	21.08	1
		1	37	21.00	20.99	21.02	1
		1	74	20.94	20.93	20.96	1
		36	0	20.09	20.08	20.11	2
		36	19	20.05	20.04	20.07	2
		36	39	20.02	20.01	20.04	2
		75	0	20.08	20.07	20.10	2
LTE Band 38							
BW	Modulation	RB Size	RB Offset	Low CH 37850	Mid CH 38000	High CH 38150	3GPP MPR (dB)
				Frequency 2580 MHz	Frequency 2595 MHz	Frequency 2610 MHz	
20MHz	QPSK	1	0	22.09	22.08	22.11	0
		1	50	22.05	22.04	22.07	0
		1	99	21.97	21.96	21.99	0
		50	0	21.11	21.10	21.13	1
		50	25	21.07	21.06	21.09	1
		50	50	21.01	21.00	21.03	1
		100	0	21.08	21.07	21.10	1
	16QAM	1	0	21.13	21.12	21.15	1
		1	50	21.07	21.06	21.09	1
		1	99	21.01	21.00	21.03	1
		50	0	20.16	20.15	20.18	2
		50	25	20.12	20.11	20.14	2
		50	50	20.09	20.08	20.11	2
		100	0	20.15	20.14	20.17	2



BUREAU
VERITAS

Test Report No.: RF180604W006-6

EIRP

LTE BAND 7

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
20800	2505.0	-22.79	45.65	22.86	193.15	H	2
21100	2535.0	-22.73	46.04	23.31	214.04	H	2
21400	2565.0	-22.82	46.07	23.25	211.11	H	2
20800	2505.0	-27.16	47.18	20.02	100.37	V	2
21100	2535.0	-26.86	46.57	19.71	93.54	V	2
21400	2565.0	-26.93	47.06	20.13	103.13	V	2

REMARKS: 1. EIRP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB).
 2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss

LTE BAND 38

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	Limit (W)
37825	2577.5	-20.40	46.01	25.61	363.92	H	2
38000	2595.0	-20.32	46.04	25.72	373.25	H	2
38175	2612.5	-21.27	46.14	24.87	306.90	H	2
37825	2577.5	-26.18	47.03	20.85	121.62	V	2
38000	2595.0	-26.41	47.10	20.69	117.22	V	2
38175	2612.5	-26.89	47.17	20.28	106.66	V	2

REMARKS: 1. EIRP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB).
 2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25dBm.

3.2.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15\text{dBi}$.


NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


<Below 30MHz>

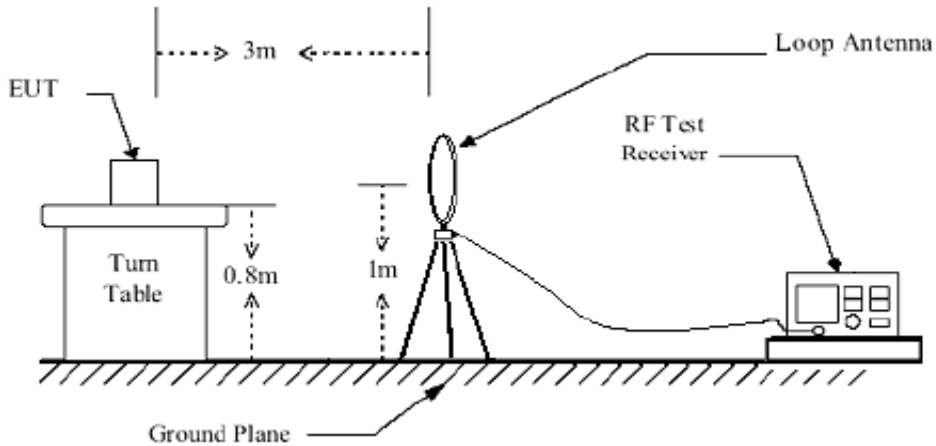

< Frequency Range 30MHz~1GHz >

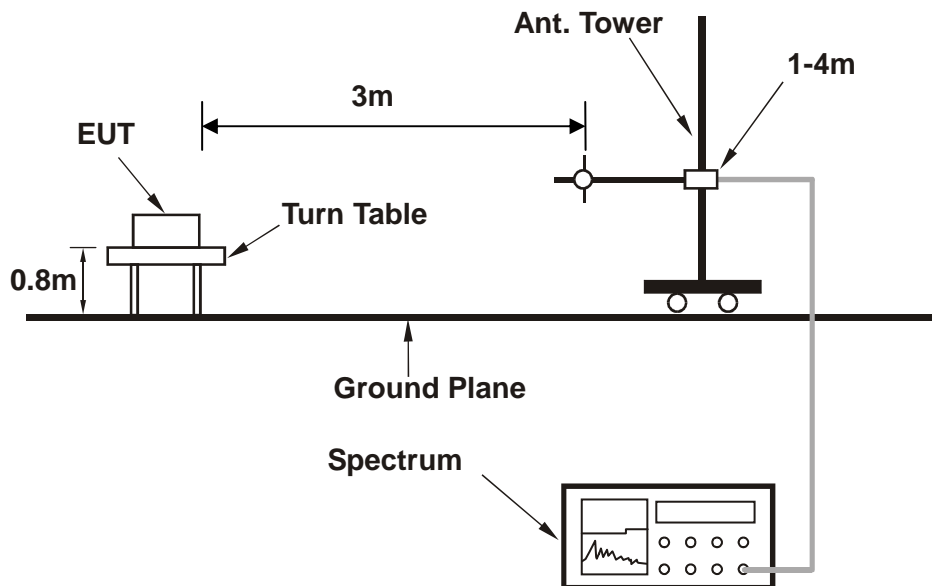

< Frequency Range above 1GHz >

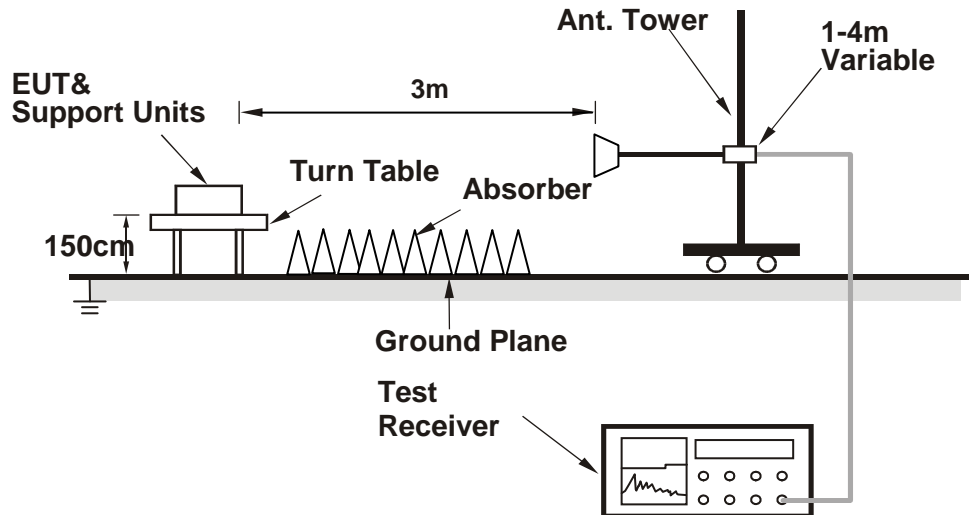

For the actual test configuration, please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS**

Test Report No.: RF180604W006-6

3.2.5 TEST RESULTS

BELOW 1GHz WORST-CASE DATA


9 KHz – 30 MHz data: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

30 MHz – 1GHz data:

LTE Band 38:

MODE	TX channel 38000	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Vincent		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	36.790	-34.41	-46.73	-25.00	-9.41	12.32 Peak	Horizontal
2		43.580	-38.77	-47.71	-25.00	-13.77	8.94 Peak	Horizontal
3		58.130	-42.13	-36.89	-25.00	-17.13	-5.24 Peak	Horizontal
4		101.780	-44.46	-32.94	-25.00	-19.46	-11.52 Peak	Horizontal
5		164.830	-58.54	-40.24	-25.00	-33.54	-18.30 Peak	Horizontal
6		200.720	-53.75	-36.53	-25.00	-28.75	-17.22 Peak	Horizontal

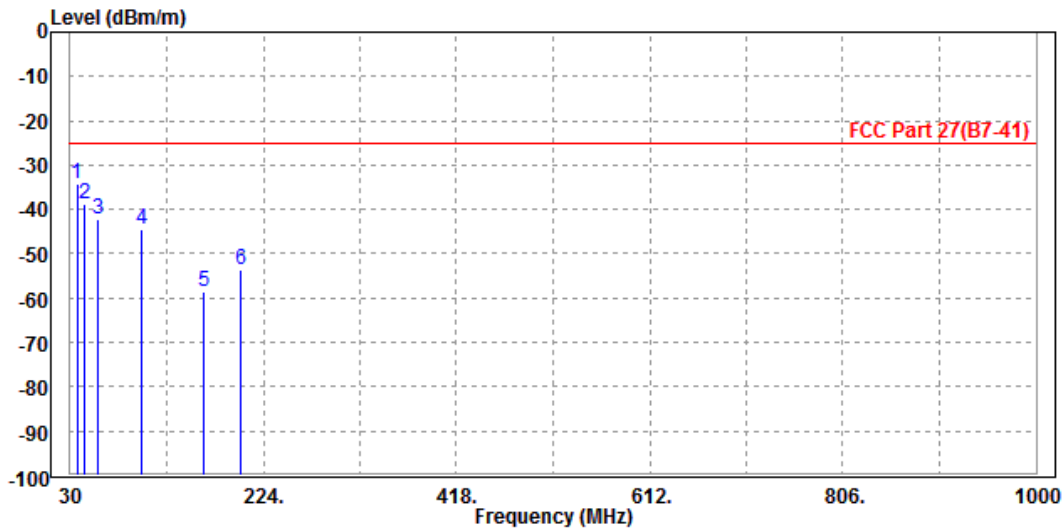




Test Report No.: RF180604W006-6

MODE	TX channel 38000	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Vincent		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	43.580	-36.51	-33.87	-25.00	-11.51	-2.64	Peak	Vertical
2	51.340	-36.34	-30.60	-25.00	-11.34	-5.74	Peak	Vertical
3	100.810	-44.65	-33.87	-25.00	-19.65	-10.78	Peak	Vertical
4	163.860	-55.58	-40.72	-25.00	-30.58	-14.86	Peak	Vertical
5	202.660	-54.62	-43.94	-25.00	-29.62	-10.68	Peak	Vertical
6	276.380	-58.78	-47.38	-25.00	-33.78	-11.40	Peak	Vertical

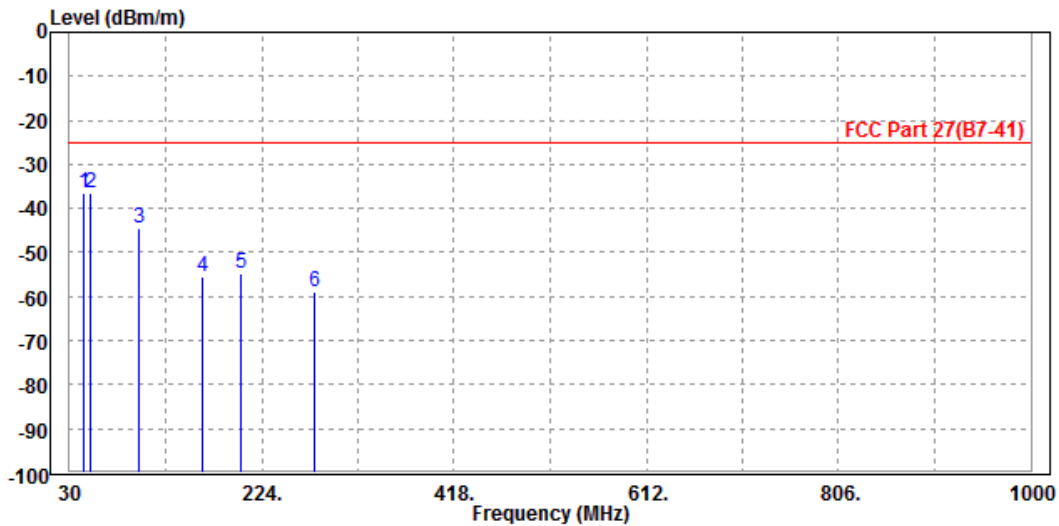



BUREAU VERITAS

Test Report No.: RF180604W006-6

ABOVE 1GHz

Note: For higher frequency, the emission is too low to be detected.


LTE Band 7

CHANNEL BANDWIDTH: 15MHz / QPSK

CH 21100

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Vincent		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5082.000	-50.71	-59.18	-25.00	-25.71	8.47	Peak	Horizontal
2	PP 7604.000	-46.94	-60.42	-25.00	-21.94	13.48	Peak	Horizontal

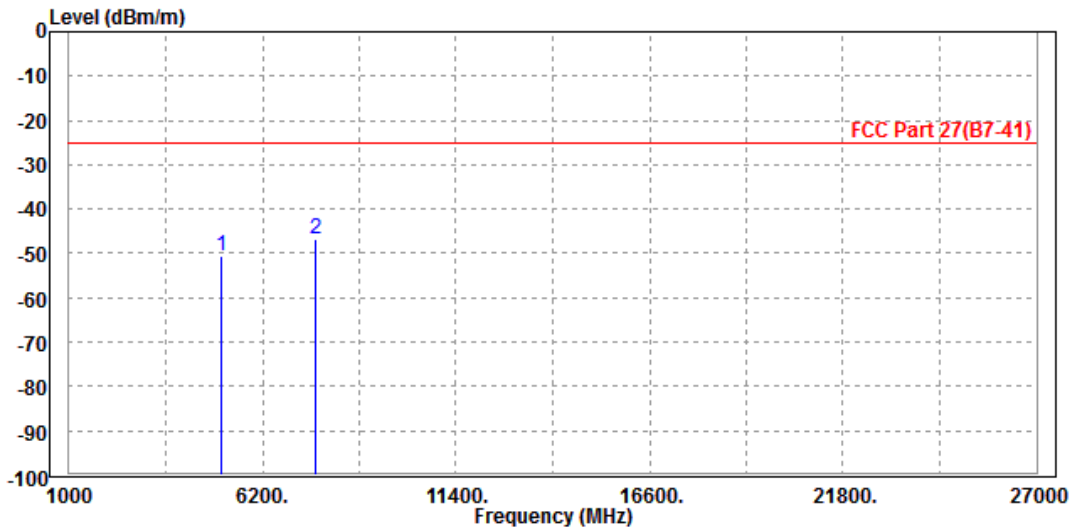




Test Report No.: RF180604W006-6

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Vincent		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5082.000	-48.28	-56.27	-25.00	-23.28	7.99	Peak	Vertical
2	7604.000	-49.00	-61.99	-25.00	-24.00	12.99	Peak	Vertical

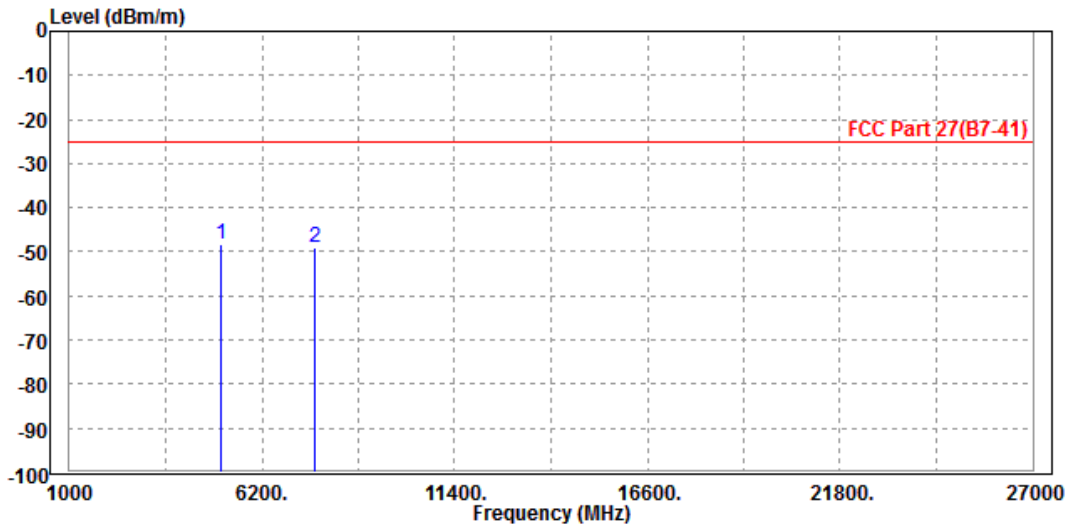



Test Report No.: RF180604W006-6


LTE Band 38

CHANNEL BANDWIDTH: 10MHz / QPSK

CH 38000

MODE	TX channel 38000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5/9V from adapter
TESTED BY	Vincent		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5186.000	-54.08	-62.67	-25.00	-29.08	8.59	Peak	Horizontal
2 PP	7785.000	-48.92	-62.66	-25.00	-23.92	13.74	Peak	Horizontal

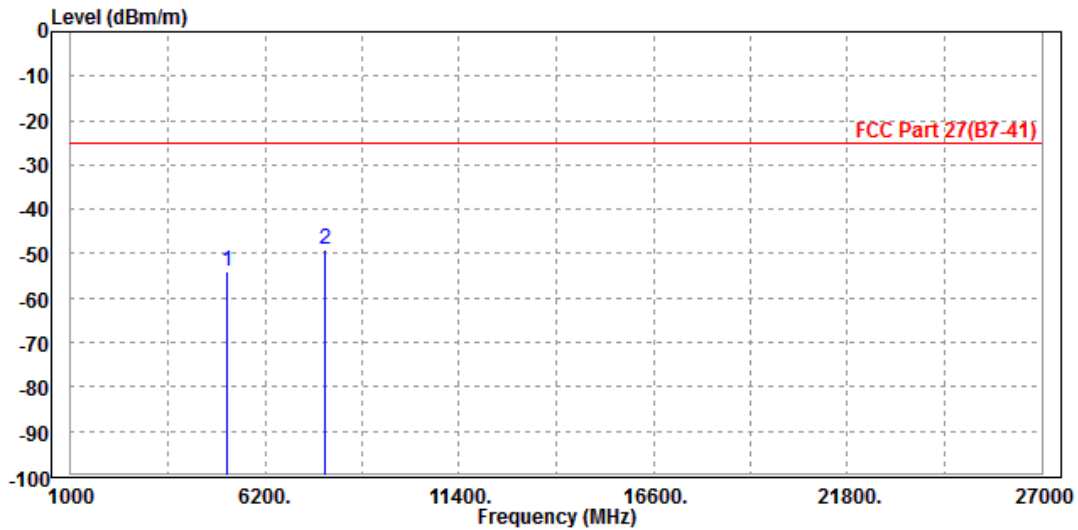




Test Report No.: RF180604W006-6

MODE	TX channel 38000	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5/9V from adapter
TESTED BY	Vincent		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	5186.000	-59.45	-67.43	-25.00	-34.45	7.98	Peak	Vertical
2 PP	7785.000	-49.28	-62.58	-25.00	-24.28	13.30	Peak	Vertical

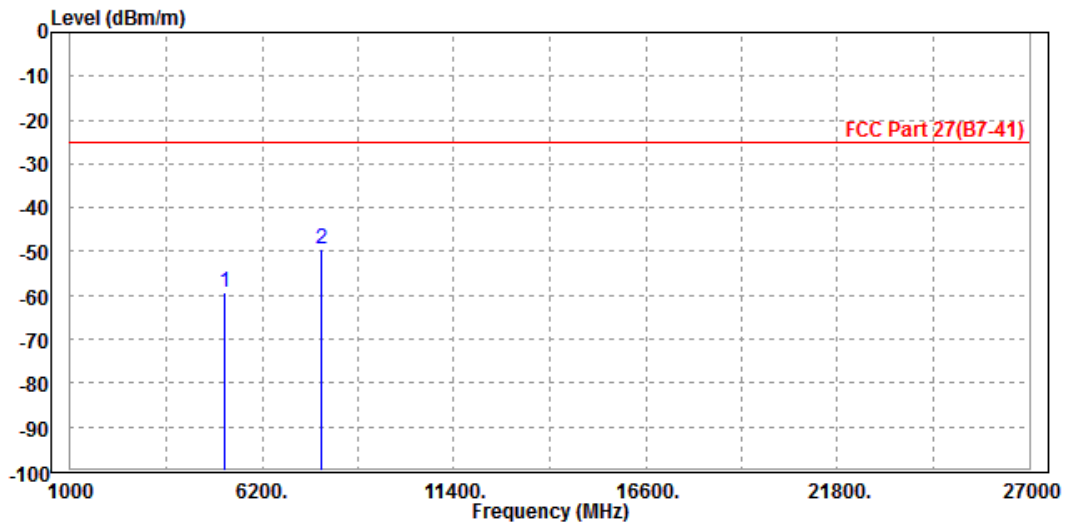



Test Report No.: RF180604W006-6

4 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: customerservice.dg@cn.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



Test Report No.: RF180604W006-6

5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---