

# The Photos of SAR test

# No. I18Z62361-SEM02

#### For

### **HMD Global OY**

Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN GSM

850,900,1800,1900 WCDMA: 1,2,4,5,8 LTE: 1,2, 3,4,5,7,8,12/17,28,38,66

mobile phone, Bluetooth 4.2, WIFI 802.11 b/g/n

Model name: TA-1149

With

Hardware Version: 89571\_1\_12

Software Version: 00XX\_1\_XXX

FCC ID: 2AJOTTA-1149



#### Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

#### **Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: <a href="mailto:cttl\_terminals@caict.ac.cn">cttl\_terminals@caict.ac.cn</a>, website: <a href="mailto:www.caict.ac.cn">www.caict.ac.cn</a>




Picture 1: Constituents of the sample

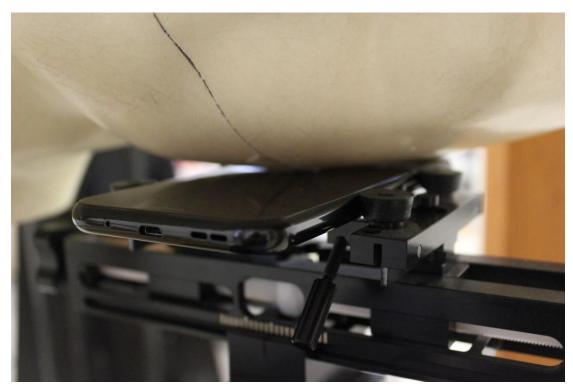


**Picture 2: Left Hand Touch Cheek Position** 



Picture 3: Left Hand Tilt 15° Position

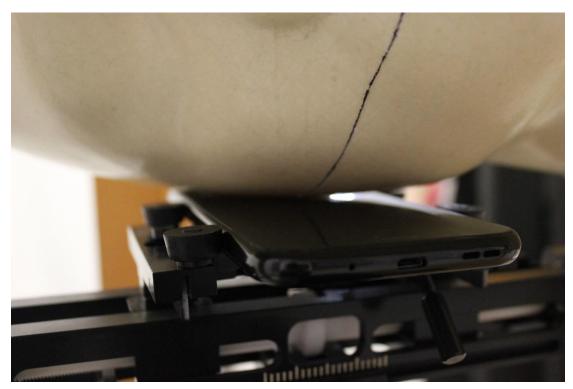

Picture 4: Right Hand Touch Cheek Position

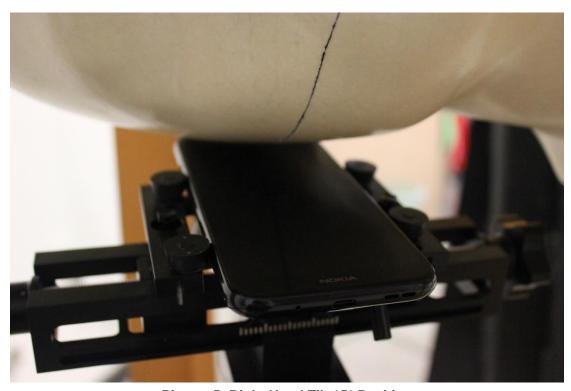


Picture 5: Right Hand Tilt 15° Position

## **Test positions for body:**

The Body SAR is tested at the following 6 test positions all with the distance =10mm or 15mm between the EUT and the phantom bottom:



Picture 6: Front with 10mm

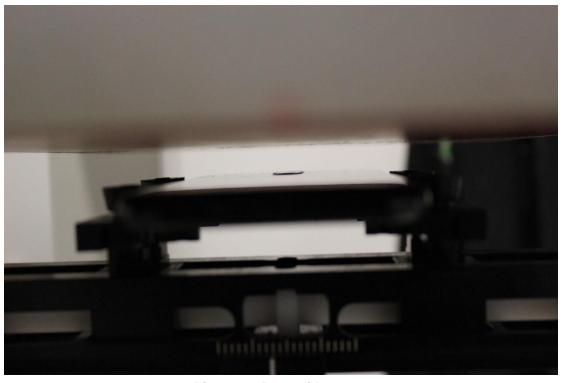


Picture 7: Rear with 10mm



Picture 8: Left with 10mm



Picture 9: Right with 10mm

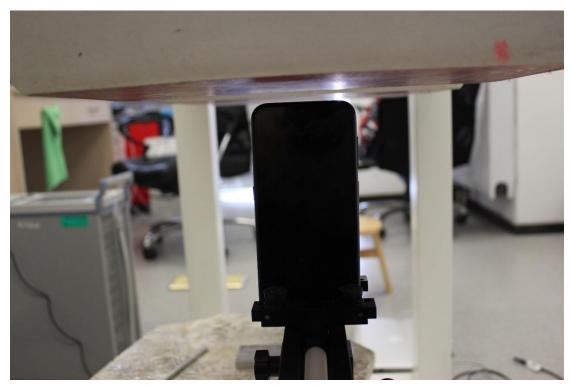

Picture 10: Top with 10mm



Picture 11: Bottom with 10mm



Picture 12: Rear with 15mm



Picture 13: Bottom with 15mm