

SAR TEST REPORT

No. I20Z60929-SEM03

For

HMD Global Oy

Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN

Model Name: TA-1270

With

Hardware Version: 99651_1_10

Software Version: 00WW_0_070

FCC ID: 2AJOTTA-1270

Issued Date: 2020-7-3

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

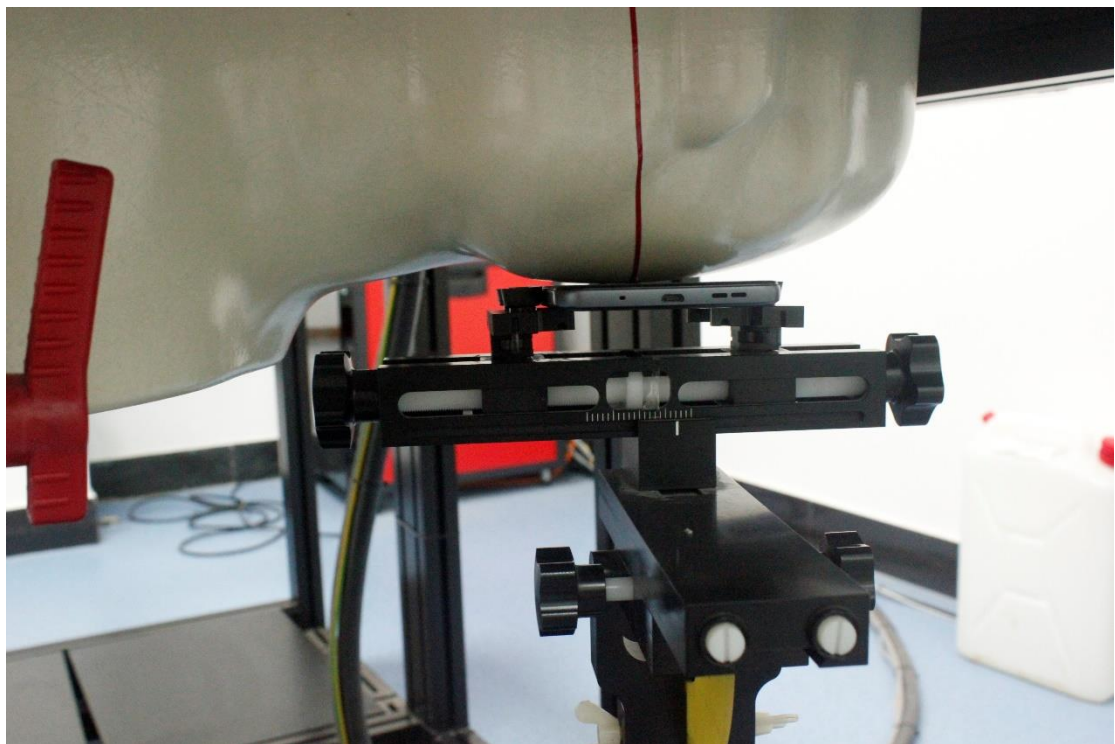


Picture 2: Left Head Touch Cheek Position

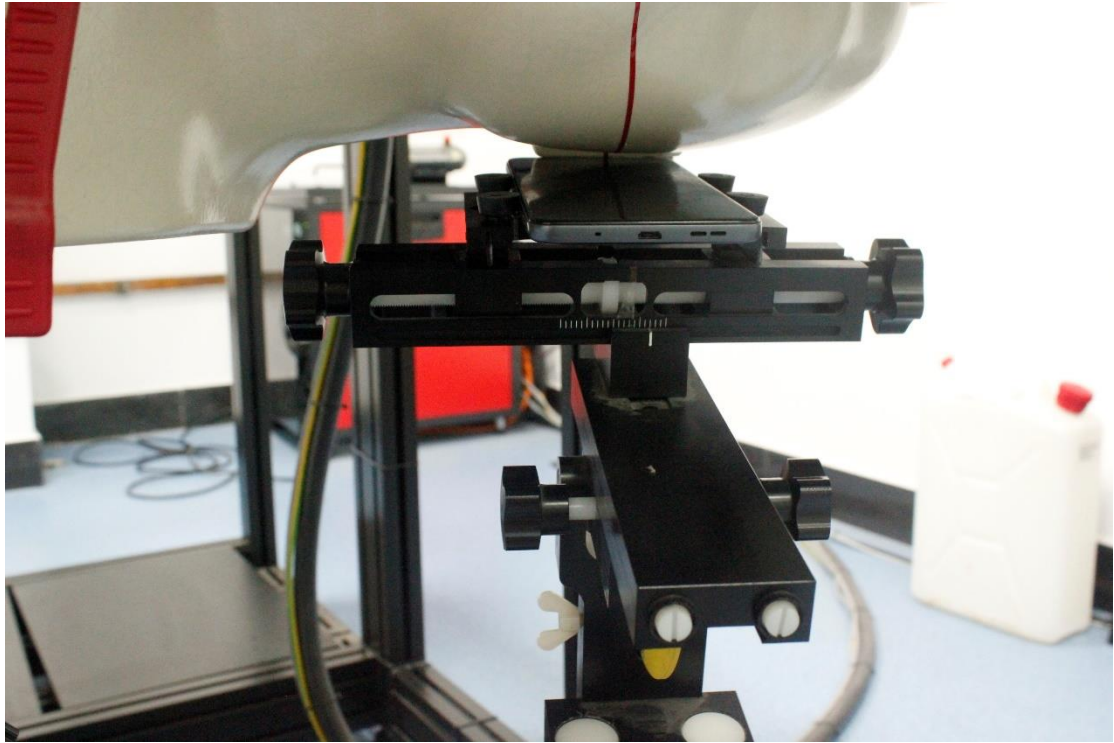

Picture 3: Left Head Tilt 15° Position

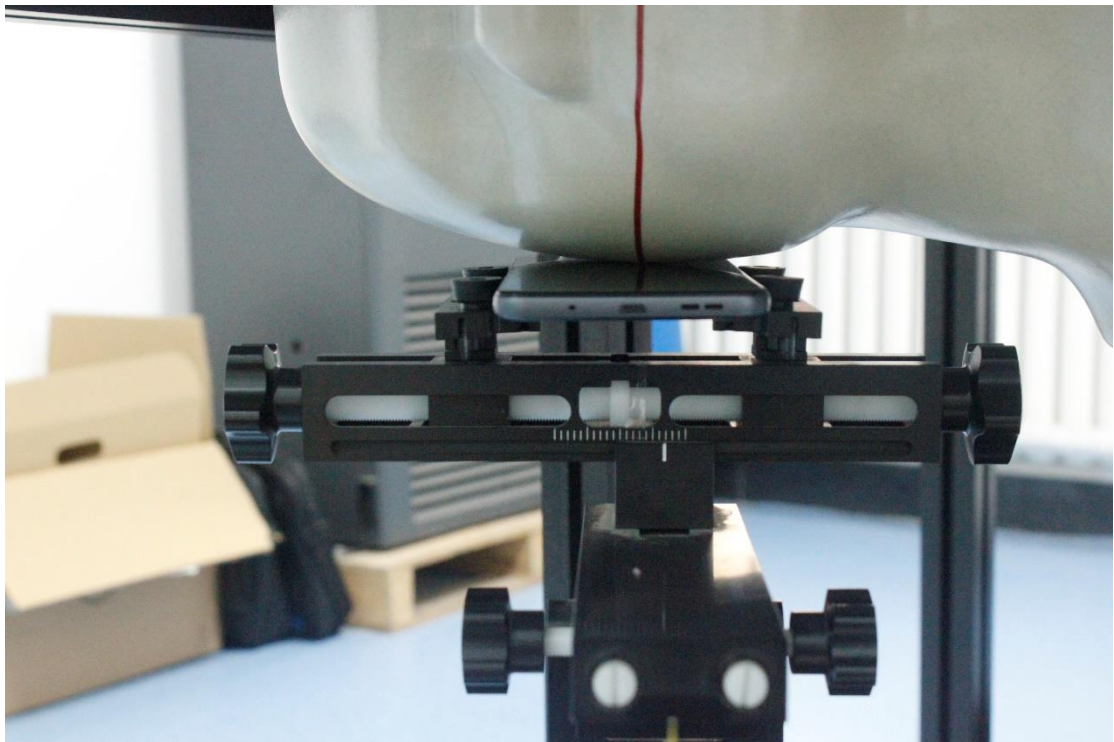


Picture 4: Right Head Touch Cheek Position

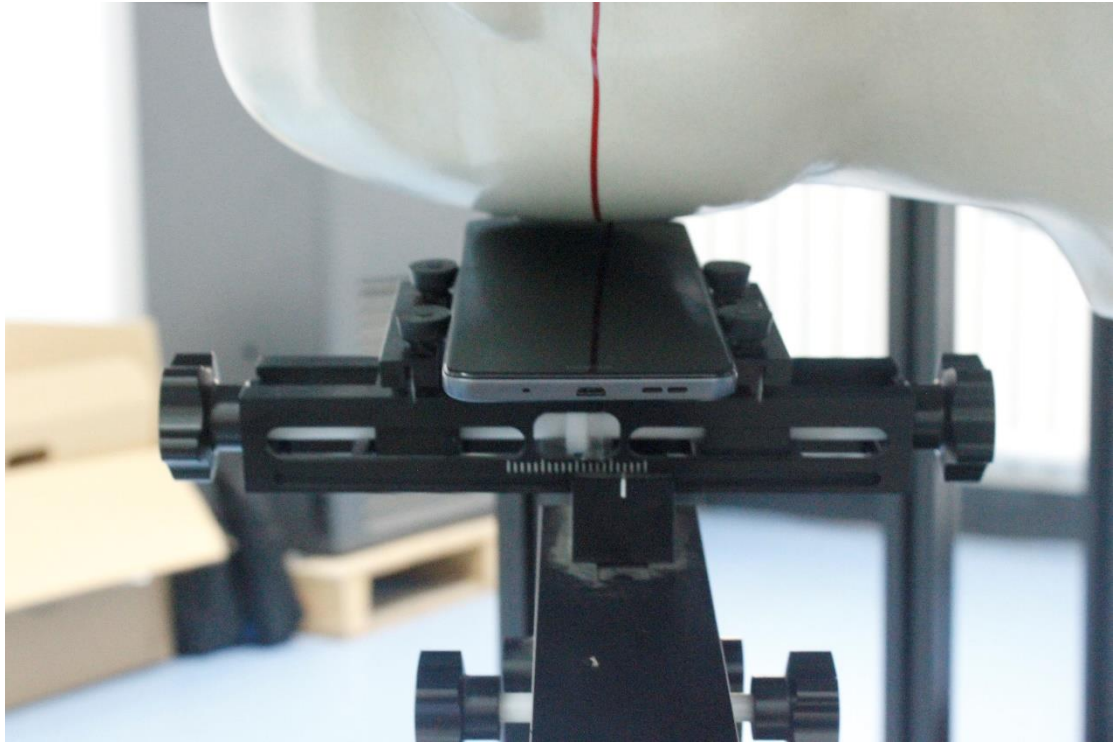


Picture 5: Right Head Tilt 15° Position

Test positions for body:

The Body SAR is tested at the following 5 test positions, with the distance 10mm /20mm between the EUT and the phantom bottom:

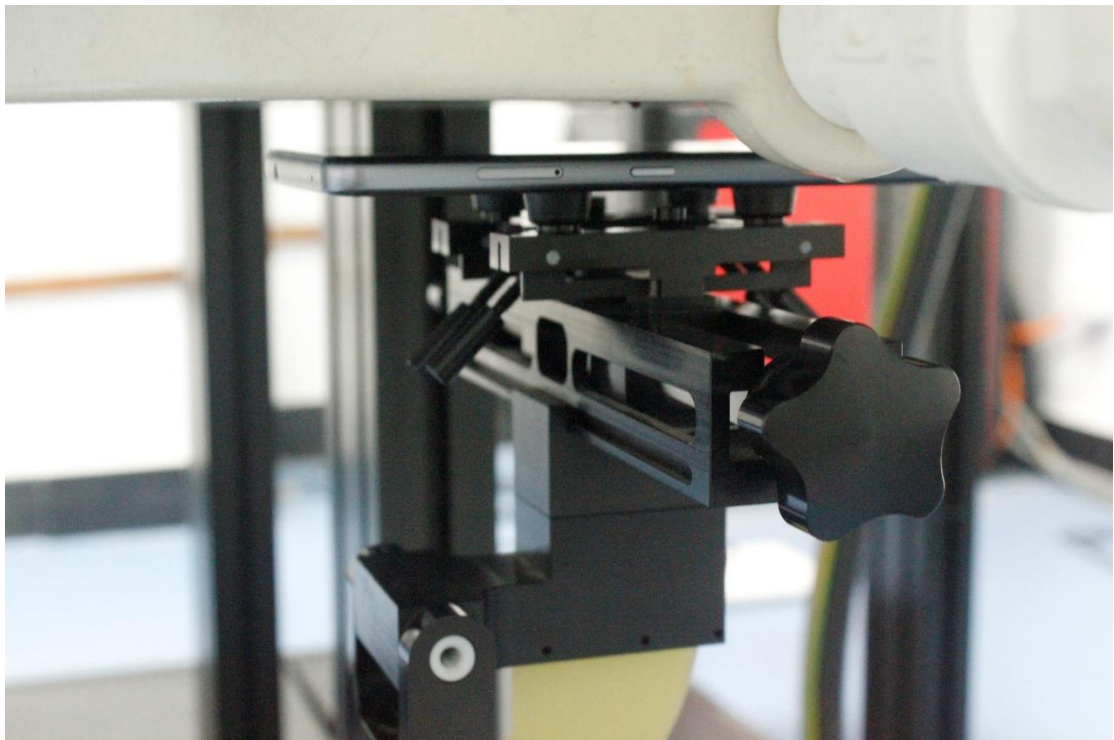

Picture 6: Front 10mm

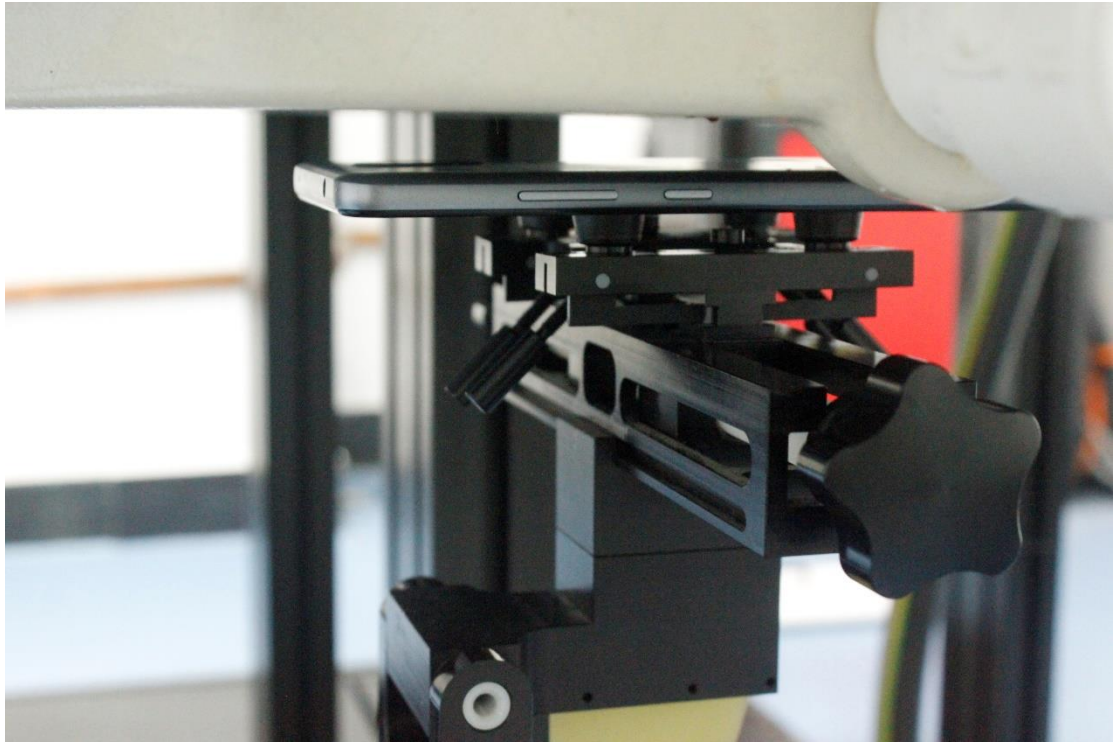

Picture 7: Rear 10mm



Picture 8: Left 10mm



Picture 9: Right 10mm




Picture 10: Bottom 10mm



Picture 11: Top 10mm



Picture 12: Bottom 20mm

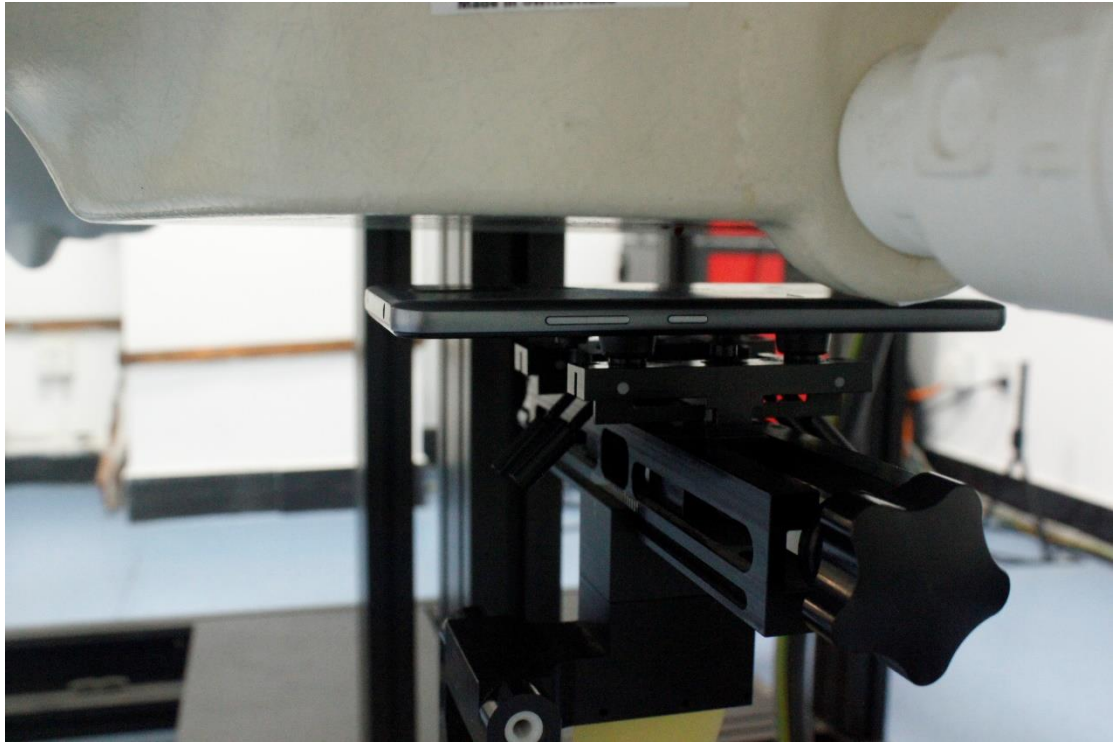

Picture 13: Rear 20mm



Picture 14: Bottom (Headset) 10mm