



No. I20Z60989-SEM03

For

HMD Global Oy

Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN

Model name: TA-1274

With

Hardware Version: 99651_1_10

Software Version: 00WW_0_070

FCC ID: 2AJOTTA-1274

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

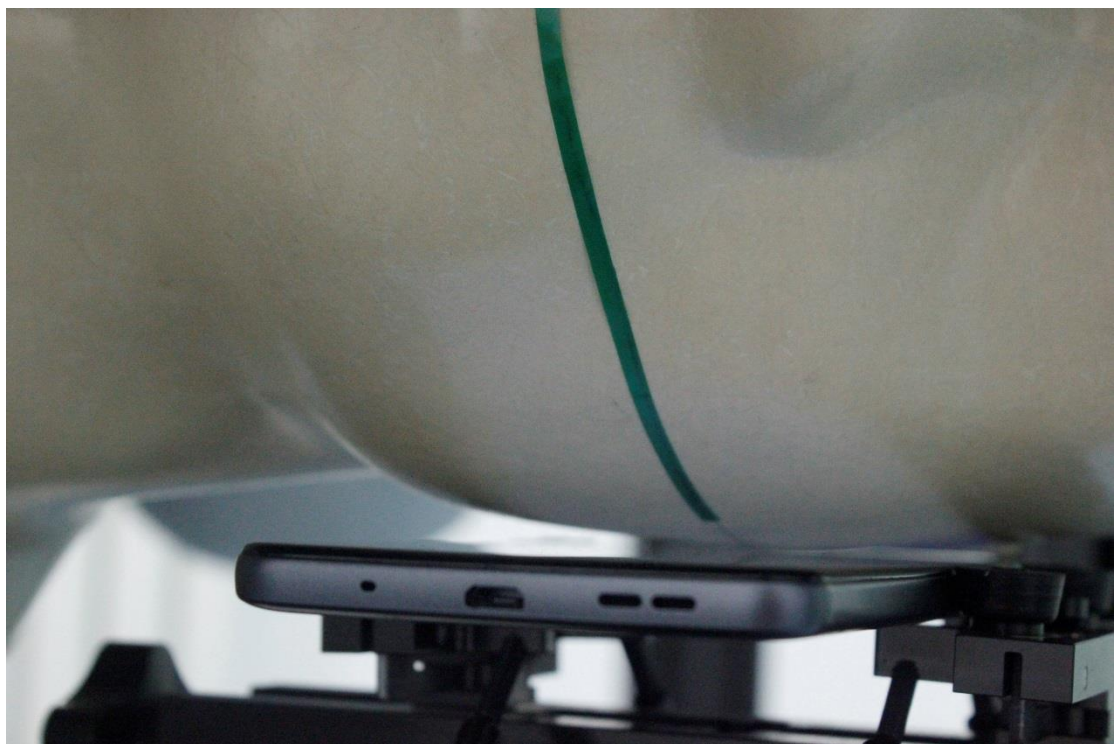

Picture 2: Left Head Touch Cheek Position

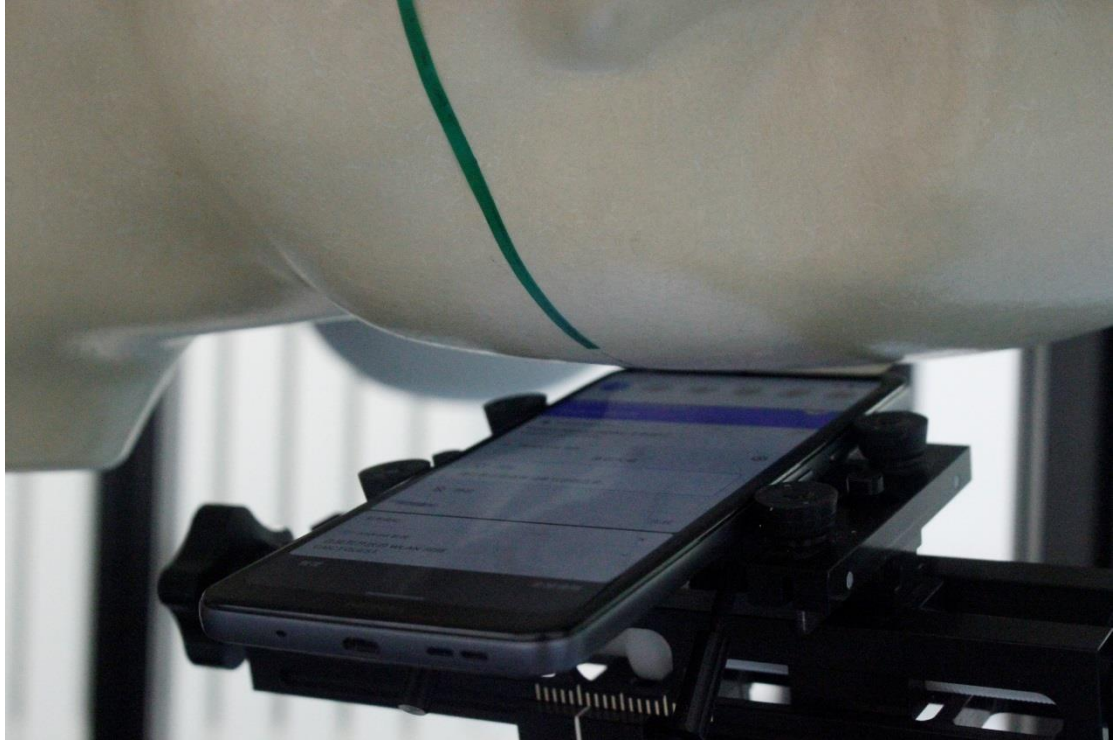

Picture 3: Left Head Tilt 15° Position

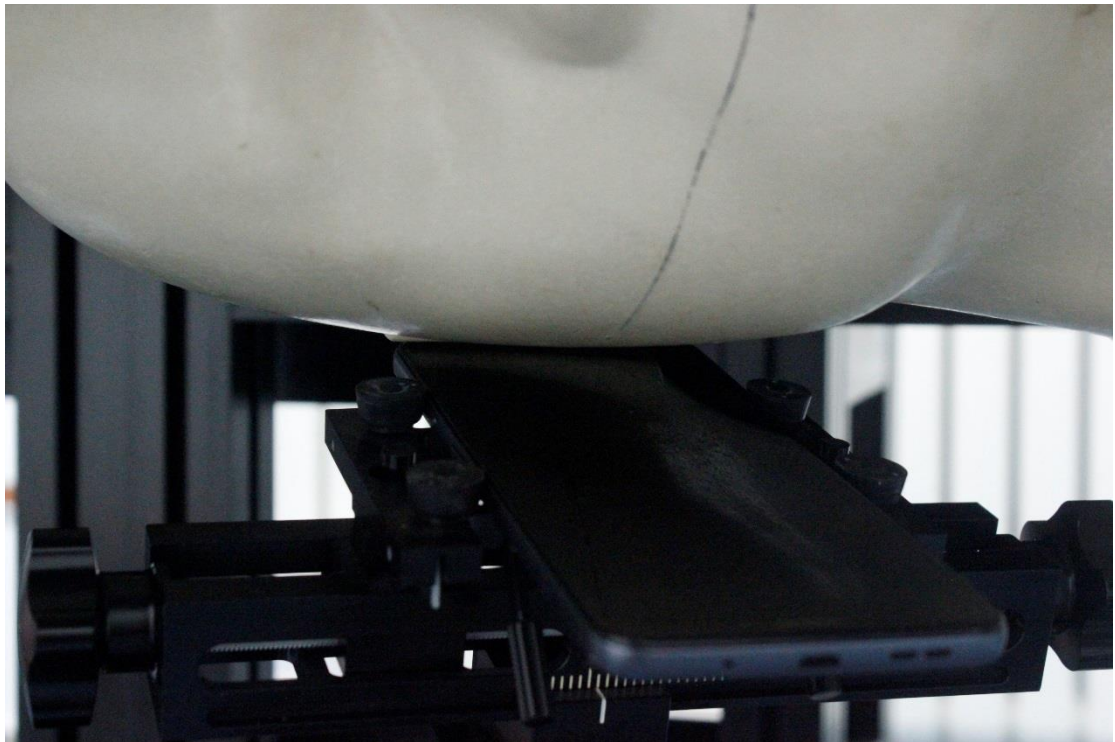


Picture 4: Right Head Touch Cheek Position




Picture 5: Right Head Tilt 15° Position

Test positions for body:

The Body SAR is tested at the following 6 test positions all with the distance =20mm/10mm between the EUT and the phantom bottom:

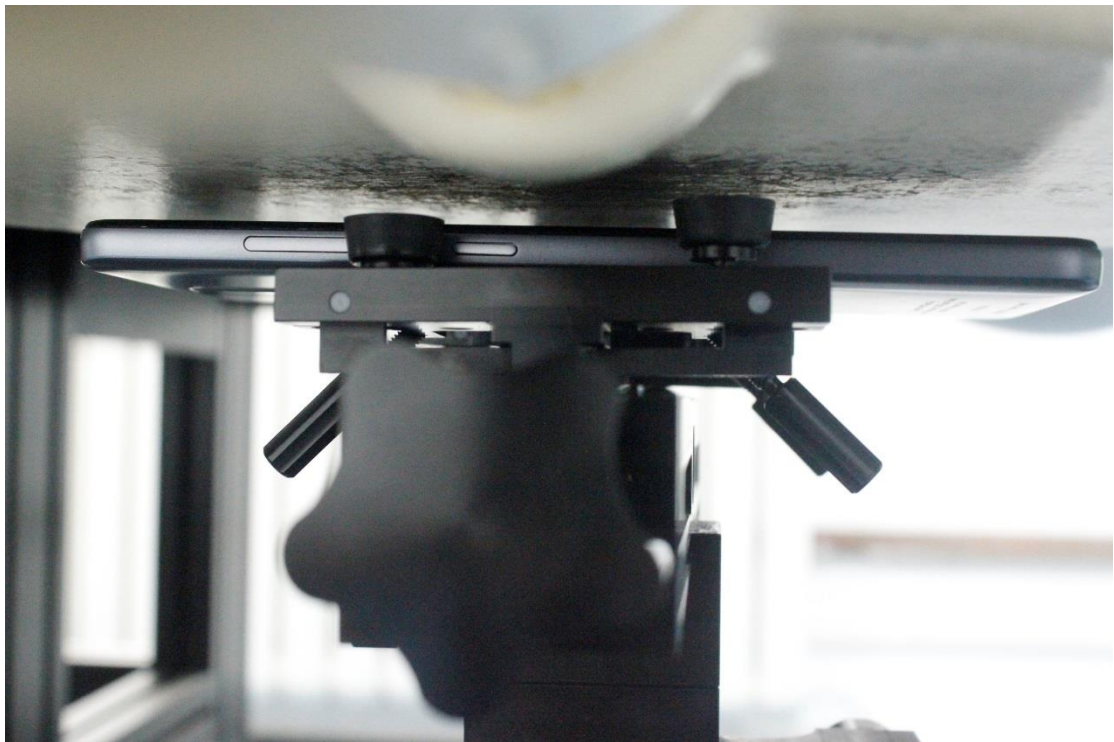

Picture 6: Front 10mm

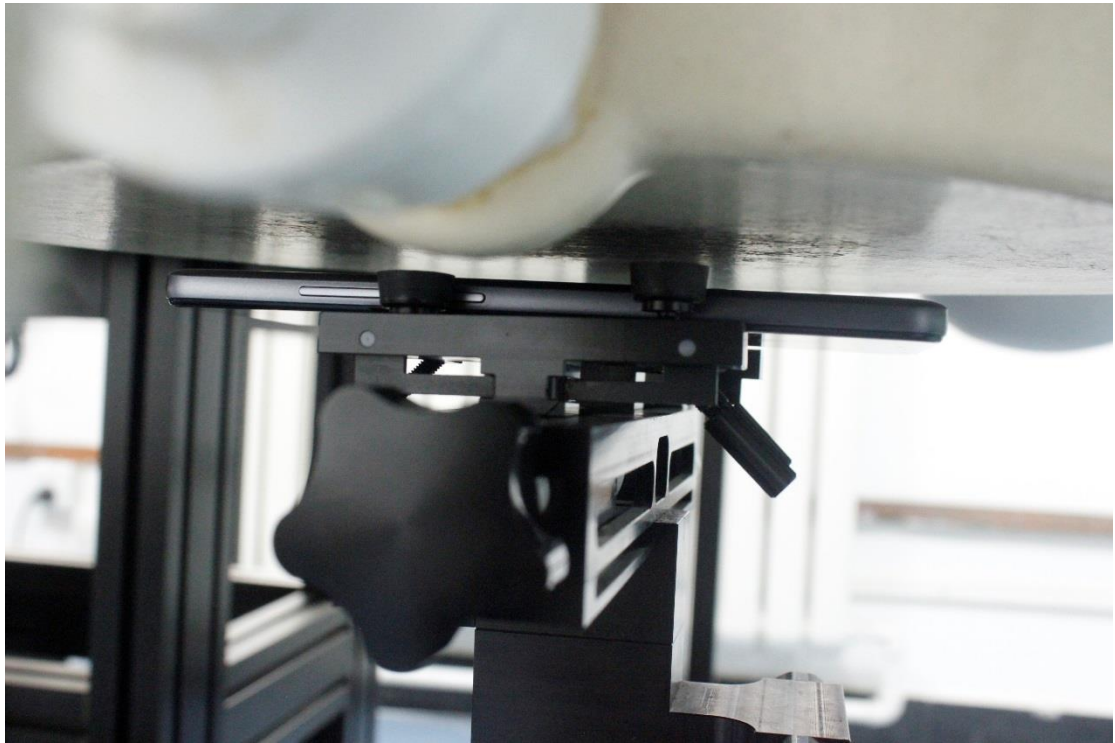

Picture 7: Rear 10mm



Picture 8: Bottom 10mm




Picture 9: Left 10mm




Picture 10: Right 10mm




Picture 11: Bottom 20mm

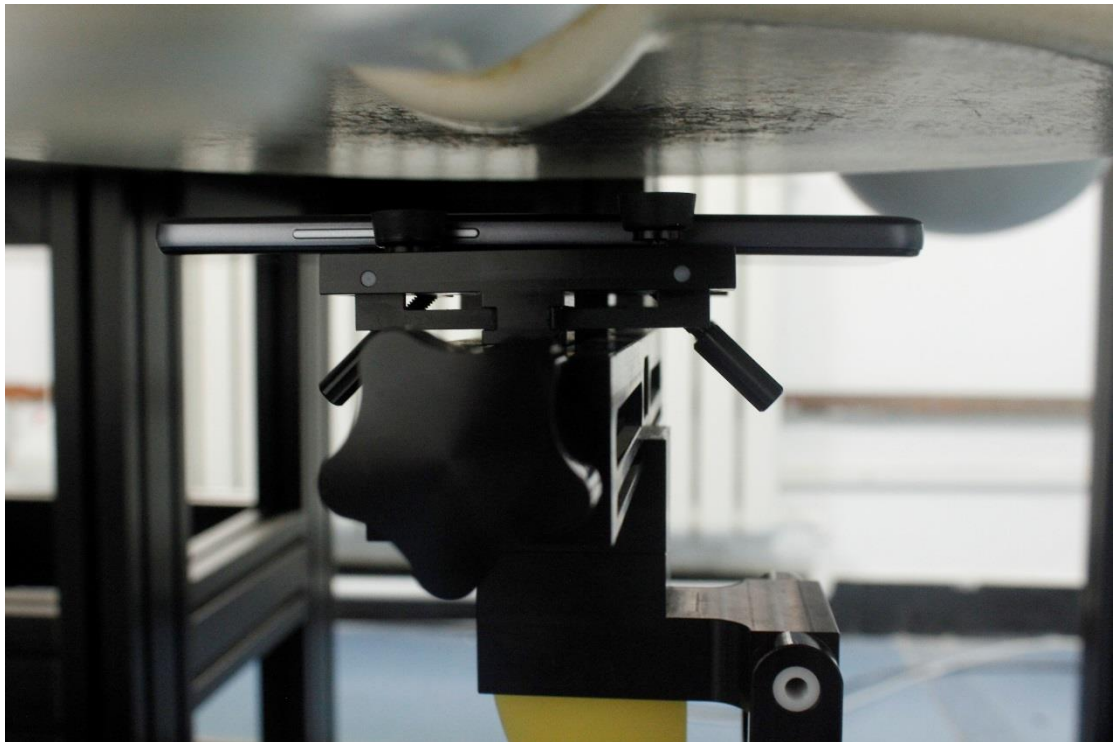

Picture 12: Rear 20mm

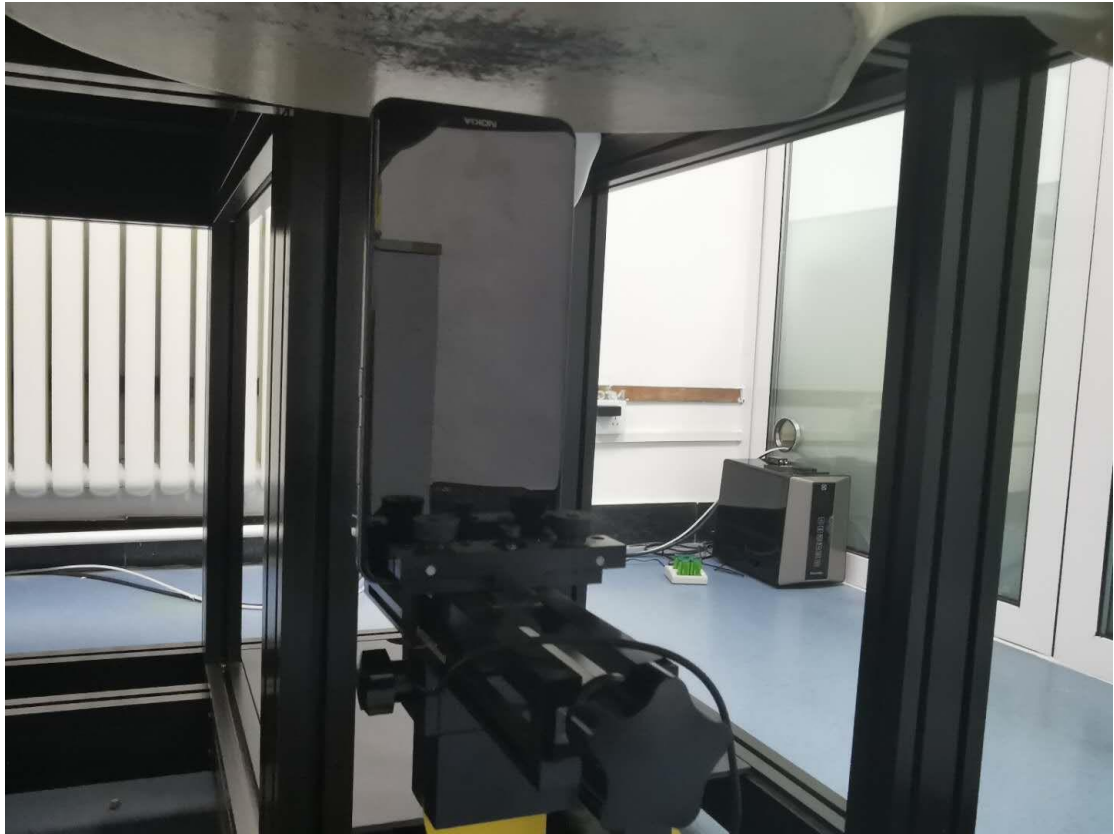

Picture 13: Bottom 10mm with headset

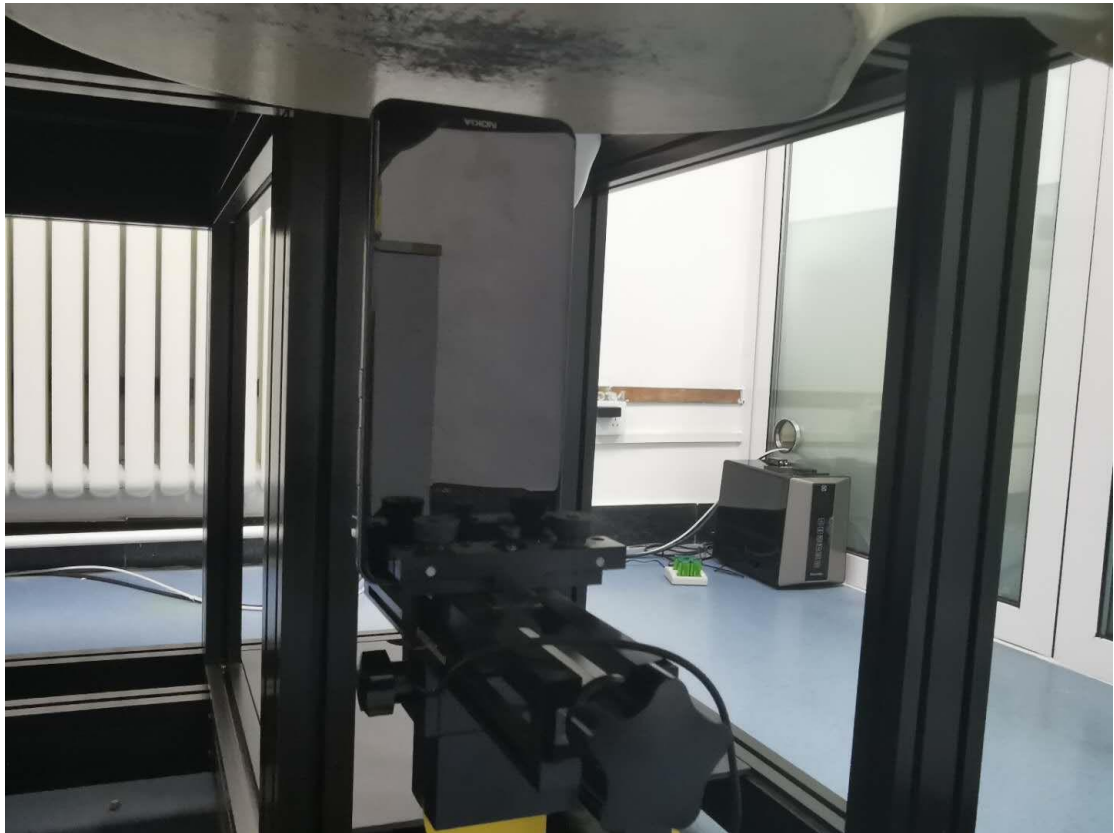

Picture 14: Bottom 20mm with headset