

Fig.A.6.1.25 Transmitter Spurious Emission - Conducted (802.11g, Ch1, Center Frequency)

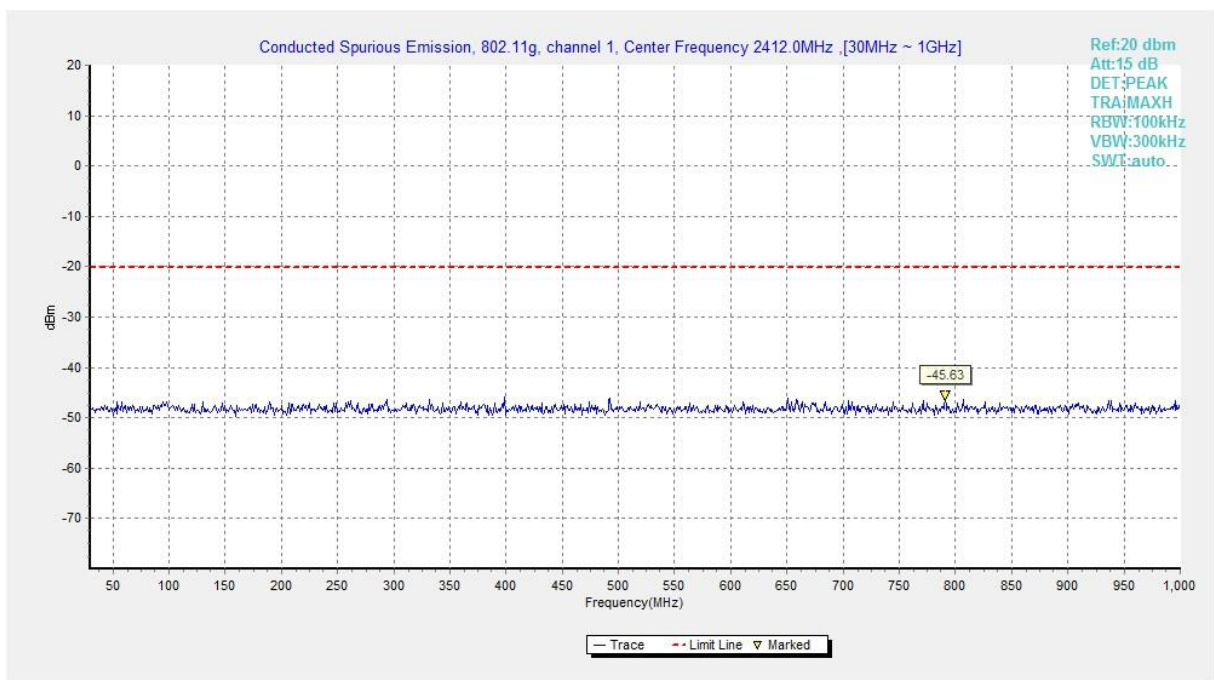


Fig.A.6.1.26 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 30 MHz-1 GHz)

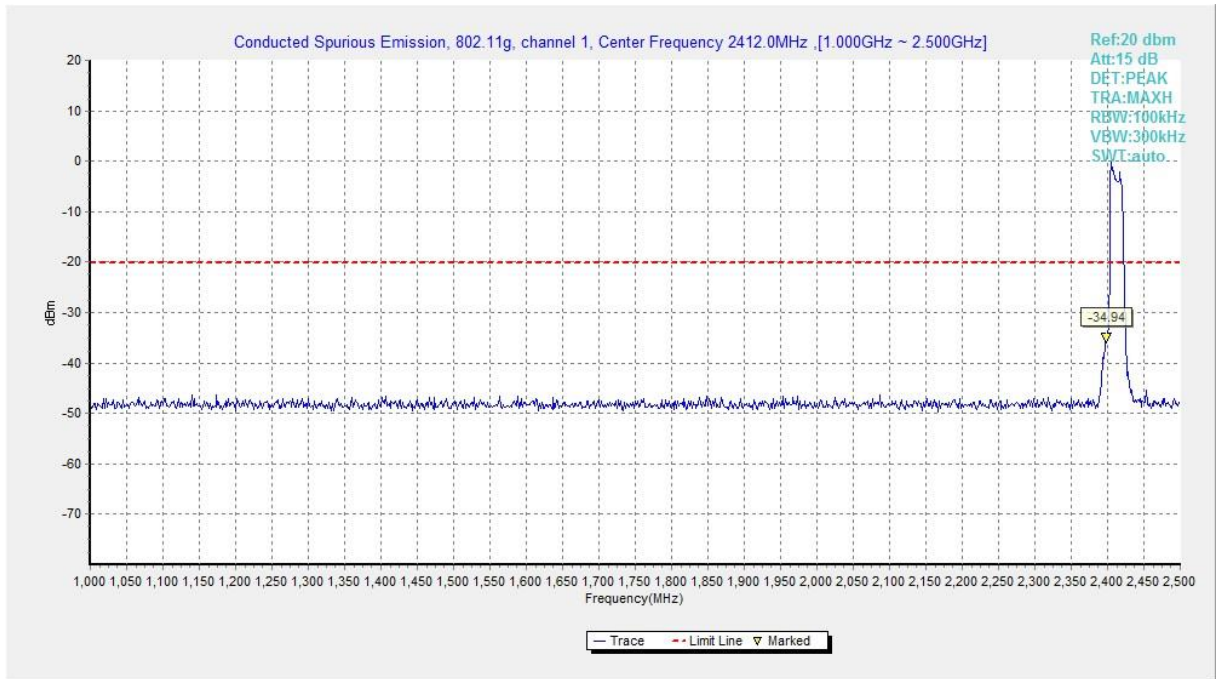


Fig.A.6.1.27 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 1 GHz-2.5 GHz)

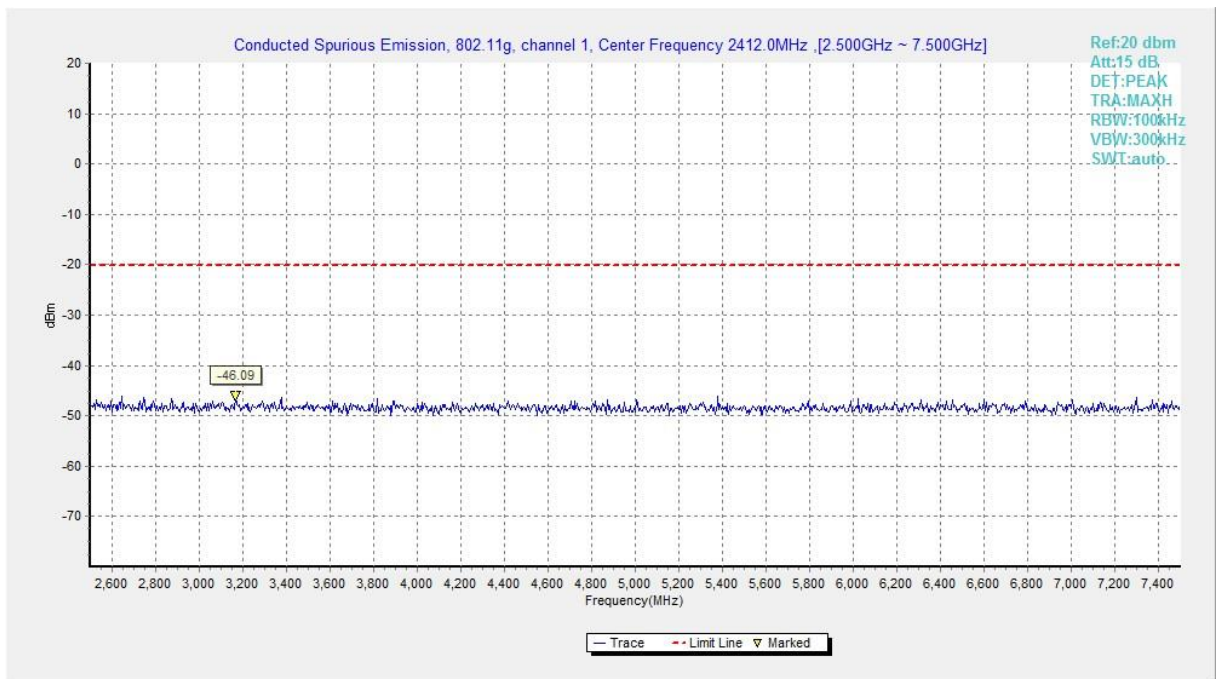


Fig.A.6.1.28 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 2.5 GHz-7.5 GHz)

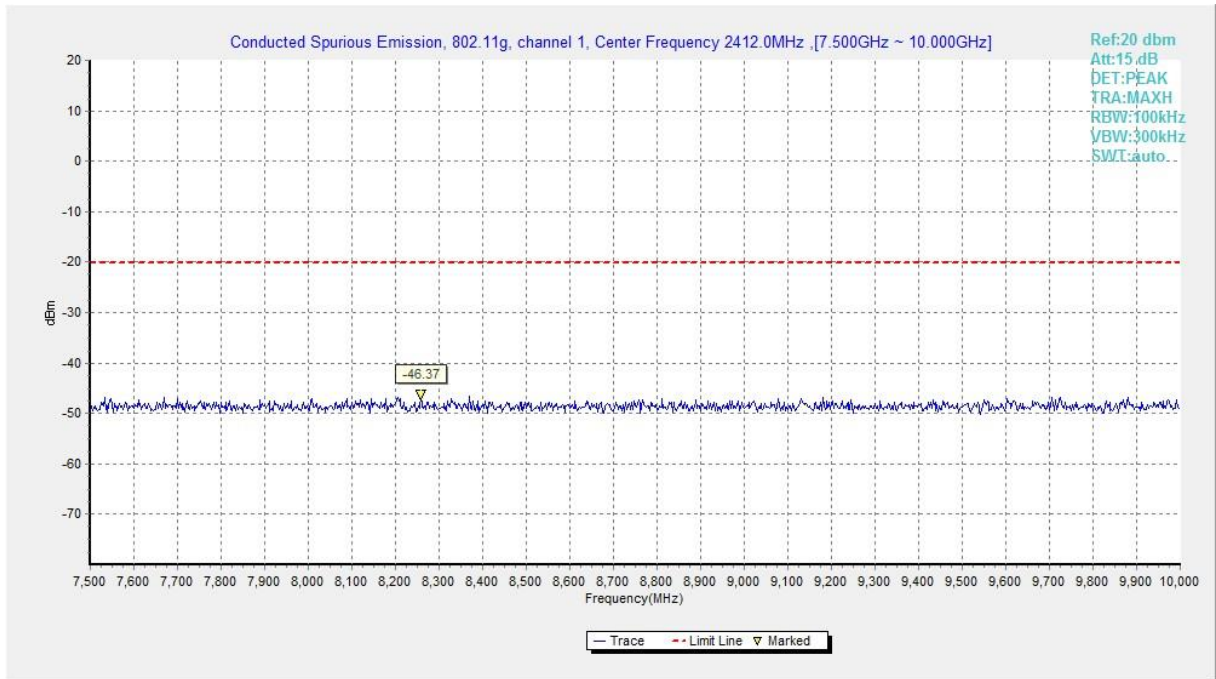


Fig.A.6.1.29 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 7.5 GHz-10 GHz)

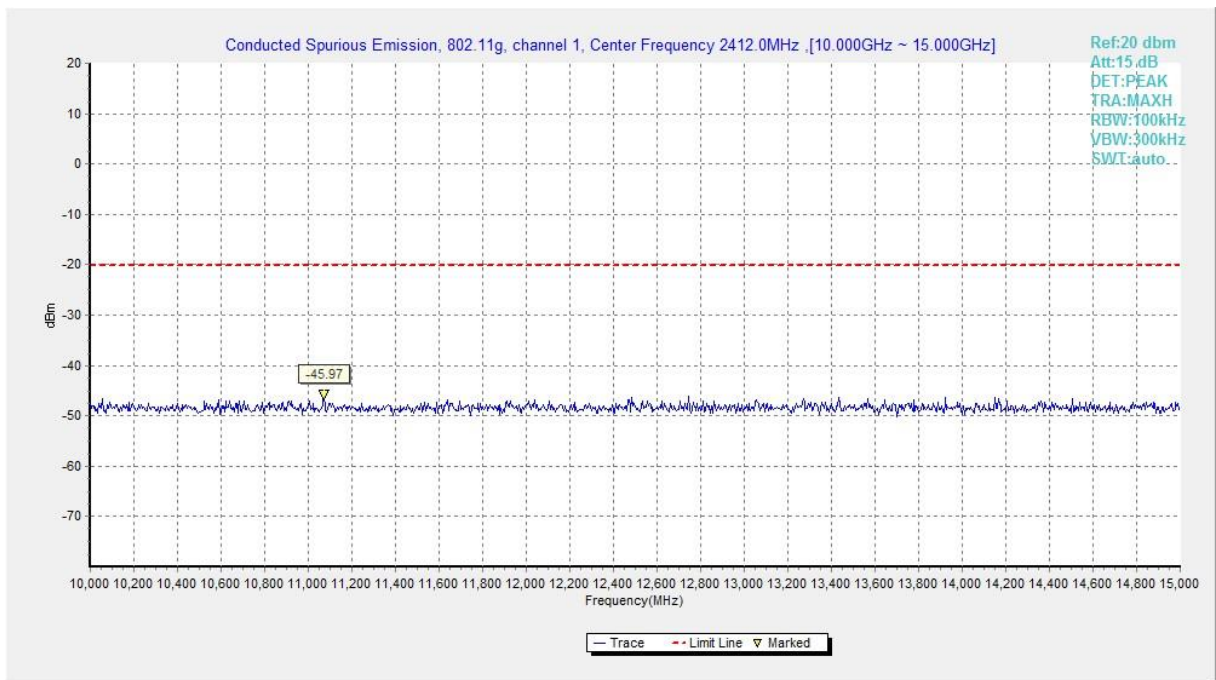


Fig.A.6.1.30 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 10 GHz-15 GHz)

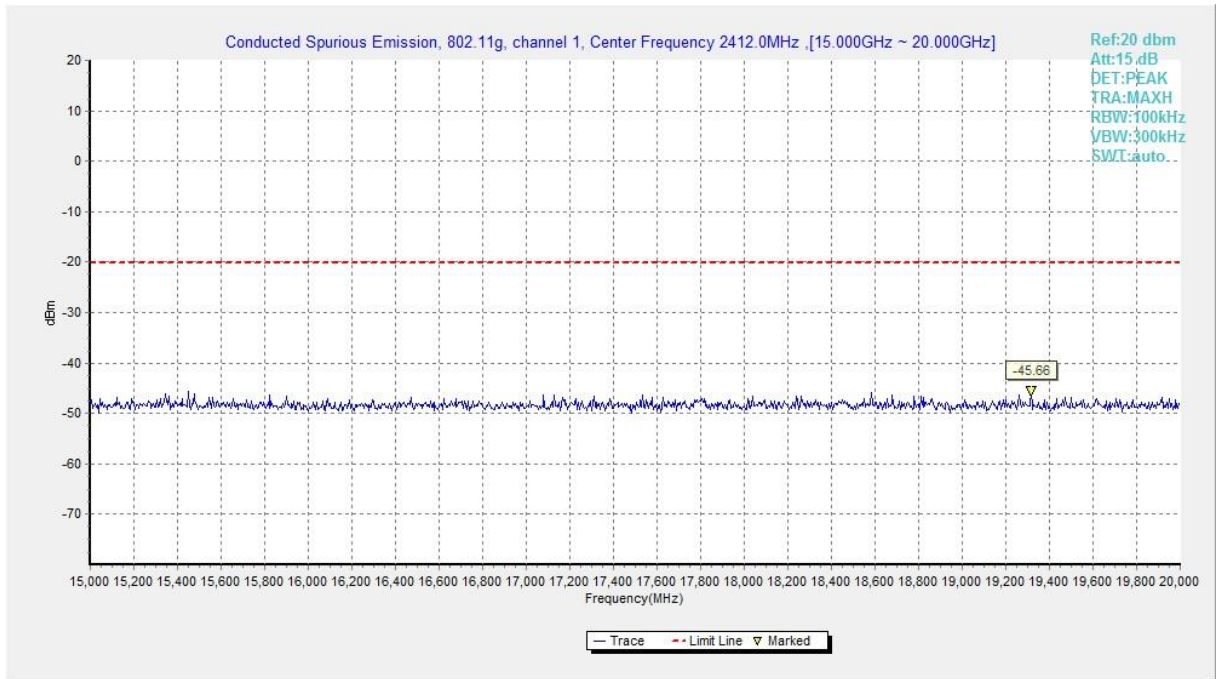


Fig.A.6.1.31 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 15 GHz-20 GHz)

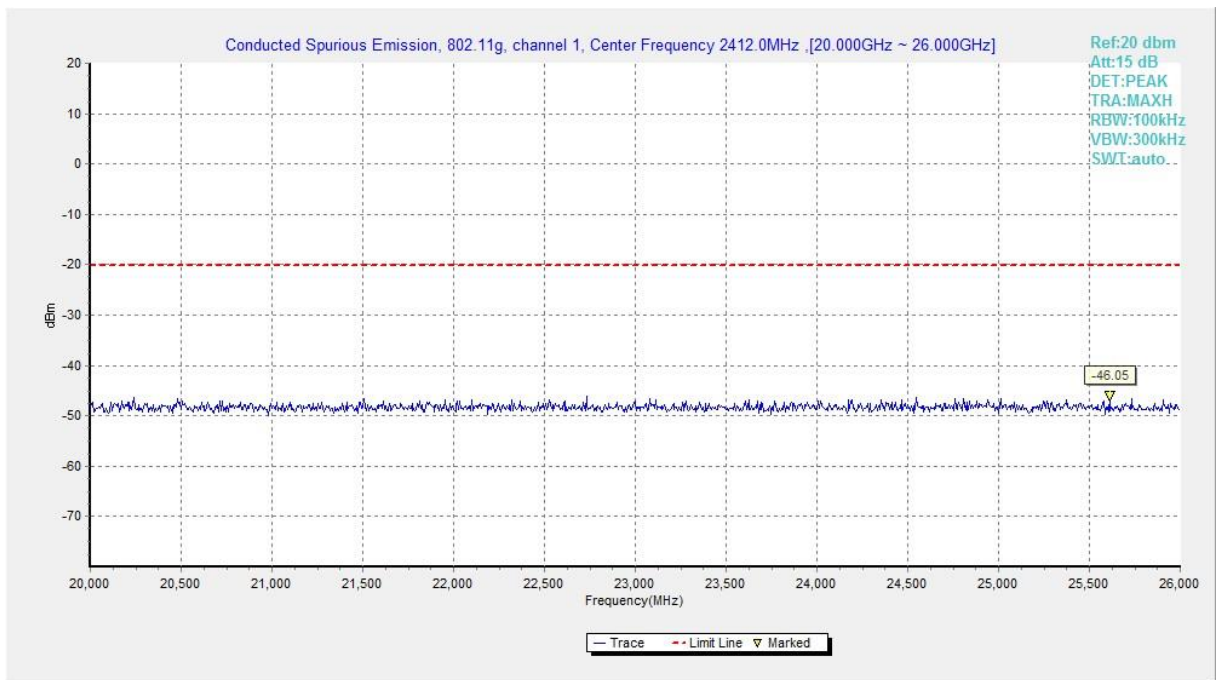


Fig.A.6.1.32 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 20 GHz-26 GHz)

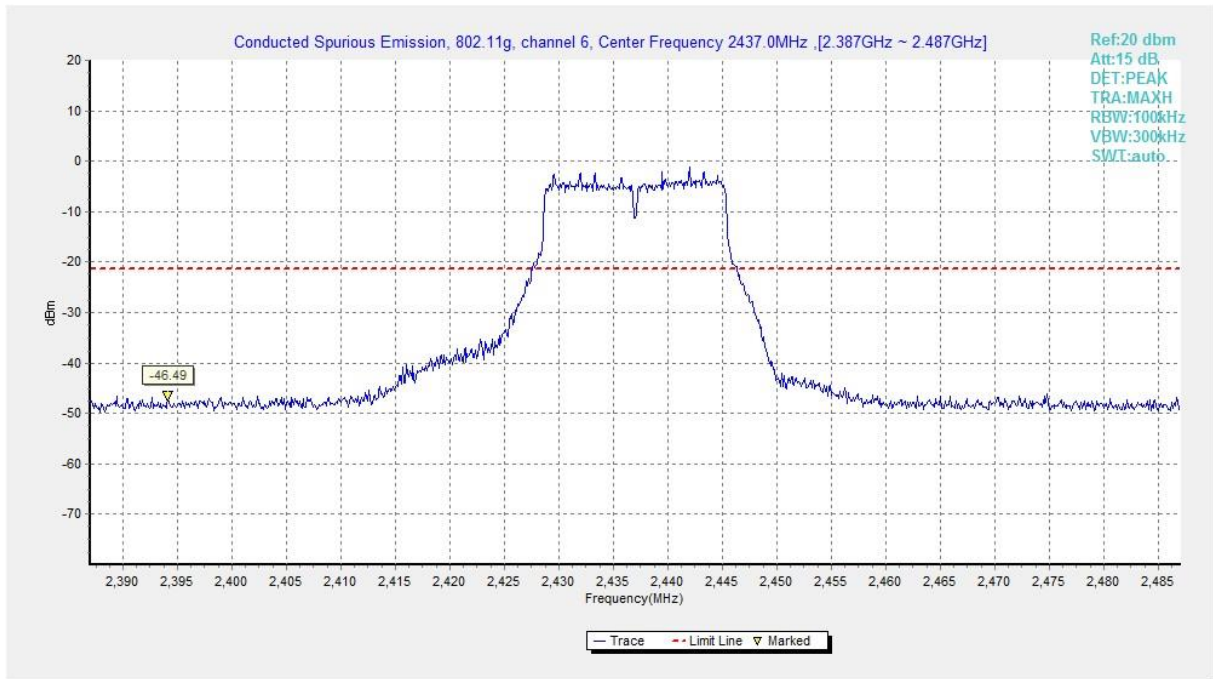


Fig.A.6.1.33 Transmitter Spurious Emission - Conducted (802.11g, Ch6, Center Frequency)

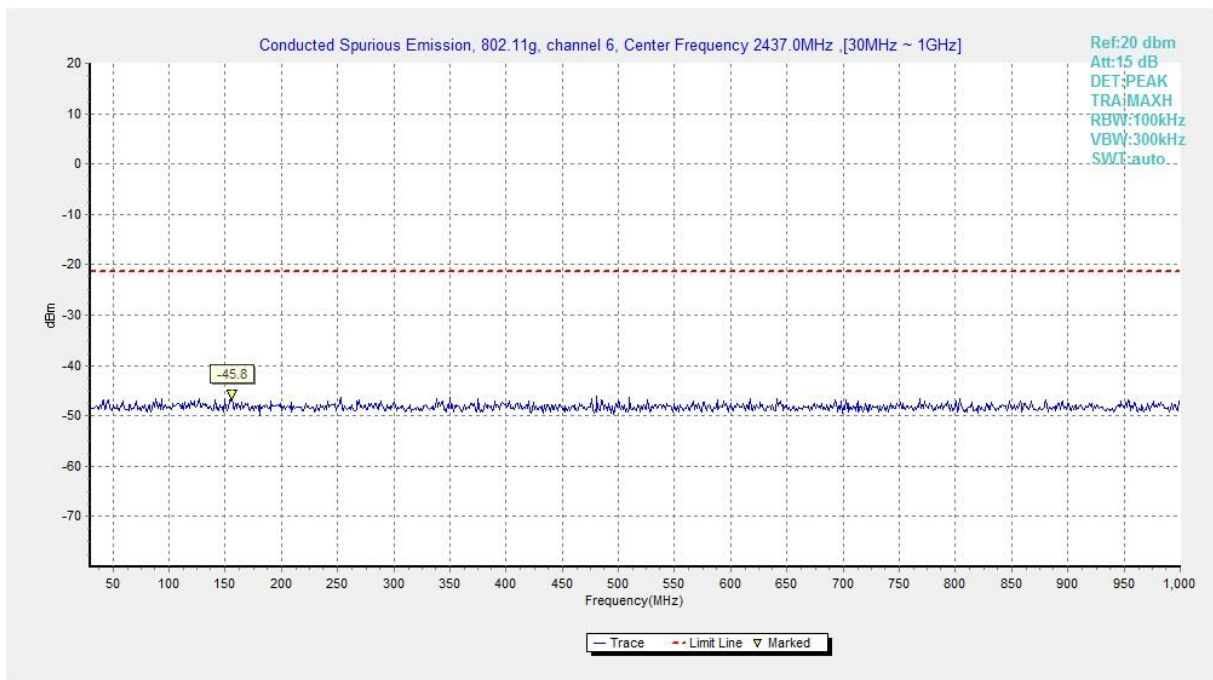


Fig.A.6.1.34 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 30 MHz-1 GHz)

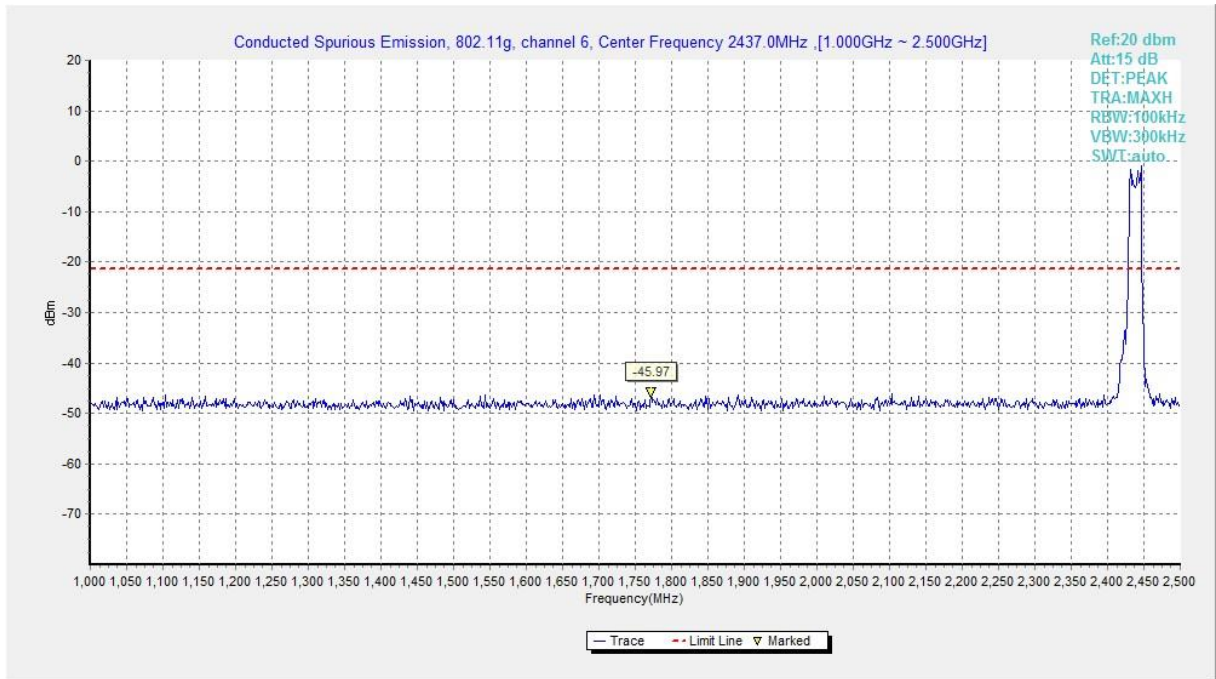


Fig.A.6.1.35 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 1 GHz-2.5 GHz)

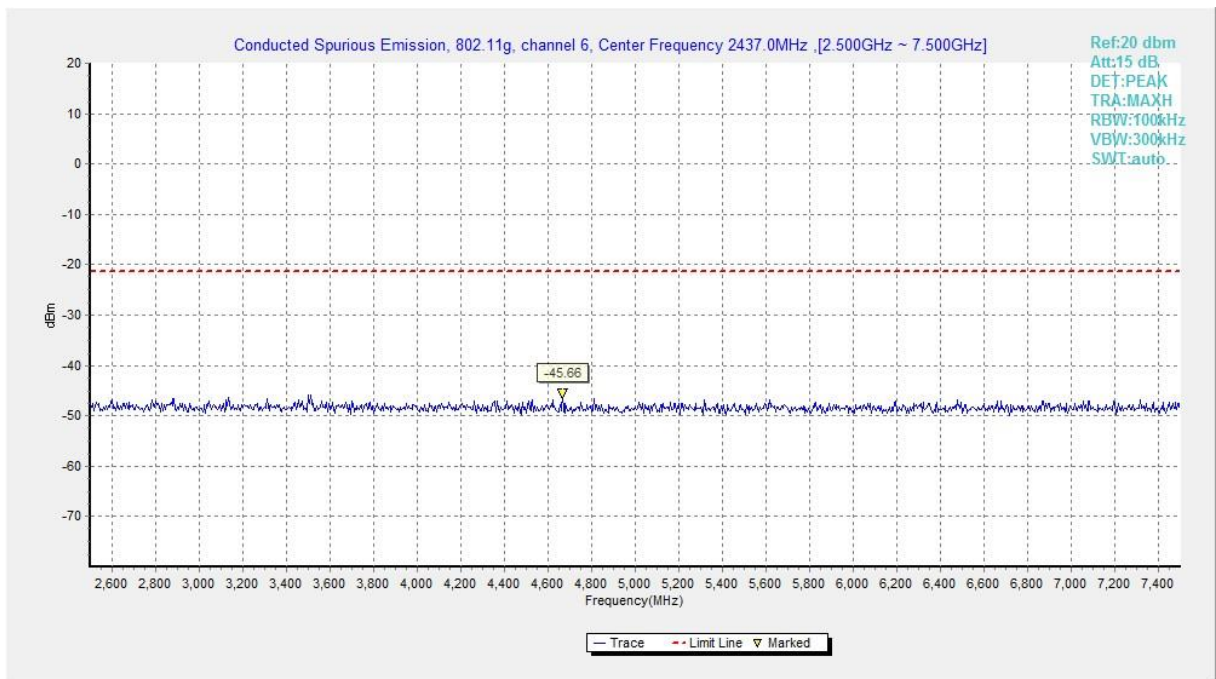


Fig.A.6.1.36 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 2.5 GHz-7.5 GHz)

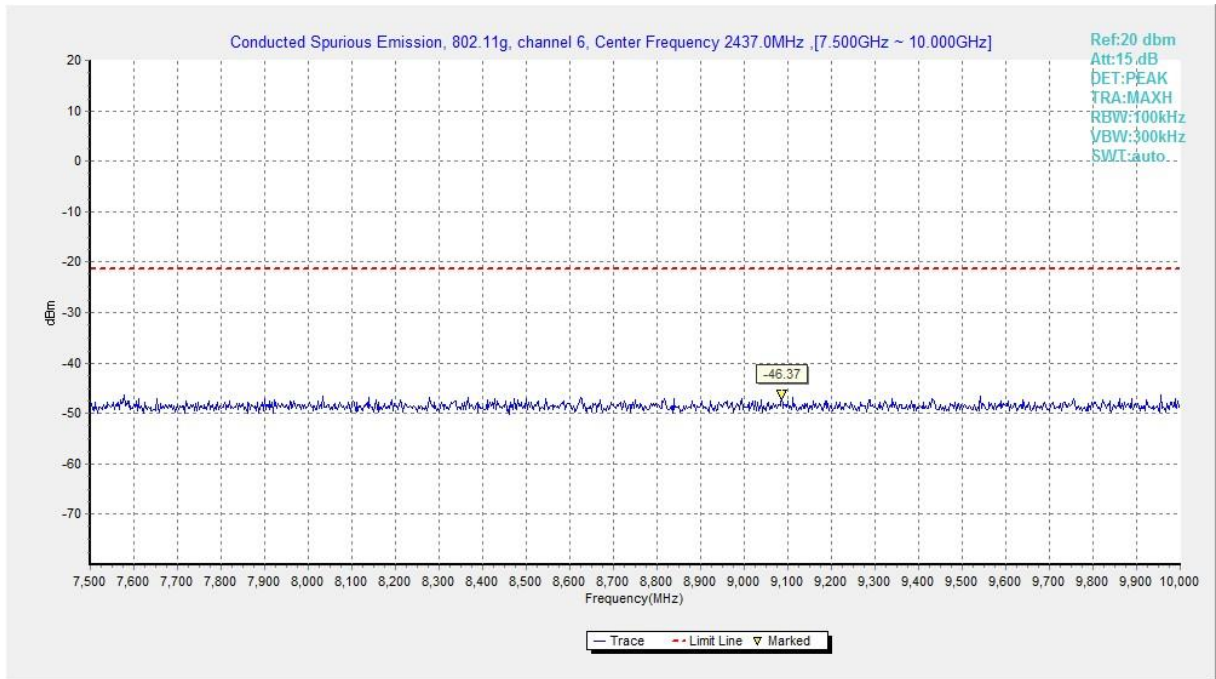


Fig.A.6.1.37 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 7.5 GHz-10 GHz)

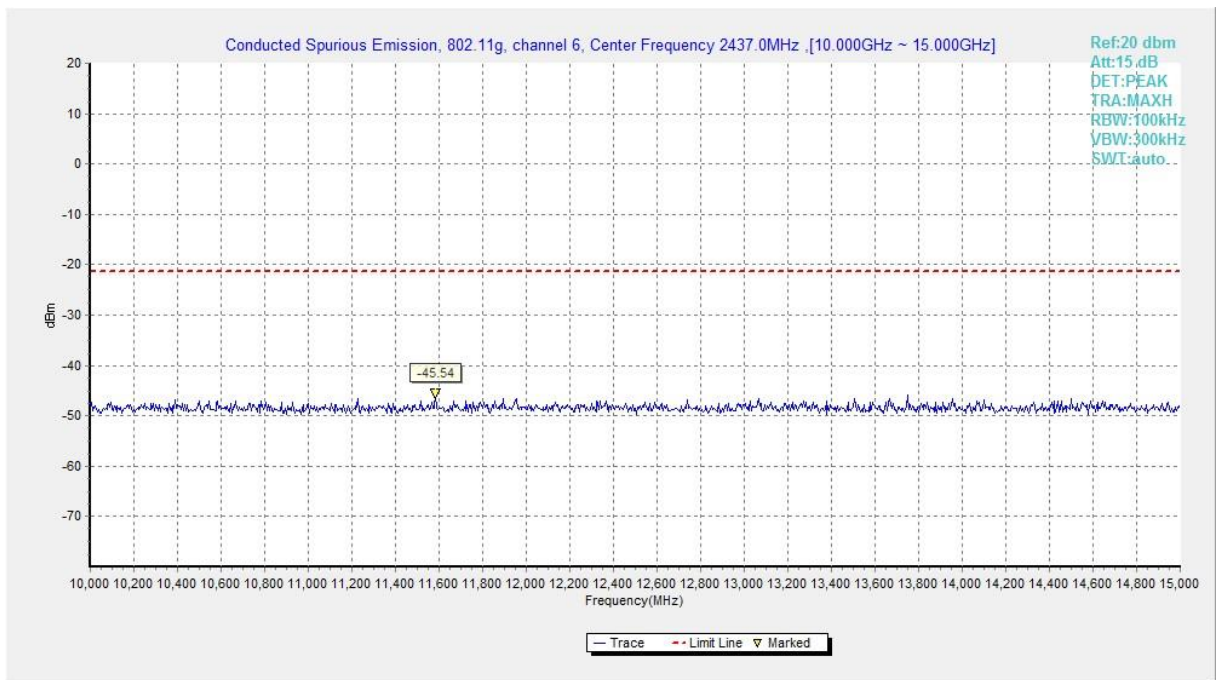


Fig.A.6.1.38 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 10 GHz-15 GHz)

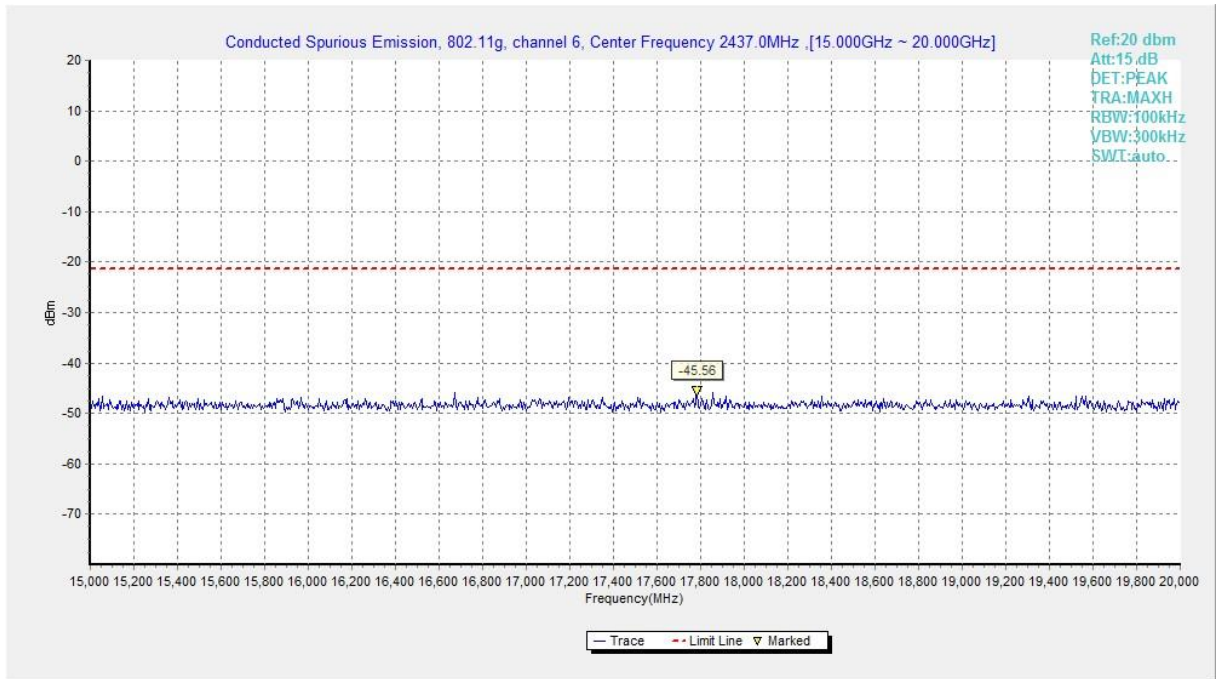


Fig.A.6.1.39 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 15 GHz-20 GHz)

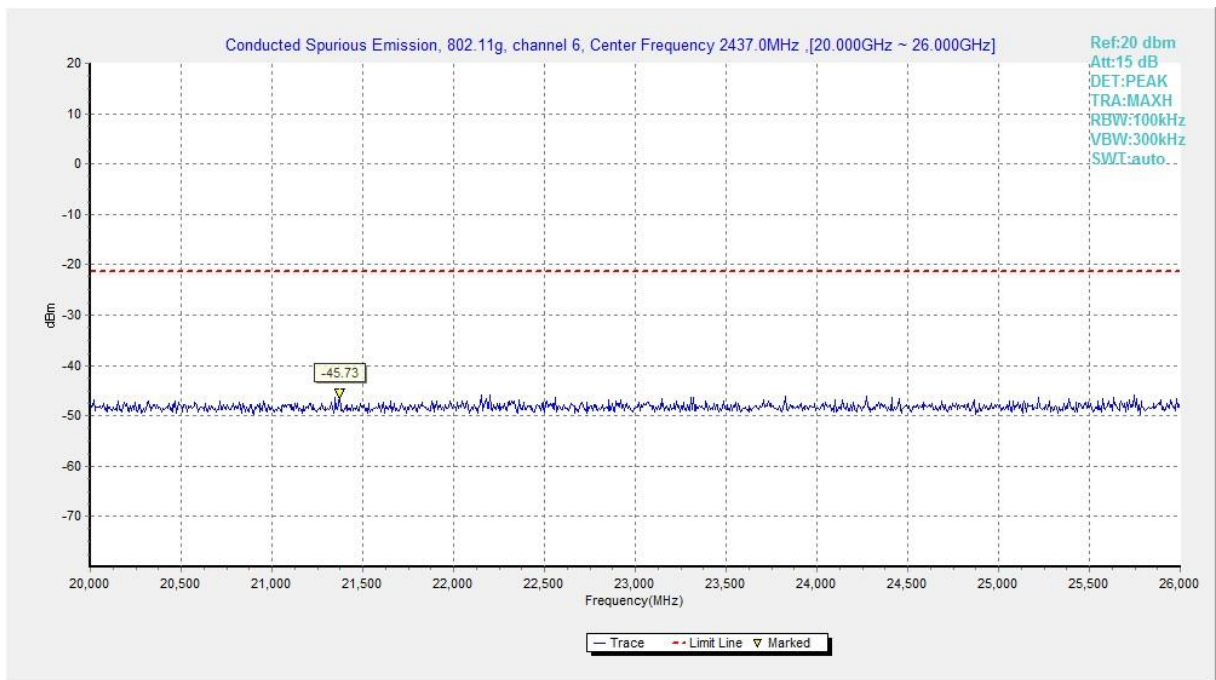


Fig.A.6.1.40 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 20 GHz-26 GHz)

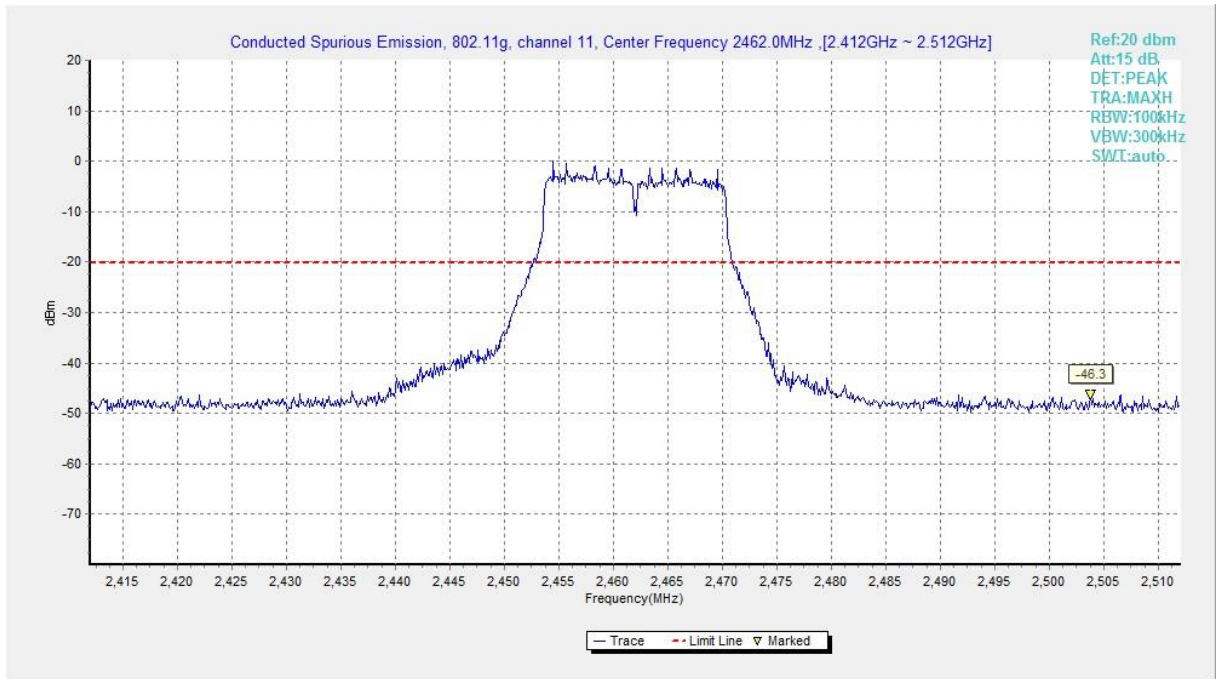


Fig.A.6.1.41 Transmitter Spurious Emission - Conducted (802.11g, Ch11, Center Frequency)

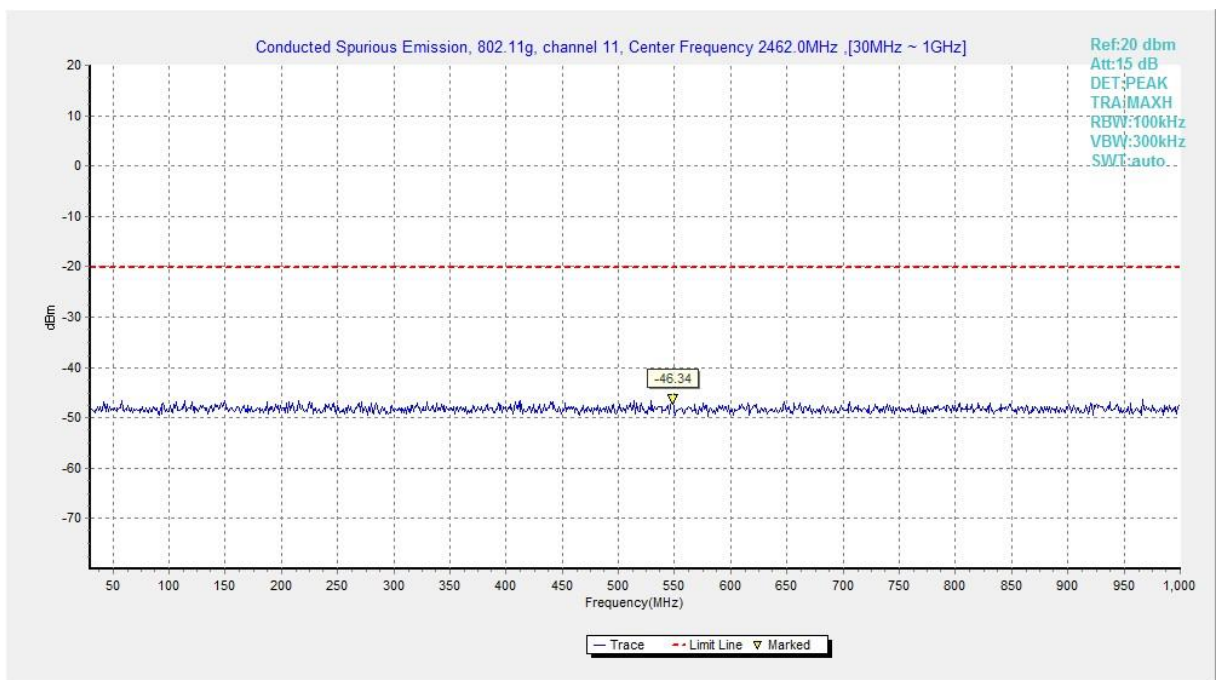


Fig.A.6.1.42 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 30 MHz-1 GHz)

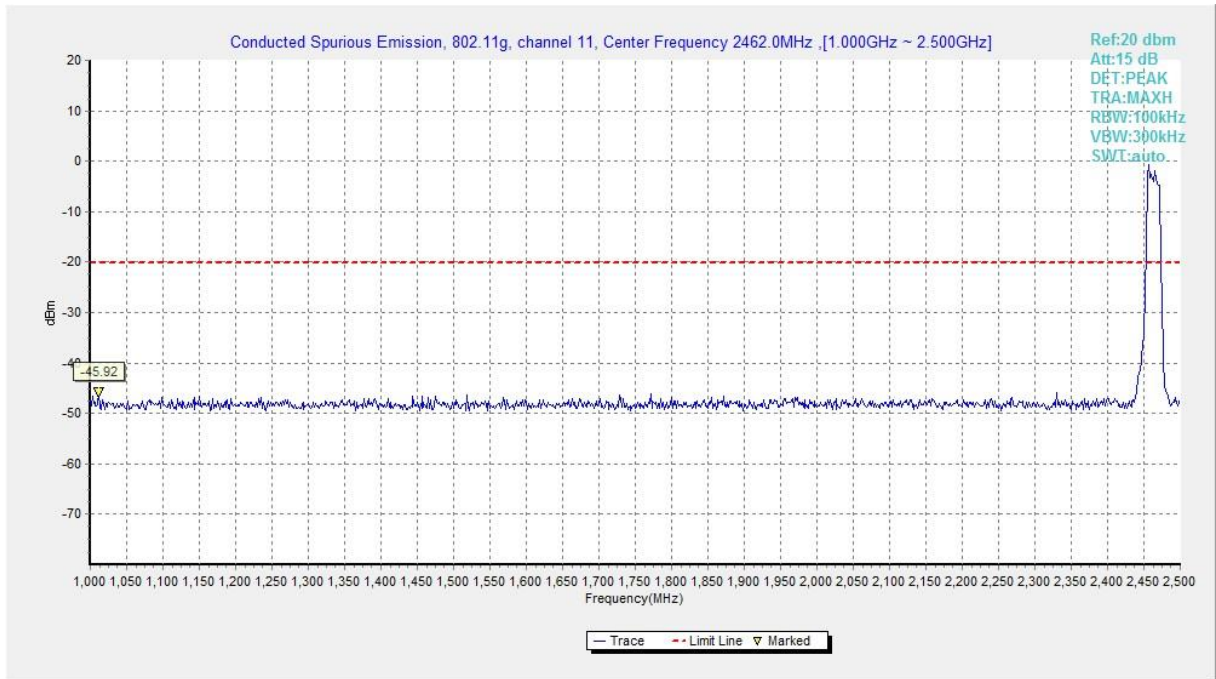


Fig.A.6.1.43 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 1 GHz-2.5 GHz)

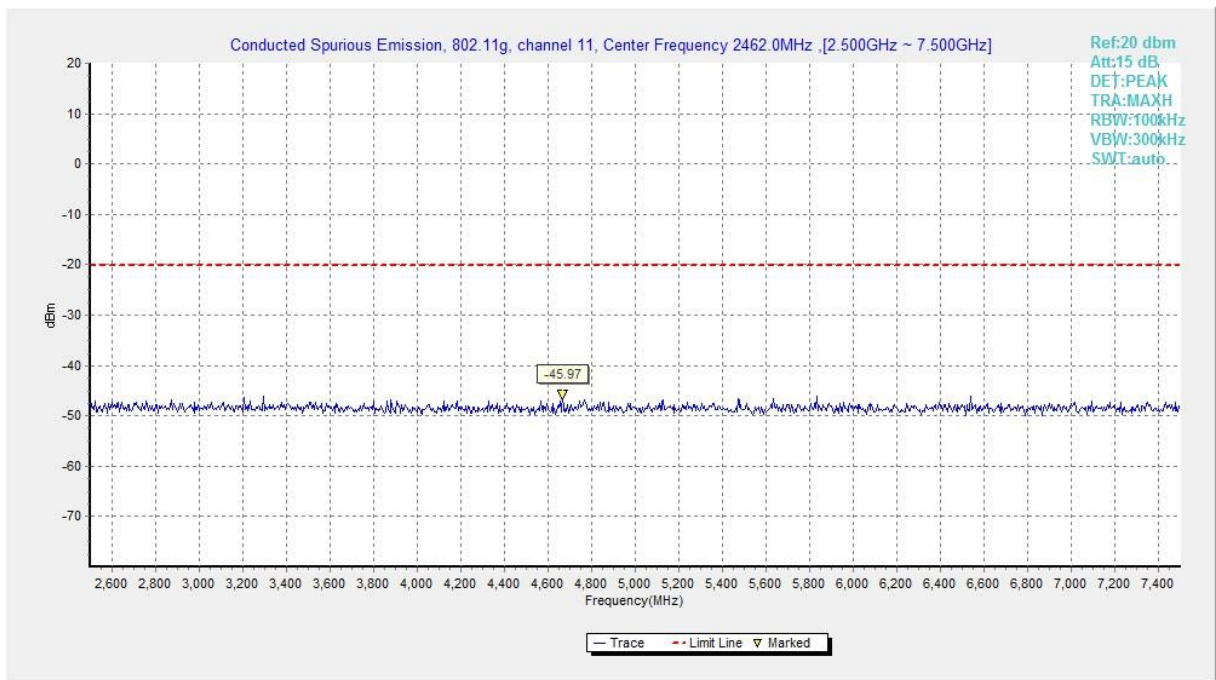


Fig.A.6.1.44 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 2.5 GHz-7.5 GHz)

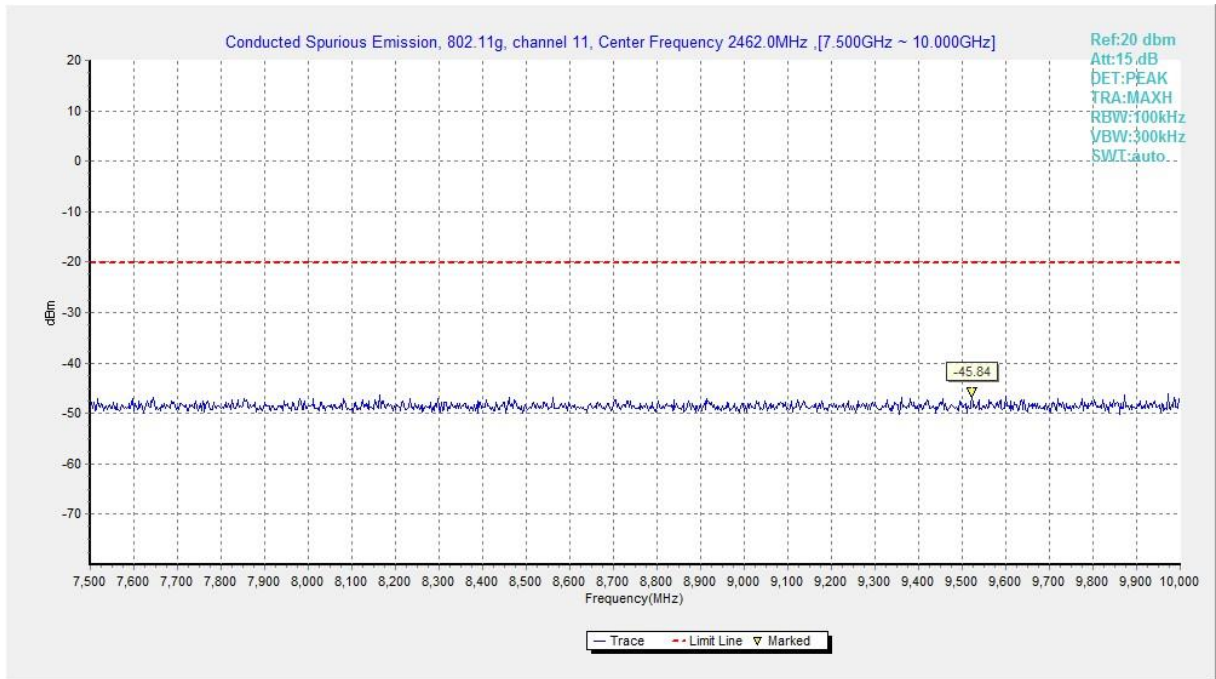


Fig.A.6.1.45 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 7.5 GHz-10 GHz)

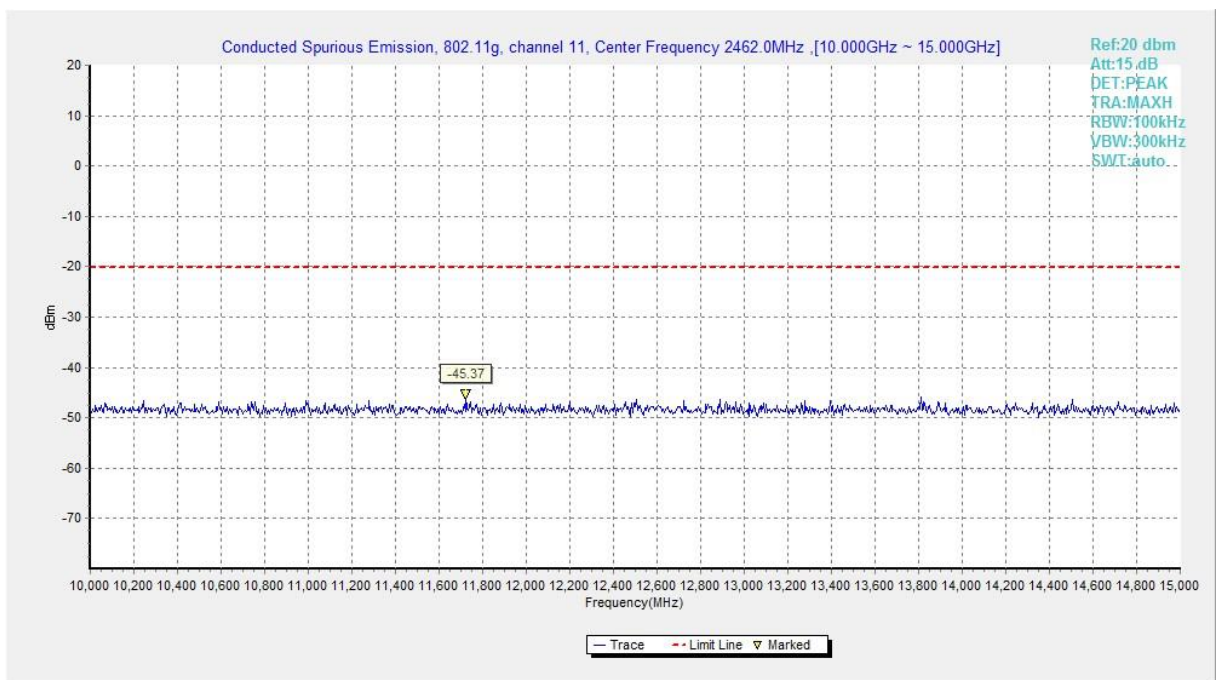


Fig.A.6.1.46 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 10 GHz-15 GHz)

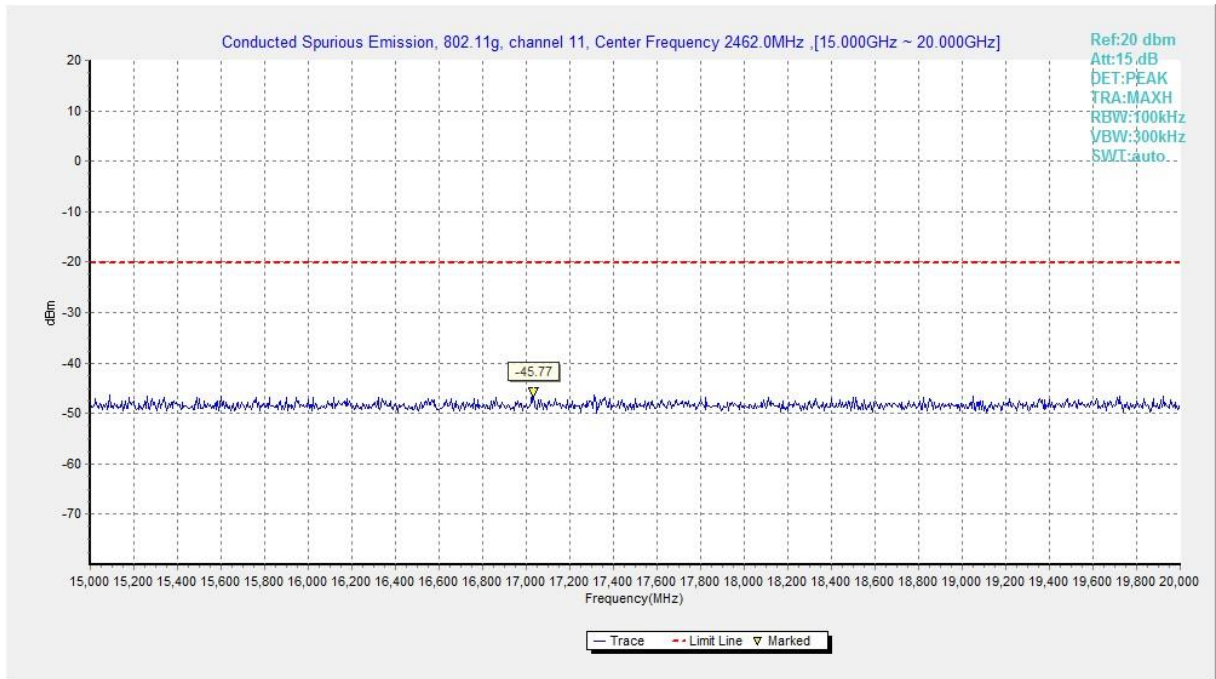


Fig.A.6.1.47 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 15 GHz-20 GHz)

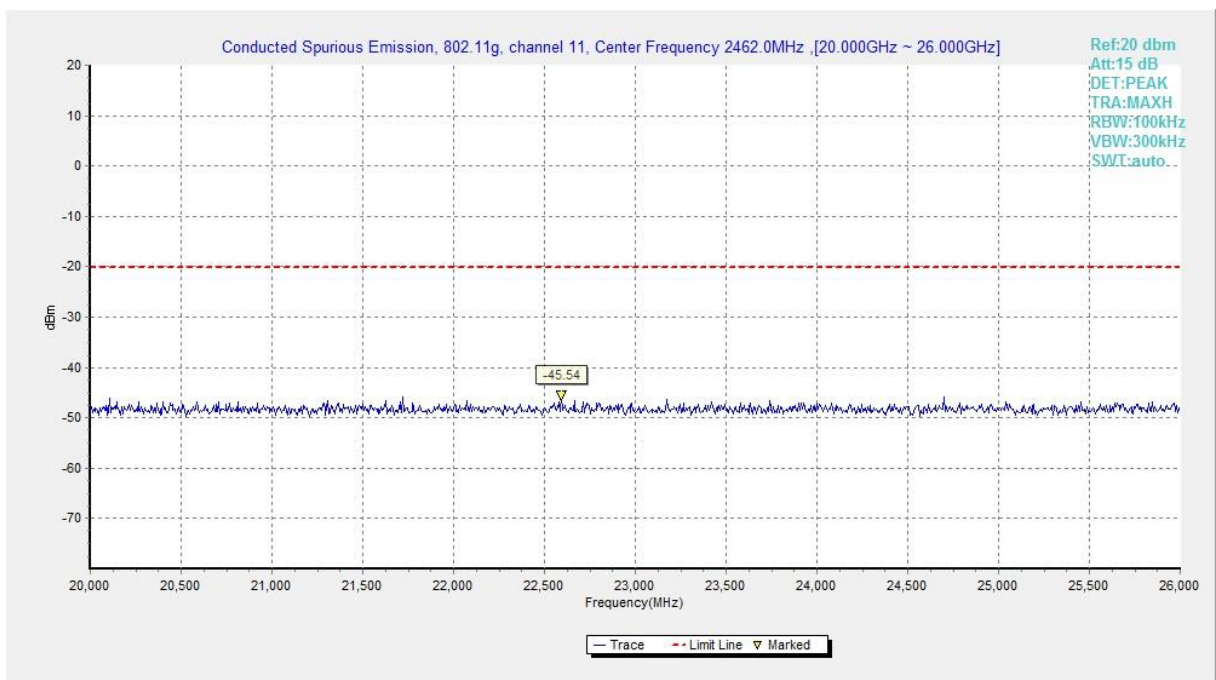


Fig.A.6.1.48 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 20 GHz-26 GHz)

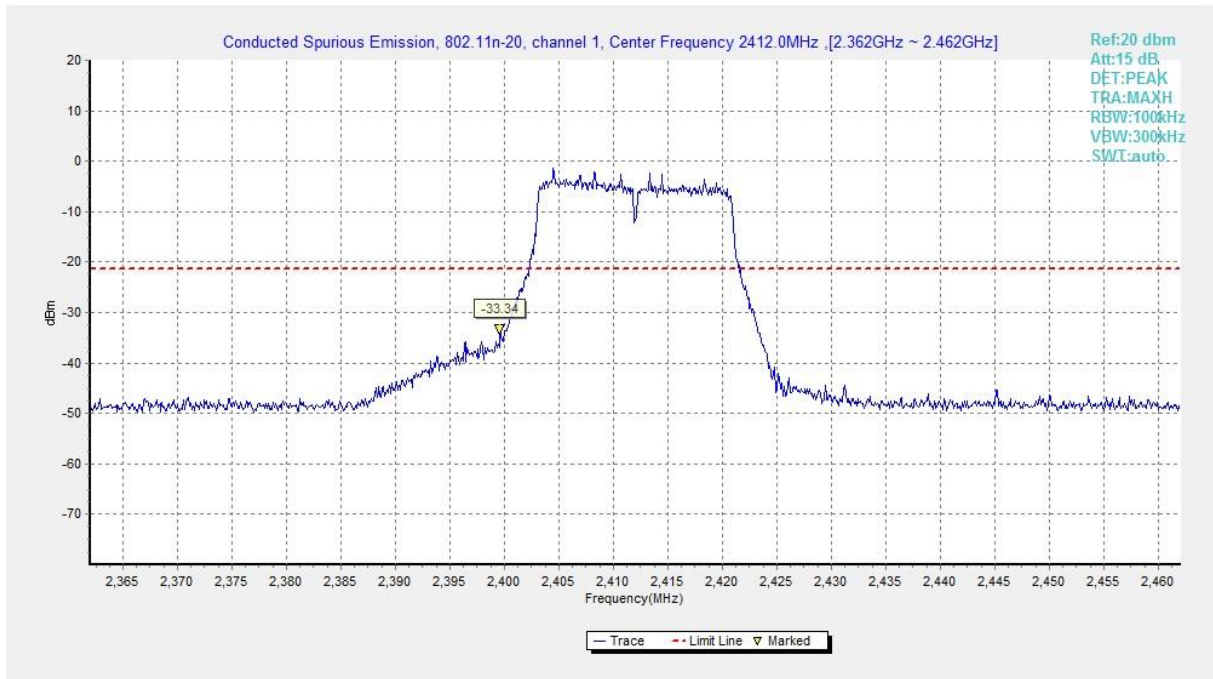


Fig.A.6.1.49 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, Center Frequency)

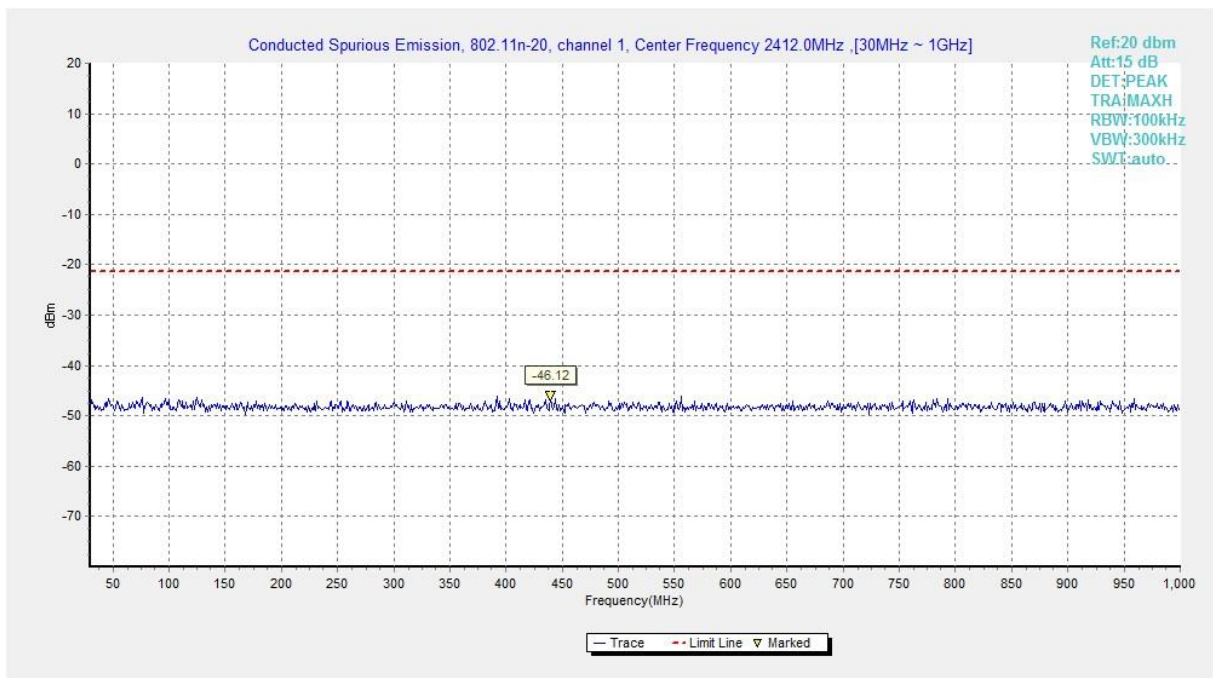


Fig.A.6.1.50 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 30 MHz-1 GHz)

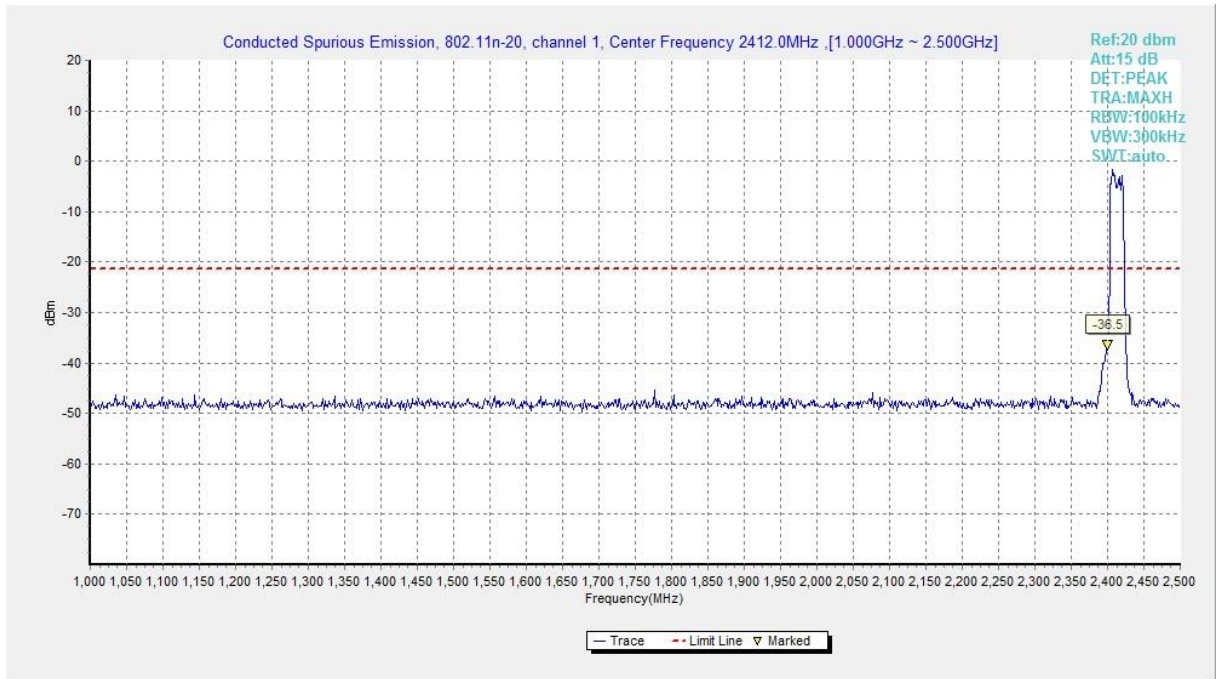


Fig.A.6.1.51 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 1 GHz-2.5 GHz)

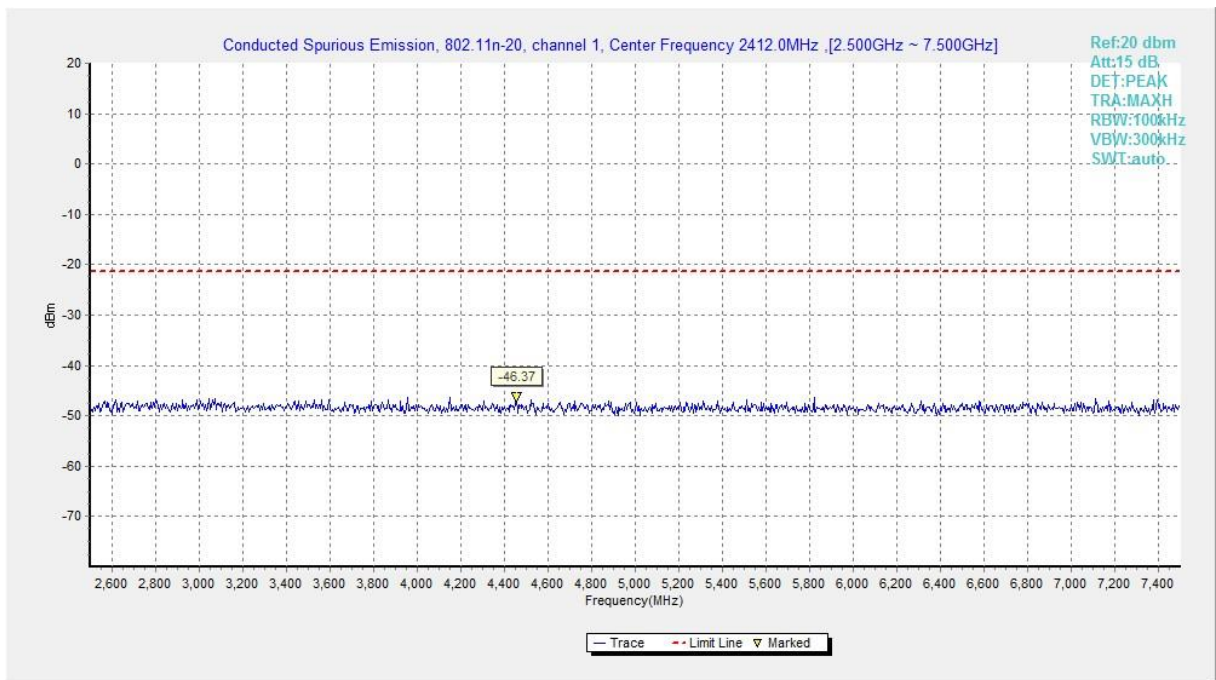


Fig.A.6.1.52 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 2.5 GHz-7.5 GHz)

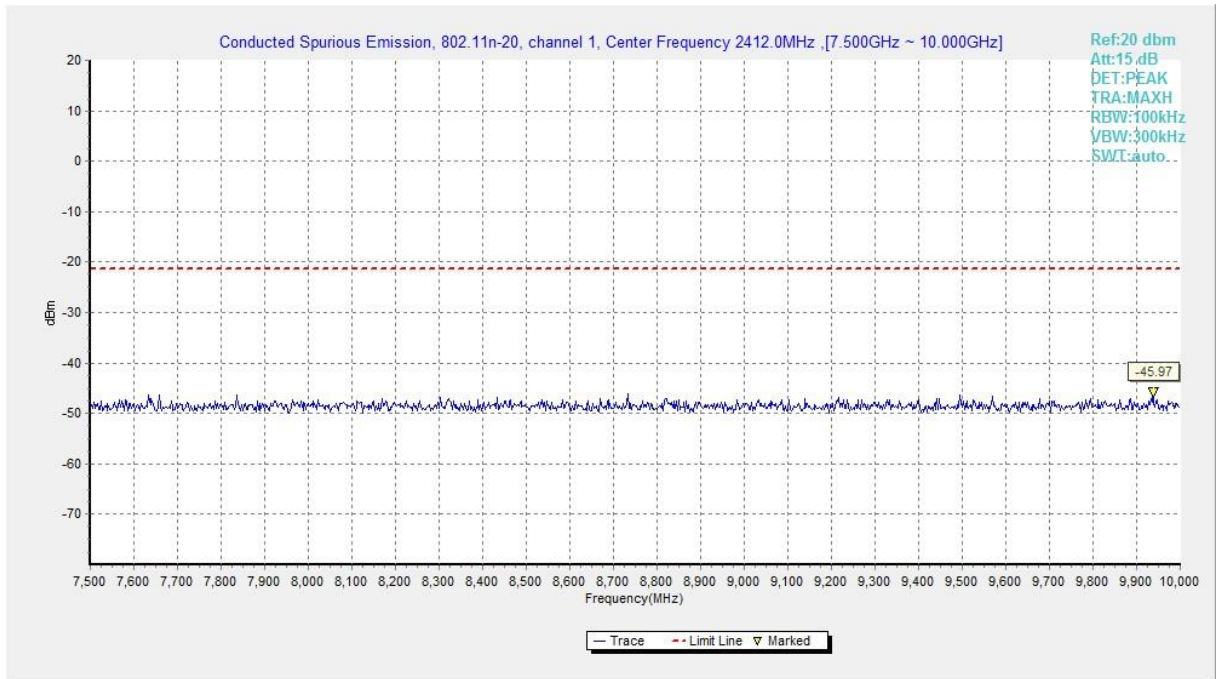


Fig.A.6.1.53 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 7.5 GHz-10 GHz)

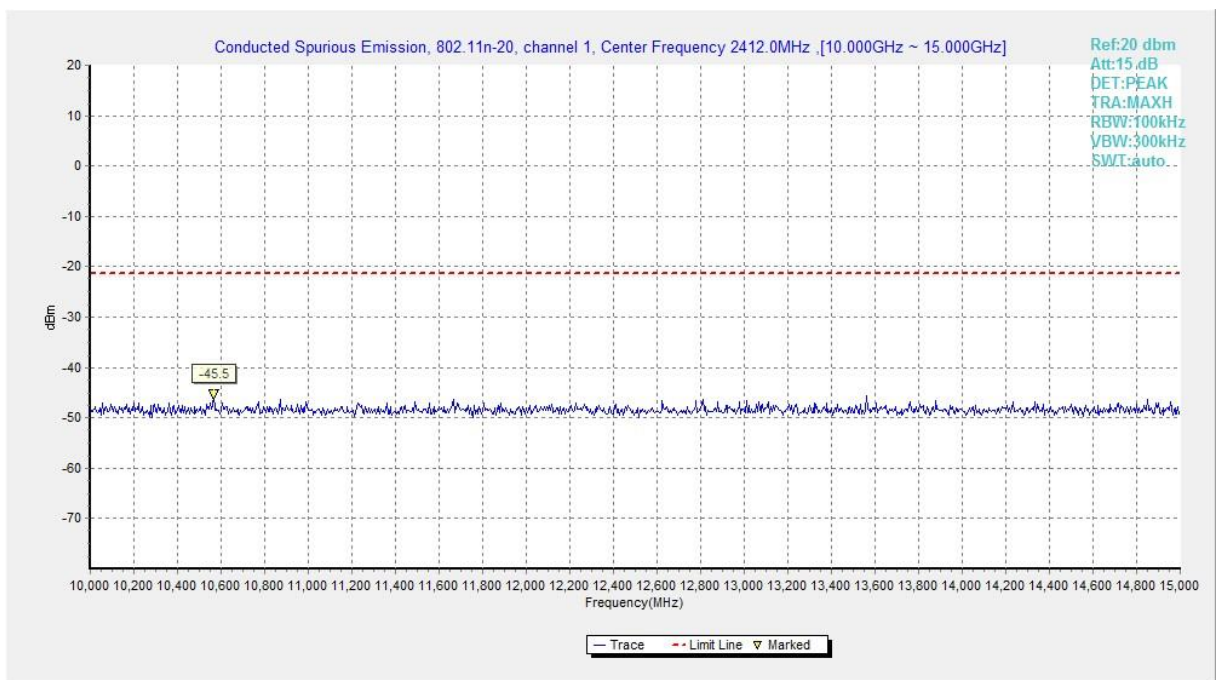


Fig.A.6.1.54 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 10 GHz-15 GHz)

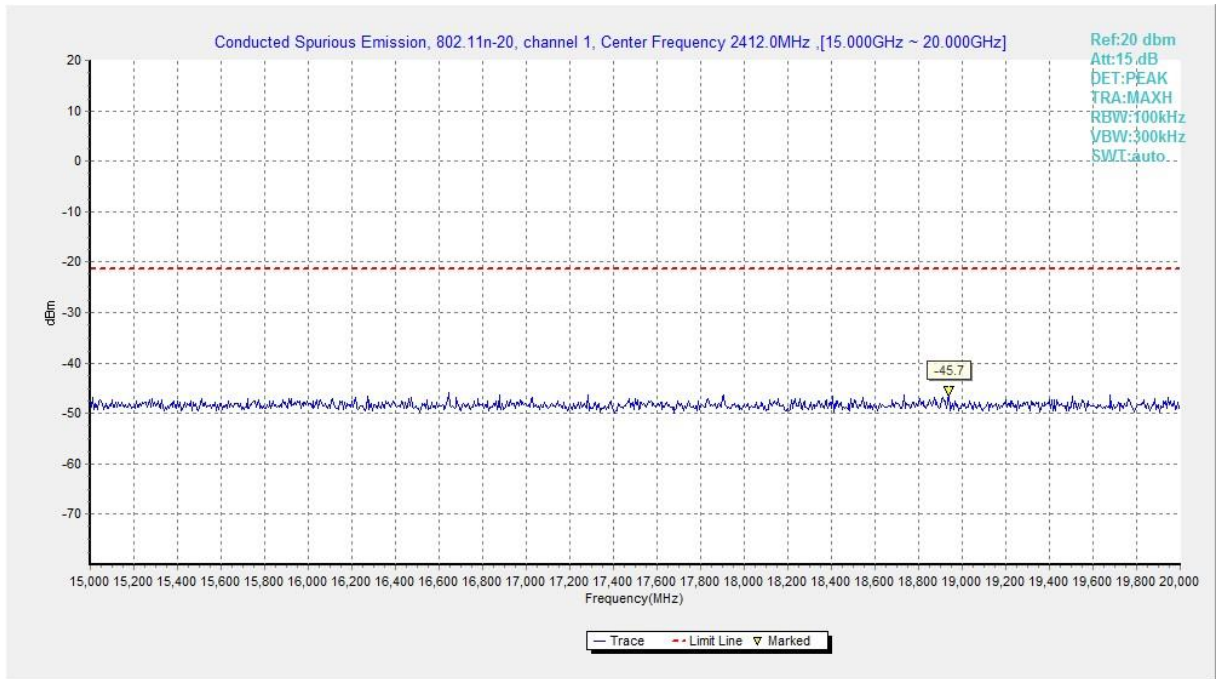


Fig.A.6.1.55 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 15 GHz-20 GHz)

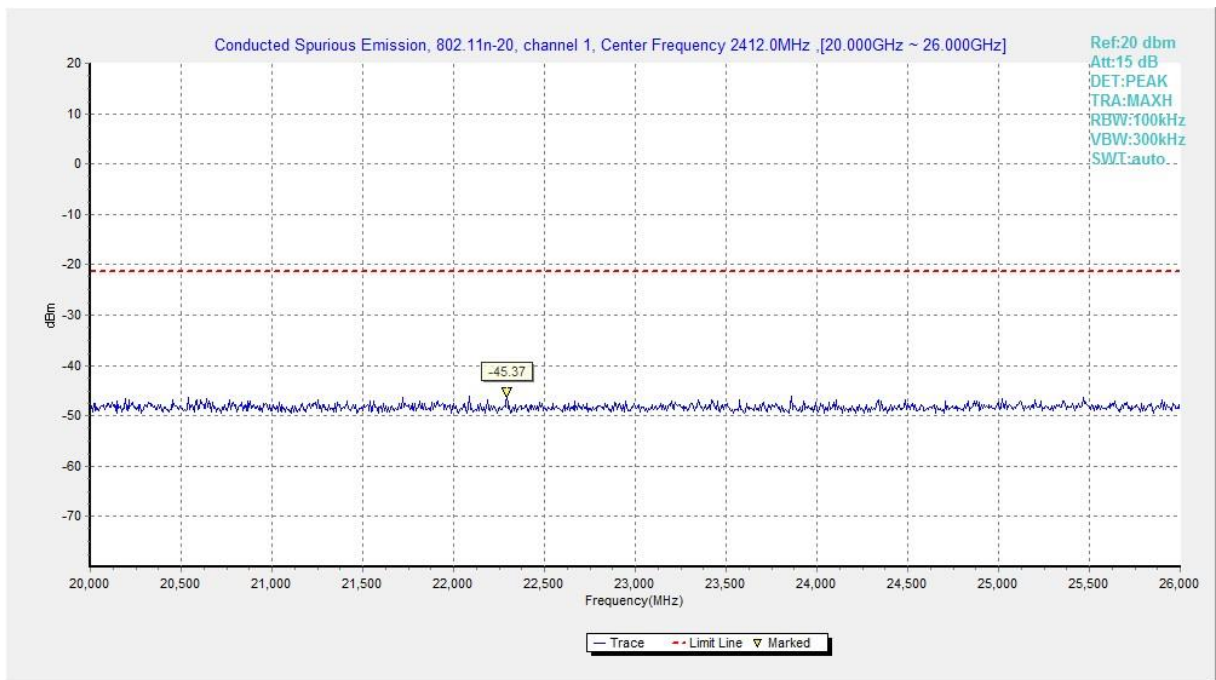


Fig.A.6.1.56 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 20 GHz-26 GHz)

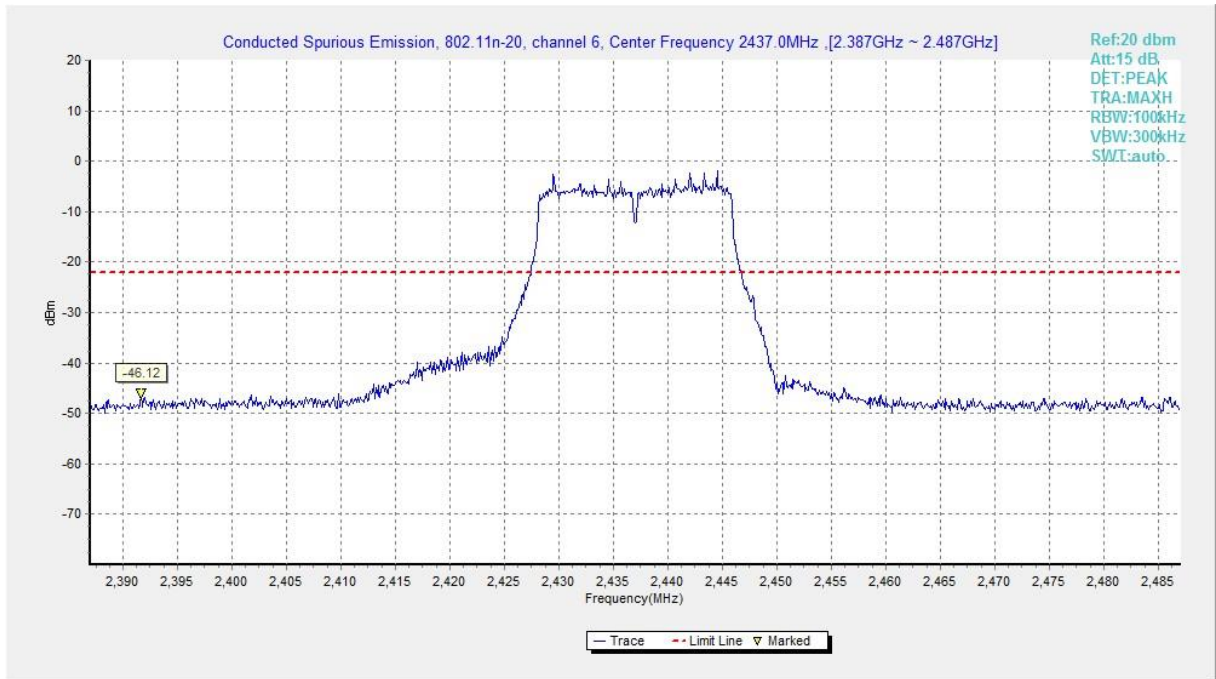


Fig.A.6.1.57 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, Center Frequency)

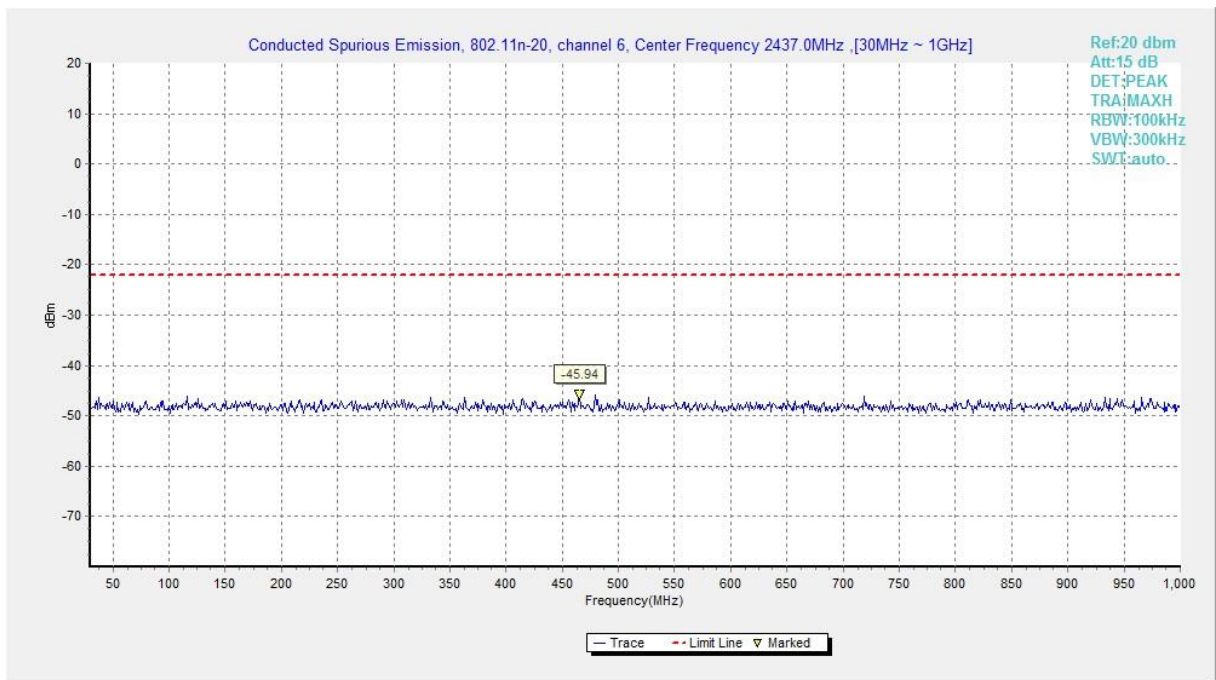


Fig.A.6.1.58 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 30 MHz-1 GHz)

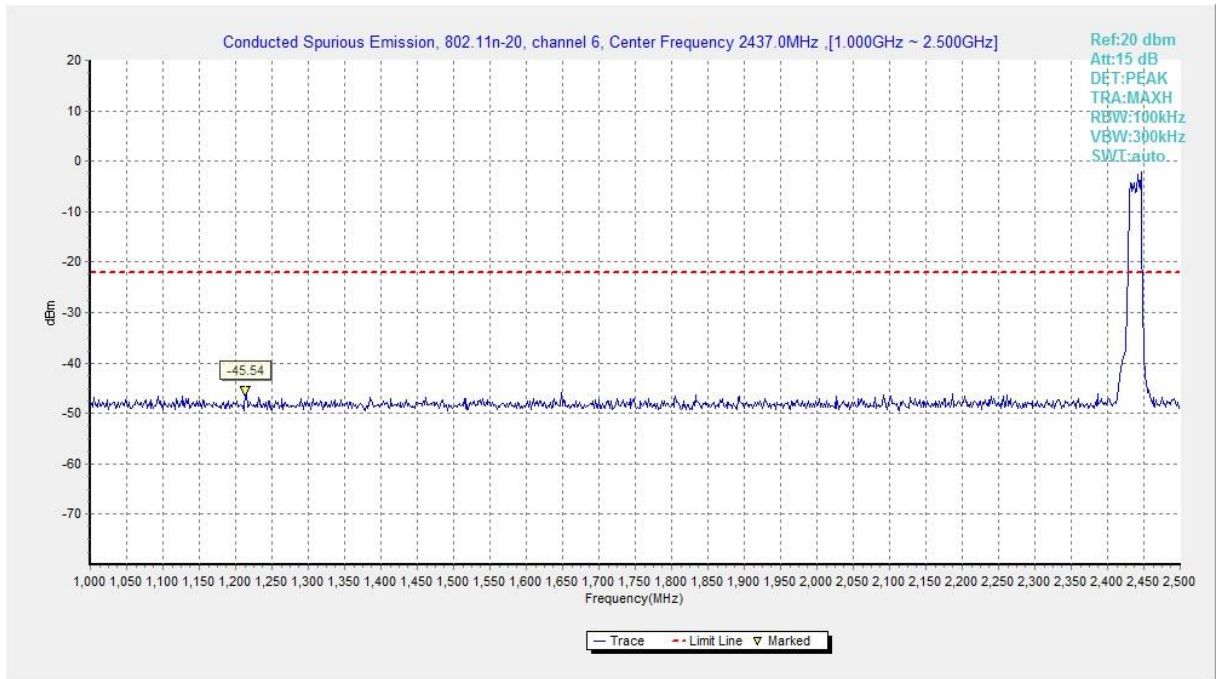


Fig.A.6.1.59 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 1 GHz-2.5 GHz)

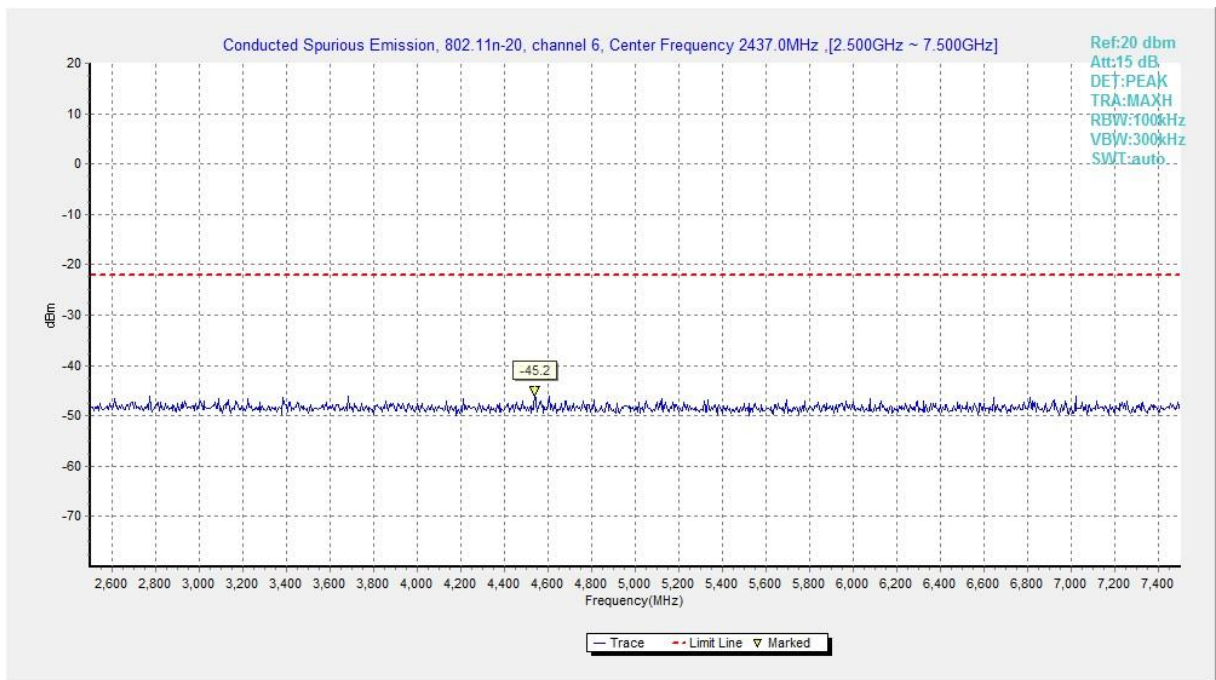


Fig.A.6.1.60 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 2.5 GHz-7.5 GHz)

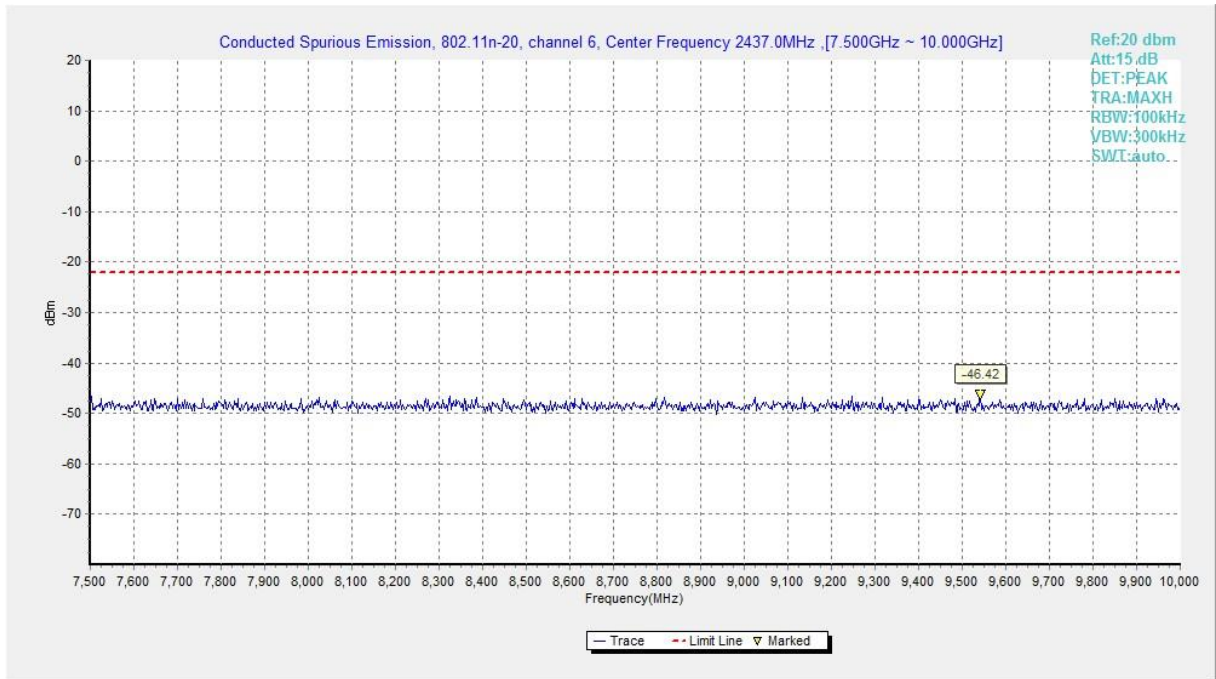


Fig.A.6.1.61 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 7.5 GHz-10 GHz)

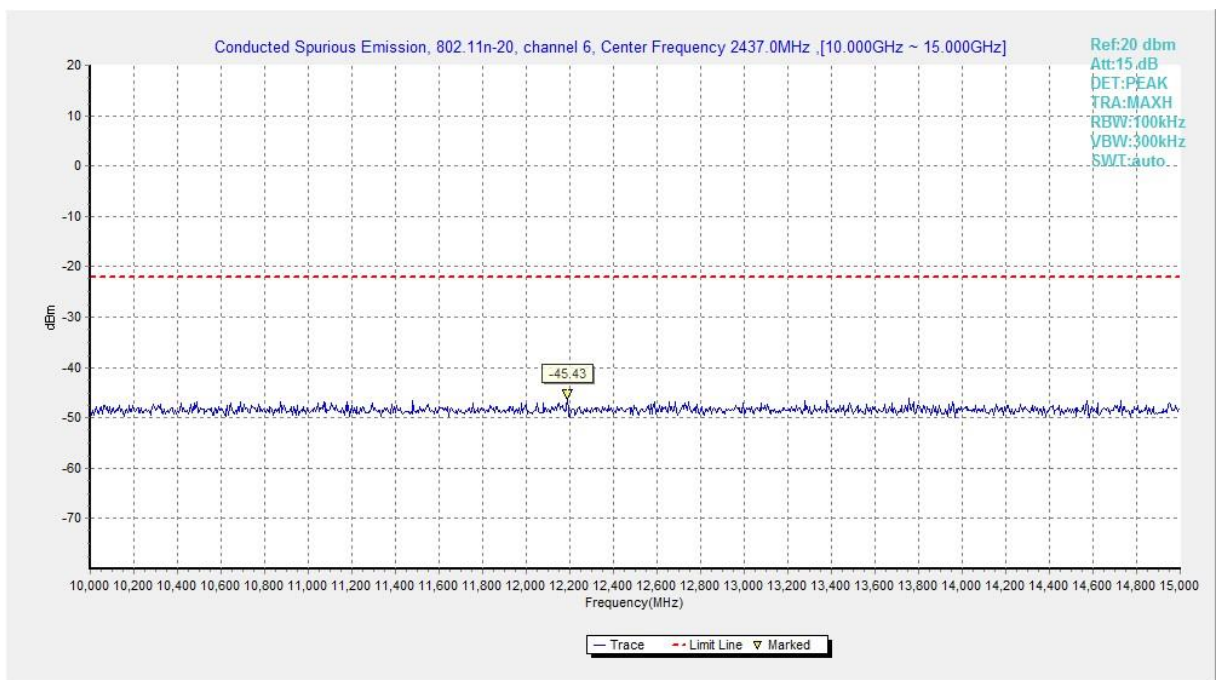


Fig.A.6.1.62 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 10 GHz-15 GHz)

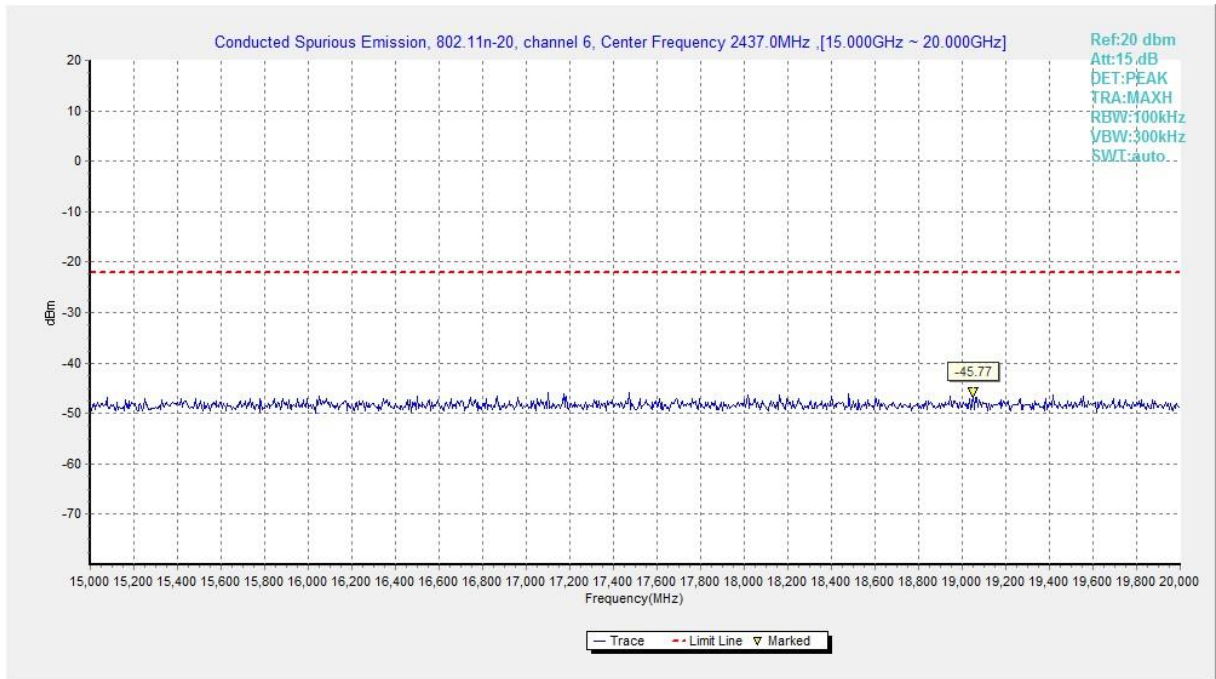


Fig.A.6.1.63 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 15 GHz-20 GHz)

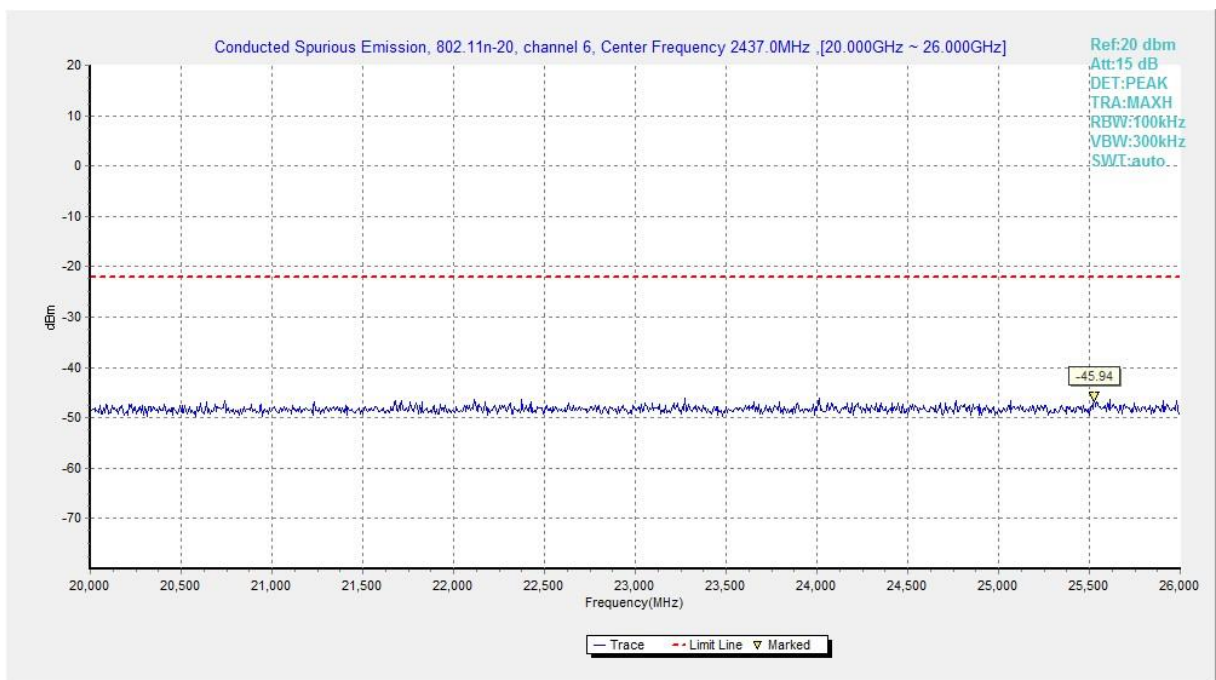


Fig.A.6.1.64 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 20 GHz-26 GHz)

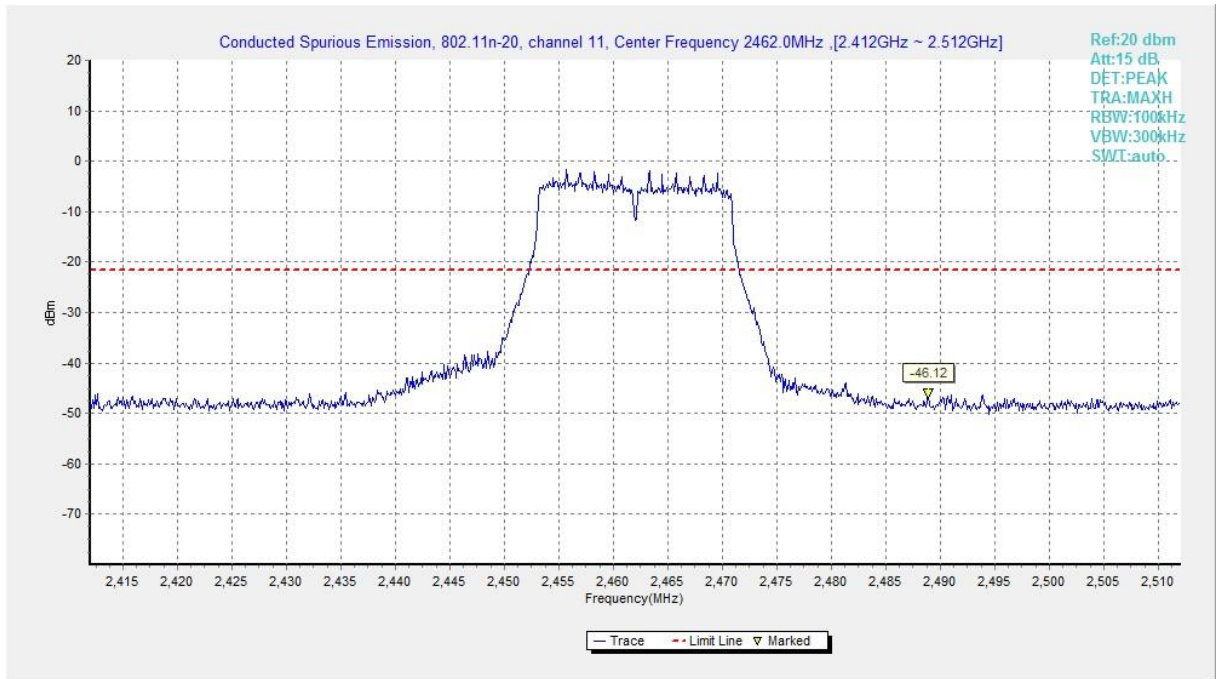


Fig.A.6.1.65 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, Center Frequency)

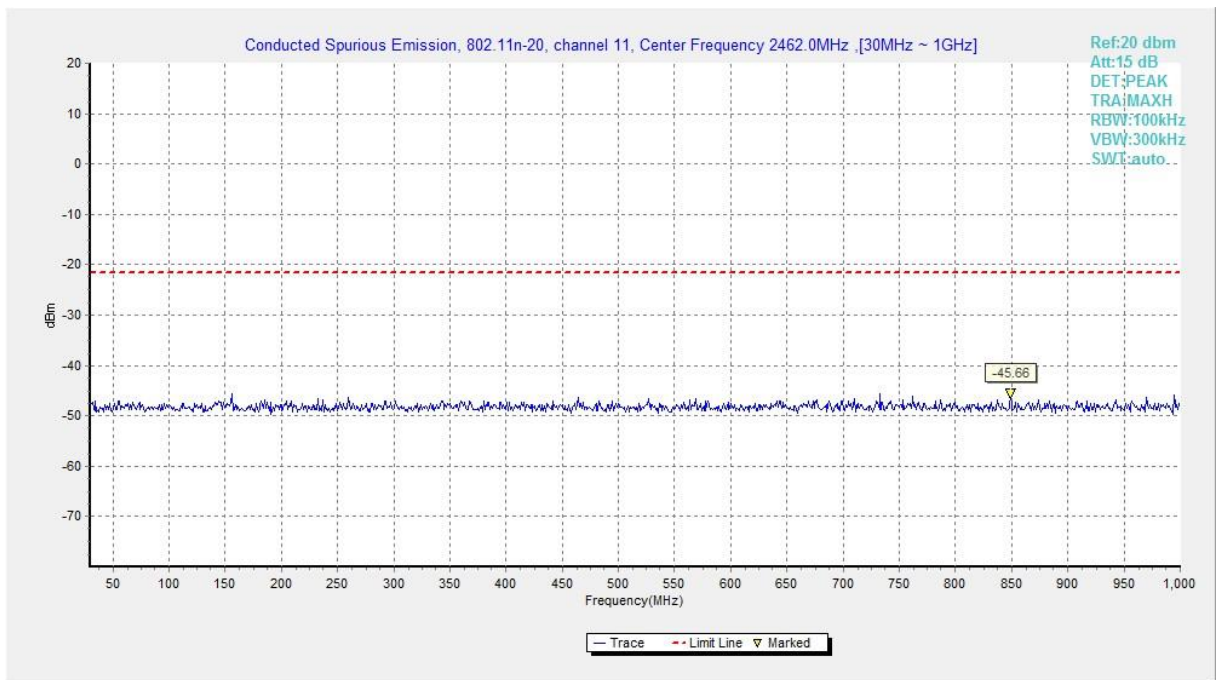


Fig.A.6.1.66 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 30 MHz-1 GHz)

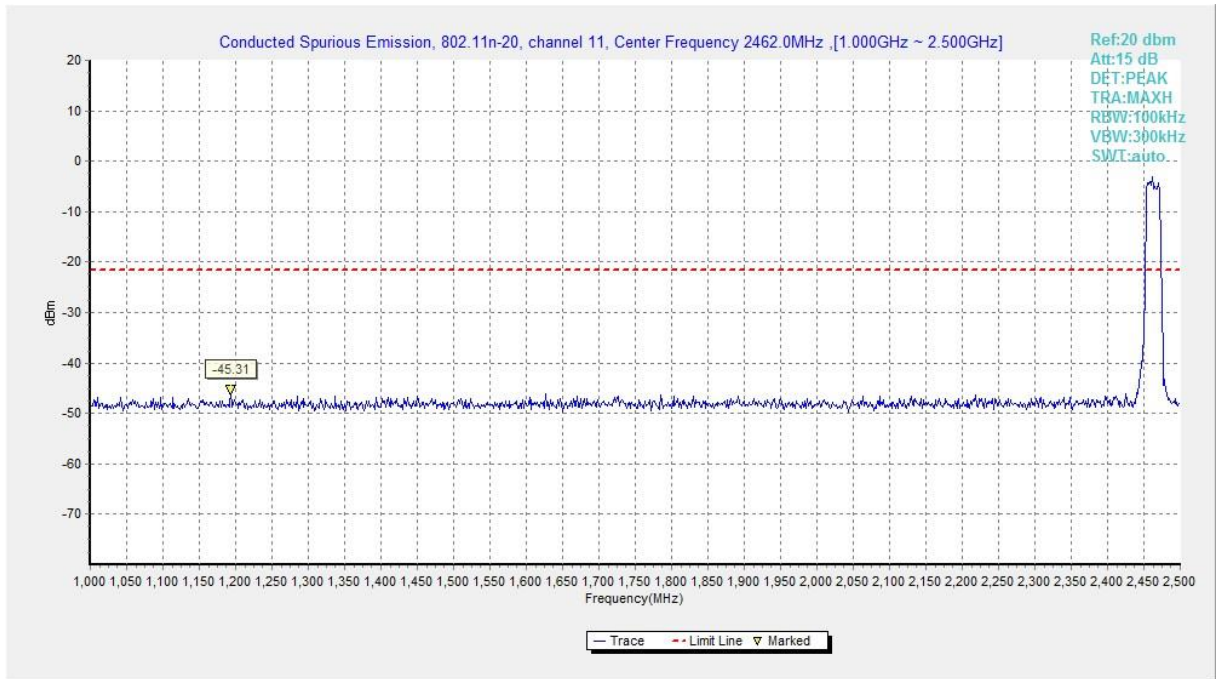


Fig.A.6.1.67 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 1 GHz-2.5 GHz)

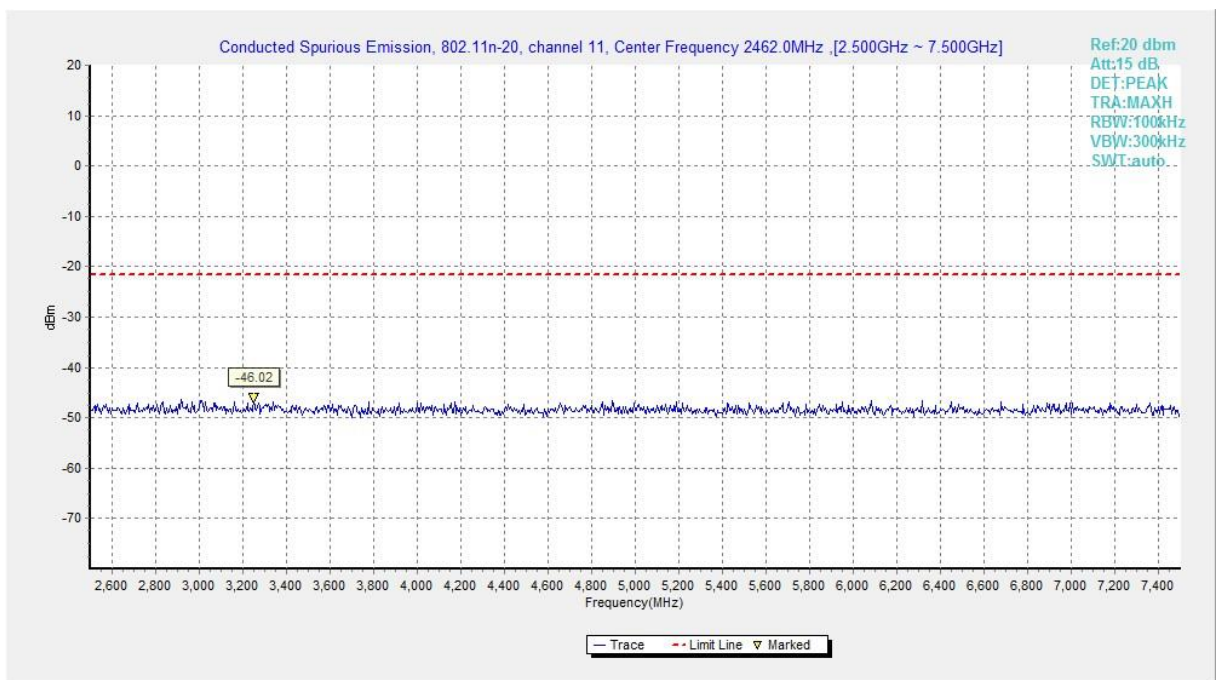


Fig.A.6.1.68 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 2.5 GHz-7.5 GHz)

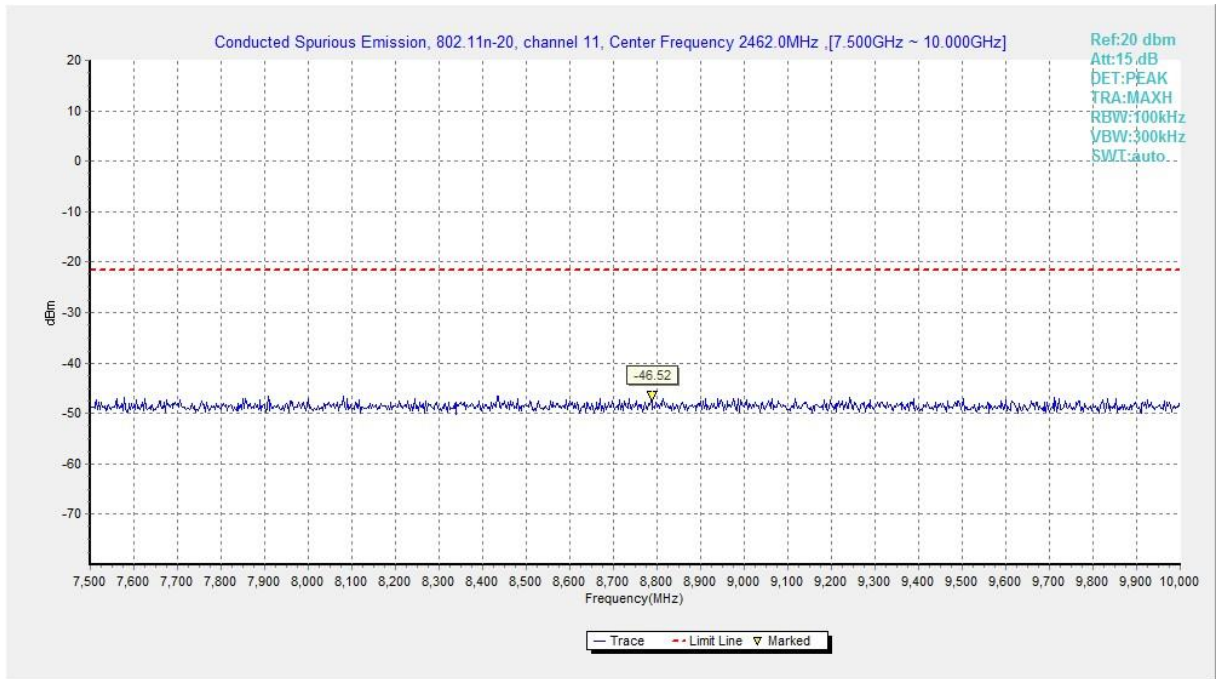


Fig.A.6.1.69 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 7.5 GHz-10 GHz)

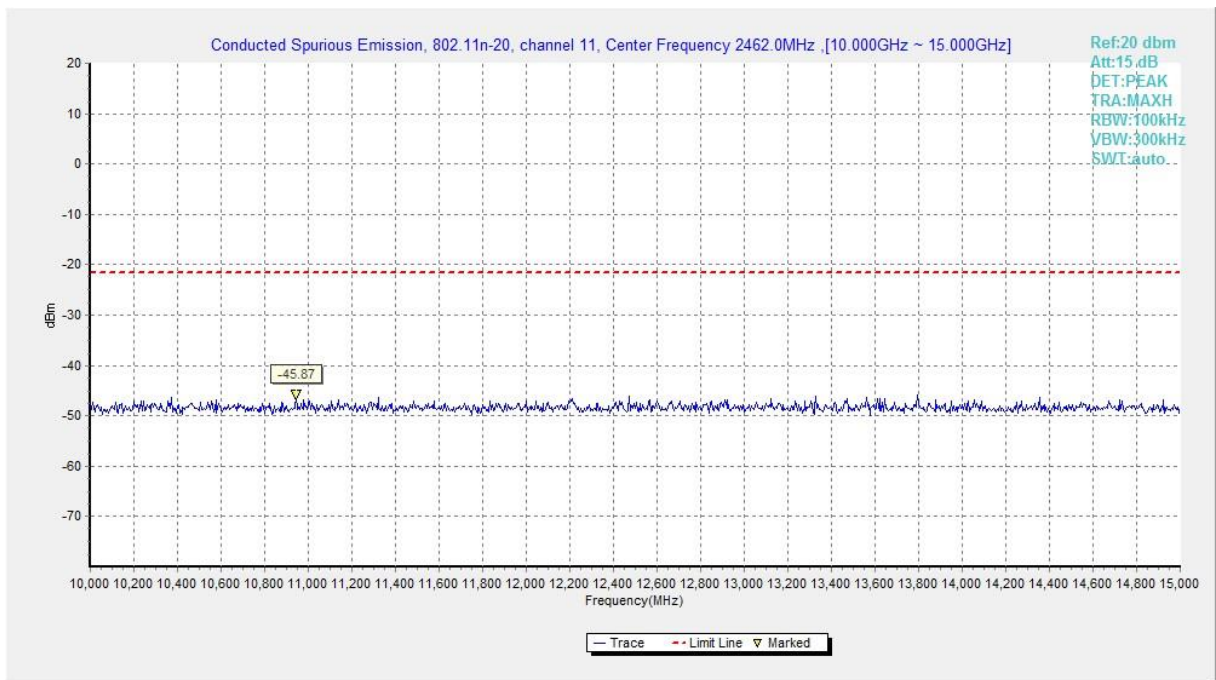


Fig.A.6.1.70 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 10 GHz-15 GHz)

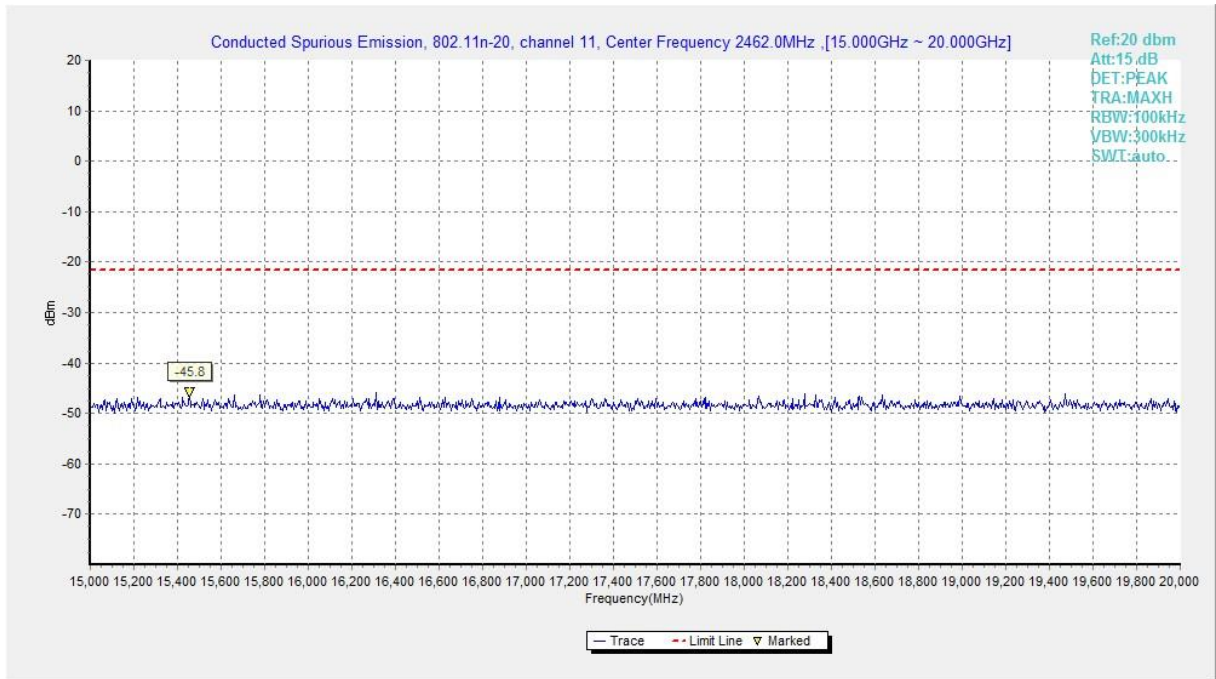


Fig.A.6.1.71 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 15 GHz-20 GHz)

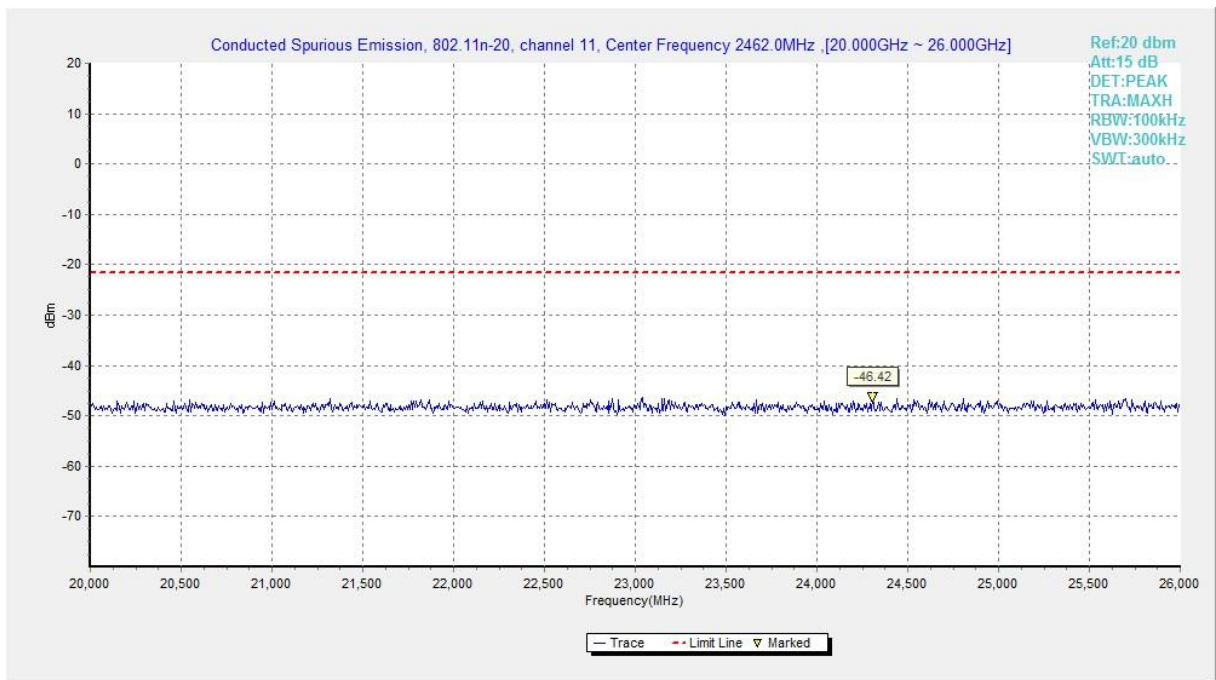


Fig.A.6.1.72 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 20 GHz-26 GHz)

A.6.2 Transmitter Spurious Emission - Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 & 6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Frequency (MHz)	Field strength(μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

EUT ID: EUT1

Measurement Results for EUT1:
802.11b mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	Power(ch1)	2.31GHz ~2.43GHz	Fig.A.6.2.1	P
	Power(ch11)	2.45GHz ~2.5GHz	Fig.A.6.2.2	P

802.11g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11g	Power(ch1)	2.31GHz ~2.43GHz	Fig.A.6.2.3	P
	Power(ch11)	2.45GHz ~2.5GHz	Fig.A.6.2.4	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n(HT20)	Power(ch1)	2.31GHz ~2.43GHz	Fig.A.6.2.5	P
	Power(ch11)	2.45GHz ~2.5GHz	Fig.A.6.2.6	P

Conclusion: Pass
Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

802.11b-Average
Ch1

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2385.500	46.39	2.9	32.0	11.51	54.0	7.6	H	155	18
2390.000	46.42	2.9	32.0	11.53	54.0	7.6	H	155	56
4824.000	31.28	-33.2	34.1	30.39	54.0	22.7	H	155	139
7236.000	34.31	-30.9	35.7	29.44	54.0	19.7	H	155	108
9648.000	35.29	-30.5	36.8	28.97	54.0	18.7	H	155	78
12060.000	38.77	-28.7	38.9	28.56	54.0	15.2	H	155	36

Ch6

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2419.000	46.74	2.9	32.1	11.79	54.0	7.3	H	155	268
2454.000	46.63	2.9	32.1	11.59	54.0	7.4	H	155	138
4873.500	31.00	-33.3	34.2	30.15	54.0	23.0	H	155	104
7311.000	34.34	-30.8	35.8	29.39	54.0	19.7	H	155	40
9748.500	35.58	-30.3	36.9	29.01	54.0	18.4	H	155	28
12184.500	38.87	-28.1	38.9	28.04	54.0	15.1	H	155	8

Ch11

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2483.600	46.56	2.9	32.2	11.45	54.0	7.4	H	155	16
2485.100	46.54	2.9	32.2	11.44	54.0	7.5	H	155	48
4924.500	30.93	-33.5	34.2	30.28	54.0	23.1	H	155	80
7386.000	33.47	-31.5	35.8	29.14	54.0	20.5	H	155	8
9847.500	35.71	-30.2	37.0	28.87	54.0	18.3	H	155	102
12310.500	39.21	-27.8	39.0	28.00	54.0	14.8	H	155	118

802.11b-Peak
Ch1

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2375.548	60.46	2.9	32.0	25.61	74.0	13.5	H	155	22
2380.112	60.59	2.9	32.0	25.73	74.0	13.4	H	155	44
4824.000	40.74	-33.2	34.1	39.84	74.0	33.3	H	155	132
7236.000	42.36	-30.9	35.7	37.49	74.0	31.6	V	155	110
9648.000	42.44	-30.5	36.8	36.12	74.0	31.6	H	155	88
12060.000	46.72	-28.7	38.9	36.51	74.0	27.3	H	155	44

Ch6

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2375.600	44.82	-34.3	32.0	47.10	74.0	29.2	H	155	264
2508.800	45.28	-34.2	32.2	47.32	74.0	28.7	H	155	132
4874.000	40.36	-33.3	34.2	39.51	74.0	33.6	H	155	110
7311.000	42.31	-30.8	35.8	37.37	74.0	31.7	H	155	44
9748.000	42.98	-30.3	36.9	36.41	74.0	31.0	H	155	22
12185.000	45.44	-28.1	38.9	34.60	74.0	28.6	V	155	0

Ch11

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2488.110	60.10	2.9	32.2	24.99	74.0	13.9	H	155	22
2488.935	60.66	2.9	32.2	25.54	74.0	13.3	H	155	44
4924.000	41.06	-33.5	34.2	40.42	74.0	32.9	V	155	88
7386.000	42.25	-31.5	35.8	37.92	74.0	31.8	V	155	0
9848.000	43.15	-30.2	37.0	36.31	74.0	30.8	H	155	110
12310.000	45.61	-27.8	39.0	34.40	74.0	28.4	H	155	132

802.11g - Average

Ch1

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2385.900	46.49	2.9	32.0	11.61	54.0	7.5	H	155	28
2390.000	46.60	2.9	32.0	11.71	54.0	7.4	H	155	46
4824.000	31.31	-33.2	34.1	30.42	54.0	22.7	H	155	8
7236.000	34.39	-30.9	35.7	29.53	54.0	19.6	H	155	6
9648.000	35.34	-30.5	36.8	29.02	54.0	18.7	H	155	24
12060.000	38.77	-28.7	38.9	28.56	54.0	15.2	H	155	185

Ch6

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2410.900	46.56	2.9	32.1	11.62	54.0	7.4	H	155	28
2462.000	46.53	2.9	32.1	11.48	54.0	7.5	H	155	248
4873.500	30.98	-33.3	34.2	30.12	54.0	23.0	H	155	38
7311.000	34.29	-30.8	35.8	29.34	54.0	19.7	H	155	98
9748.500	35.58	-30.3	36.9	29.01	54.0	18.4	H	155	183
12184.500	38.91	-28.1	38.9	28.08	54.0	15.1	H	155	356

Ch11

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2483.500	46.50	2.9	32.2	11.40	54.0	7.5	H	155	20
2486.400	46.53	2.9	32.2	11.42	54.0	7.5	H	155	18
4924.500	30.95	-33.5	34.2	30.31	54.0	23.1	H	155	90
7386.000	33.53	-31.5	35.8	29.20	54.0	20.5	H	155	114
9847.500	35.73	-30.2	37.0	28.89	54.0	18.3	H	155	36
12310.500	39.14	-27.8	39.0	27.93	54.0	14.9	H	155	2

802.11g - Peak

Ch1

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2386.398	60.09	2.9	32.0	25.21	74.0	13.9	H	155	22
2387.910	60.22	2.9	32.0	25.34	74.0	13.8	H	155	44
4824.000	40.17	-33.2	34.1	39.27	74.0	33.8	V	155	0
7236.000	42.29	-30.9	35.7	37.43	74.0	31.7	H	155	0
9648.000	42.15	-30.5	36.8	35.83	74.0	31.9	V	155	22
12060.000	46.08	-28.7	38.9	35.87	74.0	27.9	H	155	176

Ch6

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2370.000	44.26	-34.5	32.0	46.76	74.0	29.7	H	155	22
2532.800	45.54	-34.5	32.2	47.83	74.0	28.5	H	155	242
4874.000	39.54	-33.3	34.2	38.69	74.0	34.5	V	155	44
7311.000	42.18	-30.8	35.8	37.23	74.0	31.8	H	155	88
9748.000	42.89	-30.3	36.9	36.32	74.0	31.1	V	155	176
12185.000	47.66	-28.1	38.9	36.82	74.0	26.3	H	155	0

Ch11

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2486.110	60.41	2.9	32.2	25.29	74.0	13.6	H	155	22
2491.385	60.88	2.9	32.2	25.75	74.0	13.1	H	155	22
4924.000	40.34	-33.5	34.2	39.70	74.0	33.7	H	155	88
7386.000	40.77	-31.5	35.8	36.44	74.0	33.2	V	155	110
9848.000	43.55	-30.2	37.0	36.70	74.0	30.5	V	155	44
12310.000	45.15	-27.8	39.0	33.94	74.0	28.9	H	155	0

802.11n-HT20-Average
Ch1

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2388.500	46.50	2.9	32.0	11.62	54.0	7.5	H	155	8
2390.000	46.59	2.9	32.0	11.71	54.0	7.4	H	155	52
4824.000	31.36	-33.2	34.1	30.47	54.0	22.6	H	155	18
7236.000	34.47	-30.9	35.7	29.60	54.0	19.5	H	155	6
9648.000	35.35	-30.5	36.8	29.03	54.0	18.6	H	155	48
12060.000	38.84	-28.7	38.9	28.63	54.0	15.2	H	155	128

Ch6

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2417.400	47.12	2.9	32.1	12.17	54.0	6.9	H	155	20
2457.700	46.65	2.9	32.1	11.61	54.0	7.3	H	155	248
4873.500	31.02	-33.3	34.2	30.17	54.0	23.0	H	155	49
7311.000	34.34	-30.8	35.8	29.40	54.0	19.7	H	155	82
9748.500	35.62	-30.3	36.9	29.05	54.0	18.4	H	155	168
12184.500	39.00	-28.1	38.9	28.17	54.0	15.0	H	155	8

Ch11

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2483.500	46.56	2.9	32.2	11.45	54.0	7.4	H	155	4
2484.400	46.60	2.9	32.2	11.49	54.0	7.4	H	155	26
4924.500	30.91	-33.5	34.2	30.27	54.0	23.1	H	155	356
7386.000	33.58	-31.5	35.8	29.25	54.0	20.4	H	155	348
9847.500	35.76	-30.2	37.0	28.92	54.0	18.2	H	155	174
12310.500	39.18	-27.8	39.0	27.97	54.0	14.8	H	155	112

802.11n-HT20-Peak
Ch1

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2385.810	60.02	2.9	32.0	25.14	74.0	14.0	V	155	0
2389.310	61.53	2.9	32.0	26.64	74.0	12.5	H	155	44
4824.000	39.38	-33.2	34.1	38.49	74.0	34.6	V	155	22
7236.000	42.23	-30.9	35.7	37.37	74.0	31.8	H	155	0
9648.000	43.33	-30.5	36.8	37.01	74.0	30.7	H	155	44
12060.000	46.44	-28.7	38.9	36.23	74.0	27.6	V	155	132

Ch6

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2368.200	43.49	-34.6	32.0	46.06	74.0	30.5	H	155	22
2528.000	44.48	-34.5	32.2	46.71	74.0	29.5	V	155	242
4874.000	40.34	-33.3	34.2	39.49	74.0	33.7	H	155	44
7311.000	43.35	-30.8	35.8	38.40	74.0	30.7	V	155	88
9748.000	42.90	-30.3	36.9	36.33	74.0	31.1	V	155	176
12185.000	45.91	-28.1	38.9	35.07	74.0	28.1	V	155	0

Ch11

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)	Antenna Height (cm)	Turntable angle (deg)
2484.300	60.29	2.9	32.2	25.19	74.0	13.7	H	155	0
2485.215	60.16	2.9	32.2	25.05	74.0	13.8	V	155	22
4924.000	40.94	-33.5	34.2	40.29	74.0	33.1	V	155	352
7386.000	40.54	-31.5	35.8	36.22	74.0	33.5	V	155	352
9848.000	43.47	-30.2	37.0	36.63	74.0	30.5	V	155	176
12310.000	45.05	-27.8	39.0	33.84	74.0	28.9	V	155	110

Test graphs as below:

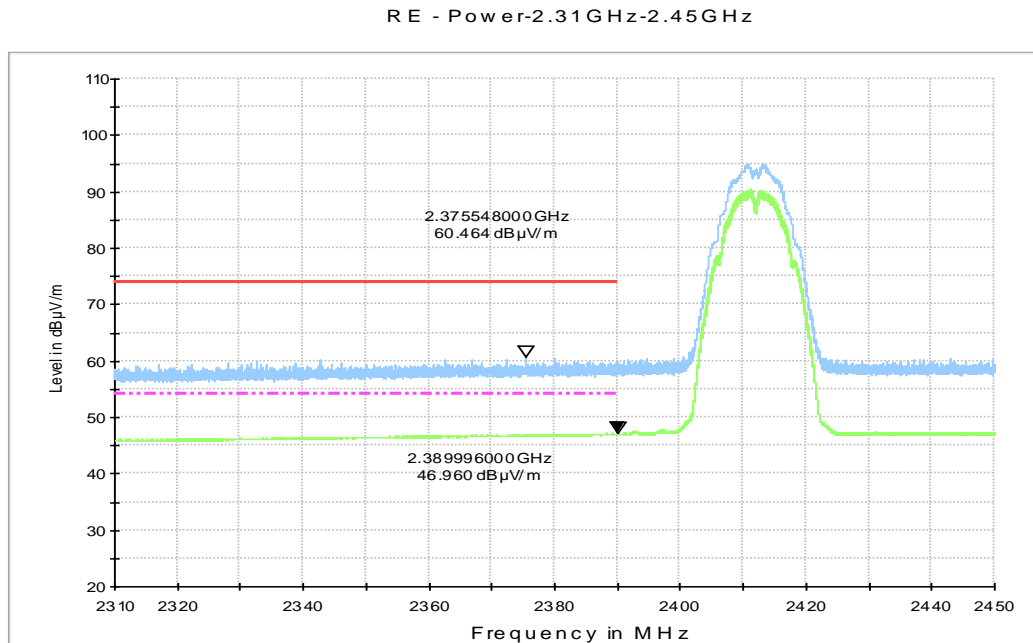


Fig.A.6.2.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.31 GHz – 2.45GHz

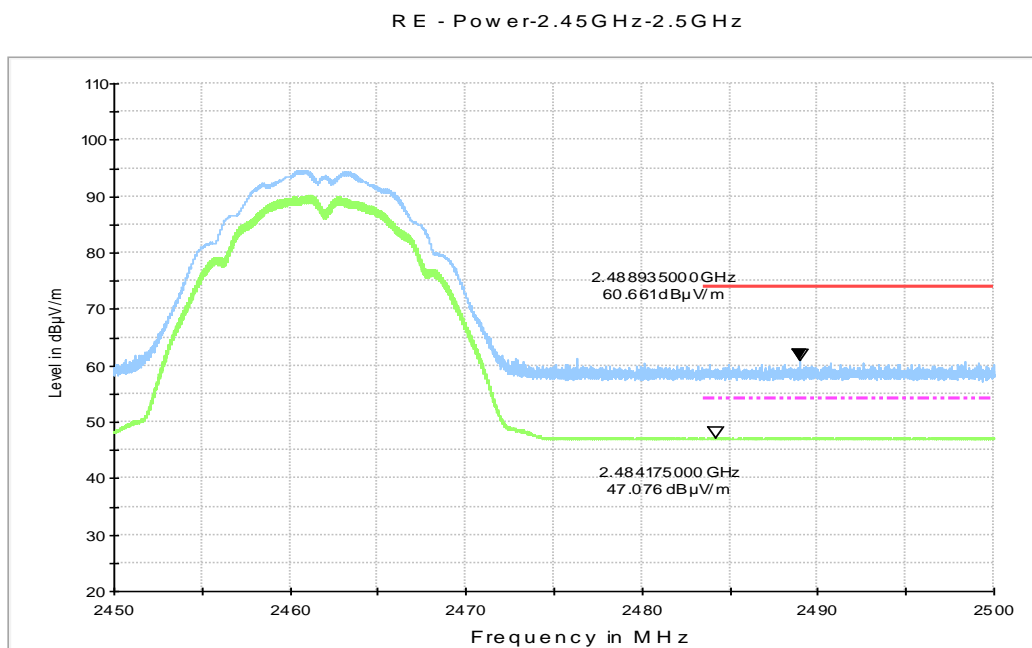


Fig.A.6.2.2 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz

RE - Power-2.31GHz-2.45GHz

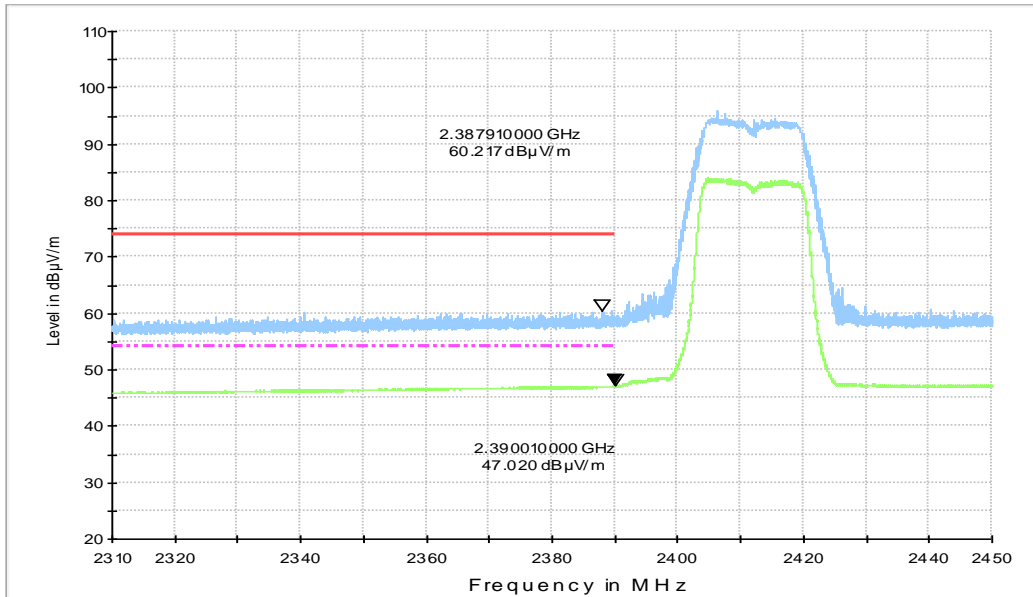


Fig.A.6.2.3 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.31 GHz - 2.43GHz

RE - Power-2.45GHz-2.5GHz

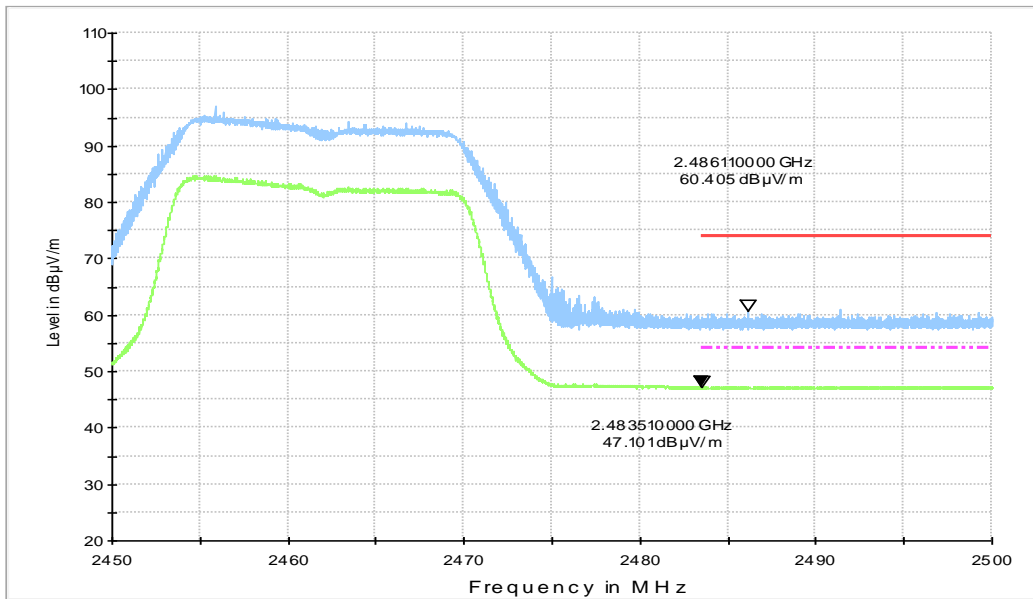


Fig.A.6.2.4 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz

RE - Power-2.31GHz-2.45GHz

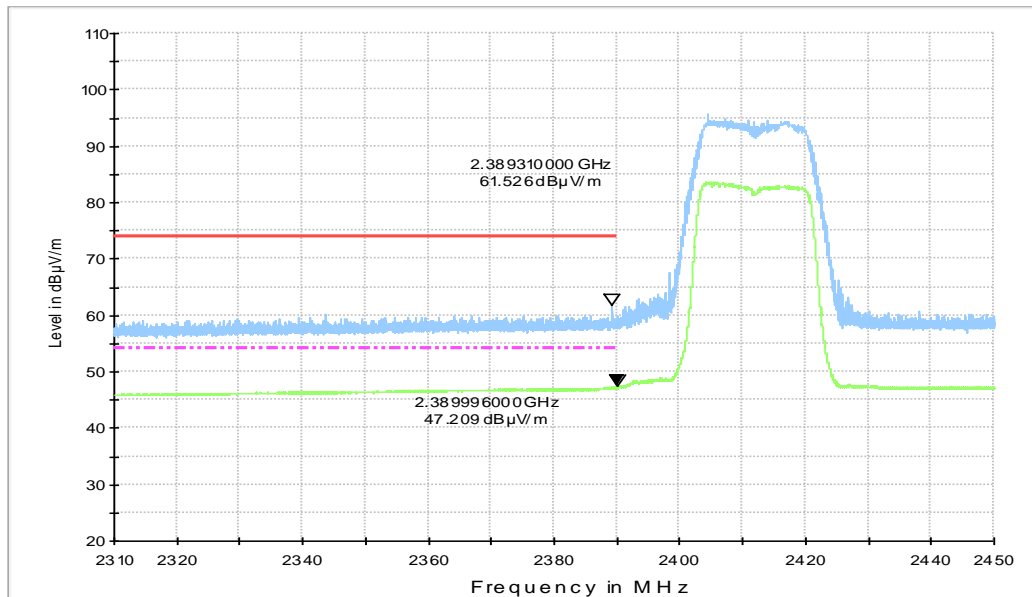


Fig.A.6.2.5 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.31GHz - 2.45GHz

RE - Power-2.45GHz-2.5GHz

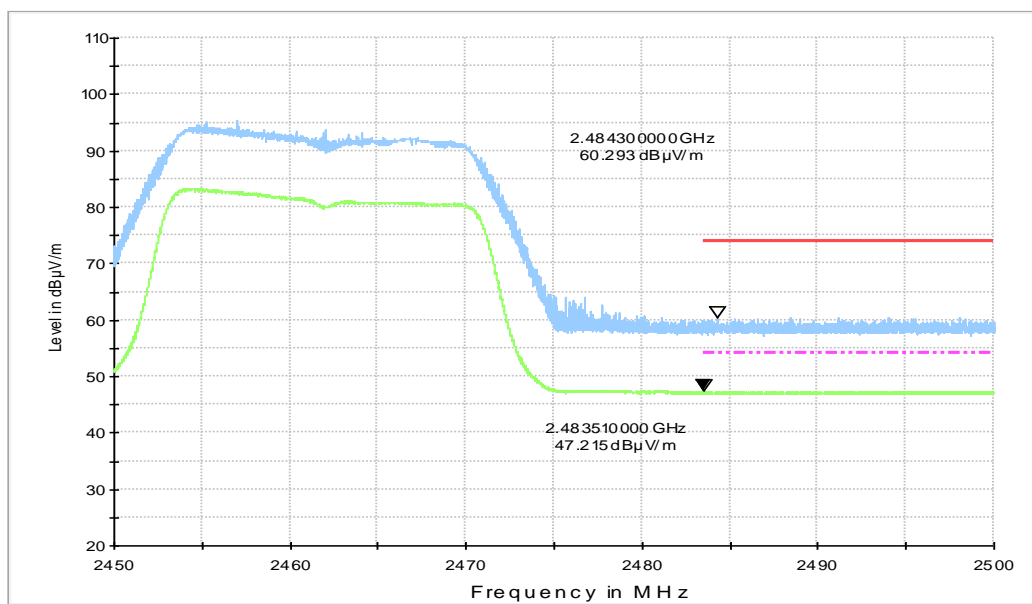


Fig.A.6.2.6 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz

A.7. AC Power-line Conducted Emission

Method of Measurement: See ANSI C63.10-2013-clause 6.2

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
- 5 If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	66 to 56	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass
Test graphs as below:

Traffic:

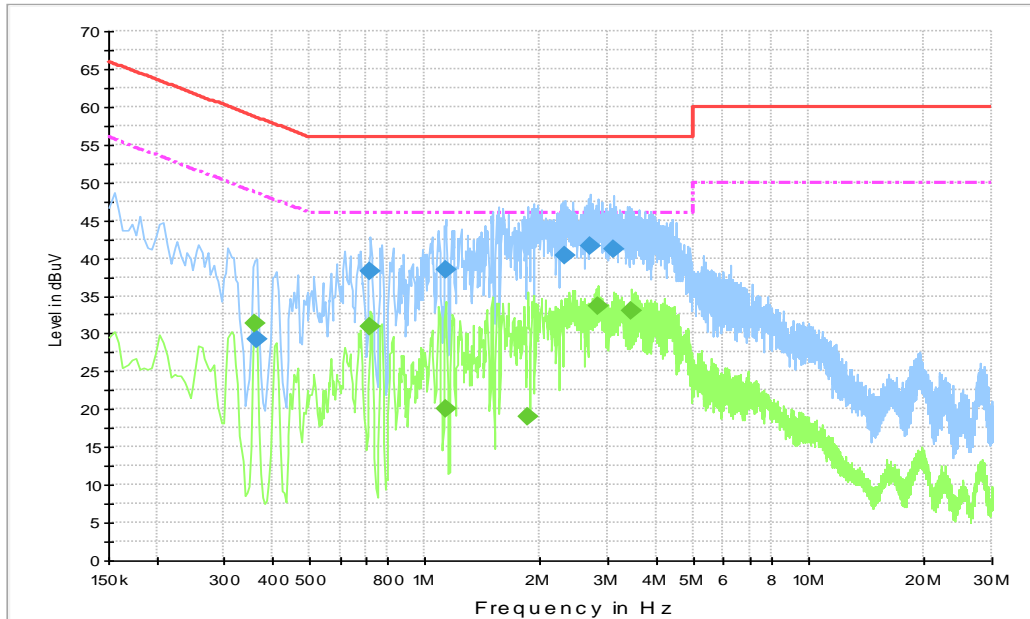


Fig.A.7.1 AC Powerline Conducted Emission-802.11b

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.366000	29.3	5000.0	9.000	L1	19.9	29.3	58.6
0.721500	38.2	5000.0	9.000	L1	19.9	17.8	56.0
1.131000	38.4	5000.0	9.000	L1	19.8	17.6	56.0
2.323500	40.4	5000.0	9.000	L1	19.8	15.6	56.0
2.683500	41.6	5000.0	9.000	L1	19.8	14.4	56.0
3.097500	41.3	5000.0	9.000	L1	19.8	14.7	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.361500	31.3	5000.0	9.000	L1	19.9	17.4	48.7
0.721500	30.9	5000.0	9.000	L1	19.9	15.1	46.0
1.135500	20.1	5000.0	9.000	L1	19.8	25.9	46.0
1.860000	19.0	5000.0	9.000	L1	19.8	27.0	46.0
2.823000	33.6	5000.0	9.000	L1	19.8	12.4	46.0
3.466500	33.0	5000.0	9.000	L1	19.8	13.0	46.0

Note2: The measurement results showed here are worst cases of the combinations of different chargers.

Idle:

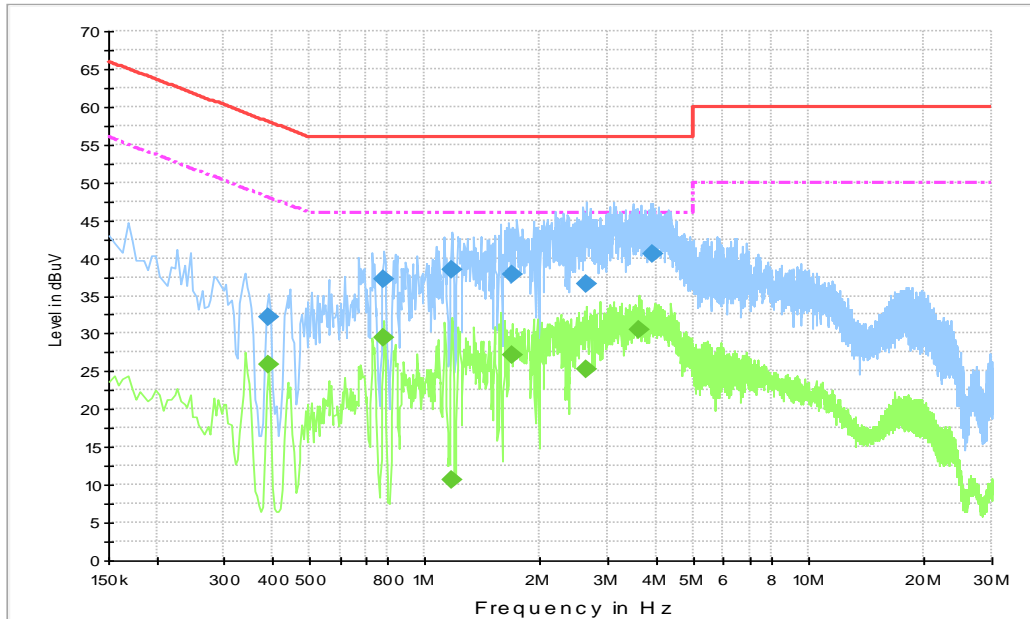


Fig.A.7.2 AC Powerline Conducted Emission-Idle

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.393000	32.1	5000.0	9.000	L1	20.0	25.9	58.0
0.784500	37.2	5000.0	9.000	L1	19.9	18.8	56.0
1.171500	38.4	5000.0	9.000	L1	19.8	17.6	56.0
1.684500	37.8	5000.0	9.000	L1	19.8	18.2	56.0
2.638500	36.6	5000.0	9.000	L1	19.8	19.4	56.0
3.930000	40.6	5000.0	9.000	L1	19.8	15.4	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.393000	26.0	5000.0	9.000	L1	20.0	22.0	48.0
0.784500	29.4	5000.0	9.000	L1	19.9	16.6	46.0
1.171500	10.6	5000.0	9.000	L1	19.8	35.4	46.0
1.684500	27.2	5000.0	9.000	L1	19.8	18.8	46.0
2.638500	25.3	5000.0	9.000	L1	19.8	20.7	46.0
3.597000	30.6	5000.0	9.000	L1	19.8	15.4	46.0

Note2: The measurement results showed here are worst cases of the combinations of different chargers

ANNEX C: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p> 	
<hr/> <p>Certificate of Accreditation to ISO/IEC 17025:2005</p> <hr/>	
<p>NVLAP LAB CODE: 600118-0</p>	
<p>Telecommunication Technology Labs, CAICT Beijing China</p>	
<p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p>	
<p>Electromagnetic Compatibility & Telecommunications</p>	
<p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p>	
<hr/> <p>2019-09-26 through 2020-09-30 <i>Effective Dates</i></p>	 <hr/> <p><i>[Signature]</i> For the National Voluntary Laboratory Accreditation Program</p>

END OF REPORT