



Appendix B

Detailed Test Results

1. GSM
GSM850 for E-Field Emission
GSM1900 for E-Field Emission
2. WiFi
WiFi 2.4G for E-Field Emission

Test Laboratory: SGS-SAR Lab

TA-1323 HAC-RF-GSM850 GSM Voice 128CH

DUT: TA-1323; Type: Smart Phone; Serial: A00000K5800B0500191

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.6896

Medium: Air; Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2020-05-29;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1428; Calibrated: 2020-03-03
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 52.61 V/m; Power Drift = 0.10 dB

Applied MIF = 3.63 dB

RF audio interference level = 36.12 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 35.19 dBV/m	Grid 2 M4 35.98 dBV/m	Grid 3 M4 35.74 dBV/m
Grid 4 M4 35.27 dBV/m	Grid 5 M4 36.12 dBV/m	Grid 6 M4 35.85 dBV/m
Grid 7 M4 35.12 dBV/m	Grid 8 M4 35.86 dBV/m	Grid 9 M4 35.59 dBV/m

Cursor:

Total = 36.12 dBV/m

E Category: M4

Location: -3, -0.5, 7.7 mm

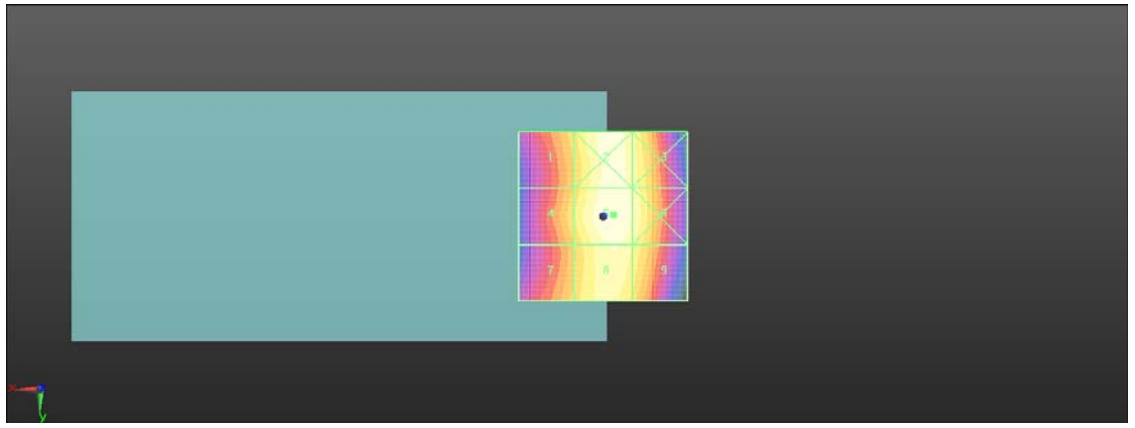

0 dB = 63.97 V/m = 36.12 dBV/m

Test Laboratory: SGS-SAR Lab

TA-1323 HAC-RF-GSM850 GSM Voice 190CH

DUT: TA-1323; Type: Smart Phone; Serial: A00000K5800B0500191

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz; Duty Cycle: 1:8.6896

Medium: Air; Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2020-05-29;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1428; Calibrated: 2020-03-03
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 52.80 V/m; Power Drift = -0.03 dB

Applied MIF = 3.63 dB

RF audio interference level = 35.71 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 34.64 dBV/m	Grid 2 M4 35.6 dBV/m	Grid 3 M4 35.42 dBV/m
Grid 4 M4 34.72 dBV/m	Grid 5 M4 35.71 dBV/m	Grid 6 M4 35.47 dBV/m
Grid 7 M4 34.61 dBV/m	Grid 8 M4 35.44 dBV/m	Grid 9 M4 35.21 dBV/m

Cursor:

Total = 35.71 dBV/m

E Category: M4

Location: -3.5, -1, 7.7 mm

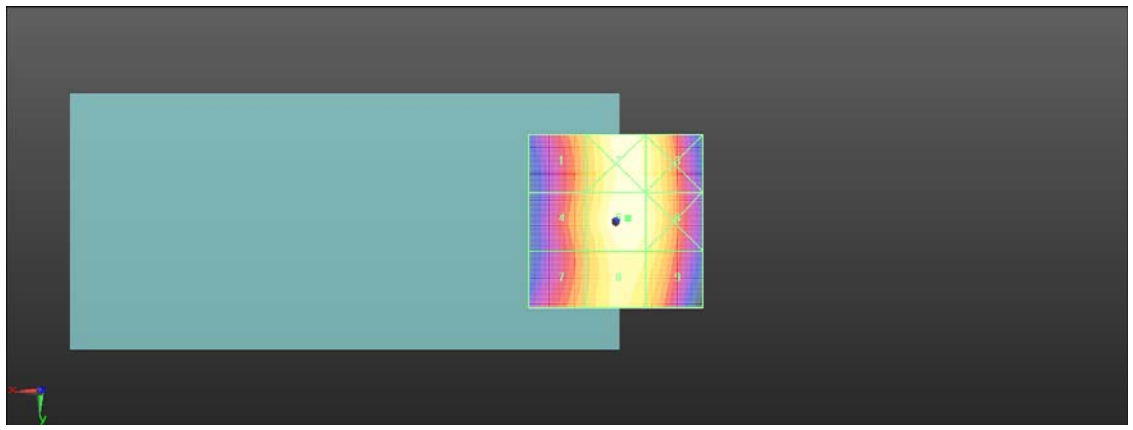

0 dB = 61.01 V/m = 35.71 dBV/m

Test Laboratory: SGS-SAR Lab

TA-1323 HAC-RF-GSM850 GSM Voice 251CH

DUT: TA-1323; Type: Smart Phone; Serial: A00000K5800B0500191

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.6896

Medium: Air; Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2020-05-29;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1428; Calibrated: 2020-03-03
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 55.53 V/m; Power Drift = -0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 36.14 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 35.06 dBV/m	Grid 2 M4 36.02 dBV/m	Grid 3 M4 35.84 dBV/m
Grid 4 M4 35.15 dBV/m	Grid 5 M4 36.14 dBV/m	Grid 6 M4 35.91 dBV/m
Grid 7 M4 35.08 dBV/m	Grid 8 M4 35.84 dBV/m	Grid 9 M4 35.62 dBV/m

Cursor:

Total = 36.14 dBV/m

E Category: M4

Location: -3.5, -1, 7.7 mm

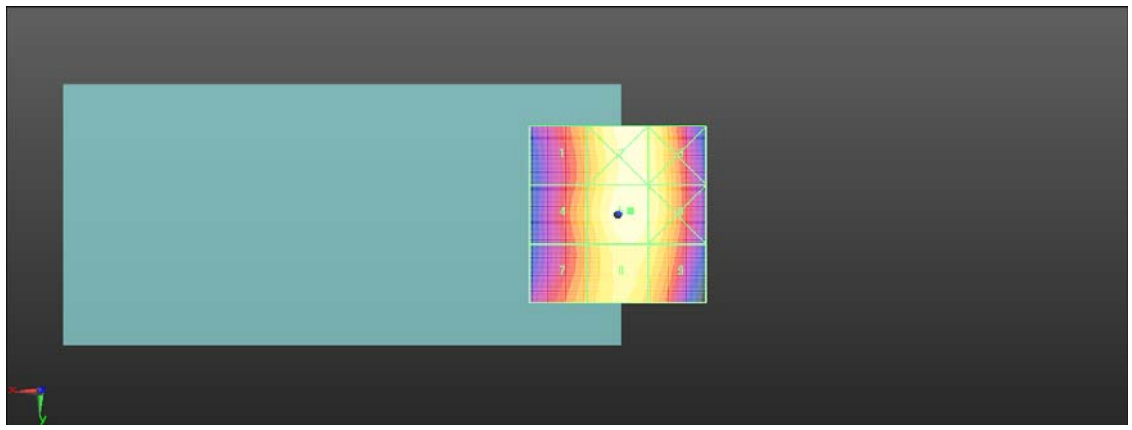

0 dB = 64.11 V/m = 36.14 dBV/m

Test Laboratory: SGS-SAR Lab

TA-1323 HAC-RF-GSM850 GSM Voice 251CH Sample2

DUT: TA-1323; Type: Smart Phone; Serial: A00000K5800B0500063

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.6896

Medium: Air; Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2020-05-29;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1428; Calibrated: 2020-03-03
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 55.23 V/m; Power Drift = -0.02 dB

Applied MIF = 3.63 dB

RF audio interference level = 36.08 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 35 dBV/m	Grid 2 M4 35.98 dBV/m	Grid 3 M4 35.76 dBV/m
Grid 4 M4 35.14 dBV/m	Grid 5 M4 36.08 dBV/m	Grid 6 M4 35.84 dBV/m
Grid 7 M4 35.09 dBV/m	Grid 8 M4 35.81 dBV/m	Grid 9 M4 35.57 dBV/m

Cursor:

Total = 36.08 dBV/m

E Category: M4

Location: -3.5, -0.5, 7.7 mm

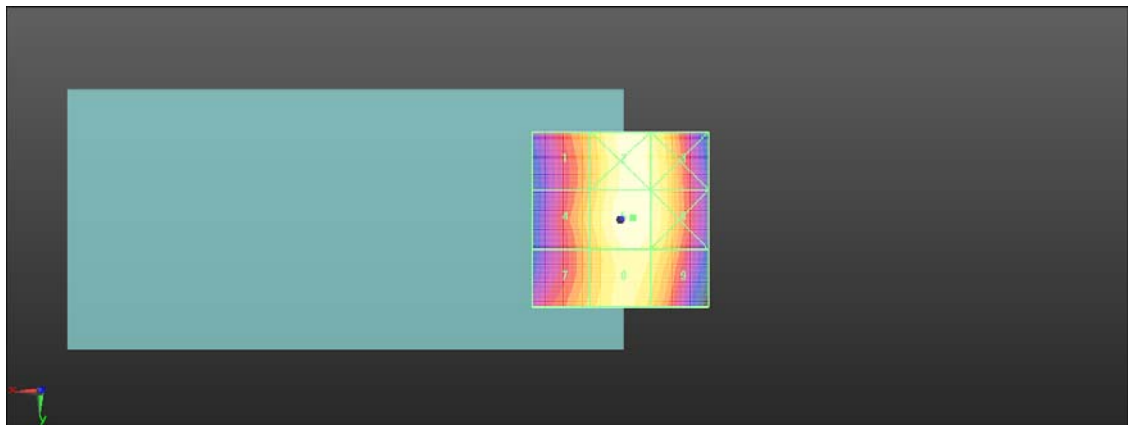

0 dB = 63.66 V/m = 36.08 dBV/m

Test Laboratory: SGS-SAR Lab

TA-1323 HAC-RF-GSM1900 GSM Voice 512CH

DUT: TA-1323; Type: Smart Phone; Serial: A00000K5800B0500191

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.6896

Medium: Air; Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2020-05-29;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1428; Calibrated: 2020-03-03
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 26.36 V/m; Power Drift = -0.04 dB

Applied MIF = 3.63 dB

RF audio interference level = 31.08 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M3 30.13 dBV/m	Grid 2 M4 29.45 dBV/m	Grid 3 M4 29 dBV/m
Grid 4 M4 29.33 dBV/m	Grid 5 M3 31.08 dBV/m	Grid 6 M3 30.8 dBV/m
Grid 7 M3 31.47 dBV/m	Grid 8 M3 32.59 dBV/m	Grid 9 M3 31.94 dBV/m

Cursor:

Total = 32.59 dBV/m

E Category: M3

Location: -0.5, 25, 7.7 mm

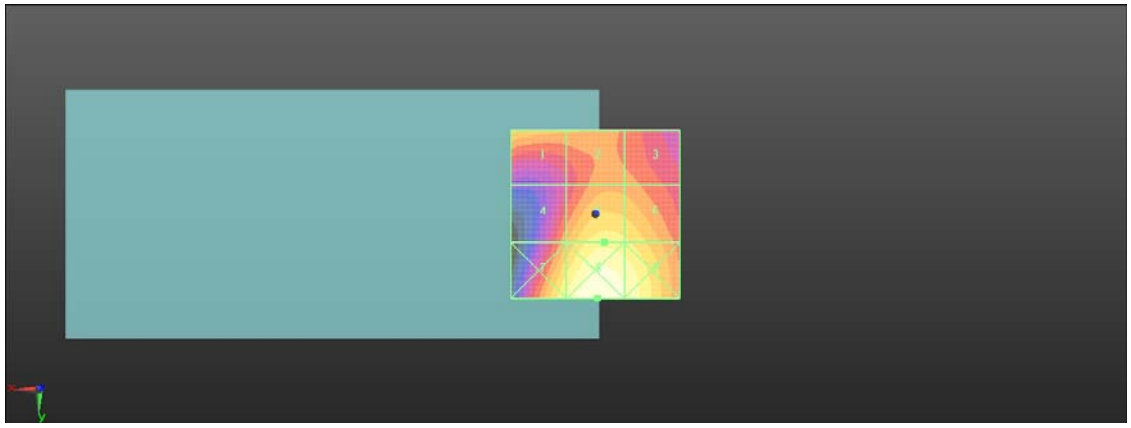

0 dB = 42.59 V/m = 32.59 dBV/m

Test Laboratory: SGS-SAR Lab

TA-1323 HAC-RF-GSM1900 GSM Voice 661CH

DUT: TA-1323; Type: Smart Phone; Serial: A00000K5800B0500191

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.6896

Medium: Air; Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2020-05-29;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1428; Calibrated: 2020-03-03
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 27.11 V/m; Power Drift = 0.00 dB

Applied MIF = 3.63 dB

RF audio interference level = 31.41 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M3 30.83 dBV/m	Grid 2 M3 30.9 dBV/m	Grid 3 M4 29.95 dBV/m
Grid 4 M4 29.27 dBV/m	Grid 5 M3 31.41 dBV/m	Grid 6 M3 31.25 dBV/m
Grid 7 M3 31.33 dBV/m	Grid 8 M3 32.81 dBV/m	Grid 9 M3 32.44 dBV/m

Cursor:

Total = 32.81 dBV/m

E Category: M3

Location: -2, 25, 7.7 mm

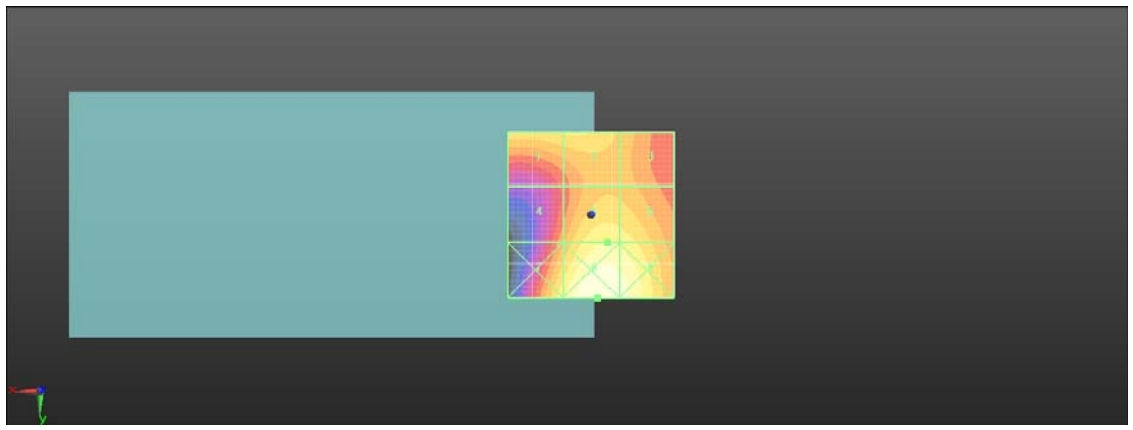

0 dB = 43.69 V/m = 32.81 dBV/m

Test Laboratory: SGS-SAR Lab

TA-1323 HAC-RF-GSM1900 GSM Voice 810CH

DUT: TA-1323; Type: Smart Phone; Serial: A00000K5800B0500191

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.6896

Medium: Air; Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2020-05-29;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1428; Calibrated: 2020-03-03
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 29.72 V/m; Power Drift = 0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 32.09 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M3 31.63 dBV/m	Grid 2 M3 31.71 dBV/m	Grid 3 M3 30.83 dBV/m
Grid 4 M4 29.56 dBV/m	Grid 5 M3 32.09 dBV/m	Grid 6 M3 32 dBV/m
Grid 7 M3 31.49 dBV/m	Grid 8 M3 33.27 dBV/m	Grid 9 M3 33.03 dBV/m

Cursor:

Total = 33.27 dBV/m

E Category: M3

Location: -2.5, 25, 7.7 mm

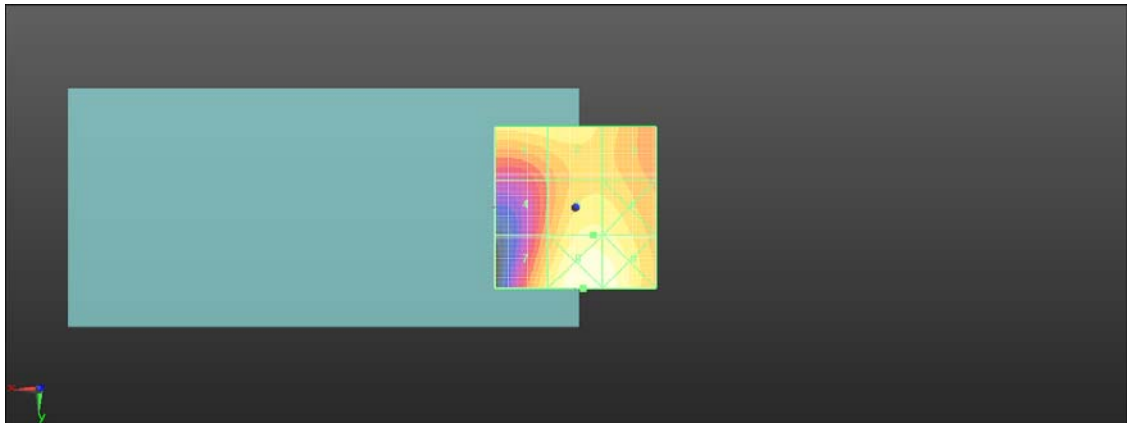

0 dB = 46.06 V/m = 33.27 dBV/m

Test Laboratory: SGS-SAR Lab

TA-1323 HAC-RF-GSM1900 GSM Voice 810CH Sample2

DUT: TA-1323; Type: Smart Phone; Serial: A00000K5800B0500063

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.6896

Medium: Air; Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2020-05-29;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1428; Calibrated: 2020-03-03
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 29.79 V/m; Power Drift = -0.02 dB

Applied MIF = 3.63 dB

RF audio interference level = 32.06 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M3 31.65 dBV/m	Grid 2 M3 31.69 dBV/m	Grid 3 M3 30.81 dBV/m
Grid 4 M4 29.51 dBV/m	Grid 5 M3 32.06 dBV/m	Grid 6 M3 31.99 dBV/m
Grid 7 M3 31.46 dBV/m	Grid 8 M3 33.23 dBV/m	Grid 9 M3 32.99 dBV/m

Cursor:

Total = 33.23 dBV/m

E Category: M3

Location: -4, 25, 7.7 mm

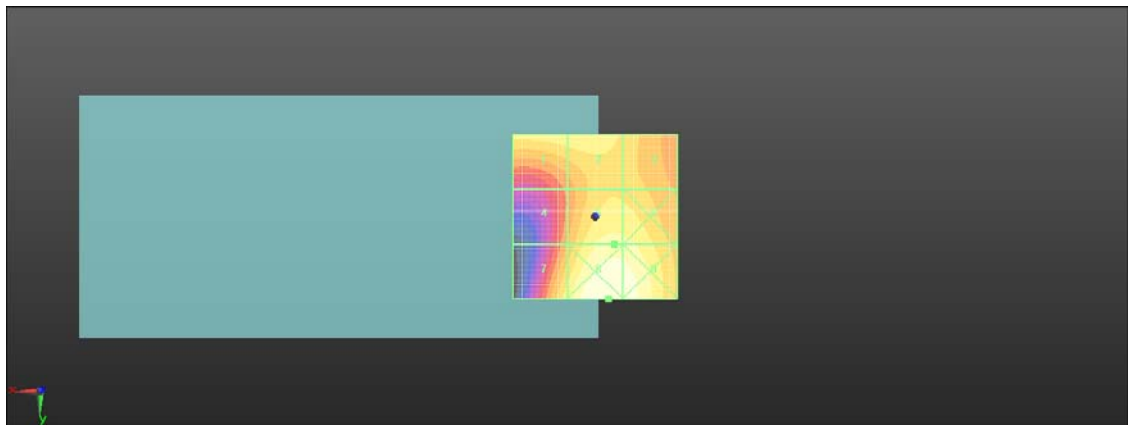

0 dB = 45.86 V/m = 33.23 dBV/m

Test Laboratory: SGS-SAR Lab

TA-1323 HAC-RF-WiFi 2.4G 802.11b 1CH

DUT: TA-1323; Type: Smart Phone; Serial: A00000K5800B0500191

Communication System: UID 10061 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps);
Frequency: 2412 MHz; Duty Cycle: 1:2.29087

Medium: Air; Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2020-05-29;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1428; Calibrated: 2020-03-03
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 58.05 V/m; Power Drift = -0.03 dB

Applied MIF = -5.90 dB

RF audio interference level = 28.46 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 23.12 dBV/m	Grid 2 M4 24.15 dBV/m	Grid 3 M4 23.71 dBV/m
Grid 4 M4 27.87 dBV/m	Grid 5 M4 28.46 dBV/m	Grid 6 M4 27.22 dBV/m
Grid 7 M4 28.36 dBV/m	Grid 8 M4 28.9 dBV/m	Grid 9 M4 27.6 dBV/m

Cursor:

Total = 28.90 dBV/m

E Category: M4

Location: 1.5, 16, 7.7 mm

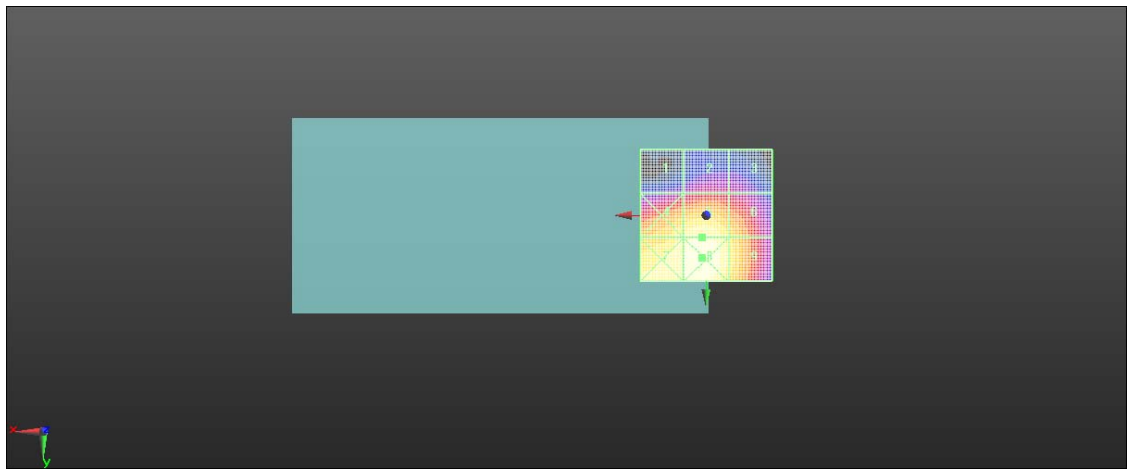

0 dB = 27.86 V/m = 28.90 dBV/m

Test Laboratory: SGS-SAR Lab

TA-1323 HAC-RF-WiFi 2.4G 802.11b 6CH

DUT: TA-1323; Type: Smart Phone; Serial: A00000K5800B0500191

Communication System: UID 10061 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps);
Frequency: 2437 MHz; Duty Cycle: 1:2.29087

Medium: Air; Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2020-05-29;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1428; Calibrated: 2020-03-03
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 29.06 V/m; Power Drift = 0.01 dB

Applied MIF = 0.12 dB

RF audio interference level = 28.31 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 23 dBV/m	Grid 2 M4 23.81 dBV/m	Grid 3 M4 23.63 dBV/m
Grid 4 M4 27.85 dBV/m	Grid 5 M4 28.31 dBV/m	Grid 6 M4 26.97 dBV/m
Grid 7 M4 28.31 dBV/m	Grid 8 M4 28.8 dBV/m	Grid 9 M4 27.27 dBV/m

Cursor:

Total = 28.80 dBV/m

E Category: M4

Location: 1.5, 16, 7.7 mm

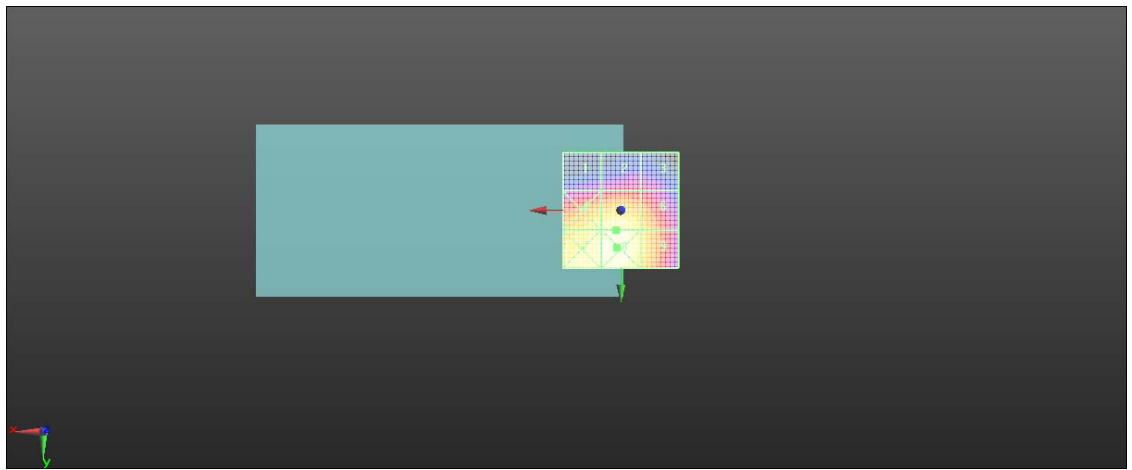

0 dB = 27.56 V/m = 28.80 dBV/m

Test Laboratory: SGS-SAR Lab

TA-1323 HAC-RF-WiFi 2.4G 802.11b 11CH

DUT: TA-1323; Type: Smart Phone; Serial: A00000K5800B0500191

Communication System: UID 10061 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps);
Frequency: 2462 MHz; Duty Cycle: 1:2.29087

Medium: Air; Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2020-05-29;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1428; Calibrated: 2020-03-03
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 27.87 V/m; Power Drift = 0.01 dB

Applied MIF = 0.12 dB

RF audio interference level = 27.76 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 22.92 dBV/m	Grid 2 M4 23.67 dBV/m	Grid 3 M4 23.57 dBV/m
Grid 4 M4 27.33 dBV/m	Grid 5 M4 27.76 dBV/m	Grid 6 M4 26.56 dBV/m
Grid 7 M4 27.64 dBV/m	Grid 8 M4 28.16 dBV/m	Grid 9 M4 26.72 dBV/m

Cursor:

Total = 28.16 dBV/m

E Category: M4

Location: 1.5, 16, 7.7 mm

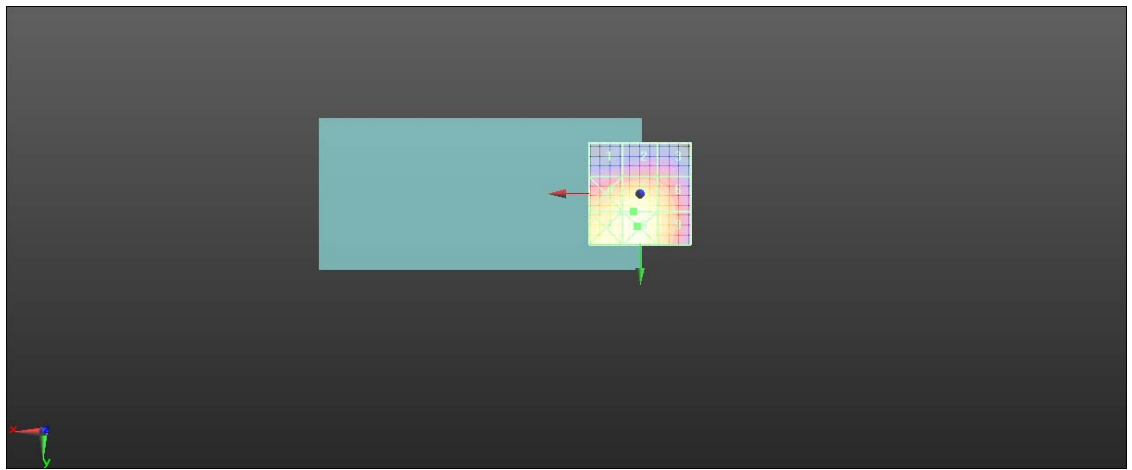

0 dB = 25.59 V/m = 28.16 dBV/m

Test Laboratory: SGS-SAR Lab

TA-1323 HAC-RF-WiFi 2.4G 802.11b 1CH-Sample2

DUT: TA-1323; Type: Smart Phone; Serial: A00000K5800B0500063

Communication System: UID 10061 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps);
Frequency: 2412 MHz; Duty Cycle: 1:2.29087

Medium: Air; Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2020-05-29;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1428; Calibrated: 2020-03-03
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 29.09 V/m; Power Drift = 0.01 dB

Applied MIF = -2.02 dB

RF audio interference level = 26.17 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 20.86 dBV/m	Grid 2 M4 21.67 dBV/m	Grid 3 M4 21.49 dBV/m
Grid 4 M4 25.71 dBV/m	Grid 5 M4 26.17 dBV/m	Grid 6 M4 24.83 dBV/m
Grid 7 M4 26.17 dBV/m	Grid 8 M4 26.67 dBV/m	Grid 9 M4 25.13 dBV/m

Cursor:

Total = 26.67 dBV/m

E Category: M4

Location: 1.5, 16, 7.7 mm

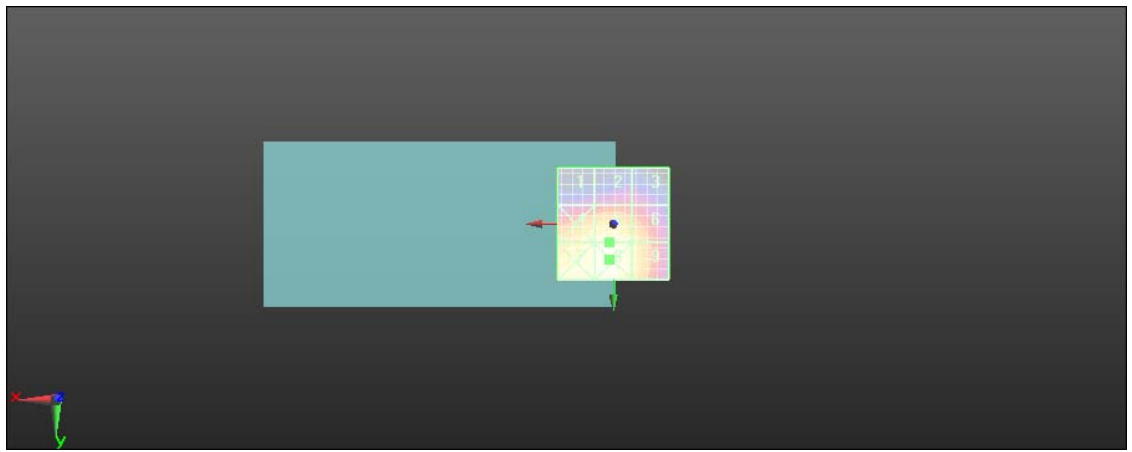

0 dB = 21.55 V/m = 26.67 dBV/m