

Report No.: ZR/2021/1004901

Page: 1 of 36

FCC TEST REPORT

Application No.: ZR/2021/10049 Applicant: HMD Global Oy

Address of Applicant Bertel Jungin aukio 9, 02600 Espoo, Finland

Manufacturer: HMD Global Oy

Address of Manufacturer Bertel Jungin aukio 9, 02600 Espoo, Finland

EUT Description: smart phone Model No.: TA-1341 **Trade Mark:** Nokia

FCC ID: 2AJOTTA-1341 Standards: 47 CFR Part 2

> 47 CFR Part 22 subpart H 47 CFR Part 24 subpart E 47 CFR Part 27 subpart C

FCC KDB 971168 D01 Power Meas License Digital Systems V03r01 Test Method:

C63.26 (2015)

Date of Receipt: 2021/1/29

Date of Test: 2021/1/29 to 2021/3/3

Date of Issue: 2021/3/9

Test Result: PASS *

In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Derek Yang Wireless Laboratory Manager

Derde yang





Report No.: ZR/2021/1004901

Page: 2 of 36

1 Version

Revision Record						
Version	Chapter	Date	Modifier	Remark		
01		2021-03-09		Original		

Authorized for issue by:	
Prepared By	Dee.Zheng
	(Dee Zheng) / Engineer
	Daniel Wang
Checked By	
	(Daniel Wang) / Reviewer





Report No.: ZR/2021/1004901

Page: 3 of 36

Contents

1	vers	SION	
2	Test	t Summary	5
	2.1	GSM850/UMTS Band 5 & LTE Band 5	5
	2.2	GSM 1900/UMTS Band 2 /LTE Band 2	5
	2.3	UMTS Band 4 /LTE Band 4 /66	6
	2.4	LTE Band 7/38/41/CA_7C/CA_38C/CA_41C	6
	2.5		
3	Gen	eral Information	9
	3.1	Details of Client	
	3.2	Test Location	9
	3.3	Test Facility	10
	3.4	General Description of EUT	11
	3.5	Test Mode	11
	3.6	Test Environment	12
	3.7	Technical Specification	12
	3.8	Test Frequencies	16
4	Des	cription of Tests	23
	4.1	Conducted Output Power	23
	4.2	Effective (Isotropic) Radiated Power of Transmitter	23
	4.3	Occupied Bandwidth	23
	4.4	Band Edge at Antenna Terminals	24
	4.5	Spurious And Harmonic Emissions at Antenna Terminal	24
	4.6	Peak-Average Ratio	25
	4.7	Field Strength of Spurious Radiation	26
	4.8	Frequency Stability / Temperature Variation	27
	4.9	Test Setups	28
		4.9.1 Test Setup 1	28
		4.9.2 Test Setup 2	28
		4.9.3 Test Setup 3	29
	4.10	0 Test Conditions	30
5	Mair	n Test Instruments	33



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.:	ZR/2021/1004901	
Page:	4 of 36	

6	Measurement Uncertainty	.35
7	Appendixes	.36





Report No.: ZR/2021/1004901

5 of 36 Page:

Test Summary 2

2.1 GSM850/UMTS Band 5 & LTE Band 5

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*	
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913	FCC: ERP ≤ 7 W	Section 1 of Appendix B	Pass	А	
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B	Pass	А	
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	А	
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	Α	
Band Edges Compliance	§2.1051, §22.917	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	А	
Spurious Emission at Antenna Terminals	§2.1051, §22.917	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	А	
Field Strength of Spurious Radiation	§2.1053, §22.917	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B	Pass	В	
Frequency Stability	§2.1055, §22.355	≤ ±2.5ppm.	Section 8 of Appendix B	Pass	А	
Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".						

2.2 GSM 1900/UMTS Band 2 /LTE Band 2

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232	EIRP ≤ 2 W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§2.1046, §24.232	Limit≤13 dB	Section 2 of Appendix B	Pass	А
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	Α
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	Α



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of ilability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2021/1004901

6 of 36 Page:

Band Edges Compliance	§2.1051, §24.238	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	А	
Spurious Emission at Antenna Terminals	§2.1051, §24.238	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	A	
Field Strength of Spurious Radiation	§2.1053, §24.238	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass	В	
Frequency Stability	§2.1055, §24.235	≤ ±2.5 ppm.	Section 8 of Appendix B	Pass	А	
Remark: For the ve	Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".					

2.3 UMTS Band 4 /LTE Band 4 /66

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)	EIRP ≤ 1 W	Section 1 of Appendix B	Pass	А
Peak-Average Ratio	§2.1046, §27.50(d)	Limit≤13 dB	Section 2 of Appendix B	Pass	Α
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	Α
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	А
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	А
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	А
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §27.54	≤ ±2.5 ppm. denotes "not applicable", the "N/T" deno	Section 8 of Appendix B	Pass	А

2.4 LTE Band 7/38/41/CA 7C/CA 38C/CA 41C

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power	§2.1046, §27.50(h)	EIRP ≤ 2W	Section 1 of Appendix B	Pass	А



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of ilability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, in any any and the company's findings at the time of its intervention only and within the limits of transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

中国·深圳·科技园中区M-10栋一号厂房

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2021/1004901

Page. 7 of 36

		Page	e: / of 3	00	1
Output Data					
Peak-Average Ratio	§27.50(a)	≤13 dB	Section 2 of Appendix B	Pass	Α
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	А
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	Α
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.	Section 5 of Appendix B	Pass	Α
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	Channel Edge -25dBm/ 1 MHz 1 MHz 1 MHz 9 kHz 95 MHz XMHz 10th harmonics X=Max {6MHz, EBW}	Section 6 of Appendix B	Pass	Α
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	Channel Edge -25dBm/ 1 MHz 1 MHz 1 MHz 9 kHz 95 MHz X MHz 10th harmonics X=Max {6MHz, EBW}	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B	Pass	А
Remark: For the ve	erdict, the "N/A"	denotes "not applicable", the "N/T" den	otes "not tested		

2.5 LTE Band 12

					
Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power	§27.50(c)	FCC: ERP ≤ 3 W.	Section 1 of Appendix B	Pass	А



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2021/1004901

Page: 8 of 36

Output Data		. ag		-	
Peak-Average Ratio	§2.1046, §27.50(c)	Limit≤13 dB	Section 2 of Appendix B	Pass	А
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	А
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	А
Band Edges Compliance	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	А
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §27.54	≤ ±2.5ppm.	Section 8 of Appendix B	Pass	А
Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".					





Report No.: ZR/2021/1004901

9 of 36 Page:

General Information 3

3.1 Details of Client

Applicant:	HMD Global Oy
Address of Applicant	Bertel Jungin aukio 9, 02600 Espoo, Finland
Manufacturer:	HMD Global Oy
Address of Manufacturer	Bertel Jungin aukio 9, 02600 Espoo, Finland

3.2 Test Location

Lab A:

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
Post code:	518057

I ab B:

Company:	SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD.
Address:	1/F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, Xi'an, Shaanxi China
Post code:	710086





Report No.: ZR/2021/1004901

10 of 36 Page:

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Lab A:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

VCCI

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC -Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

Lab B:

A2LA (Certificate No. 4854.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4854.01.

FCC Designation Number: CN1271.





Report No.: ZR/2021/1004901

11 of 36 Page:

3.4 General Description of EUT

EUT Description:	smart phone			
Model No.:	TA-1341			
Trade Mark:	Nokia			
Hardware Version:	V1.0			
Software Version:	00WW_0_226			
Sample Type:	⊠ Portable Device,			
Antenna Type:	☐ External, ☑ Integrated			
Antenna Gain:	GSM850: -3.46dBi; GSM1900:-2.87dBi; WCDMA Band II:-3.06dBi; WCDMA Band IV:-2.80dB;i WCDMA Band V:-3.46dBi; LTE Band 2:-3.06dBi; LTE Band 4:-2.80dBi; LTE Band 5:-3.46dBi; LTE Band 7: -1.42dBi; LTE Band 12:-4.55dBi; LTE Band 38:0.36dBi; LTE Band 41:-0.52dBi; LTE Band 66:-2.80dBi; LTE CA_7C:-1.42dBi; LTE CA_7C:-1.42dBi; LTE CA_38C:0.36dBi; LTE CA_38C:0.36dBi;			

3.5 Test Mode

Test Mode	Test Modes Description
GSM/TM1	GSM system, GSM/GPRS, GMSK modulation
GSM/TM2	GSM system, EGPRS, 8PSK modulation
UMTS/TM1	UMTS system, WCDMA, QPSK modulation
LTE/TM1	LTE system, QPSK modulation
LTE/TM2	LTE system, 16QAM modulation
LTE/TM3	LTE system, 64QAM modulation

Remark: The test mode(s) are selected according to relevant radio technology specifications.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2021/1004901

12 of 36 Page:

3.6 Test Environment

Operating Environment:			
Humidity:	50 % RH		
Atmospheric Pressure:	101.30 KPa		
Temperature	NT	25 °C	
	LV	3.3V	
Voltage:	NV	3.87V	
	HV	4.45V	

Remark: LV= lower extreme test voltage; NV= nominal voltage HV= upper extreme test voltage; NT= normal temperature

3.7 Technical Specification

Characteristics	Description			
	⊠ GSM			
Radio System Type	□ UMTS			
	Band	TX	RX	
	GSM850	824 to 849 MHz	869 to 894 MHz	
	GSM1900	1850 to 1910 MHz	1930 to 1990 MHz	
	UMTS Band II	1850 to 1910 MHz	1930 to 1990 MHz	
	UMTS Band IV	1710 to 1755 MHz	2110 to 2155 MHz	
	UMTS Band V	824 to 849 MHz	869 to 894 MHz	
	LTE Band 2	1850 to 1910 MHz	1930 to 1990 MHz	
	LTE Band 4	1710 to 1755 MHz	2110 to 2155 MHz	
Supported Frequency Range	LTE Band 5	824 to 849 MHz	869 to 894 MHz	
	LTE Band 7	2500 to 2570 MHz	2620 to 2690 MHz	
	LTE Band 12	699 to 716 MHz	729 to 746 MHz	
	LTE Band 38	2570 to 2620 MHz	2570 to 2620 MHz	
	LTE Band 41	2496 to 2690MHz	2496 to 2690MHz	
	LTE Band 66	1710 to 1780 MHz	2110 to 2200 MHz	
	LTE CA_7C	2500 to 2570 MHz	2620 to 2690 MHz	
	LTE CA_38C	2570 to 2620 MHz	2570 to 2620 MHz	
	LTE CA_41C	2496 to 2690MHz	2496 to 2690MHz	
Target TX Output Power	GSM850:33.5dBm GSM1900: 30.5dBm UMTS Band II: 24dBm			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2021/1004901

Page. 13 of 36

		'age:	13 of 36
	UMTS Band IV: 24dBm		
	UMTS Band V: 24.5dBm		
	LTE Band 2: 24dBm		
	LTE Band 4: 24dBm		
	LTE Band 5: 24dBm		
	LTE Band 7: 24dBm		
	LTE Band 12: 24dBm		
	LTE Band 38: 24dBm		
	LTE Band 41: 24dBm		
	LTE Band 41. 24dBm		
	LTE CA_7C: 24dBm		
	LTE CA_7C. 24dBm		
	_		
	LTE CA_41C: 24dBm	Maass	I
	GSM system:	<u> </u>	
	UMTS system:	∑5 MHz	
	LTE Band 2	10 MHz;	Hz;⊠3 MHz; ⊠5 MHz; ⊠ ⊠15 MHz, ⊠20 MHz
	LTE Band 4	10 MHz;	Hz;⊠3 MHz; ⊠5 MHz; ⊠ ⊠15 MHz, ⊠20 MHz
	LTE Band 5	10 MHz	Hz;⊠3 MHz; ⊠5 MHz; ⊠
	LTE Band 7	20 MHz	; ⊠10 MHz; ⊠15 MHz, ⊠
	LTE Band 12	10 MHz	Hz;⊠3 MHz; ⊠5 MHz; ⊠
	LTE Band38	20 MHz	; ⊠10 MHz; ⊠15 MHz, ⊠
	LTE Band41	20 MHz	; ⊠10 MHz; ⊠15 MHz, ⊠
	LTE Band66		Hz;⊠3 MHz; ⊠5 MHz; ⊠ ⊠15 MHz, ⊠20 MHz
Supported Channel Bandwidth			⊠10MHz+20MHz
Capportoa Chamioi Banawidin			⊠10MHz+15MHz
	LTE D		∑15MHz+15MHz
	LTE Band CA_7C		
			⊠15MHz+20MHz
			⊠20MHz+20MHz
		1	
	LTE Band CA_38C		⊠15MHz+15MHz
	2.2 Sand 67666		⊠20MHz+20MHz
			∑5MHz+20MHz
			∑10MHz+15MHz
	LTE Day LOA 140		⊠10MHz+20MHz
	LTE Band CA_41C		⊠15MHz+15MHz
			⊠15MHz+20MHz
			∑20MHz+20MHz
	Note1: WCDMA supports HSUPA, HSDPA, HSPA+, but only the worst case		
	was tested and the data displayed in this report.		
Characteristics	Description		
	[] · · ·		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2021/1004901

14 of 36 Page:

	GSM850	246KGXW; 244KG7W
	GSM1900	247KGXW; 243KG7W
	UMTS Band II	4M18F9W;
	UMTS Band IV	4M18F9W;
	UMTS Band V	4M16F9W;
		1M09G7D;1M09W7D; 1M09W7D
		2M70G7D;2M69W7D; 2M69W7D
	LTE David O	4M48G7D;4M50W7D; 4M48W7D
	LTE Band 2	8M93G7D;8M95W7D; 8M95W7D
		13M5G7D;13M5W7D; 13M5W7D
		17M9G7D;17M9W7D; 17M9W7D
		1M10G7D;1M09W7D; 1M09W7D
		2M70G7D;2M69W7D; 2M69W7D
	LTE Daniel 4	4M48G7D;4M49W7D; 4M49W7D
	LTE Band 4	8M95G7D;8M95W7D; 8M95W7D
		13M5G7D;13M5W7D; 13M5W7D
		17M9G7D;17M9W7D; 17M9W7D
Designation of Emissions		1M09G7D;1M09W7D; 1M09W7D
<u> </u>	LTE Band 5	2M70G7D;2M69W7D; 2M69W7D
(Remark: the necessary bandwidth of which is the	LIE Baild 5	4M48G7D;4M50W7D; 4M48W7D
worst value from the		8M97G7D;8M93W7D; 8M93W7D
measured occupied		4M48G7D;4M50W7D; 4M48W7D
bandwidths for each type of	LTE Band 7	8M93G7D;8M95W7D; 8M95W7D
channel bandwidth	LIL Balld /	13M5G7D;13M5W7D; 13M5W7D
configuration.)		17M9G7D;17M9W7D; 17M9W7D
Corniguration.)	LTE Band 12	1M09G7D;1M09W7D; 1M09W7D
		2M70G7D;2M69W7D; 2M69W7D
		4M48G7D;4M50W7D; 4M48W7D
		8M93G7D;8M93W7D; 8M91W7D
	LTE Band 38	4M48G7D;4M50W7D; 4M49W7D
		8M91G7D;8M93W7D; 8M95W7D
		13M5G7D;13M5W7D; 13M5W7D
		17M9G7D;18M0W7D; 17M9W7D
		4M48G7D;4M50W7D; 4M49W7D
	LTE Band 41	8M91G7D;8M93W7D; 8M95W7D
		13M5G7D;13M5W7D; 13M5W7D
		17M9G7D;17M9W7D; 17M9W7D
		1M09G7D;1M09W7D; 1M10W7D
		2M69G7D;2M69W7D; 2M70W7D
	LTE Band 66	4M48G7D;4M49W7D; 4M49W7D
		8M93G7D;8M93W7D; 8M95W7D
		13M5G7D;13M5W7D; 13M5W7D
		17M9G7D;17M9W7D; 17M9W7D
		50RB+100RB:27M7G7D;27M7W7D; 27M7W7D
		75RB+50RB:23M2G7D;23M2W7D; 23M2W7D
		75RB+75RB:28M3G7D;28M3W7D; 28M3W7D
	LTE Band CA_7C	75RB+100RB:32M6G7D;32M6W7D; 32M6W7D
	_	100RB+50RB:27M8G7D;27M8W7D; 27M8W7D
		100RB+75RB:32M7G7D;32M7W7D; 32M7W7D
		100RB+100RB:37M5G7D;37M5W7D;
		37M5W7D
	LTE Band CA_38C	75RB+75RB:28M3G7D;28M3W7D; 28M3W7D
		100RB+100RB:37M6G7D;37M5W7D;



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2021/1004901

Page: 15 of 36

	37M5W7D
	25RB+100RB:22M8G7D;22M8W7D; 22M8W7D
	50RB+75RB:23M1G7D;23M1W7D; 23M1W7D
	50RB+100RB:27M7G7D;27M7W7D; 27M7W7D
	75RB+50RB:23M2G7D;23M2W7D; 23M2W7D
	75RB+75RB:28M3G7D;28M3W7D; 28M3W7D
LTE Band CA_41C	75RB+100RB:32M7G7D;32M7W7D; 32M7W7D
	100RB+25RB:23M0G7D;22M9W7D; 23M0W7D
	100RB+50RB:27M8G7D;27M8W7D; 27M8W7D
	100RB+75RB:32M7G7D;32M7W7D; 32M7W7D
	100RB+100RB:37M6G7D;37M6W7D;
	37M6W7D





Report No.: ZR/2021/1004901

Page: 16 of 36

3.8 Test Frequencies

Test Mode	TX / RX	RF Channel			
rest widde	IA/IX	Low (L)	Middle (M)	High (H)	
GSM850	TX	Channel 128	Channel 190	Channel 251	
		824.2MHz	836.6 MHz	848.8 MHz	
	RX	Channel 128	Channel 190	Channel 251	
		869.2 MHz	881.6 MHz	893.8 MHz	

Test Mode	TY / DY	TX / RX RF Channel				
i est ivioue	IA/IX	Low (L)	Middle (M)	High (H)		
	TX	Channel 512	Channel 661	Channel 810		
GSM1900		1850.2MHz	1880.0 MHz	1909.8 MHz		
GSW1900	RX	Channel 512	Channel 661	Channel 810		
		1930.2 MHz	1960.0 MHz	1989.8 MHz		

Test Mode	TX / RX	RF Channel				
Test Mode	1/ 1/ 1/	Low (L)	Middle (M)	High (H)		
	TX	Channel 9262	Channel 9400	Channel 9538		
WCDMA Bond II		1852.4 MHz	1880.0 MHz	1907.6 MHz		
WCDMA Band II	RX	Channel 9662	Channel 9800	Channel 9938		
		1932.4 MHz	1960.0 MHz	1987.6 MHz		

Test Mode	TX / RX		RF Channel	
1 est Mode	17/17	Low (L)	Middle (M)	High (H)
		Channel 1312	Channel 1413	Channel 1513
WCDMA Band IV	TX	1712.4MHz	1732.6 MHz	1752.6 MHz
WCDIVIA Ballu IV	RX	Channel 1537	Channel 1638	Channel 1738
	KΛ	2112.4 MHz	2132.6 MHz	2152.6 MHz

Test Mode	TX / RX		RF Channel			
i est ivioue	IA/ NA	Low (L)	Middle (M)	High (H)		
	TX	Channel 4132	Channel 4182	Channel 4233		
MCDMA Bond V		826.4MHz	836.4 MHz	846.6 MHz		
WCDMA Band V	DV	Channel 4357	Channel 4407	Channel 4458		
	RX	871.4 MHz	881.4 MHz	891.6 MHz		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch **Shenzhen Branch**

Report No.: ZR/2021/1004901

Page: 17 of 36

			RF Channel			
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)	
			Channel 18607	Channel 18900	Channel 19193	
		TX	1850.7 MHz	1880 MHz	1909.3 MHz	
	1.4MHz	DV	Channel 607	Channel 900	Channel 1193	
		RX	1930.7 MHz	1960 MHz	1989.3 MHz	
			Channel 18615	Channel 18900	Channel 19185	
		TX	1851.5 MHz	1880 MHz	1908.5 MHz	
	3MHz	RX	Channel 615	Channel 900	Channel 1185	
		NΛ	1931.5 MHz	1960 MHz	1988.5 MHz	
			Channel 18625	Channel 18900	Channel 19175	
	5MHz	TX	1852.5 MHz	1880 MHz	1907.5 MHz	
		RX	Channel 625	Channel 900	Channel1175	
LTE Daniel O			1932.5 MHz	1960 MHz	1987.5 MHz	
LTE Band 2	10MHz	TX	Channel 18650	Channel 18900	Channel 19150	
			1855 MHz	1880 MHz	1905 MHz	
		RX	Channel 650	Channel 900	Channel 1150	
			1935 MHz	1960 MHz	1985 MHz	
		_,,	Channel 18675	Channel 18900	Channel 19125	
		TX	1857.5 MHz	1880 MHz	1902.5 MHz	
	15MHz	RX	Channel 675	Channel 900	Channel 1125	
		100	1937.5 MHz	1960 MHz	1982.5 MHz	
			Channel 18700	Channel 18900	Channel 19100	
		TX	1860 MHz	1880 MHz	1900 MHz	
	20MHz	RX	Channel 700	Channel 900	Channel 1100	
		KΛ	1940 MHz	1960 MHz	1980 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2021/1004901

Page: 18 of 36

Toot Mode	Bandwidth	TX / RX		RF Channel	
Test Mode	Danuwium	IA/KA	Low (L)	Middle (M)	High (H)
			Channel 19957	Channel 20175	Channel 20393
		TX	1710.7 MHz	1732.5 MHz	1754.3 MHz
	1.4MHz	RX	Channel 1975	Channel 2175	Channel 2375
		KA	2112.5 MHz	2132.5MHz	2152.5 MHz
			Channel 19965	Channel 20175	Channel 20385
		TX	1711.5 MHz	1732.5 MHz	1753.5 MHz
	3MHz	RX	Channel 2000	Channel 2175	Channel 2350
		KΛ	2115 MHz	2132.5MHz	2150 MHz
	5MHz		Channel 19975	Channel 20175	Channel 20375
		TX	1712.5 MHz	1732.5 MHz	1752.5 MHz
		RX	Channel 1975	Channel 2175	Channel 2375
LTC Donal 4			2112.5 MHz	2132.5MHz	2152.5 MHz
LTE Band 4	10MHz		Channel 20000	Channel 20175	Channel 20350
		TX	1715 MHz	1732.5 MHz	1750 MHz
		RX	Channel 2000	Channel 2175	Channel 2350
			2115 MHz	2132.5MHz	2150 MHz
		_,,	Channel 20025	Channel 20175	Channel 20325
		TX	1717.5 MHz	1732.5 MHz	1747.5 MHz
	15MHz	RX	Channel 2025	Channel 2175	Channel 2325
		1070	2117.5 MHz	2132.5MHz	2147.5 MHz
			Channel 20050	Channel 20175	Channel 20300
		TX	1720 MHz	1732.5 MHz	1745 MHz
	20MHz	RX	Channel 2050	Channel 2175	Channel 2300
		KΛ	2120 MHz	2132.5MHz	2145 MHz

Toot Mode	Bandwidth	TV / DV		RF Channel	
Test Mode	Danuwium	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 20407	Channel 20525	Channel 20643
		TX	824.7 MHz	836.5 MHz	848.3 MHz
	1.4MHz	RX	Channel 2407	Channel 2525	Channel 2643
		NΛ	869.7 MHz	881.5 MHz	893.3 MHz
			Channel 20415	Channel 20525	Channel 20635
	3MHz	TX	825.5 MHz	836.5 MHz	847.5 MHz
		RX	Channel 2415	Channel 2525	Channel 2635
LTE Daniel E			870.5 MHz	881.5 MHz	892.5 MHz
LTE Band 5		TX	Channel 20425	Channel 20525	Channel 20625
			826.5 MHz	836.5 MHz	846.5 MHz
	5MHz	RX	Channel 2425	Channel 2525	Channel 2625
		NΛ	871.5 MHz	881.5 MHz	891.5 MHz
			Channel 20450	Channel 20525	Channel 20600
		TX	829 MHz	836.5 MHz	844 MHz
	10MHz	RX	Channel 2450	Channel 2525	Channel 2600
		IVA	874 MHz	881.5 MHz	889 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2021/1004901

Page: 19 of 36

			ı ay	C. 13 01 3	
Test Mode	Bandwidth	TX / RX	RF Channel		
i est ivioue	Daridwidth	IX/IX	Low (L)	Middle (M)	High (H)
			Channel 20775	Channel 21100	Channel 21425
		TX	2502.5 MHz	2535 MHz	2567.5 MHz
	5MHz	RX	Channel 2775	Channel 3100	Channel 5825
		KA.	2622.5 MHz	2655 MHz	2687.5 MHz
			Channel 20800	Channel 21100	Channel 21400
	10MHz	TX	2505 MHz	2535 MHz	2565 MHz
		RX	Channel 2800	Channel 3100	Channel 3400
LTE D LZ			2625 MHz	2655 MHz	2685 MHz
LTE Band 7		TX	Channel 20825	Channel 21100	Channel 21375
	451411		2507.5 MHz	2535 MHz	2562.5 MHz
	15MHz	DV	Channel 2825	Channel 3100	Channel 3375
		RX	2627.5 MHz	2655 MHz	2682.5 MHz
			Channel 20850	Channel 21100	Channel 21350
		TX	2510 MHz	2535 MHz	2560 MHz
	20MHz	RX	Channel 2850	Channel 3100	Channel 3350
		IVA	2630 MHz	2655 MHz	2680 MHz

Toot Made	Dondwidth	TV / DV	RF Channel		
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 23017	Channel 23095	Channel 23173
		TX	699.7 MHz	707.5 MHz	715.3 MHz
	1.4MHz	RX	Channel 5017	Channel 5095	Channel 5173
		KA	729.7 MHz	737.5 MHz	745.3 MHz
	3MHz		Channel 23025	Channel 23095	Channel 23165
		TX	700.5 MHz	707.5 MHz	714.5 MHz
		RX	Channel 5025	Channel 5095	Channel 5165
1.TE D 140			730.5 MHz	737.5 MHz	744.5 MHz
LTE Band 12		TX	Channel 23035	Channel 23095	Channel 23155
	CNUL		701.5 MHz	707.5 MHz	713.5 MHz
	5MHz	RX	Channel 5035	Channel 5095	Channel 5155
		KA	731.5 MHz	737.5 MHz	743.5 MHz
	_		Channel 23060	Channel 23095	Channel 23130
		TX	704 MHz	707.5 MHz	711 MHz
	10MHz	RX	Channel 5060	Channel 5095	Channel 5130
		IVA	734 MHz	737.5 MHz	741 MHz

Test Mode	Donatuidth TV / DV	RF Channel			
rest Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
	5MHz	TX/RX	Channel 37775	Channel38000	Channel 38225
	SIVITZ	17/87	2572.5 MHz	2595 MHz	2617.5 MHz
	10MHz	TX/RX	Channel 37800	Channel38000	Channel 38200
LTE Band 38			2575 MHz	2595 MHz	2615 MHz
LIE Dallu 30	45111-	TX/RX	Channel 37825	Channel38000	Channel 38175
	15MHz	17/11/	2577.5 MHz	2595 MHz	2612.5 MHz
	201/11-	TX/RX	Channel 37850	Channel38000	Channel 38150
	20MHz TX/RX		2580 MHz	2595 MHz	2610 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn

中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2021/1004901

Page: 20 of 36

Test Mode	Bandwidth	TX / RX		RF Channel	
Test Mode	Danuwiuin	IA/KA	Low (L)	Middle (M)	High (H)
			Channel 39675	Channel40620	Channel 41565
	5MHz	TX / RX	2498.5 MHz	2593 MHz	2687.5 MHz
			Channel 39700	Channel40620	Channel 41540
LTE Band 41	10MHz	TX / RX	2501 MHz	2593 MHz	2685 MHz
(2496-2690)			Channel 39725	Channel40620	Channel 41515
,	15MHz	TX / RX	2503.5 MHz	2593 MHz	2682.5 MHz
			Channel 39750	Channel40620	Channel 41490
	20MHz	TX / RX	2506 MHz	2593 MHz	2680 MHz

				RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 131979	Channel 132322	Channel 132665
		TX	1710.7 MHz	1745 MHz	1779.3 MHz
	1.4MHz		Channel 66443	Channel 66786	Channel 67329
		RX	2110.7 MHz	2145MHz	2199.3 MHz
			Channel 131987	Channel 132322	Channel 132657
		TX	1711.5 MHz	1745 MHz	1778.5MHz
	3MHz	DV	Channel 66451	Channel 66786	Channel 67121
		RX	2111.5 MHz	2145MHz	2198.5MHz
			Channel 131997	Channel 132322	Channel 132647
	5MHz	TX	1712.5 MHz	1745 MHz	1777.5 MHz
		RX	Channel 66461	Channel 66786	Channel 67311
LTE Davideo			2112.5 MHz	2145MHz	2197.5 MHz
LTE Band66			Channel 132022	Channel 132322	Channel 132622
		TX	1715 MHz	1745 MHz	1775 MHz
	10MHz	RX	Channel 66486	Channel 66786	Channel 67286
			2115 MHz	2145MHz	2195 MHz
			Channel 132047	Channel 132322	Channel 132597
		TX	1717.5 MHz	1745 MHz	1772.5 MHz
	15MHz	RX	Channel 66511	Channel 66786	Channel 67261
		TOX.	2117.5 MHz	2145MHz	2192.5 MHz
			Channel 132072	Channel 132322	Channel 132572
		TX	1720 MHz	1745 MHz	1770 MHz
	20MHz	DV	Channel 66536	Channel 66786	Channel 67236
		RX	2120 MHz	2145MHz	2190 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2021/1004901

21 of 36 Page:

Table 4.3.1.1.7A-1: Test frequencies for CA_7C

Range	CC-Combo / N _{RB_agg} [RB]	CC1 Note1				CC2 Note1					
		BW [RB]	NuL	f∪∟ [MHz]	N _{DL}	f _{DL} [MHz]	BW [RB]	NuL	f∪∟ [MHz]	N _{DL}	f _{DL} [MHz]
Low	50+100	50	20805	2505.5	2805	2625.5	100	20949	2519.9	2949	2639.9
		100	20850	2510	2850	2630	50	20994	2524.4	2994	2644.4
	75+50	75	20825	2507.5	2825	2627.5	50	20945	2519.5	2945	2639.5
	75+75	75	20825	2507.5	2825	2627.5	75	20975	2522.5	2975	2642.5
	75+100	75	20828	2507.8	2828	2627.8	100	20999	2524.9	2999	2644.9
		100	20850	2510	2850	2630	75	21021	2527.1	3021	2647.1
	100+100	100	20850	2510	2850	2630	100	21048	2529.8	3048	2649.8
Mid	50+100	50	21006	2525.6	3006	2645.6	100	21150	2540	3150	2660
		100	21051	2530.1	3051	2650.1	50	21195	2544.5	3195	2664.5
	75+50	75	21051	2530.1	3051	2650.1	50	21171	2542.1	3171	2662.1
	75+75	75	21025	2527.5	3025	2647.5	75	21175	2542.5	3175	2662.5
	75+100	75	21003	2525.3	3003	2645.3	100	21174	2542.4	3174	2662.4
		100	21026	2527.6	3026	2647.6	75	21197	2544.7	3197	2664.7
	100+100	100	21001	2525.1	3001	2645.1	100	21199	2544.9	3199	2664.9
High	50+100	50	21206	2545.6	3206	2665.6	100	21350	2560	3350	2680
		100	21251	2550.1	3251	2670.1	50	21395	2564.5	3395	2684.5
	75+50	75	21277	2552.7	3277	2672.7	50	21397	2564.7	3397	2684.7
	75+75	75	21225	2547.5	3225	2667.5	75	21375	2562.5	3375	2682.5
	75+100	75	21179	2542.9	3179	2662.9	100	21350	2560	3350	2680
		100	21201	2545.1	3201	2665.1	75	21372	2562.2	3372	2682.2
	100+100	100	21152	2540.2	3152	2660.2	100	21350	2560	3350	2680
Note 1:	Carriers in inc	creasing f	requency	order.							

Table 4.3.1.2.6A-1: Test frequencies for CA_38C

Range	CC- Combo / NRB_agg [RB]		CC1 Note1			CC2 Note1	
		BW [RB]	N _{UL/DL}	ful/DL [MHz]	BW [RB]	N _{UL/DL}	f _{UL/DL} [MHz]
Low	75+75	75	37825	2577.5	75	37975	2592.5
	100+100	100	37850	2580	100	38048	2599.8
Mid	75+75	75	37925	2587.5	75	38075	2602.5
	100+100	100	37901	2585.1	100	38099	2604.9
High	75+75	75	38025	2597.5	75	38175	2612.5
	100+100	100	37952	2590.2	100	38150	2610
Note 1:	Carriers in increasing frequency order.						



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ags.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2021/1004901

Page: 22 of 36

Table 4.3.1.2.9A-1: Test frequencies for CA_41C

Range	CC- Combo / N _{RB_agg} [RB]		CC1 Note1			CC2 Note1	
		BW		ful/DL	BW		ful/DL
		[RB]	N _{UL/DL}	[MHz]	[RB]	N _{UL/DL}	[MHz]
Low	25+100	25	39683	2499.3	100	39800	2511
		100	39750	2506	25	39867	2517.7
	50+75	50	39703	2501.3	75	39823	2513.3
		75	39725	2503.5	50	39845	2515.5
	50+100	50	39705	2501.5	100	39849	2515.9
		100	39750	2506	50	39894	2520.4
	75+75	75	39725	2503.5	75	39875	2518.5
	75+100	75	39728	2503.8	100	39899	2520.9
		100	39750	2506	75	39921	2523.1
	100+100	100	39750	2506	100	39948	2525.8
Mid	25+100	25	40528	2583.8	100	40645	2595.5
		100	40595	2590.5	25	40712	2602.2
	50+75	50	40549	2585.9	75	40669	2597.9
		75	40571	2588.1	50	40691	2600.1
	50+100	50	40526	2583.6	100	40670	2598.0
		100	40571	2588.1	50	40715	2602.5
	75+75	75	40545	2585.5	75	40695	2600.5
	75+100	75	40523	2583.3	100	40694	2600.4
		100	40546	2585.6	75	40717	2602.7
	100+100	100	40521	2583.1	100	40719	2602.9
High	25+100	25	41373	2668.3	100	41490	2680
		100	41440	2675	25	41557	2686.7
	50+75	50	41395	2670.5	75	41515	2682.5
		75	41417	2672.7	50	41537	2684.7
	50+100	50	41346	2665.6	100	41490	2680
		100	41391	2670.1	50	41535	2684.5
	75+75	75	41365	2667.5	75	41515	2682.5
	75+100	75	41319	2662.9	100	41490	2680
		100	41341	2665.1	75	41512	2682.2
	100+100	100	41292	2660.2	100	41490	2680
Note 1:		ncreasing fr	equency order.				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of ilability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2021/1004901

23 of 36 Page:

Description of Tests 4

4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1

4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01; C63.26 (2015)

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd) EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB

4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594



Report No.: ZR/2021/1004901

24 of 36 Page:

Test Settings

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7

4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser. the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to rms.

Remark: Reference test setup 1

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW > 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- Trace mode = trace average for continuous emissions, max hold for pulse emissions
- Sweep time = auto couple
- The trace was allowed to stabilize

4.5 Spurious And Harmonic Emissions at Antenna Terminal





Report No.: ZR/2021/1004901

Page: 25 of 36

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

- 1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
- Detector = RMS
- Trace mode = trace average for continuous emissions, max hold for pulse emissions
- Sweep time = auto couple
- The trace was allowed to stabilize
- Please see test notes below for RBW and VBW settings

4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.1

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1





Report No.: ZR/2021/1004901

26 of 36 Page:

Test Settings

- The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- Measurement BW > Emission bandwidth of signal
- The signal analyzer was set to collect one million samples to generate the CCDF curve
- The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6). The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.
- 8) Calculate power in dBm by the following formula:

ERP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBd)

Where:

Pd is the dipole equivalent power, Pg is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to Pg [dBm] - cable loss [dB]. The calculated Pd levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of 43 + 10log10(Power [Watts]).

Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

EIRP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBi)





Report No.: ZR/2021/1004901

27 of 36 Page:

EIRP=ERP+2.15dB

Where:

Pg is the generator output power into the substitution antenna.

- 3. Test the EUT in the lowest channel, the middle channel the Highest channel
- 4. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5. Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance.

Test Settings:

- 1. RBW=100kHz for emission below 1GHz and 1MHz for emission above 1GHz
- 2. VBW≥3*RBW
- 3. Number of sweep point ≥ 2*span/RBW
- 4. Detector=RMS
- 5. Trace mode=Average (Max Hold for pulsed emissions)
- 6. The trace was allowed to stabilize

Remark: The Emission Test data were reused from the report no:XZR/2021/1004901

4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; ANSI/C63.26 (2015)

- . The frequency stability of the transmitter is measured by:
- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5~\text{ppm}$) of the center frequency.

Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3






Report No.: ZR/2021/1004901

28 of 36 Page:

4.9 Test Setups

4.9.1 **Test Setup 1**

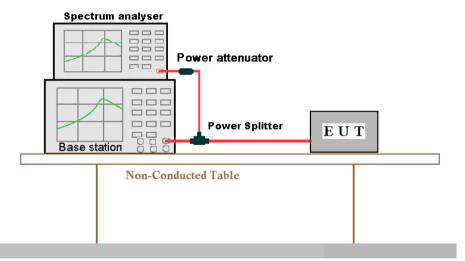

Ground Reference Plane

4.9.2 **Test Setup 2**





Figure 1. Below 30MHz





Report No.: ZR/2021/1004901

29 of 36 Page:







Figure 2. 30MHz to 1GHz

Figure 3. above 1GHz

4.9.3 **Test Setup 3**

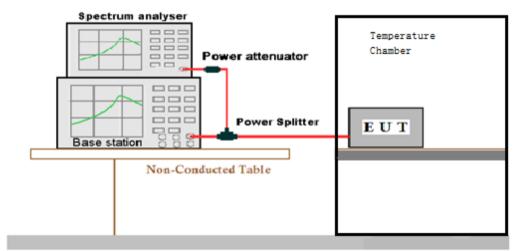

Ground Reference Plane





Report No.: ZR/2021/1004901

Page: 30 of 36

4.10Test Conditions

Test Case		Test Condi	tions					
		Test Environm ent	Ambient Climate & Rated Voltage					
	Average Power,	Test Setup	Test Setup 1					
Transmit	Total	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)					
Output		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2; LTE/TM3;					
Power Data	Average Power,	Test Environm ent	Ambient Climate & Rated Voltage					
	Spectral Density	Test Setup	Test Setup 1					
	(if required)	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)					
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2; LTE/TM3;					
	,		Ambient Climate & Rated Voltage					
Peak-to-A	verage	Test Setup	Test Setup 1					
(if required	(if required)		L, M, H (L= low channel, M= middle channel, H= high channel)					
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2; LTE/TM3;					
			Ambient Climate & Rated Voltage					
Modulation Characteristics		Test Setup	Test Setup 1					
Gilaracteri	151165	RF Channels (TX)	M (M= middle channel)					
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2; LTE/TM3;					
Bandwid	Occupie	Test	Ambient Climate & Rated Voltage					



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2021/1004901

Page: 31 of 36

			Page: 31 or 36	
th	d Bandwid	Environm ent		
	th	Test Setup	Test Setup 1	
	RF Channels (TX)		L, M, H (L= low channel, M= middle channel, H= high channel)	
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2; LTE/TM3;	
	Emissio n	Test Environm ent	Ambient Climate & Rated Voltage	
	Bandwid th	Test Setup	Test Setup 1	
	(if required)	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2; LTE/TM3;	
_	Band Edges		Ambient Climate & Rated Voltage	
_			Test Setup 1	
Compliance		RF Channels (TX)	L, H (L= low channel, H= high channel)	
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2; LTE/TM3;	
	Spurious Emission at Antenna		Ambient Climate & Rated Voltage	
at Antenna			Test Setup 1	
Terminals		RF Channels (TX)	L,M, H (L= low channel, M= middle channel, H= high channel)	
		Test Mode	GSM/TM1;UMTS/TM1; LTE/TM1;	
Field Strength of Spurious Radiation		Test Environm ent	Ambient Climate & Rated Voltage	
		Test Setup	Test Setup 2	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: ZR/2021/1004901

Page: 32 of 36

		<u>, </u>
	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2; LTE/TM3; Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
	Test Environm ent	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) VL, VN and VH of Rated Voltage at Ambient Climate.
Frequency Stability	Test Setup	Test Setup 3
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2; LTE/TM3;





Report No.: ZR/2021/1004901

Page: 33 of 36

5 **Main Test Instruments**

RF conducted test							
Toot Equipment	Manufacturer	Model No.	Inventory	Cal. date	Cal.Due date		
Test Equipment	Wallulacturer	woder No.	No.	(yyyy-mm-dd)	(yyyy-mm-dd)		
Dual Output Mobile Communication DC Source	Agilent Technologies Inc	66311B	W009-09	2020/10/22	2021/10/21		
Signal Analyzer	Rohde & Schwarz	FSV	W005-02	2020/4/16	2021/4/15		
Coaxial Cable	SGS	N/A	SEM031-01	2020/6/12	2021/6/11		
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A		
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2020/10/22	2021/10/21		
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	HTC-1	W006-17	2020/10/22	2021/10/21		
Temperature Chamber	GIANT FORCE	ICT-150-40- CP-AR	W027-03	2020/10/22	2021/10/21		
Wideband Radio CommunicationTeste	Anristu	MT8821C	6201462742	2020/4/16	2021/4/15		
Wideband Radio CommunicationTester	Rohde & Schwarz	CMW500	W005-02	2020/10/22	2021/10/21		





Report No.: ZR/2021/1004901

Page: 34 of 36

			raye.	34 01 30				
	RSE&RE&CE Test System							
Equipment	Manufacturer	Model No.	Cal Date	Cal Due Date	Inventory No.			
Receiving antenna	SCHWARZBECK	BBHA 9120D	2019-10-13	2021-10-12	XAW01-09-02			
Receiving antenna	SCHWARZBECK	BBHA 9170	2019-10-13	2021-10-12	XAW01-09-03			
Directional antenna rack controller	Max-Full	MF-7802BS	NCR	NCR	XAW03-03-01			
High-speed antenna rack controller	Max-Full	MF-7802	NCR	NCR	XAW03-04-01			
Filter bank	Tonscend	JS0806-F	NCR	NCR	XAW03-05-01			
Filter bank	Tonscend	JS0806s	NCR	NCR	XAW03-05-02			
Amplifier	Tonscend	TAP00903040	2020-10-26	2021-10-25	XAW01-41-01			
Amplifier	Tonscend	TAP01018048	2020-10-26	2021-10-25	XAW01-41-02			
Amplifier	Tonscend	TAP18040048	2020-10-26	2021-10-25	XAW01-41-03			
Amplifier	Shanghai Steed	YX28980930	2020-10-26	2021-10-25	XAW01-41-06			
Artificial network	ROHDE&SCHWARZ	ENV216	2020-08-04	2021-08-03	XAW01-19-02			
5G UXM	Keysight	E7515B	2020-09-11	2021-09-10	XAW01-04-01			
Temperature and humidity meter	MingGao	TH101B	2020-06-11	2021-05-11	XAW01-01-01			
Measurement Software	Tonscend	TS+ RSE&RE	NCR	NCR	XAW02-05-01			
Measurement Software	Tonscend	TS+ CE	NCR	NCR	XAW02-05-02			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

中国·深圳·科技园中区M-10栋一号厂房

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2021/1004901

35 of 36 Page:

Measurement Uncertainty 6

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in

accordance with the recommendations of ISO 17025 as following:

Test Item	Extended Uncertainty	Data
Transmit Output Power Data	Power [dBm]	U =±0.37 dB
Bandwidth	Magnitude [%]	U =± 0.2%
Band Edge Compliance	Disturbance Power [dBm]	U = ±2.0 dB
Spurious Emissions, Conducted	Disturbance Power [dBm]	$U = \pm 2.0 \text{ dB}$
		For 3 m Chamber:
		U = ±4.5 dB (30 MHz to 1GHz)
Field Strength of Spurious	ERP[dBm]/EIRP [dBm]	U = ±3.3 dB (above 1 GHz)
Radiation	EKFLOBINI/EIKF LOBINI	For 10 m Chamber:
		U = ±4.5 dB (30 MHz to 1GHz)
		U = ±3.2 dB (above 1 GHz)
Frequency Stability	Frequency Accuracy [ppm]	U = ±0.24 ppm





Report No.: ZR/2021/1004901

Page: 36 of 36

7 Appendixes

Appendix A	PCE&DSS&DTS&NII Setup Photos
Appendix B.1	GSM
Appendix B.2	WCDMA
Appendix B.3	LTE Band 2
Appendix B.4	LTE Band 4
Appendix B.5	LTE Band 5
Appendix B.6	LTE Band 7
Appendix B.7	LTE Band 12
Appendix B.8	LTE Band 38
Appendix B.9	LTE Band 41
Appendix B.10	LTE Band 66
Appendix B.11	LTE CA_7C
Appendix B.12	LTE CA_38C
Appendix B.13	LTE CA_41C

The End

