



TEST REPORT

No.I20N03311-EMC

for

HMD Global Oy

Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN

Model Name: TA-1343

With

Hardware Version: 99652_1_11

Software Version: 000T_0_080

FCC ID: 2AJOTTA-1343

Issued Date: 2021-01-26

Designation Number: CN1210

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

SAICT, Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@caict.ac.cn. www.saict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I20N03311-EMC	Rev.0	1st edition	2021-01-26

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

1. SUMMARY OF TEST REPORT	4
1.1. TEST ITEMS	4
1.2. TEST STANDARDS	4
1.3. TEST RESULT	4
1.4. TESTING LOCATION.....	4
1.5. PROJECT DATA	4
1.6. SIGNATURE	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDERTEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT	6
3.3. INTERNAL IDENTIFICATION OF AE.....	6
3.4. EUT SET-UPS.....	8
3.5. GENERAL DESCRIPTION.....	9
4. REFERENCE DOCUMENTS	10
4.1. REFERENCE DOCUMENTS FOR TESTING	10
5. LABORATORY ENVIRONMENT	11
6. SUMMARY OF TEST RESULTS.....	12
6.1. TESTING ENVIRONMENT.....	12
6.2. SUMMARY OF MEASUREMENT RESULTS.....	12
6.3. STATEMENT.....	12
7. MEASUREMENT UNCERTAINTY	13
8. TEST FACILITIES UTILIZED.....	13
9. TEST ACCESSORY UTILIZED	13
ANNEX A: MEASUREMENT RESULTS.....	14
A.1 RADIATED EMISSION (§15.109(A)).....	14



1. Summary of Test Report

1.1. Test Items

Description	Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN
Model Name	TA-1343
Applicant's name	HMD Global Oy
Manufacturer's Name	HMD Global Oy

1.2. Test Standards

FCC Part 15, Subpart B 10-1-2019 Edition; ANSI C63.4 2014

1.3. Test Result

Pass

Total test 1 items, pass 1 items. Please refer to "6.2 Summary of Measurement Results"

1.4. Testing Location

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China

1.5. Project data

Testing Start Date: 2021-01-02

Testing End Date: 2021-01-24

1.6. Signature

Ma Shoujian

(Prepared this test report)

Zhang Yunzhan

(Reviewed this test report)

Cao Junfei

(Approved this test report)



2. ClientInformation

2.1. Applicant Information

Company Name: HMD Global Oy
Address: Bertel Jungin aukio 902600 Espoo, Finland
Contact: Rosario Casillo
Email: Rosario.Casillo@hmdglobal.com

2.2. Manufacturer Information

Company Name: HMD Global Oy
Address: Bertel Jungin aukio 902600 Espoo, Finland
Contact: Rosario Casillo
Email: Rosario.Casillo@hmdglobal.com



3. Equipment UnderTest (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN
Model Name	TA-1343
FCC ID	2AJOTTA-1343
Antenna Type	Internal Antenna
Condition of EUT as received	No obvious damage in appearance

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Shenzhen Academy of Information and Communications Technology.

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version	Receive Date
UT05aa	359180470002415	99652_1_11	000T_0_080	2020-12-15

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description
AE1	Battery
AE2	Charger
AE3	USB Cable
AE4	Headset

AE1

Model	WT340
Manufacturer	Guangdong Fenghua New Energy Co.,Ltd
Capacity	4900mAh
Nominal Voltage	3.85V

AE2-1

Model	PA-US5V2A-036
Manufacturer	Yutong Electronics(Huizhou) Co., Ltd

AE2-2

Model	CH-21U
Manufacturer	Shenzhen Tianyin Electronics Co., Ltd

AE3-1

Model	CB-36A
Manufacturer	ShenZhen BRL Technology Co., Ltd

AE3-2

Model	CB-36A
Manufacturer	Huizhou Washin Electronics co.,LTD



No.I20N03311-EMC

AE4-1

Model HS-34

Manufacturer New Leader Industry Co.,Ltd

*AE ID is used to identify the test sample in the lab internally.

AE: ancillary equipment



3.4. EUT set-ups

EUT set-up No.

Set.1
Set.2
Set.3
Set.4

Combination of EUT and AE

EUT+AE1+AE2-1+AE3-1+AE4
EUT+AE1+AE2-2+AE3-2+AE4
EUT+AE1+AE3-1+AE4+PC
EUT+AE1+AE3-2+AE4+PC



3.5. General Description

The Equipment Under Test (EUT) is a model of Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN with internal antenna.

It supports GSM 850/900/1800/1900MHz,WCDMA Bands 1/2/4/5/8, and LTE Bands 1/2/3/4/5/7/8/12/17/28/66.

It has Camera, Video Player, FM Receiver, USB Data Transfer,Bluetooth,Wi-Fi and GNSS functions.

It consists of normal options: Battery, Charger and USB Cable and Headset

Samples (EUT+AE) undergoing test were selected by the Client. Relevant information is provided by the Client.

Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN TA-1343 manufactured by HMD Global Oy is a variant model based on TA-1347 manufactured by HMD Global Oy for conformance test. According to client's description, the table below shows the difference between model TA-1347 and TA-1343:

Changes	TA-1347	TA-1343
MMS/STK/USAT/ USIM changes	single SIM	dual SIM
FCC ID	2AJOTTA-1347	2AJOTTA-1343

According to the declaration of differences by manufacturer, the following tests need to be performed.

NO.	Test item	EUT Operating Mode
1	Radiated Emission	Camera/Video Player/GNSS/FM receiver/ GSM Receiver / Data Transfer

Other results are cited from the initial report.

The report number for initial model is I20N03261-EMC.

The FCC ID for initial model:2AJOTTA-1347.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	10-1-2019 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber did not exceed following limits along the EMC testing:

9.10m×6.10m×5.60m (L×W×H)

Temperature	Min. = 15 °C, Max. = 35°C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz,>60dB; 1MHz-18000MHz,>90dB
Electrical insulation	>2MΩ
Ground system resistance	<4Ω
Normalised site attenuation (NSA)	<±4 dB, 3 m distance, from 30 to 1000 MHz

Shield room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz,>60dB; 1MHz-10000MHz,>90dB
Electrical insulation	>2MΩ
Ground system resistance	<4Ω

Fully-anechoic chamber did not exceed following limits along the EMC testing:

9.10m×6.10m×5.60m (L×W×H)

Temperature	Min. = 15 °C, Max. = 35°C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz,>60dB; 1MHz-18000MHz,>90dB
Electrical insulation	>2MΩ
Ground system resistance	<4Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

6. SUMMARY OF TEST RESULTS

6.1. Testing Environment

Normal Temperature: 15~35°C
Relative Humidity: 20~75%
Atmospheric pressure 86~106kPa

6.2. Summary of Measurement Results

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Radiated Emission	15.109(a)	A.1	P

6.3. Statement

6.3.1 Statements of conformity

This report takes measured values as criterion of test conclusion. The test conclusion meets the limit requirements.

7. Measurement uncertainty

Test item	Frequency ranges	Measurement uncertainty
Radiated Emission	30MHz-1GHz	4.84dB(k=2)
	1GHz-18GHz	4.68dB(k=2)
Conducted Emission	150kHz-30MHz	3.00dB(k=2)

8. Test Facilities Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CALDUE DATE	CAL PERIOD
1.	Test Receiver	ESR7	101676	R&S	2021.12.25	1 year
2.	Test Receiver	ESCI	100701	R&S	2021.08.09	1 year
3.	Spectrum Analyzer	FSV40	101192	R&S	2022.01.13	1 year
4.	BiLog Antenna	3142E	0224831	ETS-Lindgren	2021.05.17	3 years
5.	Horn Antenna	3117	00066577	ETS-Lindgren	2022.04.02	3 years
6.	Universal Radio Communication Tester	CMU200	114545	R&S	2022.01.13	1 year
7.	Universal Radio Communication Tester	CMW500	152499	R&S	2021.07.16	1 year
8.	Signal Generator	SMB100A	179725	R&S	2021.11.25	1 year
9.	Chamber	FACT3-2.0	1285	ETS-Lindgren	2021.07.19	2 years
10.	Software	EMC32	V10.01.00	R&S	/	/

9. Test Accessory Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CALDUE DATE	CAL PERIOD
1.	PC	ThinkPad T480	PF-13LW0C	Lenovo	/	/
2.	Printer	V1.0008	VNF6C12491	HP	/	/
3.	Mouse	MOEUUOA	44NY517	Lenovo	/	/

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

Reference

FCC: CFR Part 15.109(a)

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (Data transfer mode of EUT and charging mode of EUT) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 -2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode:

FM receiver: The EUT is connected to a charger for charging and open FM function. The EUT is synchronized to a FM signal generator. The EUT is keeping on demodulating the FM signal and outputting the audio signal through the headset.

Camera : At the beginning of measurement, the battery is completely discharged. The battery and charger are installed so that the EUT works well and keeping on taking photos.

Video Player : The EUT is connected to a charger for charging and keeping on playing mp3.

Data Transfer : The model of the PC is Lenovo ThinkPad T480, and the serial number of the PC is PF-13LW0C. The EUT is connected to a PC for transmitting data. The software is used to let the PC keep on copying data to MS or TF Card, reading and erasing the data after copy action was finished.

GNSS:The EUT is connected to a charger for charging. A vector signal generator is used to provide the simulated GNSS signal, and the frequency is set to 1575.42 MHz. Before the test starts, the integrated GNSS application in EUT is started up and locked to the simulated GNSS signal.

Meanwhile, the EUT is synchronized to System Simulator (SS), and able to respond to paging messages and incoming call. An established call has been released.

GSM receiver: The EUT is connected to a charger for charging. The EUT is synchronized to SS, and able to respond to paging messages and incoming call. An established call has been released.

This device contains the receivers which tune and operate between 30MHz-960MHz in the following bands: GSM 850MHz.

The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, are investigated. Only the worst case emissions are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

A.1.3 Measurement Limit

Limit from CFR Part 15.109(a)


Frequency range (MHz)	Field strength limit ($\mu\text{V/m}$)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

*Note: The original limit is defined at 10m test distance. This limit is calculated according to CISPR requirements.


A.1.4 Test Condition

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz (IF bandwidth)	5
Above 1000	1MHz/3MHz	15

**A.1.5 Test set-up:
30MHz-1GHz**

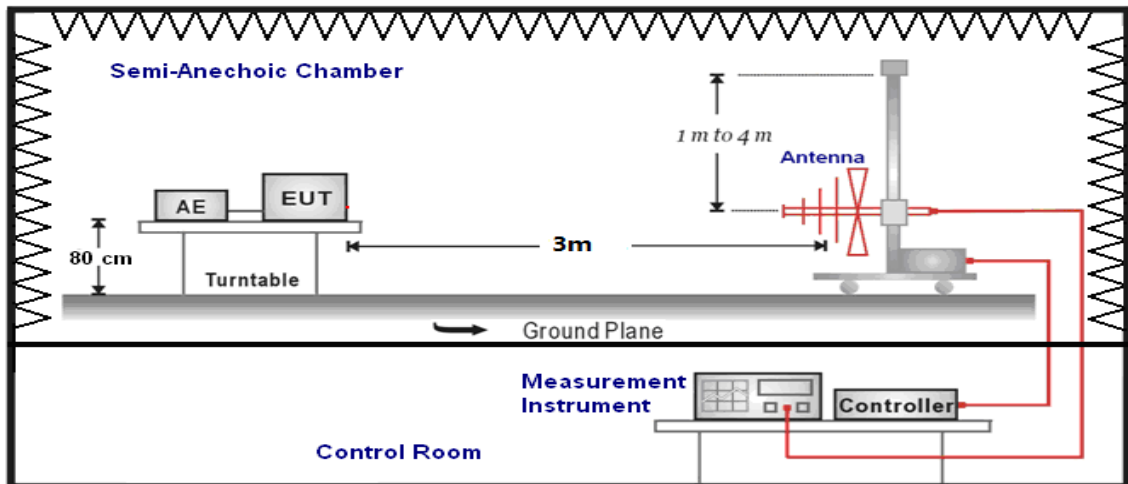

1GHz-18GHz

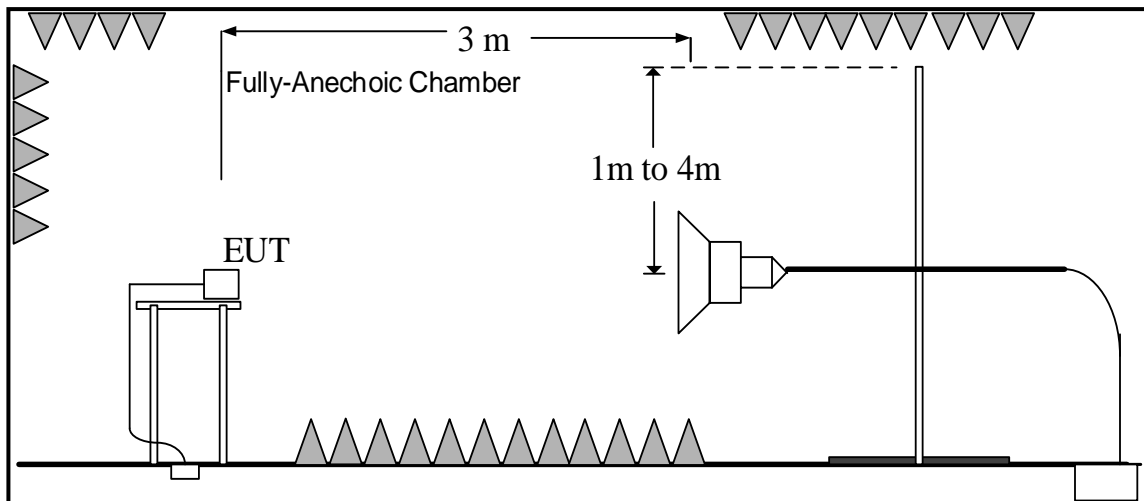

A.1.6 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{Rpl} = P_{\text{Mea}} + G_A + G_{PL}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Result: Quasi-Peak (dB μ V/m) / Average (dB μ V/m) / Peak (dB μ V/m)

Note: the result contains vertical part and Horizontal part

GSM Receiver 850MHz

Frequency range (MHz)	Quasi-Peak Limit (dB μ V/m)	Result (dB μ V/m) UT05aa/Set.1	Conclusion
30-88	40.00	See Fugure A.1.1.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB μ V/m)	Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
			UT05aa/Set.1	
1000to 18000	54	74	See Fugure A.1.2.	P

FM receiver

Frequency range (MHz)	Quasi-Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
		UT05aa/Set.1	
30-88	40.00	See Fugure A.1.3.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB μ V/m)	Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
			UT05aa/Set.1	
1000to 18000	54	74	See Fugure A.1.4.	P

Video Player

Frequency range (MHz)	Quasi-Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
		UT05aa/Set.1	
30-88	40.00	See Fugure A.1.5.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB μ V/m)	Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
			UT05aa/Set.1	
1000to 18000	54	74	See Fugure A.1.6.	P

Camera

Frequency range (MHz)	Quasi-Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
		UT05aa/Set.1	
30-88	40.00	See Fugure A.1.7.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB μ V/m)	Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
			UT05aa/Set.1	
1000to 18000	54	74	See Fugure A.1.8.	P

GPS

Frequency range (MHz)	Quasi-Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
		UT05aa/Set.1	
30-88	40.00	See Fugure A.1.9.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB μ V/m)	Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
			UT05aa/Set.1	
1000to 18000	54	74	See Fugure A.1.10.	P

GLONASS

Frequency range (MHz)	Quasi-Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
		UT05aa/Set.1	
30-88	40.00	See Fugure A.1.11.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB μ V/m)	Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
			UT05aa/Set.1	
1000to 18000	54	74	See Fugure A.1.12.	P

Video Player

Frequency range (MHz)	Quasi-Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
		UT05aa/Set.2	
30-88	40.00	See Fugure A.1.13.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB μ V/m)	Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
			UT05aa/Set.2	
1000to 18000	54	74	See Fugure A.1.14.	P

Data Transfer : EUT to PC

Frequency range (MHz)	Quasi-Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
		UT05aa/Set.3	
30-88	40.00	See Fugure A.1.15.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB μ V/m)	Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
			UT05aa/Set.3	
1000to 18000	54	74	See Fugure A.1.16.	P

Data Transfer : PC to EUT

Frequency range (MHz)	Quasi-Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
		UT05aa/Set.3	
30-88	40.00	See Fugure A.1.17.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB μ V/m)	Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
			UT05aa/Set.3	
1000to 18000	54	74	See Fugure A.1.18.	P

Data Transfer : PC to TF Card

Frequency range (MHz)	Quasi-Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
		UT05aa/Set.3	
30-88	40.00	See Fugure A.1.19.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB μ V/m)	Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
			UT05aa/Set.3	
1000to 18000	54	74	See Fugure A.1.20.	P

Data Transfer : TF Card to PC

Frequency range (MHz)	Quasi-Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
		UT05aa/Set.3	
30-88	40.00	See Fugure A.1.21.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB μ V/m)	Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
			UT05aa/Set.3	
1000to 18000	54	74	See Fugure A.1.22.	P

Data Transfer : EUT to PC

Frequency range (MHz)	Quasi-Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
		UT05aa/Set.4	
30-88	40.00	See Fugure A.1.23.	P
88-216	43.50		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB μ V/m)	Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
			UT05aa/Set.4	
1000to 18000	54	74	See Fugure A.1.24.	P

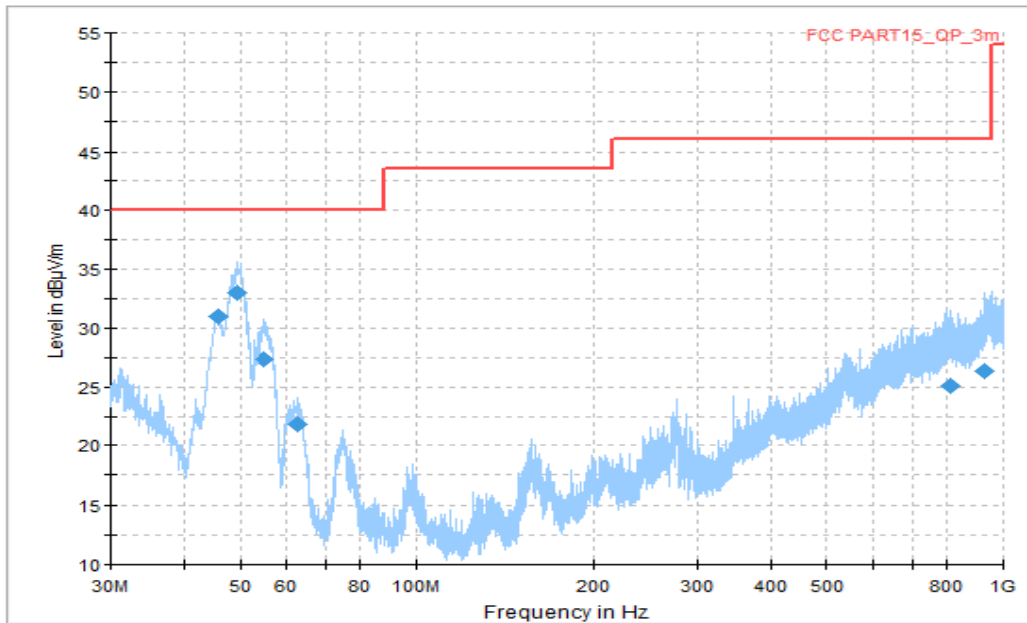


Figure A.1.1. Radiated Emission (GSM Receiver 850MHz, 30MHz to 1GHz)

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	PMea (dBµV)
45.627778	31.01	40.00	8.99	V	-21	52.01
49.130556	33.03	40.00	6.97	V	-22	55.03
55.112222	27.36	40.00	12.64	V	-22	49.36
62.602778	21.81	40.00	18.19	V	-22	43.81
811.496667	25.04	46.02	20.98	H	-1	26.04
926.495556	26.31	46.02	19.71	V	1	25.31



Figure A.1.2. Radiated Emission (GSM Receiver 850MHz, 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
14539.500000	43.14	54.00	10.86	V	18	25.14
15605.250000	45.01	54.00	8.99	H	20	25.01
16206.250000	45.30	54.00	8.70	V	21	24.3
16631.500000	46.66	54.00	7.34	V	22	24.66
16990.000000	46.34	54.00	7.66	H	23	23.34
17696.750000	46.93	54.00	7.07	V	23	23.93

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
14539.500000	56.14	74.00	17.86	V	18	38.14
15605.250000	57.64	74.00	16.36	H	20	37.64
16206.250000	57.93	74.00	16.07	V	21	36.93
16631.500000	59.18	74.00	14.82	V	22	37.18
16990.000000	59.10	74.00	14.90	H	23	36.1
17696.750000	60.06	74.00	13.94	V	23	37.06

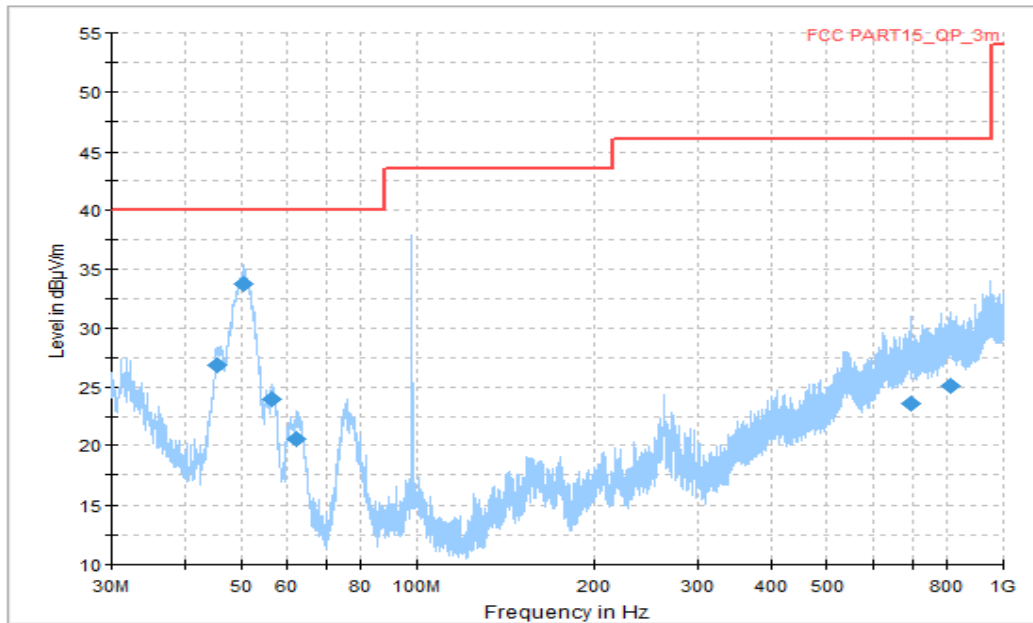


Figure A.1.3. Radiated Emission (FM receiver, 30MHz to 1GHz)

Note: the spike over the limit is coming from the traffic carrier.

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	PMea (dBµV)
45.196667	26.87	40.00	13.13	V	-21	47.87
50.423889	33.79	40.00	6.21	V	-22	55.79
56.728889	23.90	40.00	16.10	V	-22	45.90
62.117778	20.57	40.00	19.43	V	-22	42.57
697.144444	23.57	46.02	22.45	H	-2	25.57
811.335000	25.12	46.02	20.90	V	-1	26.12

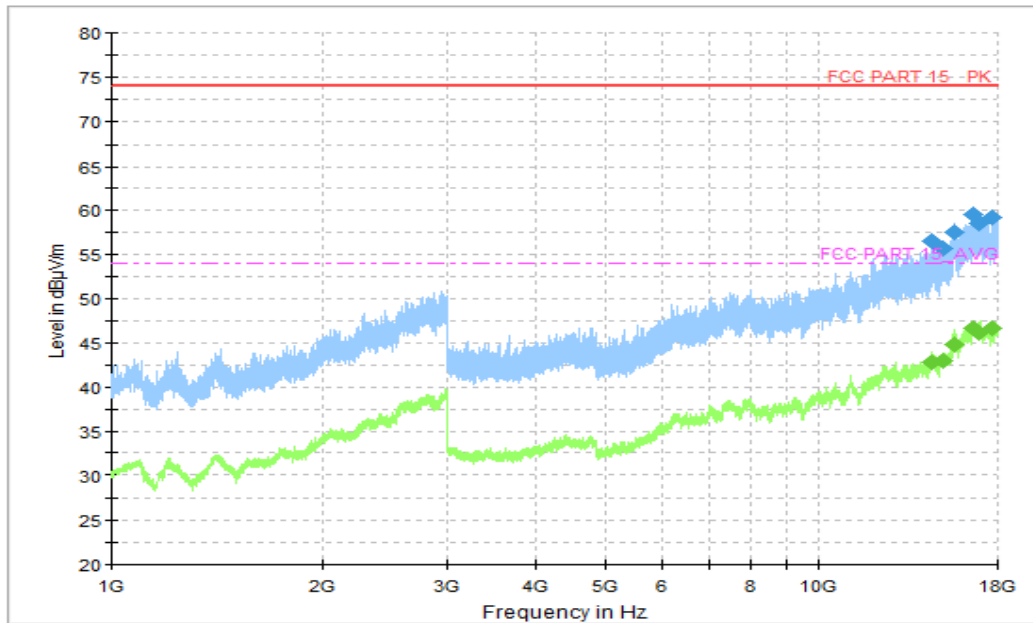


Figure A.1.4. Radiated Emission (FM receiver , 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
14544.000000	56.48	74.00	17.52	H	4.8	51.68
15069.750000	55.62	74.00	18.38	H	6.5	49.12
15629.500000	57.58	74.00	16.42	H	8.2	49.38
16617.750000	59.59	74.00	14.41	V	11.7	47.89
16965.000000	58.56	74.00	15.44	H	15.7	42.86
17688.750000	59.14	74.00	14.86	H	16.9	42.24

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
9853.500000	33.62	54.00	20.38	H	5.3	28.32
10974.000000	34.46	54.00	19.54	V	6.7	27.76
13127.500000	36.01	54.00	17.99	V	9.7	26.31
14466.000000	37.34	54.00	16.66	V	11.7	25.64
16819.000000	39.67	54.00	14.33	V	15.9	23.77
17907.000000	40.48	54.00	13.52	H	17.3	23.18

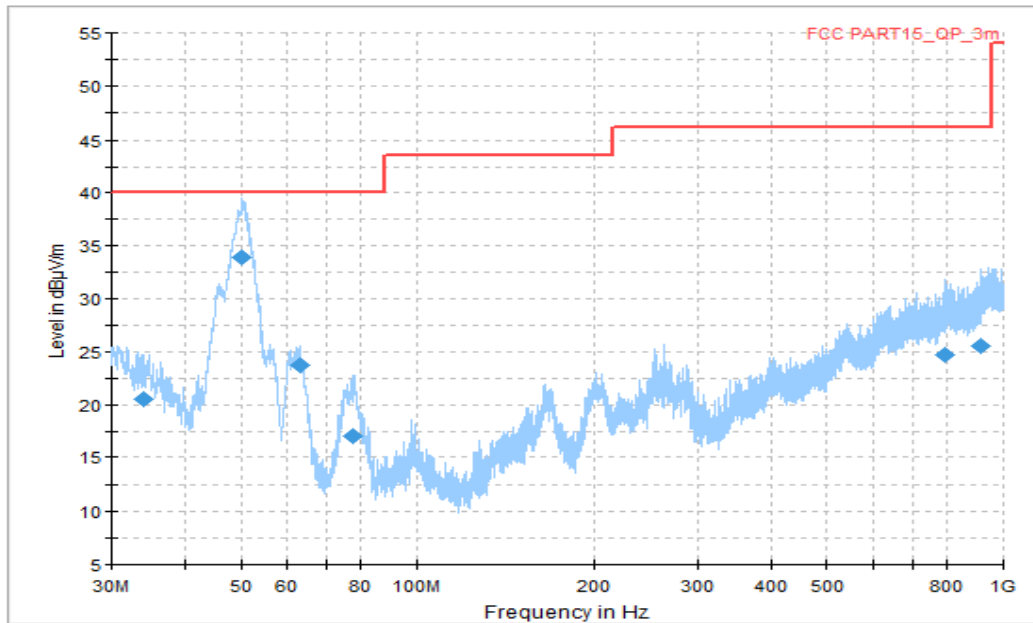


Figure A.1.5. Radiated Emission (Video Player , 30MHz to 1GHz)

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	PMea (dBµV)
33.987778	20.45	40.00	19.55	V	-15	35.45
50.100556	33.90	40.00	6.10	V	-22	55.9
63.087778	23.76	40.00	16.24	V	-22	45.76
78.015000	17.03	40.00	22.97	V	-22	39.03
792.958889	24.74	46.02	21.28	H	-1	25.74
914.640000	25.58	46.02	20.44	V	0	25.58

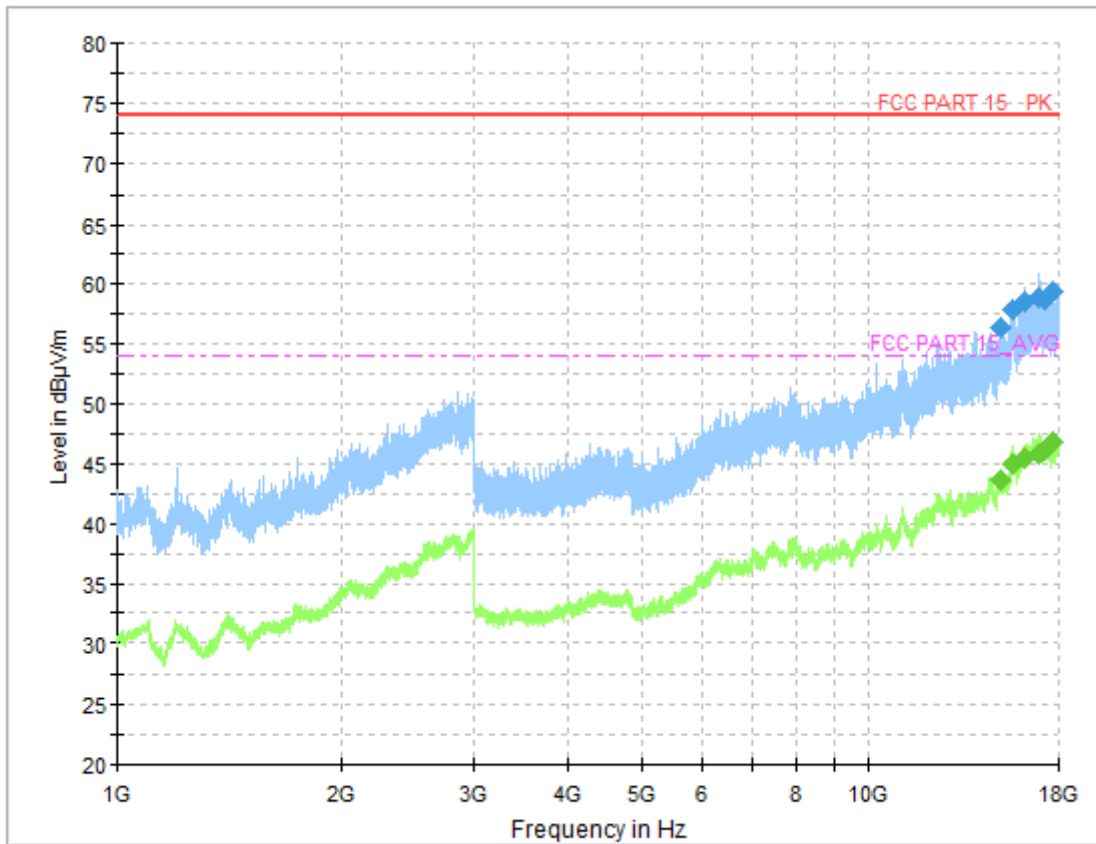


Figure A.1.6. Radiated Emission (Video Player , 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P _{Mea} (dBµV)
15103.000000	56.34	74.00	17.66	V	18	38.34
15616.000000	57.80	74.00	16.20	V	20	37.8
16263.750000	58.58	74.00	15.42	V	21	37.58
16950.500000	58.87	74.00	15.13	V	22	36.87
17203.750000	58.74	74.00	15.26	V	21	37.74
17706.000000	59.44	74.00	14.56	V	23	36.44

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P _{Mea} (dBµV)
15103.000000	43.61	54.00	10.39	V	18	25.61
15616.000000	44.93	54.00	9.07	V	20	24.93
16263.750000	45.55	54.00	8.45	V	21	24.55
16950.500000	45.89	54.00	8.11	V	22	23.89
17203.750000	46.09	54.00	7.91	V	21	25.09
17706.000000	46.86	54.00	7.14	V	23	23.86

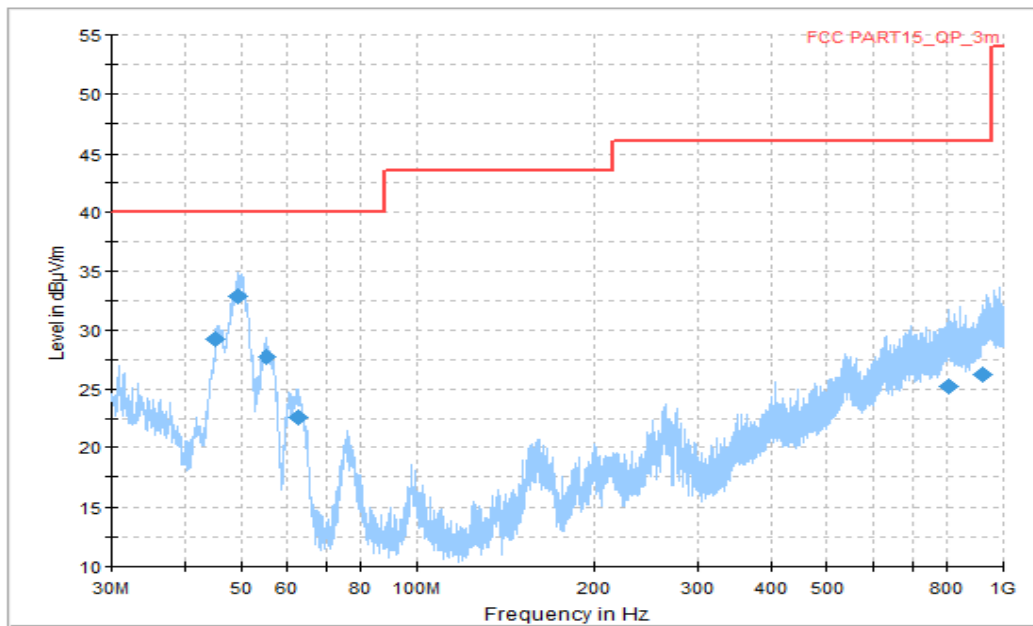


Figure A.1.7. Radiated Emission (Camera , 30MHz to 1GHz)

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	P _{Mea} (dBµV)
45.088889	29.22	40.00	10.78	V	-21	50.22
49.076667	32.91	40.00	7.09	V	-22	54.91
55.435556	27.73	40.00	12.27	V	-22	49.73
62.926111	22.63	40.00	17.37	V	-22	44.63
806.000000	25.15	46.02	20.87	H	-1	26.15
924.609444	26.21	46.02	19.81	V	1	25.21

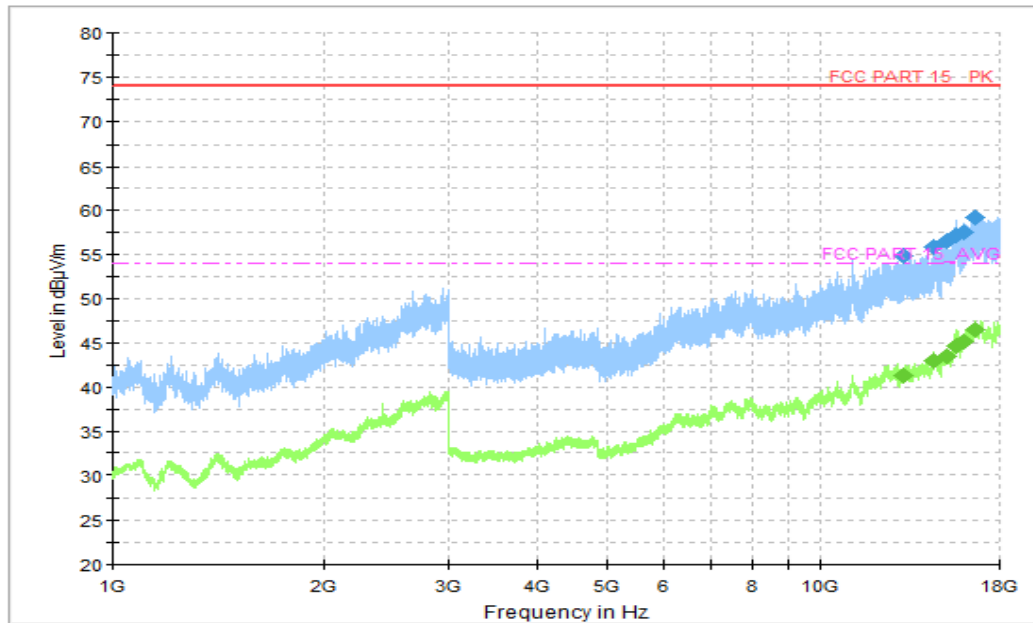


Figure A.1.8. Radiated Emission (Camera ,1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P _{Mea} (dBµV)
13180.750000	54.86	74.00	19.14	V	18	36.86
14560.750000	55.91	74.00	18.09	V	18	37.91
15123.500000	56.52	74.00	17.48	V	18	38.52
15625.500000	57.23	74.00	16.77	V	20	37.23
16070.000000	57.48	74.00	16.52	V	21	36.48
16631.750000	59.17	74.00	14.83	V	22	37.17

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P _{Mea} (dBµV)
13180.750000	41.28	54.00	12.72	V	18	23.28
14560.750000	43.02	54.00	10.98	V	18	25.02
15123.500000	43.38	54.00	10.62	V	18	25.38
15625.500000	44.59	54.00	9.41	V	20	24.59
16070.000000	45.18	54.00	8.82	V	21	24.18
16631.750000	46.56	54.00	7.44	V	22	24.56

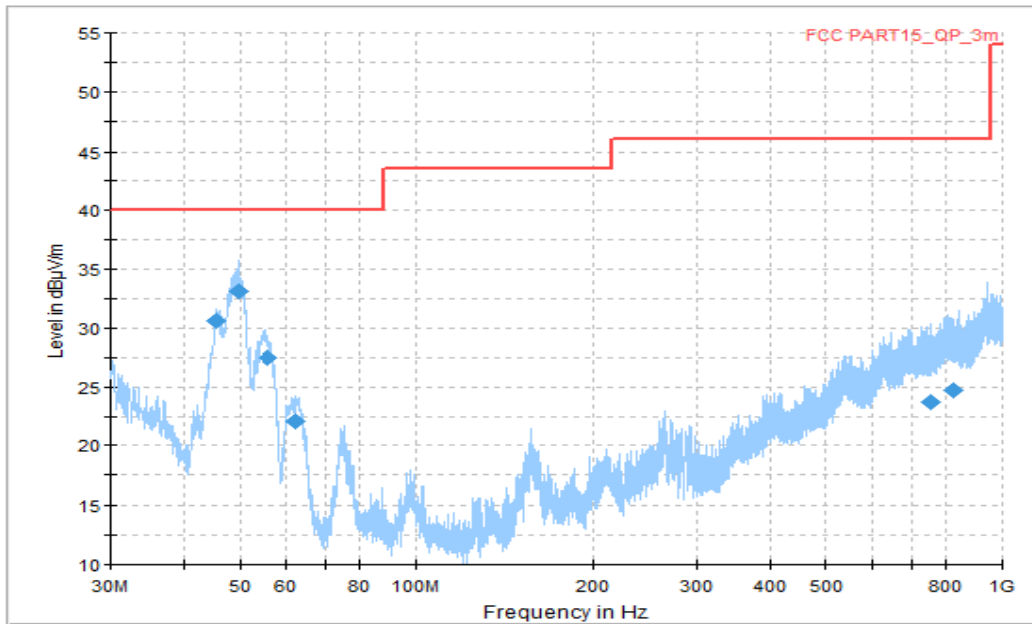


Figure A.1.9. Radiated Emission (GPS, 30MHz to 1GHz)

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	P _{Mea} (dBµV)
45.466111	30.66	40.00	9.34	V	-21	51.66
49.615556	33.09	40.00	6.91	V	-22	55.09
55.812778	27.42	40.00	12.58	V	-22	49.42
62.333333	22.03	40.00	17.97	V	-22	44.03
754.105000	23.73	46.02	22.29	V	-2	25.73
824.591667	24.73	46.02	21.29	V	-1	25.73

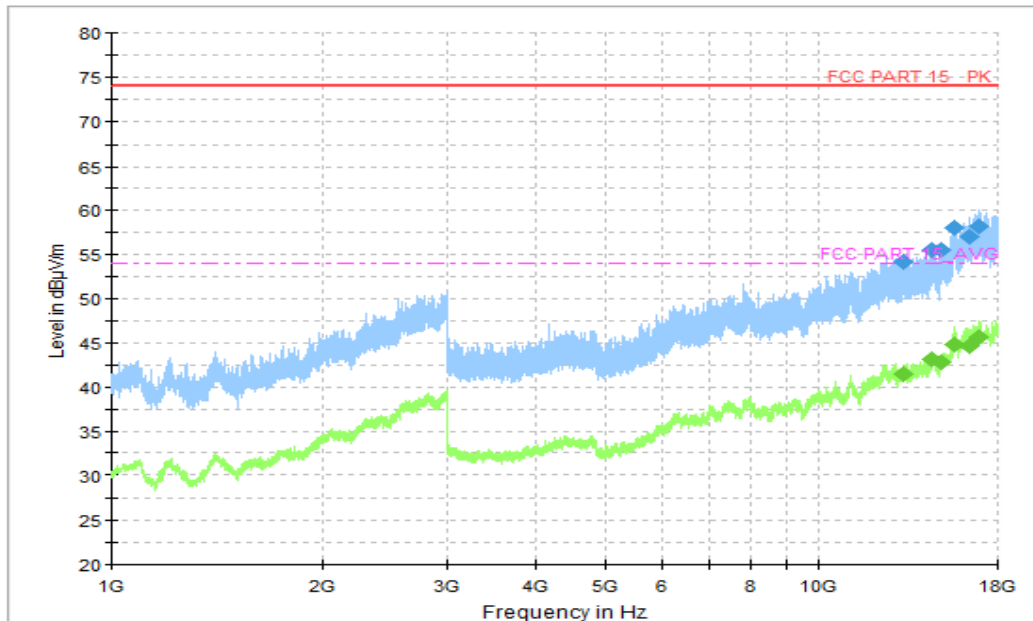


Figure A.1.10. Radiated Emission (GPS, 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P _{Mea} (dBµV)
13248.000000	54.13	74.00	19.87	V	17	37.13
14566.000000	55.51	74.00	18.49	V	18	37.51
14962.250000	55.55	74.00	18.45	V	18	37.55
15599.500000	58.07	74.00	15.93	V	20	38.07
16382.750000	57.04	74.00	16.96	V	21	36.04
16923.000000	58.25	74.00	15.75	V	22	36.25

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P _{Mea} (dBµV)
13248.000000	41.45	54.00	12.55	V	17	24.45
14566.000000	43.06	54.00	10.94	V	18	25.06
14962.250000	42.85	54.00	11.15	V	18	24.85
15599.500000	44.83	54.00	9.17	V	20	24.83
16382.750000	44.57	54.00	9.43	V	21	23.57
16923.000000	45.67	54.00	8.33	V	22	23.67

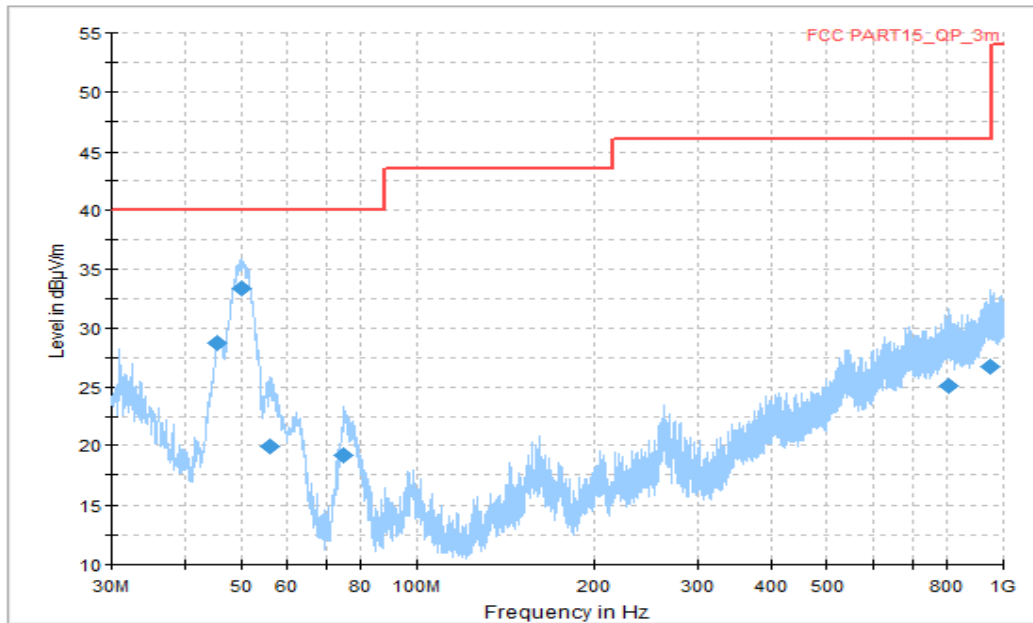


Figure A.1.11. Radiated Emission (GLONASS, 30MHz to 1GHz)

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	P _{Mea} (dBµV)
45.304444	28.72	40.00	11.28	V	-21	49.72
50.046667	33.41	40.00	6.59	V	-22	55.41
56.351667	19.98	40.00	20.02	V	-22	41.98
75.105000	19.13	40.00	20.87	V	-22	41.13
804.868333	25.06	46.02	20.96	H	-1	26.06
946.596111	26.77	46.02	19.25	V	1	25.77

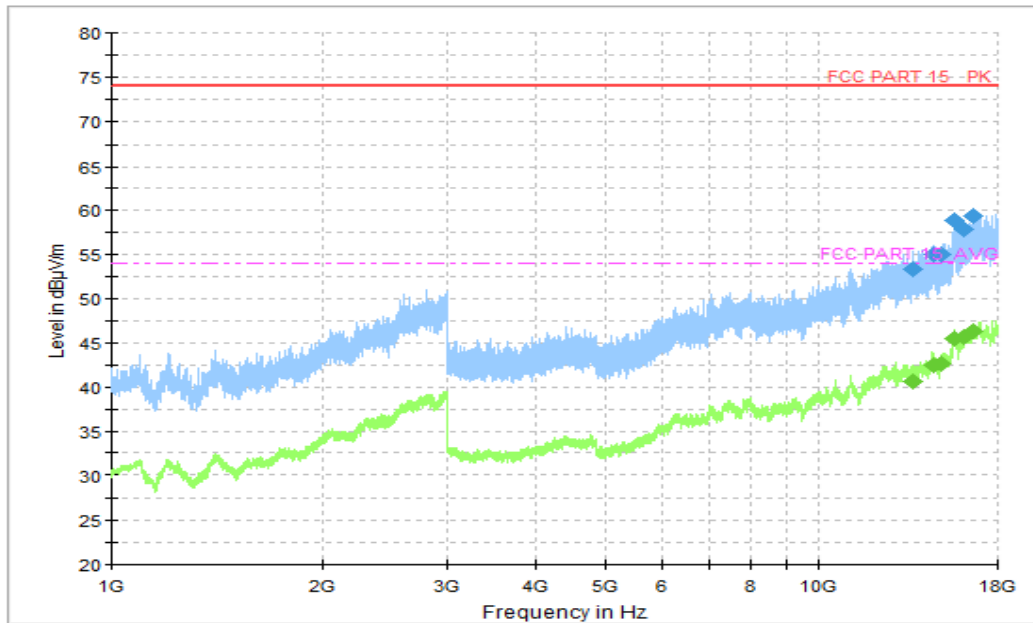


Figure A.1.12. Radiated Emission (GLONASS, 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P _{Mea} (dBµV)
13635.250000	53.40	74.00	20.60	V	17	36.40
14573.250000	54.99	74.00	19.01	V	18	36.99
14943.250000	55.06	74.00	18.94	V	18	37.06
15651.250000	58.86	74.00	15.14	V	20	38.86
16170.250000	57.88	74.00	16.12	V	21	36.88
16638.250000	59.32	74.00	14.68	V	22	37.32

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P _{Mea} (dBµV)
13635.250000	40.65	54.00	13.35	V	17	23.65
14573.250000	42.49	54.00	11.51	V	18	24.49
14943.250000	42.59	54.00	11.41	V	18	24.59
15651.250000	45.49	54.00	8.51	V	20	25.49
16170.250000	45.58	54.00	8.42	V	21	24.58
16638.250000	46.31	54.00	7.69	V	22	24.31

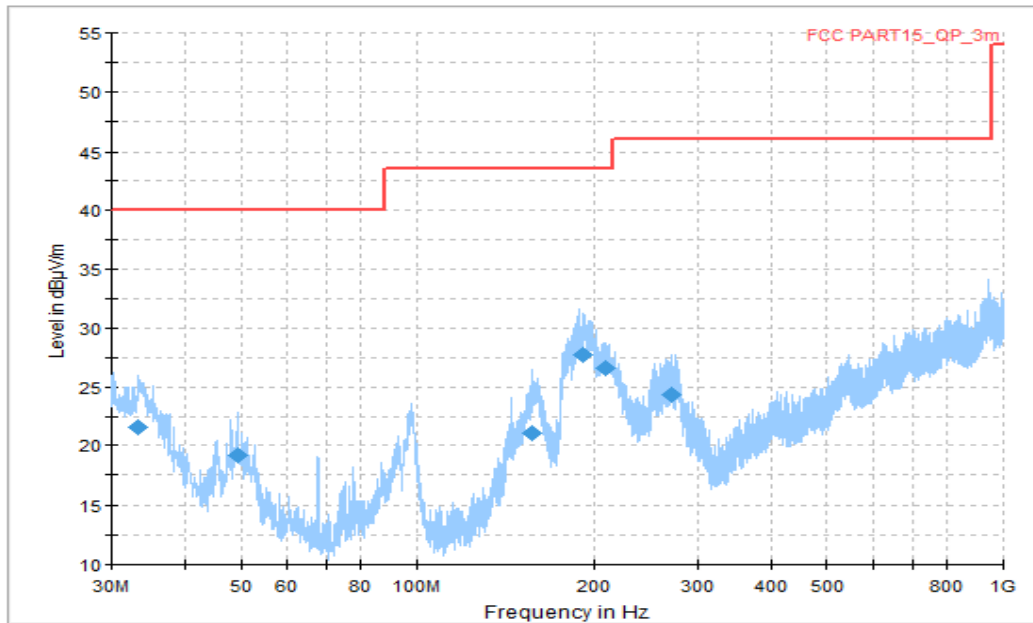


Figure A.1.13. Radiated Emission (Video Player, 30MHz to 1GHz)

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	P _{Mea} (dBµV)
33.287222	21.52	40.00	18.48	V	-15	36.52
49.022778	19.12	40.00	20.88	V	-22	41.12
157.339444	21.12	43.52	22.40	V	-17	38.12
191.612778	27.69	43.52	15.83	V	-18	45.69
208.533889	26.53	43.52	16.99	H	-17	43.53
271.530000	24.38	46.02	21.64	H	-14	38.38

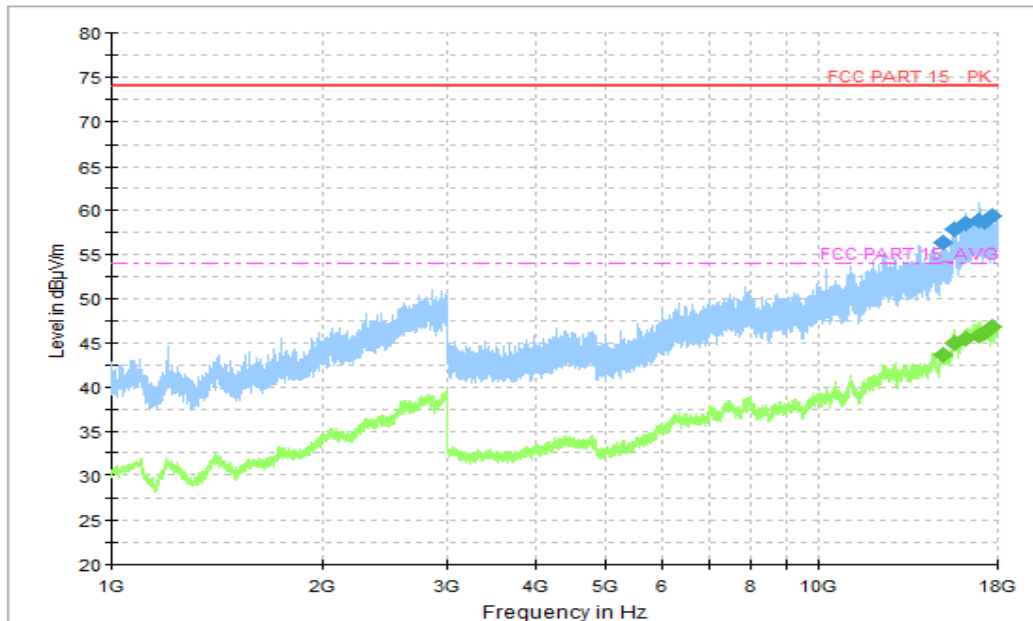


Figure A.1.14. Radiated Emission (Video Player 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P _{Mea} (dBµV)
15103.000000	56.34	74.00	17.66	V	18	38.34
15616.000000	57.80	74.00	16.20	V	20	37.8
16263.750000	58.58	74.00	15.42	V	21	37.58
16950.500000	58.87	74.00	15.13	V	22	36.87
17203.750000	58.74	74.00	15.26	V	21	37.74
17706.000000	59.44	74.00	14.56	V	23	36.44

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P _{Mea} (dBµV)
15103.000000	43.61	54.00	10.39	V	18	25.61
15616.000000	44.93	54.00	9.07	V	20	24.93
16263.750000	45.55	54.00	8.45	V	21	24.55
16950.500000	45.89	54.00	8.11	V	22	23.89
17203.750000	46.09	54.00	7.91	V	21	25.09
17706.000000	46.86	54.00	7.14	V	23	23.86

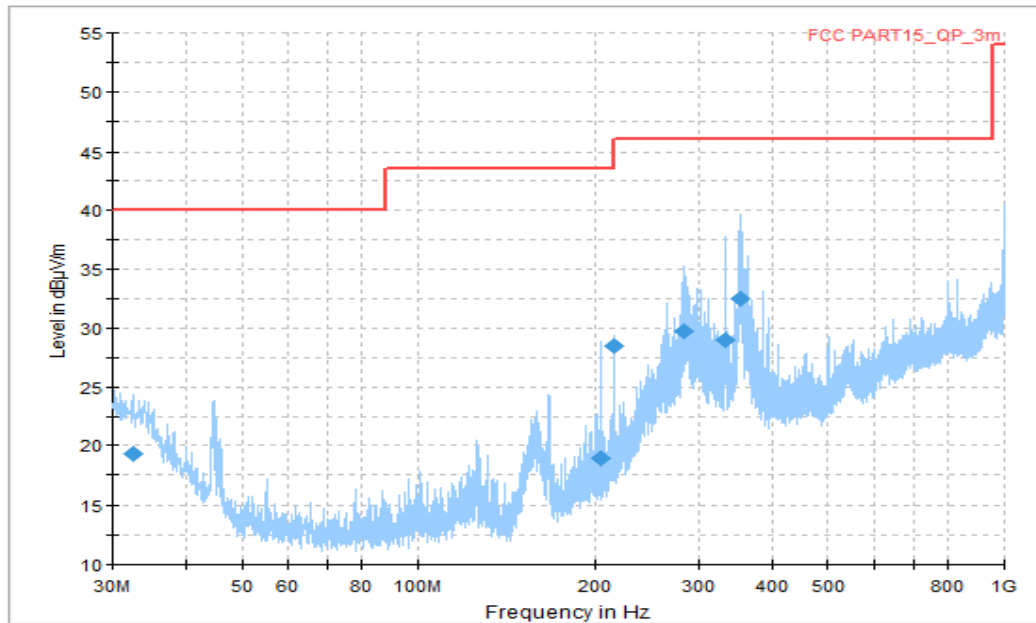


Figure A.1.15. Radiated Emission (Data Transfer : EUT to PC, 30MHz to 1GHz)

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	P _{Mea} (dBµV)
32.425000	19.34	40.00	20.66	V	-14	33.34
204.222778	18.92	43.52	24.60	V	-17	35.92
215.970556	28.42	43.52	15.10	H	-17	45.42
283.978333	29.74	46.02	16.28	H	-14	43.74
331.885556	29.04	46.02	16.98	H	-12	41.04
353.225556	32.47	46.02	13.55	H	-10	42.47

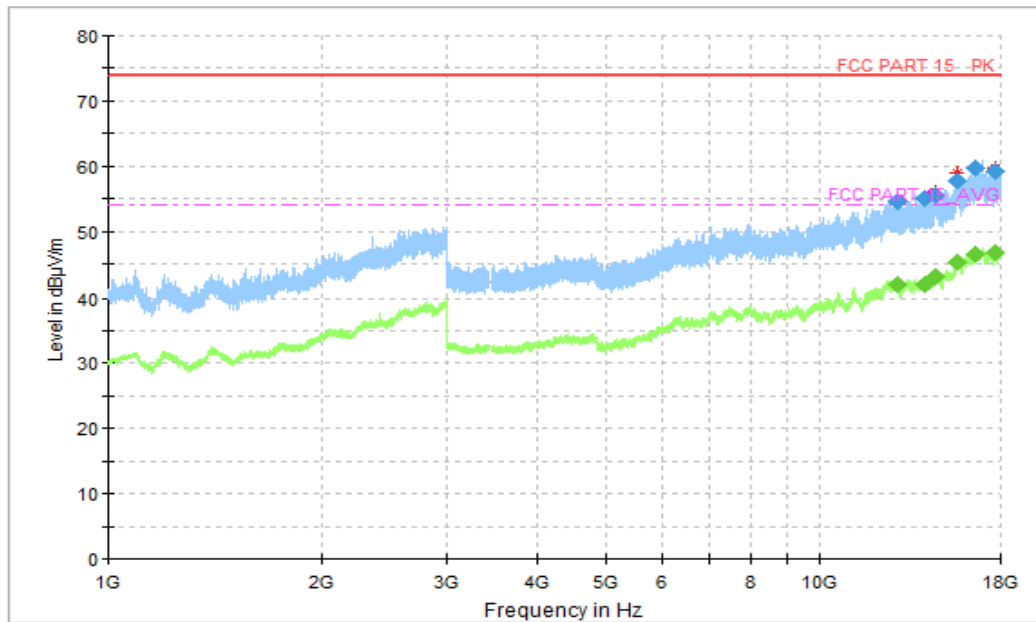


Figure A.1.16. Radiated Emission (Data Transfer : EUT to PC, 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P _{Mea} (dBµV)
12909.500000	54.49	74.00	19.51	V	17	37.49
14026.250000	55.07	74.00	18.93	V	17	38.07
14561.500000	55.65	74.00	18.35	V	18	37.65
15661.250000	57.76	74.00	16.24	V	20	37.76
16612.500000	59.61	74.00	14.39	V	22	37.61
17693.000000	59.11	74.00	14.89	V	23	36.11

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P _{Mea} (dBµV)
12909.500000	41.77	54.00	12.23	V	17	24.77
14026.250000	41.85	54.00	12.15	V	17	24.85
14561.500000	43.06	54.00	10.94	V	18	25.06
15661.250000	45.31	54.00	8.69	V	20	25.31
16612.500000	46.53	54.00	7.47	V	22	24.53
17693.000000	46.71	54.00	7.29	V	23	23.71

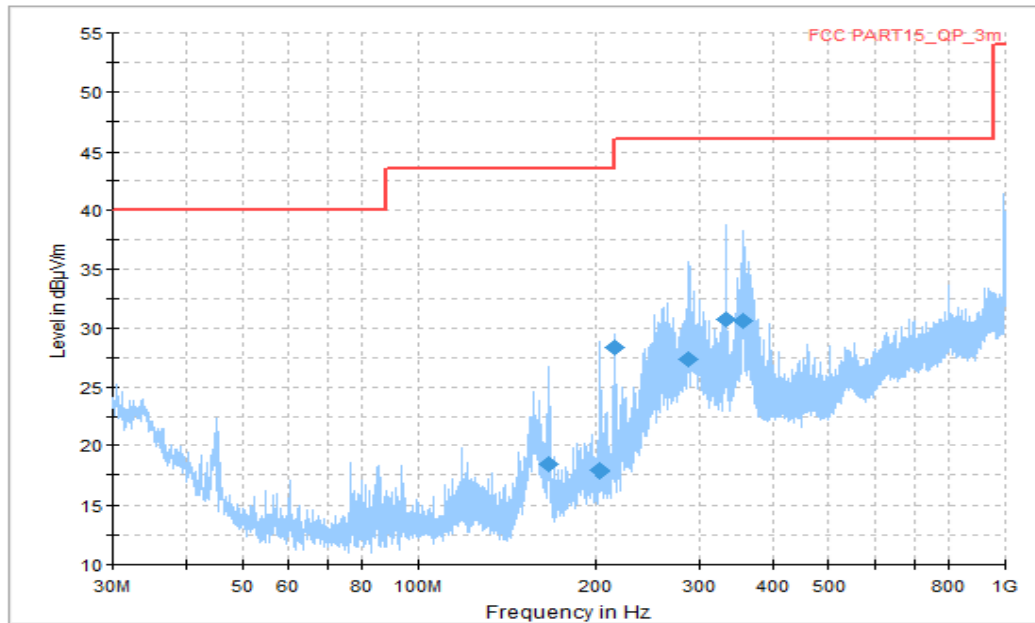


Figure A.1.17. Radiated Emission (Data Transfer : PC to EUT, 30MHz to 1GHz)

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	P _{Mea} (dBµV)
165.961667	18.39	43.52	25.13	V	-18	36.39
203.306667	17.90	43.52	25.62	H	-17	34.9
215.970556	28.36	43.52	15.16	H	-17	45.36
287.858333	27.32	46.02	18.71	H	-14	41.32
331.885556	30.74	46.02	15.28	H	-12	42.74
354.572778	30.64	46.02	15.38	H	-10	42.74

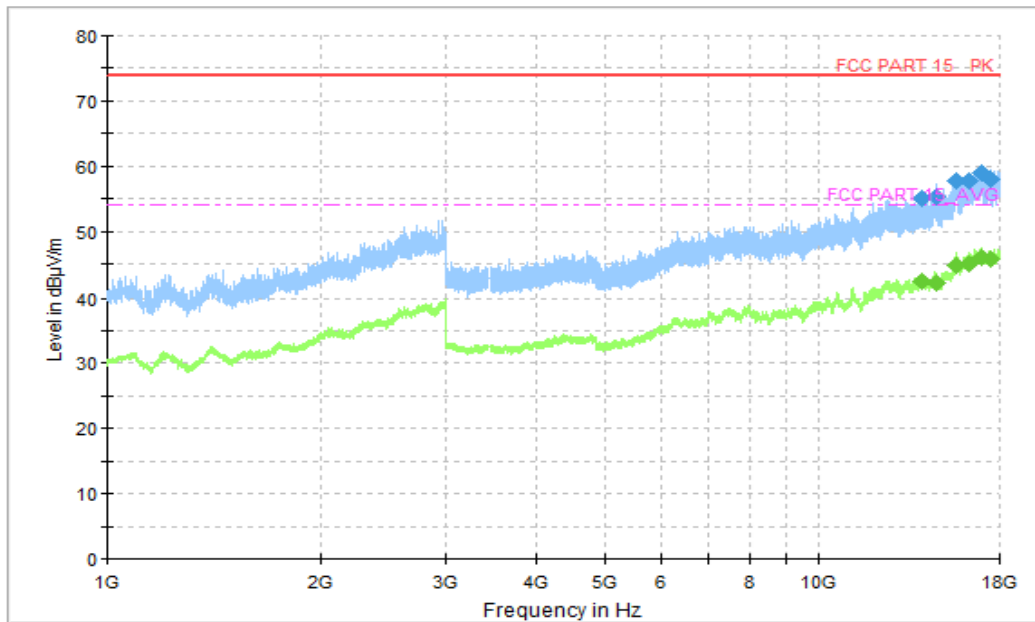


Figure A.1.18. Radiated Emission (Data Transfer : PC to EUT, 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P _{Mea} (dBµV)
13948.500000	55.02	74.00	18.98	V	17	38.02
14646.250000	55.38	74.00	18.62	V	18	37.38
15590.250000	57.69	74.00	16.31	V	20	37.69
16292.250000	57.67	74.00	16.33	V	21	36.67
16965.250000	58.91	74.00	15.09	V	23	35.91
17459.500000	58.10	74.00	15.90	V	22	36.10

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P _{Mea} (dBµV)
13948.500000	42.43	54.00	11.57	V	17	25.43
14646.250000	42.01	54.00	11.99	V	18	24.01
15590.250000	44.75	54.00	9.25	V	20	24.75
16292.250000	45.10	54.00	8.90	V	21	24.10
16965.250000	46.11	54.00	7.89	V	23	23.11
17459.500000	45.76	54.00	8.24	V	22	23.76

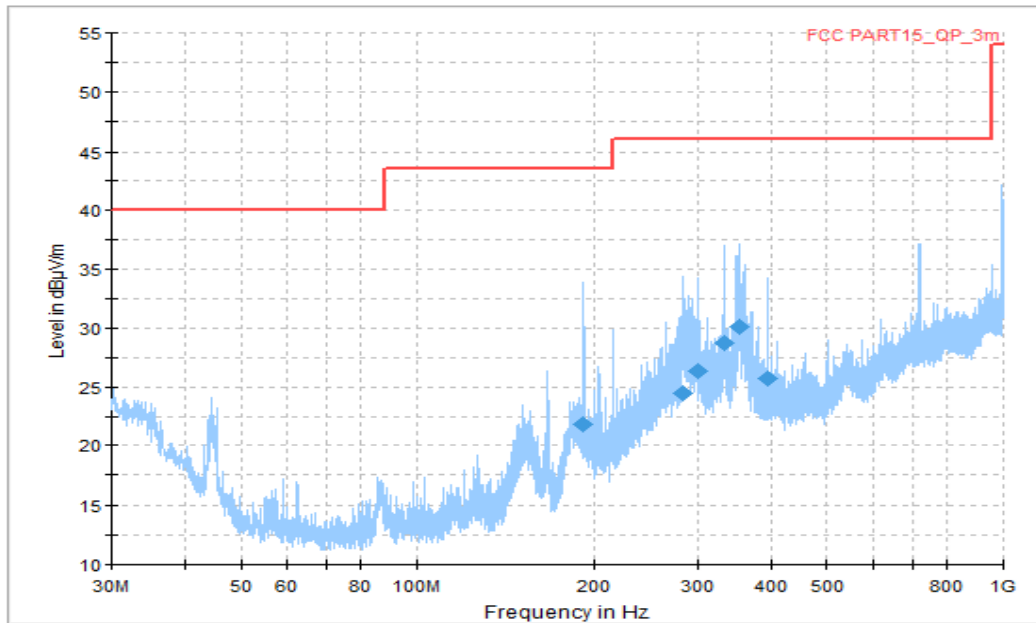


Figure A.1.19. Radiated Emission (Data Transfer : PC to TF Card, 30MHz to 1GHz)

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	P _{Mea} (dBµV)
191.936111	21.81	43.52	21.71	H	-18	39.81
282.361667	24.45	46.02	21.57	H	-14	38.45
299.875556	26.29	46.02	19.73	H	-14	40.29
331.831667	28.76	46.02	17.26	V	-12	40.76
353.764444	30.09	46.02	15.93	H	-10	40.09
395.258889	25.74	46.02	20.28	V	-9	34.74

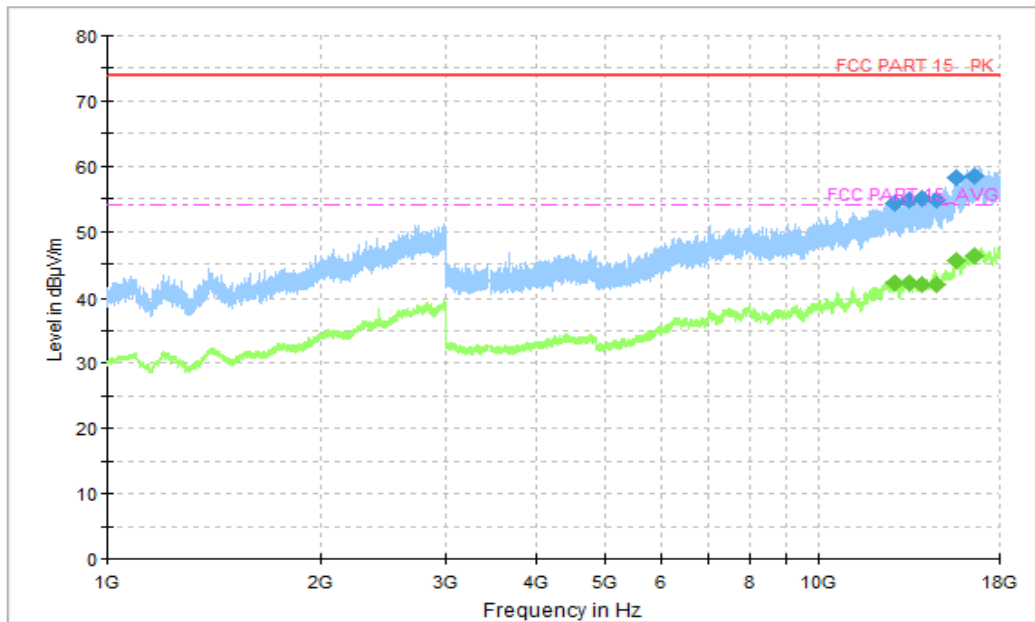


Figure A.1.20. Radiated Emission (Set.8, Data Transfer : PC to TF Card, 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P _{Mea} (dBµV)
12774.250000	54.40	74.00	19.60	V	17	37.40
13379.500000	54.88	74.00	19.12	V	17	37.88
13987.250000	55.04	74.00	18.96	V	17	38.04
14612.000000	54.75	74.00	19.25	V	18	36.75
15651.750000	58.26	74.00	15.74	V	20	38.26
16623.250000	58.54	74.00	15.46	V	22	36.54

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P _{Mea} (dBµV)
12774.250000	42.09	54.00	11.91	V	17	25.09
13379.500000	42.20	54.00	11.80	V	17	25.2
13987.250000	41.90	54.00	12.10	V	17	24.90
14612.000000	41.82	54.00	12.18	V	18	23.82
15651.750000	45.48	54.00	8.52	V	20	25.48
16623.250000	46.30	54.00	7.70	V	22	24.30

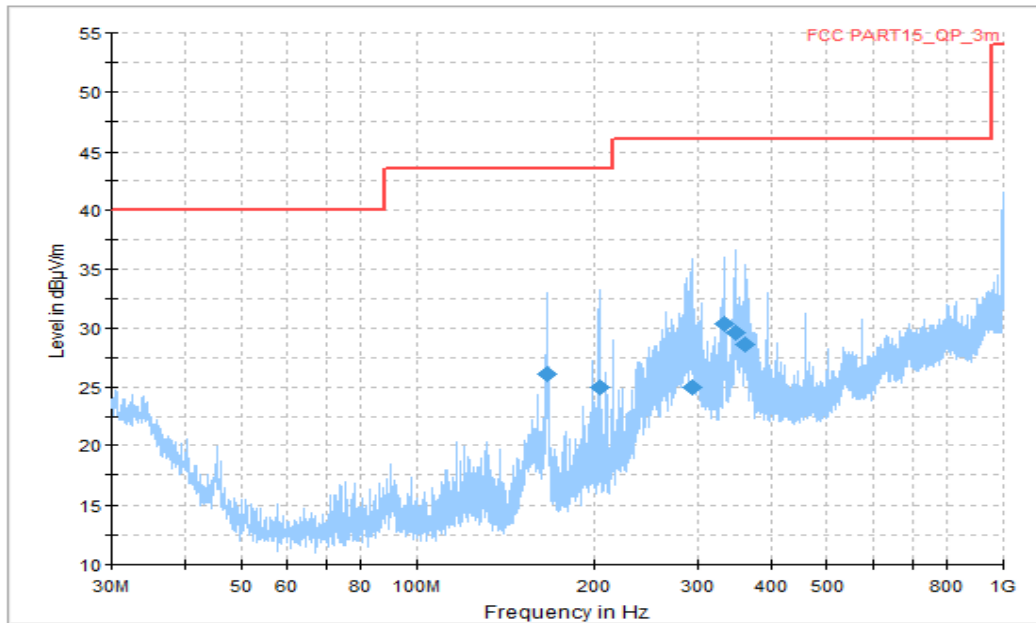


Figure A.1.21. Radiated Emission (Data Transfer : TF Card to PC, 30MHz to 1GHz)

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	P _{Mea} (dBµV)
166.231111	26.07	43.52	17.45	V	-18	44.07
204.115000	24.96	43.52	18.56	H	-17	41.96
293.085556	24.99	46.02	21.03	H	-14	38.99
332.262778	30.37	46.02	15.65	V	-12	42.37
347.998333	29.60	46.02	16.42	H	-11	40.6
361.793889	28.61	46.02	17.41	H	-10	38.61

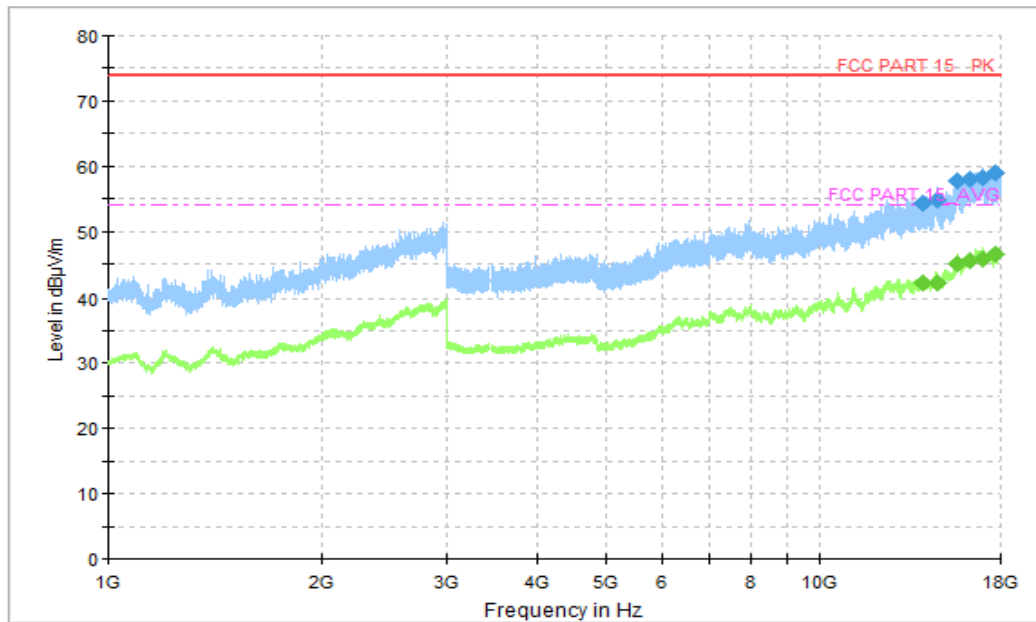


Figure A.1.22. Radiated Emission (Data Transfer : TF Card to PC, 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P _{Mea} (dBµV)
13987.750000	54.26	74.00	19.75	V	17	37.26
14648.750000	54.89	74.00	19.11	V	18	36.89
15634.500000	57.75	74.00	16.25	V	20	37.75
16263.250000	58.02	74.00	15.98	V	21	37.02
16959.750000	58.17	74.00	15.83	V	23	35.17
17727.500000	59.05	74.00	14.95	V	23	36.05

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P _{Mea} (dBµV)
13987.750000	41.96	54.00	12.04	V	17	24.96
14648.750000	42.05	54.00	11.95	V	18	24.05
15634.500000	45.09	54.00	8.91	V	20	25.09
16263.250000	45.57	54.00	8.43	V	21	24.57
16959.750000	45.75	54.00	8.25	V	23	22.75
17727.500000	46.39	54.00	7.61	V	23	23.39

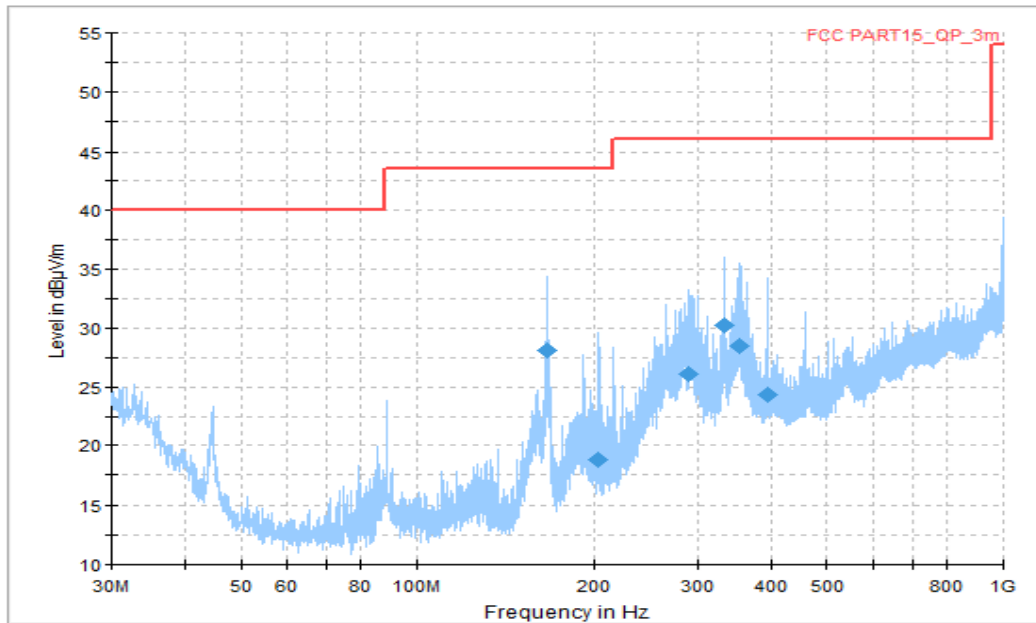


Figure A.1.23. Radiated Emission (Data Transfer : PC to TF Card, 30MHz to 1GHz)

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	P _{Mea} (dBµV)
166.446667	28.10	43.52	15.42	V	-31.5	59.60
203.306667	18.81	43.52	24.71	V	-33.3	52.11
290.229444	26.05	46.02	19.97	H	-33.7	59.75
332.208889	30.29	46.02	15.73	H	-30.8	61.09
354.141667	28.52	46.02	17.50	V	-22.0	50.52
394.504444	24.39	46.02	21.63	H	-20.6	44.99

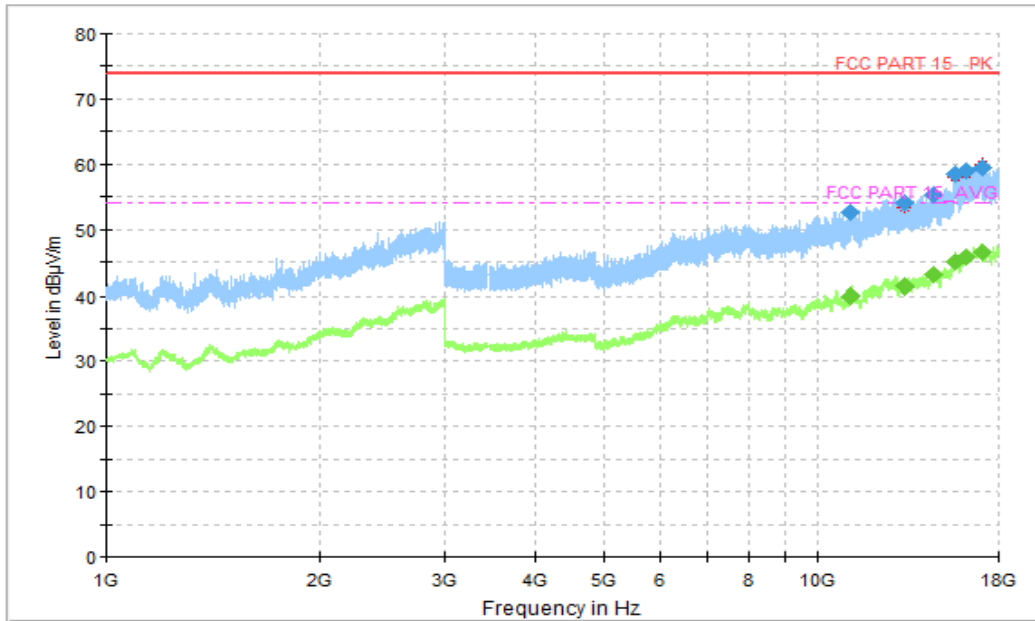


Figure A.1.24. Radiated Emission (Data Transfer : PC to TF Card, 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P _{Mea} (dBµV)
11146.250000	52.54	74.00	21.46	V	15	37.54
13248.000000	54.03	74.00	19.97	V	17	37.03
14567.000000	55.35	74.00	18.65	V	18	37.35
15628.250000	58.42	74.00	15.58	V	20	38.42
16152.500000	58.86	74.00	15.14	V	21	37.86
17034.750000	59.38	74.00	14.62	V	22	37.38

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	P _{Mea} (dBµV)
11146.250000	39.94	54.00	14.06	V	15	24.94
13248.000000	41.31	54.00	12.69	V	17	24.31
14567.000000	42.98	54.00	11.02	V	18	24.98
15628.250000	44.96	54.00	9.04	V	20	24.96
16152.500000	45.79	54.00	8.21	V	21	24.79
17034.750000	46.51	54.00	7.49	V	22	24.51

END OF REPORT