



LTE Band 66																	
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		132072	132322	132572				Channel		132047	132322	132597			
		Frequency(MHz)		1720	1745	1770				Frequency(MHz)		1717.5	1745	1772.5			
20M	QPSK	1	0	23.78	24.10	24.00	0	15M	QPSK	1	0	23.42	23.78	23.64	0		
		1	50	23.38	23.68	23.65	0			1	37	23.01	23.33	23.33	0		
		1	99	23.36	23.63	23.59	0			1	74	23.00	23.26	23.24	0		
		50	0	22.44	22.74	22.71	1			36	0	22.07	22.39	22.39	1		
		50	25	22.36	22.70	22.60	1			36	19	21.98	22.38	22.24	1		
		50	50	22.22	22.57	22.50	1			36	39	21.84	22.26	22.18	1		
	16QAM	100	0	22.42	22.69	22.60	1		75	0	22.08	22.34	22.22	1			
		1	0	23.02	23.37	23.30	1		1	0	22.94	23.36	23.28	1			
		1	50	23.07	23.35	23.30	1		1	37	23.02	23.30	23.26	1			
		1	99	22.98	23.20	23.21	1		1	74	22.96	23.12	23.20	1			
		50	0	21.54	21.86	21.79	2		36	0	21.46	21.82	21.74	2			
		50	25	21.58	21.83	21.81	2		36	19	21.55	21.77	21.79	2			
	64QAM	50	50	21.49	21.72	21.68	2		36	39	21.47	21.65	21.63	2			
		100	0	21.54	21.80	21.80	2		75	0	21.48	21.72	21.78	2			
		1	0	21.48	21.75	21.63	2		1	0	21.47	21.73	21.55	2			
		1	50	21.64	21.89	21.85	2		1	37	21.59	21.81	21.79	2			
		1	99	21.61	21.84	21.82	2		1	74	21.60	21.78	21.80	2			
		50	0	20.64	20.95	20.84	3		36	0	20.59	20.93	20.77	3			
	10M	QPSK	50	25	20.64	20.86	20.87		3	5M	QPSK	36	19	20.62	20.78	20.86	3
			50	50	20.47	20.79	20.72		3			36	39	20.39	20.75	20.67	3
			100	0	20.55	20.77	20.78		3			75	0	20.53	20.69	20.77	3
			1	0	23.50	23.79	23.73		0			1	0	23.53	23.83	23.75	0
			1	24	23.11	23.35	23.39		0			1	12	23.16	23.40	23.43	0
			1	49	23.03	23.34	23.29		0			1	24	23.11	23.35	23.38	0
16QAM		25	0	22.16	22.43	22.44	1	12	0		22.20	22.49	22.46	1			
		25	12	22.09	22.38	22.30	1	12	6		22.08	22.49	22.35	1			
		25	25	21.91	22.24	22.23	1	12	13		21.98	22.32	22.29	1			
		50	0	22.16	22.42	22.27	1	25	0		22.16	22.47	22.35	1			
		1	0	22.95	23.29	23.24	1	1	0		22.95	23.32	23.28	1			
		1	24	23.04	23.29	23.28	1	1	12		22.99	23.33	23.25	1			
64QAM		1	49	22.96	23.13	23.16	1	1	24		22.96	23.12	23.19	1			
		25	0	21.48	21.78	21.77	2	12	0		21.46	21.80	21.71	2			
		25	12	21.56	21.75	21.80	2	12	6		21.52	21.81	21.75	2			
		25	25	21.41	21.68	21.63	2	12	13		21.42	21.67	21.66	2			
		50	0	21.52	21.72	21.79	2	25	0		21.48	21.73	21.75	2			
		1	0	21.40	21.71	21.58	2	1	0		21.41	21.70	21.61	2			
3M		QPSK	1	24	21.61	21.83	21.83	2	1.4M		QPSK	1	12	21.56	21.87	21.79	2
			1	49	21.59	21.77	21.77	2				1	24	21.53	21.83	21.80	2
			25	0	20.58	20.87	20.82	3				12	0	20.60	20.90	20.76	3
			25	12	20.63	20.84	20.79	3				12	6	20.56	20.85	20.85	3
			25	25	20.42	20.71	20.66	3				12	13	20.43	20.74	20.64	3
			50	0	20.54	20.71	20.76	3				25	0	20.49	20.75	20.75	3
	16QAM	1	0	23.72	24.05	23.99	0	1		0	23.70	24.06	23.95	0			
		1	7	23.37	23.66	23.60	0	1		2	23.35	23.62	23.63	0			
		1	14	23.28	23.56	23.57	0	1		5	23.34	23.56	23.54	0			
		8	0	22.43	22.70	22.68	1	3		0	22.88	23.16	23.19	1			
		8	3	22.33	22.69	22.54	1	3		1	22.85	23.18	23.02	1			
		8	7	22.18	22.52	22.48	1	3		3	22.67	22.99	22.94	1			
	64QAM	15	0	22.36	22.67	22.57	1	6		0	22.41	22.63	22.58	1			
		1	0	23.00	23.29	23.29	1	1		0	22.97	23.30	23.25	1			
		1	7	22.99	23.31	23.25	1	1		2	23.05	23.27	23.28	1			
		1	14	22.95	23.14	23.19	1	1		5	22.93	23.12	23.20	1			
		8	0	21.53	21.81	21.71	2	3		0	22.00	22.31	22.24	2			
		8	3	21.52	21.80	21.77	2	3		1	22.00	22.32	22.26	2			



BUREAU
VERITAS

FCC SAR Test Report



< WWAN Reduced Power for Body >

Band Channel	WCDMA Band II			WCDMA Band IV			3GPP MPR (dB)
	9262	9400	9538	1312	1413	1513	
Frequency (MHz)	1852.4	1880.0	1907.6	1712.4	1732.6	1752.6	
RMC 12.2K	22.04	22.13	22.10	17.78	17.60	17.66	-
HSDPA Subtest-1	21.00	21.08	21.08	16.75	16.54	16.64	0
HSDPA Subtest-2	20.95	21.00	21.07	16.74	16.50	16.61	0
HSDPA Subtest-3	20.46	20.53	20.53	16.22	16.03	16.08	0.5
HSDPA Subtest-4	20.37	20.49	20.52	16.20	15.95	16.09	0.5
DC-HSDPA Subtest-1	20.96	21.03	21.07	16.70	16.46	16.63	0
DC-HSDPA Subtest-2	20.89	20.98	21.02	16.66	16.44	16.53	0
DC-HSDPA Subtest-3	20.39	20.48	20.51	16.16	16.01	16.02	0.5
DC-HSDPA Subtest-4	20.45	20.51	20.57	16.27	16.00	16.11	0.5
HSUPA Subtest-1	21.02	21.05	21.08	16.71	16.55	16.64	0
HSUPA Subtest-2	18.96	19.07	19.02	14.70	14.58	14.61	2
HSUPA Subtest-3	19.90	20.05	19.96	15.68	15.50	15.59	1
HSUPA Subtest-4	18.89	19.02	19.00	14.62	14.52	14.53	2
HSUPA Subtest-5	20.94	20.99	21.00	16.70	16.47	16.62	0



LTE Band 2																	
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		18700	18900	19100				Channel		18675	18900	19125			
		Frequency(MHz)		1860	1880	1900				Frequency(MHz)		1857.5	1880	1902.5			
20M	QPSK	1	0	22.36	22.36	22.34	0	15M	QPSK	1	0	22.28	22.32	22.29	0		
		1	50	22.37	22.27	22.33	0			1	37	22.35	22.19	22.32	0		
		1	99	22.41	22.40	22.38	0			1	74	22.33	22.36	22.33	0		
		50	0	21.34	21.27	21.30	1			36	0	21.31	21.21	21.28	1		
		50	25	21.40	21.31	21.32	1			36	19	21.38	21.24	21.27	1		
		50	50	21.33	21.27	21.32	1			36	39	21.27	21.19	21.30	1		
	16QAM	100	0	21.33	21.28	21.21	1		75	0	21.32	21.26	21.13	1			
		1	0	21.44	21.39	21.40	1		1	0	21.37	21.31	21.34	1			
		1	50	21.45	21.38	21.41	1		1	37	21.42	21.32	21.39	1			
		1	99	21.57	21.48	21.49	1		1	74	21.55	21.41	21.44	1			
		50	0	20.50	20.44	20.49	2		36	0	20.44	20.36	20.47	2			
		50	25	20.52	20.42	20.48	2		36	19	20.50	20.34	20.47	2			
	64QAM	50	50	20.44	20.44	20.42	2		36	39	20.36	20.40	20.37	2			
		100	0	20.48	20.38	20.44	2		75	0	20.46	20.30	20.43	2			
		1	0	20.53	20.50	20.53	2		1	0	20.47	20.45	20.52	2			
		1	50	20.52	20.47	20.43	2		1	37	20.51	20.45	20.38	2			
		1	99	20.56	20.53	20.57	2		1	74	20.48	20.46	20.55	2			
		50	0	19.24	19.17	19.17	3		36	0	19.23	19.13	19.14	3			
	10M	QPSK	50	25	19.28	19.26	19.20		3	5M	QPSK	36	19	19.25	19.25	19.14	3
			50	50	19.53	19.48	19.50		3			36	39	19.49	19.43	19.48	3
			100	0	19.43	19.34	19.37		3			75	0	19.42	19.28	19.35	3
			1	0	22.35	22.32	22.26		0			1	0	22.30	22.34	22.28	0
			1	24	22.33	22.24	22.27		0			1	12	22.30	22.22	22.31	0
			1	49	22.39	22.39	22.34		0			1	24	22.35	22.33	22.33	0
16QAM		25	0	21.28	21.22	21.29	1	16QAM	12		0	21.27	21.22	21.28	1		
		25	12	21.39	21.29	21.27	1		12		6	21.32	21.29	21.26	1		
		25	25	21.25	21.20	21.30	1		12		13	21.25	21.26	21.30	1		
		50	0	21.32	21.24	21.18	1		25		0	21.29	21.23	21.13	1		
		1	0	21.41	21.38	21.34	1		1		0	21.36	21.38	21.38	1		
		1	24	21.41	21.33	21.39	1		1		12	21.40	21.33	21.37	1		
64QAM		1	49	21.51	21.46	21.46	1	64QAM	1		24	21.55	21.40	21.48	1		
		25	0	20.48	20.36	20.48	2		12		0	20.42	20.40	20.44	2		
		25	12	20.44	20.38	20.43	2		12		6	20.49	20.36	20.46	2		
		25	25	20.41	20.38	20.40	2		12		13	20.42	20.37	20.37	2		
		50	0	20.47	20.33	20.36	2		25		0	20.42	20.30	20.42	2		
		1	0	20.47	20.47	20.49	2		1		0	20.52	20.48	20.45	2		
3M		QPSK	1	24	20.50	20.40	20.38	2	1.4M		QPSK	1	12	20.47	20.39	20.37	2
			1	49	20.50	20.45	20.55	2				1	24	20.55	20.47	20.55	2
			25	0	19.23	19.15	19.09	3				12	0	19.19	19.15	19.10	3
			25	12	19.21	19.18	19.14	3				12	6	19.26	19.18	19.19	3
			25	25	19.51	19.47	19.46	3				12	13	19.45	19.44	19.45	3
			50	0	19.41	19.26	19.36	3				25	0	19.41	19.26	19.36	3
	16QAM	1	0	22.30	22.28	22.32	0	16QAM		1	0	22.31	22.29	22.29	0		
		1	7	22.35	22.19	22.31	0			1	2	22.34	22.21	22.31	0		
		1	14	22.36	22.32	22.37	0			1	5	22.39	22.33	22.33	0		
		8	0	21.30	21.22	21.25	1			3	0	21.78	21.69	21.78	1		
		8	3	21.32	21.30	21.27	1			3	1	21.89	21.79	21.74	1		
		8	7	21.29	21.22	21.31	1			3	3	21.78	21.69	21.76	1		
	64QAM	15	0	21.27	21.26	21.16	1	64QAM		6	0	21.32	21.22	21.19	1		
		1	0	21.37	21.34	21.38	1			1	0	21.39	21.32	21.35	1		
		1	7	21.37	21.36	21.36	1			1	2	21.43	21.30	21.39	1		
		1	14	21.55	21.40	21.47	1			1	5	21.52	21.40	21.48	1		
		8	0	20.42	20.38	20.41	2			3	0	20.96	20.89	20.94	2		
		8	3	20.46	20.40	20.42	2			3	1	20.94	20.91	20.93	2		



BUREAU VERITAS

FCC SAR Test Report



LTE Band 4																		
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)			
		Channel		20050	20175	20300				Channel		20025	20175	20325				
		Frequency(MHz)		1720	1732.5	1745				Frequency(MHz)		1717.5	1732.5	1747.5				
20M	QPSK	1	0	18.62	18.41	18.80	0	15M	QPSK	1	0	18.58	18.38	18.74	0			
		1	50	18.45	18.24	18.63	0			1	37	18.43	18.23	18.59	0			
		1	99	18.53	18.32	18.78	0			1	74	18.47	18.27	18.77	0			
		50	0	17.84	17.61	18.00	1			36	0	17.83	17.59	17.95	1			
		50	25	17.29	17.08	17.55	1			36	19	17.21	17.01	17.53	1			
		50	50	17.27	17.02	17.45	1			36	39	17.26	16.98	17.42	1			
	16QAM	100	0	17.53	17.33	17.70	1		75	0	17.50	17.32	17.64	1				
		1	0	18.14	17.91	18.36	1		1	0	18.10	17.86	18.34	1				
		1	50	18.06	17.88	18.29	1		1	37	18.00	17.86	18.26	1				
		1	99	18.06	17.78	18.27	1		1	74	18.04	17.70	18.26	1				
		50	0	17.56	17.38	17.79	2		36	0	17.48	17.34	17.74	2				
		50	25	17.05	16.80	17.26	2		36	19	17.02	16.74	17.24	2				
	64QAM	50	50	17.04	16.78	17.17	2		36	39	17.03	16.73	17.09	2				
		100	0	17.27	17.08	17.49	2		75	0	17.21	17.05	17.45	2				
		1	0	17.29	17.02	17.46	2		1	0	17.27	16.95	17.41	2				
		1	50	16.55	16.31	16.79	2		1	37	16.49	16.23	16.77	2				
		1	99	16.21	15.98	16.34	2		1	74	16.20	15.96	16.26	2				
		50	0	16.10	15.87	16.31	3		36	0	16.03	15.79	16.25	3				
	15M Bandwidth	50	25	15.79	15.58	15.97	3		36	19	15.77	15.57	15.93	3				
		50	50	15.67	15.39	15.88	3		36	39	15.65	15.31	15.87	3				
		100	0	15.61	15.33	15.82	3		75	0	15.59	15.25	15.81	3				
		10M	QPSK	Channel	20000	20175	20350		3GPP MPR (dB)	5M	QPSK	Channel	19975	20175	20375	3GPP MPR (dB)		
				Frequency(MHz)		1715	1732.5					1750	Frequency(MHz)		1712.5		1732.5	1752.5
				1	0	18.54	18.37					18.75	0	1	0		18.57	18.33
1	24			18.42	18.18	18.61	0	1	12			18.41	18.19	18.58	0			
1	49			18.51	18.25	18.73	0	1	24			18.45	18.31	18.73	0			
25	0			17.78	17.53	17.98	1	12	0			17.80	17.56	17.99	1			
16QAM	25		12	17.28	17.06	17.47	1	12	6		17.23	17.06	17.50	1				
	25		25	17.20	16.94	17.39	1	12	13		17.20	16.97	17.43	1				
	1		0	18.12	17.84	18.31	1	25	0		17.45	17.31	17.65	1				
	1		24	18.00	17.80	18.27	1	1	0		18.12	17.83	18.34	1				
	1		49	18.04	17.70	18.26	1	1	12		17.98	17.82	18.21	1				
	25		0	17.48	17.34	17.74	2	1	24		18.00	17.76	18.21	1				
64QAM	25		12	17.03	16.72	17.25	2	12	0		17.49	17.33	17.77	2				
	25		25	16.96	16.74	17.12	2	12	6		16.99	16.73	17.21	2				
	50		0	17.24	17.02	17.47	2	12	13		16.97	16.73	17.15	2				
	1		0	17.27	16.95	17.41	2	25	0		17.19	17.06	17.43	2				
	1		24	16.49	16.23	16.77	2	1	0		17.21	17.01	17.44	2				
	1		49	16.20	15.96	16.26	2	1	12		16.51	16.26	16.71	2				
5M Bandwidth	25		0	16.05	15.79	16.25	3	1	24		16.13	15.97	16.32	2				
	25		12	15.78	15.52	15.95	3	12	0		16.06	15.82	16.23	3				
	25		25	15.62	15.31	15.82	3	12	6		15.73	15.56	15.94	3				
	50		0	15.60	15.27	15.80	3	12	13		15.63	15.34	15.80	3				
	3M Bandwidth		QPSK	Channel	19965	20175	20385	3GPP MPR (dB)	1.4M		QPSK	Channel	19957	20175	20393	3GPP MPR (dB)		
				Frequency(MHz)		1711.5	1732.5					1753.5	Frequency(MHz)		1710.7		1732.5	1754.3
1		0		18.56	18.34	18.75	0			1		0	18.61	18.35	18.78		0	
1		7		18.38	18.19	18.61	0	1		2		18.42	18.18	18.61	0			
1		14		18.45	18.30	18.72	0	1		5		18.51	18.25	18.73	0			
8		0		17.76	17.60	17.98	1	3		0		18.28	18.03	18.48	1			
16QAM		8	3	17.25	17.03	17.47	1	3		1	17.78	17.56	17.97	1				
		8	7	17.19	17.01	17.43	1	3		3	17.72	17.44	17.89	1				
		15	0	17.48	17.28	17.66	1	6		0	17.52	17.27	17.68	1				
		1	0	18.12	17.83	18.35	1	1		0	18.09	17.84	18.31	1				
		1	7	17.98	17.84	18.24	1	1		2	18.04	17.80	18.27	1				
		1	14	18.03	17.72	18.25	1	1		5	18.01	17.70	18.26	1				
64QAM	8	0	17.54	17.31	17.74	2	3	0	18.02	17.83	18.24	2						
	8	3	16.99	16.72	17.24	2	3	1	17.47	17.29	17.71	2						
	8	7	17.03	16.76	17.09	2	3	3	17.50	17.23	17.66	2						
	15	0	17.22	17.00	17.43	2	6	0	17.21	17.06	17.44	2						
	1	0	17.28	16.96	17.44	2	1	0	17.22	16.97	17.44	2						
	1	7	16.50	16.29	16.72	2	1	2	16.47	16.29	16.74	2						
1.4M Bandwidth	1	14	16.19	15.90	16.33	2	1	5	16.19	15.90	16.32	2						
	8	0	16.02	15.83	16.26	3	3	0	16.52	16.31	16.73	3						
	8	3	15.77	15.50	15.96	3	3	1	16.23	16.06	16.41	3						
	8	7	15.59	15.35	15.83	3	3	3	16.12	15.81	16.37	3						
	15	0	15.59	15.25	15.81	3	6	0	15.57	15.28	15.77	3						



LTE Band 7																		
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)			
		Channel		20850	21100	21350				Channel		20825	21100	21375				
		Frequency(MHz)		2510	2535	2560				Frequency(MHz)		2507.5	2535	2562.5				
20M	QPSK	1	0	18.14	18.41	18.14	0	15M	QPSK	1	0	18.13	18.39	18.06	0			
		1	50	17.90	18.17	17.98	0			1	37	17.83	18.09	17.92	0			
		1	99	17.96	18.21	18.04	0			1	74	17.93	18.15	18.02	0			
		50	0	17.58	17.81	17.62	1			36	0	17.56	17.74	17.57	1			
		50	25	17.11	17.37	17.22	1			36	19	17.05	17.29	17.20	1			
		50	50	17.22	17.44	17.30	1			36	39	17.20	17.36	17.29	1			
	16QAM	100	0	17.34	17.66	17.44	1		75	0	17.26	17.62	17.39	1				
		1	0	17.09	17.31	17.17	1		1	0	17.07	17.23	17.16	1				
		1	50	16.52	16.84	16.62	1		1	37	16.44	16.80	16.57	1				
		1	99	16.52	16.77	16.60	1		1	74	16.49	16.71	16.58	1				
		50	0	16.27	16.50	16.31	2		36	0	16.25	16.43	16.26	2				
		50	25	16.20	16.46	16.31	2		36	19	16.14	16.38	16.29	2				
	64QAM	50	50	16.10	16.37	16.10	2		36	39	16.09	16.35	16.02	2				
		100	0	16.14	16.39	16.20	2		75	0	16.09	16.31	16.14	2				
		1	0	16.16	16.39	16.22	2		1	0	16.15	16.33	16.20	2				
		1	50	15.51	15.74	15.55	2		1	37	15.49	15.67	15.50	2				
		1	99	15.58	15.84	15.69	2		1	74	15.52	15.76	15.67	2				
		50	0	15.01	15.28	15.01	3		36	0	15.00	15.26	14.93	3				
	10M	QPSK	50	25	14.54	14.81	14.62		3	36	19	14.47	14.73	14.56	3			
			50	50	14.63	14.92	14.68		3	36	39	14.61	14.91	14.64	3			
			100	0	14.61	14.83	14.69		3	75	0	14.59	14.75	14.68	3			
			16QAM	Channel		20800	21100		21400	3GPP MPR (dB)	5M	MCS Index	Channel		20775	21100	21425	3GPP MPR (dB)
				Frequency(MHz)		2505	2535		2565				Frequency(MHz)		2502.5	2535	2567.5	
				1	0	18.08	18.33		18.12				0	1	0	18.10	18.36	
1		24		17.88	18.09	17.97	0	1	12				17.82	18.16	17.93	0		
1		49		17.88	18.17	17.99	0	1	24				17.92	18.16	18.03	0		
25		0		17.56	17.73	17.61	1	12	0				17.52	17.79	17.57	1		
64QAM		25	12	17.03	17.33	17.17	1	12	6	17.04		17.32	17.20	1				
		25	25	17.19	17.38	17.28	1	12	13	17.14		17.42	17.25	1				
		50	0	17.32	17.59	17.39	1	25	0	17.32		17.58	17.42	1				
		1	0	17.03	17.23	17.15	1	1	0	17.01		17.25	17.09	1				
		1	24	16.51	16.82	16.54	1	1	12	16.46		16.82	16.56	1				
		1	49	16.47	16.69	16.54	1	1	24	16.45		16.72	16.58	1				
16QAM		25	0	16.26	16.44	16.29	2	12	0	16.21		16.43	16.26	2				
		25	12	16.18	16.38	16.30	2	12	6	16.13		16.41	16.29	2				
		25	25	16.02	16.33	16.05	2	12	13	16.02		16.35	16.04	2				
		50	0	16.12	16.31	16.19	2	25	0	16.06		16.38	16.18	2				
		1	0	16.08	16.35	16.17	2	1	0	16.12		16.34	16.14	2				
		1	24	15.48	15.68	15.53	2	1	12	15.43		15.73	15.53	2				
64QAM		1	49	15.56	15.77	15.64	2	1	24	15.54		15.79	15.61	2				
		25	0	14.95	15.20	14.99	3	12	0	14.95		15.26	14.98	3				
		25	12	14.53	14.79	14.54	3	12	6	14.46		14.80	14.60	3				
	25	25	14.58	14.84	14.62	3	12	13	14.59	14.87		14.60	3					
	50	0	14.60	14.77	14.67	3	25	0	14.55	14.81		14.66	3					



LTE Band 66																	
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		132072	132322	132572				Channel		132047	132322	132597			
		Frequency(MHz)		1720	1745	1770				Frequency(MHz)		1717.5	1745	1772.5			
20M	QPSK	1	0	18.09	18.64	18.27	0	15M	QPSK	1	0	18.03	18.62	18.21	0		
		1	50	17.93	18.46	18.16	0			1	37	17.86	18.41	18.14	0		
		1	99	17.86	18.36	18.05	0			1	74	17.80	18.29	18.00	0		
		50	0	17.65	18.18	17.88	1			36	0	17.58	18.13	17.86	1		
		50	25	17.09	17.66	17.29	1			36	19	17.01	17.64	17.23	1		
		50	50	17.06	17.64	17.30	1			36	39	16.98	17.63	17.28	1		
	16QAM	100	0	17.41	17.91	17.55	1		75	0	17.37	17.86	17.47	1			
		1	0	17.45	18.03	17.69	1		1	0	17.37	18.02	17.67	1			
		1	50	17.18	17.69	17.37	1		1	37	17.13	17.64	17.33	1			
		1	99	17.44	17.89	17.63	1		1	74	17.42	17.81	17.62	1			
		50	0	16.77	17.32	16.98	2		36	0	16.69	17.28	16.93	2			
		50	25	16.29	16.77	16.48	2		36	19	16.26	16.71	16.46	2			
	64QAM	50	50	16.05	16.51	16.20	2		36	39	16.03	16.44	16.15	2			
		100	0	15.59	16.08	15.81	2		75	0	15.53	16.00	15.79	2			
		1	0	16.43	16.93	16.54	2		1	0	16.42	16.91	16.46	2			
		1	50	16.24	16.72	16.41	2		1	37	16.19	16.64	16.35	2			
		1	99	16.10	16.56	16.27	2		1	74	16.09	16.50	16.25	2			
		50	0	14.91	15.45	15.07	3		36	0	14.86	15.43	15.00	3			
	10M	QPSK	50	25	15.31	15.76	15.50		3	36	19	15.29	15.68	15.49	3		
			50	50	15.20	15.75	15.41		3	36	39	15.12	15.71	15.36	3		
			100	0	15.05	15.50	15.24		3	75	0	15.03	15.42	15.23	3		
			10M	QPSK	Channel	132022	132322		132622	3GPP MPR (dB)	5M	QPSK	Channel	131997	132322	132647	3GPP MPR (dB)
					Frequency(MHz)	1715	1745		1775				Frequency(MHz)	1712.5	1745	1777.5	
					1	0	18.06		18.58				18.25	0	1	0	
1	24	17.91			18.38	18.15	0	1	12	17.91			18.38	18.14	0		
1	49	17.78			18.32	18.00	0	1	24	17.81			18.28	18.04	0		
25	0	17.62			18.12	17.86	1	12	0	17.61			18.13	17.83	1		
16QAM	25	12		17.07	17.59	17.24	1	12	6	17.01		17.65	17.24	1			
	25	25		17.00	17.56	17.28	1	12	13	17.02		17.59	17.29	1			
	50	0		17.40	17.89	17.47	1	25	0	17.35		17.89	17.50	1			
	1	0		17.38	17.95	17.63	1	1	0	17.38		17.98	17.67	1			
	1	24		17.15	17.63	17.35	1	1	12	17.10		17.67	17.32	1			
	1	49		17.42	17.82	17.58	1	1	24	17.42		17.81	17.61	1			
64QAM	25	0		16.71	17.24	16.96	2	12	0	16.69		17.26	16.90	2			
	25	12		16.27	16.69	16.47	2	12	6	16.23		16.75	16.42	2			
	25	25		15.97	16.47	16.15	2	12	13	15.98		16.46	16.18	2			
	50	0		15.57	16.00	15.80	2	25	0	15.53		16.01	15.76	2			
	1	0		16.35	16.89	16.49	2	1	0	16.36		16.88	16.52	2			
	1	24		16.21	16.66	16.39	2	1	12	16.16		16.70	16.35	2			
3M	QPSK	1		49	16.08	16.49	16.22	2	1	24		16.02	16.55	16.25	2		
		25		0	14.85	15.37	15.05	3	12	0		14.87	15.40	14.99	3		
		25		12	15.30	15.74	15.42	3	12	6		15.23	15.75	15.48	3		
		25		25	15.15	15.67	15.35	3	12	13		15.16	15.70	15.33	3		
		50		0	15.04	15.44	15.22	3	25	0		14.99	15.48	15.21	3		
		3M		QPSK	Channel	131987	132322	132657	3GPP MPR (dB)	1.4M		QPSK	Channel	131979	132322	132665	3GPP MPR (dB)
Frequency(MHz)	1711.5		1745		1778.5	Frequency(MHz)	1710.7	1745			1779.3						
1	0		18.03		18.59	18.26	0	1			0		18.01	18.60	18.22	0	
1	7		17.92		18.44	18.11	0	1	2		17.90		18.40	18.14	0		
1	14		17.78		18.29	18.03	0	1	5		17.84		18.29	18.00	0		
8	0		17.64		18.14	17.85	1	3	0		18.09		18.60	18.36	1		
16QAM	8		3	17.06	17.65	17.23	1	3	1		17.58	18.14	17.71	1			
	8		7	17.02	17.59	17.28	1	3	3		17.51	18.06	17.74	1			
	15		0	17.35	17.89	17.52	1	6	0		17.40	17.85	17.53	1			
	1		0	17.43	17.95	17.68	1	1	0		17.40	17.96	17.64	1			
	1		7	17.10	17.65	17.32	1	1	2		17.16	17.61	17.35	1			
	1		14	17.41	17.83	17.61	1	1	5		17.39	17.81	17.62	1			
64QAM	8		0	16.76	17.27	16.90	2	3	0		17.23	17.77	17.43	2			
	8		3	16.23	16.74	16.44	2	3	1		16.71	17.26	16.93	2			
	8		7	16.03	16.44	16.15	2	3	3		16.51	16.96	16.69	2			
	15		0	15.53	16.00	15.79	2	6	0		15.53	16.06	15.76	2			
	1		0	16.42	16.91	16.46	2	1	0		16.36	16.88	16.52	2			
	1		7	16.17	16.64	16.35	2	1	2		16.16	16.70	16.36	2			
1.4M	QPSK		1	14	16.08	16.55	16.23	2	1		5	16.08	16.48	16.25	2		
			8	0	14.89	15.37	15.06	3	3		0	15.33	15.89	15.49	3		
			8	3	15.29	15.68	15.49	3	3		1	15.75	16.24	15.94	3		
			8	7	15.18	15.74	15.37	3	3		3	15.65	16.17	15.90	3		
			15	0	15.02	15.49	15.18	3	6		0	15.01	15.45	15.19	3		



WLAN / BT

	Mode	Channel	Frequency (MHz)	Average power (dBm)
2.4GHz WLAN	802.11b 1Mbps	1	2412	18.12
		6	2437	17.78
		11	2462	18.10
	802.11g 6Mbps	1	2412	15.12
		6	2437	14.64
		11	2462	15.16
	802.11n-HT20 MCS0	1	2412	14.26
		6	2437	13.92
		11	2462	13.42
	802.11n-HT40 MCS0	3	2422	13.84
		6	2437	13.68
		9	2452	13.54

	Mode	Channel	Frequency(MHz)	Average power (dBm)
Bluetooth	BR / EDR	0	2402	7.04
		39	2441	6.76
		78	2480	5.58
	BLE 1Mbps	0	2402	0.60
		19	2440	0.25
		39	2480	-0.94
	BLE 2Mbps	0	2402	-0.85
		19	2440	-1.22
		39	2480	-2.16



5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)
	802.11a 6Mbps	36	5180	18.28
		40	5200	18.26
		44	5220	18.19
		48	5240	18.30
	802.11n-HT20 MCS0	36	5180	18.23
		40	5200	18.14
		44	5220	18.21
		48	5240	18.23
	802.11n-HT40 MCS0	38	5190	15.01
46		5230	14.98	
802.11ac-VHT20 MCS0	36	5180	18.17	
	40	5200	18.25	
	44	5220	18.18	
	48	5240	18.26	
802.11ac-VHT40 MCS0	38	5190	14.70	
	46	5230	14.85	
802.11ac-VHT80 MCS0	42	5210	14.22	

5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)
	802.11a 6Mbps	52	5260	18.65
		56	5280	18.75
		60	5300	18.82
		64	5320	18.86
	802.11n-HT20 MCS0	52	5260	18.20
		56	5280	18.32
		60	5300	18.42
		64	5320	18.32
	802.11n-HT40 MCS0	54	5270	15.30
		62	5310	15.60
	802.11ac-VHT20 MCS0	52	5260	18.82
		56	5280	18.75
60		5300	18.48	
64		5320	18.36	
802.11ac-VHT40 MCS0	54	5270	14.51	
	62	5310	14.47	
802.11ac-VHT80 MCS0	58	5290	14.60	



5.6GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)
	802.11a 6Mbps	100	5500	18.46
		116	5580	18.35
		124	5620	18.29
		132	5660	18.33
		140	5700	18.80
	802.11n-HT20 MCS0	100	5500	18.70
		116	5580	18.72
		124	5620	18.65
		132	5660	18.67
140		5700	18.38	
802.11n-HT40 MCS0	102	5510	14.76	
	110	5550	15.11	
	126	5630	15.08	
	134	5670	15.13	
802.11ac-VHT20 MCS0	100	5500	18.68	
	116	5580	18.70	
	124	5620	18.65	
	132	5660	18.69	
	140	5700	18.27	
802.11ac-VHT40 MCS0	102	5510	14.88	
	110	5550	14.46	
	126	5630	14.81	
	134	5670	14.38	
802.11ac-VHT80 MCS0	106	5530	14.10	
	122	5610	14.12	

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)
	802.11a 6Mbps	149	5745	18.52
		157	5785	18.72
		165	5825	18.84
	802.11n-HT20 MCS0	149	5745	18.70
		157	5785	18.48
		165	5825	18.43
	802.11n-HT40 MCS0	151	5755	14.29
		159	5795	14.48
	802.11ac-VHT20 MCS0	149	5745	18.68
157		5785	18.42	
165		5825	18.40	
802.11ac-VHT40 MCS0	151	5755	14.20	
	159	5795	14.15	
802.11ac-VHT80 MCS0	155	5775	14.62	



BUREAU
VERITAS



4.6 SAR Testing Results

4.6.1 SAR Test Reduction Considerations

<KDB 447498 D04, General RF Exposure Guidance>

Testing of other required channels within the operating mode of a frequency band is not required when the reported SAR for the mid-band or highest output power channel is:

- (1) ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- (2) ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- (3) ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

<KDB 941225 D01, 3G SAR Measurement Procedures>

The mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

<KDB 941225 D05, SAR Evaluation Considerations for LTE Devices>

- (1) QPSK with 1 RB and 50% RB allocation

Start with the largest channel bandwidth and measure SAR, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

- (2) QPSK with 100% RB allocation

SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

- (3) Higher order modulations

SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> 1/2$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

- (4) Other channel bandwidth

SAR is required when the highest maximum output power of the smaller channel bandwidth is $> 1/2$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

<KDB 248227 D01, SAR Guidance for Wi-Fi Transmitters>

- (1) For handsets operating next to ear, hotspot mode or mini-tablet configurations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When the reported SAR of initial test position is ≤ 0.4 W/kg, SAR testing for remaining test positions is not required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
- (2) For WLAN 2.4 GHz, the highest measured maximum output power channel for DSSS was selected for SAR measurement. When the reported SAR is ≤ 0.8 W/kg, no further SAR testing is required. Otherwise, SAR is evaluated at the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is ≤ 1.2 W/kg.
- (3) For WLAN 5 GHz, the initial test configuration was selected according to the transmission mode with the highest maximum output power. When the reported SAR of initial test configuration is > 0.8 W/kg, SAR is required for the subsequent highest measured output power channel until the reported SAR result is ≤ 1.2 W/kg or all required channels are measured. For other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and it is ≤ 1.2 W/kg.
- (4) For WLAN MIMO mode, the power-based standalone SAR test exclusion or the sum of SAR provision in KDB 447498 to determine simultaneous transmission SAR test exclusion should be applied. Otherwise, SAR for MIMO mode will be measured with all applicable antennas transmitting simultaneously at the specified maximum output power of MIMO operation.



4.6.2 SAR Results for Head Exposure Condition

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Power Reduction	Duty Cycle %	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Duty Cycle Scaling Factor	Tune-up Scaling Factor	Scaled SAR-1g (W/kg)
1	GSM850	GPRS2Tx slot	Right Cheek	128	-	-	Full	-	32	30.3	-0.04	0.116	1.00	1.48	0.17
2	GSM1900	GPRS2Tx slot	Right Cheek	512	-	-	Full	-	27	27.34	-0.11	0.026	1.00	0.92	0.02
3	WCDMA II	RMC12.2K	Right Cheek	9400	-	-	Full	-	25	23.7	0.18	0.014	1.00	1.35	0.02
4	WCDMA IV	RMC12.2K	Right Cheek	1312	-	-	Full	-	25	23.75	0.00	0.018	1.00	1.33	0.02
5	WCDMA V	RMC12.2K	Right Cheek	4182	-	-	Full	-	25	23.99	0.00	0.261	1.00	1.26	0.33
6	LTE 2	QPSK20M	Right Cheek	18700	1	99	Full	-	24.5	23.96	-0.04	0.158	1.00	1.13	0.18
7	LTE 5	QPSK10M	Right Cheek	20450	1	0	Full	-	25	23.47	0.09	0.241	1.00	1.42	0.34
8	LTE 7	QPSK20M	Right Cheek	21100	1	0	Full	-	24	23.24	0.03	0.114	1.00	1.19	0.14
9	LTE 12	QPSK10M	Left Cheek	23095	1	0	Full	-	25	23.95	0.04	0.147	1.00	1.27	0.19
10	LTE 13	QPSK10M	Left Cheek	23230	1	0	Full	-	25	23.98	0.16	0.228	1.00	1.26	0.29
11	LTE 66	QPSK20M	Right Cheek	132572	1	0	Full	-	24.5	24	-0.07	0.147	1.00	1.12	0.17
12	WLAN2.4G	802.11b	Left Cheek	1	-	-	Full	96.78	19	18.12	0.00	0.738	1.03	1.22	0.93
	WLAN2.4G	802.11b	Left Cheek	11	-	-	Full	96.78	19	18.1	0.05	0.701	1.03	1.23	0.89
13	WLAN5G	802.11a	Right Tilted	64	-	-	Full	89.68	19.5	18.86	-0.08	0.553	1.12	1.16	0.71
14	WLAN5G	802.11a	Right Tilted	140	-	-	Full	89.68	19.5	18.8	0.05	0.429	1.12	1.17	0.56
15	WLAN5G	802.11a	Left Cheek	165	-	-	Full	90.32	19.5	18.84	-0.06	0.554	1.11	1.16	0.71
16	BT	GFSK	Left Cheek	0	-	-	Full	77.6	9	7.15	0.18	0.061	1.29	1.53	0.12

4.6.3 SAR Results for Body-worn Exposure Condition (Separation Distance is 1.0 cm Gap)

Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Ch.	RB#	RB Offset	Power Reduction	Duty Cycle %	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Duty Cycle Scaling Factor	Tune-up Scaling Factor	Scaled SAR-1g (W/kg)
17	GSM850	GPRS2Tx slot	Rear Face	1	128	-	-	Full	-	32	30.3	-0.09	0.363	-	1.48	0.54
18	GSM1900	GPRS2Tx slot	Rear Face	1	512	-	-	Full	-	29	27.34	-0.15	0.537	-	1.47	0.79
	WCDMA II	RMC12.2K	Rear Face	1	9400	-	-	Reduce	-	23	22.13	0.07	0.414	-	1.22	0.51
19	WCDMA II	RMC12.2K	Front Face	1.3	9400	-	-	Full	-	25	23.7	0.14	0.470	-	1.35	0.63
	WCDMA IV	RMC12.2K	Rear Face	1	1312	-	-	Reduce	-	18.5	17.78	0.11	0.412	-	1.18	0.49
20	WCDMA IV	RMC12.2K	Front Face	1.3	1312	-	-	Full	-	25	23.75	-0.08	0.811	-	1.33	1.08
	WCDMA IV	RMC12.2K	Front Face	1.3	1413	-	-	Full	-	25	23.71	0.04	0.797	-	1.35	1.07
	WCDMA IV	RMC12.2K	Front Face	1.3	1513	-	-	Full	-	25	23.73	0.09	0.689	-	1.34	0.92
21	WCDMA V	RMC12.2K	Rear Face	1	4182	-	-	Full	-	25	23.99	0.09	0.318	-	1.26	0.40
22	LTE 2	QPSK20M	Rear Face	1	18700	1	99	Reduce	-	22.5	22.41	0.12	0.771	-	1.02	0.79
	LTE 2	QPSK20M	Front Face	1.3	18700	1	99	Full	-	24.5	23.96	0.09	0.462	-	1.13	0.52
23	LTE 5	QPSK10M	Rear Face	1	20450	1	0	Full	-	25	23.47	0.03	0.319	-	1.42	0.45
	LTE 7	QPSK20M	Rear Face	1	21100	1	0	Reduce	-	19	18.41	0.13	0.217	-	1.15	0.25
24	LTE 7	QPSK20M	Front Face	1.3	21100	1	0	Full	-	24	23.24	0.04	0.285	-	1.19	0.34
25	LTE 12	QPSK10M	Rear Face	1	23095	1	0	Full	-	25	23.95	0.04	0.288	-	1.27	0.37
26	LTE 13	QPSK10M	Rear Face	1	23230	1	0	Full	-	25	23.98	0.06	0.402	-	1.26	0.51
	LTE 66	QPSK20M	Rear Face	1	132322	1	0	Reduce	-	19.5	18.64	0.04	0.631	-	1.22	0.77
27	LTE 66	QPSK20M	Front Face	1.3	132072	1	0	Full	-	24.5	23.78	0.16	0.918	-	1.18	1.08
	LTE 66	QPSK20M	Front Face	1.3	132322	1	0	Full	-	24.5	24.1	-0.03	0.926	-	1.10	1.02
	LTE 66	QPSK20M	Front Face	1.3	132572	1	0	Full	-	24.5	24	-0.01	0.699	-	1.12	0.78
28	WLAN2.4G	802.11b	Rear Face	1	1	-	-	Full	96.78	19	18.12	0.07	0.267	1.03	1.22	0.34
29	WLAN5G	802.11a	Rear Face	1	64	-	-	Full	89.68	19	18.86	0.11	0.645	1.12	1.03	0.74
30	WLAN5G	802.11a	Rear Face	1	140	-	-	Full	89.68	19	18.8	0.09	0.624	1.12	1.05	0.73
31	WLAN5G	802.11a	Rear Face	1	165	-	-	Full	90.32	19	18.84	-0.09	0.637	1.11	1.04	0.73
32	BT	GFSK	Rear Face	1	0	-	-	Full	76.8	9	7.04	0.03	0.013	1.30	1.57	0.03

4.6.4 SAR Results for Hotspot Exposure Condition (Separation Distance is 1.0 cm Gap)

Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Ch.	RB#	RB Offset	Power Reduction	Duty Cycle %	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Duty Cycle Scaling Factor	Tune-up Scaling Factor	Scaled SAR-1g (W/kg)
33	GSM850	GPRS2Tx slot	Rear Face	1	128	-	-	Full	-	32	30.3	-0.09	0.363	-	1.48	0.54
34	GSM1900	GPRS2Tx slot	Bottom Side	1	512	-	-	Full	-	29	27.34	-0.15	0.537	-	1.47	0.79
35	WCDMA II	RMC12.2K	Bottom Side	1	9400	-	-	Reduce	-	23	22.13	0.01	0.794	-	1.22	0.97
	WCDMA II	RMC12.2K	Front Face	1.3	9400	-	-	Full	-	25	23.7	0.14	0.470	-	1.35	0.63
	WCDMA II	RMC12.2K	Bottom Side	1	9262	-	-	Reduce	-	23	22.04	0.09	0.690	-	1.25	0.86



Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Ch.	RB#	RB Offset	Power Reduction	Duty Cycle %	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Duty Cycle Scaling Factor	Tune-up Scaling Factor	Scaled SAR-1g (W/kg)
	WCDMA II	RMC12.2K	Bottom Side	1	9538	-	-	Reduce	-	23	22.1	-0.15	0.673	-	1.23	0.83
	WCDMA IV	RMC12.2K	Bottom Side	1	1312	-	-	Reduce	-	18.5	17.78	0.1	0.506	-	1.18	0.60
36	WCDMA IV	RMC12.2K	Bottom Side	2	1312	-	-	Full	-	25	23.75	0.05	0.852	-	1.33	1.14
	WCDMA IV	RMC12.2K	Bottom Side	2	1413	-	-	Full	-	25	23.71	0.15	0.839	-	1.35	1.13
	WCDMA IV	RMC12.2K	Bottom Side	2	1513	-	-	Full	-	25	23.73	0.08	0.667	-	1.34	0.89
37	WCDMA V	RMC12.2K	Rear Face	1	4182	-	-	Full	-	25	23.99	0.09	0.318	-	1.26	0.40
38	LTE 2	QPSK20M	Bottom Side	1	18700	1	99	Reduce	-	22.5	22.41	0.1	1.120	-	1.02	1.14
	LTE 2	QPSK20M	Bottom Side	2	18700	1	99	Full	-	24.5	23.96	0.11	0.702	-	1.13	0.79
	LTE 2	QPSK20M	Bottom Side	1	18900	1	99	Reduce	-	22.5	22.4	-0.09	1.040	-	1.02	1.06
	LTE 2	QPSK20M	Bottom Side	1	19100	1	99	Reduce	-	22.5	22.38	0.04	1.070	-	1.03	1.10
39	LTE 5	QPSK10M	Rear Face	1	20450	1	0	Full	-	25	23.47	0.03	0.319	-	1.42	0.45
	LTE 7	QPSK20M	Rear Face	1	21100	1	0	Reduce	-	19	18.41	0.13	0.217	-	1.15	0.25
40	LTE 7	QPSK20M	Front Face	1.3	21100	1	0	Full	-	24	23.24	0.04	0.285	-	1.19	0.34
41	LTE 12	QPSK10M	Rear Face	1	23095	1	0	Full	-	25	23.95	0.04	0.288	-	1.27	0.37
42	LTE 13	QPSK10M	Rear Face	1	23230	1	0	Full	-	25	23.98	0.06	0.402	-	1.26	0.51
	LTE 66	QPSK20M	Bottom Side	1	132322	1	0	Reduce	-	19.5	18.64	0.04	0.643	-	1.22	0.78
43	LTE 66	QPSK20M	Front Face	1.3	132072	1	0	Full	-	24.5	23.78	0.16	0.918	-	1.18	1.08
	LTE 66	QPSK20M	Front Face	1.3	132322	1	0	Full	-	24.5	24.1	-0.03	0.926	-	1.10	1.02
	LTE 66	QPSK20M	Front Face	1.3	132572	1	0	Full	-	24.5	24	-0.01	0.699	-	1.12	0.78
44	WLAN2.4G	802.11b	Rear Face	1	1	-	-	Full	96.78	19	18.12	0.07	0.267	1.03	1.22	0.34
45	WLAN5G	802.11a	Rear Face	1	48	-	-	Full	89.68	19	18.3	0.05	0.545	1.12	1.17	0.71
46	WLAN5G	802.11a	Rear Face	1	165	-	-	Full	90.32	19	18.84	-0.09	0.637	1.11	1.04	0.73
47	BT	GFSK	Rear Face	1	0	-	-	Full	76.8	9	7.04	0.03	0.013	1.30	1.57	0.03

4.6.5 SAR Results for Extremity Exposure Condition (Separation Distance is 0 cm Gap)

Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Ch.	RB#	RB Offset	Power Reduction	Duty Cycle %	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-10g (W/kg)	Duty Cycle Scaling Factor	Tune-up Scaling Factor	Scaled SAR-10g (W/kg)
48	WCDMA IV	RMC12.2K	Rear Face	0	1312	-	-	Reduce	-	18.5	17.78	0.07	1.030	-	1.18	1.22
49	LTE 2	QPSK20M	Bottom Side	0	18700	1	99	Reduce	-	22.5	22.41	0.13	2.090	-	1.02	2.13
	LTE 2	QPSK20M	Bottom Side	0	18900	1	99	Reduce	-	22.5	22.4	0.07	1.950	-	1.02	2.00
	LTE 2	QPSK20M	Bottom Side	0	19100	1	99	Reduce	-	22.5	22.38	0.05	1.980	-	1.03	2.04
50	LTE 7	QPSK20M	Bottom Side	0	21100	1	0	Reduce	-	19	18.41	0.14	0.814	-	1.15	0.93
51	LTE 66	QPSK20M	Rear Face	0	132322	1	0	Reduce	-	19.5	18.64	0	1.250	-	1.22	1.52
52	WLAN5G	802.11a	Top Side	0	64	-	-	Full	89.68	19	18.86	-0.06	1.850	1.12	1.03	2.13
	WLAN5G	802.11a	Top Side	0	60	-	-	Full	89.68	19	18.86	0.01	1.750	1.12	1.04	2.03
53	WLAN5G	802.11a	Top Side	0	140	-	-	Full	89.68	19	18.8	-0.07	1.710	1.12	1.05	2.00
	WLAN5G	802.11a	Top Side	0	100	-	-	Full	89.68	19	18.8	0.05	1.550	1.12	1.13	1.96



4.6.6 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

Band	Test Position	Separation Distance (cm)	Ch.	Original Measured SAR-1g (W/kg)	1st Repeated SAR-1g (W/kg)	L/S Ratio	2nd Repeated SAR-1g (W/kg)	L/S Ratio	3rd Repeated SAR-1g (W/kg)	L/S Ratio
LTE 2	Bottom Side	1	18700	1.120	1.090	1.03	N/A	N/A	N/A	N/A
LTE 66	Front Face	1.3	132322	0.926	0.918	1.01	N/A	N/A	N/A	N/A

Band	Test Position	Separation Distance (cm)	Ch.	Original Measured SAR-10g (W/kg)	1st Repeated SAR-10g (W/kg)	L/S Ratio	2nd Repeated SAR-10g (W/kg)	L/S Ratio	3rd Repeated SAR-10g (W/kg)	L/S Ratio
LTE 2	Bottom Side	0	18700	2.090	1.980	1.06	N/A	N/A	N/A	N/A



4.6.7 Simultaneous Multi-band Transmission Evaluation

<SAR Summation Analysis>

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR_{1g} of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR_{1g} 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR_{1g} is greater than the SAR limit (SAR_{1g} 1.6 W/kg), SAR test exclusion is determined by the SPLSR.

<Head>

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM850	Right Cheek	0.172	0.538	0.300	0.061	0.71	0.53
	Right Tilted	0.166	0.544	0.715	0.057	0.71	0.94
	Left Cheek	0.257	0.934	0.714	0.121	1.19	1.09
	Left Tilted	0.139	0.691	0.695	0.079	0.83	0.91
GSM1900	Right Cheek	0.024	0.538	0.300	0.061	0.56	0.39
	Right Tilted	0.082	0.544	0.715	0.057	0.63	0.85
	Left Cheek	0.102	0.934	0.714	0.121	1.04	0.94
	Left Tilted	0.098	0.691	0.695	0.079	0.79	0.87
WCDMA II	Right Cheek	0.019	0.538	0.300	0.061	0.56	0.38
	Right Tilted	0.155	0.544	0.715	0.057	0.70	0.93
	Left Cheek	0.186	0.934	0.714	0.121	1.12	1.02
	Left Tilted	0.195	0.691	0.695	0.079	0.89	0.97
WCDMA IV	Right Cheek	0.024	0.538	0.300	0.061	0.56	0.38
	Right Tilted	0.107	0.544	0.715	0.057	0.65	0.88
	Left Cheek	0.140	0.934	0.714	0.121	1.07	0.97
	Left Tilted	0.104	0.691	0.695	0.079	0.80	0.88
WCDMA V	Right Cheek	0.329	0.538	0.300	0.061	0.87	0.69
	Right Tilted	0.161	0.544	0.715	0.057	0.71	0.93
	Left Cheek	0.243	0.934	0.714	0.121	1.18	1.08
	Left Tilted	0.157	0.691	0.695	0.079	0.85	0.93
LTE Band 2	Right Cheek	0.179	0.538	0.300	0.061	0.72	0.54
	Right Tilted	0.131	0.544	0.715	0.057	0.68	0.90
	Left Cheek	0.167	0.934	0.714	0.121	1.10	1.00
	Left Tilted	0.160	0.691	0.695	0.079	0.85	0.93
LTE Band 5	Right Cheek	0.343	0.538	0.300	0.061	0.88	0.70
	Right Tilted	0.189	0.544	0.715	0.057	0.73	0.96
	Left Cheek	0.261	0.934	0.714	0.121	1.19	1.10
	Left Tilted	0.164	0.691	0.695	0.079	0.86	0.94
LTE Band 7	Right Cheek	0.136	0.538	0.300	0.061	0.67	0.50
	Right Tilted	0.083	0.544	0.715	0.057	0.63	0.85



**BUREAU
VERITAS**

FCC SAR Test Report



WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
	Left Cheek	0.084	0.934	0.714	0.121	1.02	0.92
	Left Tilted	0.051	0.691	0.695	0.079	0.74	0.83
LTE Band12	Right Cheek	0.128	0.538	0.300	0.061	0.67	0.49
	Right Tilted	0.080	0.544	0.715	0.057	0.62	0.85
	Left Cheek	0.187	0.934	0.714	0.121	1.12	1.02
	Left Tilted	0.103	0.691	0.695	0.079	0.79	0.88
LTE Band 13	Right Cheek	0.245	0.538	0.300	0.061	0.78	0.61
	Right Tilted	0.168	0.544	0.715	0.057	0.71	0.94
	Left Cheek	0.290	0.934	0.714	0.121	1.22	1.12
	Left Tilted	0.159	0.691	0.695	0.079	0.85	0.93
LTE Band 66	Right Cheek	0.166	0.538	0.300	0.061	0.70	0.53
	Right Tilted	0.089	0.544	0.715	0.057	0.63	0.86
	Left Cheek	0.132	0.934	0.714	0.121	1.07	0.97
	Left Tilted	0.097	0.691	0.695	0.079	0.79	0.87

<Body worn>

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM850	Front at 10mm -	0.300	0.266	0.132	0.027	0.57	0.46
	Back at 10mm -	0.537	0.338	0.743	0.027	0.87	1.31
GSM1900	Front at 10mm -	0.403	0.266	0.132	0.027	0.67	0.56
	Back at 10mm -	0.787	0.338	0.743	0.027	1.12	1.56
WCDMA II	Front at 10mm -	0.354	0.266	0.132	0.027	0.62	0.51
	Back at 10mm -	0.413	0.338	0.743	0.027	0.84	1.28
	Front at 13mm -	0.787	0.266	0.132	0.027	0.90	0.79
	Back at 18mm -	0.358	0.182	0.327	0.027	0.54	0.71
WCDMA IV	Front at 10mm -	0.215	0.266	0.132	0.027	0.48	0.37
	Back at 10mm -	0.475	0.338	0.743	0.027	0.82	1.26
	Front at 13mm -	1.081	0.266	0.132	0.027	1.35	1.24
	Back at 18mm -	1.067	0.182	0.327	0.027	1.25	1.42
WCDMA V	Front at 10mm -	0.244	0.266	0.132	0.027	0.51	0.40
	Back at 10mm -	0.401	0.338	0.743	0.027	0.74	1.17
LTE Band 2	Front at 10mm -	0.403	0.266	0.132	0.027	0.79	0.68
	Back at 10mm -	0.787	0.338	0.743	0.027	1.12	1.56
	Front at 13mm -	0.461	0.266	0.132	0.027	0.73	0.62
	Back at 18mm -	0.357	0.182	0.327	0.027	0.54	0.71
LTE Band 5	Front at 10mm -	0.252	0.266	0.132	0.027	0.52	0.41



BUREAU
VERITAS

FCC SAR Test Report



WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
	Back at 10mm -	0.454	0.338	0.743	0.027	0.79	1.22
LTE Band 7	Front at 10mm -	0.235	0.266	0.132	0.027	0.50	0.39
	Back at 10mm -	0.436	0.338	0.743	0.027	0.59	1.02
	Front at 13mm -	0.340	0.266	0.132	0.027	0.61	0.50
	Back at 18mm -	0.475	0.182	0.327	0.027	0.43	0.60
LTE Band 12	Front at 10mm -	0.190	0.266	0.132	0.027	0.46	0.35
	Back at 10mm -	0.367	0.338	0.743	0.027	0.70	1.14
LTE Band 13	Front at 10mm -	0.303	0.266	0.132	0.027	0.57	0.46
	Back at 10mm -	0.508	0.338	0.743	0.027	0.85	1.28
LTE Band 66	Front at 10mm -	0.389	0.266	0.132	0.027	0.66	0.55
	Back at 10mm -	0.701	0.338	0.743	0.027	1.11	1.54
	Front at 13mm -	1.084	0.266	0.132	0.027	1.35	1.24
	Back at 18mm -	1.002	0.182	0.327	0.027	1.18	1.36

<Hotspot>

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 1	5GHz WLAN Ant 1	Bluetooth Ant 1		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM850	Front at 10mm -	0.300	0.266	0.132	0.027	0.57	0.46
	Back at 10mm -	0.537	0.338	0.743	0.027	0.87	1.31
	Left side at 10mm -	0.227				0.23	0.23
	Right side at 10mm -	0.261	0.381	0.190	0.035	0.64	0.49
	Top side at 10mm -		0.254	0.553	0.008	0.25	0.56
	Bottom side at 10mm -	0.173				0.17	0.17
GSM1900	Front at 10mm -	0.403	0.266	0.132	0.027	0.67	0.56
	Back at 10mm -	0.787	0.338	0.743	0.027	1.12	1.56
	Left side at 10mm -	0.107				0.11	0.11
	Right side at 10mm -	0.111	0.381	0.190	0.035	0.49	0.34
	Top side at 10mm -		0.254	0.553	0.008	0.25	0.56
	Bottom side at 10mm -	0.995				0.99	0.99
WCDMA II	Front at 10mm -	0.354	0.266	0.132	0.027	0.62	0.51
	Back at 10mm -	0.506	0.338	0.743	0.027	0.84	1.28
	Left side at 10mm -	0.149				0.15	0.15
	Right side at 10mm -	0.128	0.381	0.190	0.035	0.51	0.35
	Top side at 10mm -		0.254	0.553	0.008	0.25	0.56
	Bottom side at 10mm -	0.970				0.97	0.97
	Front at 13mm -	0.634	0.266	0.132	0.027	0.90	0.79



BUREAU VERITAS

FCC SAR Test Report



WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 1	5GHz WLAN Ant 1	Bluetooth Ant 1		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
	Back at 18mm -	0.358	0.182	0.327	0.027	0.54	0.71
	Bottom side at 20mm -	0.412				0.41	0.41
WCDMA IV	Front at 10mm -	0.215	0.266	0.132	0.027	0.48	0.37
	Back at 10mm -	0.486	0.338	0.743	0.027	0.82	1.26
	Left side at 10mm -	0.066				0.07	0.07
	Right side at 10mm -	0.244	0.381	0.190	0.035	0.63	0.47
	Top side at 10mm -		0.254	0.553	0.008	0.25	0.56
	Bottom side at 10mm -	0.597				0.60	0.60
	Front at 13mm -	1.081	0.266	0.132	0.027	1.35	1.24
	Back at 18mm -	1.067	0.182	0.327	0.027	1.25	1.42
	Bottom side at 20mm -	1.136				1.14	1.14
WCDMA V	Front at 10mm -	0.244	0.266	0.132	0.027	0.51	0.40
	Back at 10mm -	0.401	0.338	0.743	0.027	0.74	1.17
	Left side at 10mm -	0.188				0.19	0.19
	Right side at 10mm -	0.239	0.381	0.190	0.035	0.62	0.46
	Top side at 10mm -		0.254	0.553	0.008	0.25	0.56
	Bottom side at 10mm -	0.149				0.15	0.15
LTE Band 2	Front at 10mm -	0.523	0.266	0.132	0.027	0.79	0.68
	Back at 10mm -	0.787	0.338	0.743	0.027	1.12	1.56
	Left side at 10mm -	0.177				0.18	0.18
	Right side at 10mm -	0.171	0.381	0.190	0.035	0.55	0.40
	Top side at 10mm -		0.254	0.553	0.008	0.25	0.56
	Bottom side at 10mm -	1.143				1.14	1.14
	Front at 13mm -	0.461	0.266	0.132	0.027	0.73	0.62
	Back at 18mm -	0.357	0.182	0.327	0.027	0.54	0.71
Bottom side at 20mm -	0.795				0.79	0.79	
LTE Band 5	Front at 10mm -	0.252	0.266	0.132	0.027	0.52	0.41
	Back at 10mm -	0.454	0.338	0.743	0.027	0.79	1.22
	Left side at 10mm -	0.200				0.20	0.20
	Right side at 10mm -	0.246	0.381	0.190	0.035	0.63	0.47
	Top side at 10mm -		0.254	0.553	0.008	0.25	0.56
	Bottom side at 10mm -	0.168				0.17	0.17
LTE Band 7	Front at 10mm -	0.235	0.266	0.132	0.027	0.50	0.39
	Back at 10mm -	0.249	0.338	0.743	0.027	0.59	1.02
	Left side at 10mm -	0.035				0.03	0.03
	Right side at 10mm -	0.112	0.381	0.190	0.035	0.49	0.34
	Top side at 10mm -		0.254	0.553	0.008	0.25	0.56
	Bottom side at 10mm -	0.421				0.42	0.42
	Front at 13mm -	0.340	0.266	0.132	0.027	0.61	0.50



BUREAU
VERITAS

FCC SAR Test Report



WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 1	5GHz WLAN Ant 1	Bluetooth Ant 1		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
WWAN Band	Back at 18mm -	0.249	0.182	0.327	0.027	0.43	0.60
	Bottom side at 20mm -	0.472				0.47	0.47
LTE Band 12	Front at 10mm -	0.190	0.266	0.132	0.027	0.46	0.35
	Back at 10mm -	0.367	0.338	0.743	0.027	0.70	1.14
	Left side at 10mm -	0.182				0.18	0.18
	Right side at 10mm -	0.230	0.381	0.190	0.035	0.61	0.45
	Top side at 10mm -		0.254	0.553	0.008	0.25	0.56
	Bottom side at 10mm -	0.081				0.08	0.08
LTE Band 13	Front at 10mm -	0.303	0.266	0.132	0.027	0.57	0.46
	Back at 10mm -	0.508	0.338	0.743	0.027	0.85	1.28
	Left side at 10mm -	0.277				0.28	0.28
	Right side at 10mm -	0.362	0.381	0.190	0.035	0.74	0.59
	Top side at 10mm -		0.254	0.553	0.008	0.25	0.56
	Bottom side at 10mm -	0.131				0.13	0.13
LTE Band 66	Front at 10mm -	0.389	0.266	0.132	0.027	0.66	0.55
	Back at 10mm -	0.769	0.338	0.743	0.027	1.11	1.54
	Left side at 10mm -	0.057				0.06	0.06
	Right side at 10mm -	0.233	0.381	0.190	0.035	0.61	0.46
	Top side at 10mm -		0.254	0.553	0.008	0.25	0.56
	Bottom side at 10mm -	0.784				0.78	0.78
	Front at 13mm -	1.084	0.266	0.132	0.027	1.35	1.24
	Back at 18mm -	1.002	0.182	0.327	0.027	1.18	1.36
Bottom side at 20mm -	1.054				1.05	1.05	



<Extremity>

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 10g SAR (W/kg)	1+3+4 Summed 10g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
		10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)		
WCDMA IV	Front at 0mm -			0.447		0.00	0.45
	Back at 0mm -	1.216		1.209		1.22	2.43
	Right side at 0mm -			0.420		0.00	0.42
	Top side at 0mm -			2.130		0.00	2.13
	Bottom side at 0mm -	0.744				0.74	0.74
LTE Band 2	Front at 0mm -			0.447		0.00	0.45
	Back at 0mm -			1.209		0.00	1.21
	Right side at 0mm -			0.420		0.00	0.42
	Top side at 0mm -			2.130		0.00	2.13
	Bottom side at 0mm -	2.134				2.13	2.13
LTE Band 7	Front at 0mm -			0.447		0.00	0.45
	Back at 0mm -	1.286		1.209		1.29	2.50
	Right side at 0mm -			0.420		0.00	0.42
	Top side at 0mm -			2.130		0.00	2.13
	Bottom side at 0mm -	0.932				0.93	0.93
LTE Band 66	Front at 0mm -	0.796		0.447		0.80	1.24
	Back at 0mm -	1.524		1.209		1.52	2.73
	Right side at 0mm -			0.420		0.00	0.42
	Top side at 0mm -			2.130		0.00	2.13
	Bottom side at 0mm -	1.324				1.32	1.32

Note: 1. Summed 1+3+4 covers Summed 1+3 / 1+4 / 3+4.

2. Except for verified data, all of the data use for the Simultaneous Transmission analysis on this report was copied from the original report W7L-P21100018SA01 (FCC ID: 2AJOTTA-1404).

Test Engineer : Rikou Lu, and Dennis Ye



5. Calibration of Test Equipment

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Dipole	SPEAG	D750V3	1067	Sep. 16, 2021	3 Year
System Validation Dipole	SPEAG	D835V2	4d139	Sep. 17, 2021	3 Year
System Validation Dipole	SPEAG	D1750V2	1071	Sep. 18, 2021	3 Year
System Validation Dipole	SPEAG	D1900V2	5d159	Sep. 16, 2021	3 Year
System Validation Dipole	SPEAG	D2450V2	893	Sep. 18, 2021	3 Year
System Validation Dipole	SPEAG	D2600V2	1110	Sep. 16, 2021	3 Year
System Validation Dipole	SPEAG	D5GHzV2	1133	Sep. 14, 2021	3 Year
Data Acquisition Electronics	SPEAG	DAE4	1633	Oct. 26, 2021	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	7612	Jan. 27, 2022	1 Year
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 15, 2022	1 Year
Wireless Communication Test Set	Agilent	E5515C	MY50260600	May. 12, 2022	1 Year
ENA Series Network Analyzer	Agilent	E5071C	MY46214638	May. 07, 2022	1 Year
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510355	May. 14, 2022	1Year
MXG Analog Signal Generator	KEYSIGHT	N5183A	MY50143024	Feb. 18, 2022	1 Year
Power Meter	Agilent	N1914A	MY52180044	Feb. 19, 2022	1 Year
Power Sensor	Agilent	E9304A H18	MY52050011	Feb. 20, 2022	1 Year
Power Meter	ANRITSU	ML2495A	1506002	Feb. 22, 2022	1 Year
Power Sensor	ANRITSU	MA2411B	1339353	May. 14, 2022	1 Year
Temp. & Humi. Recorder	CLOCK	HTC-1	157248	May. 11, 2022	1 Year
Electronic Thermometer	YONGFA	YF-160A	120100323	May. 14, 2022	1 Year
Coupler	Woken	0110A056020-10	COM27RW1A 3	May. 11, 2022	1 Year

Note:

- Referring to KDB 865664 D01 v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipole are also not physically damaged, or repaired during the interval. The dipole justification can be found in appendix C.
The return loss is $< -20\text{dB}$, within 20% of prior calibration, the impedance is with 5ohm of prior calibration.



6. Measurement Uncertainty

DASY5 Uncertainty Budget								
Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)	(Vi) Veff
Measurement System								
Probe Calibration	6.0	N	1	1	1	6.0	6.0	∞
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9	∞
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6	∞
Linearity	4.7	R	1.732	1	1	2.7	2.7	∞
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6	∞
Modulation Response	3.2	R	1.732	1	1	1.8	1.8	∞
Readout Electronics	0.3	N	1	1	1	0.3	0.3	∞
Response Time	0.0	R	1.732	1	1	0.0	0.0	∞
Integration Time	2.6	R	1.732	1	1	1.5	1.5	∞
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7	∞
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7	∞
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2	∞
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7	∞
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2	∞
Test Sample Related								
Device Positioning	3.0	N	1	1	1	3.0	3.0	35
Device Holder	3.6	N	1	1	1	3.6	3.6	12
Power Drift	5.0	R	1.732	1	1	2.9	2.9	∞
Power Scaling	0.0	R	1.732	1	1	0.0	0.0	∞
Phantom and Setup								
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5	∞
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0	∞
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1	5
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0	∞
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0	∞
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0	5
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8	∞
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4	∞
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1	∞
Combined Std. Uncertainty						11.4%	11.4%	1013
Coverage Factor for 95 %						K=2	K=2	
Expanded STD Uncertainty						22.9%	22.7%	

Uncertainty budget for frequency range 30 MHz to 3 GHz



DASY5 Uncertainty Budget								
Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)	(Vi) Veff
Measurement System								
Probe Calibration	6.55	N	1	1	1	6.5	6.5	∞
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9	∞
Boundary Effects	2.0	R	1.732	1	1	1.2	1.2	∞
Linearity	4.7	R	1.732	1	1	2.7	2.7	∞
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6	∞
Modulation Response	3.2	R	1.732	1	1	1.8	1.8	∞
Readout Electronics	0.3	N	1	1	1	0.3	0.3	∞
Response Time	0.0	R	1.732	1	1	0.0	0.0	∞
Integration Time	2.6	R	1.732	1	1	1.5	1.5	∞
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7	∞
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7	∞
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2	∞
Probe Positioning	6.7	R	1.732	1	1	3.9	3.9	∞
Max. SAR Eval.	4.0	R	1.732	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	3.0	N	1	1	1	3.0	3.0	35
Device Holder	3.6	N	1	1	1	3.6	3.6	12
Power Drift	5.0	R	1.732	1	1	2.9	2.9	∞
Power Scaling	0.0	R	1.732	1	1	0.0	0.0	∞
Phantom and Setup								
Phantom Uncertainty	6.6	R	1.732	1	1	3.8	3.8	∞
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0	∞
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1	5
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0	∞
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0	∞
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0	5
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8	∞
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4	∞
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1	∞
Combined Std. Uncertainty						12.5%	12.5%	1458
Coverage Factor for 95 %						K=2	K=2	
Expanded STD Uncertainty						25.0%	24.9%	

Uncertainty budget for frequency range 3 GHz to 6 GHz

7. Information on the Testing Laboratories

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Add: No. B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industry Park, Nanshan District, Shenzhen, Guangdong, China

Tel: 86-755-8869-6566

Fax: 86-755-8869-6577

Email: customerservice.sw@cn.bureauveritas.com

Web Site: www.bureauveritas.com

The road map of all our labs can be found in our web site also.

---END---



Appendix A. SAR Plots of System Verification

The plots for system verification with largest deviation for each SAR system combination are shown as follows.

System Check_HSL750_20221008

DUT: Dipole:750 MHz;Type:D750V3

Communication System: CW; Frequency: 750 MHz;Duty Cycle: 1:1

Medium: HSL750_1008 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 43.441$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.3°C ; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.02, 11.02, 11.02); Calibrated: 2022/1/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2021/10/26
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (71x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.80 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 55.71 V/m ; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 3.25 W/kg

SAR(1 g) = 2.12 W/kg ; SAR(10 g) = 1.39 W/kg

Maximum value of SAR (measured) = 2.86 W/kg

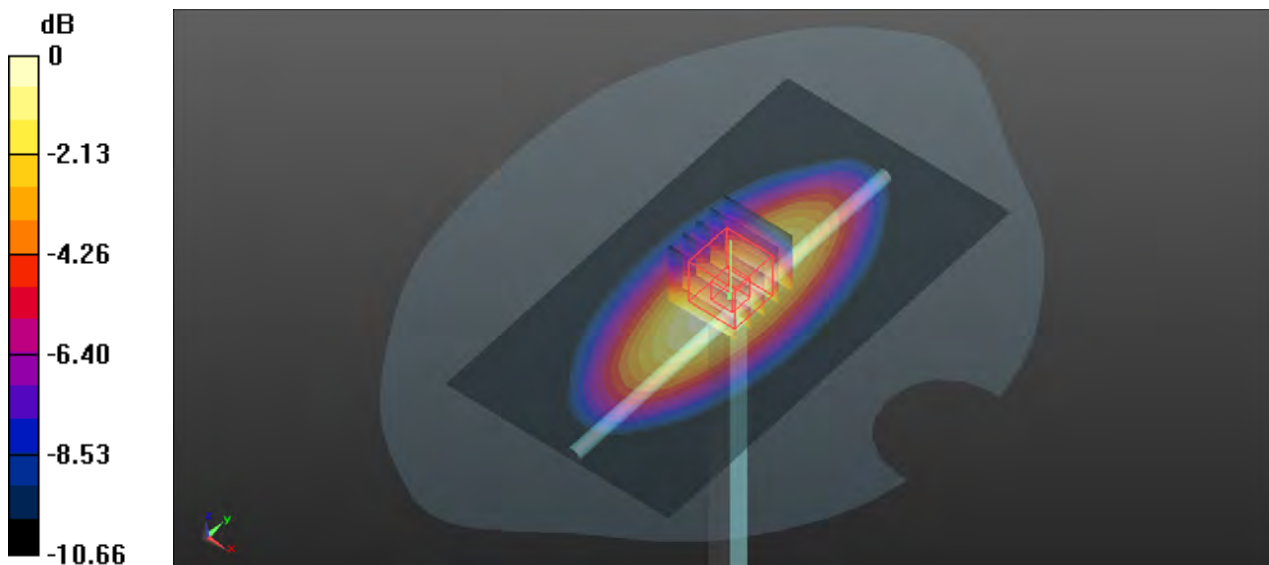

0 dB = 2.86 W/kg

System Check_HSL835_20221008

DUT: Dipole:835 MHz;Type:D835V2

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium: HSL835_1008 Medium parameters used: $f = 835$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 42.071$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(10.57, 10.57, 10.57); Calibrated: 2022/1/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2021/10/26
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


Pin=250mW/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 3.25 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 59.86 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.70 W/kg

SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 3.28 W/kg

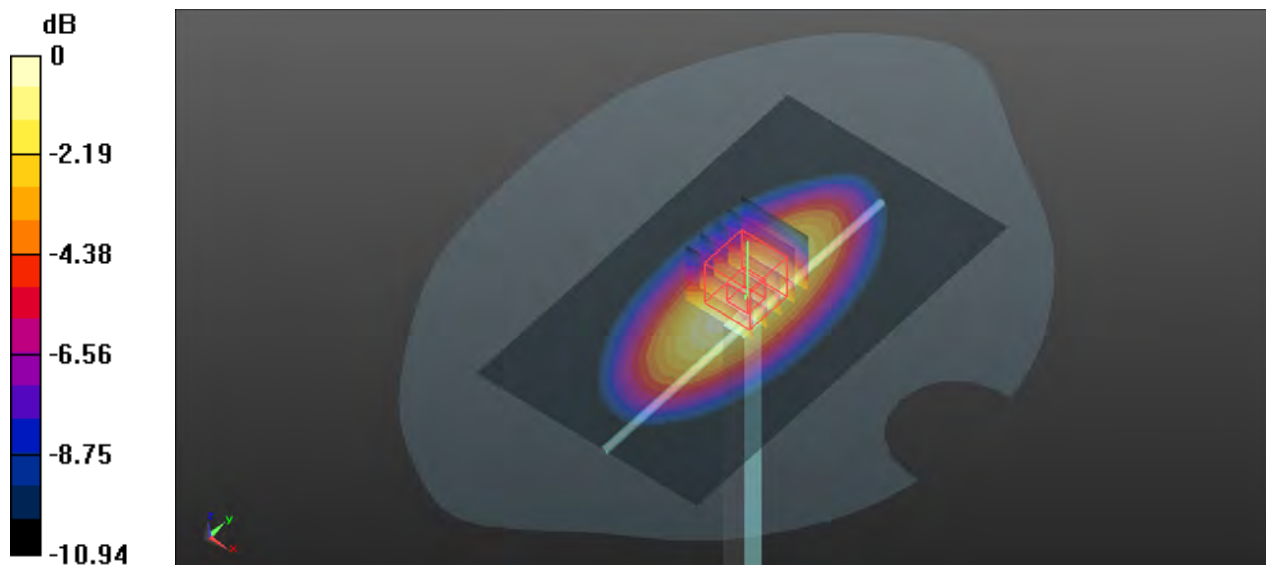

0 dB = 3.28 W/kg

System Check_HSL1750_20221008

DUT: Dipole:1750 MHz;Type:D1750V2

Communication System: CW; Frequency: 1750 MHz;Duty Cycle: 1:1

Medium: HSL1750_1008 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.328$ S/m; $\epsilon_r = 39.657$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.4°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.9, 8.9, 8.9); Calibrated: 2022/1/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2021/10/26
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 13.1 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 104.5 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 16.4 W/kg
SAR(1 g) = 8.61 W/kg; SAR(10 g) = 4.51 W/kg
Maximum value of SAR (measured) = 13.3 W/kg

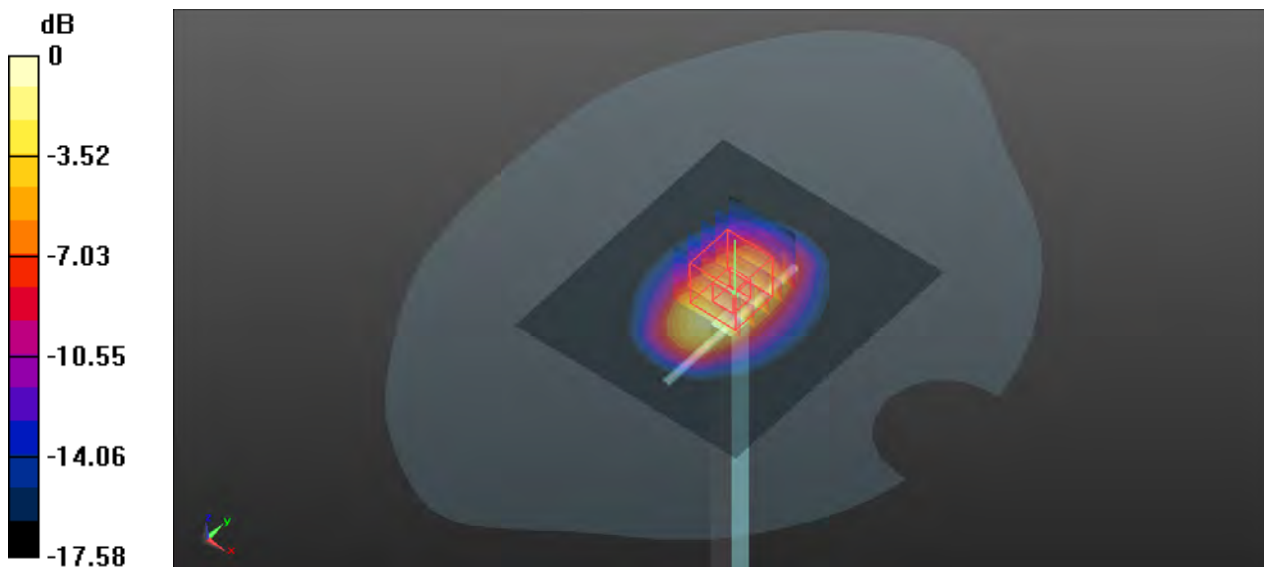

0 dB = 13.3 W/kg

System Check_HSL1900_20221008

DUT: Dipole:1900MHz;Type:D1900V2

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1

Medium: HSL1900_1008 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 39.531$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.73, 8.73, 8.73); Calibrated: 2022/1/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2021/10/26
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


Pin=250mW/Area Scan (61x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 15.3 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 96.14 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 17.6 W/kg

SAR(1 g) = 9.49 W/kg; SAR(10 g) = 4.96 W/kg

Maximum value of SAR (measured) = 14.4 W/kg

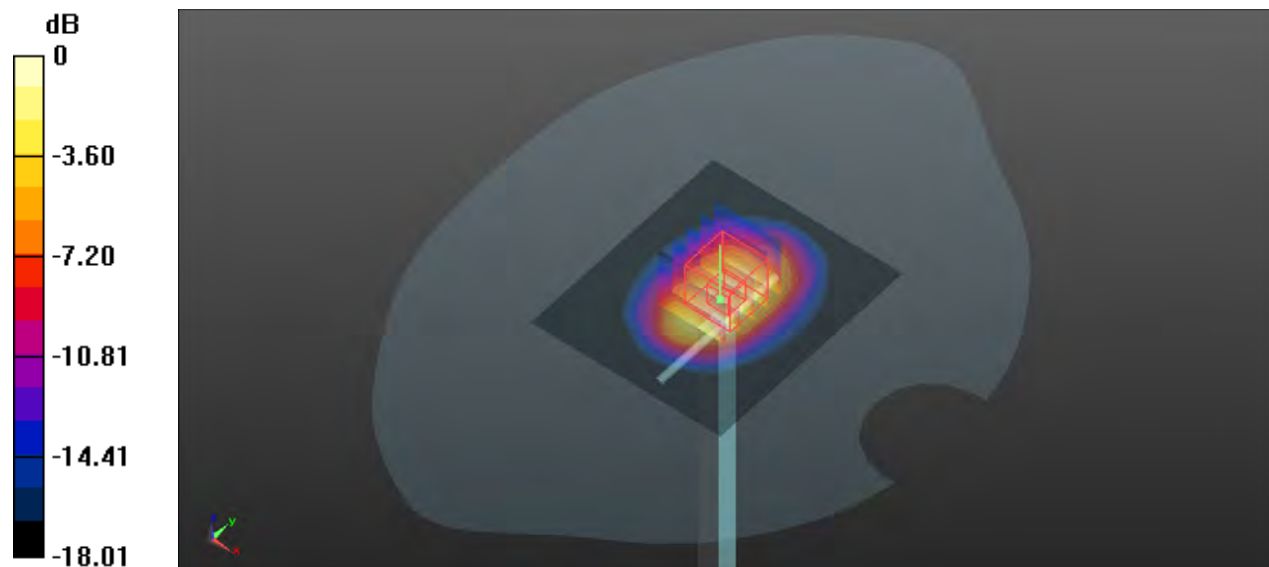

0 dB = 14.4 W/kg

System Check_HSL2450_20221009

DUT: Dipole:2450 MHz;Type:D2450V2

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium: HSL2450_1009 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.787$ S/m; $\epsilon_r = 39.443$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.9, 7.9, 7.9); Calibrated: 2022/1/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2021/10/26
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 20.3 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.03 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 25.8 W/kg

SAR(1 g) = 12.5 W/kg; SAR(10 g) = 5.89 W/kg

Maximum value of SAR (measured) = 20.2 W/kg

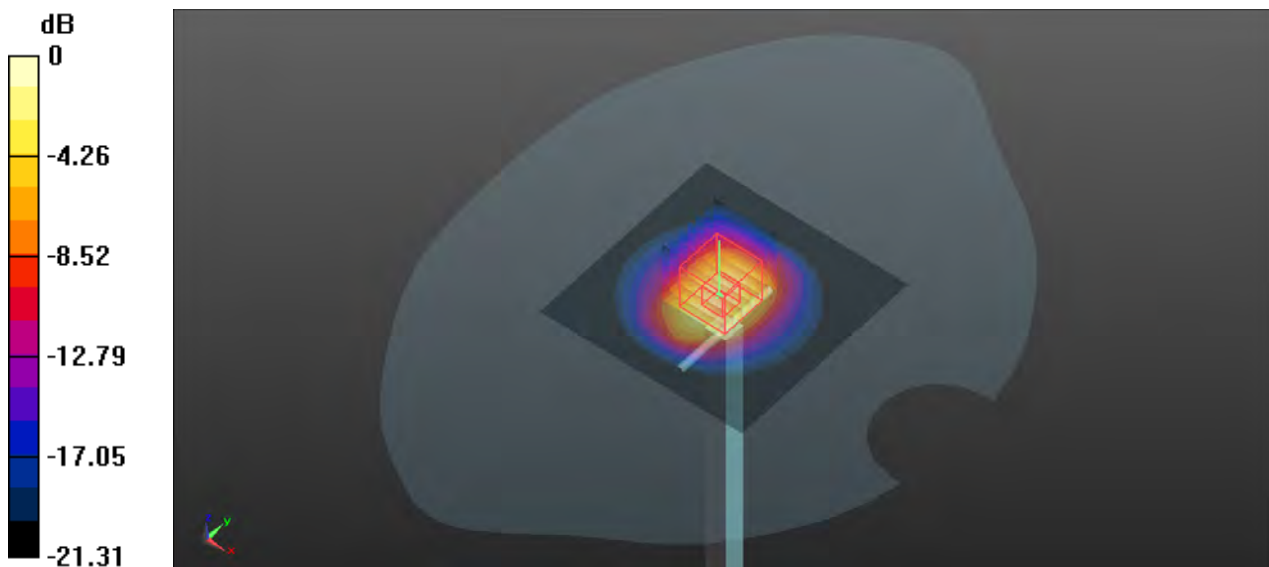

0 dB = 20.2 W/kg

System Check_HSL2600_20221009

DUT: Dipole:2600 MHz;Type:D2600V2

Communication System: CW; Frequency: 2600 MHz;Duty Cycle: 1:1

Medium: HSL2600_1009 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.897$ S/m; $\epsilon_r = 39.235$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.7, 7.7, 7.7); Calibrated: 2022/1/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2021/10/26
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


Pin=250mW/Area Scan (61x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 23.5 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 98.78 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 28.4 W/kg

SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.2 W/kg

Maximum value of SAR (measured) = 23.0 W/kg

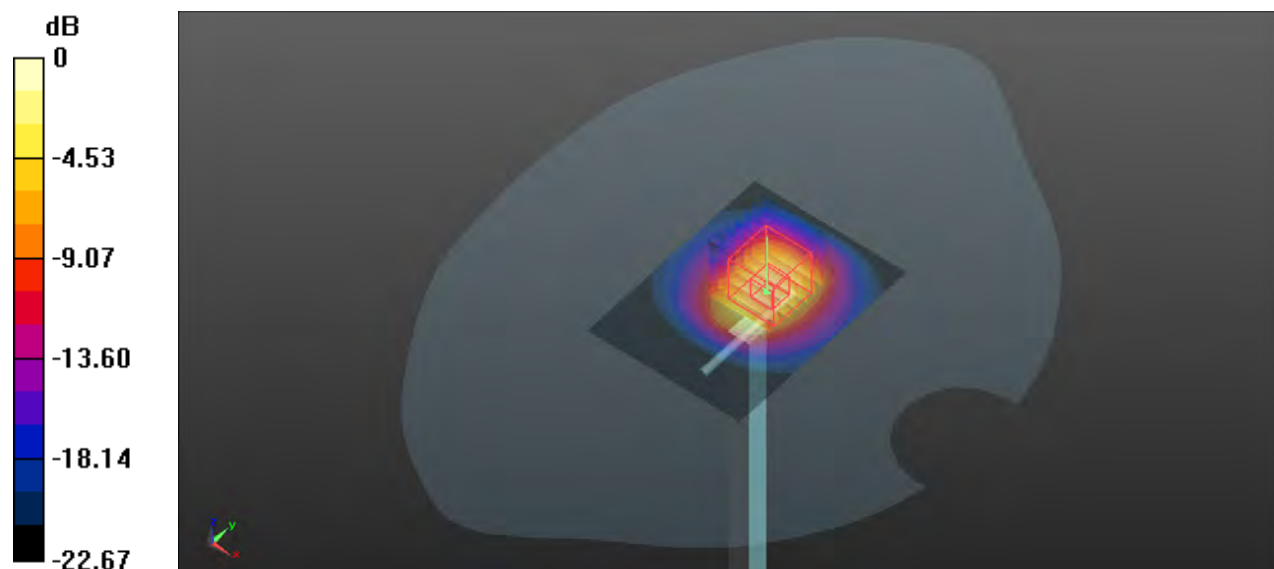

0 dB = 23.0 W/kg

System Check_HSL5250_20221012

DUT: Dipole 5GHzV2;Type:D5GHzV2

Communication System: CW; Frequency: 5250 MHz;Duty Cycle: 1:1

Medium: HSL5G_1012 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 36.256$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(5.54, 5.54, 5.54); Calibrated: 2022/1/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2021/10/26
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 19.1 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 64.07 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 33.2 W/kg
SAR(1 g) = 8.2 W/kg; SAR(10 g) = 2.36 W/kg
Maximum value of SAR (measured) = 20.7 W/kg

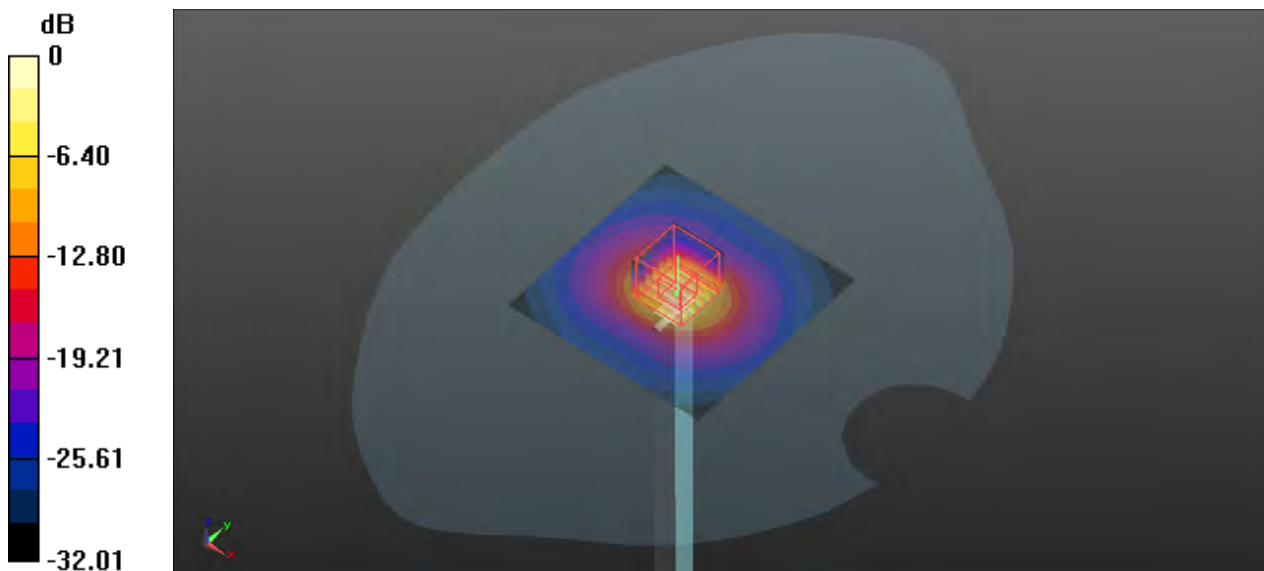

0 dB = 20.7 W/kg

System Check_HSL5600_20221010

DUT: Dipole 5GHzV2;Type:D5GHzV2

Communication System: CW; Frequency: 5600 MHz;Duty Cycle: 1:1

Medium: HSL5G_1010 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.043$ S/m; $\epsilon_r = 35.71$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(5.11, 5.11, 5.11); Calibrated: 2022/1/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2021/10/26
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 20.5 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 62.29 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 36.4 W/kg
SAR(1 g) = 8.44 W/kg; SAR(10 g) = 2.41 W/kg
Maximum value of SAR (measured) = 21.7 W/kg

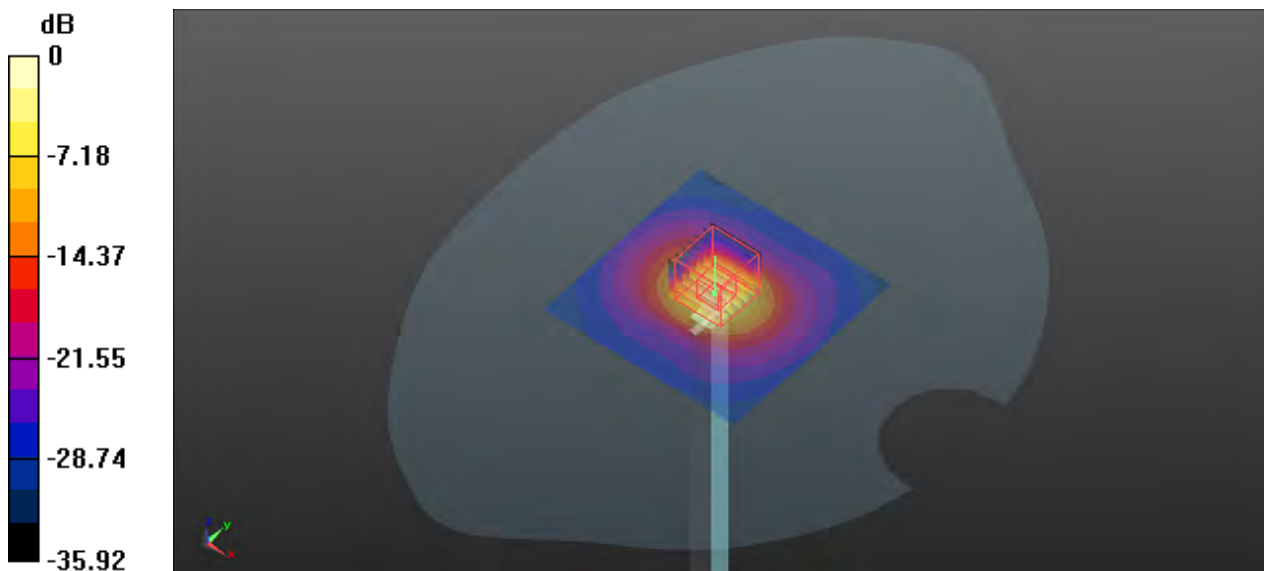

0 dB = 21.7 W/kg

System Check_HSL5800_20221011

DUT: Dipole 5GHzV2;Type:D5GHzV2


Communication System: CW; Frequency: 5800 MHz;Duty Cycle: 1:1
Medium: HSL5G_1011 Medium parameters used: $f = 5800$ MHz; $\sigma = 5.198$ S/m; $\epsilon_r = 35.309$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(5.2, 5.2, 5.2); Calibrated: 2022/1/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2021/10/26
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 18.2 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 56.74 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 33.7 W/kg
SAR(1 g) = 7.37 W/kg; SAR(10 g) = 2.1 W/kg
Maximum value of SAR (measured) = 19.6 W/kg

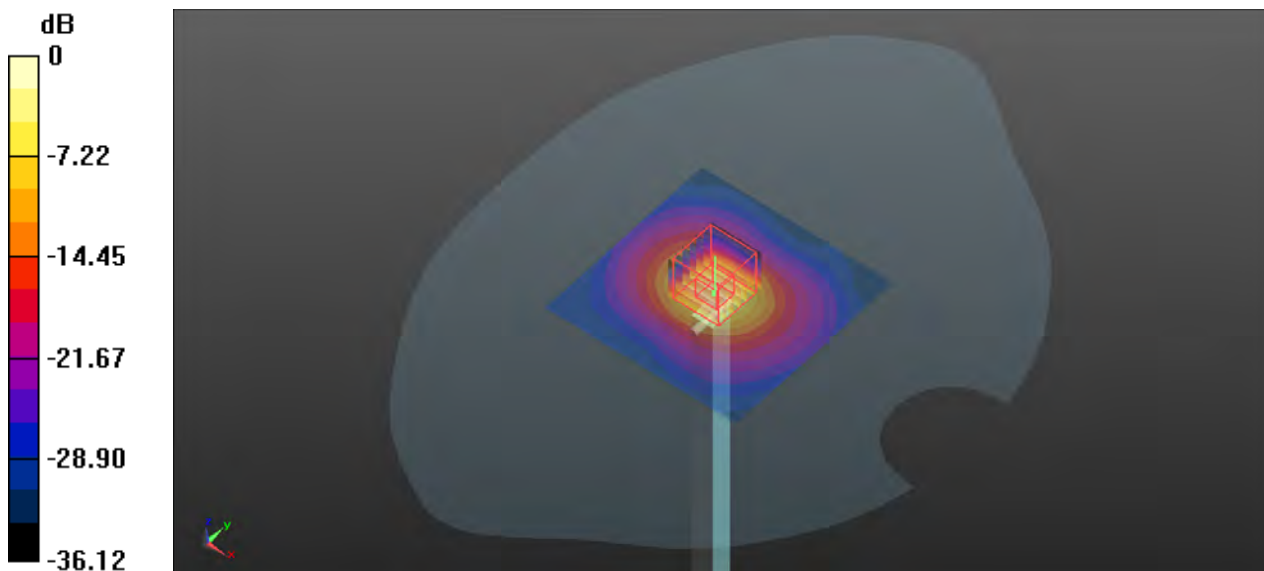

0 dB = 19.6 W/kg



Appendix B. SAR Plots of SAR Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination, and measured SAR > 1.5 W/kg are shown as follows.

P01 GSM850_GPRS 2TX slot_Right Cheek_Ch128


Communication System: GPRS 2Tx-slot; Frequency: 824.2 MHz; Duty Cycle: 1:4.15
 Medium: HSL835_1008 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 42.102$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.3°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(10.57, 10.57, 10.57); Calibrated: 2022/1/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2021/10/26
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.118 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 5.959 V/m; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 0.137 W/kg
SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.094 W/kg
 Maximum value of SAR (measured) = 0.120 W/kg

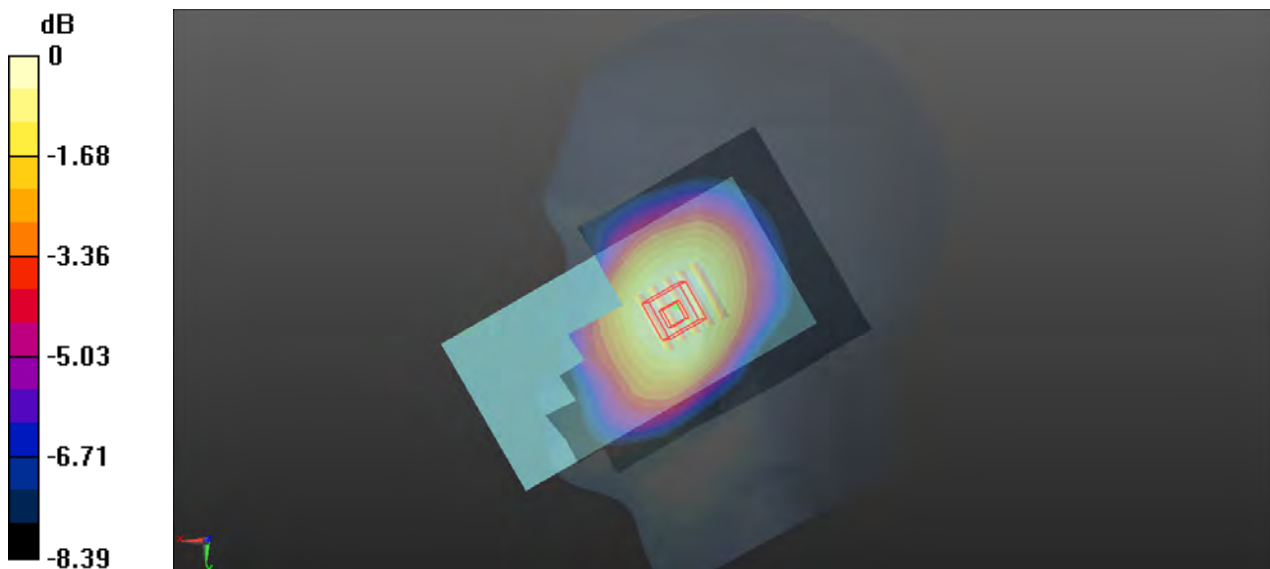

0 dB = 0.120 W/kg

P02 GSM1900_GPRS 2TX slot_Right Cheek_Ch512


Communication System: GPRS 2Tx-slot; Frequency: 1850.2 MHz; Duty Cycle: 1:4.15
Medium: HSL1900_1008 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.381$ S/m; $\epsilon_r = 39.597$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.73, 8.73, 8.73); Calibrated: 2022/1/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2021/10/26
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (81x121x1)**: Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0274 W/kg

- **Zoom Scan (5x5x7)/Cube 0**: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.595 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.0380 W/kg
SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.018 W/kg
Maximum value of SAR (measured) = 0.0277 W/kg

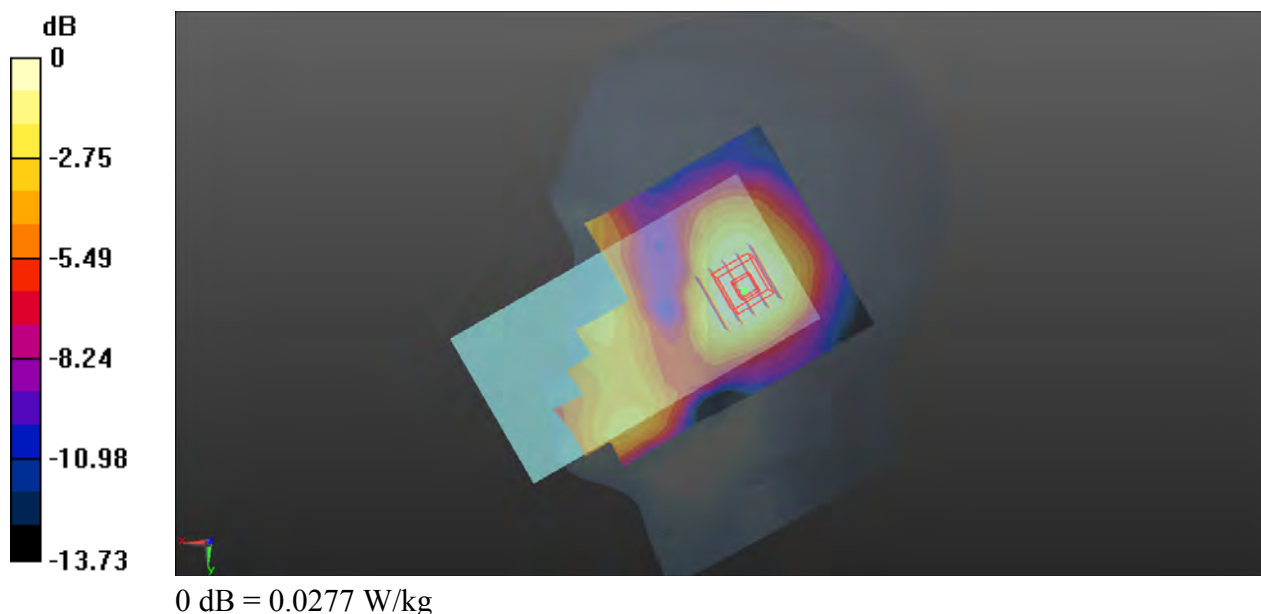

P03 WCDMA II_RMC12.2K_Right Cheek_Ch9400


Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL1900_1008 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.398$ S/m; $\epsilon_r = 39.527$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.73, 8.73, 8.73); Calibrated: 2022/1/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2021/10/26
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (81x121x1)**: Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0157 W/kg

- **Zoom Scan (5x5x7)/Cube 0**: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.184 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 0.0210 W/kg
SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00893 W/kg
Maximum value of SAR (measured) = 0.0145 W/kg

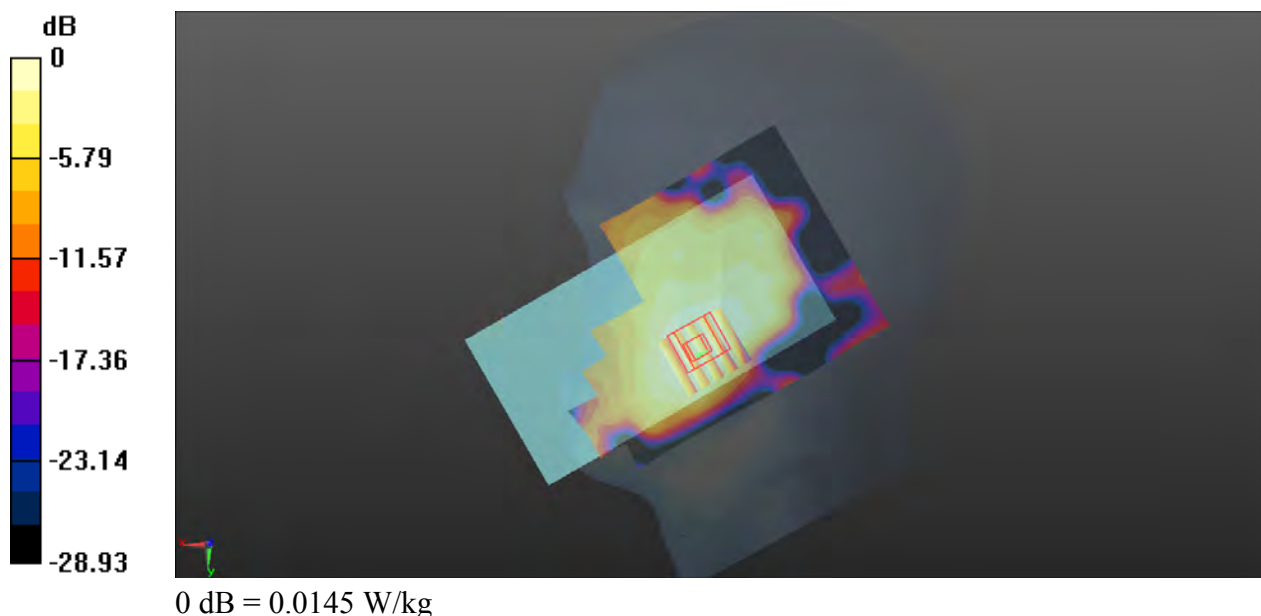

P04 WCDMA IV_RMC12.2K_Right Cheek_Ch1312

Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium: HSL1750_1008 Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.318$ S/m; $\epsilon_r = 39.782$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.9, 8.9, 8.9); Calibrated: 2022/1/27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 2021/10/26
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0186 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.5740 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.0270 W/kg
SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.011 W/kg
Maximum value of SAR (measured) = 0.0185 W/kg

