




Spectrun	1 I								
	I 0.00 dBm		.50 dB 🥃 R						
Att	20 dB	SWT	1 s 🥌 🛛	BW 300 kH:	z Mode /	Auto Sweep			
Count 1/1		TDF							
●1Pk Max									
M	1				M	1[1]			-6.64 dBm 45960 GHz
-10 dBm—									
-20 dBm—			10						
-30 dBm	D1 -26.641	dBm							
-40 dBm—									
-50 dBm—					الملاقية المرتب	an at the first of the		d maldala	al de la company
	L. Labladt	and the second second	dila instalpas als	the state of state	in a start of the start	La and a Million	IT The Public of the International States	in the party of the	and the state of the state
760,dBm	and a state of the	and gladents and	the for the second s	10 16 10 10 10 10 10 10 10 10 10 10 10 10 10					
-70 dBm—									
-80 dBm									
-90 dBm—									
Start 30.0	MHz			8001	pts			Stop	25.0 GHz
	][]					soring		4,40	8.04.2022

Date: 8.APR.2022 11:26:12



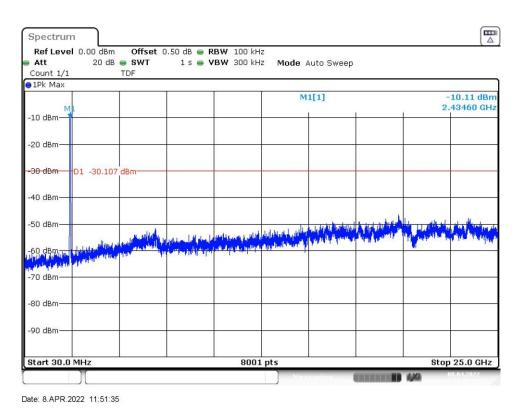

# Fig.42 Conducted Spurious Emission (802.11n-HT40, CH3)






Spectrum	ı )								
Ref Leve	0.00 dBm	Offset (	).50 dB 🥃 R	BW 100 kH	z				
Att	20 dB	SWT	1 s 🥌 V	<b>BW</b> 300 kH	z Mode /	Auto Sweep			
Count 1/1		TDF							
😑 1Pk Max									
					M	1[1]			11.21 dBm
M	L					r		2.	43460 GHz
-10 dBm									
-20 dBm									
-30 dBm-	D1 -31.206	dBm							
	01 01.200	GDI							
-40 dBm									
						1.1	L	A Contractor	A lan
-50 dBm		n ande		and the second	is the bill of the bill	THE P P P I THE	THE STATES	in part of the	THE WHITE
		aber all the bar	Hou LL ou Pupil	The President of the second	a mandad side		A DAL MARKED	A NUMBER OF STREET	testing and the
-60 dBm	A LANDER AND A LAND	LUN TRACE	day to have a sure	A CONTRACTOR OF					
and the factor of the									
-70 dBm									
-80 dBm									
-90 dBm									
-90 abiii									
Start 30.0	MHz			8001	pts			Stop	25.0 GHz
	Transie and the second				Men	suring		LXII	8.04.2022

Date: 8.APR.2022 11:52:57



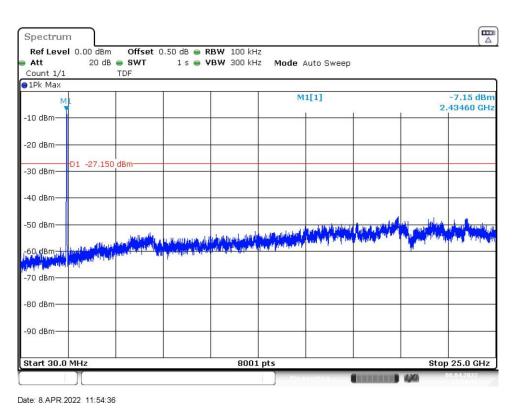

# Fig.44 Conducted Spurious Emission (802.11n-HT40, CH9)



# A.6 Radiated Emission

#### Measurement Limit:

Standard	Limit		
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power		

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

#### Limit in restricted band:

Frequency of emission (MHz)	Field strength(µV/m)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### **Test Condition:**

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz/300kHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

#### Note:

According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band below 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic.

The measurement results include the horizontal polarization and vertical polarization measurements.

All modes have been evaluated and tested, the worst results of **11b and 11n-HT40** mode were selected and showed in this test case.



### **Measurement Results:**

Mode	Channel	Frequency Range	Test Results	Conclusion
	CH 1	1 GHz ~18 GHz	Fig.45	Р
	CH 6	1 GHz ~18 GHz	Fig.46	Р
802.11b	CH 11	1 GHz ~18 GHz	Fig.47	Р
	Restricted Band (CH1)	2.38 GHz ~ 2.45 GHz	Fig.48	Р
	Restricted Band (CH11)	2.45 GHz ~ 2.5 GHz	Fig.49	Р
	CH 3	1 GHz ~18 GHz	Fig.50	Р
902 11n	CH 6	1 GHz ~18 GHz	Fig.51	Р
802.11n -HT40	CH 9	1 GHz ~18 GHz	Fig.52	Р
-0140	Restricted Band (CH3)	2.38 GHz ~ 2.45 GHz	Fig.53	Р
	Restricted Band (CH9)	2.45 GHz ~ 2.5 GHz	Fig.54	Р
		9 kHz ~30 MHz	Fig.55	Р
/	All Channels	30 MHz ~1 GHz	Fig.56	Р
		18 GHz ~26.5 GHz	Fig.57	Р

See below for test graphs. Conclusion: PASS

# 802.11b CH1 (1-18GHz)

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
7237.714286	48.00	74.00	26.00	Н	5.1
12259.714286	48.73	74.00	25.27	V	10.9
13409.142857	47.77	74.00	26.23	V	11.5
15905.142857	50.77	74.00	23.23	Н	14.1
17023.285714	53.91	74.00	20.09	V	18.4
17908.285714	52.40	74.00	21.60	V	18.9

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
7237.714286	42.16	54.00	11.84	Н	5.1
12259.714286	38.42	54.00	15.58	V	10.9
13409.142857	38.12	54.00	15.88	V	11.5
15905.142857	41.76	54.00	12.24	Н	14.1
17023.285714	44.42	54.00	9.58	V	18.4
17908.285714	44.61	54.00	9.39	V	18.9



# 802.11b CH6 (1GHz-18GHz)

Frequency	MaxPeak	Limit	Margin	Pol	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dB)		(dB/m)
7311.000000	48.09	74.00	25.91	V	5.1
8928.000000	45.65	74.00	28.35	Н	6.5
10890.428572	47.71	74.00	26.29	V	9.3
14242.714286	49.19	74.00	24.81	Н	11.3
16947.857143	54.71	74.00	19.29	Н	18.2
17926.285714	54.44	74.00	19.56	Н	18.9

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
7311.000000	41.33	54.00	12.67	V	5.1
8928.000000	35.44	54.00	18.56	Н	6.5
10890.428572	37.44	54.00	16.56	V	9.3
14242.714286	38.50	54.00	15.50	Н	11.3
16947.857143	44.22	54.00	9.78	Н	18.2
17926.285714	44.39	54.00	9.61	Н	18.9


# 802.11b CH11 (1GHz-18GHz)

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
8260.285714	44.83	74.00	29.17	V	5.9
10462.714286	45.38	74.00	28.62	V	9.0
12457.285714	46.61	74.00	27.39	Н	11.4
14830.285714	48.91	74.00	25.09	Н	12.9
16928.571429	52.35	74.00	21.65	V	18.2
17940.428571	53.63	74.00	20.37	Н	19.0

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
8260.285714	33.32	54.00	20.68	V	5.9
10462.714286	35.15	54.00	18.85	V	9.0
12457.285714	36.45	54.00	17.55	Н	11.4
14830.285714	38.56	54.00	15.44	Н	12.9
16928.571429	42.29	54.00	11.71	V	18.2
17940.428571	42.61	54.00	11.39	Н	19.0

**Note:** A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and Antenna Factor, the gain of the preamplifier, the cable loss.  $P_{Mea}$  is the field strength recorded from the instrument. The measurement results are obtained as described below: Result=  $P_{Mea}$  +Cable Loss +Antenna Factor-Gain of the preamplifier.



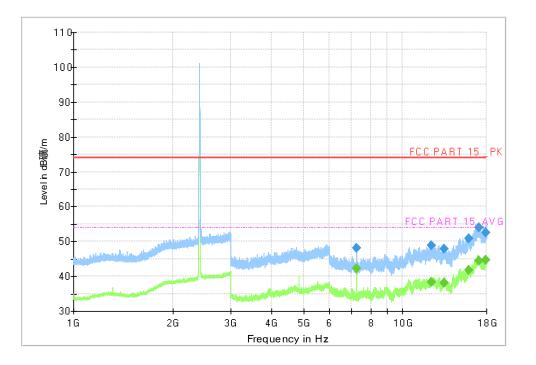



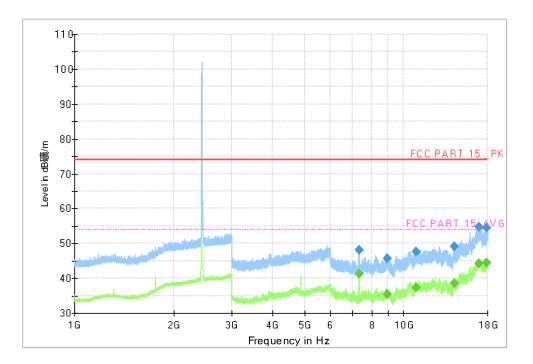


Fig.46 Radiated Spurious Emission (802.11b, CH6, 1 GHz ~18 GHz)



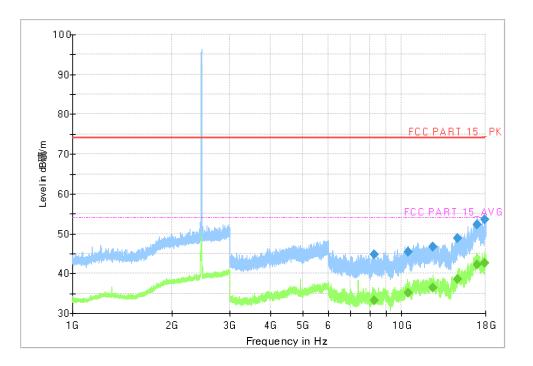


Fig.47 Radiated Spurious Emission (802.11b, CH11, 1 GHz ~18 GHz)

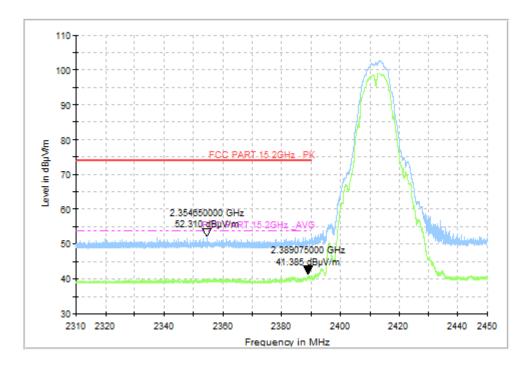


Fig.48 Radiated Restricted Band (802.11b, CH1, 2.38GHz~2.45GHz)



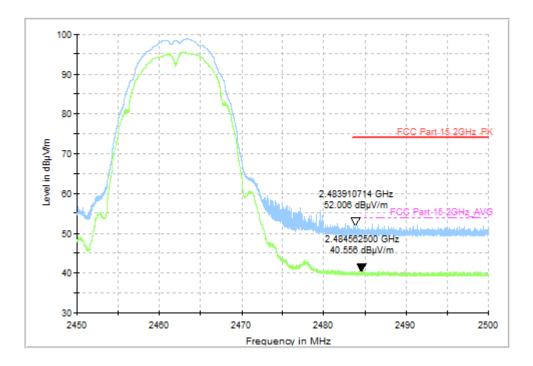


Fig.49 Radiated Restricted Band (802.11b, CH11, 2.45GHz~2.5GHz)

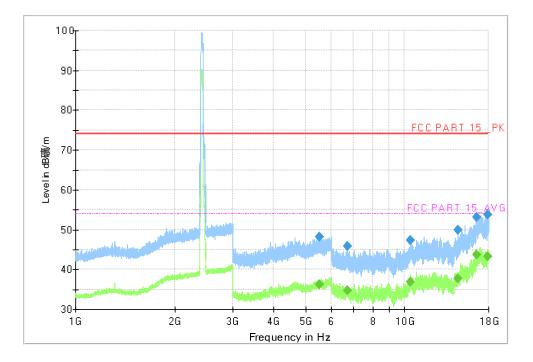
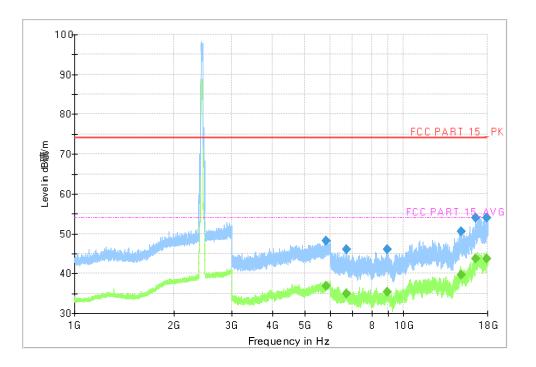



Fig.50 Radiated Spurious Emission (802.11n-HT40, CH3, 1 GHz ~18 GHz)







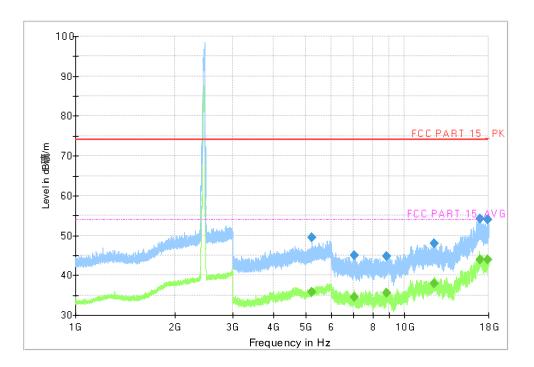


Fig.52 Radiated Spurious Emission (802.11n-HT40, CH9, 1 GHz ~18 GHz)



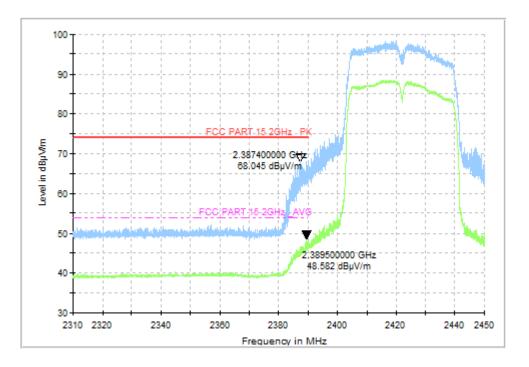


Fig.53 Radiated Restricted Band (802.11n-HT40, CH3, 2.38GHz~2.45GHz)

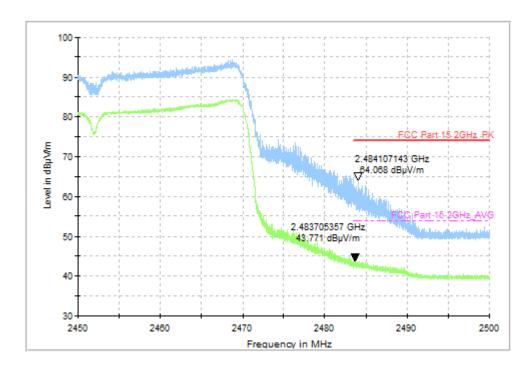


Fig.54 Radiated Restricted Band (802.11n-HT40, CH9, 2.45GHz~2.5GHz)



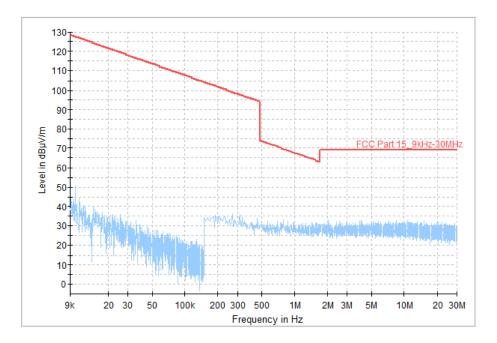


Fig.55 Radiated Spurious Emission (All Channels, 9 kHz-30 MHz)

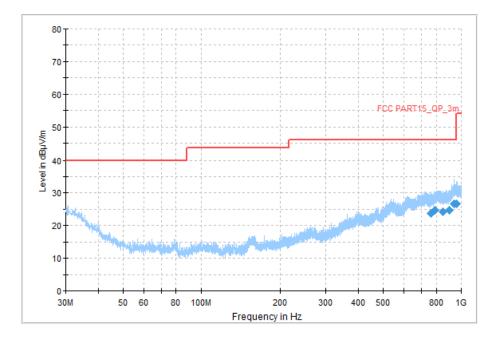


Fig.56 Radiated Spurious Emission (All Channels, 30MHz-1 GHz)



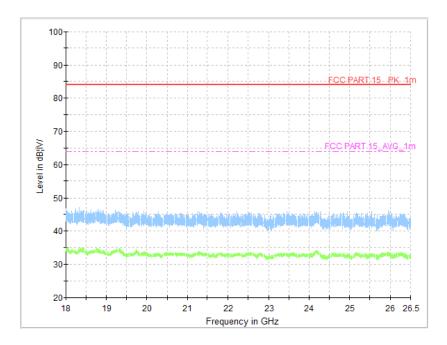


Fig.57 Radiated Spurious Emission (All Channels, 18 GHz-26.5 GHz)



# A.7 AC Power line Conducted Emission

#### **Test Condition:**

Voltage (V)	Frequency (Hz)		
120	60		

#### Measurement Result and limit:

### WLAN -AE1,AE2

Frequency range	Quasi-peak	Average-peak	Result (dBμV)		Conclusion	
(MHz)	Limit (dBµV)	Limit (dBμV)	Traffic Idle			
0.15 to 0.5	66 to 56	56 to 46				
0.5 to 5	56	46	Fig.58	Fig.59	Р	
5 to 30	60	50				
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15						
MHz to 0.5 MHz.						

Note: The measurement results include the L1 and N measurements.

See below for test graphs. Conclusion: PASS



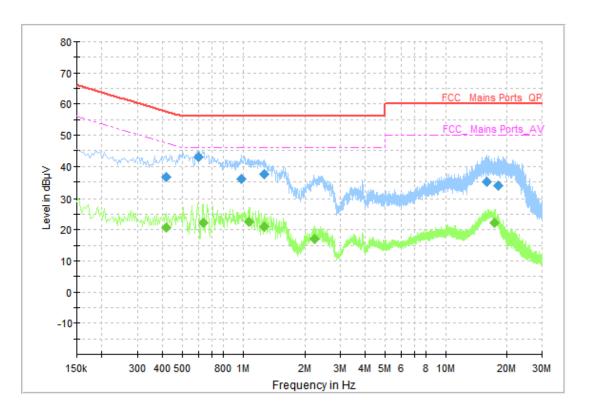


Fig.58 AC Power line Conducted Emission (Traffic)

# Measurement Results: Quasi Peak

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.418000	36.62	57.49	20.87	N	ON	10
0.602000	42.93	56.00	13.07	L1	ON	10
0.978000	36.05	56.00	19.95	N	ON	10
1.270000	37.38	56.00	18.62	N	ON	10
15.946000	34.94	60.00	25.06	N	ON	11
18.186000	33.87	60.00	26.13	N	ON	10

### Measurement Results: Average

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
	,	,				(ub)
0.418000	20.67	47.49	26.82	N	ON	10
0.638000	22.28	46.00	23.72	Ν	ON	10
1.070000	22.56	46.00	23.44	Ν	ON	10
1.274000	21.11	46.00	24.89	Ν	ON	10
2.238000	17.01	46.00	28.99	Ν	ON	10
17.486000	22.07	50.00	27.93	Ν	ON	11



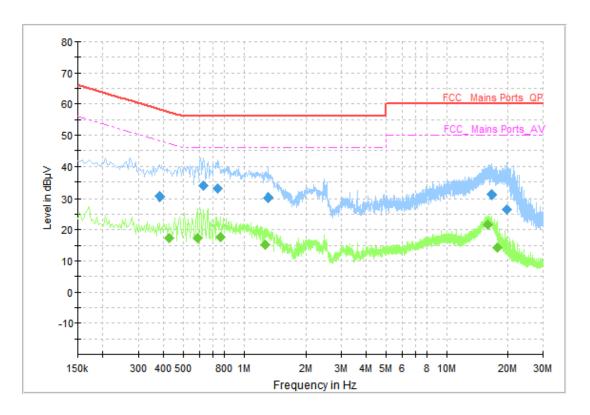


Fig.59 AC Power line Conducted Emission (Idle)

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.382000	30.55	58.24	27.69	L1	ON	10
0.626000	33.74	56.00	22.26	N	ON	10
0.742000	32.82	56.00	23.18	N	ON	10
1.318000	30.15	56.00	25.85	N	ON	10
16.706000	30.97	60.00	29.03	Ν	ON	11
19.962000	26.40	60.00	33.60	Ν	ON	10

# Measurement Results: Quasi Peak

#### Measurement Results: Average

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.426000	17.37	47.33	29.96	N	ON	10
0.420000	17.57	47.55	29.90	IN	ON	10
0.586000	17.32	46.00	28.68	L1	ON	10
0.762000	17.69	46.00	28.31	L1	ON	10
1.270000	15.16	46.00	30.84	Ν	ON	10
16.038000	21.50	50.00	28.50	Ν	ON	11
17.890000	14.13	50.00	35.87	L1	ON	10

# \*\*\*END OF REPORT\*\*\*