



BUREAU
VERITAS

Test Report No.: W7L-P22030026-2RF02



VARIANT FCC TEST REPORT (Part 15, Subpart C)

Applicant:	HMD Global Oy
Address:	Bertel Jungin aukio 9, 02600 Espoo, Finland



Manufacturer or Supplier:	HMD Global Oy
Address:	Bertel Jungin aukio 9, 02600 Espoo, Finland
Product:	Multi-band GSM/WCDMA/LTE phone with Bluetooth&WLAN
Brand Name:	Nokia
Model Name:	TA-1425
FCC ID:	2AJOTTA-1425
Date of tests:	Jan. 02, 2022 ~ Apr. 19, 2022

The tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart C, Section 15.247

ANSI C63.10-2013

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: Apr. 19, 2022	 Date: Apr. 19, 2022

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute you unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
1.1 MEASUREMENT UNCERTAINTY	5
2 GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	8
2.2.1 CONFIGURATION OF SYSTEM UNDER TEST	9
2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	9
2.3 DUTY CYCLE OF TEST SIGNAL	12
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	13
2.5 DESCRIPTION OF SUPPORT UNITS	13
3 TEST TYPES AND RESULTS.....	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	14
3.1.2 TEST INSTRUMENTS.....	14
3.1.3 TEST PROCEDURES	15
3.1.4 DEVIATION FROM TEST STANDARD	15
3.1.5 TEST SETUP	16
3.1.6 EUT OPERATING CONDITIONS	16
3.1.7 TEST RESULTS	17
3.2 RADIATED EMISSION MEASUREMENT	19
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	19
3.2.2 TEST INSTRUMENTS.....	20
3.2.3 TEST PROCEDURES	21
3.2.4 DEVIATION FROM TEST STANDARD	21
3.2.5 TEST SETUP	22
3.2.6 EUT OPERATING CONDITIONS	23
3.2.7 TEST RESULTS	24
3.3 6 DB BANDWIDTH MEASUREMENT	40
3.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	40
3.3.2 TEST INSTRUMENTS.....	40
3.3.3 TEST PROCEDURE.....	40
3.3.4 DEVIATION FROM TEST STANDARD	41



3.3.5	TEST SETUP	41
3.3.6	EUT OPERATING CONDITIONS	41
3.3.7	TEST RESULTS	42
3.4	CONDUCTED OUTPUT POWER.....	43
3.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	43
3.4.2	TEST SETUP	43
3.4.3	TEST INSTRUMENTS.....	43
3.4.4	TEST PROCEDURES	43
3.4.5	DEVIATION FROM TEST STANDARD	43
3.4.6	EUT OPERATING CONDITIONS	43
3.4.7	TEST RESULTS	44
3.4.7.1	MAXIMUM PEAK OUTPUT POWER	44
3.4.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE).....	45
3.5	POWER SPECTRAL DENSITY MEASUREMENT	46
3.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	46
3.5.2	TEST SETUP	46
3.5.3	TEST INSTRUMENTS.....	46
3.5.4	TEST PROCEDURE.....	46
3.5.5	DEVIATION FROM TEST STANDARD	46
3.5.6	EUT OPERATING CONDITION	46
3.5.7	TEST RESULTS	47
3.6	OUT OF BAND EMISSION MEASUREMENT	48
3.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	48
3.6.2	TEST SETUP	48
3.6.3	TEST INSTRUMENTS.....	48
3.6.4	TEST PROCEDURE.....	48
3.6.5	DEVIATION FROM TEST STANDARD	49
3.6.6	EUT OPERATING CONDITION	49
3.6.7	TEST RESULTS	49
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	50
5	MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB ..	51
6	APPENDIX 1 BLE	52
7	APPENDIX 2 WLAN 2.4G.....	73



BUREAU Test Report No.: W7L-P22030026-2RF02
VERITAS

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P21120037RF02	Original release	Jan. 24, 2022
W7L-P22030026-2RF02	Based on the original report W7L-P21120037RF02 change the chip, add to 2 nd battery, Verify the RSE worst case.	Apr. 19, 2022



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)		
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT
§15.207	AC Power Conducted Emission	Compliance
§15.205 §15.209	Radiated Emissions	Compliance
§15.247(d)	Out of band Emission Measurement	Compliance
§15.247(a) (2)	6dB bandwidth	Compliance
§15.247(b)	Conducted Output power	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.203	Antenna Requirement	Compliance

Note : Except RSE , other data please refer to Appendix 1 (for WIFI-2.4G) and Appendix 2 (for BLE)

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	±2.70dB
Radiated emissions (30MHz~1GMHz)	±4.98dB
Radiated emissions (1GMHz ~6GMHz)	±4.70dB
Radiated emissions (6GMHz ~18GMHz)	±4.60dB
Radiated emissions (18GMHz ~40GMHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Power Spectral Density	±0.85 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Multi-band GSM/WCDMA/LTE phone with Bluetooth&WLAN
BRAND NAME	Nokia
MODEL NAME	TA-1425
NOMINAL VOLTAGE	5.0Vdc(adapter or host equipment) 3.85Vdc (Li-ion, battery)
MODULATION	DSSS, OFDM, GFSK
TRANSMISSION RATE	802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n20: up to 65 Mbps BT_LE: 1 Mbps
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20) 2402-2480MHz for BT-LE(GFSK)
MAX. OUTPUT POWER	WLAN: 210.86mW (Maximum) BT-LE: 2.11mW (Maximum)
ANTENNA TYPE	Fixed Internal Antenna with 0.77dBi gain
HW VERSION	19661_1_12
SW VERSION	000T_0_050
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB cable: unshielded without ferrite, 1.0meter Earphone1: non-shielded cable, with w/o ferrite core, 1.2 meter Earphone2: non-shielded cable, with w/o ferrite core, 1.2 meter

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.



- The EUT incorporates a SISO function. Physically, the EUT provides one transmitter and one receiver.

MODULATION MODE	TX/RX FUNCTION
802.11b	1TX /1RX
802.11g	1TX /1RX
802.11n (20MHz)	1TX /1RX
BT_LE(1MHz)	1TX /1RX

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
Battery 1	Nokia	GUANGDONG FENGHUA NEW ENERGY CO.,LTD.	WT410	Capacity : 3.85 Vdc, 3920mAh
Battery 2	Nokia	HuNan ADF Alternative Energy Technology Co.,Ltd	WT410	Capacity : 3.85 Vdc, 3920mAh
AC Adapter	Nokia	ShenZhenBaiJunDa Electronic CO., LTD.	AD-010U	I/P: 100-240Vac, 0.35A, O/P: 5.0Vdc, 2.0A
Earphone 1	Nokia	NEW LEADER INDUSTRY CO.,LTD	HS-34	Signal Line, 1.2meter
Earphone 2	Nokia	Guangdong Wivtak Technology Co., Ltd.	HS-34	Signal Line, 1.2meter
USB Cable	Nokia	Saibao(Jiangxi) Communication Industrial Co.,Ltd	CB-12A	Signal Line, 1.0meter

NOTE: BLE&WIFI test in the engineer mode,power setting at “ MAXIMUM CONDUCTED OUTPUT POWER”, the steps for entering engineering mode are as follows:

- In the finger plate, dial the code for entering Engineer mode: *****#83781#*****
- EngineerMode->CONNECTIVITY->Wifi->Tx



2.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

40 channels are provided for BT-LE (GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11g	1 to 11	11	OFDM	6M
BT-LE	0 to 39	0	GFSK	1.0



RADIATED EMISSION TEST (ABOVE 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	1

POWER LINE CONDUCTED EMISSION TEST

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11g	1 to 11	11	OFDM	6M

BANDEDGE MEASUREMENT:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	DSSS	1.0
802.11g	1 to 11	1, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 11	OFDM	MCS0
BT-LE	0 to 39	0, 39	GFSK	1



ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	1

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	23deg. C, 70%RH	DC 5V By Adapter	Star Le
RE≥1G	23deg. C, 70%RH	DC5V By Adapter	Star Le
PLC	25deg. C, 52%RH	DC5V By Adapter	James Fu
APCM	25deg. C, 60%RH	DC 3.85V By Battery	James Fu



2.3 Duty Cycle of Test Signal

Please Refer to Appendix1/2 Of this test report.

WORST-CASE DATA:

Measured Duty Cycle		
Mode		Duty Cycle [%]
		ANT1
WIFI 2.4GHz	11B	100.00
	11G	97.64
	11N20	97.47
BT LE	BT4.0	86.96

Note:

Duty cycle of test signal is < 98%, duty factor shall be considered.



2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10-2013

Note :

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Desktop	Lenovo	M73 SFF	PC04GRQV	N/A
2	Desktop	Lenovo	M73 SFF	PC06CS27	N/A
3	Laptop	Lenovo	Thnikpad T450	PC-049PT1	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.5m
2	AC Line: Unshielded, Detachable 1.5m
3	AC Line: Unshielded, Detachable 1.5m



3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Mar. 03,21	Mar. 02,22
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Mar. 02,22	Mar. 01,23
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Feb. 25,21	Feb. 24,22
LISN network	Rohde&Schwarz	ENV216	101922	Feb. 24,22	Feb. 23,23

- NOTE:**
1. The test was performed in CE shielded room.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



3.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation.



3.1.5 TEST SETUP

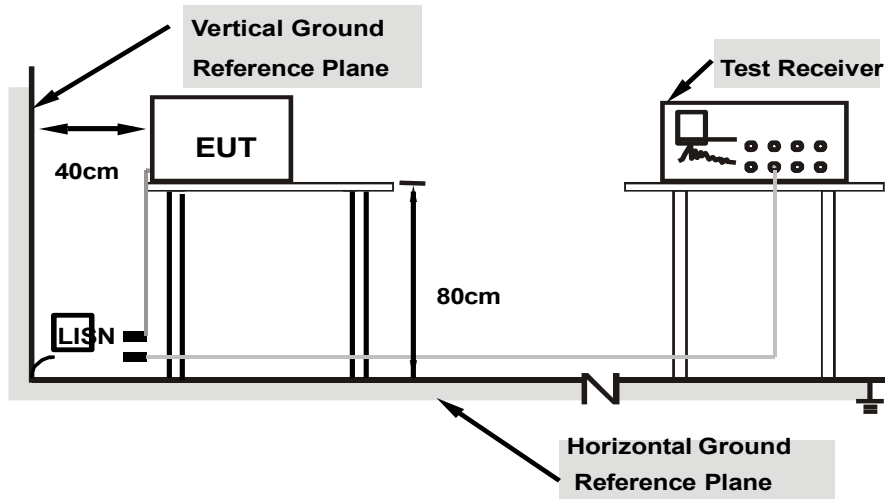

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



3.1.7 TEST RESULTS


CONDUCTED WORST-CASE DATA:

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Carl xie		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.186000	---	28.22	54.21	25.99	L1	ON	9.7
0.186000	43.83	---	64.21	20.38	L1	ON	9.7
0.284000	---	28.59	50.70	22.11	L1	ON	9.7
0.284000	41.62	---	60.70	19.08	L1	ON	9.7
0.548000	---	26.99	46.00	19.01	L1	ON	9.7
0.548000	42.88	---	56.00	13.12	L1	ON	9.7
0.704000	---	28.55	46.00	17.45	L1	ON	9.7
0.704000	41.77	---	56.00	14.23	L1	ON	9.7
1.212000	---	25.55	46.00	20.45	L1	ON	9.7
1.212000	38.43	---	56.00	17.57	L1	ON	9.7
15.980000	---	24.54	50.00	25.46	L1	ON	9.8
15.980000	34.36	---	60.00	25.64	L1	ON	9.8

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Limit value - Emission level
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

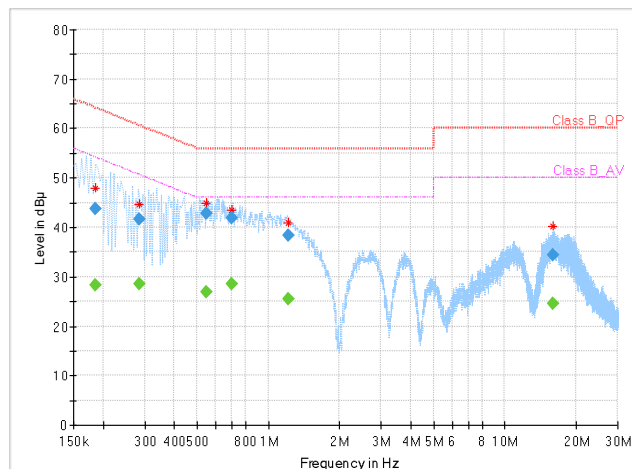




Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Carl xie		

Frequency (MHz)	QuasiPeak (dBUV)	CAverage (dBUV)	Limit (dBUV)	Margin (dB)	Line	Filter	Corr. (dB)
0.186000	---	28.67	54.21	25.54	N	ON	9.7
0.186000	42.02	---	64.21	22.19	N	ON	9.7
0.544000	---	27.43	46.00	18.57	N	ON	9.7
0.544000	42.39	---	56.00	13.61	N	ON	9.7
0.740000	---	27.35	46.00	18.65	N	ON	9.7
0.740000	39.75	---	56.00	16.25	N	ON	9.7
1.300000	---	24.55	46.00	21.45	N	ON	9.8
1.300000	36.04	---	56.00	19.96	N	ON	9.8
15.472000	---	27.81	50.00	22.19	N	ON	9.8
15.472000	38.77	---	60.00	21.23	N	ON	9.8
18.332000	---	20.47	50.00	29.53	N	ON	9.9
18.332000	37.94	---	60.00	22.06	N	ON	9.9

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Limit value - Emission level
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

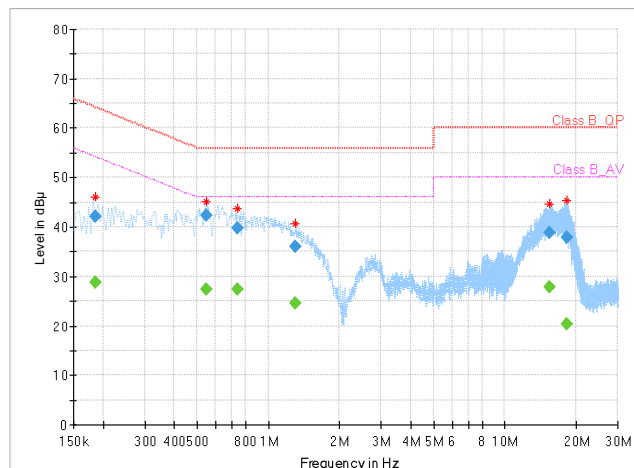



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	May. 19,20	May. 18,23
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 05,21	Mar. 04,22
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 04,22	Mar. 03,23
Horn Antenna	ETS-LINDGREN	3117	00168728	Apr. 02, 21	Apr. 01, 22
Horn Antenna	ETS-LINDGREN	3117	00168728	Apr. 01, 22	Mar. 30, 23
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Aug. 25, 21	Aug. 24, 22
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jun. 03,21	Jun. 02,22
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 27,21	Apr. 26,22
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 02,21	Jun. 01,22
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 02,21	Jun. 01,22
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 30,21	Apr. 29,22
DC Source	Kikusui/JP	PMX18-5A	0000001	Aug. 25,21	Aug. 24,22
Power Meter	Anritsu	ML2495A	1506002	Feb. 25,21	Feb. 24,22
Power Meter	Anritsu	ML2495A	1506002	Feb. 24,22	Feb. 23,23
Power Sensor	Anritsu	MA2411B	1339352	Feb. 25,21	Feb. 24,22
Power Sensor	Anritsu	MA2411B	1339352	Feb. 24,22	Feb. 23,23
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-051	Feb 14,20	Feb. 13,23

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Chamber.
 3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.


3.2.4 DEVIATION FROM TEST STANDARD

No deviation




3.2.5 TEST SETUP

<Frequency Range 9KHz~30MHz >

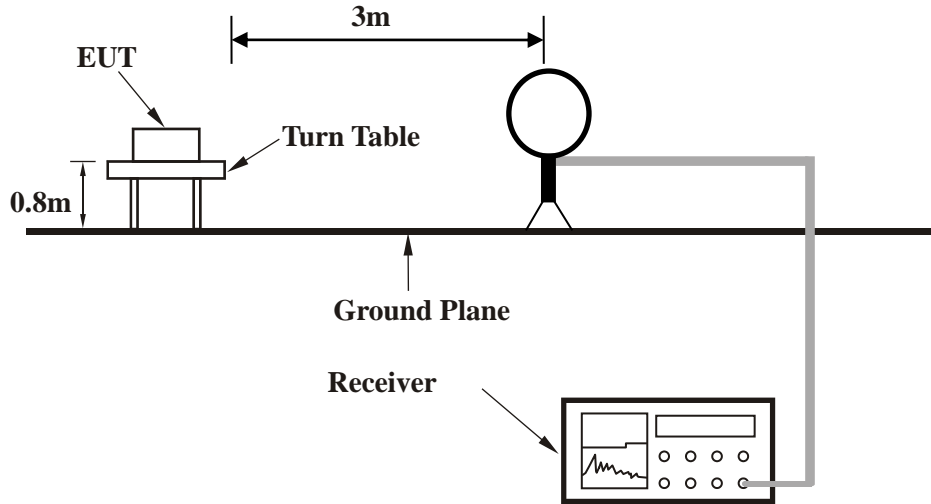


< Frequency Range 30MHz~1GHz >

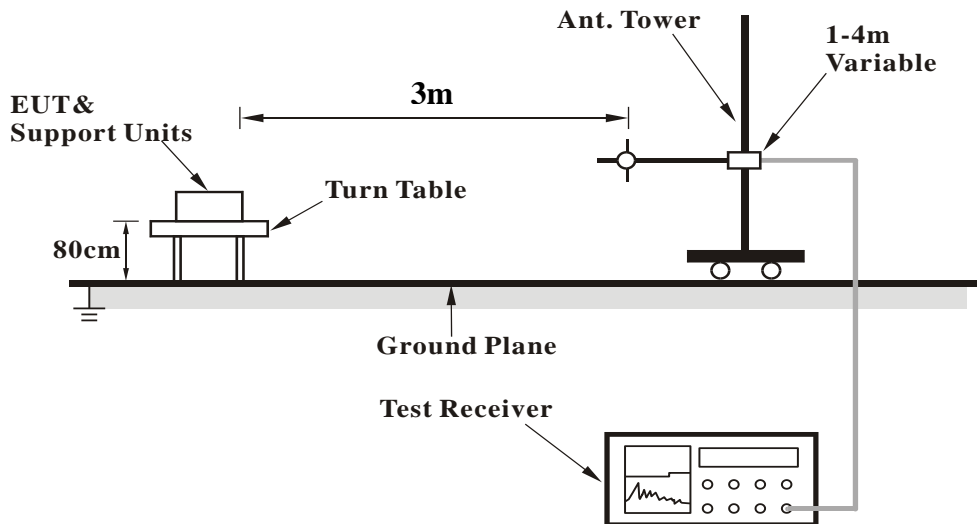



<Frequency Range above 1GHz>

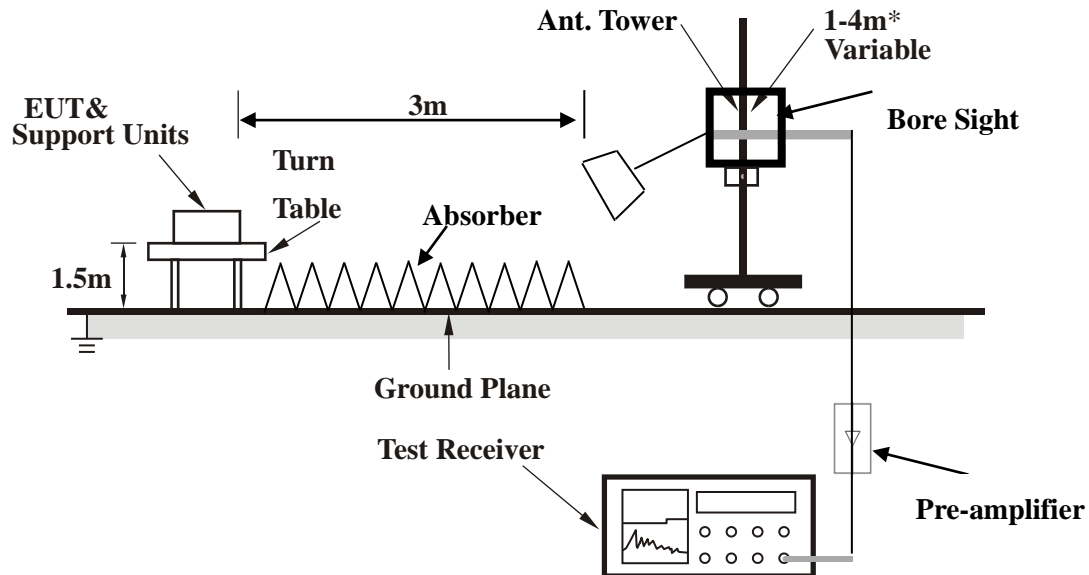

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



3.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:

Note: For frequency below 30MHz, the emission was tested 20db below the limit so the data not recorded in the sheet.

30 MHz – 1GHz data:


802.11g

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
41.64	20.71	45.18	40	-19.29	12.64	0.37	37.48	300	360	QP
80.44	18.55	47.5	40	-21.45	7.9	0.49	37.34	300	360	QP
189.08	14.43	39.75	43.5	-29.07	10.56	0.72	36.6	300	360	QP
293.84	21.17	43.11	46	-24.83	13.9	0.9	36.74	300	360	QP
422.85	24.16	42.61	46	-21.84	17.31	1.11	36.87	300	360	QP
703.18	25.74	39.08	46	-20.26	22.72	1.48	37.54	300	360	QP

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.

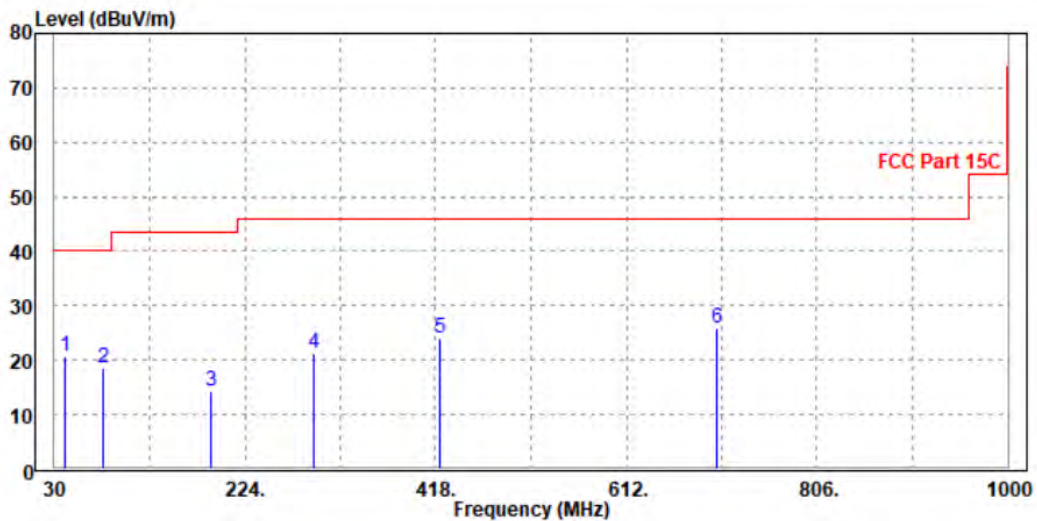




CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
41.64	34.09	59.52	40	-5.91	11.68	0.37	37.48	200	0	QP
62.98	24.55	53.53	40	-15.45	7.9	0.45	37.33	200	0	QP
80.44	24.58	53.12	40	-15.42	8.31	0.49	37.34	200	0	QP
150.28	19.44	45.56	43.5	-24.06	10.04	0.66	36.82	200	0	QP
189.08	21.28	46.32	43.5	-22.22	10.84	0.72	36.6	200	0	QP
306.45	31.44	52.14	46	-14.56	15.14	0.92	36.76	200	0	QP

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.

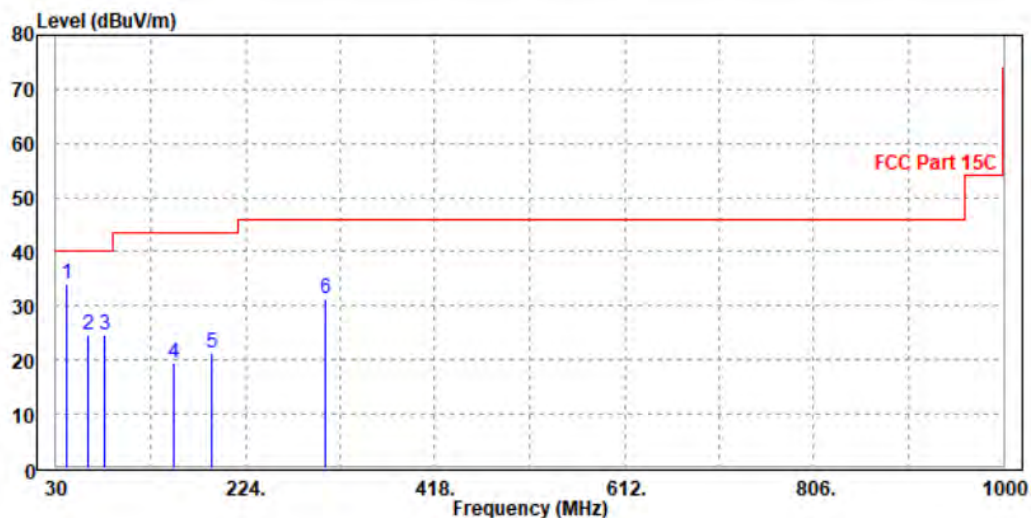



ABOVE 1GHz WORST-CASE DATA:

Note: For higher frequency, the emission is too low to be detected.

802.11b:

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	53.99	62.75	74	-20.01	31.75	5.86	46.37	110	175	Peak
2390	45	53.76	54	-9	31.75	5.86	46.37	110	175	Average
2412	105.23	113.89	/	/	31.82	5.89	46.37	110	175	Peak
2412	103.7	112.36	/	/	31.82	5.89	46.37	110	175	Average
2483.5	52.56	60.89	74	-21.44	32.05	5.99	46.37	110	175	Peak
2483.5	44.45	52.78	54	-9.55	32.05	5.99	46.37	110	175	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.32	60.69	74	-21.68	32.14	5.86	46.37	100	190	Peak
2390	44.99	53.36	54	-9.01	32.14	5.86	46.37	100	190	Average
2412	103.5	111.79	/	/	32.19	5.89	46.37	100	190	Peak
2412	101.77	110.06	/	/	32.19	5.89	46.37	100	190	Average
2483.5	51.87	59.89	74	-22.13	32.36	5.99	46.37	100	190	Peak
2483.5	44.14	52.16	54	-9.86	32.36	5.99	46.37	100	190	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	51.46	60.22	74	-22.54	31.75	5.86	46.37	110	175	Peak
2390	44.84	53.6	54	-9.16	31.75	5.86	46.37	110	175	Average
2437	104.27	112.81	/	/	31.9	5.93	46.37	110	175	Peak
2437	103.38	111.92	/	/	31.9	5.93	46.37	110	175	Average
2483.5	51.54	59.87	74	-22.46	32.05	5.99	46.37	110	175	Peak
2483.5	44.15	52.48	54	-9.85	32.05	5.99	46.37	110	175	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	51.07	59.44	74	-22.93	32.14	5.86	46.37	100	190	Peak
2390	44.77	53.14	54	-9.23	32.14	5.86	46.37	100	190	Average
2437	102.66	110.85	/	/	32.25	5.93	46.37	100	190	Peak
2437	101.03	109.22	/	/	32.25	5.93	46.37	100	190	Average
2483.5	52.89	60.91	74	-21.11	32.36	5.99	46.37	100	190	Peak
2483.5	44.51	52.53	54	-9.49	32.36	5.99	46.37	100	190	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.09	60.85	74	-21.91	31.75	5.86	46.37	105	180	Peak
2390	44.09	52.85	54	-9.91	31.75	5.86	46.37	105	180	Average
2462	103.77	112.2	/	/	31.98	5.96	46.37	105	180	Peak
2462	102.85	111.28	/	/	31.98	5.96	46.37	105	180	Average
2483.5	54	62.33	74	-20	32.05	5.99	46.37	105	180	Peak
2483.5	46.73	55.06	54	-7.27	32.05	5.99	46.37	105	180	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	51.82	60.19	74	-22.18	32.14	5.86	46.37	100	170	Peak
2390	44.31	52.68	54	-9.69	32.14	5.86	46.37	100	170	Average
2462	103.22	111.32	/	/	32.31	5.96	46.37	100	170	Peak
2462	102.14	110.24	/	/	32.31	5.96	46.37	100	170	Average
2483.5	54.41	62.43	74	-19.59	32.36	5.99	46.37	100	170	Peak
2483.5	46.34	54.36	54	-7.66	32.36	5.99	46.37	100	170	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	61.61	70.37	74	-12.39	31.75	5.86	46.37	110	190	Peak
2390	50.82	59.58	54	-3.18	31.75	5.86	46.37	110	190	Average
2412	106.16	114.82	/	/	31.82	5.89	46.37	110	190	Peak
2412	98.83	107.49	/	/	31.82	5.89	46.37	110	190	Average
2483.5	52.49	60.82	74	-21.51	32.05	5.99	46.37	110	190	Peak
2483.5	44.77	53.1	54	-9.23	32.05	5.99	46.37	110	190	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	54.71	63.08	74	-19.29	32.14	5.86	46.37	100	185	Peak
2390	46.87	55.24	54	-7.13	32.14	5.86	46.37	100	185	Average
2412	104.25	112.54	/	/	32.19	5.89	46.37	100	185	Peak
2412	96.76	105.05	/	/	32.19	5.89	46.37	100	185	Average
2483.5	51.84	59.86	74	-22.16	32.36	5.99	46.37	100	185	Peak
2483.5	44.46	52.48	54	-9.54	32.36	5.99	46.37	100	185	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	51.76	60.52	74	-22.24	31.75	5.86	46.37	110	175	Peak
2390	45.16	53.92	54	-8.84	31.75	5.86	46.37	110	175	Average
2412	105.52	114.18	/	/	31.82	5.89	46.37	110	175	Peak
2412	98.32	106.98	/	/	31.82	5.89	46.37	110	175	Average
2483.5	52.36	60.69	74	-21.64	32.05	5.99	46.37	110	175	Peak
2483.5	45.14	53.47	54	-8.86	32.05	5.99	46.37	110	175	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	53.09	61.46	74	-20.91	32.14	5.86	46.37	100	185	Peak
2390	44.87	53.24	54	-9.13	32.14	5.86	46.37	100	185	Average
2437	105.16	113.35	/	/	32.25	5.93	46.37	100	185	Peak
2437	97.86	106.05	/	/	32.25	5.93	46.37	100	185	Average
2483.5	52.94	60.96	74	-21.06	32.36	5.99	46.37	100	185	Peak
2483.5	45.77	53.79	54	-8.23	32.36	5.99	46.37	100	185	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.87	59.24	74	-23.13	32.14	5.86	46.37	110	105	Peak
2390	44.24	52.61	54	-9.76	32.14	5.86	46.37	110	105	Average
2462	104.59	112.69	/	/	32.31	5.96	46.37	110	105	Peak
2462	99.22	107.32	/	/	32.31	5.96	46.37	110	105	Average
2483.5	58.32	66.34	74	-15.68	32.36	5.99	46.37	110	105	Peak
2483.5	51.33	59.35	54	-2.67	32.36	5.99	46.37	110	105	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	51.49	59.86	74	-22.51	32.14	5.86	46.37	100	175	Peak
2390	44.57	52.94	54	-9.43	32.14	5.86	46.37	100	175	Average
2462	101.75	109.85	/	/	32.31	5.96	46.37	100	175	Peak
2462	93.75	101.85	/	/	32.31	5.96	46.37	100	175	Average
2483.5	57.37	65.39	74	-16.63	32.36	5.99	46.37	100	175	Peak
2483.5	49.01	57.03	54	-4.99	32.36	5.99	46.37	100	175	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	60.17	68.93	74	-13.83	31.75	5.86	46.37	110	175	Peak
2390	49.3	58.06	54	-4.7	31.75	5.86	46.37	110	175	Average
2412	105.45	114.11	/	/	31.82	5.89	46.37	110	175	Peak
2412	97.48	106.14	/	/	31.82	5.89	46.37	110	175	Average
2483.5	52.55	60.88	74	-21.45	32.05	5.99	46.37	110	175	Peak
2483.5	43.46	51.79	54	-10.54	32.05	5.99	46.37	110	175	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	55.23	63.6	74	-18.77	32.14	5.86	46.37	100	180	Peak
2390	46.3	54.67	54	-7.7	32.14	5.86	46.37	100	180	Average
2412	102.65	110.94	/	/	32.19	5.89	46.37	100	180	Peak
2412	95.1	103.39	/	/	32.19	5.89	46.37	100	180	Average
2483.5	53.32	61.34	74	-20.68	32.36	5.99	46.37	100	180	Peak
2483.5	44.96	52.98	54	-9.04	32.36	5.99	46.37	100	180	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.03	60.79	74	-21.97	31.75	5.86	46.37	110	175	Peak
2390	45.14	53.9	54	-8.86	31.75	5.86	46.37	110	175	Average
2437	104.33	112.87	/	/	31.9	5.93	46.37	110	175	Peak
2437	97.19	105.73	/	/	31.9	5.93	46.37	110	175	Average
2483.5	52.55	60.88	74	-21.45	32.05	5.99	46.37	110	175	Peak
2483.5	44.38	52.71	54	-9.62	32.05	5.99	46.37	110	175	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	53.11	61.48	74	-20.89	32.14	5.86	46.37	100	180	Peak
2390	44.01	52.38	54	-9.99	32.14	5.86	46.37	100	180	Average
2437	103.59	111.78	/	/	32.25	5.93	46.37	100	180	Peak
2437	95.64	103.83	/	/	32.25	5.93	46.37	100	180	Average
2483.5	52.58	60.6	74	-21.42	32.36	5.99	46.37	100	180	Peak
2483.5	43.85	51.87	54	-10.15	32.36	5.99	46.37	100	180	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	51.97	60.73	74	-22.03	31.75	5.86	46.37	105	180	Peak
2390	42.96	51.72	54	-11.04	31.75	5.86	46.37	105	180	Average
2462	103.73	112.16	/	/	31.98	5.96	46.37	105	180	Peak
2462	95.67	104.1	/	/	31.98	5.96	46.37	105	180	Average
2483.5	61.59	69.92	74	-12.41	32.05	5.99	46.37	105	180	Peak
2483.5	49.84	58.17	54	-4.16	32.05	5.99	46.37	105	180	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.55	60.92	74	-21.45	32.14	5.86	46.37	100	170	Peak
2390	44.37	52.74	54	-9.63	32.14	5.86	46.37	100	170	Average
2462	102.03	110.13	/	/	32.31	5.96	46.37	100	170	Peak
2462	94.26	102.36	/	/	32.31	5.96	46.37	100	170	Average
2483.5	59.84	67.86	74	-14.16	32.36	5.99	46.37	100	170	Peak
2483.5	49.35	57.37	54	-4.65	32.36	5.99	46.37	100	170	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02

BELOW 1GHz WORST-CASE DATA:

Note: For frequency below 30MHz, the emission was tested 20db below the limit so the data not recorded in the sheet.

30 MHz – 1GHz data:


BT-LE_1M

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK	
56.19	18.96	47.88	40	-21.04	7.98	0.43	37.33	200	358	QP	
143.49	21.83	49.38	43.5	-21.67	8.69	0.64	36.88	200	358	QP	
189.08	21.68	47	43.5	-21.82	10.56	0.72	36.6	200	196	QP	
292.87	26.46	48.41	46	-19.54	13.89	0.9	36.74	200	91	QP	
422.85	24.81	43.26	46	-21.19	17.31	1.11	36.87	200	137	QP	
562.53	21.49	37.46	46	-24.51	19.95	1.31	37.23	200	182	QP	

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

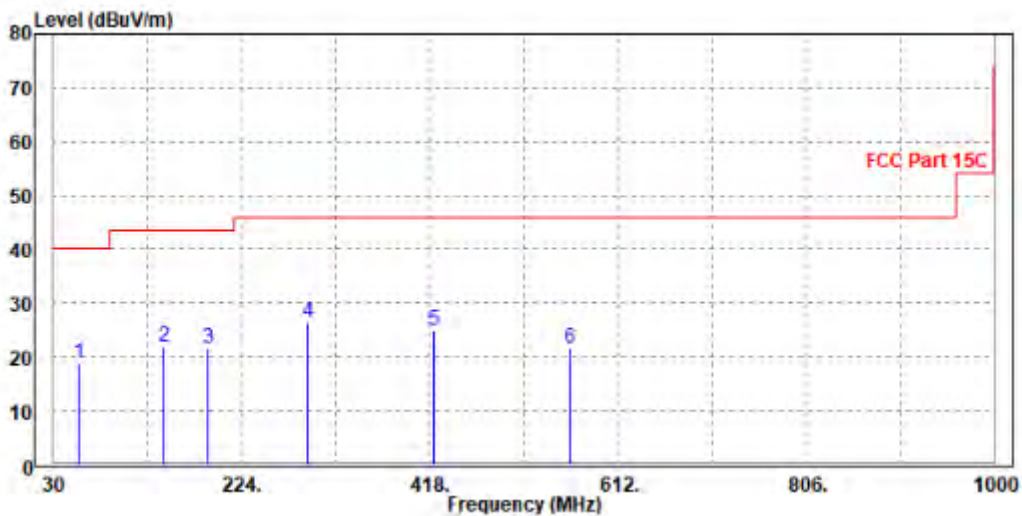



**BUREAU
VERITAS**


Test Report No.: W7L-P22030026-2RF02

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
33.88	27.65	46.36	40	-12.35	18.49	0.33	37.53	100	237	QP
124.09	20.57	49.09	43.5	-22.93	7.94	0.59	37.05	100	306	QP
310.33	21.75	42.35	46	-24.25	15.23	0.93	36.76	100	95	QP
422.85	24.4	42.53	46	-21.6	17.63	1.11	36.87	100	65	QP
486.87	23.21	40.14	46	-22.79	18.85	1.2	36.98	100	224	QP
594.54	24.71	39.91	46	-21.29	20.8	1.35	37.35	100	264	QP

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

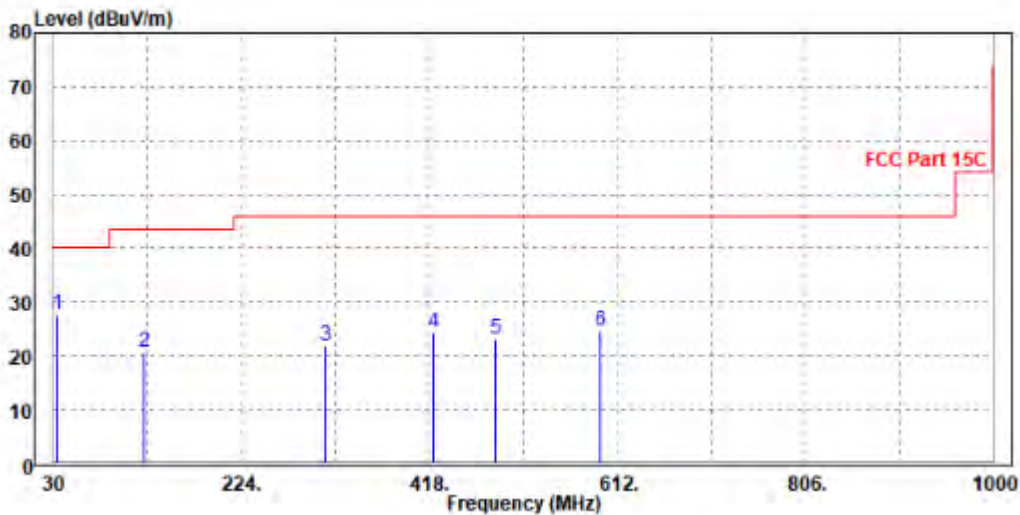



ABOVE 1GHz TEST DATA

Note: For higher frequency, the emission is too low to be detected.

BT-LE_1M

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.22	60.98	74	-21.78	31.75	5.86	46.37	100	105	Peak
2390	44.23	52.99	54	-9.77	31.75	5.86	46.37	100	105	Average
2402	99.91	108.61	/	/	31.79	5.88	46.37	100	105	Peak
2402	99.14	107.84	/	/	31.79	5.88	46.37	100	105	Average
2483.5	52.37	60.7	74	-21.63	32.05	5.99	46.37	100	105	Peak
2483.5	44.07	52.4	54	-9.93	32.05	5.99	46.37	100	105	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	51.38	59.75	74	-22.62	32.14	5.86	46.37	100	170	Peak
2390	44.95	53.32	54	-9.05	32.14	5.86	46.37	100	170	Average
2402	99.98	108.31	/	/	32.16	5.88	46.37	100	170	Peak
2402	96.96	105.29	/	/	32.16	5.88	46.37	100	170	Average
2483.5	52.38	60.4	74	-21.62	32.36	5.99	46.37	100	170	Peak
2483.5	44.95	52.97	54	-9.05	32.36	5.99	46.37	100	170	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2402MHz: Fundamental frequency.



CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.06	60.82	74	-21.94	31.75	5.86	46.37	100	0	Peak
2390	44.32	53.08	54	-9.68	31.75	5.86	46.37	100	0	Average
2440	100.43	108.96	/	/	31.91	5.93	46.37	100	0	Peak
2440	97.84	106.37	/	/	31.91	5.93	46.37	100	0	Average
2483.5	52.86	61.19	74	-21.14	32.05	5.99	46.37	100	0	Peak
2483.5	44.12	52.45	54	-9.88	32.05	5.99	46.37	100	0	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	51.81	60.18	74	-22.19	32.14	5.86	46.37	100	170	Peak
2390	44.81	53.18	54	-9.19	32.14	5.86	46.37	100	170	Average
2440	100.28	108.46	/	/	32.26	5.93	46.37	100	170	Peak
2440	98.45	106.63	/	/	32.26	5.93	46.37	100	170	Average
2483.5	53.37	61.39	74	-20.63	32.36	5.99	46.37	100	170	Peak
2483.5	44.71	52.73	54	-9.29	32.36	5.99	46.37	100	170	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2440MHz: Fundamental frequency.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.09	60.85	74	-21.91	31.75	5.86	46.37	100	170	Peak
2390	44.3	53.06	54	-9.7	31.75	5.86	46.37	100	170	Average
2480	100.21	108.56	/	/	32.04	5.98	46.37	100	170	Peak
2480	97.61	105.96	/	/	32.04	5.98	46.37	100	170	Average
2483.5	53.23	61.56	74	-20.77	32.05	5.99	46.37	100	170	Peak
2483.5	43.9	52.23	54	-10.1	32.05	5.99	46.37	100	170	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.91	61.28	74	-21.09	32.14	5.86	46.37	100	195	Peak
2390	44.36	52.73	54	-9.64	32.14	5.86	46.37	100	195	Average
2480	101.13	109.17	/	/	32.35	5.98	46.37	100	195	Peak
2480	99.15	107.19	/	/	32.35	5.98	46.37	100	195	Average
2483.5	52.85	60.87	74	-21.15	32.36	5.99	46.37	100	195	Peak
2483.5	44.46	52.48	54	-9.54	32.36	5.99	46.37	100	195	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2480MHz: Fundamental frequency.



3.3 6 dB BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

3.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Feb. 25,21	Feb. 24,22
Power Meter	ANRITSU	ML2495A	1506002	Feb. 24,22	Feb. 23,23
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Feb. 25,21	Feb. 24,22
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Feb. 24,22	Feb. 23,23
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	Apr. 26,21	Apr. 25,22
Power Sensor	ANRITSU	MA2411B	1339352	Feb. 25,21	Feb. 24,22
Power Sensor	ANRITSU	MA2411B	1339352	Feb. 24,22	Feb. 23,23

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

3.3.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



3.3.4 DEVIATION FROM TEST STANDARD

No deviation.

3.3.5 TEST SETUP

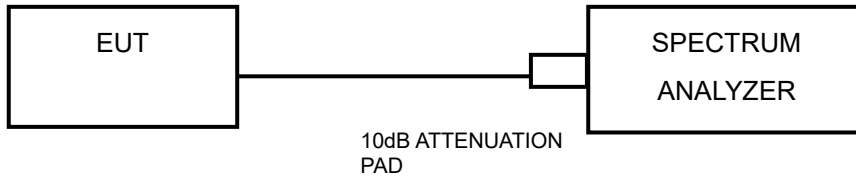

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



BUREAU Test Report No.: W7L-P22030026-2RF02
VERITAS

3.3.7 TEST RESULTS

Please Refer to Appendix1/2 Of this test report.




3.4 CONDUCTED OUTPUT POWER

3.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

3.4.2 TEST SETUP

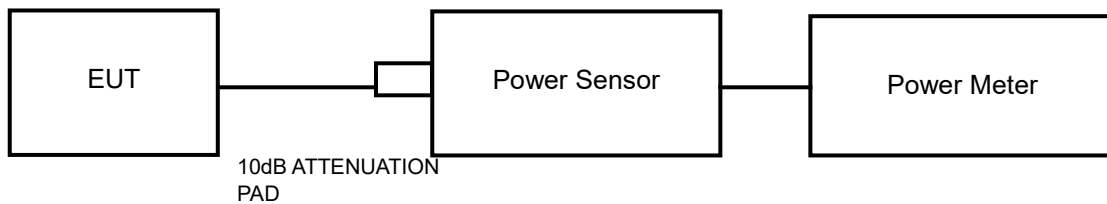

3.4.3 TEST INSTRUMENTS

Refer to section 3.2.2 to get information of above instrument.

3.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



BUREAU Test Report No.: W7L-P22030026-2RF02
VERITAS

3.4.7 TEST RESULTS

3.4.7.1 MAXIMUM PEAK OUTPUT POWER

Please Refer to Appendix1/2 Of this test report.



**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02

3.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

Please Refer to Appendix1/2 Of this test report.




3.5 POWER SPECTRAL DENSITY MEASUREMENT

3.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

3.5.2 TEST SETUP



3.5.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW \geq 3 x RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02

3.5.7 TEST RESULTS

Please Refer to Appendix1/2 Of this test report.




3.6 OUT OF BAND EMISSION MEASUREMENT

3.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

3.6.2 TEST SETUP

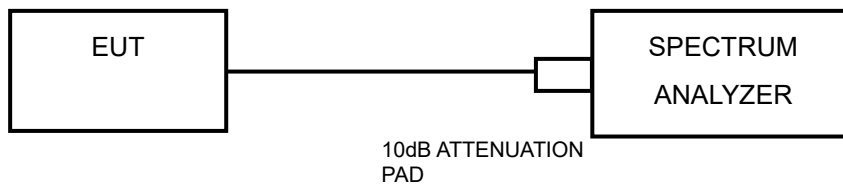

3.6.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

3.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.6.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.

Please Refer to Appendix 1/2 Of this test report.



4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



BUREAU VERITAS Test Report No.: W7L-P22030026-2RF02

6 Appendix 1 BLE


DTS BANDWIDTH

TEST RESULT

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.660	2401.664	2402.324	0.5	PASS
		2440	0.664	2439.668	2440.332	0.5	PASS
		2480	0.636	2479.680	2480.316	0.5	PASS



TEST GRAPHS

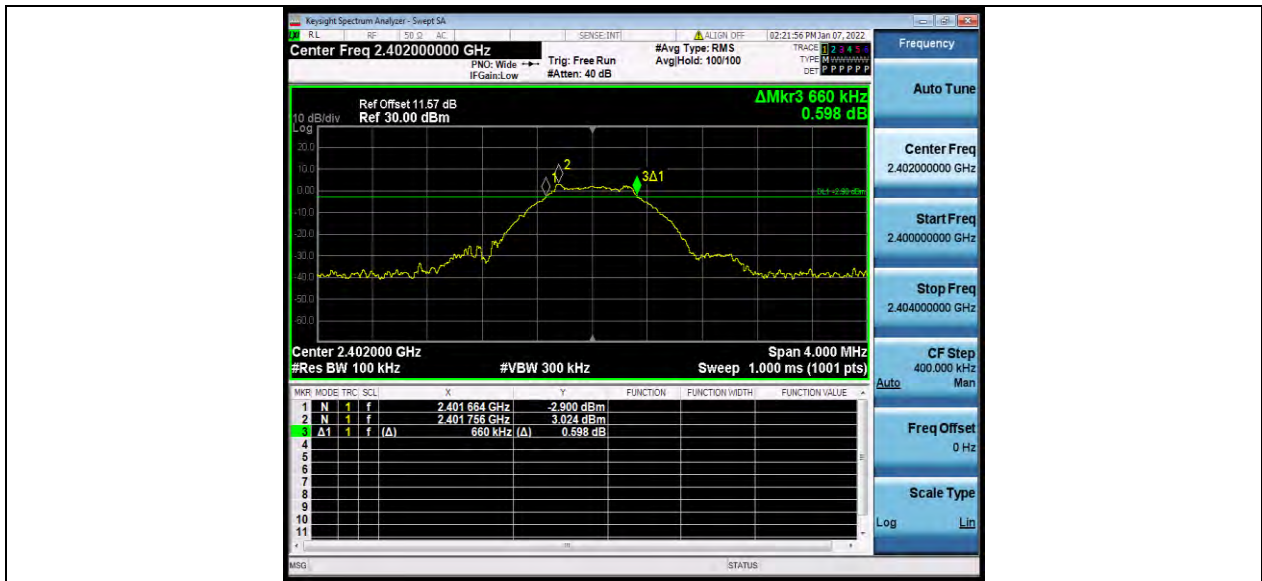

BLE_1M_Ant1_2402



BLE_1M_Ant1_2440



**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02



BLE_1M_Ant1_2480

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan
Avenue, North Area, Hi-Tech Industrial Park, Nanshan
District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



OCCUPIED CHANNEL BANDWIDTH TEST RESULT

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0325	2401.492	2402.525	---	PASS
		2440	1.0285	2439.489	2440.517	---	PASS
		2480	1.0292	2479.488	2480.517	---	PASS



TEST GRAPHS



BLE_1M_Ant1_2402



BLE_1M_Ant1_2440



**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02



BLE_1M_Ant1_2480



MAXIMUM CONDUCTED OUTPUT POWER

TEST RESULT PEAK

TestMode	Antenna	Channel	Peak Power[dBm]	Peak Power[mw]	Conducted Limit[dBm]	Verdict	Power setting
1M	Ant1	2402	2.33	1.71	≤30	PASS	Default
		2440	3.03	2.01	≤30	PASS	Default
		2480	3.25	2.11	≤30	PASS	Default

TEST RESULT AVERAGE

TestMode	Antenna	Channel	Average Power	Conducted Limit[dBm]	Verdict	Power setting
1M	Ant1	2402	1.23	/	PASS	Default
		2440	1.80	/	PASS	Default
		2480	2.01	/	PASS	Default




MAXIMUM POWER SPECTRAL DENSITY

TEST RESULT

TestMode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-6.94	≤8	PASS
		2440	-6.91	≤8	PASS
		2480	-6.47	≤8	PASS



TEST GRAPHS

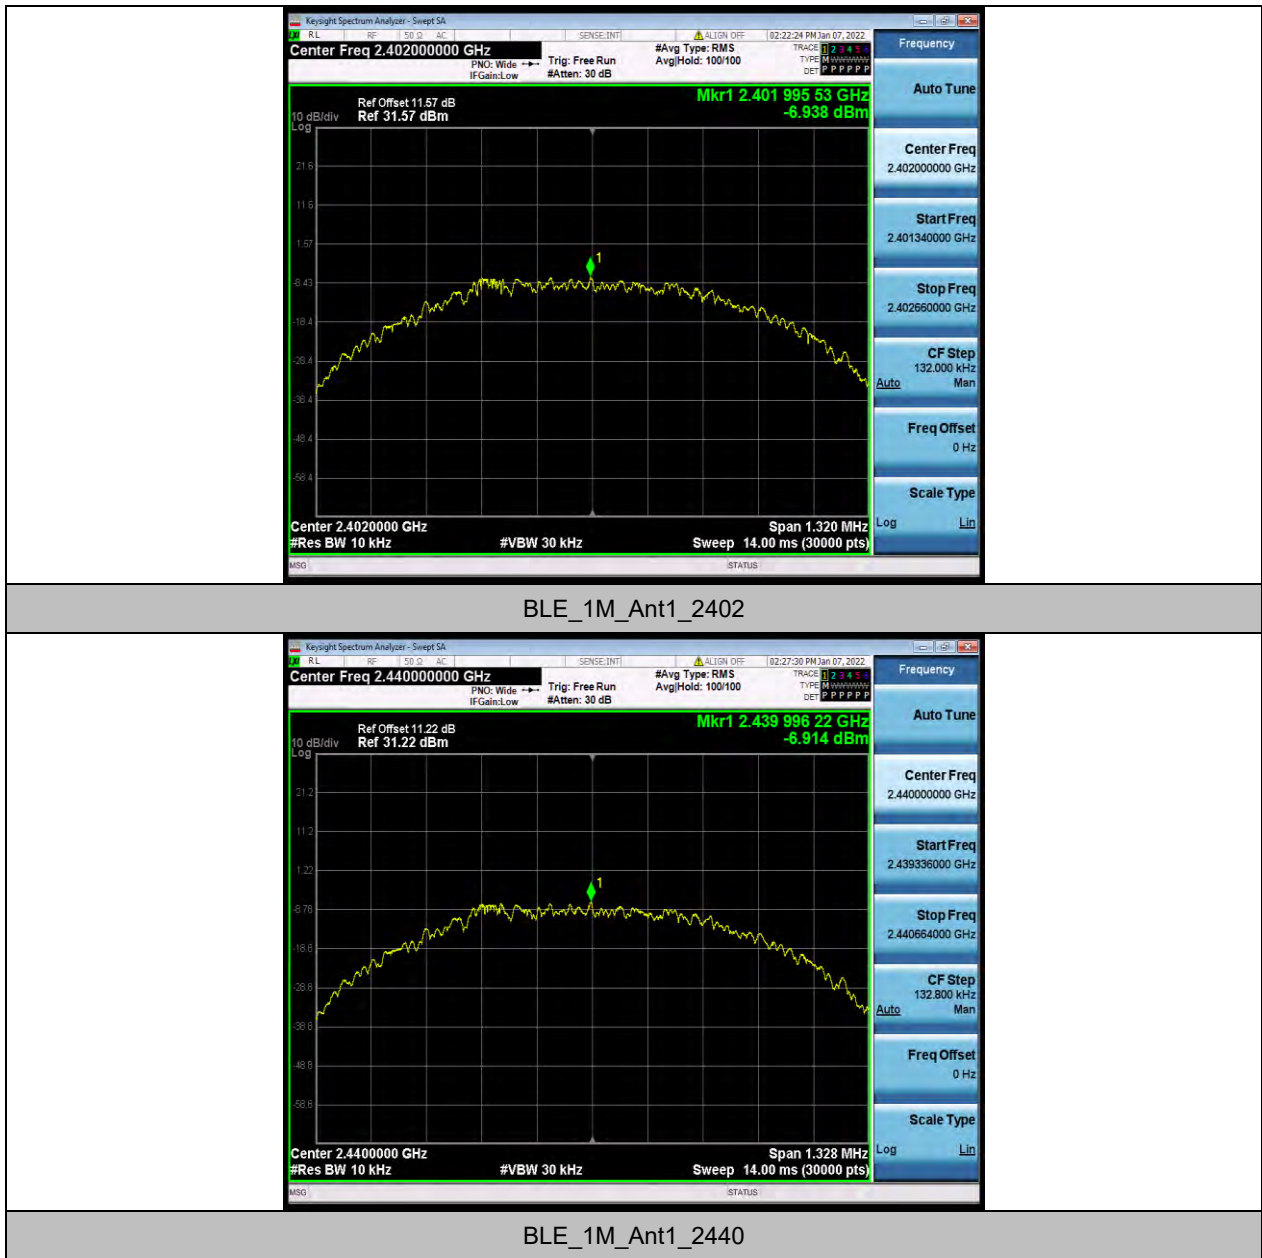



**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02



BLE_1M_Ant1_2480




BAND EDGE MEASUREMENTS

TEST RESULT


TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	3.04	-44.16	≤-16.96	PASS
		High	2480	2.89	-43.42	≤-17.11	PASS



TEST GRAPHS

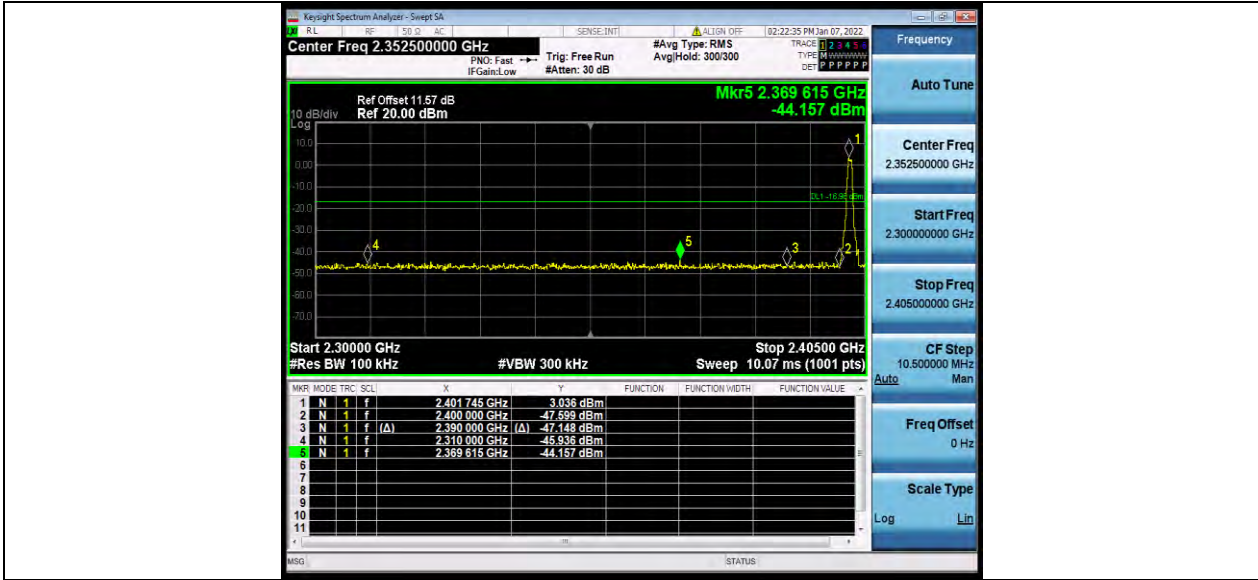

BLE_1M_Ant1_Low_2402

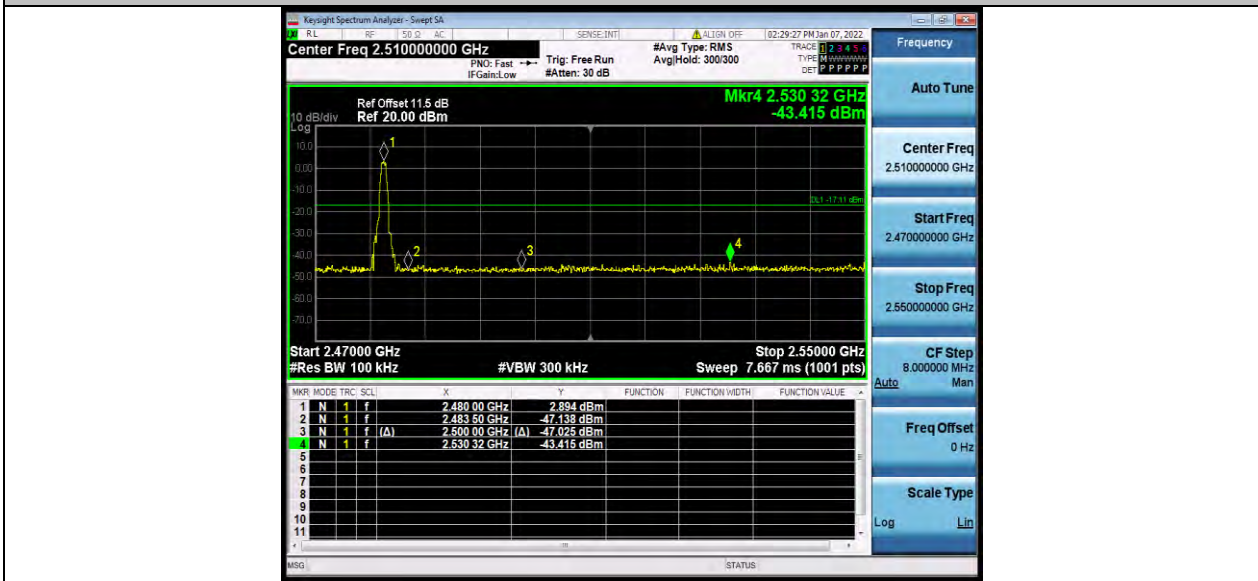

BLE_1M_Ant1_High_2480



CONDUCTED SPURIOUS EMISSION TEST RESULT


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	1.43	1.43	---	PASS
			30~1000	1.43	-53.85	≤-18.57	PASS
			1000~26500	1.43	-37.44	≤-18.57	PASS
		2440	Reference	1.19	1.19	---	PASS
			30~1000	1.19	-54.41	≤-18.81	PASS
			1000~26500	1.19	-38.12	≤-18.81	PASS
		2480	Reference	1.70	1.70	---	PASS
			30~1000	1.70	-53.43	≤-18.3	PASS
			1000~26500	1.70	-38.02	≤-18.3	PASS



TEST GRAPHS



BLE_1M_Ant1_2402_0~Reference

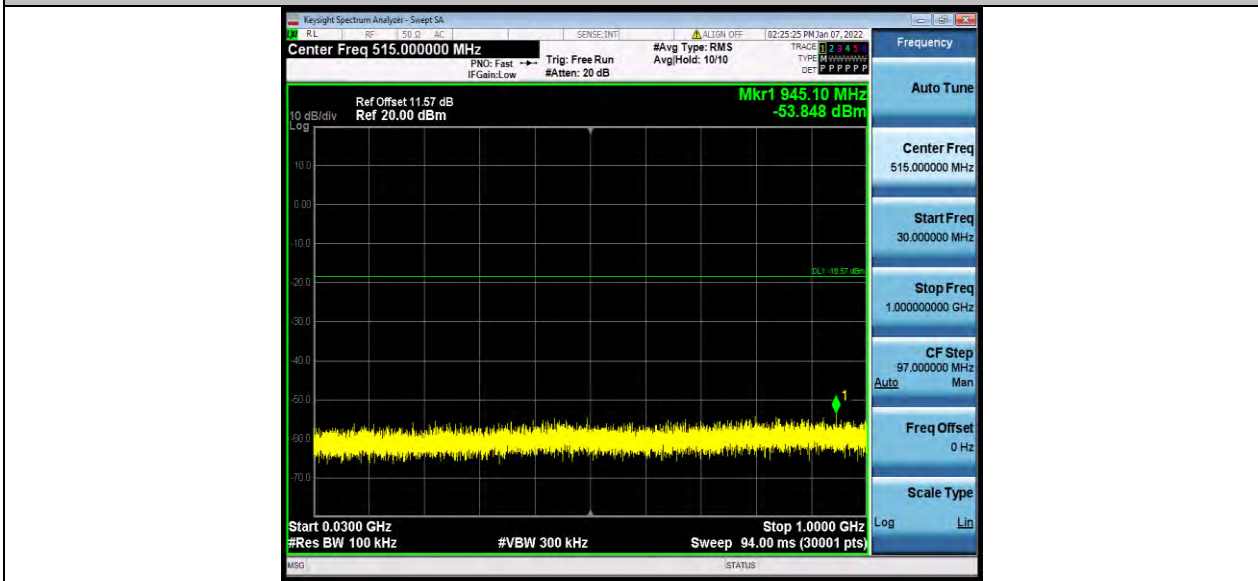


BLE_1M_Ant1_2402_30~1000



**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02

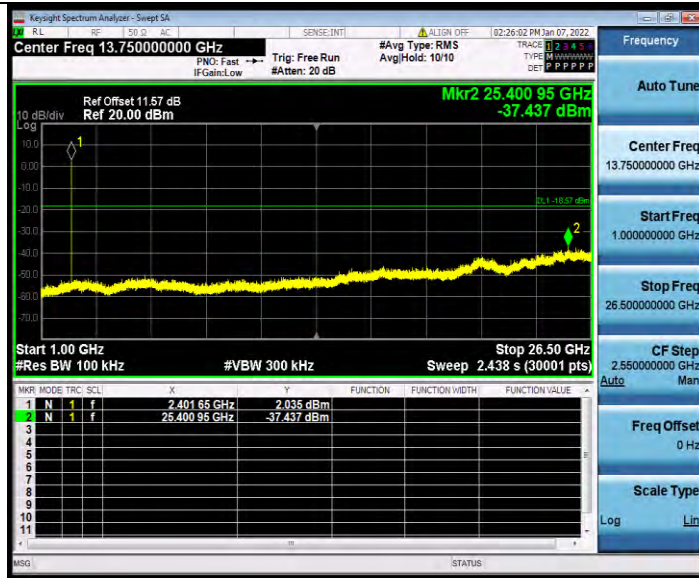

BLE_1M_Ant1_2402_1000~26500



BLE_1M_Ant1_2440_0~Reference

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan
Avenue, North Area, Hi-Tech Industrial Park, Nanshan
District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




BUREAU VERITAS

Test Report No.: W7L-P22030026-2RF02

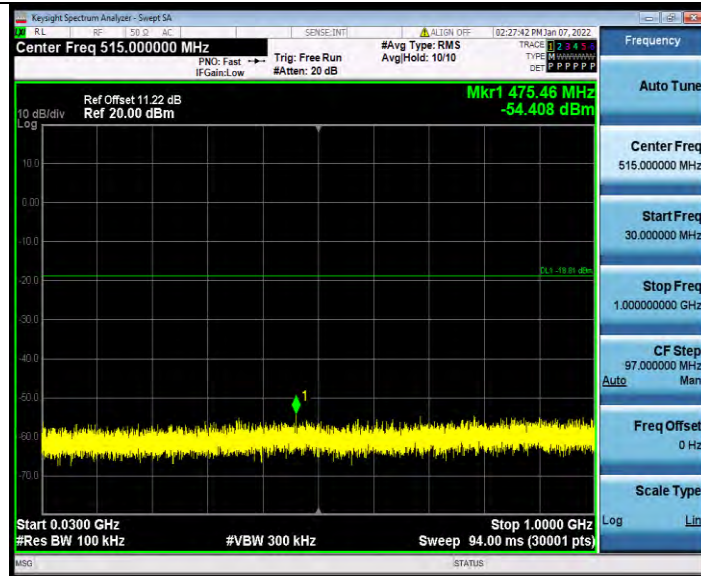

BLE_1M_Ant1_2440_30~1000

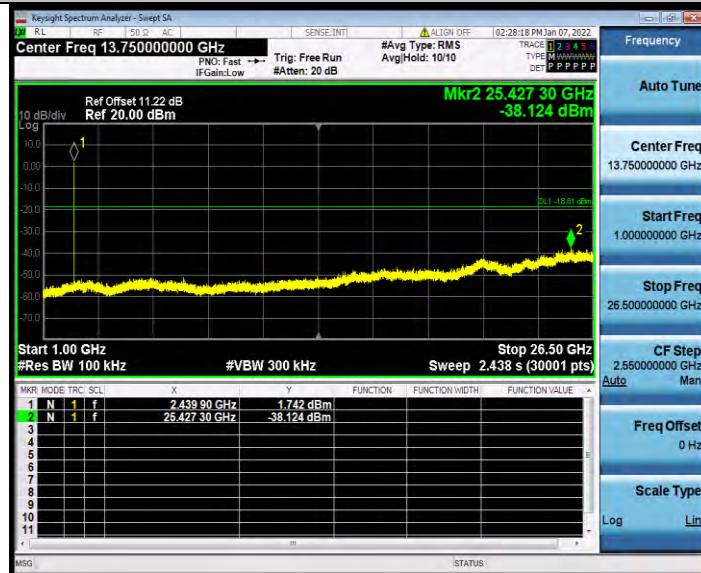

BLE_1M_Ant1_2440_1000~26500




**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02



BLE_1M_Ant1_2480_0~Reference

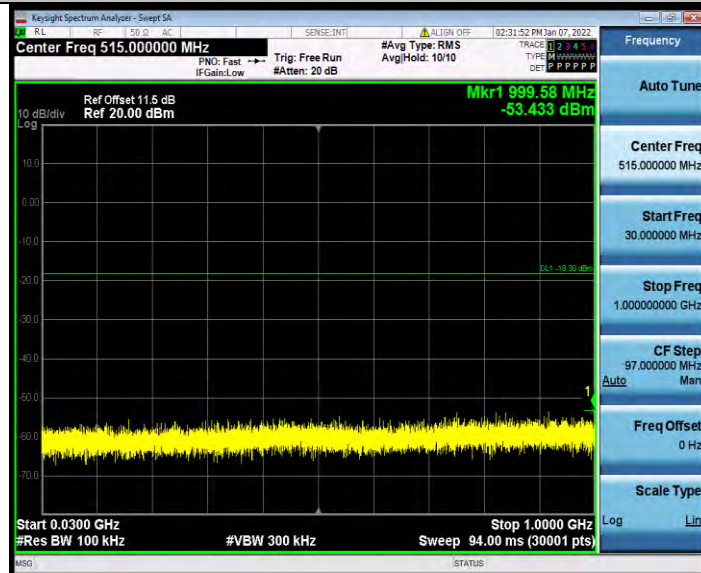


BLE_1M_Ant1_2480_30~1000



**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02

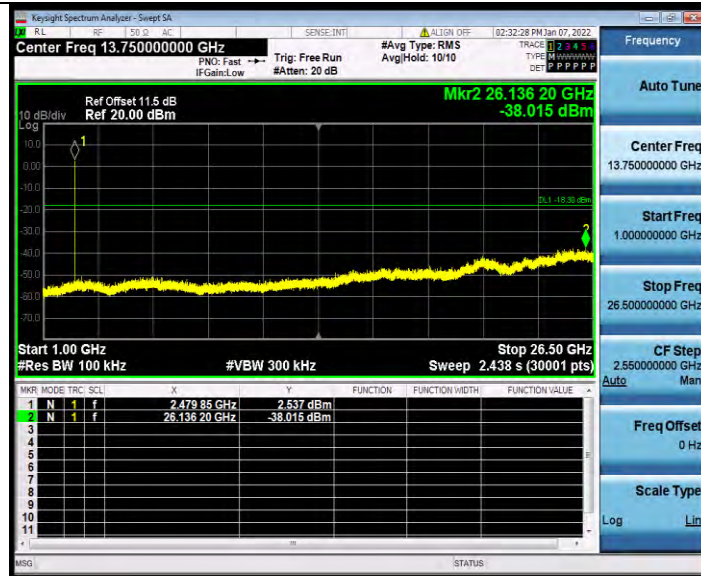

BLE_1M_Ant1_2480_1000~26500

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan
Avenue, North Area, Hi-Tech Industrial Park, Nanshan
District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




DUTY CYCLE

TEST RESULT


TestMode	Antenna	Channel	ON Time [ms]	Period [ms]	X	DC [%]	xFactor	Limit	Verdict
BLE_1M	Ant1	2402	1.63	1.875	0.8693	86.93	0.61	---	PASS
		2440	1.635	1.88	0.8696	86.96	0.61	---	PASS
		2480	1.625	1.875	0.8666	86.66	0.62	---	PASS



TEST GRAPHS

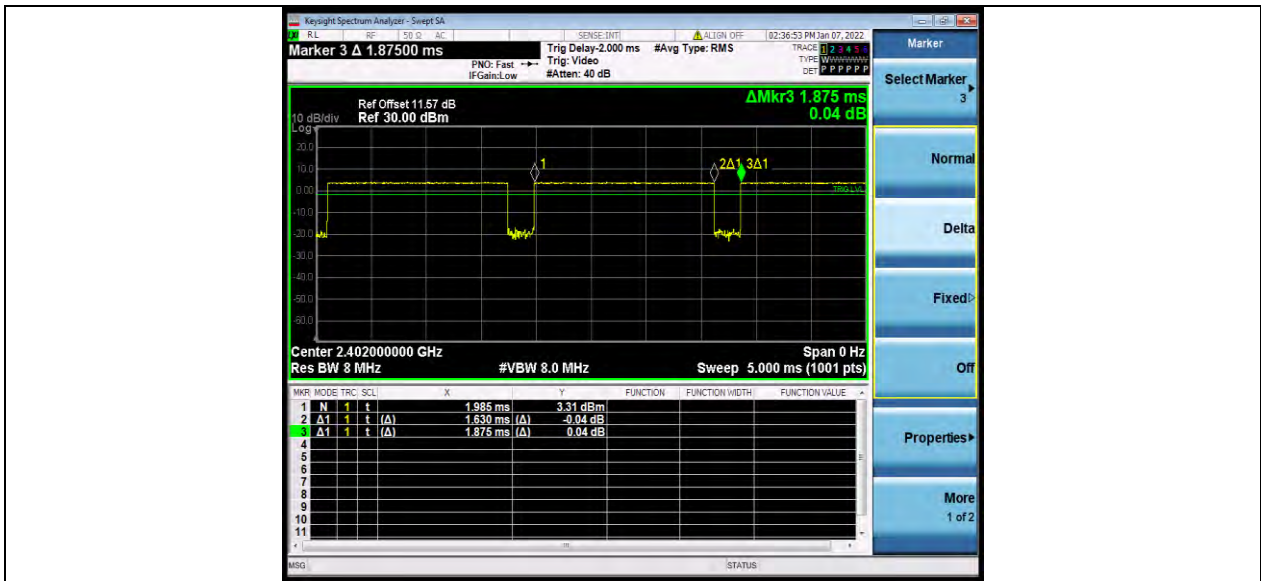

BLE_1M_Ant1_2402

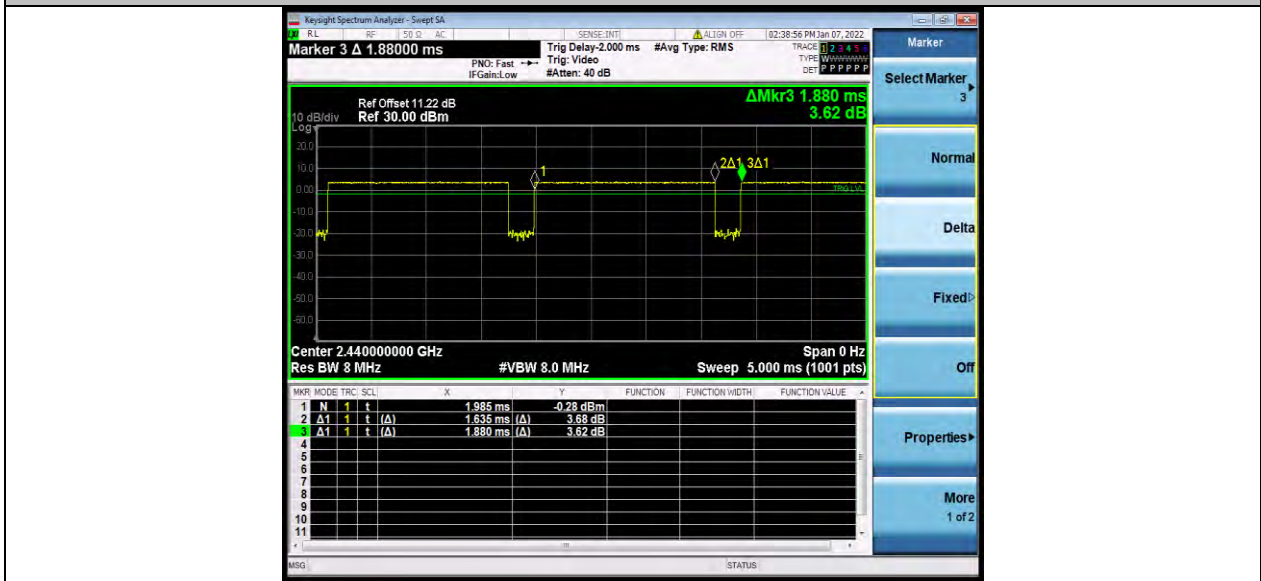


BLE_1M_Ant1_2440



BUREAU VERITAS

Test Report No.: W7L-P22030026-2RF02

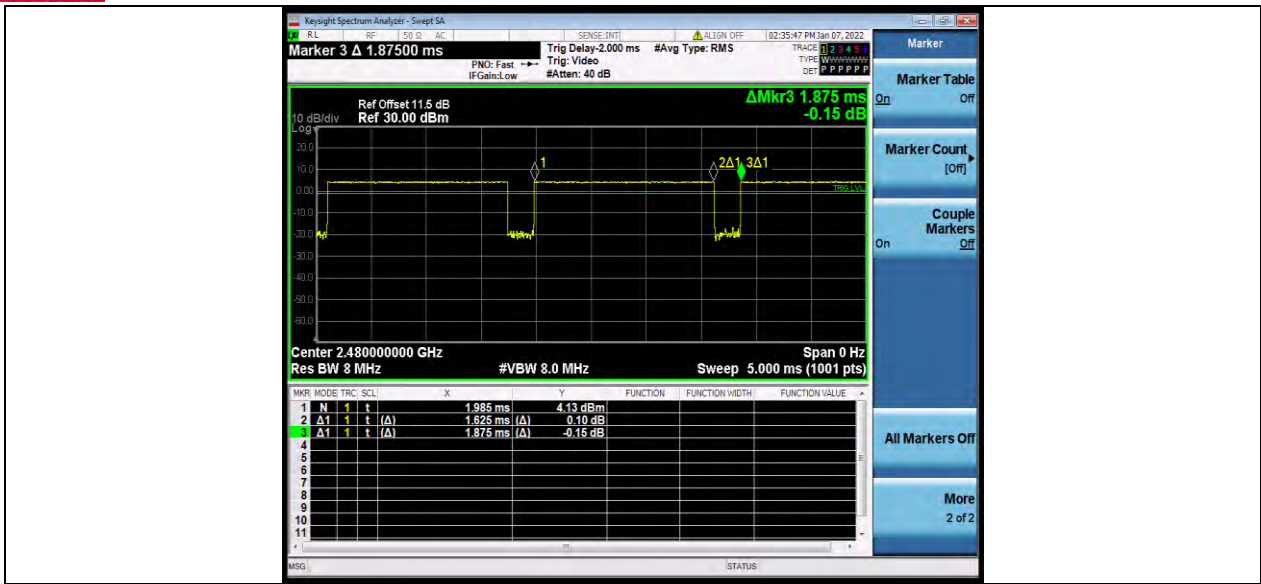

BLE_1M_Ant1_2480



7 Appendix 2 WLAN 2.4G


DTS BANDWIDTH

TEST RESULT

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.120	2407.440	2416.560	0.5	PASS
		2437	9.120	2432.440	2441.560	0.5	PASS
		2462	8.560	2457.960	2466.520	0.5	PASS
11G	Ant1	2412	16.360	2403.800	2420.160	0.5	PASS
		2437	16.320	2428.840	2445.160	0.5	PASS
		2462	16.320	2453.840	2470.160	0.5	PASS
11N20SISO	Ant1	2412	17.600	2403.200	2420.800	0.5	PASS
		2437	17.560	2428.200	2445.760	0.5	PASS
		2462	17.320	2453.480	2470.800	0.5	PASS



TEST GRAPHS

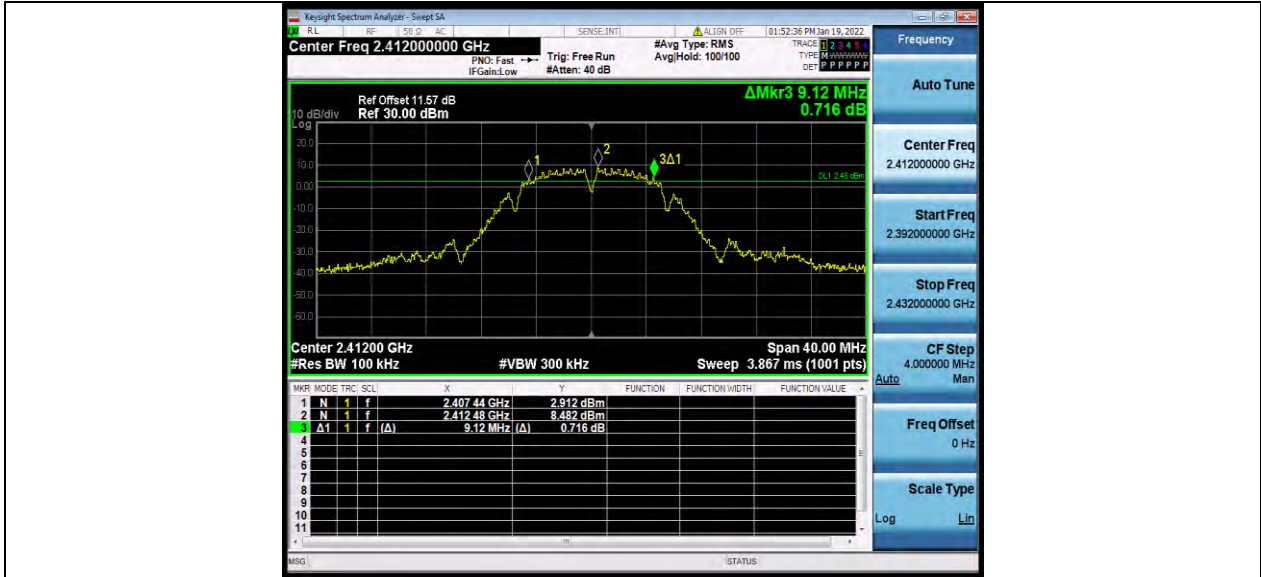

11B_Ant1_2412



11B_Ant1_2437



11B_Ant1_2462



11G_Ant1_2412



11G_Ant1_2437




11G_Ant1_2462




BUREAU VERITAS

Test Report No.: W7L-P22030026-2RF02

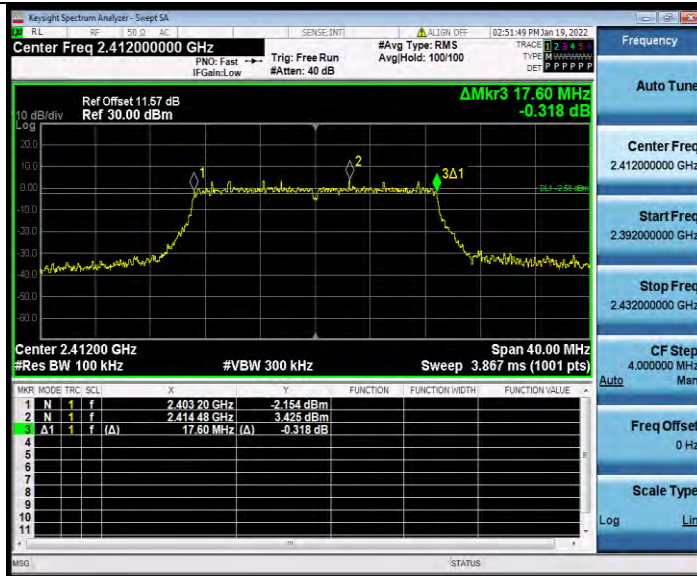

11N20SISO_Ant1_2412

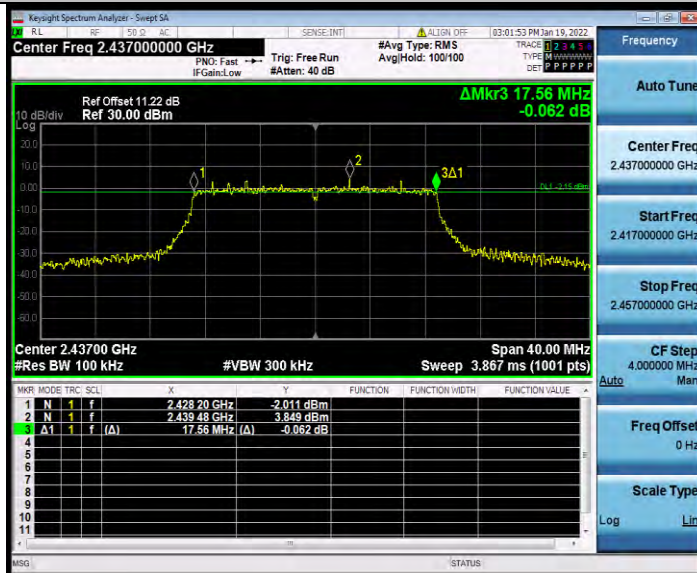


11N20SISO_Ant1_2437



**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02

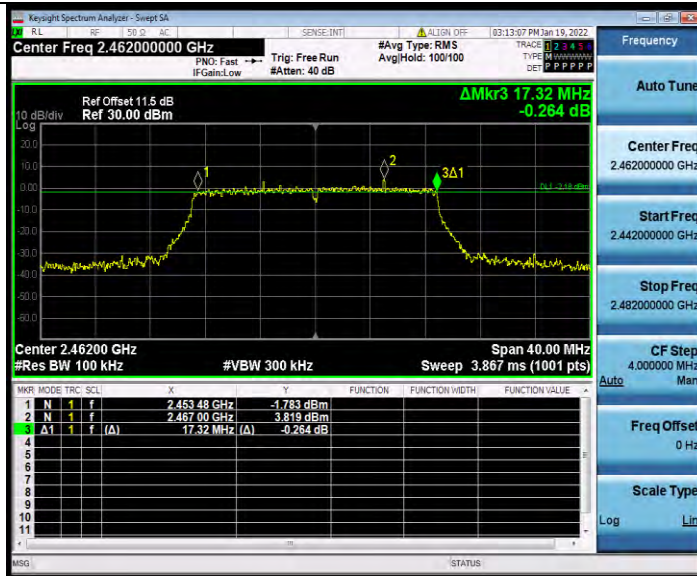

11N20SISO_Ant1_2462

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan
Avenue, North Area, Hi-Tech Industrial Park, Nanshan
District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



OCCUPIED CHANNEL BANDWIDTH

TEST RESULT

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	12.268	2405.873	2418.141	---	PASS
		2437	12.257	2430.954	2443.211	---	PASS
		2462	12.190	2455.968	2468.158	---	PASS
11G	Ant1	2412	17.529	2403.308	2420.837	---	PASS
		2437	17.505	2428.242	2445.747	---	PASS
		2462	17.520	2453.328	2470.848	---	PASS
11N20SISO	Ant1	2412	18.048	2403.035	2421.083	---	PASS
		2437	18.048	2428.043	2446.091	---	PASS
		2462	18.035	2453.031	2471.066	---	PASS



TEST GRAPHS



11B_Ant1_2412



11B_Ant1_2437




BUREAU VERITAS

Test Report No.: W7L-P22030026-2RF02



11B_Ant1_2462

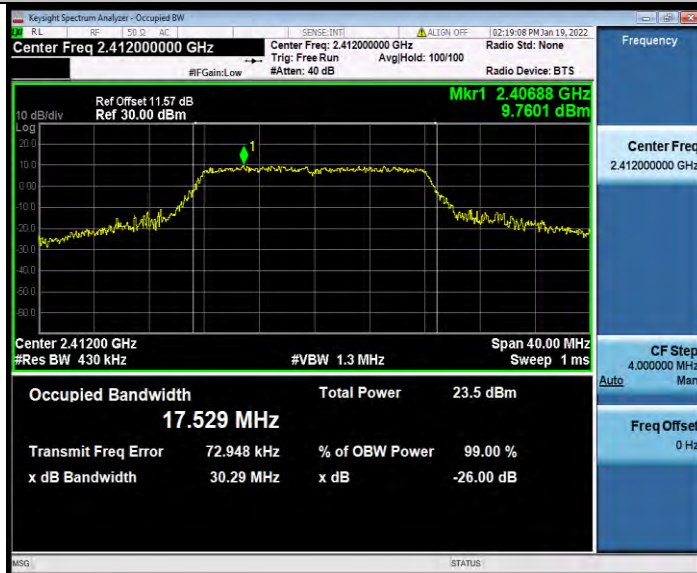

11G_Ant1_2412




**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02



11G_Ant1_2437

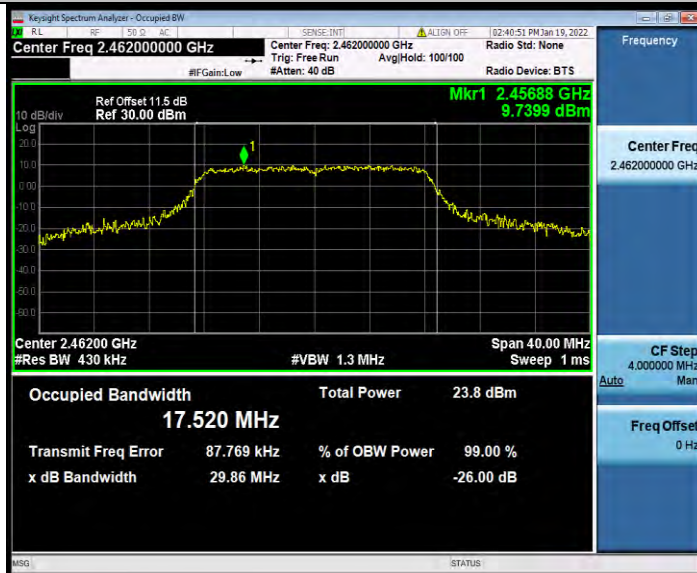


11G_Ant1_2462




**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02

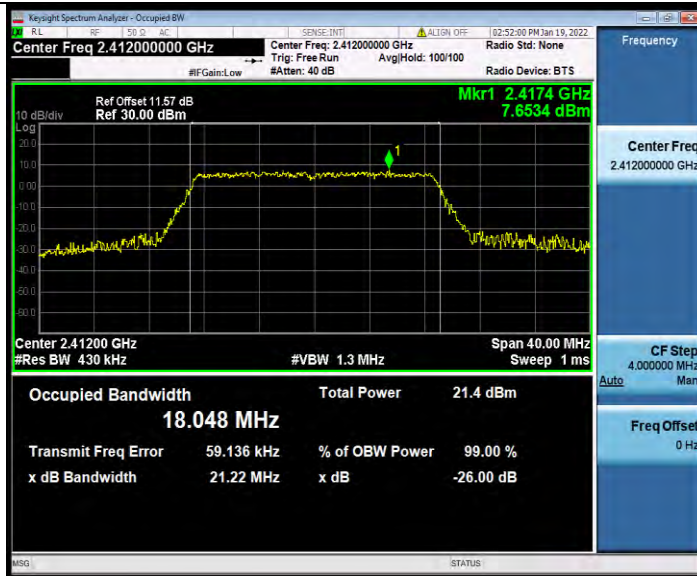

11N20SISO_Ant1_2412

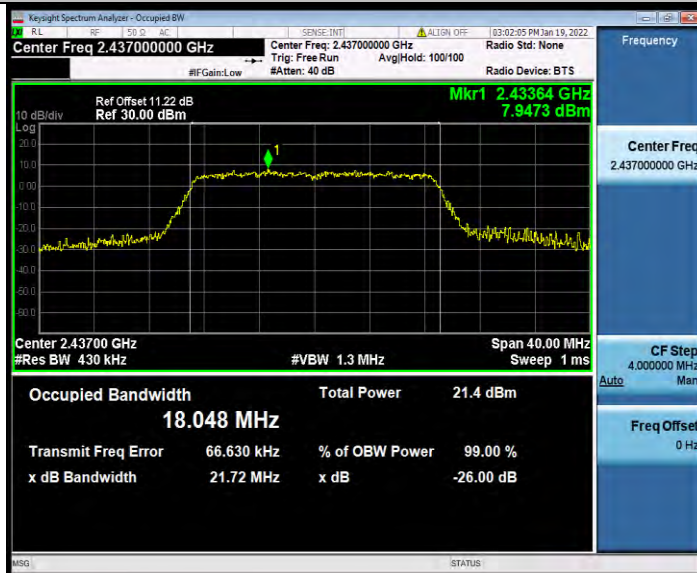

11N20SISO_Ant1_2437



**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02



11N20SISO_Ant1_2462



MAXIMUM CONDUCTED OUTPUT POWER

TEST RESULT PEAK

TestMode	Antenna	Channel	Peak Power[dBm]	Peak Power[mw]	Conducted Limit[dBm]	Verdict	Power setting
11B	Ant1	2412	20.43	110.41	≤30	PASS	17
		2437	20.18	104.23	≤30	PASS	16
		2462	20.51	112.46	≤30	PASS	17
11G	Ant1	2412	22.94	196.79	≤30	PASS	15
		2437	22.82	191.43	≤30	PASS	14
		2462	22.78	189.67	≤30	PASS	15
11N20SIS O	Ant1	2412	22.71	186.64	≤30	PASS	15
		2437	23.24	210.86	≤30	PASS	15
		2462	23.05	201.84	≤30	PASS	15

TEST RESULT AVERAGE

TestMode	Antenna	Channel	Average Power	Conducted Limit[dBm]	Verdict	Power setting
11B	Ant1	2412	17.48	/	PASS	17
		2437	17.25	/	PASS	16
		2462	17.53	/	PASS	17
11G	Ant1	2412	16.37	/	PASS	15
		2437	15.98	/	PASS	14
		2462	16.26	/	PASS	15
11N20SISO	Ant1	2412	13.52	/	PASS	15
		2437	14.46	/	PASS	15
		2462	13.80	/	PASS	15




MAXIMUM POWER SPECTRAL DENSITY TEST RESULT


TestMode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	7.76	≤8	PASS
		2437	6.77	≤8	PASS
		2462	7.87	≤8	PASS
11G	Ant1	2412	-8.88	≤8	PASS
		2437	-9.8	≤8	PASS
		2462	-8.27	≤8	PASS
11N20SISO	Ant1	2412	-8.15	≤8	PASS
		2437	-10.45	≤8	PASS
		2462	-10.65	≤8	PASS



TEST GRAPHS

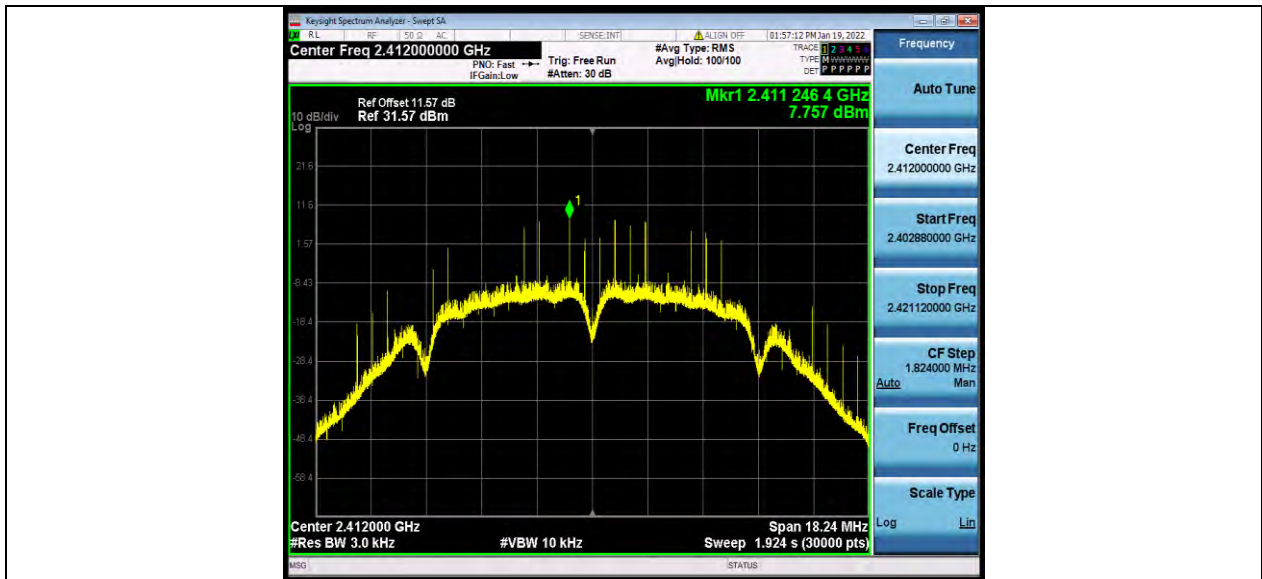

11B_Ant1_2412

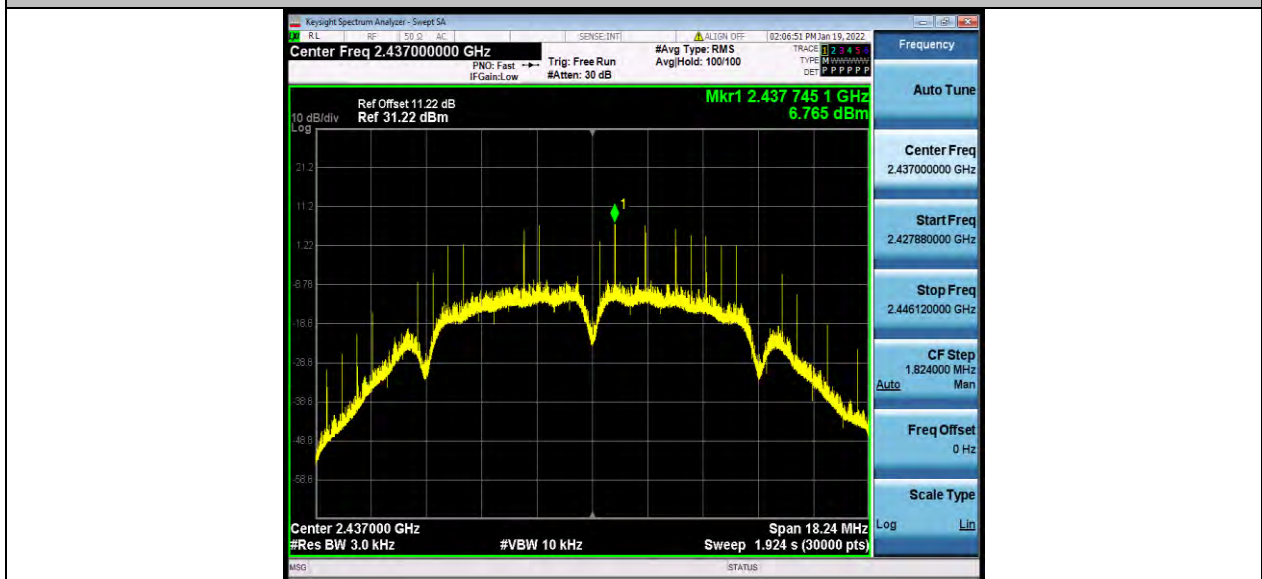

11B_Ant1_2437




BUREAU
VERITAS

Test Report No.: W7L-P22030026-2RF02



11B_Ant1_2462

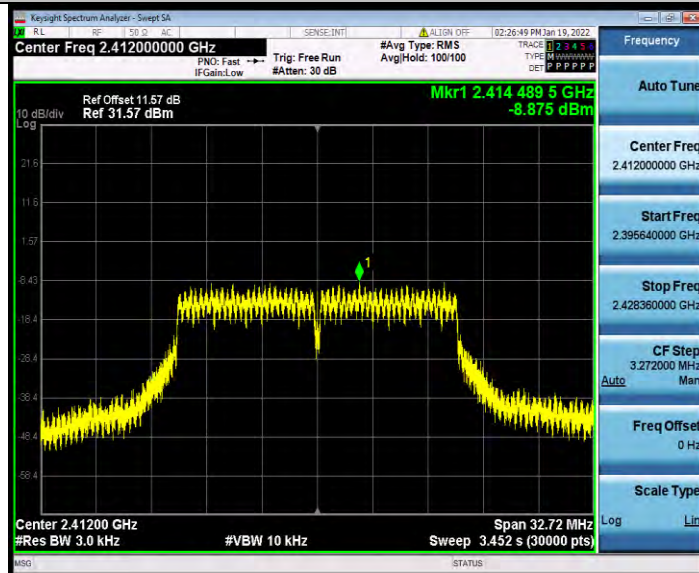

11G_Ant1_2412



BUREAU VERITAS

Test Report No.: W7L-P22030026-2RF02



11G_Ant1_2437



11G_Ant1_2462




BUREAU VERITAS

Test Report No.: W7L-P22030026-2RF02



11N20SISO_Ant1_2412

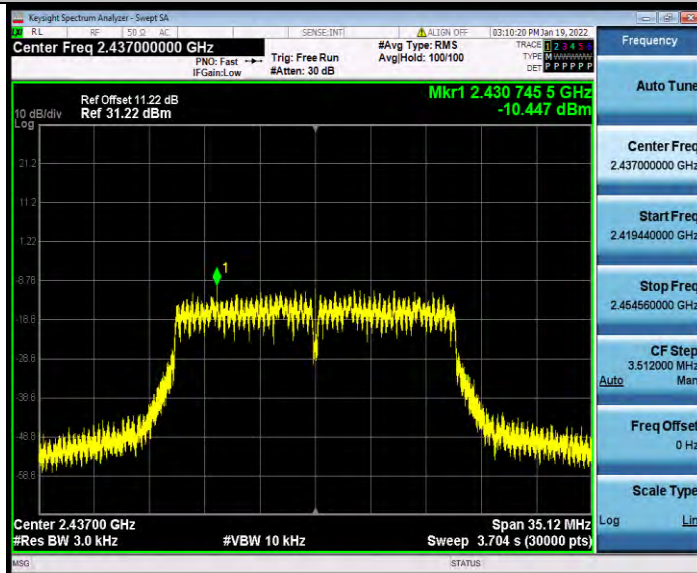

11N20SISO_Ant1_2437



**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02



11N20SISO_Ant1_2462



BAND EDGE MEASUREMENTS

TEST RESULT


TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	9.77	-30.45	≤-10.23	PASS
		High	2462	9.14	-43.58	≤-10.86	PASS
11G	Ant1	Low	2412	6.56	-22.18	≤-13.44	PASS
		High	2462	7.16	-31.21	≤-12.84	PASS
11N20SISO	Ant1	Low	2412	4.08	-30.29	≤-15.92	PASS
		High	2462	3.54	-37.62	≤-16.46	PASS



TEST GRAPHS



11B_Ant1_Low_2412

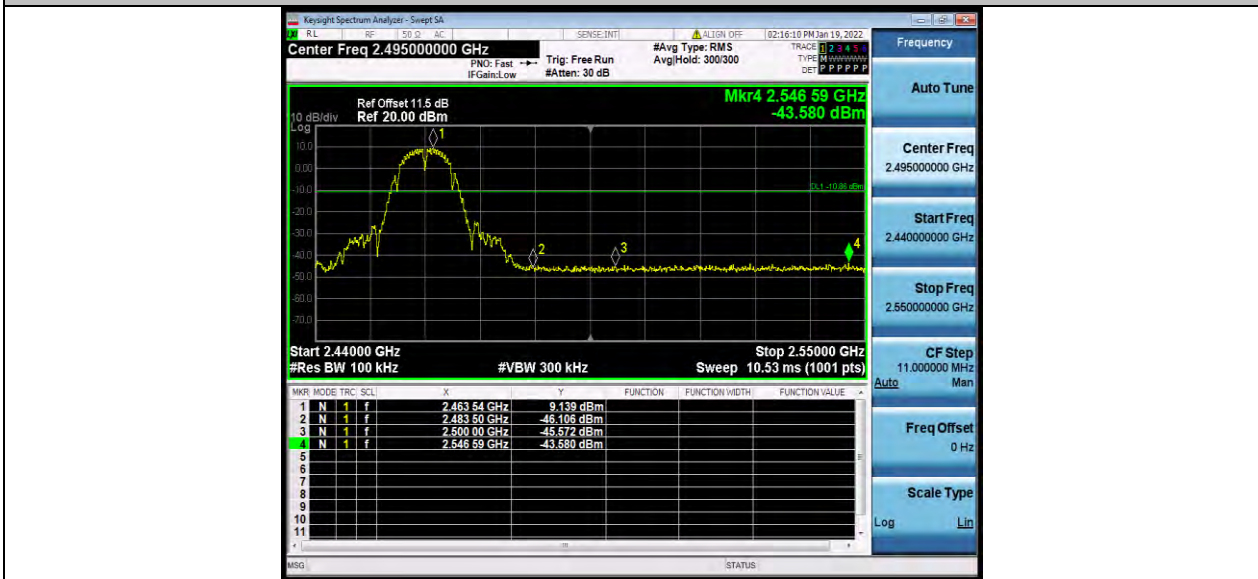

11B_Ant1_High_2462



BUREAU VERITAS

Test Report No.: W7L-P22030026-2RF02



11G_Ant1_Low_2412



11G_Ant1_High_2462



BUREAU VERITAS

Test Report No.: W7L-P22030026-2RF02



11N20SISO_Ant1_Low_2412



11N20SISO_Ant1_High_2462



CONDUCTED SPURIOUS EMISSION TEST RESULT


TestMode	Antenna	Channel	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	8.75	8.75	---	PASS
			30~1000	8.75	-53.35	≤-11.25	PASS
			1000~26500	8.75	-36.83	≤-11.25	PASS
		2437	Reference	7.86	7.86	---	PASS
			30~1000	7.86	-54.02	≤-12.14	PASS
			1000~26500	7.86	-38.16	≤-12.14	PASS
		2462	Reference	8.81	8.81	---	PASS
			30~1000	8.81	-54.03	≤-11.19	PASS
			1000~26500	8.81	-36.96	≤-11.19	PASS
11G	Ant1	2412	Reference	2.74	2.74	---	PASS
			30~1000	2.74	-54.44	≤-17.26	PASS
			1000~26500	2.74	-37.86	≤-17.26	PASS
		2437	Reference	4.65	4.65	---	PASS
			30~1000	4.65	-53.9	≤-15.35	PASS
			1000~26500	4.65	-37.58	≤-15.35	PASS
		2462	Reference	3.05	3.05	---	PASS
			30~1000	3.05	-53.69	≤-16.95	PASS
			1000~26500	3.05	-37.69	≤-16.95	PASS
11N20SISO	Ant1	2412	Reference	0.59	0.59	---	PASS
			30~1000	0.59	-53.82	≤-19.42	PASS
			1000~26500	0.59	-37.56	≤-19.42	PASS
		2437	Reference	4.28	4.28	---	PASS
			30~1000	4.28	-54.24	≤-15.72	PASS
			1000~26500	4.28	-38.06	≤-15.72	PASS
		2462	Reference	2.59	2.59	---	PASS
			30~1000	2.59	-53.43	≤-17.41	PASS
			1000~26500	2.59	-38.21	≤-17.41	PASS



TEST GRAPHS



11B_Ant1_2412_0~Reference

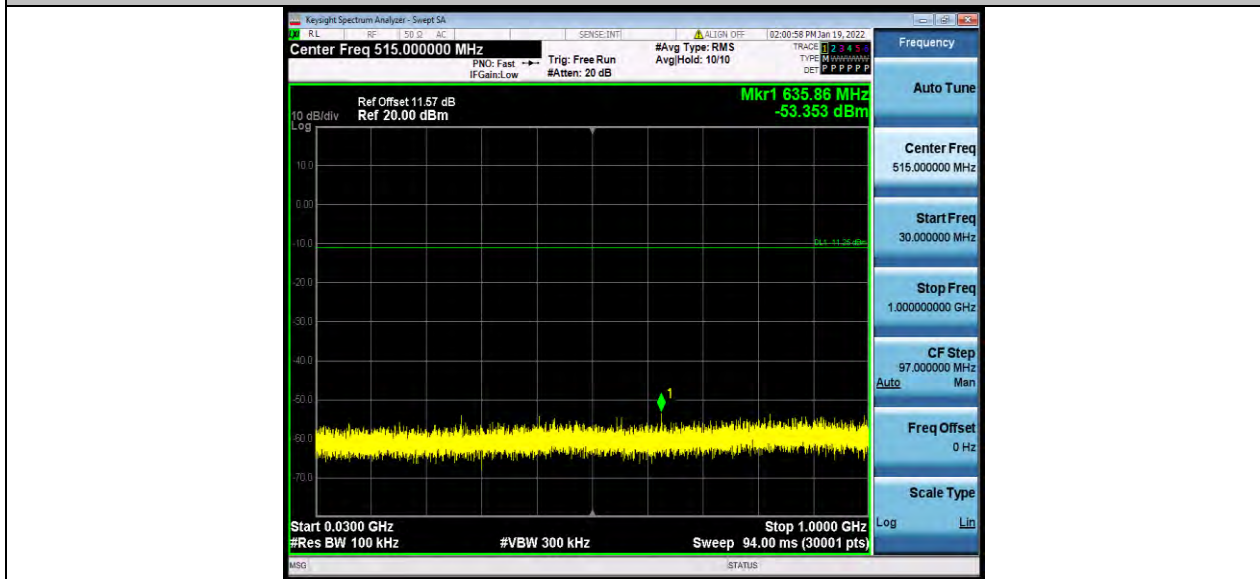


11B_Ant1_2412_30~1000



**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02

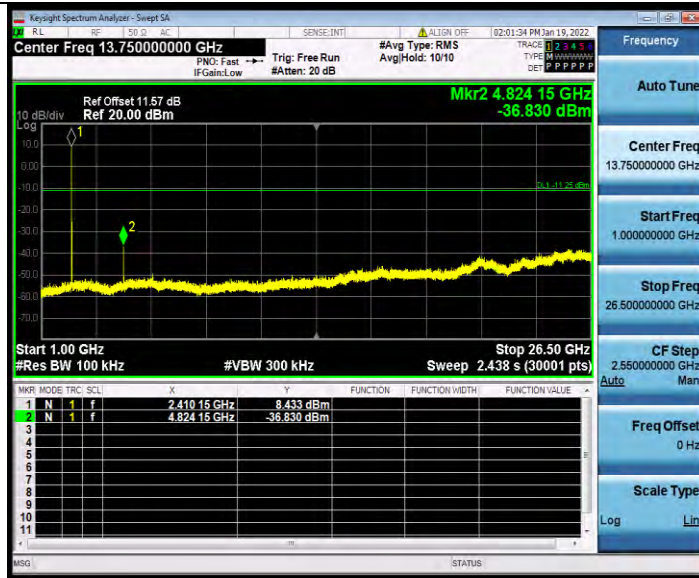

11B_Ant1_2412_1000~26500




11B_Ant1_2437_0~Reference



**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02

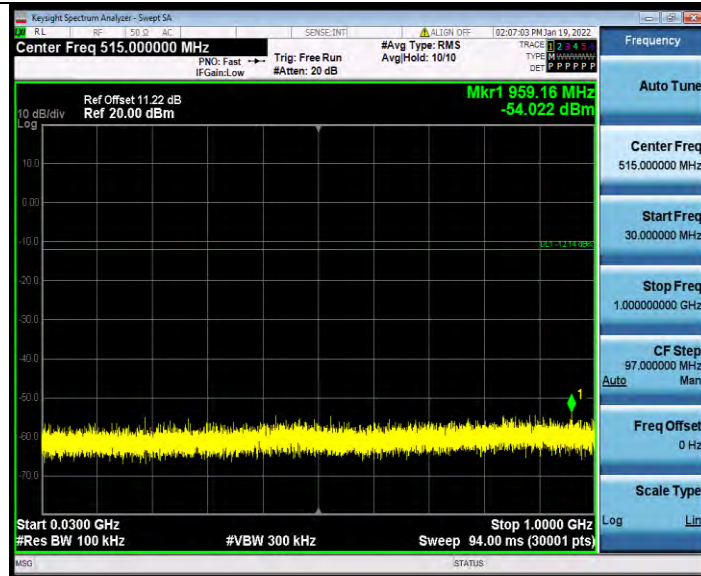

11B_Ant1_2437_30~1000



11B_Ant1_2437_1000~26500




**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02



11B_Ant1_2462_0~Reference

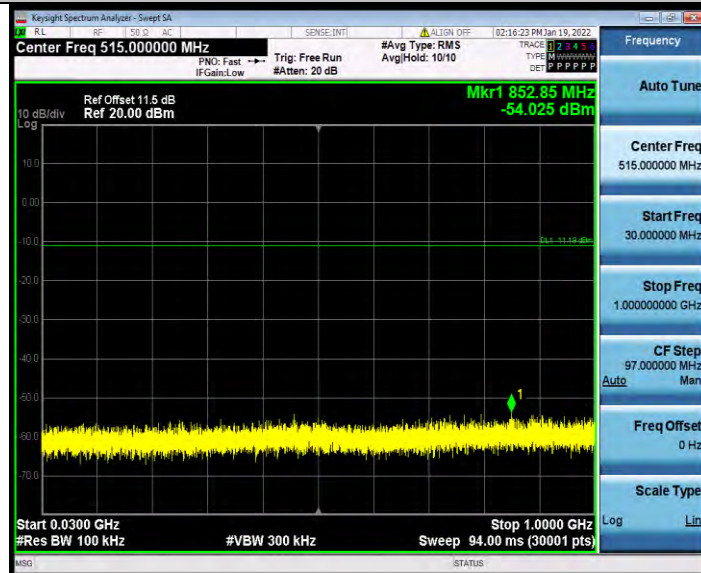


11B_Ant1_2462_30~1000



**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02

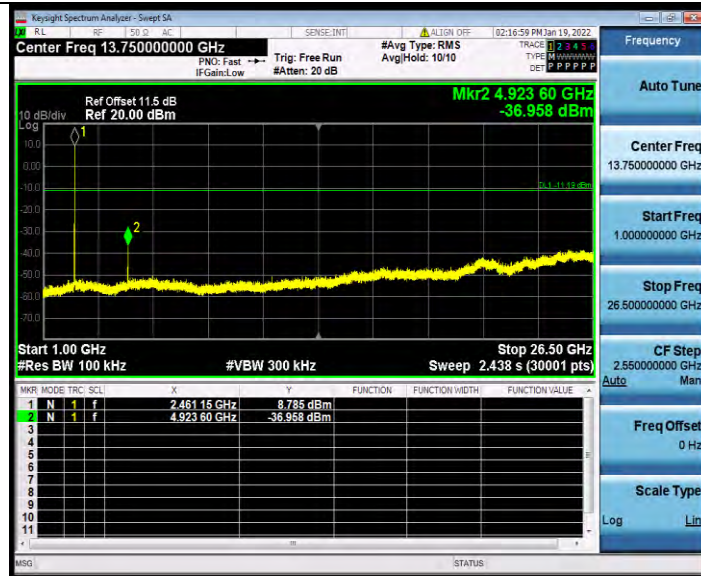

11B_Ant1_2462_1000~26500



11G_Ant1_2412_0~Reference




BUREAU VERITAS

Test Report No.: W7L-P22030026-2RF02



11G_Ant1_2412_30~1000

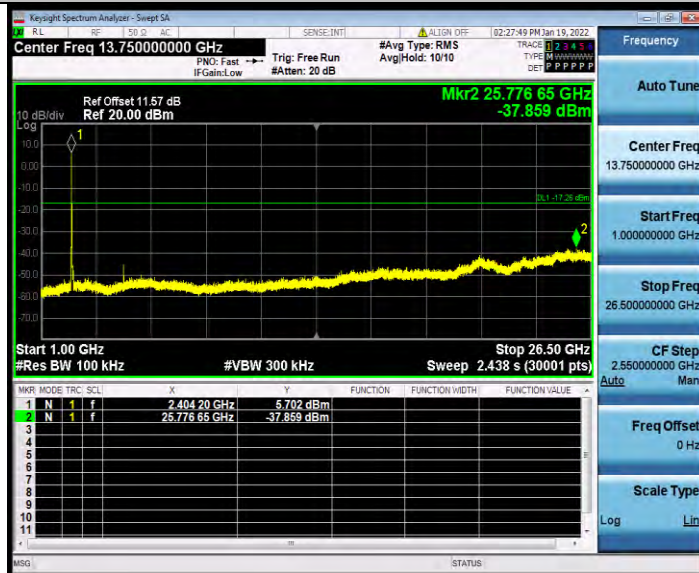

11G_Ant1_2412_1000~26500

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02



11G_Ant1_2437_0~Reference



11G_Ant1_2437_30~1000



**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02



11G_Ant1_2437_1000~26500




11G_Ant1_2462_0~Reference




**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02

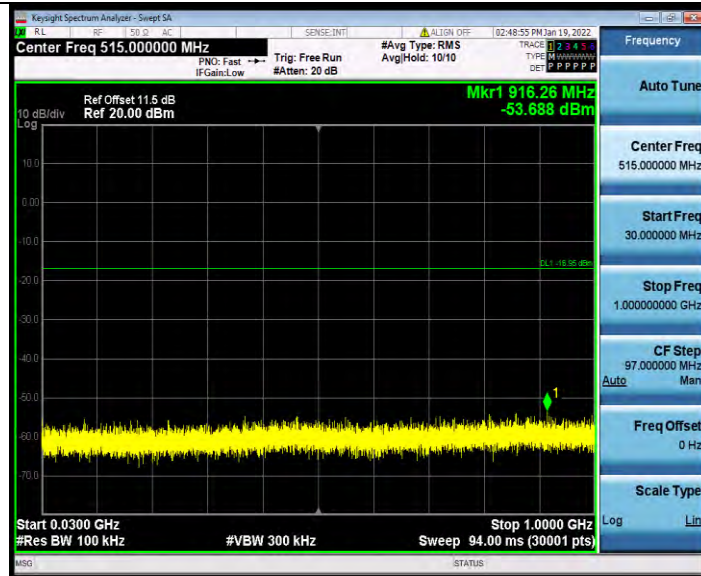

11G_Ant1_2462_30~1000

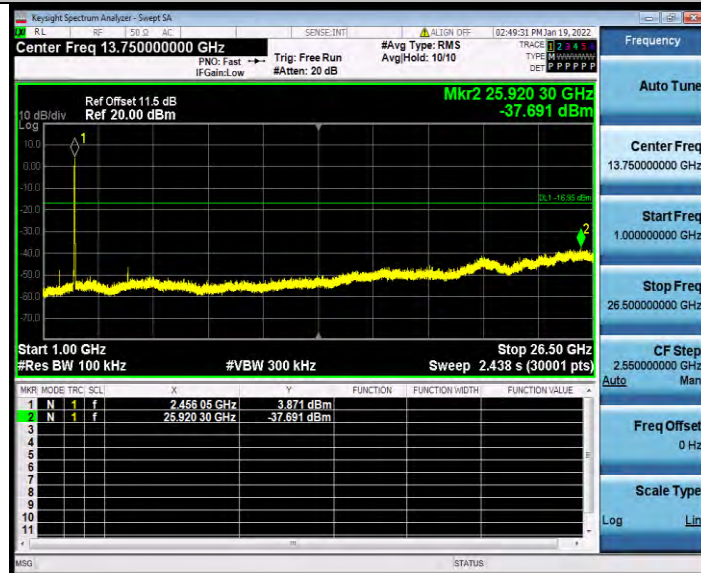

11G_Ant1_2462_1000~26500

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan
Avenue, North Area, Hi-Tech Industrial Park, Nanshan
District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02



11N20SISO_Ant1_2412_0~Reference



11N20SISO_Ant1_2412_30~1000



BUREAU VERITAS

Test Report No.: W7L-P22030026-2RF02



11N20SISO_Ant1_2412_1000~26500




11N20SISO_Ant1_2437_0~Reference



BUREAU VERITAS

Test Report No.: W7L-P22030026-2RF02

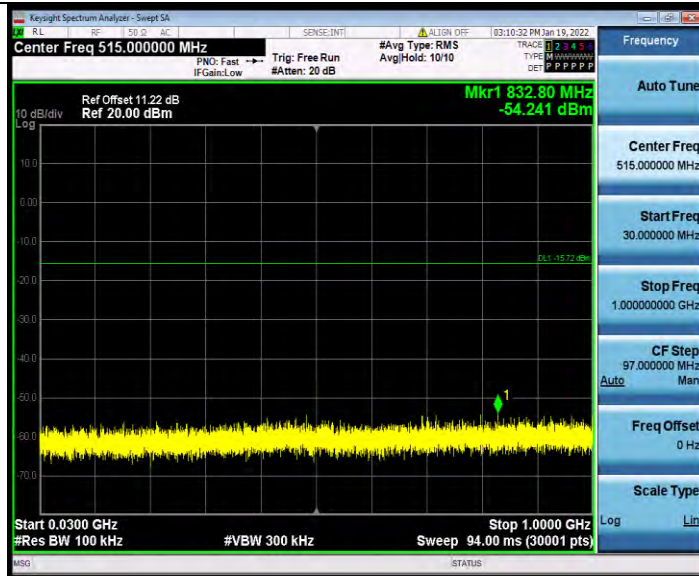

11N20SISO_Ant1_2437_30~1000



11N20SISO_Ant1_2437_1000~26500

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02



11N20SISO_Ant1_2462_0~Reference

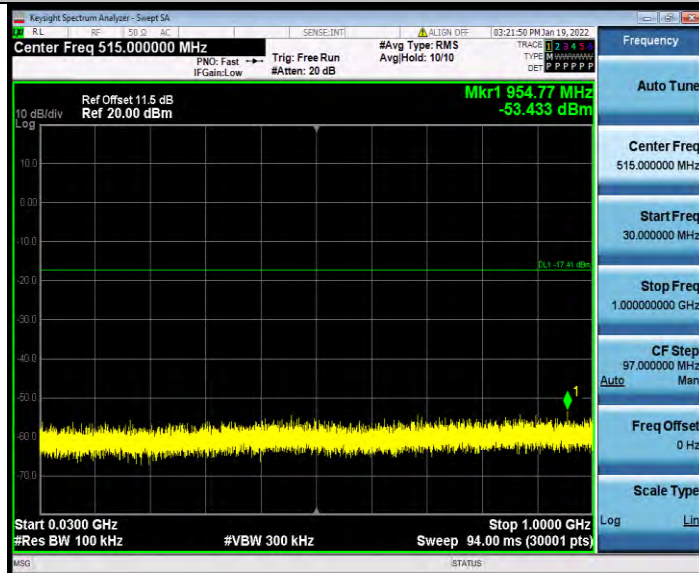

11N20SISO_Ant1_2462_30~1000



**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02



11N20SISO_Ant1_2462_1000~26500




DUTY CYCLE

TEST RESULT


TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
11B	Ant1	2412	30.00	30.00	100.00	---	PASS
		2437	12.48	12.52	99.68	---	PASS
		2462	12.48	12.52	99.68	---	PASS
11G	Ant1	2412	2.08	2.16	96.30	---	PASS
		2437	2.07	2.13	97.18	---	PASS
		2462	2.07	2.12	97.64	---	PASS
11N20SISO	Ant1	2412	1.93	1.99	96.98	---	PASS
		2437	1.93	2.01	96.02	---	PASS
		2462	1.93	1.98	97.47	---	PASS



TEST GRAPHS

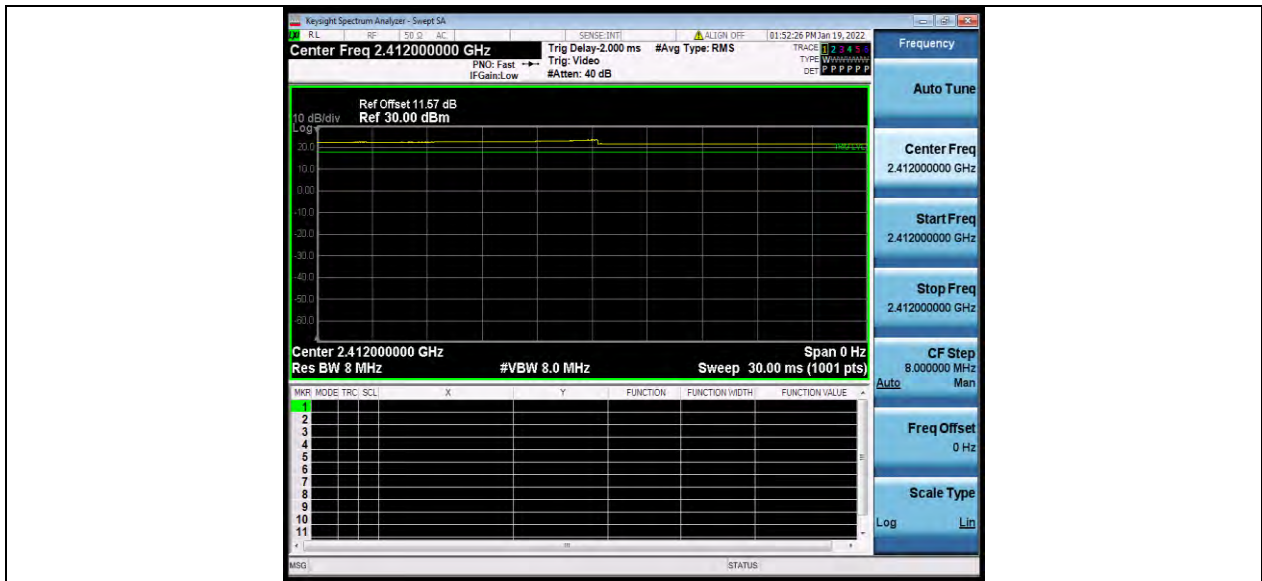

11B_Ant1_2412

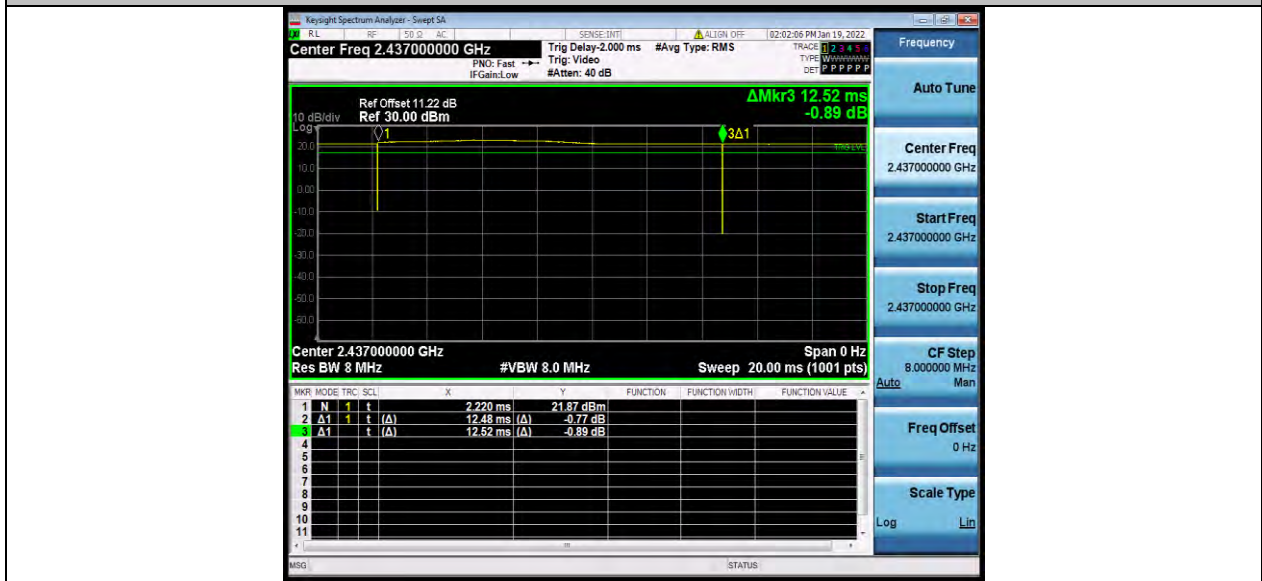


11B_Ant1_2437




BUREAU VERITAS

Test Report No.: W7L-P22030026-2RF02

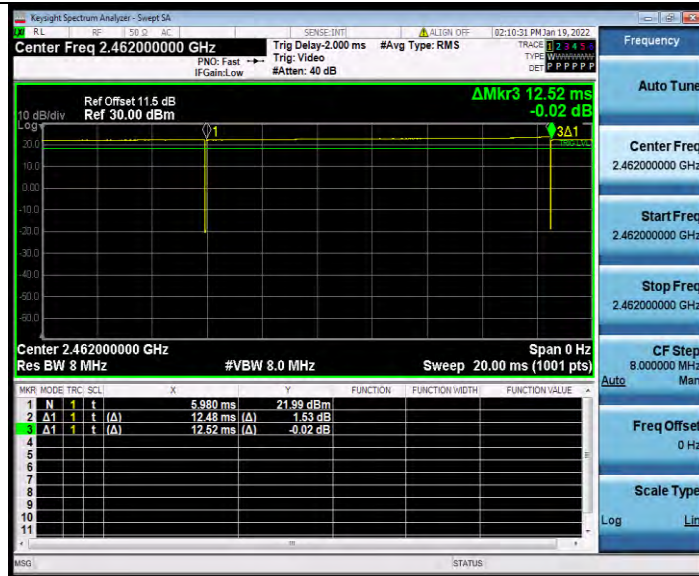

11B_Ant1_2462

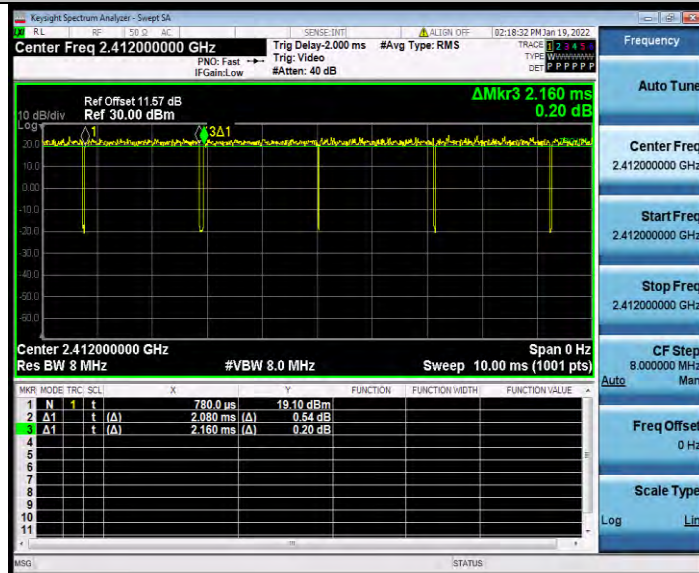

11G_Ant1_2412

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




BUREAU VERITAS

Test Report No.: W7L-P22030026-2RF02

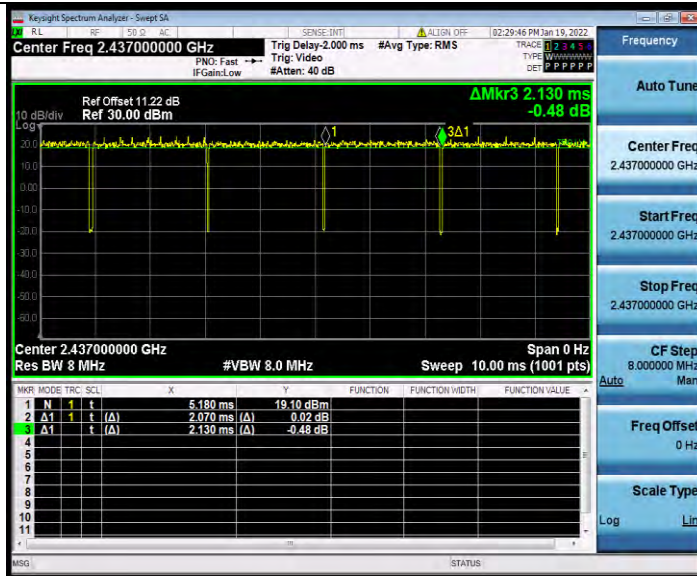

11G_Ant1_2437

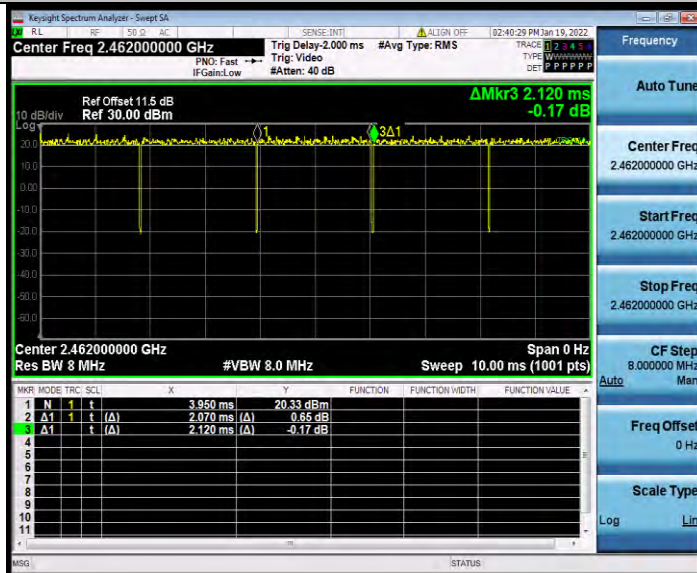


11G_Ant1_2462




BUREAU VERITAS

Test Report No.: W7L-P22030026-2RF02

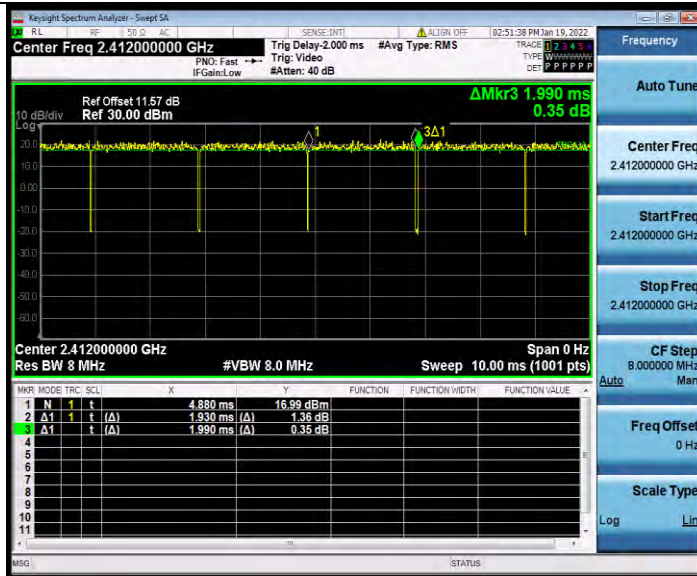

11N20SISO_Ant1_2412

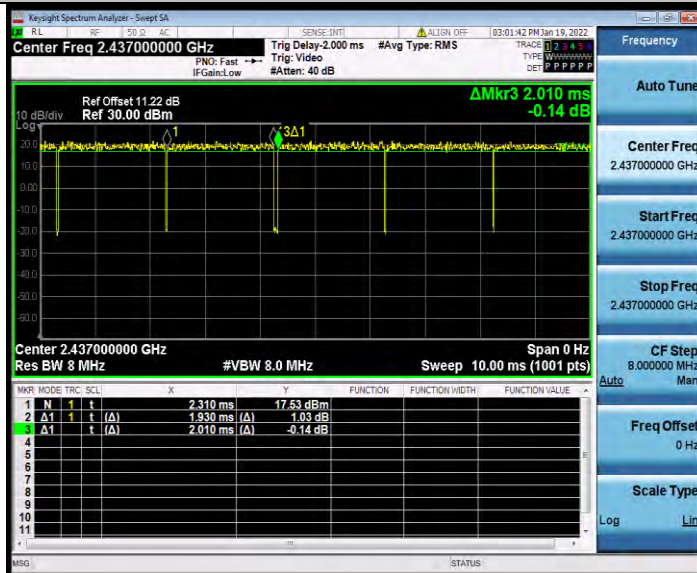


11N20SISO_Ant1_2437



**BUREAU
VERITAS**

Test Report No.: W7L-P22030026-2RF02

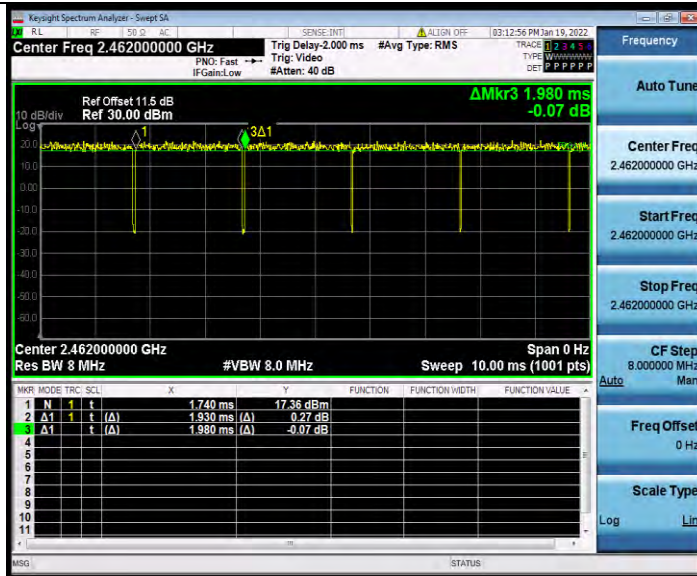

11N20SISO_Ant1_2462

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan
Avenue, North Area, Hi-Tech Industrial Park, Nanshan
District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com