



Test Report No.: W7L-P22030013RF01



FCC TEST REPORT (Part 15, Subpart C)



Applicant:	HMD Global Oy
Address:	Bertel Jungin aukio 9, 02600 Espoo, Finland

Manufacturer or Supplier:	HMD Global Oy
Address:	Bertel Jungin aukio 9, 02600 Espoo, Finland
Product:	GSM/WCDMA/LTE Mobile Phone
Brand Name:	NOKIA
Model Name:	TA-1469
FCC ID:	2AJOTTA-1469
Date of tests:	Mar. 28, 2022 ~ Apr. 11, 2022

The tests have been carried out according to the requirements of the following standard:

- FCC Part 15, Subpart C, Section 15.247**
- ANSI C63.10-2013**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: Apr. 11, 2022	 Date: Apr. 11, 2022

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute you unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD5

1 SUMMARY OF TEST RESULTS.....6

1.1 MEASUREMENT UNCERTAINTY.....7

2 GENERAL INFORMATION8

2.1 GENERAL DESCRIPTION OF EUT8

2.2 DESCRIPTION OF TEST MODES9

 2.2.1 CONFIGURATION OF SYSTEM UNDER TEST 10

 2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... 10

2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS12

2.4 DESCRIPTION OF SUPPORT UNITS.....12

3 TEST TYPES AND RESULTS.....13

3.1 CONDUCTED EMISSION MEASUREMENT.....13

 3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT 13

 3.1.2 TEST INSTRUMENTS..... 13

 3.1.3 TEST PROCEDURES 13

 3.1.4 DEVIATION FROM TEST STANDARD 14

 3.1.5 TEST SETUP 14

 3.1.6 EUT OPERATING CONDITIONS 14

 3.1.7 TEST RESULTS 15

3.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT.....17

 3.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT..... 17

 3.2.2 TEST INSTRUMENTS..... 18

 3.2.3 TEST PROCEDURES 19

 3.2.4 DEVIATION FROM TEST STANDARD 19

 3.2.5 TEST SETUP 20

 3.2.6 EUT OPERATING CONDITIONS 21

 3.2.7 TEST RESULTS 22

3.3 NUMBER OF HOPPING FREQUENCY USED33

 3.3.1 LIMIT OF HOPPING FREQUENCY USED 33

 3.3.2 TEST SETUP 33

 3.3.3 TEST INSTRUMENTS..... 33

 3.3.4 TEST PROCEDURES 34

 3.3.5 DEVIATION FROM TEST STANDARD 34

 3.3.6 TEST RESULTS 34

3.4 DWELL TIME ON EACH CHANNEL.....35



**BUREAU
VERITAS**

Test Report No.: W7L-P22030013RF01

3.4.1	LIMIT OF DWELL TIME USED	35
3.4.2	TEST SETUP	35
3.4.3	TEST INSTRUMENTS	35
3.4.4	TEST PROCEDURES	35
3.4.5	DEVIATION FROM TEST STANDARD	36
3.4.6	TEST RESULTS	36
3.5	CHANNEL BANDWIDTH	37
3.5.1	LIMITS OF CHANNEL BANDWIDTH	37
3.5.2	TEST SETUP	37
3.5.3	TEST INSTRUMENTS	37
3.5.4	TEST PROCEDURE	37
3.5.5	DEVIATION FROM TEST STANDARD	37
3.5.6	EUT OPERATING CONDITION	38
3.5.7	TEST RESULTS	38
3.6	HOPPING CHANNEL SEPARATION	39
3.6.1	LIMIT OF HOPPING CHANNEL SEPARATION	39
3.6.2	TEST SETUP	39
3.6.3	TEST INSTRUMENTS	39
3.6.4	TEST PROCEDURES	39
3.6.5	DEVIATION FROM TEST STANDARD	39
3.6.6	TEST RESULTS	40
3.7	MAXIMUM OUTPUT POWER	40
3.7.1	LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT	40
3.7.2	TEST SETUP	40
3.7.3	TEST INSTRUMENTS	40
3.7.4	TEST PROCEDURES	40
3.7.5	DEVIATION FROM TEST STANDARD	41
3.7.6	EUT OPERATING CONDITION	41
3.7.7	TEST RESULTS	42
3.7.7.1	MAXIMUM PEAK OUTPUT POWER	42
3.7.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE).....	43
3.8	OUT OF BAND MEASUREMENT	44
3.8.1	LIMITS OF OUT OF BAND MEASUREMENT	44
3.8.2	TEST INSTRUMENTS	44
3.8.3	TEST PROCEDURE	44
3.8.4	DEVIATION FROM TEST STANDARD	44



**BUREAU
VERITAS**

Test Report No.: W7L-P22030013RF01

3.8.5	EUT OPERATING CONDITION	44
3.8.6	TEST RESULTS	44
4	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	45
5	MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	46
APPENDIX	47	47
20DB EMISSION BANDWIDTH	47	47
TEST RESULT	47	47
TEST GRAPHS.....	48	48
OCCUPIED CHANNEL BANDWIDTH	53	53
TEST RESULT	53	53
TEST GRAPHS.....	54	54
MAXIMUM CONDUCTED OUTPUT POWER	59	59
TEST RESULT PEAK	59	59
TEST RESULT AVERAGE.....	59	59
CARRIER FREQUENCY SEPARATION	60	60
TEST RESULT	60	60
TEST GRAPHS.....	61	61
TIME OF OCCUPANCY	63	63
TEST RESULT	63	63
TEST GRAPHS.....	64	64
NUMBER OF HOPPING CHANNELS	69	69
TEST RESULT	69	69
TEST GRAPHS.....	70	70
BAND EDGE MEASUREMENTS	72	72
TEST RESULT	72	72
TEST GRAPHS.....	73	73
CONDUCTED SPURIOUS EMISSION	79	79
TEST RESULT	79	79
TEST GRAPHS.....	80	80
DUTY CYCLE	89	89
TEST RESULT	89	89
TEST GRAPHS.....	90	90



Test Report No.: W7L-P22030013RF01

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P22030013RF01	Original release	Apr. 11, 2022



Test Report No.: W7L-P22030013RF01

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C		
STANDARD	TEST TYPE AND LIMIT	RESULT
§15.207	AC Power Conducted Emission	Compliance
§15.247(a)(1)(iii)	Number of Hopping Frequency Used	Compliance
§15.247(a)(1)(iii)	Dwell Time on Each Channel	Compliance
§15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	Compliance
§15.247(b)	Maximum Peak Output Power	Compliance
§15.247(d)& §15.209	Transmitter Radiated Emissions	Compliance
§15.247(d)	Out of band Measurement	Compliance
§15.203	Antenna Requirement	Compliance

NOTE:

1. If the Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.
2. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Lab Information Reference:

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

Lab Address:

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Accredited Test Lab Cert 3939.01



1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	±2.70dB
Radiated emissions (30MHz~1GMHz)	±4.98dB
Radiated emissions (1GMHz ~6GMHz)	±4.70dB
Radiated emissions (6GMHz ~18GMHz)	±4.60dB
Radiated emissions (18GMHz ~40GMHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Power Spectral Density	±0.85 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	GSM/WCDMA/LTE Mobile Phone
BRAND NAME	NOKIA
MODEL NAME	TA-1469
NOMINAL VOLTAGE	5.0Vdc(adapter or host equipment) 3.8Vdc (Li-ion, battery)
MODULATION TECHNOLOGY	FHSS
MODULATION TYPE	GFSK, 8DPSK, $\pi/4$ DQPSK
OPERATING FREQUENCY	2402MHz~2480MHz
NUMBER OF CHANNEL	79
MAX. OUTPUT POWER	7.14mW (Max. Measured)
ANTENNA TYPE	PIFA Antenna with -0.3dBi gain
HW VERSION	FF618-MB-V0.2
SW VERSION	0.2214.11.06
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
Battery	NOKIA	HuNan ADF Alternative Energy Technology Co., Ltd	BL-L4E	Capacity : 3.80 Vdc, 1450mAh
AC Adapter	NOKIA	Shenzhen Bajjunda Electronic Co., Ltd	AC-18U	I/P: 100-240Vac, 0.1A, O/P: 5.0Vdc, 0.55A



Test Report No.: W7L-P22030013RF01

2.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		



2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photograph of the test configuration for reference.

2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on X axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission

RE≥1G: Radiated Emission above 1GHz
APCM: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	78	FHSS	GFSK	DH5

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	0, 39, 78	FHSS	GFSK	DH5
-	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5



BUREAU
VERITAS

Test Report No.: W7L-P22030013RF01

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	39	FHSS	GFSK	DH5

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH1/DH3/DH5
0 to 78	0, 39, 78	FHSS	$\pi/4$ DQPSK	2DH1/2DH3/2DH5
0 to 78	0, 39, 78	FHSS	8DPSK	3DH1/3DH3/3DH5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE (SYSTEM)	TESTED BY
RE<1G	23deg. C, 70%RH	DC 5V By Adapter	Jace Hu
RE≥1G	23deg. C, 70%RH	DC5V By Adapter	Jace Hu
PLC	25deg. C, 52%RH	DC5V By Adapter	James Fu
APCM	25deg. C, 60%RH	DC 3.85V By Battery	James Fu



2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. Section 15.247
ANSI C63.10-2013

- NOTE:**
1. All test items have been performed and recorded as per the above standards.
 2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Desktop	Lenovo	M73 SFF	PC04GRQV	N/A
2	Desktop	Lenovo	M73 SFF	PC06CS27	N/A
3	Laptop	Lenovo	Thnikpad L440	R90FTFKN	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.5m
2	AC Line: Unshielded, Detachable 1.5m
3	AC Line: Unshielded, Detachable 1.5m



3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Feb. 15,22	Feb. 14,23
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Mar. 04,22	Mar. 03,23

- NOTE:**
1. The test was performed in CE shielded room.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

3.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation.

3.1.5 TEST SETUP

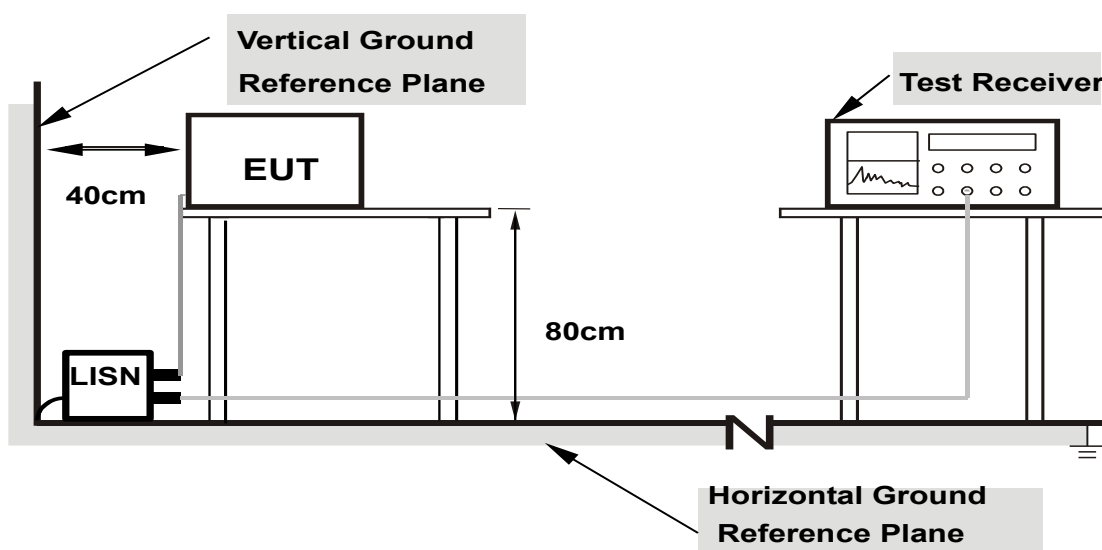

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



Test Report No.: W7L-P22030013RF01

3.1.7 TEST RESULTS


CONDUCTED WORST-CASE DATA:

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Carl xie		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.464000	---	38.02	46.62	8.60	L1	ON	9.7
0.464000	45.57	---	56.62	11.05	L1	ON	9.7
0.692000	---	32.10	46.00	13.90	L1	ON	9.7
0.692000	44.70	---	56.00	11.30	L1	ON	9.7
0.924000	---	31.57	46.00	14.43	L1	ON	9.7
0.924000	43.64	---	56.00	12.36	L1	ON	9.7
1.444000	---	29.59	46.00	16.41	L1	ON	9.7
1.444000	42.72	---	56.00	13.28	L1	ON	9.7
2.312000	---	26.26	46.00	19.74	L1	ON	9.7
2.312000	41.90	---	56.00	14.10	L1	ON	9.7
3.872000	---	27.95	46.00	18.05	L1	ON	9.7
3.872000	41.34	---	56.00	14.66	L1	ON	9.7

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Limit value - Emission level
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

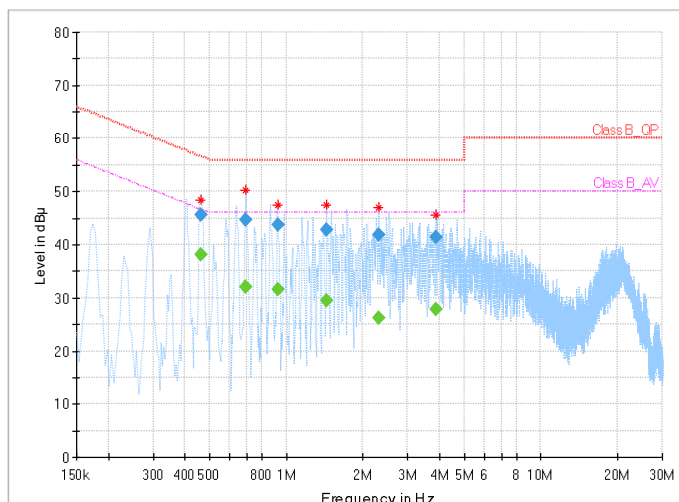




Test Report No.: W7L-P22030013RF01

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Carl xie		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.412000	---	38.24	47.61	9.37	N	ON	9.7
0.412000	46.74	---	57.61	10.87	N	ON	9.7
0.644000	---	39.26	46.00	6.74	N	ON	9.7
0.644000	47.41	---	56.00	8.59	N	ON	9.7
0.880000	---	36.92	46.00	9.08	N	ON	9.7
0.880000	47.81	---	56.00	8.19	N	ON	9.7
1.528000	---	33.39	46.00	12.61	N	ON	9.8
1.528000	45.90	---	56.00	10.10	N	ON	9.8
2.344000	---	27.95	46.00	18.05	N	ON	9.8
2.344000	44.17	---	56.00	11.83	N	ON	9.8
3.812000	---	30.04	46.00	15.96	N	ON	9.8
3.812000	44.15	---	56.00	11.85	N	ON	9.8

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Limit value - Emission level
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

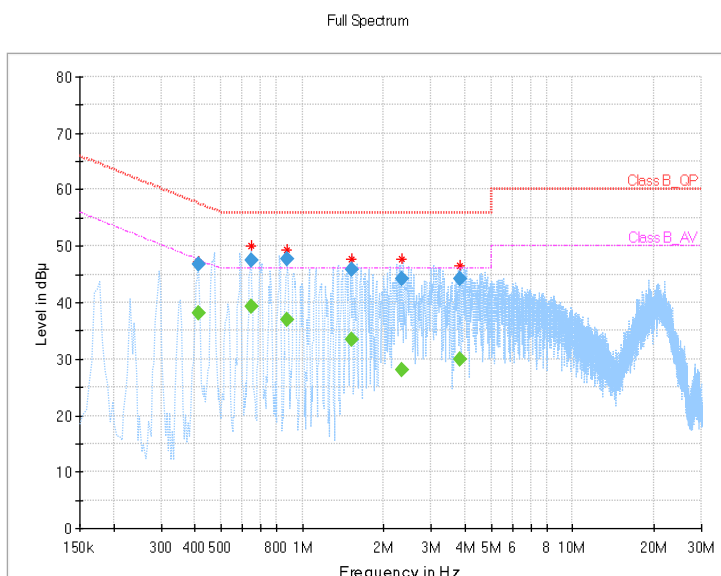



**BUREAU
VERITAS**

Test Report No.: W7L-P22030013RF01

3.2 RADIATED EMISSION AND BANDEGE MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION AND BANDEGE MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



Test Report No.: W7L-P22030013RF01

3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	May. 19,20	May. 18,23
Bilog Antenna	ETS-LINDGREN	3143B	00161964	Feb. 24,22	Feb. 23,23
Horn Antenna	ETS-LINDGREN	3117	00168692	Mar. 06,22	Mar. 05,23
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Aug. 25, 21	Aug. 24, 22
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jun. 03,21	Jun. 02,22
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 27,21	Apr. 26,22
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 02,21	Jun. 01,22
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 02,21	Jun. 01,22
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 30,21	Apr. 29,22
DC Source	Kikusui/JP	PMX18-5A	0000001	Aug. 25,21	Aug. 24,22
Power Meter	Anritsu	ML2495A	1506002	Feb. 22,22	Feb. 21,23
Power Sensor	Anritsu	MA2411B	1339352	May. 07,21	May. 06,22
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.05,21	Sep.04,22

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Chamber.
 3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



Test Report No.: W7L-P22030013RF01

3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit.
5. All modes of operation were investigated and the worst-case emissions are reported.

3.2.4 DEVIATION FROM TEST STANDARD


No deviation.

3.2.5 TEST SETUP


<Frequency Range 9KHz~30MHz >

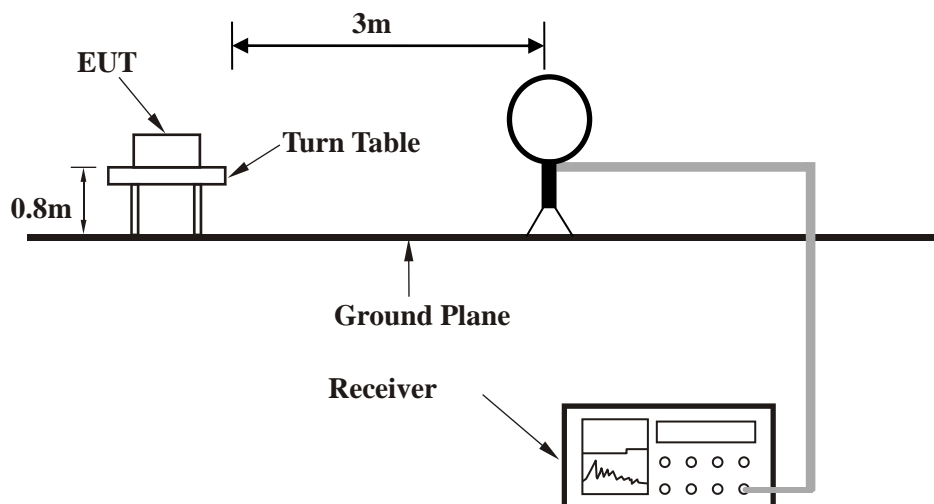

< Frequency Range 30MHz~1GHz >

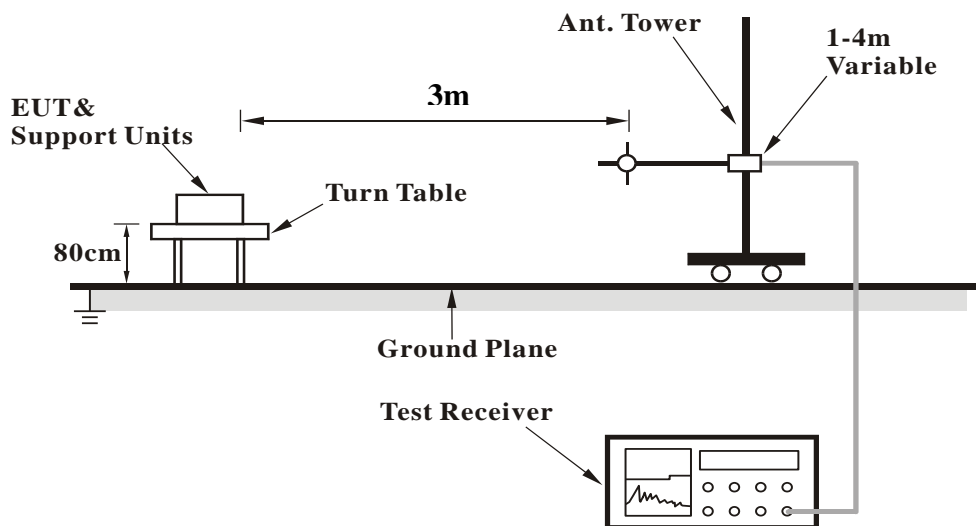

<Frequency Range above 1GHz>

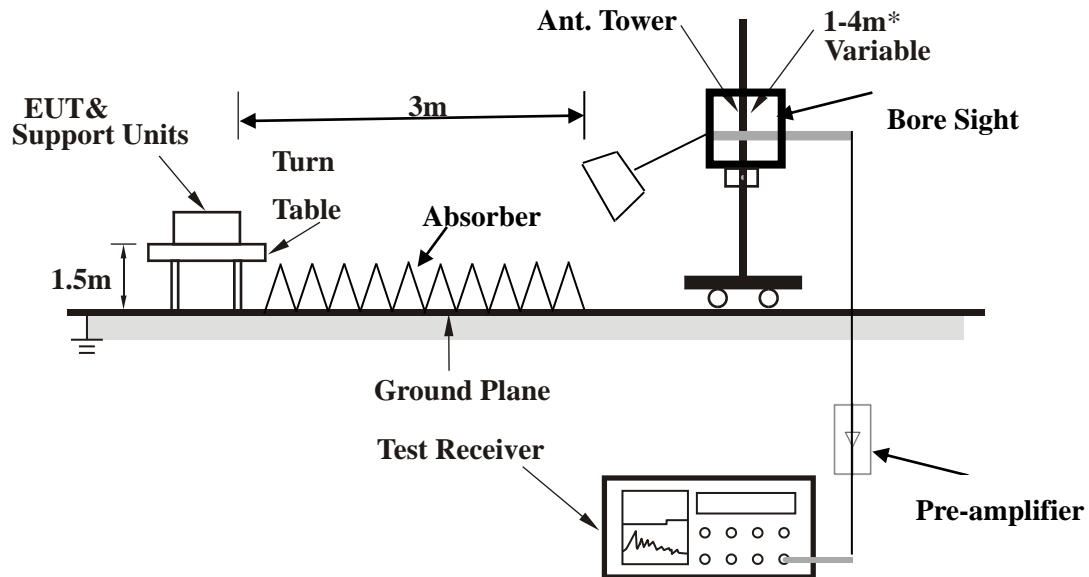

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

- a. Set the EUT under full load condition and placed them on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.



**BUREAU
VERITAS**

Test Report No.: W7L-P22030013RF01

3.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:

Note: For frequency below 30MHz, the emission was tested 20db below the limit so the data not recorded in the sheet.

30 MHz – 1GHz data:


GFSK

CHANNEL	Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
30.97	20.78	37.81	40	-19.22	20.01	0.32	37.36	200	15	QP
48.43	16.81	44.32	40	-23.19	9.45	0.39	37.35	200	180	QP
87.23	15.62	44.55	40	-24.38	7.83	0.51	37.27	200	288	QP
195.87	16.84	41.85	43.5	-26.66	10.83	0.73	36.57	200	344	QP
422.85	25.13	43.58	46	-20.87	17.31	1.11	36.87	200	107	QP
756.53	24.75	37.74	46	-21.25	23.1	1.54	37.63	200	97	QP

REMARKS:

1. Emission Level(dBuV/m) = Read Level(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

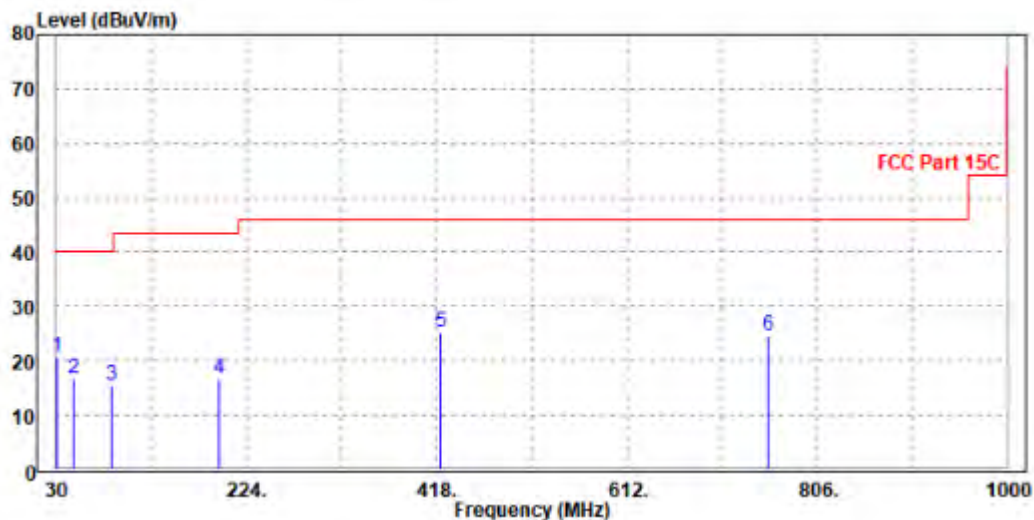




Test Report No.: W7L-P22030013RF01

CHANNEL	Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
41.64	23.73	49.16	40	-16.27	11.68	0.37	37.48	100	311	QP
81.41	18.3	46.81	40	-21.7	8.33	0.49	37.33	100	327	QP
118.27	22.88	51.26	43.5	-20.62	8.13	0.58	37.09	100	206	QP
143.49	21.48	48.83	43.5	-22.02	8.89	0.64	36.88	100	320	QP
189.08	16.5	41.54	43.5	-27	10.84	0.72	36.6	100	115	QP
486.87	21.77	38.7	46	-24.23	18.85	1.2	36.98	100	192	QP

REMARKS:

1. Emission Level(dBuV/m) = Read Level(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

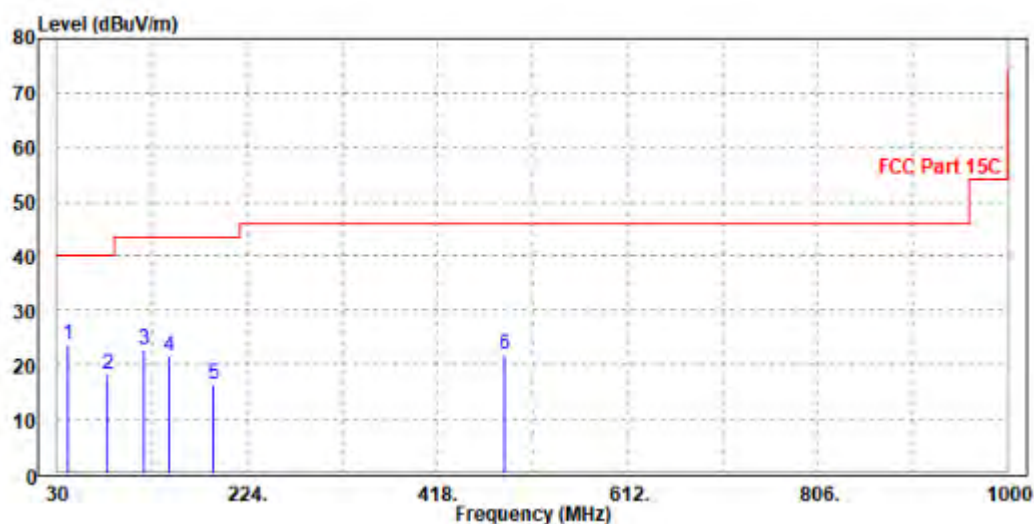



Test Report No.: W7L-P22030013RF01

ABOVE 1GHz WORST-CASE DATA:

Note: For higher frequency, the emission is too low to be detected.

1GHz – 25GHz: (Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK mode, the worst case is 8DPSK Mode)

GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.72	61.48	74	-21.28	31.75	5.86	46.37	100	80	Peak
2390	43.49	52.25	54	-10.51	31.75	5.86	46.37	100	80	Average
2402	100.92	109.62	/	/	31.79	5.88	46.37	100	80	Peak
2402	100.57	109.27	/	/	31.79	5.88	46.37	100	80	Average
2483.5	50.75	59.08	74	-23.25	32.05	5.99	46.37	100	80	Peak
2483.5	43.83	52.16	54	-10.17	32.05	5.99	46.37	100	80	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	51.88	60.25	74	-22.12	32.14	5.86	46.37	100	0	Peak
2390	44.3	52.67	54	-9.7	32.14	5.86	46.37	100	0	Average
2402	98.02	106.35	/	/	32.16	5.88	46.37	100	0	Peak
2402	97.52	105.85	/	/	32.16	5.88	46.37	100	0	Average
2483.5	51.82	59.84	74	-22.18	32.36	5.99	46.37	100	0	Peak
2483.5	44.62	52.64	54	-9.38	32.36	5.99	46.37	100	0	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2402MHz: Fundamental frequency.



Test Report No.: W7L-P22030013RF01

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.50	59.26	74	-23.50	31.75	5.86	46.37	100	80	Peak
2390	44.18	52.94	54	-9.82	31.75	5.86	46.37	100	80	Average
2441	98.90	107.43	/	/	31.91	5.93	46.37	100	80	Peak
2441	97.72	106.25	/	/	31.91	5.93	46.37	100	80	Average
2483.5	51.85	60.18	74	-22.15	32.05	5.99	46.37	100	80	Peak
2483.5	44.10	52.43	54	-9.90	32.05	5.99	46.37	100	80	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.20	60.57	74	-21.8	32.14	5.86	46.37	100	0	Peak
2390	44.44	52.81	54	-9.56	32.14	5.86	46.37	100	0	Average
2441	97.92	106.10	/	/	32.26	5.93	46.37	100	0	Peak
2441	97.36	105.54	/	/	32.26	5.93	46.37	100	0	Average
2483.5	51.89	59.91	74	-22.11	32.36	5.99	46.37	100	0	Peak
2483.5	44.44	52.46	54	-9.56	32.36	5.99	46.37	100	0	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2441MHz: Fundamental frequency.



Test Report No.: W7L-P22030013RF01

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.00	58.76	74	-24.00	31.75	5.86	46.37	100	80	Peak
2390	43.88	52.64	54	-10.12	31.75	5.86	46.37	100	80	Average
2480	100.30	108.65	/	/	32.04	5.98	46.37	100	80	Peak
2480	99.83	108.18	/	/	32.04	5.98	46.37	100	80	Average
2483.5	51.96	60.29	74	-22.04	32.05	5.99	46.37	100	80	Peak
2483.5	43.81	52.14	54	-10.19	32.05	5.99	46.37	100	80	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.12	58.49	74	-23.88	32.14	5.86	46.37	100	0	Peak
2390	44.11	52.48	54	-9.89	32.14	5.86	46.37	100	0	Average
2480	98.52	106.56	/	/	32.35	5.98	46.37	100	0	Peak
2480	98.15	106.19	/	/	32.35	5.98	46.37	100	0	Average
2483.5	53.48	61.50	74	-20.52	32.36	5.99	46.37	100	0	Peak
2483.5	45.04	53.06	54	-8.96	32.36	5.99	46.37	100	0	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2480MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-P22030013RF01

BT_8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	56.61	65.37	74	-17.39	31.75	5.86	46.37	100	85	Peak
2390	45.37	54.13	54	-8.63	31.75	5.86	46.37	100	85	Average
2402	100.37	109.07	/	/	31.79	5.88	46.37	100	85	Peak
2402	100.19	108.89	/	/	31.79	5.88	46.37	100	85	Average
2483.5	51.86	60.19	74	-22.14	32.05	5.99	46.37	100	85	Peak
2483.5	44.16	52.49	54	-9.84	32.05	5.99	46.37	100	85	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	53.45	61.82	74	-20.55	32.14	5.86	46.37	105	0	Peak
2390	45.35	53.72	54	-8.65	32.14	5.86	46.37	105	0	Average
2402	97.05	105.38	/	/	32.16	5.88	46.37	105	0	Peak
2402	94.80	103.13	/	/	32.16	5.88	46.37	105	0	Average
2483.5	52.19	60.21	74	-21.81	32.36	5.99	46.37	105	0	Peak
2483.5	45.12	53.14	54	-8.88	32.36	5.99	46.37	105	0	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2402MHz: Fundamental frequency.



Test Report No.: W7L-P22030013RF01

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	51.62	60.38	74	-22.38	31.75	5.86	46.37	100	85	Peak
2390	44.27	53.03	54	-9.73	31.75	5.86	46.37	100	85	Average
2441	98.55	107.08	/	/	31.91	5.93	46.37	100	85	Peak
2441	98.28	106.81	/	/	31.91	5.93	46.37	100	85	Average
2483.5	52.83	61.16	74	-21.17	32.05	5.99	46.37	100	85	Peak
2483.5	44.36	52.69	54	-9.64	32.05	5.99	46.37	100	85	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.12	60.49	74	-21.88	32.14	5.86	46.37	100	0	Peak
2390	44.76	53.13	54	-9.24	32.14	5.86	46.37	100	0	Average
2441	97.63	105.81	/	/	32.26	5.93	46.37	100	0	Peak
2441	96.41	104.59	/	/	32.26	5.93	46.37	100	0	Average
2483.5	52.12	60.14	74	-21.88	32.36	5.99	46.37	100	0	Peak
2483.5	44.64	52.66	54	-9.36	32.36	5.99	46.37	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2441MHz: Fundamental frequency.



Test Report No.: W7L-P22030013RF01

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	51.03	59.79	74	-22.97	31.75	5.86	46.37	100	85	Peak
2390	43.99	52.75	54	-10.01	31.75	5.86	46.37	100	85	Average
2480	101.62	109.97	/	/	32.04	5.98	46.37	100	85	Peak
2480	101.21	109.56	/	/	32.04	5.98	46.37	100	85	Average
2483.5	52.92	61.25	74	-21.08	32.05	5.99	46.37	100	85	Peak
2483.5	45.35	53.68	54	-8.65	32.05	5.99	46.37	100	85	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.22	60.59	74	-21.78	32.14	5.86	46.37	100	0	Peak
2390	44.87	53.24	54	-9.13	32.14	5.86	46.37	100	0	Average
2480	99.70	107.74	/	/	32.35	5.98	46.37	100	0	Peak
2480	99.36	107.40	/	/	32.35	5.98	46.37	100	0	Average
2483.5	52.05	60.07	74	-21.95	32.36	5.99	46.37	100	0	Peak
2483.5	45.04	53.06	54	-8.96	32.36	5.99	46.37	100	0	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2480MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: W7L-P22030013RF01

BT_DQPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.78	61.54	74	-21.22	31.75	5.86	46.37	100	80	Peak
2390	44.67	53.43	54	-9.33	31.75	5.86	46.37	100	80	Average
2402	101.18	109.88	/	/	31.79	5.88	46.37	100	80	Peak
2402	100.58	109.28	/	/	31.79	5.88	46.37	100	80	Average
2483.5	51.34	59.67	74	-22.66	32.05	5.99	46.37	100	80	Peak
2483.5	44.25	52.58	54	-9.75	32.05	5.99	46.37	100	80	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.4	58.77	74	-23.6	32.14	5.86	46.37	100	0	Peak
2390	44.14	52.51	54	-9.86	32.14	5.86	46.37	100	0	Average
2402	97.49	105.82	/	/	32.16	5.88	46.37	100	0	Peak
2402	96.38	104.71	/	/	32.16	5.88	46.37	100	0	Average
2483.5	52.57	60.59	74	-21.43	32.36	5.99	46.37	100	0	Peak
2483.5	44.17	52.19	54	-9.83	32.36	5.99	46.37	100	0	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2402MHz: Fundamental frequency.



Test Report No.: W7L-P22030013RF01

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	51.56	60.32	74	-22.44	31.75	5.86	46.37	100	80	Peak
2390	44.19	52.95	54	-9.81	31.75	5.86	46.37	100	80	Average
2441	98.42	106.95	/	/	31.91	5.93	46.37	100	80	Peak
2441	98.01	106.54	/	/	31.91	5.93	46.37	100	80	Average
2483.5	52.26	60.59	74	-21.74	32.05	5.99	46.37	100	80	Peak
2483.5	44.16	52.49	54	-9.84	32.05	5.99	46.37	100	80	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.19	60.56	74	-21.81	32.14	5.86	46.37	100	0	Peak
2390	45.28	53.65	54	-8.72	32.14	5.86	46.37	100	0	Average
2441	99.64	107.82	/	/	32.26	5.93	46.37	100	0	Peak
2441	98.17	106.35	/	/	32.26	5.93	46.37	100	0	Average
2483.5	52.85	60.87	74	-21.15	32.36	5.99	46.37	100	0	Peak
2483.5	44.16	52.18	54	-9.84	32.36	5.99	46.37	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2441MHz: Fundamental frequency.



Test Report No.: W7L-P22030013RF01

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.92	59.68	74	-23.08	31.75	5.86	46.37	100	80	Peak
2390	43.81	52.57	54	-10.19	31.75	5.86	46.37	100	80	Average
2480	101.49	109.84	/	/	32.04	5.98	46.37	100	80	Peak
2480	100.9	109.25	/	/	32.04	5.98	46.37	100	80	Average
2483.5	52.93	61.26	74	-21.07	32.05	5.99	46.37	100	80	Peak
2483.5	46.32	54.65	54	-7.68	32.05	5.99	46.37	100	80	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.20	60.57	74	-21.80	32.14	5.86	46.37	100	0	Peak
2390	44.32	52.69	54	-9.68	32.14	5.86	46.37	100	0	Average
2480	100.32	108.36	/	/	32.35	5.98	46.37	100	0	Peak
2480	99.54	107.58	/	/	32.35	5.98	46.37	100	0	Average
2483.5	53.23	61.25	74	-20.77	32.36	5.99	46.37	100	0	Peak
2483.5	45.87	53.89	54	-8.13	32.36	5.99	46.37	100	0	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2480MHz: Fundamental frequency.




3.3 NUMBER OF HOPPING FREQUENCY USED

3.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

3.3.2 TEST SETUP



3.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Feb. 22,22	Feb. 21,23
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Apr. 26,21	Apr. 25,22
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	Feb. 24,22	Feb. 23,23
Power Sensor	ANRITSU	MA2411B	1339352	May. 07,21	May. 06,22

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.



Test Report No.: W7L-P22030013RF01

3.3.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were completed.

3.3.5 DEVIATION FROM TEST STANDARD

No deviation.

3.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

Please Refer to Appendix Of this test report.




3.4 DWELL TIME ON EACH CHANNEL

3.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.4.2 TEST SETUP



3.4.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.4.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.



Test Report No.: W7L-P22030013RF01

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 TEST RESULTS


Please Refer to Appendix Of this test report

3.5 CHANNEL BANDWIDTH

3.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

3.5.2 TEST SETUP



3.5.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.5.4 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.



Test Report No.: W7L-P22030013RF01

3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.5.7 TEST RESULTS


Please Refer to Appendix Of this test report.

3.6 HOPPING CHANNEL SEPARATION

3.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

3.6.2 TEST SETUP



3.6.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.6.4 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

3.6.6 TEST RESULTS


Please Refer to Appendix Of this test report.

3.7 MAXIMUM OUTPUT POWER

3.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT

The Maximum Output Power Measurement is 125mW.

3.7.2 TEST SETUP

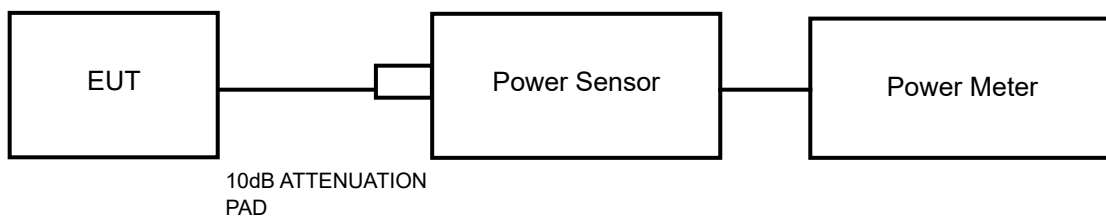

3.7.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.7.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.



Test Report No.: W7L-P22030013RF01

3.7.5 DEVIATION FROM TEST STANDARD

No deviation.

3.7.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



Test Report No.: W7L-P22030013RF01

3.7.7 TEST RESULTS

3.7.7.1 MAXIMUM PEAK OUTPUT POWER

Please Refer to Appendix Of this test report.



Test Report No.: W7L-P22030013RF01

3.7.7.2 Average Output Power (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

Please Refer to Appendix Of this test report.



Test Report No.: W7L-P22030013RF01

3.8 OUT OF BAND MEASUREMENT

3.8.1 LIMITS OF OUT OF BAND MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

3.8.2 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Spectrum Analyzer was set RBW to 100 kHz and VBW to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. Detector = PEAK and Trace mode = Max Hold. The band edges was measured and recorded.

3.8.4 DEVIATION FROM TEST STANDARD

No deviation.

3.8.5 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.8.6 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.

Please Refer to Appendix Of this test report.



Test Report No.: W7L-P22030013RF01



4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: W7L-P22030013RF01

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

APPENDIX

20DB EMISSION BANDWIDTH

TEST RESULT

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.951	2401.532	2402.483	---	---
		2441	0.936	2440.535	2441.471	---	---
		2480	1.029	2479.463	2480.492	---	---
2DH5	Ant1	2402	1.341	2401.328	2402.669	---	---
		2441	1.296	2440.355	2441.651	---	---
		2480	1.320	2479.331	2480.651	---	---
3DH5	Ant1	2402	1.308	2401.346	2402.654	---	---
		2441	1.302	2440.343	2441.645	---	---
		2480	1.305	2479.340	2480.645	---	---

TEST GRAPHS

DH5_Ant1_2402



DH5_Ant1_2441



DH5_Ant1_2480



BUREAU VERITAS

Test Report No.: W7L-P22030013RF01



2DH5_Ant1_2402



2DH5_Ant1_2441



BUREAU VERITAS

Test Report No.: W7L-P22030013RF01



2DH5_Ant1_2480



3DH5_Ant1_2402



BUREAU VERITAS

Test Report No.: W7L-P22030013RF01



3DH5_Ant1_2441




3DH5_Ant1_2480



**BUREAU
VERITAS**

Test Report No.: W7L-P22030013RF01

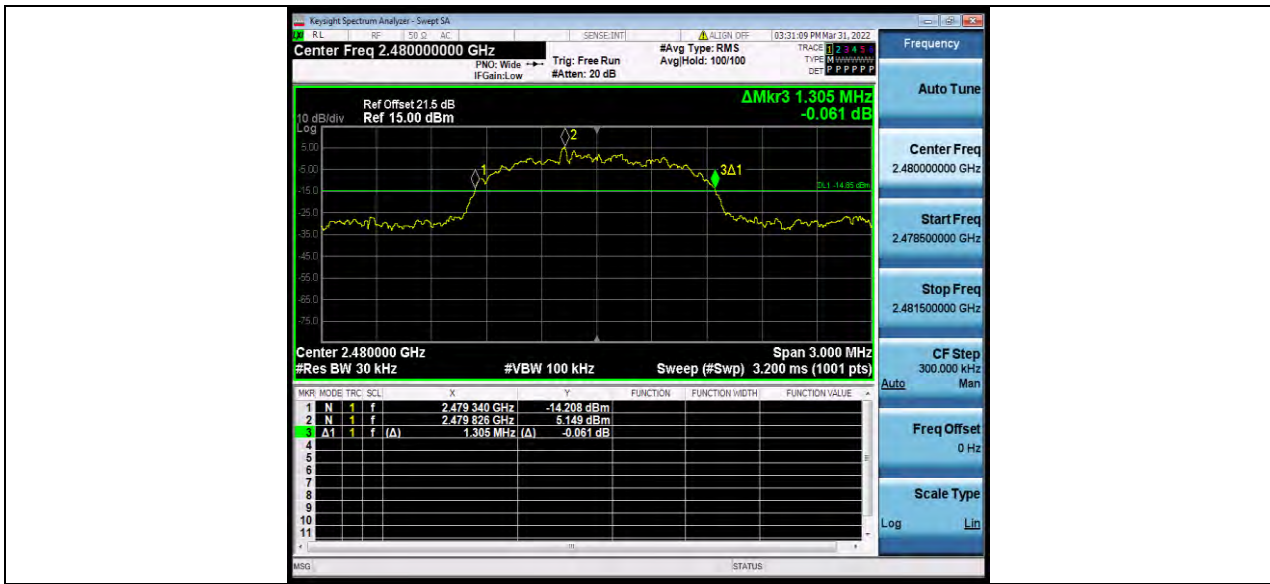

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU
VERITAS


Test Report No.: W7L-P22030013RF01

OCCUPIED CHANNEL BANDWIDTH TEST RESULT

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.86547	2401.559	2402.424	---	---
		2441	0.87052	2440.554	2441.425	---	---
		2480	0.87896	2479.551	2480.430	---	---
2DH5	Ant1	2402	1.2745	2401.366	2402.641	---	---
		2441	1.2438	2440.379	2441.623	---	---
		2480	1.2122	2479.389	2480.601	---	---
3DH5	Ant1	2402	1.2725	2401.360	2402.632	---	---
		2441	1.2395	2440.368	2441.608	---	---
		2480	1.2153	2479.380	2480.595	---	---

TEST GRAPHS

DH5_Ant1_2402

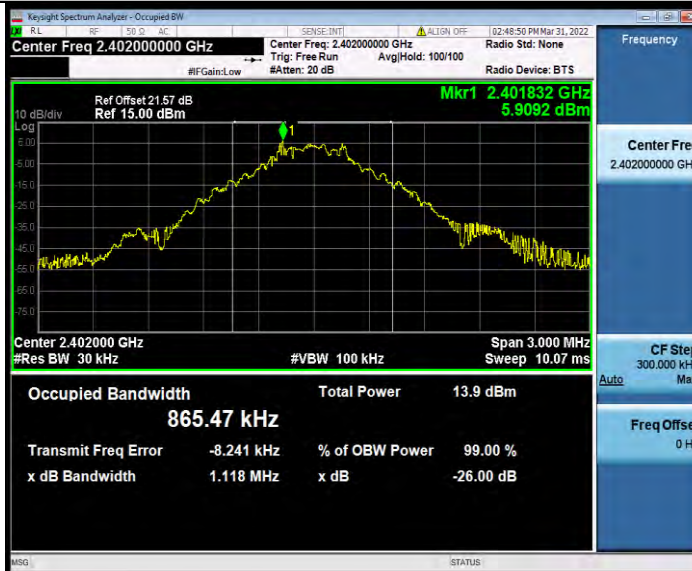

DH5_Ant1_2441



DH5_Ant1_2480



BUREAU VERITAS

Test Report No.: W7L-P22030013RF01



2DH5_Ant1_2402




2DH5_Ant1_2441



BUREAU VERITAS

Test Report No.: W7L-P22030013RF01

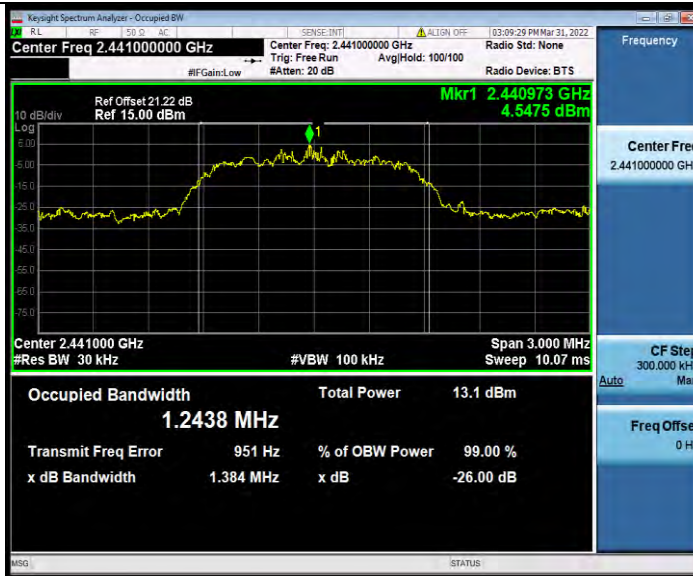

2DH5_Ant1_2480




3DH5_Ant1_2402




BUREAU VERITAS

Test Report No.: W7L-P22030013RF01

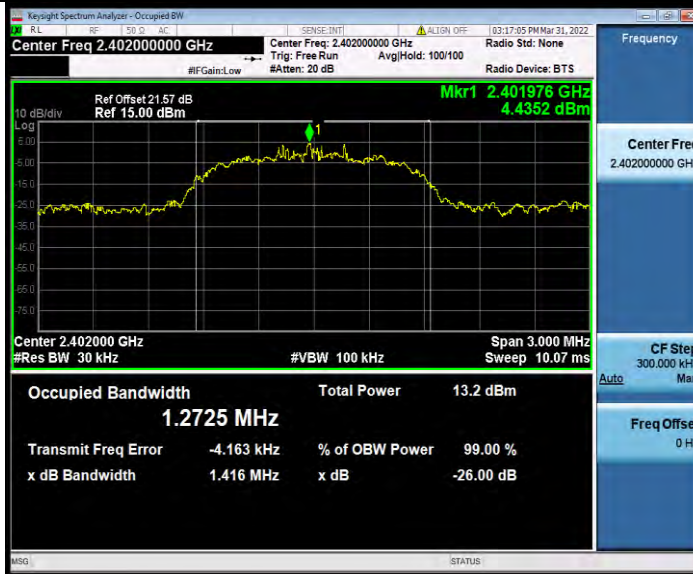

3DH5_Ant1_2441

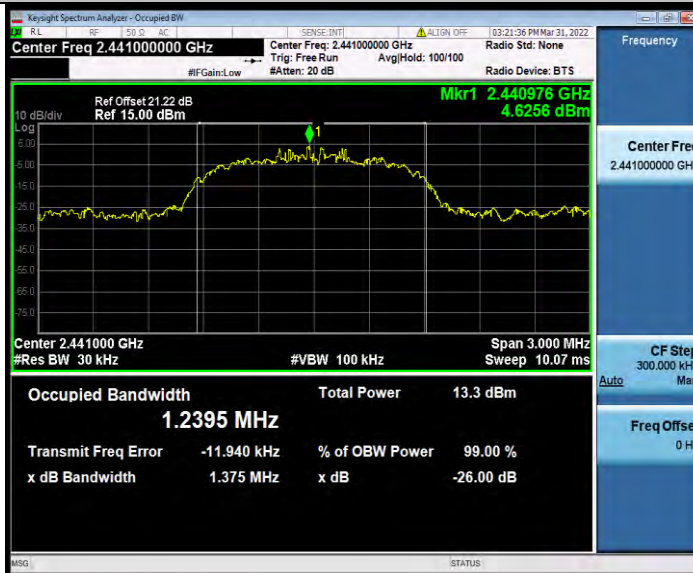

3DH5_Ant1_2480



BUREAU
VERITAS

Test Report No.: W7L-P22030013RF01



MAXIMUM CONDUCTED OUTPUT POWER

TEST RESULT PEAK

Test Mode	Antenna	Frequency[MHz]	Peak Power[dBm]	Peak Power[mw]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	6.35	4.32	≤20.97	PASS
		2441	7.01	5.02	≤20.97	PASS
		2480	7.66	5.83	≤20.97	PASS
2DH5	Ant1	2402	7.02	5.04	≤20.97	PASS
		2441	7.74	5.94	≤20.97	PASS
		2480	8.47	7.03	≤20.97	PASS
3DH5	Ant1	2402	7.12	5.15	≤20.97	PASS
		2441	7.85	6.10	≤20.97	PASS
		2480	8.54	7.14	≤20.97	PASS

TEST RESULT AVERAGE

Test Mode	Antenna	Frequency[MHz]	Average Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	5.23	/	PASS
		2441	5.79	/	PASS
		2480	6.29	/	PASS
2DH5	Ant1	2402	4.28	/	PASS
		2441	4.86	/	PASS
		2480	5.36	/	PASS
3DH5	Ant1	2402	4.29	/	PASS
		2441	4.86	/	PASS
		2480	5.33	/	PASS



**BUREAU
VERITAS**

Test Report No.: W7L-P22030013RF01

CARRIER FREQUENCY SEPARATION

TEST RESULT

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.99	≥ 0.686	PASS
2DH5	Ant1	Hop	1.298	≥ 0.894	PASS
3DH5	Ant1	Hop	1.356	≥ 0.872	PASS

TEST GRAPHS

DH5_Ant1_Hop



2DH5_Ant1_Hop



3DH5_Ant1_Hop



BUREAU
VERITAS

Test Report No.: W7L-P22030013RF01



BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

No.B102, Dazhu Chuangxin Mansion, North of Beihuan
Avenue, North Area, Hi-Tech Industrial Park, Nanshan
District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




Test Report No.: W7L-P22030013RF01

TIME OF OCCUPANCY TEST RESULT


TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.39	320	0.125	≤0.4	PASS
DH3	Ant1	Hop	1.65	160	0.264	≤0.4	PASS
DH5	Ant1	Hop	2.89	107	0.309	≤0.4	PASS
2DH1	Ant1	Hop	0.38	320	0.122	≤0.4	PASS
2DH3	Ant1	Hop	1.63	160	0.261	≤0.4	PASS
2DH5	Ant1	Hop	2.88	107	0.308	≤0.4	PASS
3DH1	Ant1	Hop	0.37	320	0.118	≤0.4	PASS
3DH3	Ant1	Hop	1.62	160	0.259	≤0.4	PASS
3DH5	Ant1	Hop	2.88	107	0.308	≤0.4	PASS

TEST GRAPHS

DH1_Ant1_Hop

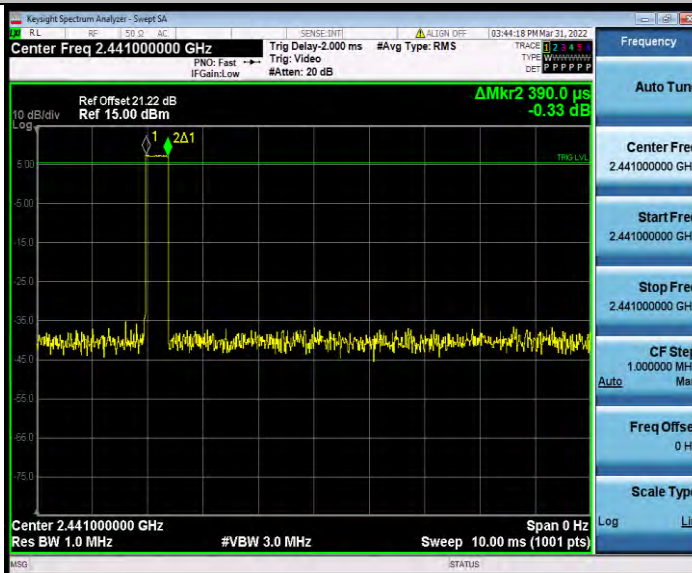

DH3_Ant1_Hop

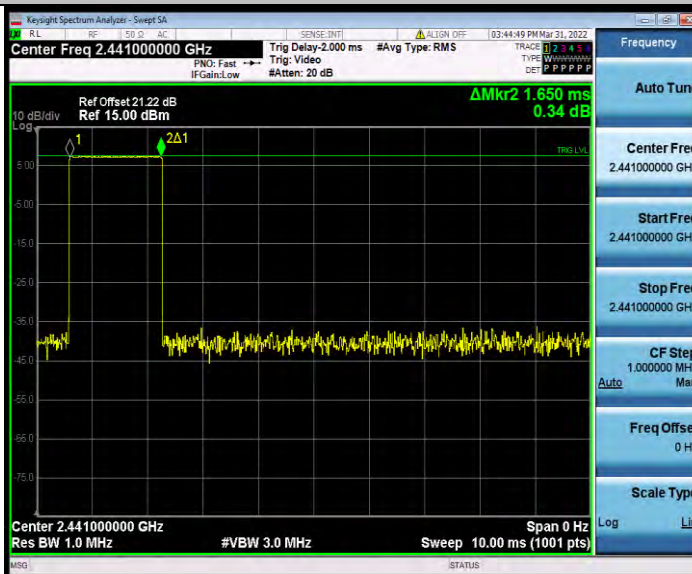


DH5_Ant1_Hop




BUREAU VERITAS

Test Report No.: W7L-P22030013RF01

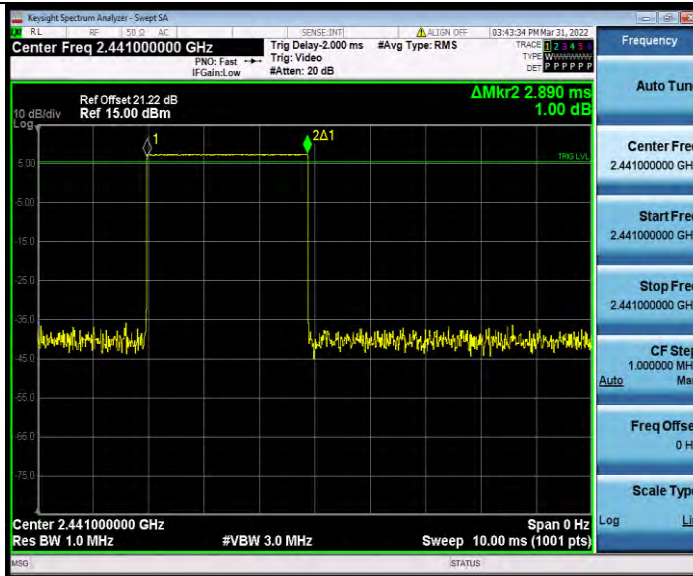

2DH1_Ant1_Hop

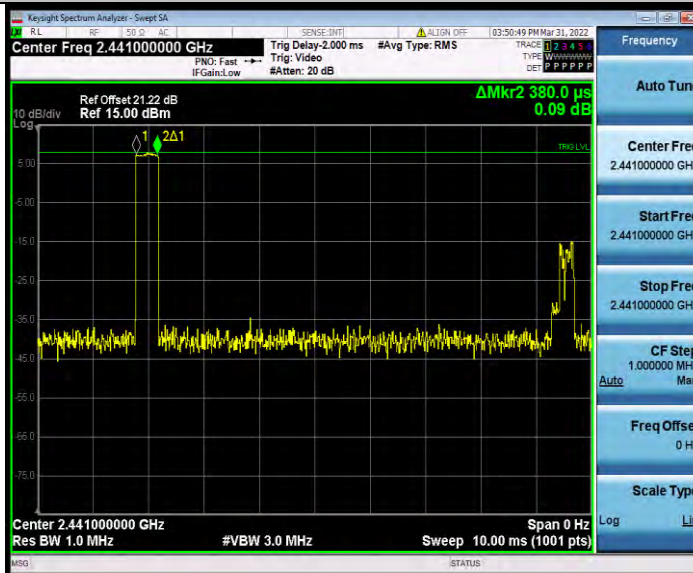


2DH3_Ant1_Hop




BUREAU VERITAS

Test Report No.: W7L-P22030013RF01

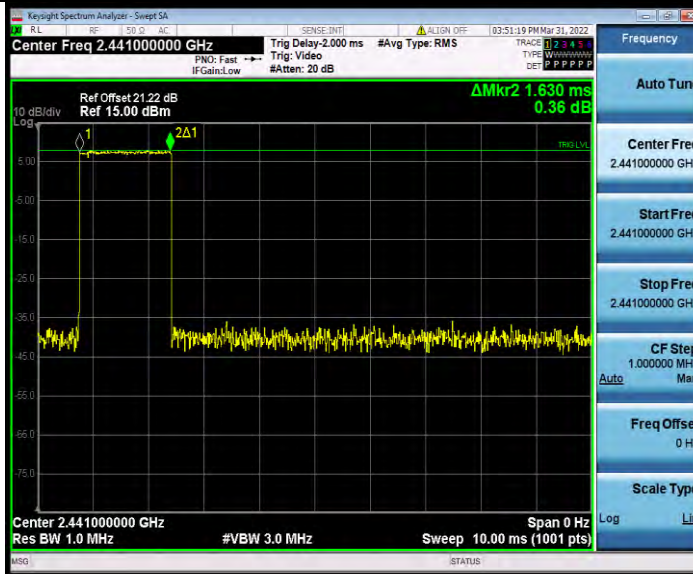

2DH5_Ant1_Hop

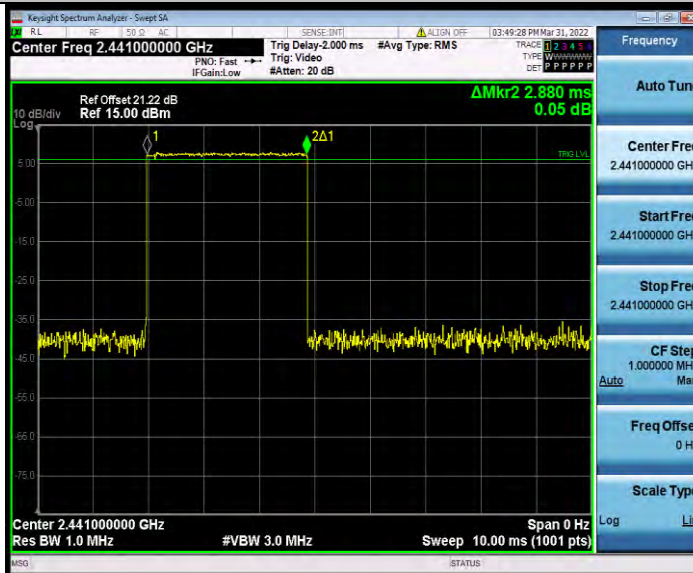

3DH1_Ant1_Hop

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
 Fax: +86 755 8869 6577
 Email: customerservice.sw@bureauveritas.com




BUREAU VERITAS

Test Report No.: W7L-P22030013RF01

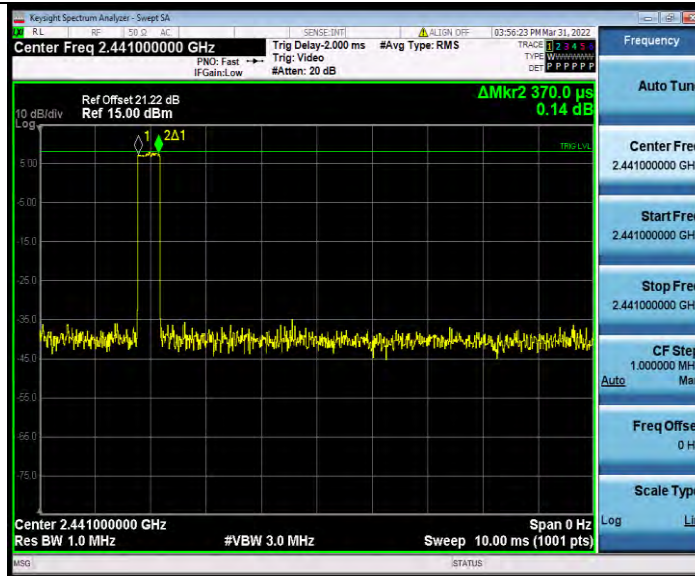


3DH3_Ant1_Hop

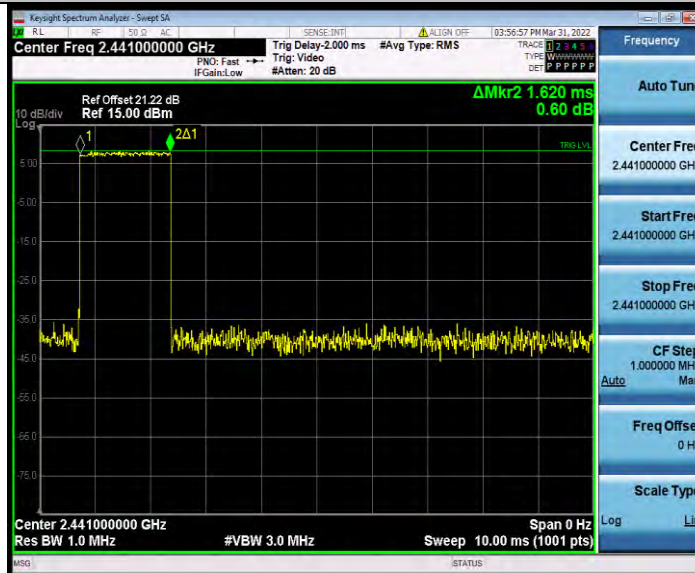

3DH5_Ant1_Hop



Test Report No.: W7L-P22030013RF01

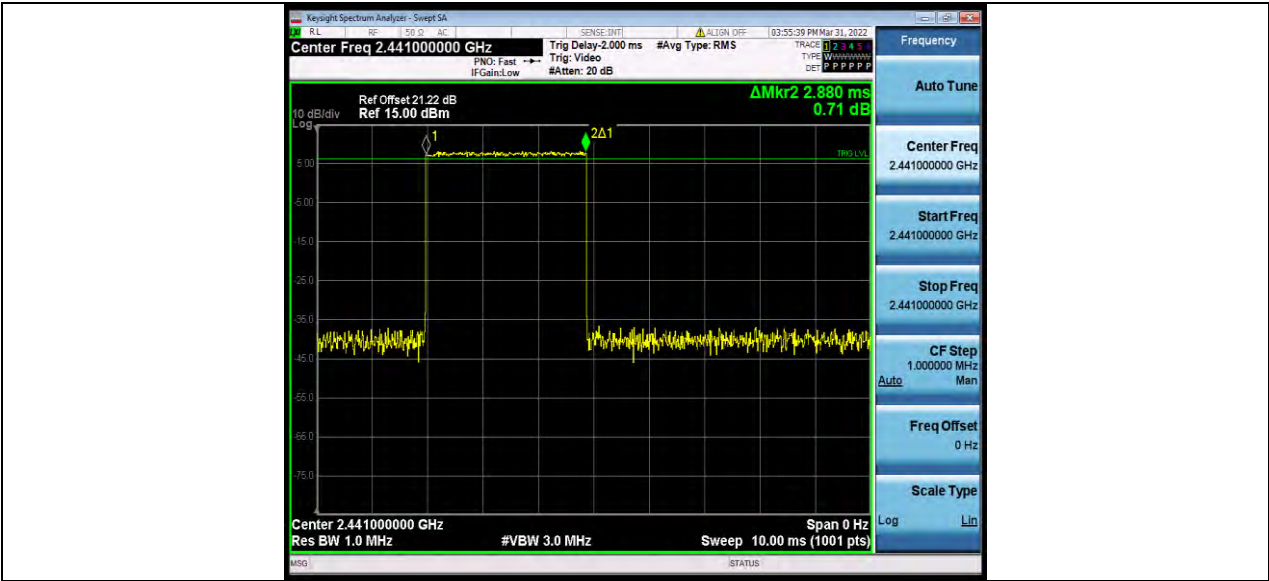

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan
Avenue, North Area, Hi-Tech Industrial Park, Nanshan
District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



**BUREAU
VERITAS**


Test Report No.: W7L-P22030013RF01

NUMBER OF HOPPING CHANNELS TEST RESULT


TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥ 15	PASS
2DH5	Ant1	Hop	79	≥ 15	PASS
3DH5	Ant1	Hop	79	≥ 15	PASS

TEST GRAPHS

DH5_Ant1_Hop

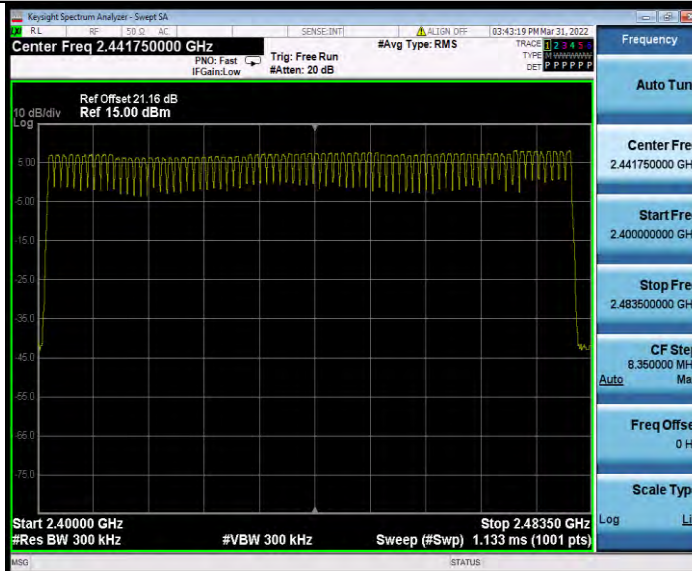

2DH5_Ant1_Hop

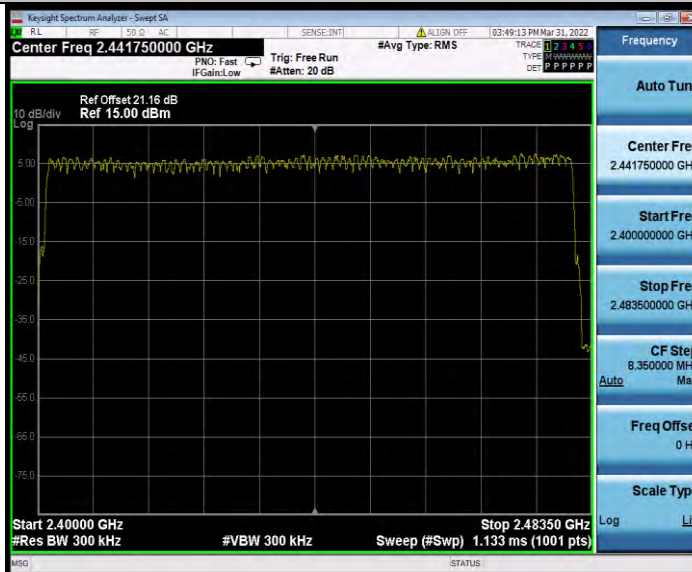


3DH5_Ant1_Hop



BUREAU VERITAS

Test Report No.: W7L-P22030013RF01

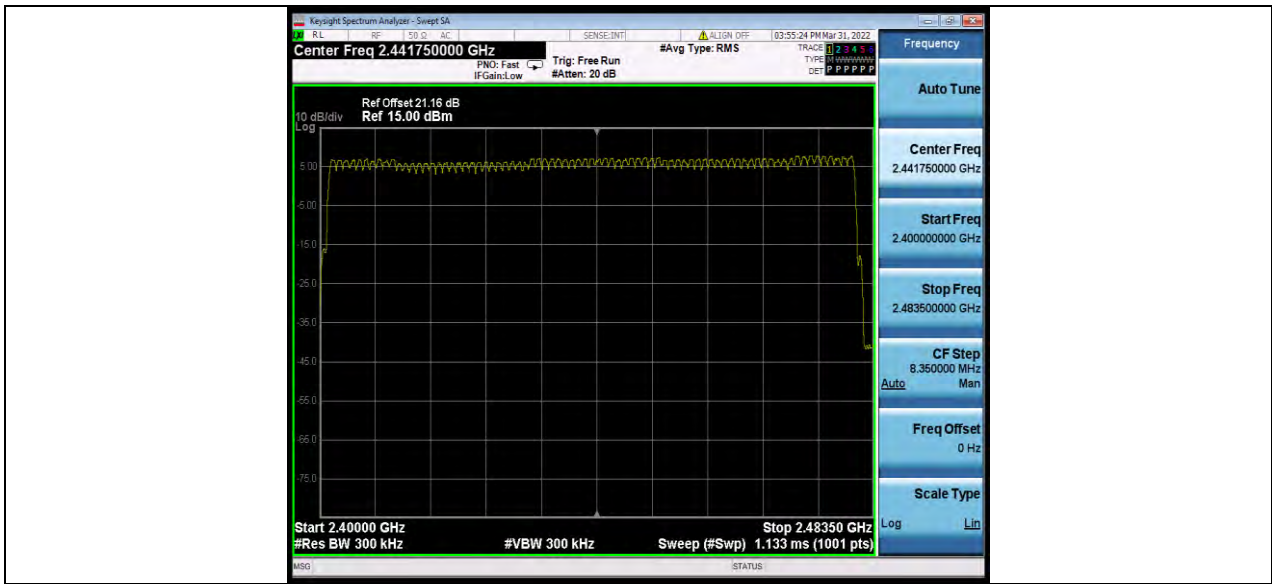

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com


BAND EDGE MEASUREMENTS

TEST RESULT


TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	7.35	-44.94	≤-12.65	PASS
		High	2480	8.22	-44.2	≤-11.78	PASS
		Low	Hop_2402	5.85	-48.53	≤-14.15	PASS
		High	Hop_2480	7.94	-44.23	≤-12.06	PASS
2DH5	Ant1	Low	2402	6.56	-33.17	≤-13.44	PASS
		High	2480	8.07	-44.65	≤-11.93	PASS
		Low	Hop_2402	2.75	-44.67	≤-17.25	PASS
		High	Hop_2480	6.50	-43.22	≤-13.5	PASS
3DH5	Ant1	Low	2402	7.08	-33.37	≤-12.92	PASS
		High	2480	7.93	-43.58	≤-12.07	PASS
		Low	Hop_2402	5.51	-44.36	≤-14.49	PASS
		High	Hop_2480	7.98	-43.51	≤-12.02	PASS

TEST GRAPHS

DH5_Ant1_Low_2402

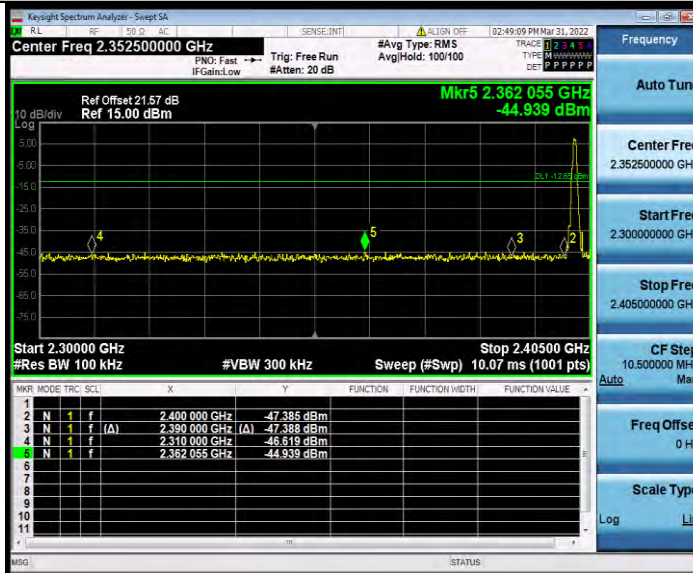

DH5_Ant1_High_2480

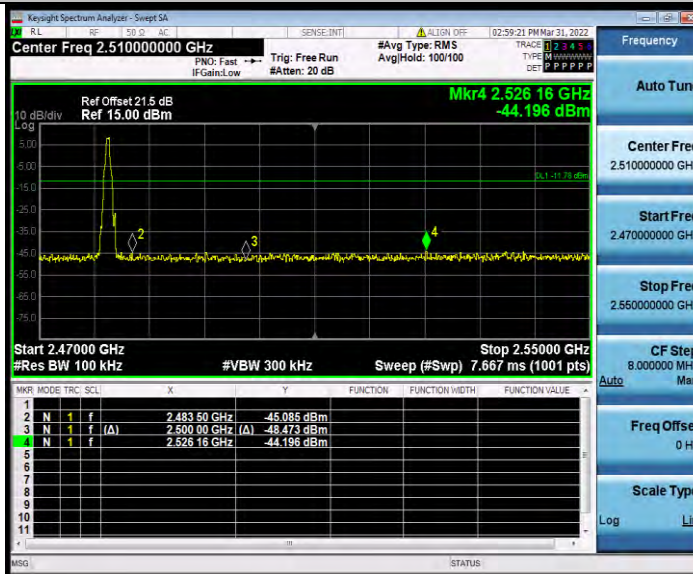


DH5_Ant1_Low_Hop_2402



BUREAU VERITAS

Test Report No.: W7L-P22030013RF01

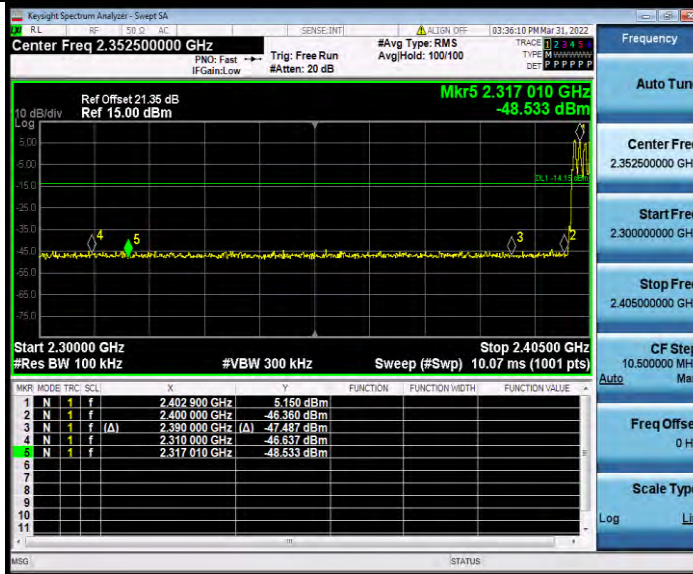

DH5_Ant1_High_Hop_2480



2DH5_Ant1_Low_2402

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




BUREAU VERITAS

Test Report No.: W7L-P22030013RF01

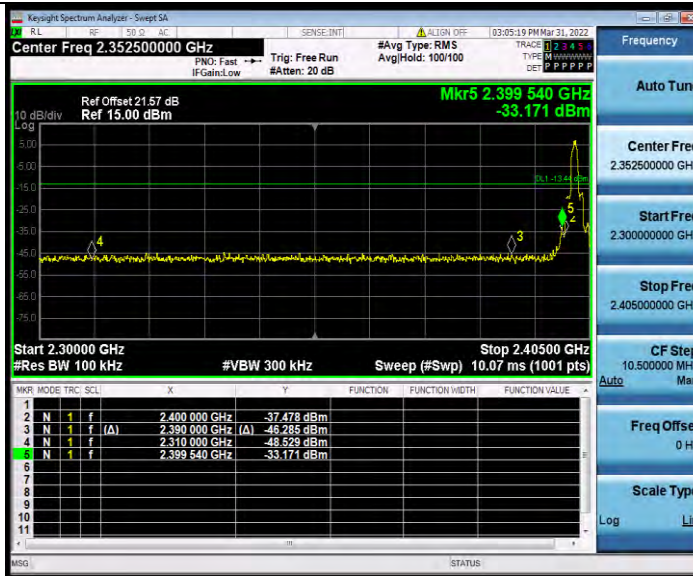

2DH5_Ant1_High_2480

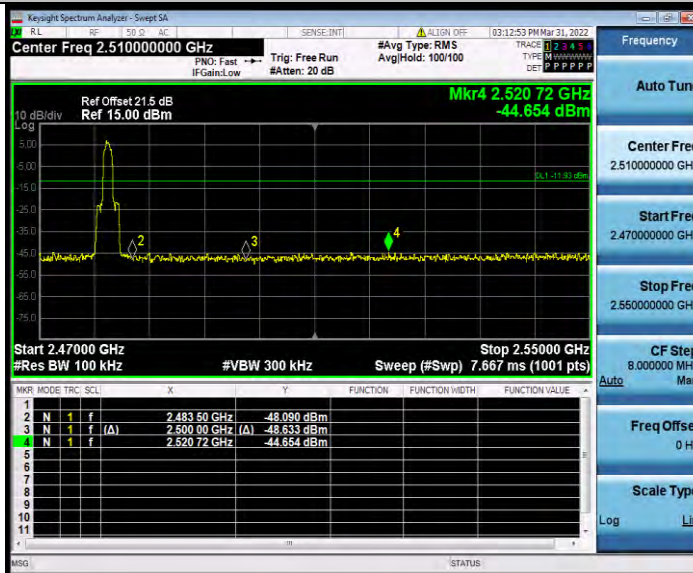

2DH5_Ant1_Low_Hop_2402

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU VERITAS

Test Report No.: W7L-P22030013RF01

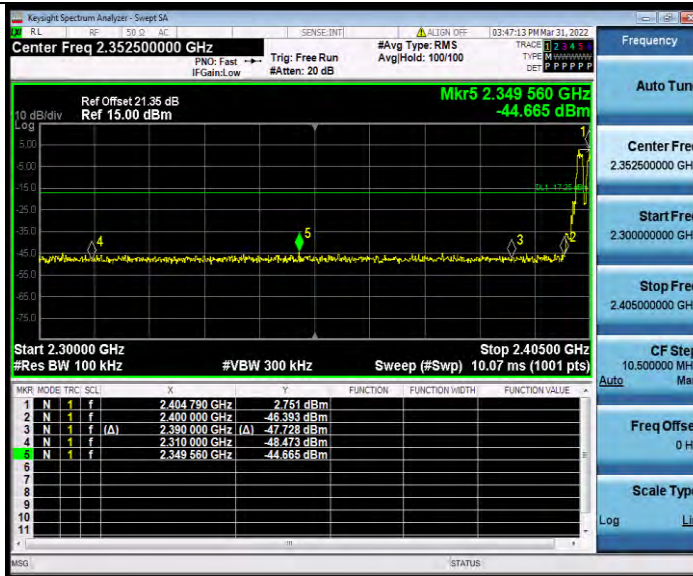

2DH5_Ant1_High_Hop_2480



3DH5_Ant1_Low_2402

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




BUREAU VERITAS

Test Report No.: W7L-P22030013RF01

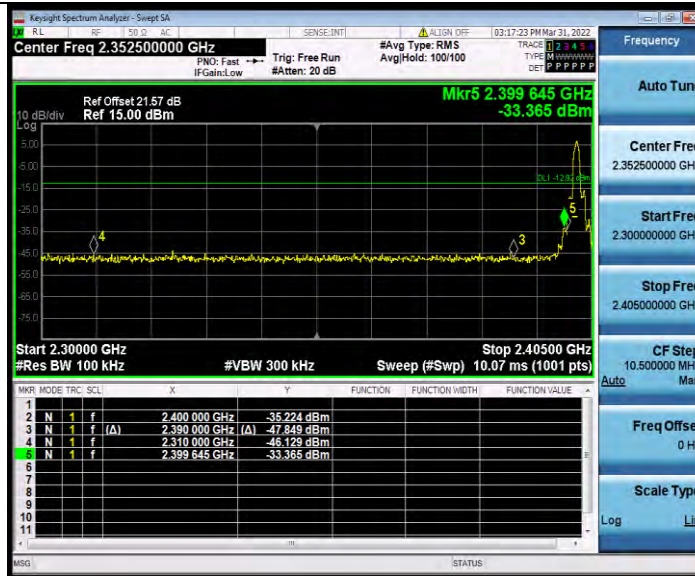

3DH5_Ant1_High_2480

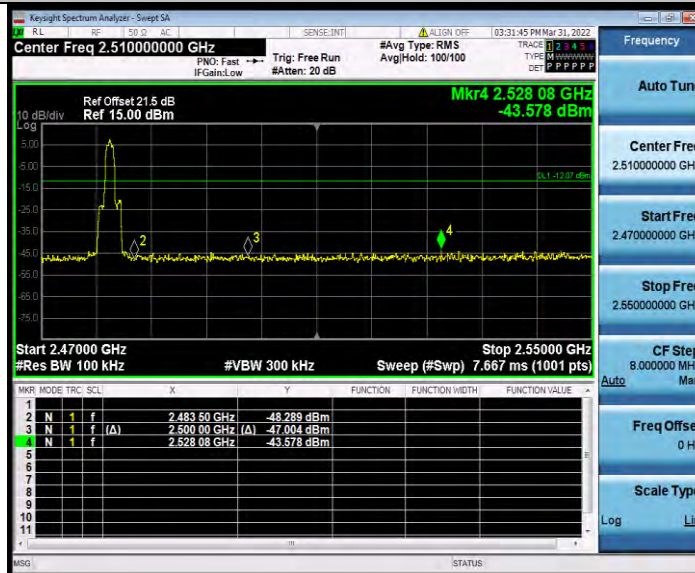


3DH5_Ant1_Low_Hop_2402



BUREAU VERITAS

Test Report No.: W7L-P22030013RF01

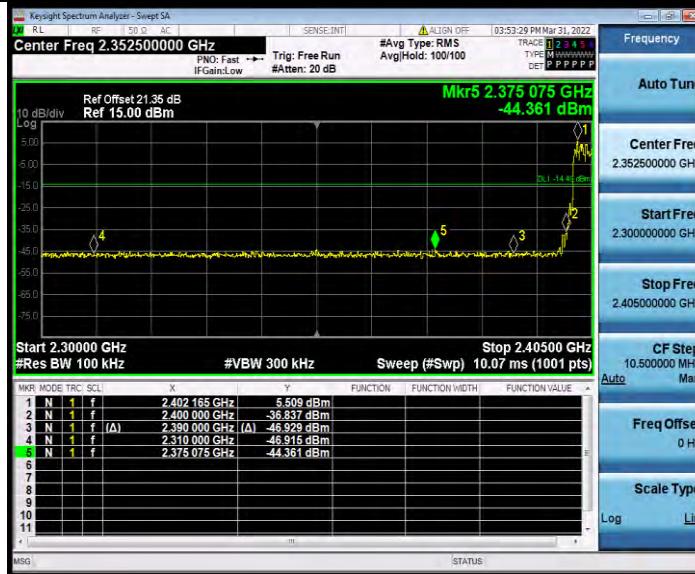

3DH5_Ant1_High_Hop_2480



BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com


CONDUCTED SPURIOUS EMISSION

TEST RESULT

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	30~1000	7.35	-42.37	≤-12.65	PASS
			1000~26500	7.35	-28	≤-12.65	PASS
		2441	30~1000	7.34	-42.56	≤-12.66	PASS
			1000~26500	7.34	-27.65	≤-12.66	PASS
		2480	30~1000	8.22	-43.52	≤-11.78	PASS
			1000~26500	8.22	-27.92	≤-11.78	PASS
2DH5	Ant1	2402	30~1000	6.56	-42.64	≤-13.44	PASS
			1000~26500	6.56	-27.31	≤-13.44	PASS
		2441	30~1000	6.86	-43.51	≤-13.14	PASS
			1000~26500	6.86	-27.49	≤-13.14	PASS
		2480	30~1000	8.07	-43	≤-11.93	PASS
			1000~26500	8.07	-27.87	≤-11.93	PASS
3DH5	Ant1	2402	30~1000	7.08	-42.87	≤-12.92	PASS
			1000~26500	7.08	-27.25	≤-12.92	PASS
		2441	30~1000	7.02	-42.94	≤-12.98	PASS
			1000~26500	7.02	-28.01	≤-12.98	PASS
		2480	30~1000	7.93	-43.55	≤-12.07	PASS
			1000~26500	7.93	-27.75	≤-12.07	PASS

TEST GRAPHS

DH5_Ant1_2402_30~1000

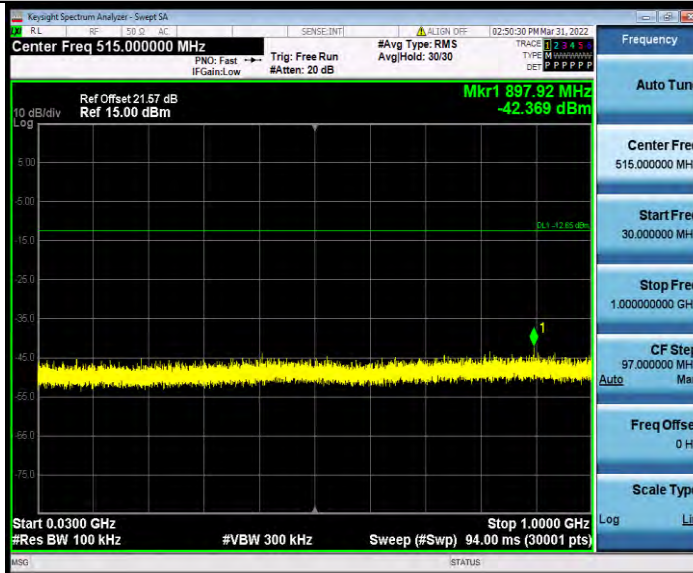

DH5_Ant1_2402_1000~26500




DH5_Ant1_2441_30~1000



BUREAU VERITAS

Test Report No.: W7L-P22030013RF01

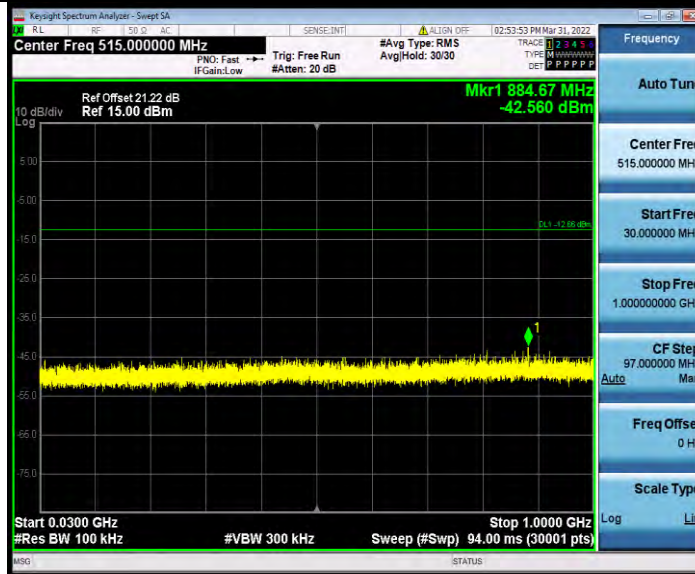

DH5_Ant1_2441_1000~26500



DH5_Ant1_2480_30~1000

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: W7L-P22030013RF01

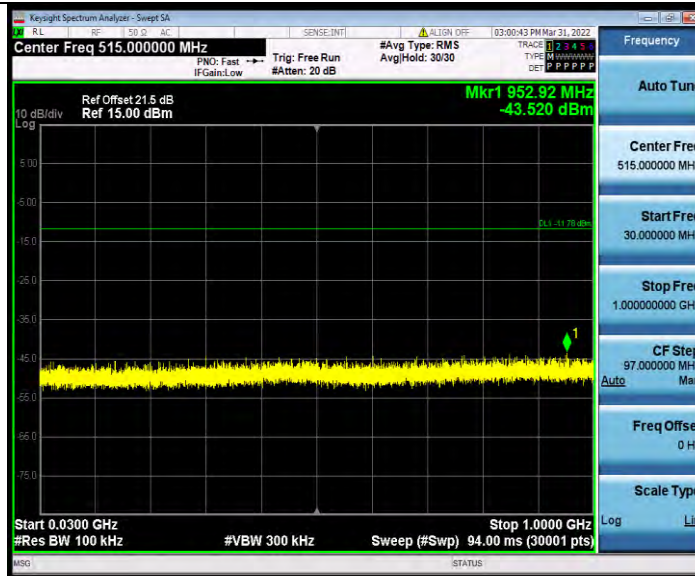

DH5_Ant1_2480_1000~26500




2DH5_Ant1_2402_30~1000



BUREAU VERITAS

Test Report No.: W7L-P22030013RF01

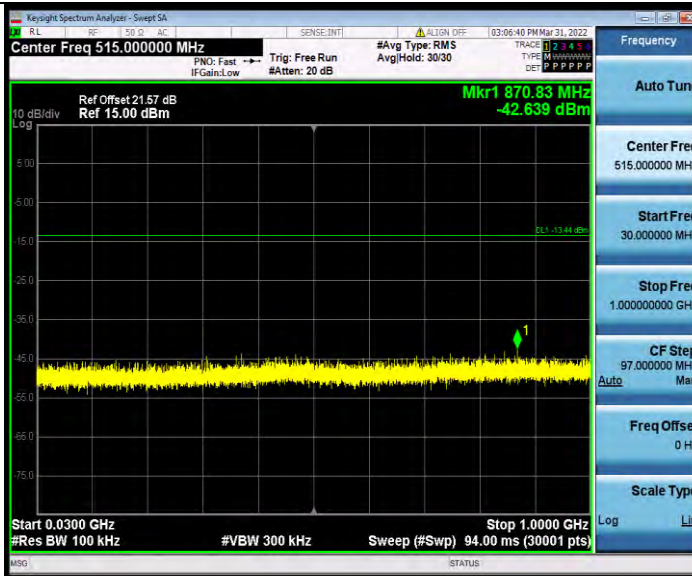

2DH5_Ant1_2402_1000~26500



2DH5_Ant1_2441_30~1000

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




BUREAU VERITAS

Test Report No.: W7L-P22030013RF01

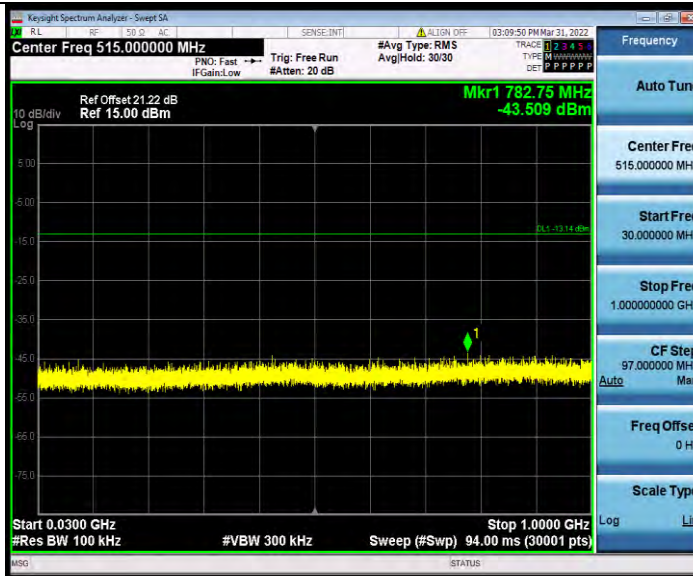

2DH5_Ant1_2441_1000~26500

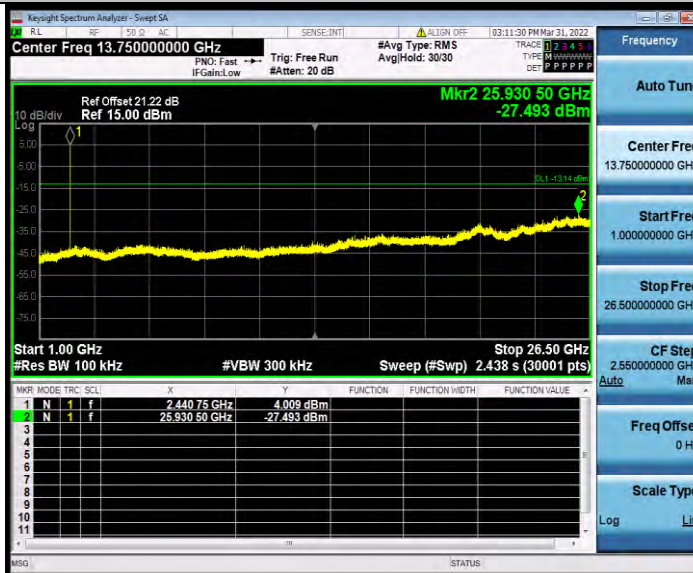


2DH5_Ant1_2480_30~1000



BUREAU VERITAS

Test Report No.: W7L-P22030013RF01

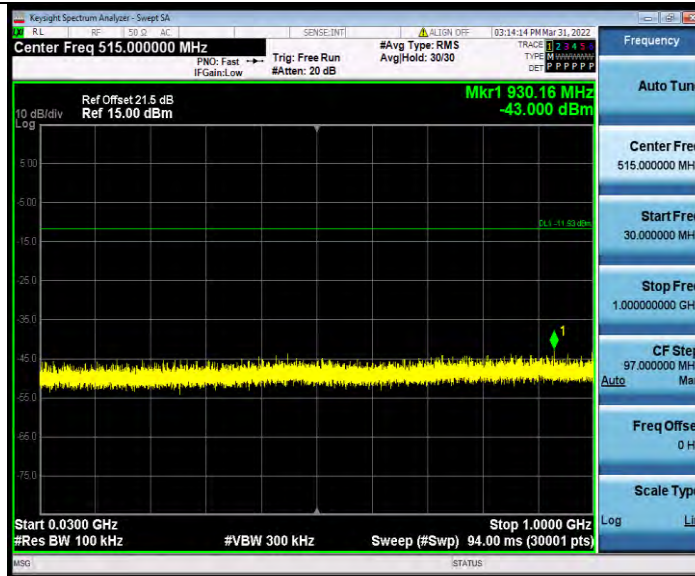

2DH5_Ant1_2480_1000~26500



3DH5_Ant1_2402_30~1000

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




BUREAU VERITAS

Test Report No.: W7L-P22030013RF01

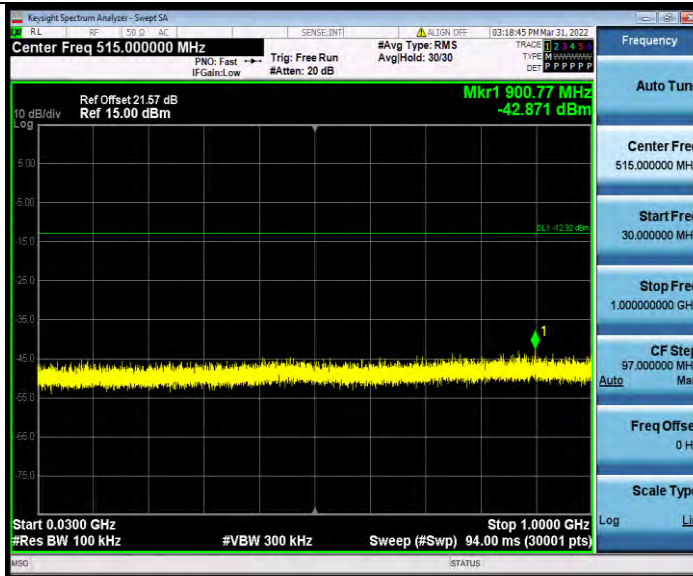

3DH5_Ant1_2402_1000~26500

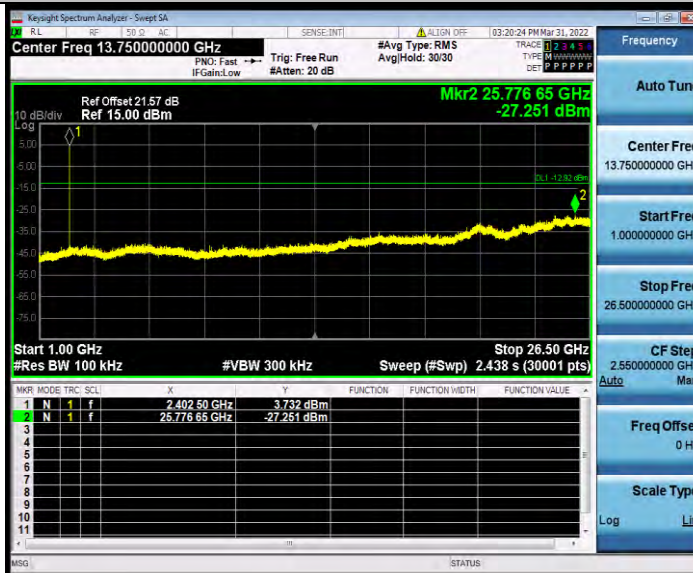

3DH5_Ant1_2441_30~1000

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU VERITAS

Test Report No.: W7L-P22030013RF01

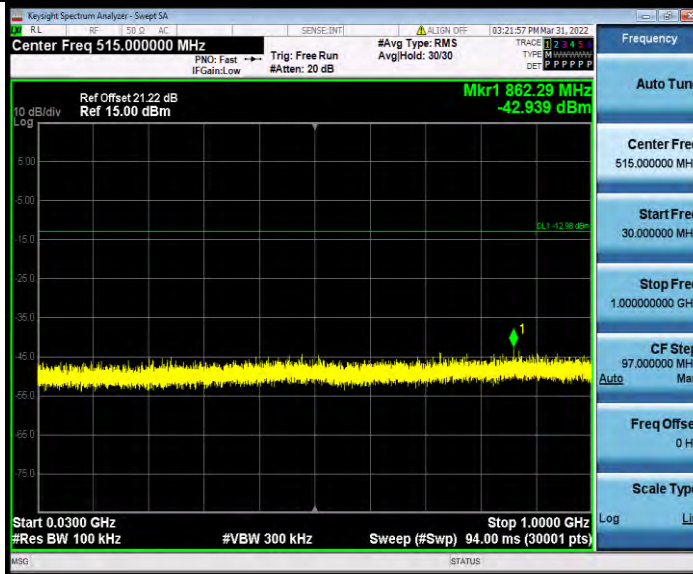

3DH5_Ant1_2441_1000~26500




3DH5_Ant1_2480_30~1000



BUREAU VERITAS

Test Report No.: W7L-P22030013RF01

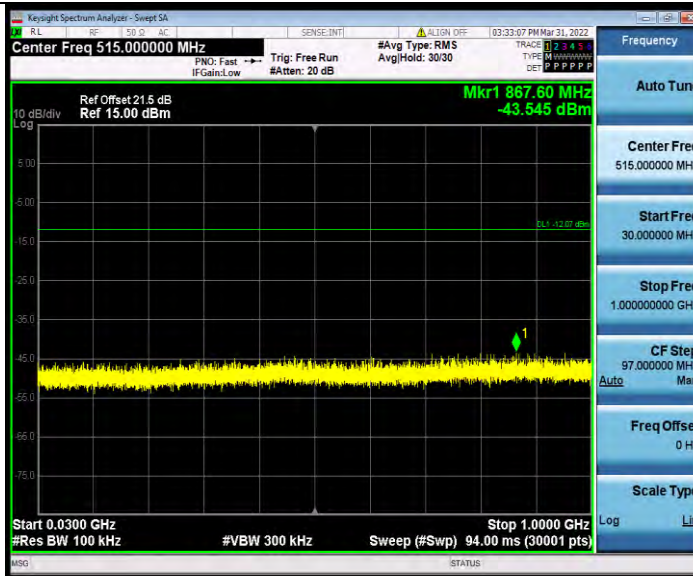

3DH5_Ant1_2480_1000~26500



BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU
VERITAS

Test Report No.: W7L-P22030013RF01


DUTY CYCLE

TEST RESULT


TestMode	Antenna	Frequency[M Hz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
DH5	Ant1	2402	2.91	3.75	77.60	1.10
		2441	2.91	3.75	77.60	1.10
		2480	2.91	3.75	77.60	1.10
2DH5	Ant1	2402	2.90	3.75	77.33	1.12
		2441	2.90	3.75	77.33	1.12
		2480	2.90	3.75	77.33	1.12
3DH5	Ant1	2402	2.90	3.75	77.33	1.12
		2441	2.90	3.75	77.33	1.12
		2480	2.90	3.75	77.33	1.12

TEST GRAPHS

DH5_Ant1_2402

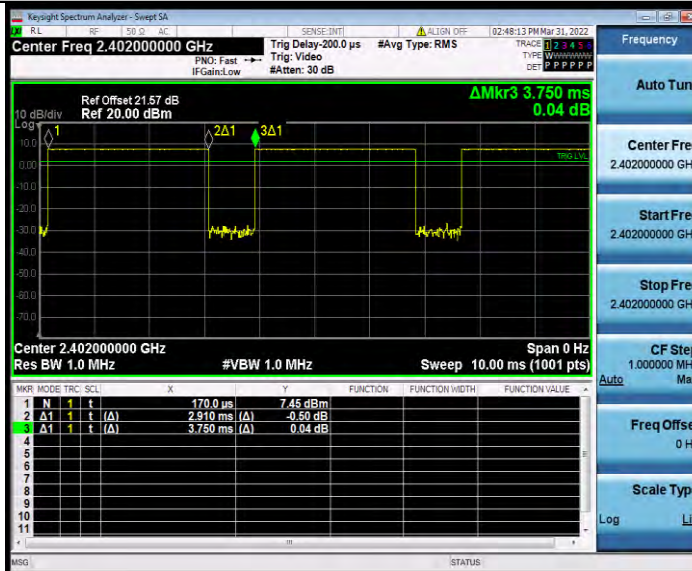

DH5_Ant1_2441

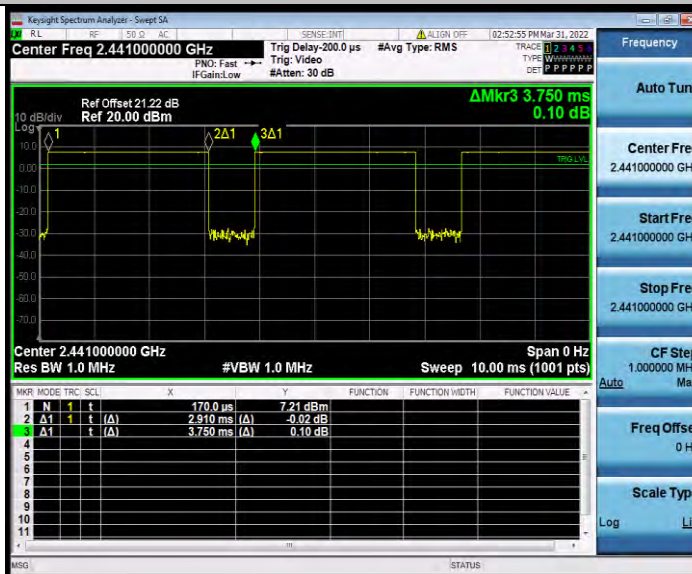


DH5_Ant1_2480



BUREAU VERITAS

Test Report No.: W7L-P22030013RF01

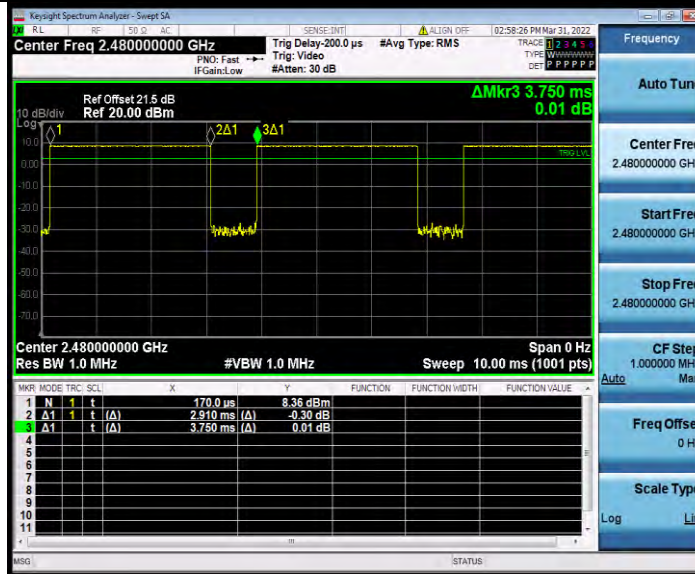

2DH5_Ant1_2402



2DH5_Ant1_2441

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU VERITAS

Test Report No.: W7L-P22030013RF01



2DH5_Ant1_2480



3DH5_Ant1_2402

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




BUREAU
VERITAS

Test Report No.: W7L-P22030013RF01

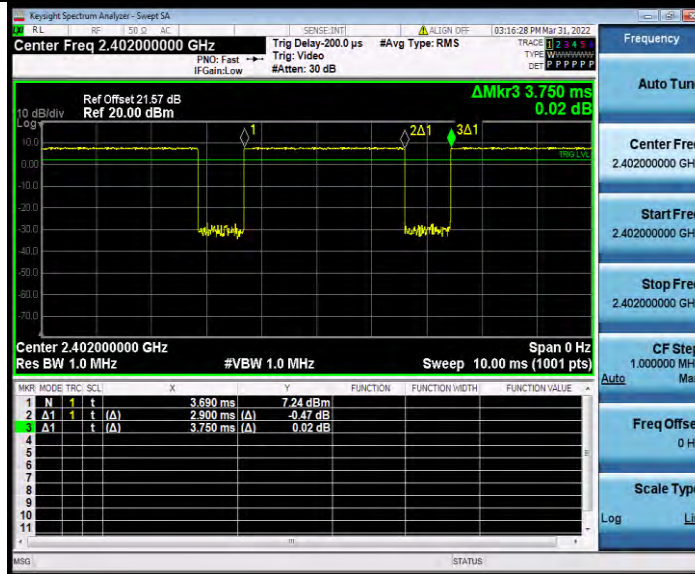

3DH5_Ant1_2441

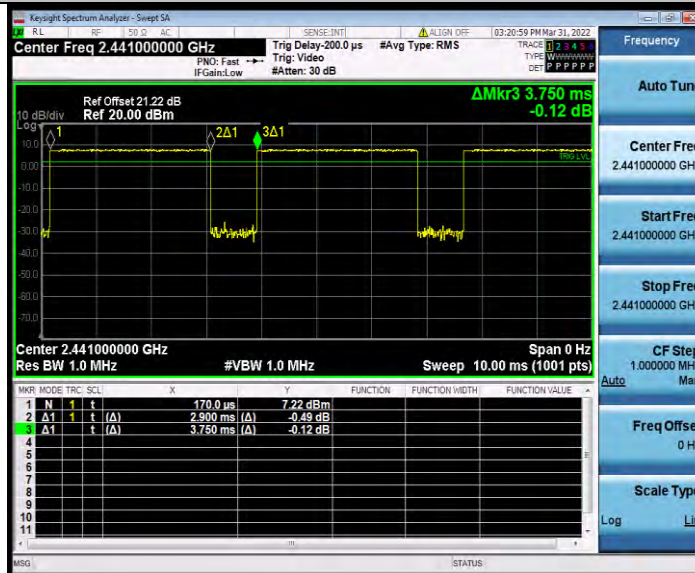


3DH5_Ant1_2480



BUREAU VERITAS

Test Report No.: W7L-P22030013RF01

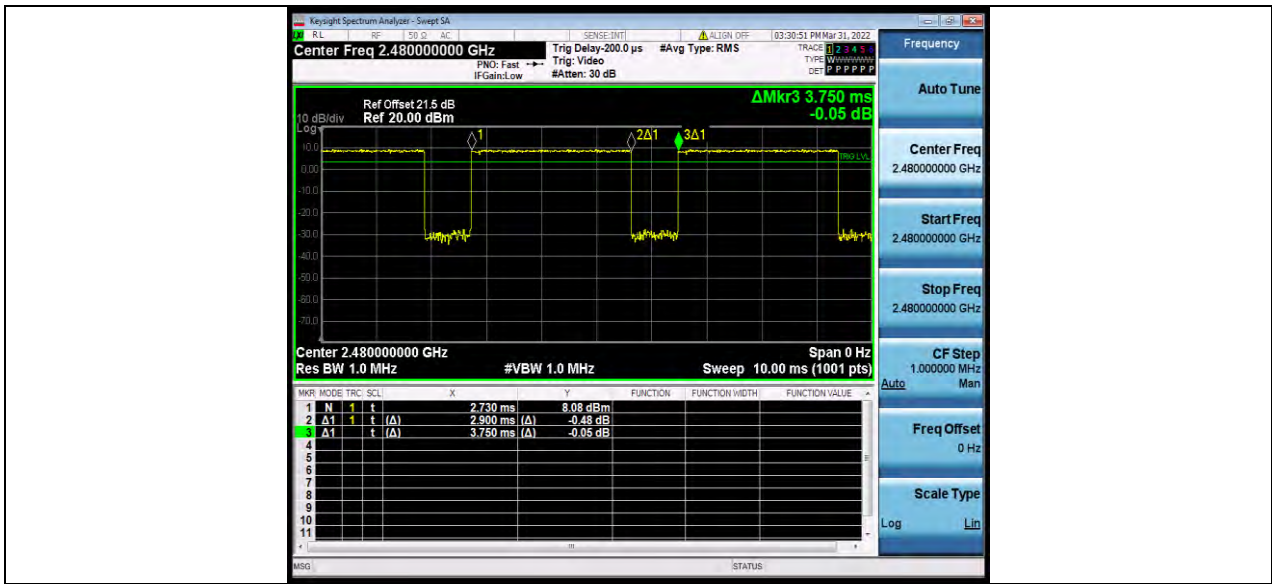

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazhu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com