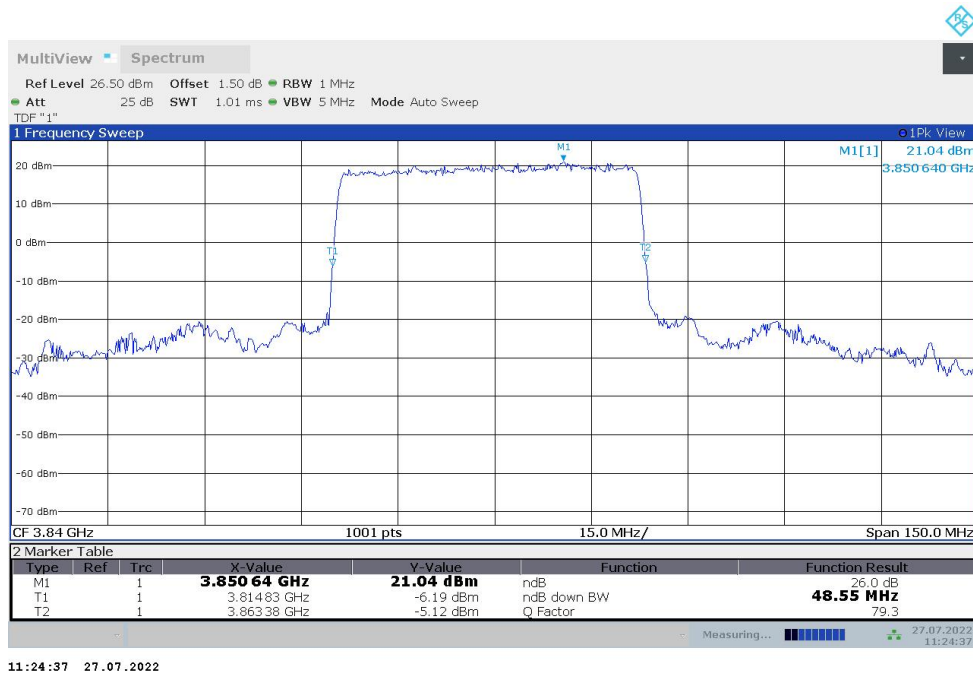
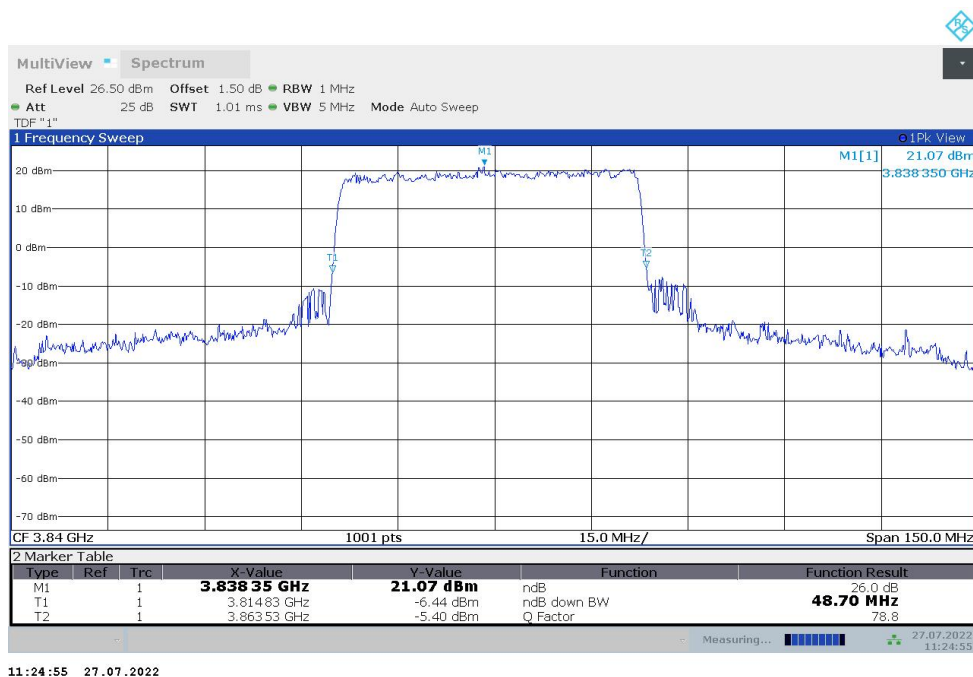



n77H,50MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
3840	48.550	48.700


n77H,50MHz Bandwidth,DFT-s-pi/2 BPSK (-26dBc BW)

n77H,50MHz Bandwidth,DFT-s-QPSK (-26dBc BW)


n77H,60MHz(-26dBc)

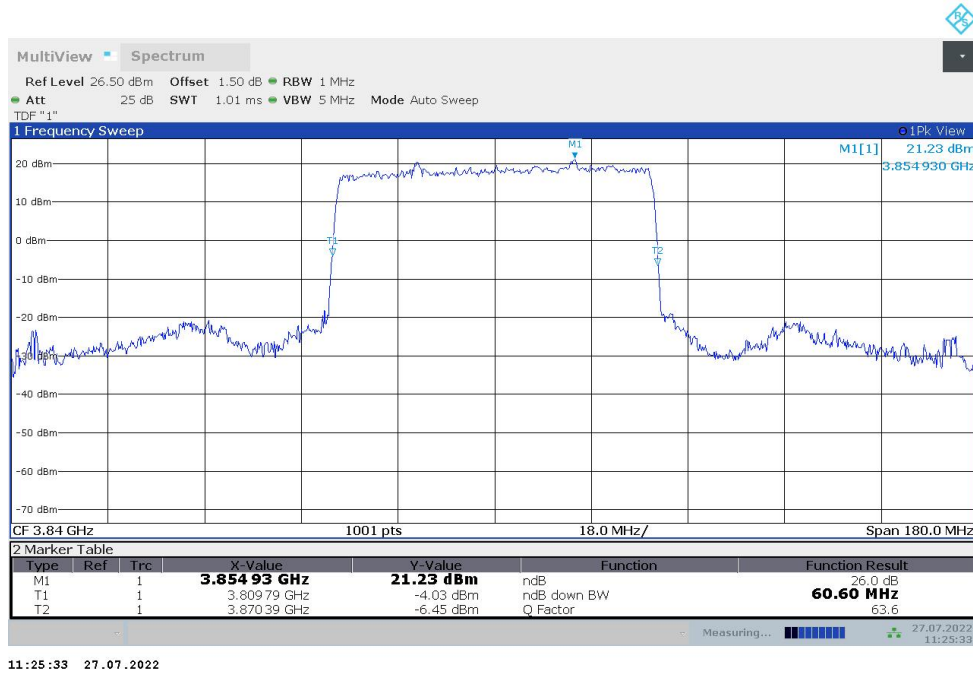Frequency (MHz)	Emission Bandwidth (-26dBc) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
3840	60.600	60.600

n77H,60MHz Bandwidth,DFT-s-pi/2 BPSK (-26dBc BW)

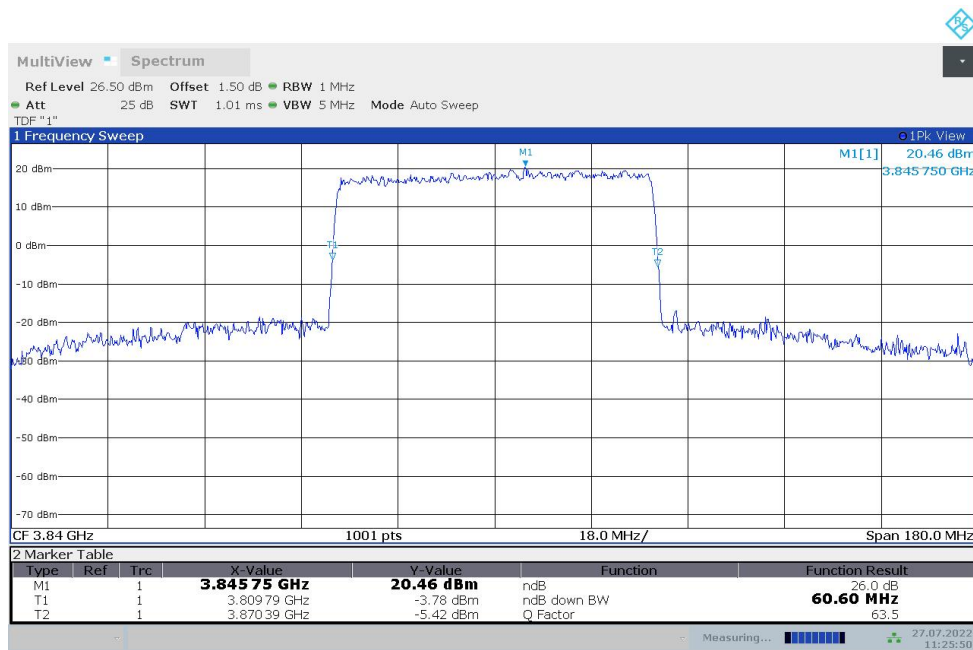
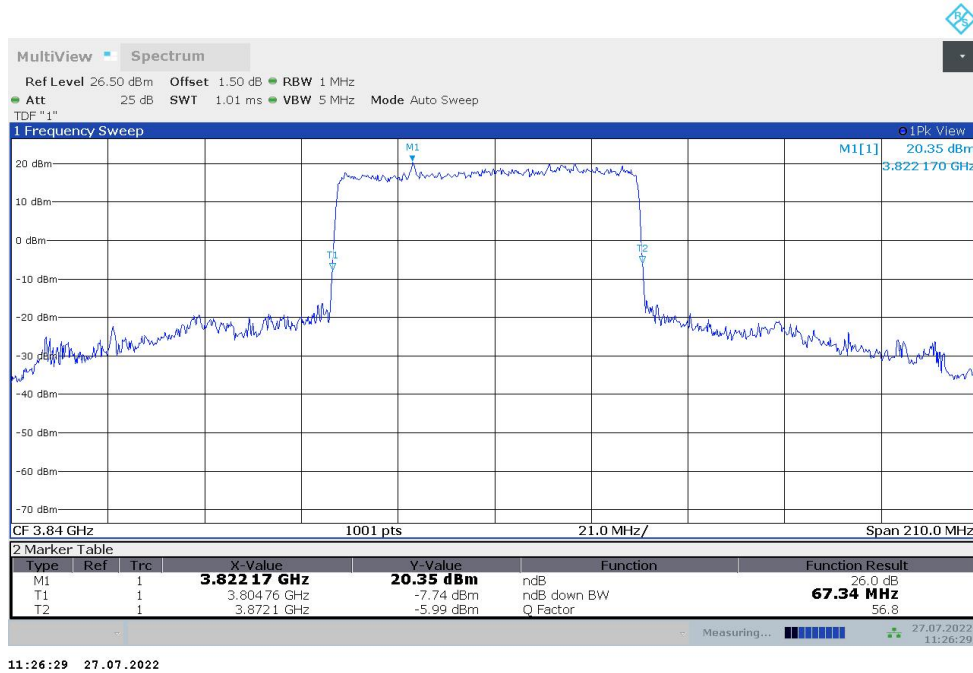
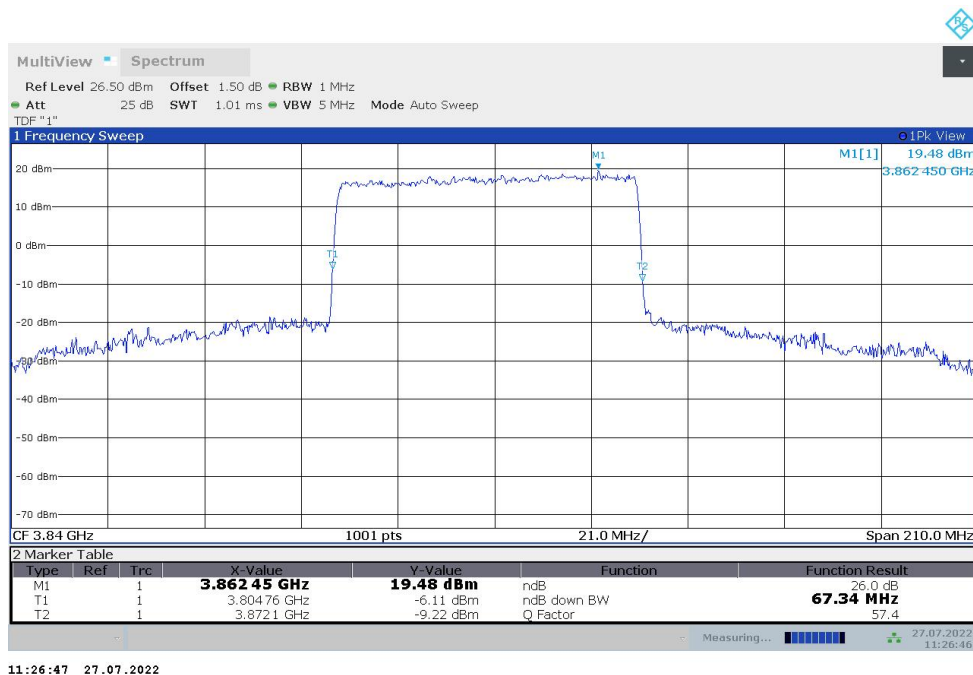
11:25:33 27.07.2022

n77H,60MHz Bandwidth,DFT-s-QPSK (-26dBc BW)


11:25:51 27.07.2022



n77H,70MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
3840	67.340	67.340

n77H,70MHz Bandwidth,DFT-s-pi/2 BPSK (-26dBc BW)

n77H,70MHz Bandwidth,DFT-s-QPSK (-26dBc BW)


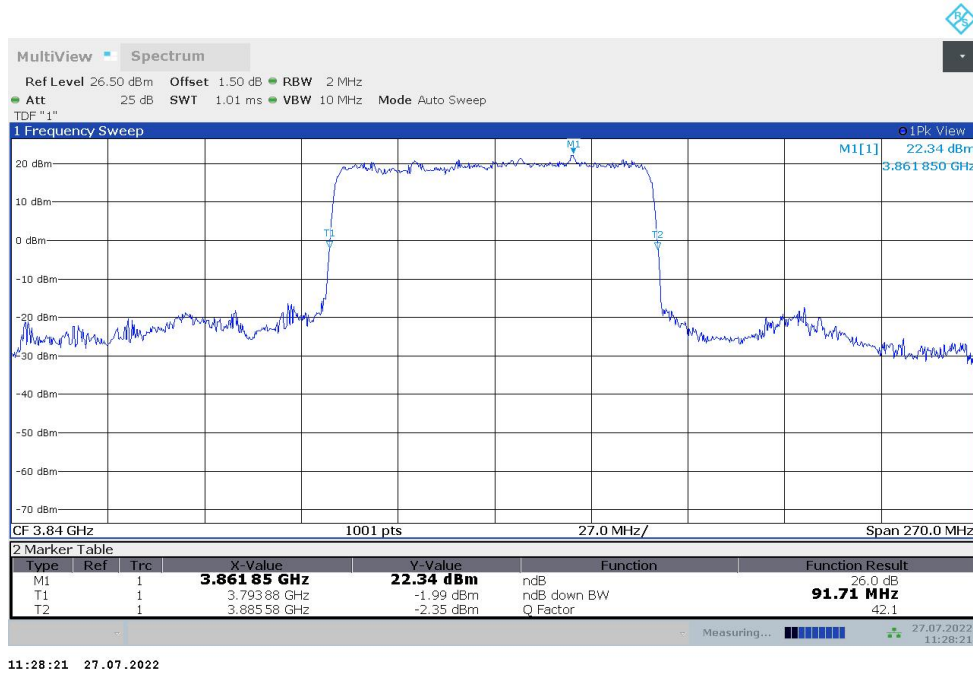
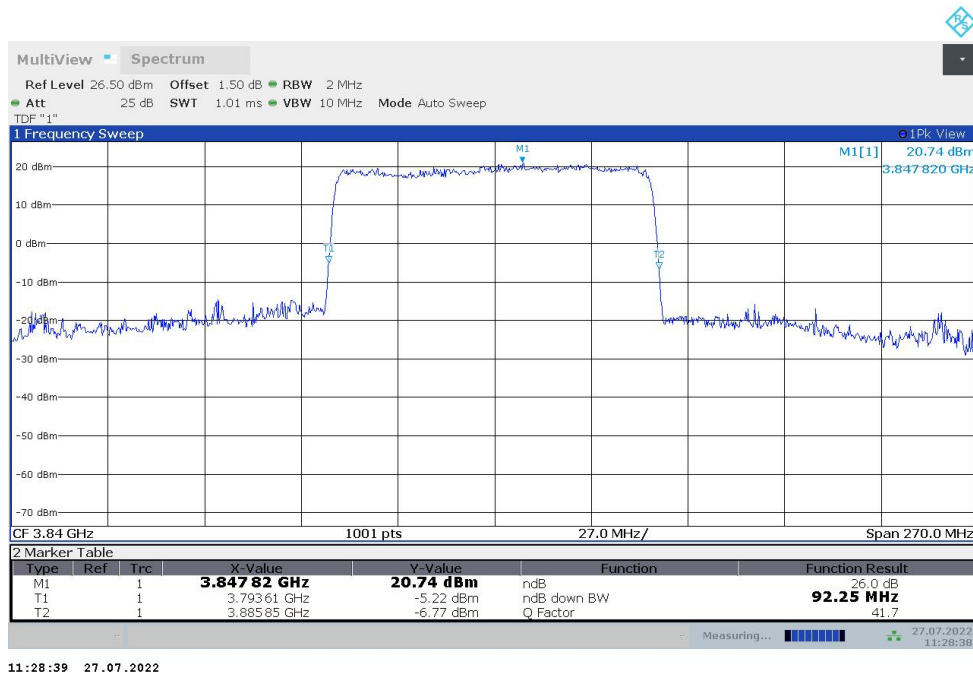
n77H,80MHz(-26dBc)

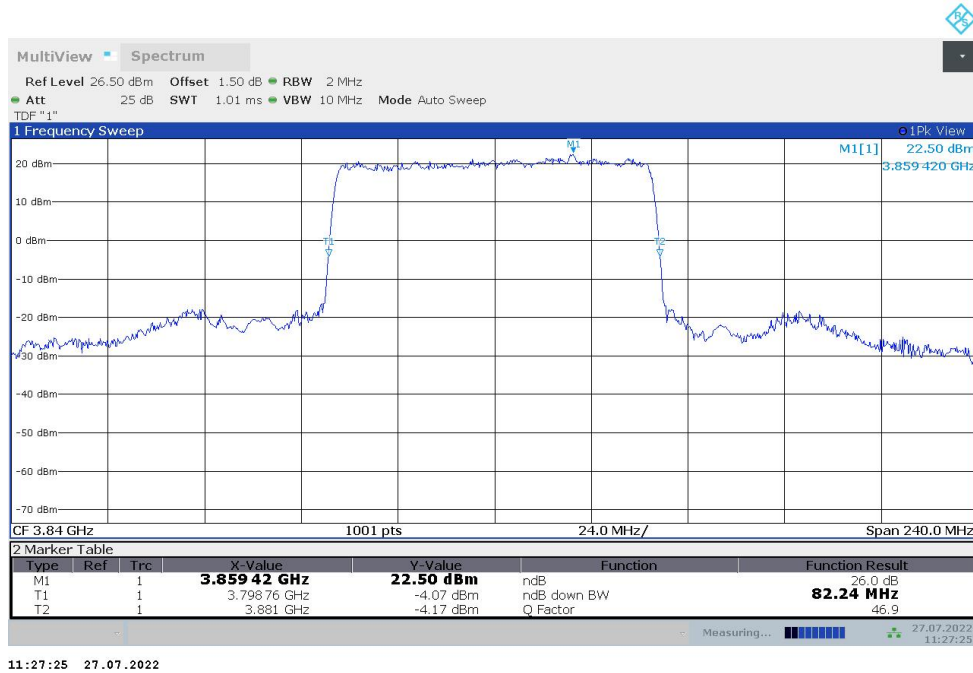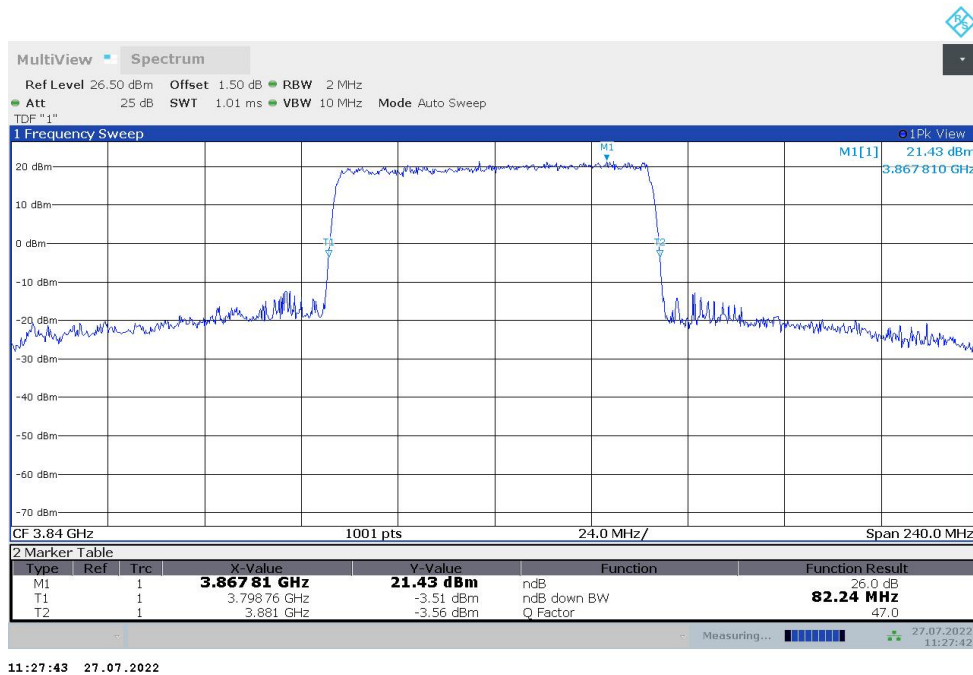Frequency (MHz)	Emission Bandwidth (-26dBc) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
3840	82.240	82.240

n77H,80MHz Bandwidth,DFT-s-pi/2 BPSK (-26dBc BW)

n77H,80MHz Bandwidth,DFT-s-QPSK (-26dBc BW)


n77H,90MHz(-26dBc)


Frequency (MHz)	Emission Bandwidth (-26dBc) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
3840	91.710	92.250

n77H,90MHz Bandwidth,DFT-s-pi/2 BPSK (-26dBc BW)

n77H,90MHz Bandwidth,DFT-s-QPSK (-26dBc BW)


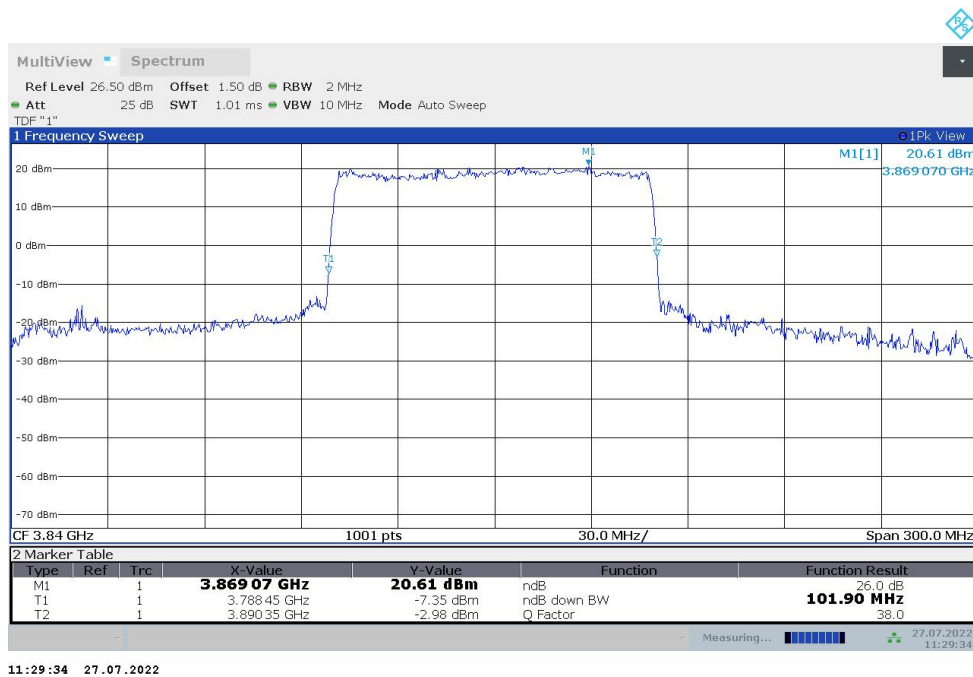
n77H,100MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
3840	101.600	101.900

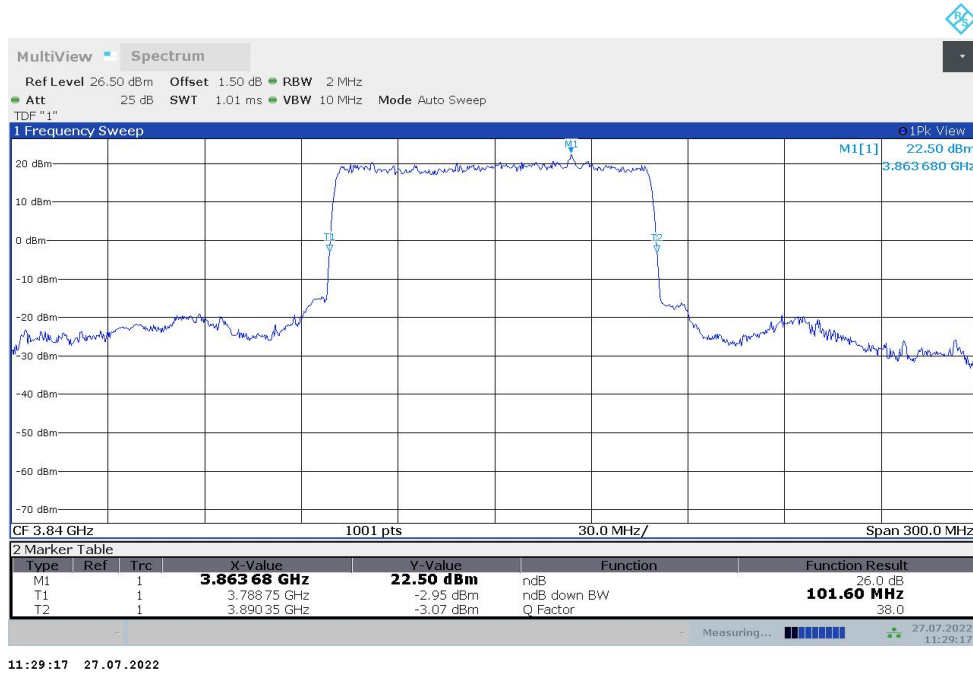n77H,100MHz Bandwidth,DFT-s-pi/2 BPSK (-26dBc BW)



n77H,100MHz Bandwidth,DFT-s-QPSK (-26dBc BW)




n78L

n78L,20MHz(-26dBc)


Frequency (MHz)	Emission Bandwidth (-26dBc) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
3500.01	19.481	19.241

n78L,20MHz Bandwidth,DFT-s-pi/2 BPSK (-26dBc BW)

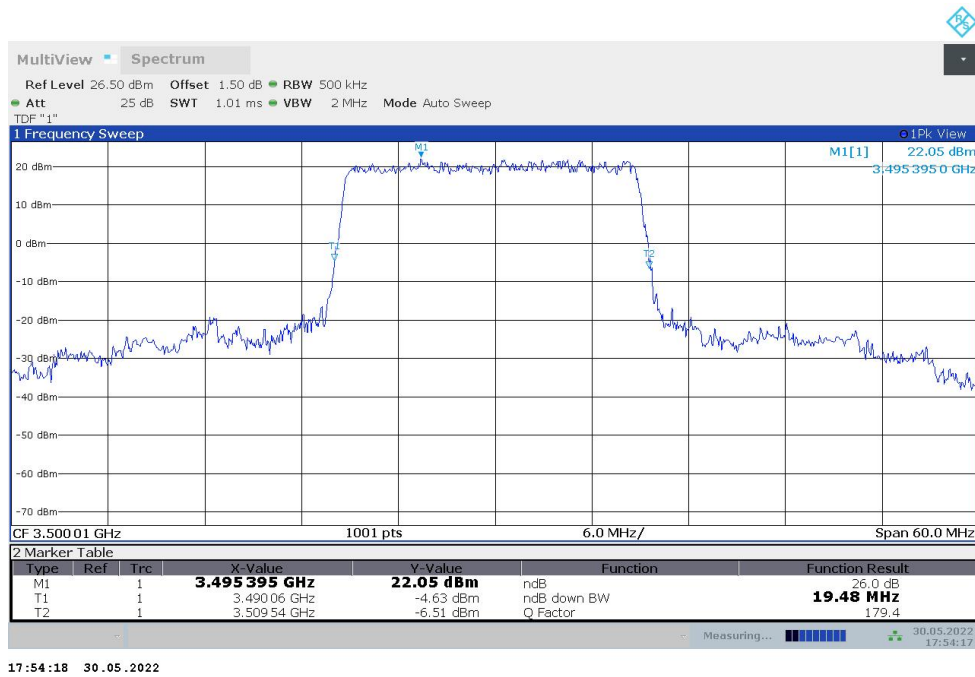

17:54:18 30.05.2022



n78L,20MHz Bandwidth,DFT-s-QPSK (-26dBc BW)

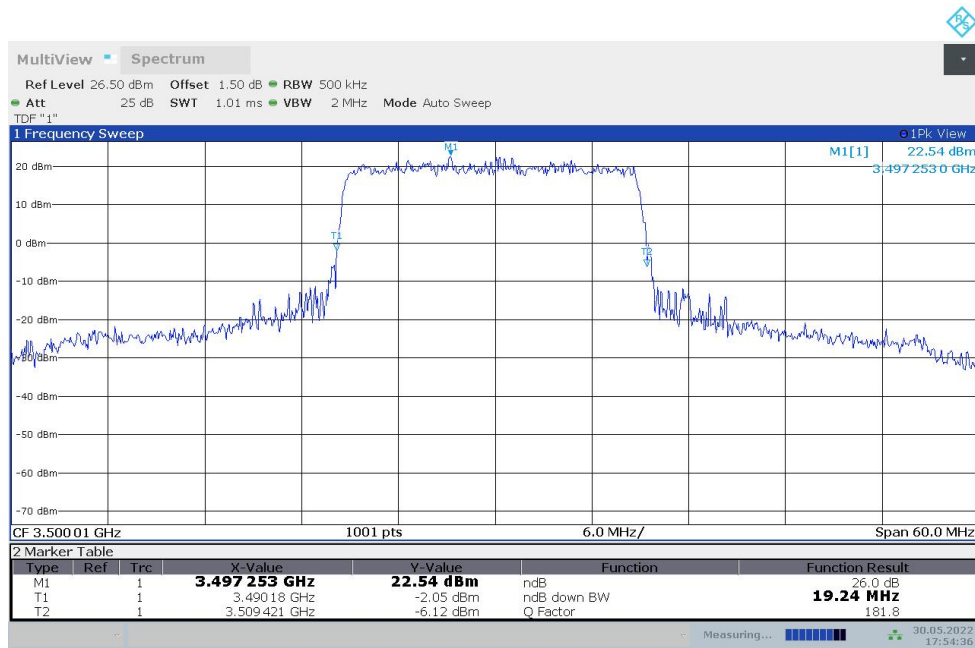

17:54:36 30.05.2022



n78L,30MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
3500.01	28.322	28.412

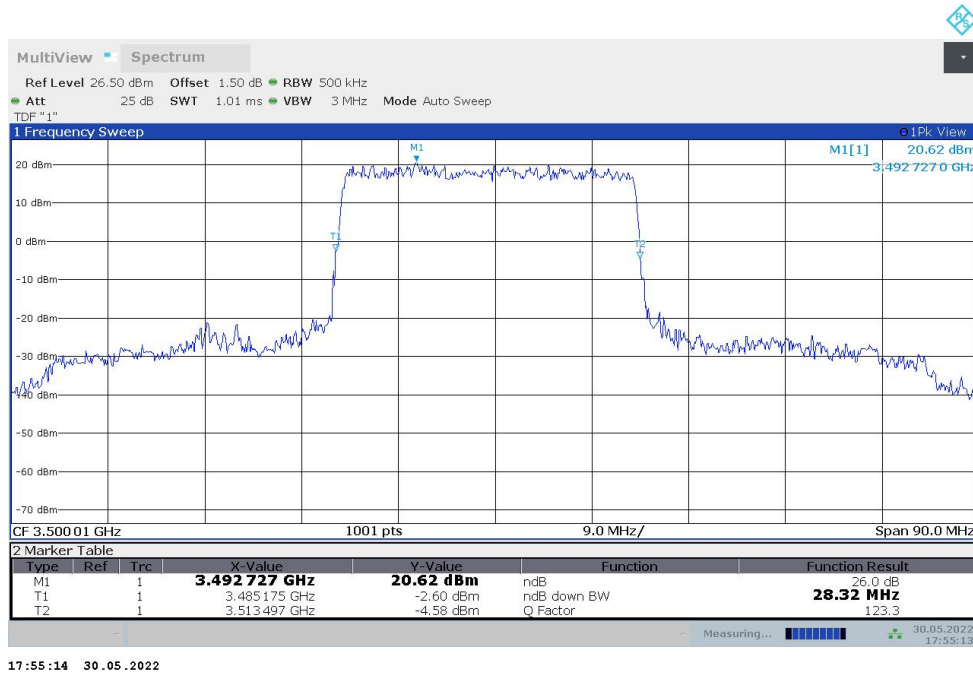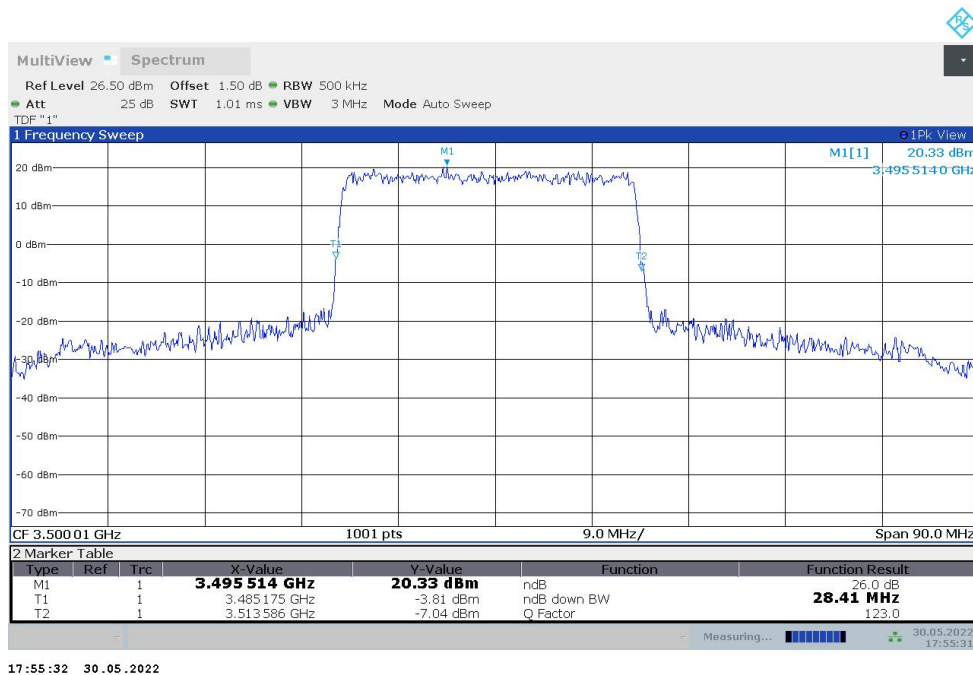n78L,30MHz Bandwidth,DFT-s-pi/2 BPSK (-26dBc BW)

n78L,30MHz Bandwidth,DFT-s-QPSK (-26dBc BW)


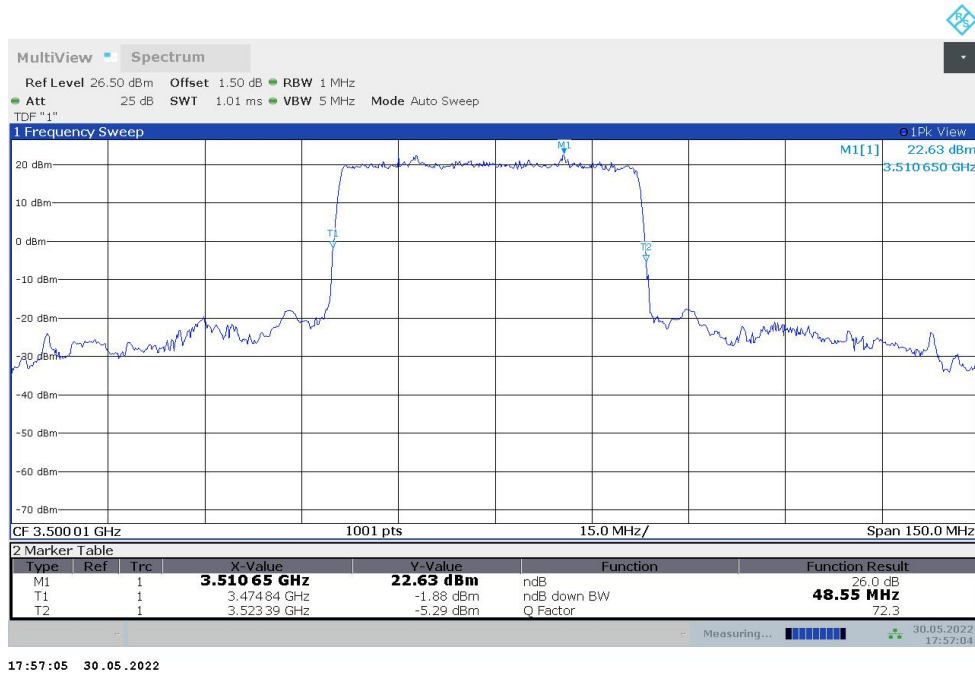
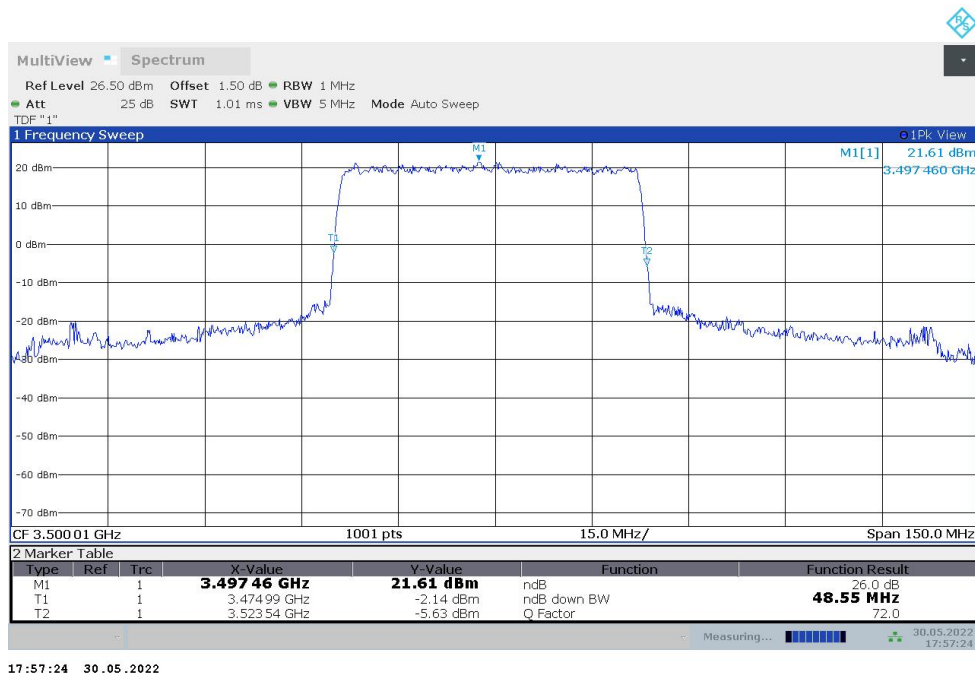
n78L,40MHz(-26dBc)

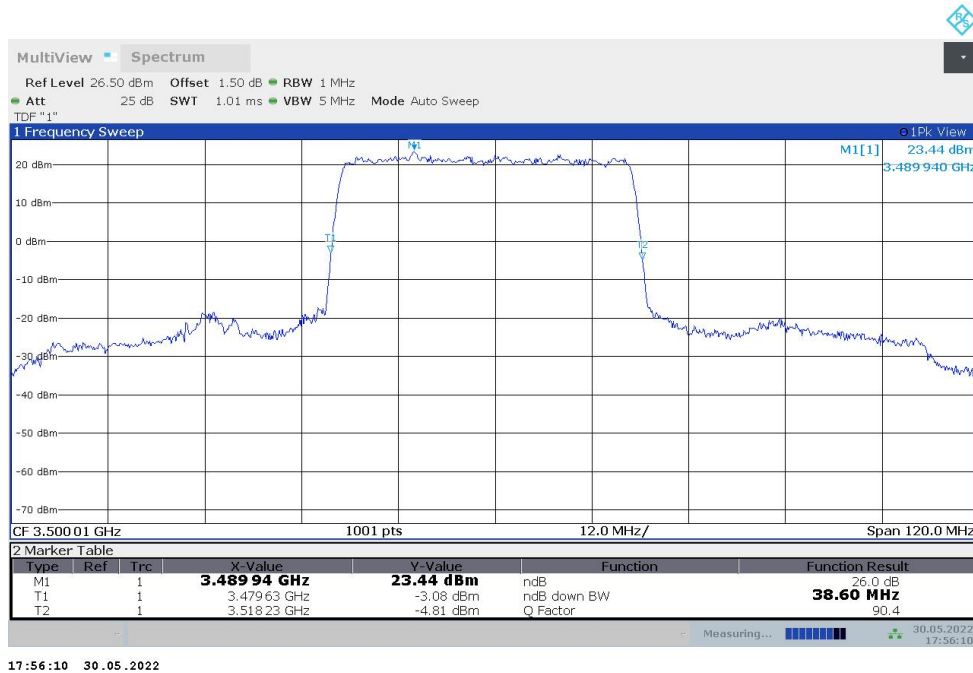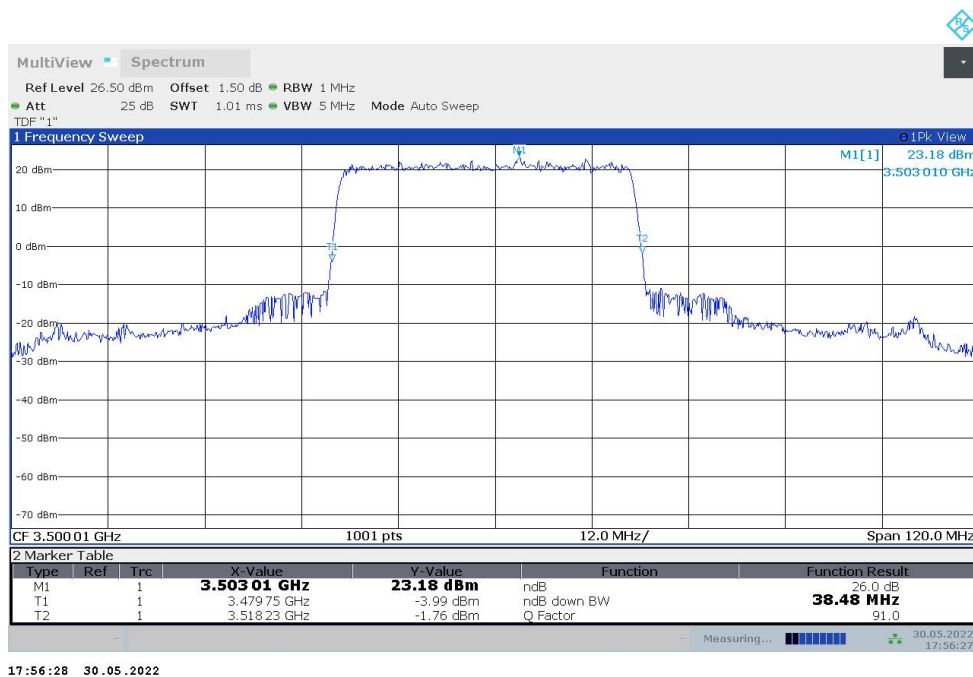Frequency (MHz)	Emission Bandwidth (-26dBc) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
3500.01	38.600	38.480

n78L,40MHz Bandwidth,DFT-s-pi/2 BPSK (-26dBc BW)

n78L,40MHz Bandwidth,DFT-s-QPSK (-26dBc BW)


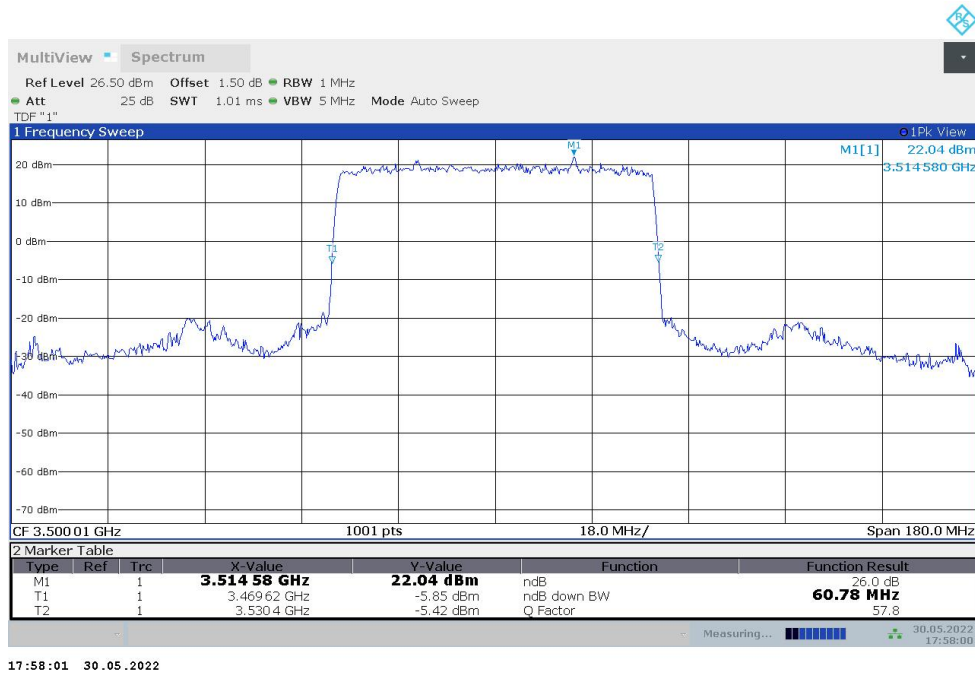
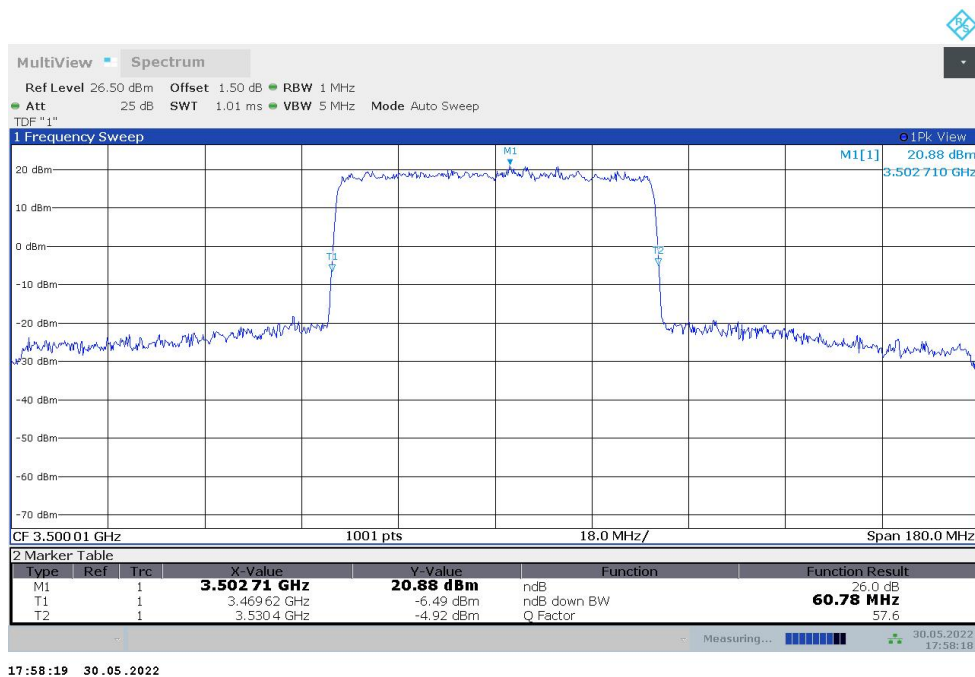
n78L,50MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
3500.01	48.550	48.550

n78L,50MHz Bandwidth,DFT-s-pi/2 BPSK (-26dBc BW)

n78L,50MHz Bandwidth,DFT-s-QPSK (-26dBc BW)


n78L,60MHz(-26dBc)


Frequency (MHz)	Emission Bandwidth (-26dBc) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
3500.01	60.780	60.780

n78L,60MHz Bandwidth,DFT-s-pi/2 BPSK (-26dBc BW)

n78L,60MHz Bandwidth,DFT-s-QPSK (-26dBc BW)


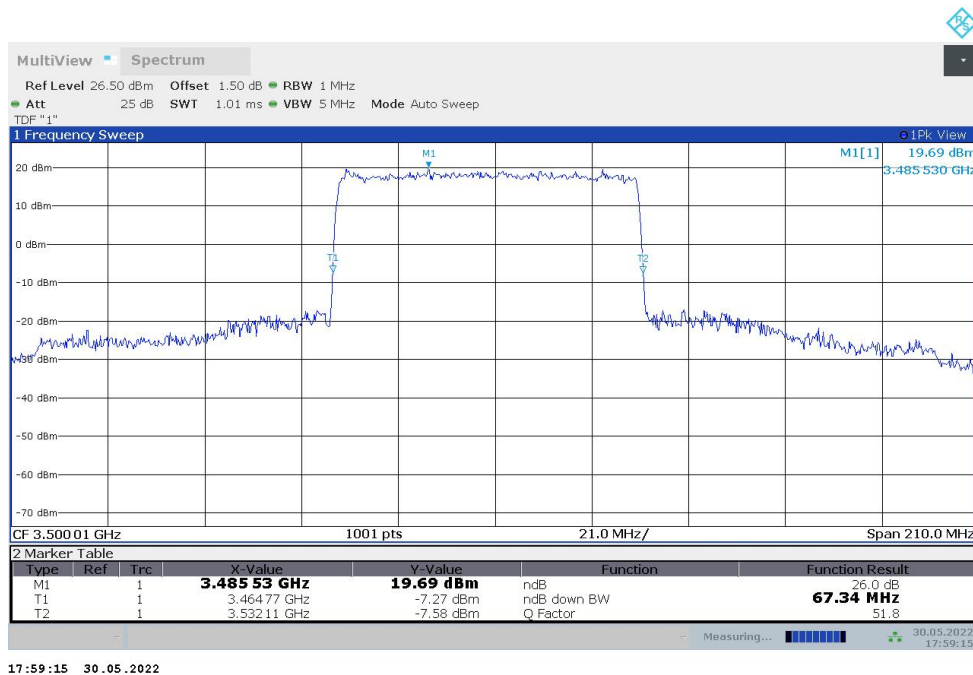
n78L,70MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
3500.01	67.340	67.340

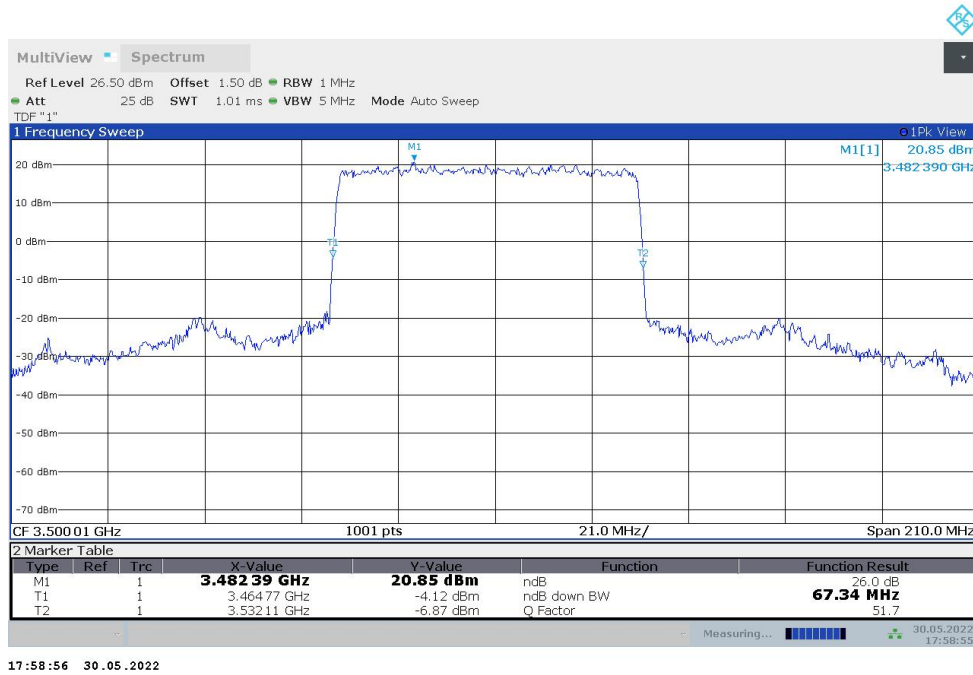n78L,70MHz Bandwidth,DFT-s-pi/2 BPSK (-26dBc BW)




n78L,70MHz Bandwidth,DFT-s-QPSK (-26dBc BW)




n78L,80MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
3500.01	82.480	82.240

n78L,80MHz Bandwidth,DFT-s-pi/2 BPSK (-26dBc BW)

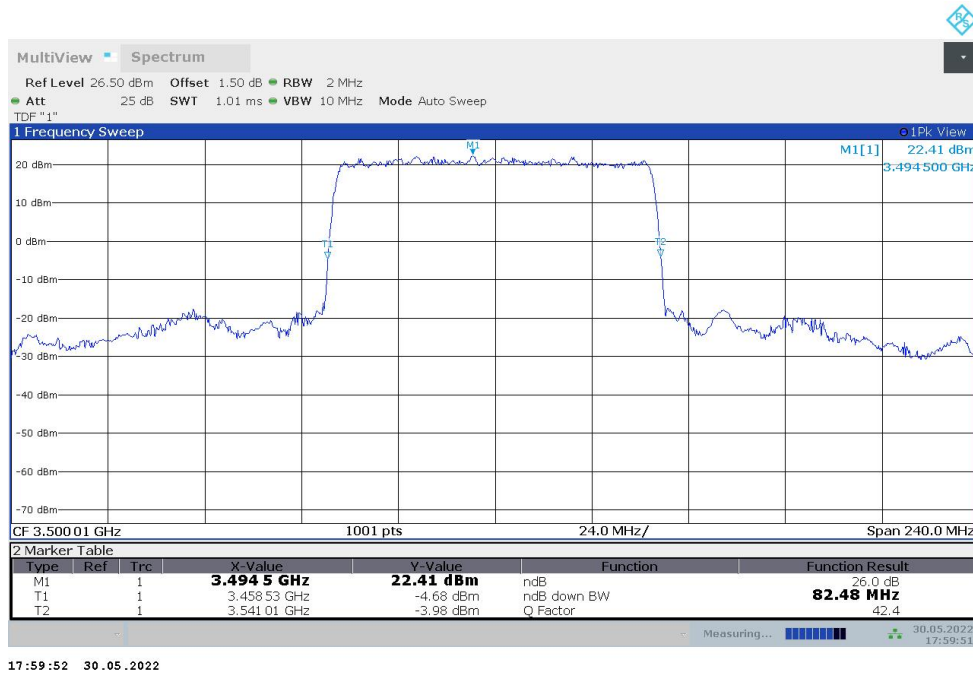


n78L,80MHz Bandwidth,DFT-s-QPSK (-26dBc BW)

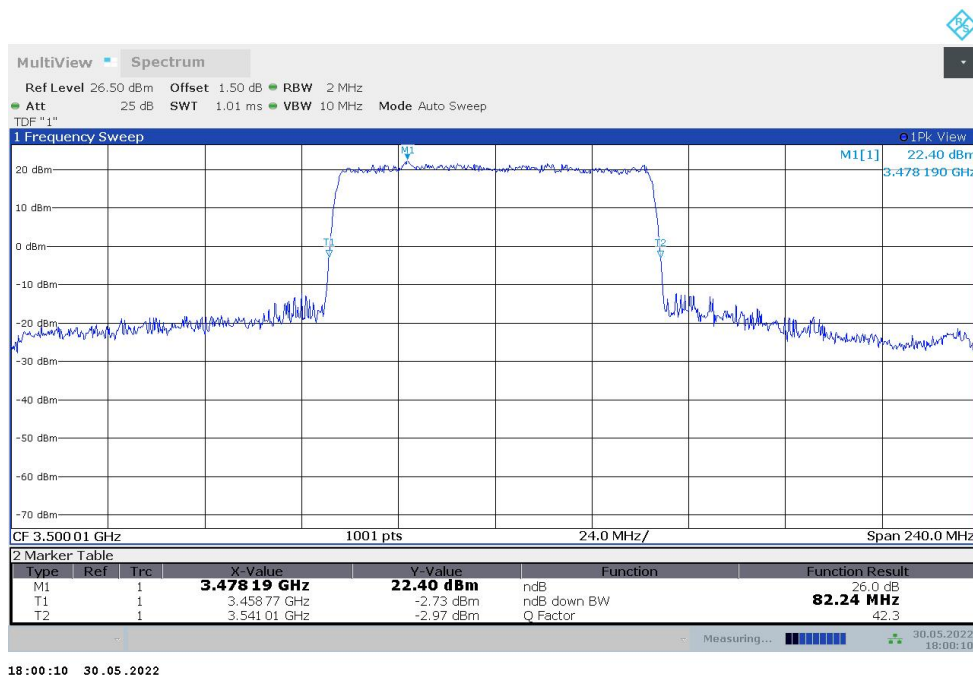


n78L,90MHz(-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc) (MHz)	
	DFT-s-pi/2 BPSK	DFT-s-QPSK
3500.01	91.980	92.250

n78L,90MHz Bandwidth,DFT-s-pi/2 BPSK (-26dBc BW)

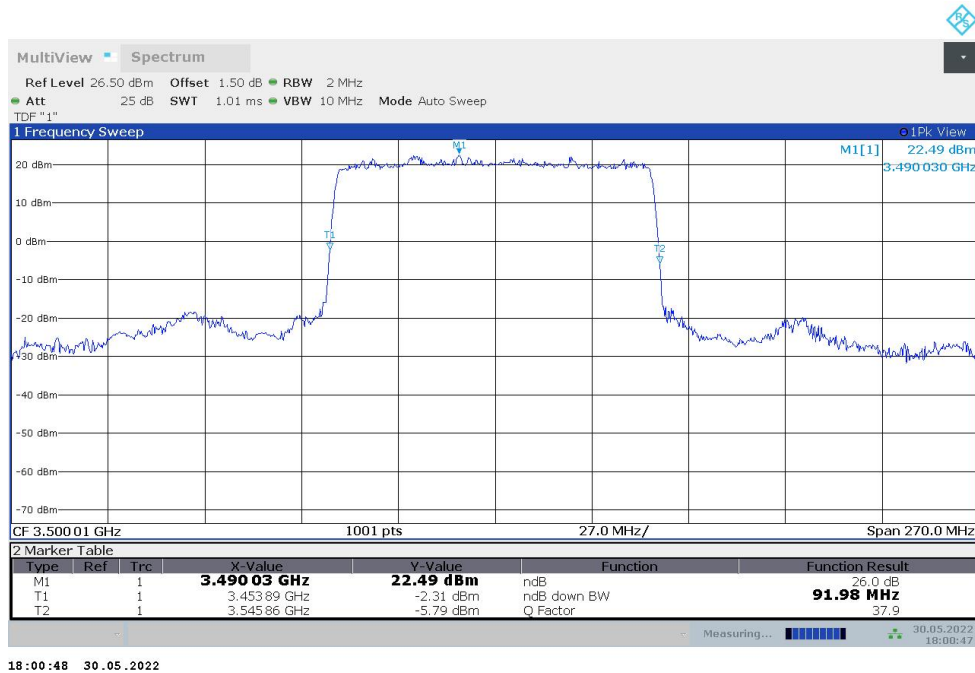

n78L,90MHz Bandwidth,DFT-s-QPSK (-26dBc BW)

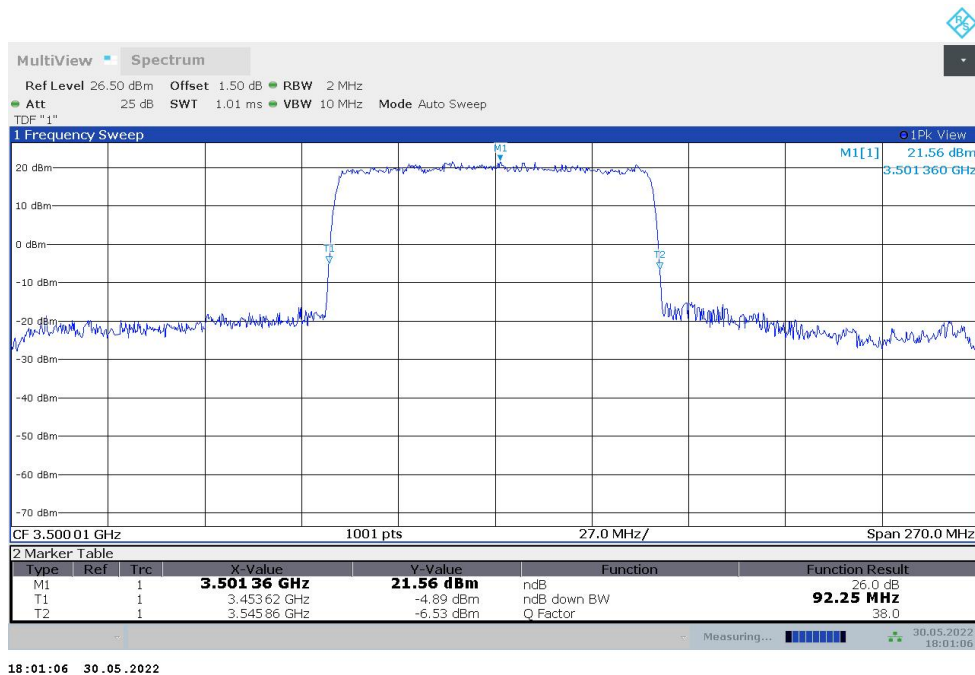

A.6 Band Edge Compliance

A.6.1 Measurement limit

Part 22.917 specifies that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Part 27.53(m) specifies for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Part 27.53(n) states for mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph (n)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


Part 27.53(l) states for mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

Compliance with this paragraph (l)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

A.6.2 Measurement result


NR n5

OBW: 1RB-LOW_offset

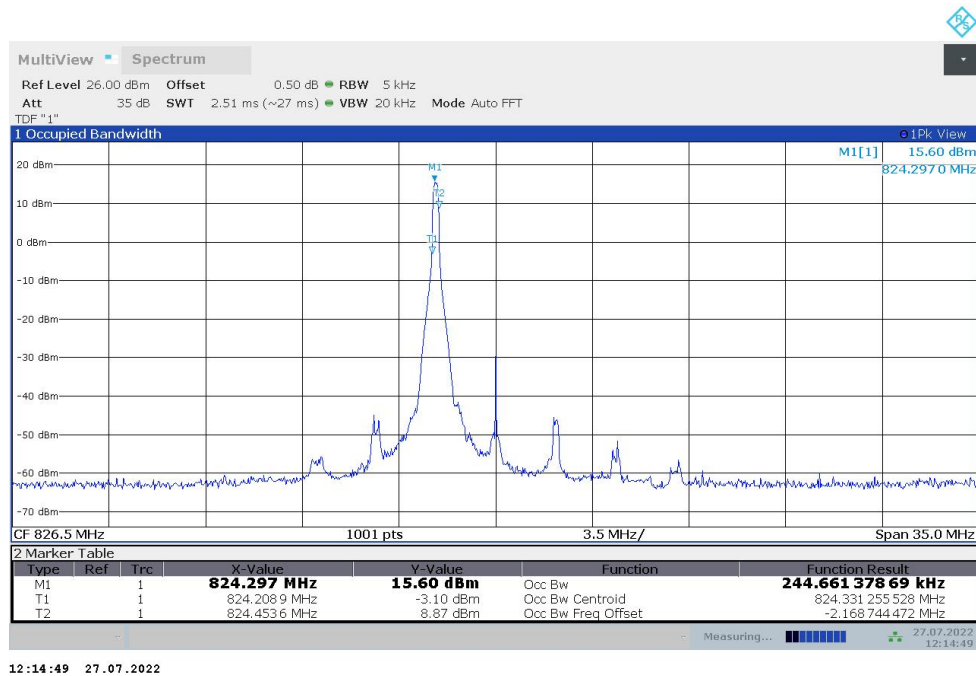


12:14:49 27.07.2022

LOW BAND EDGE BLOCK-1RB-LOW_offset

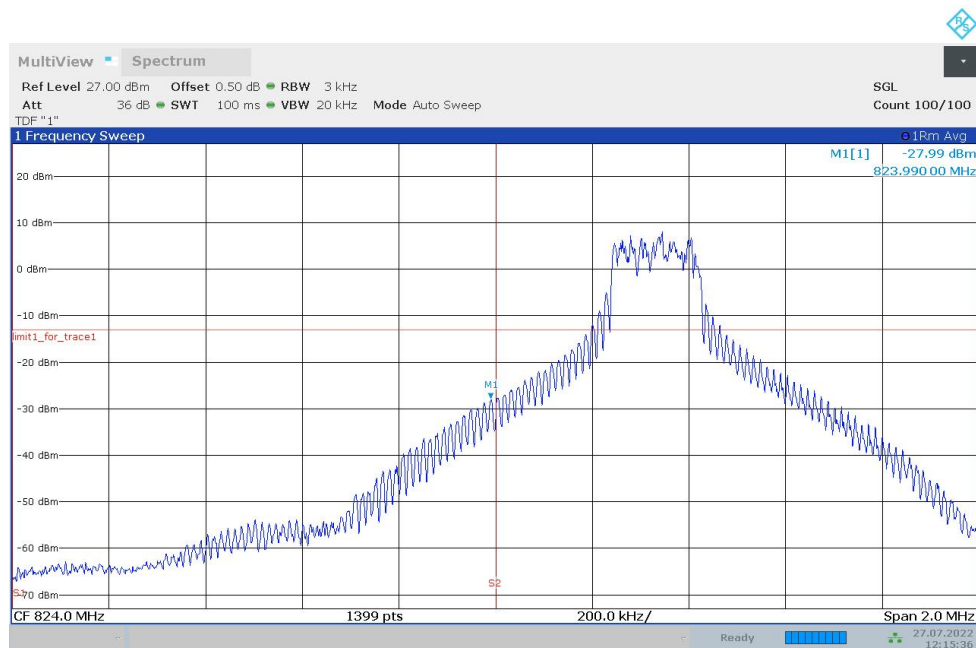


12:15:36 27.07.2022


OBW: 1RB-HIGH_offset

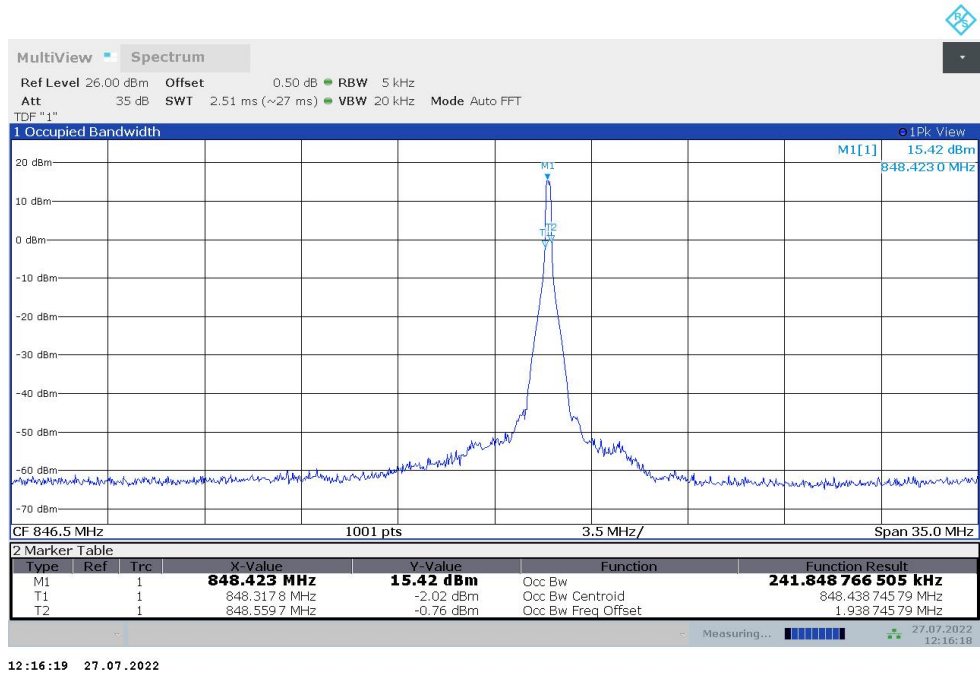


HIGH BAND EDGE BLOCK-1RB-HIGH_offset

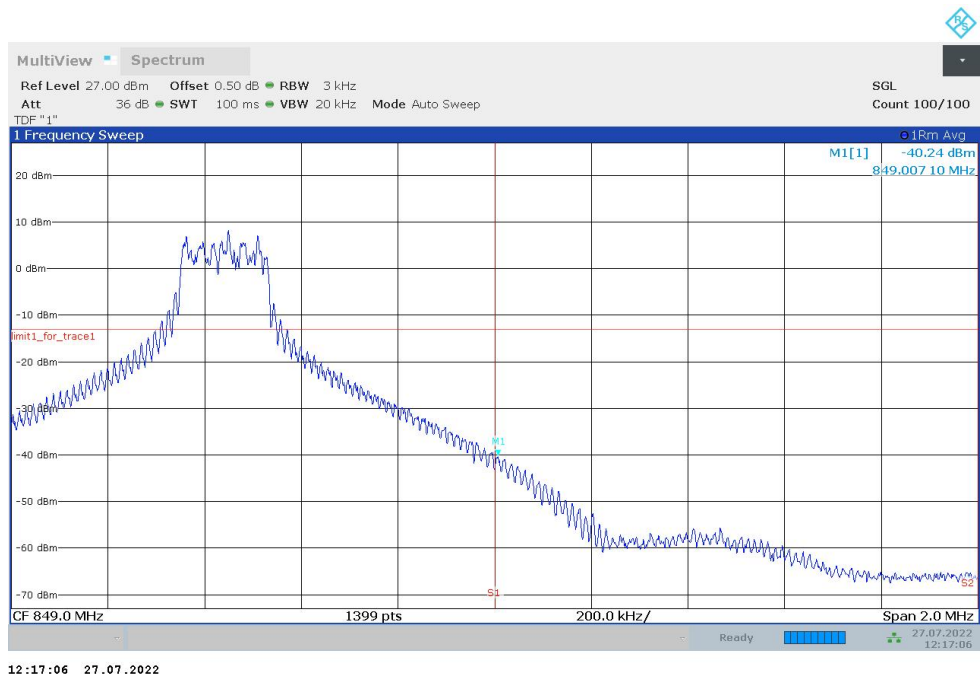

LOW BAND EDGE BLOCK-20M-100%RB

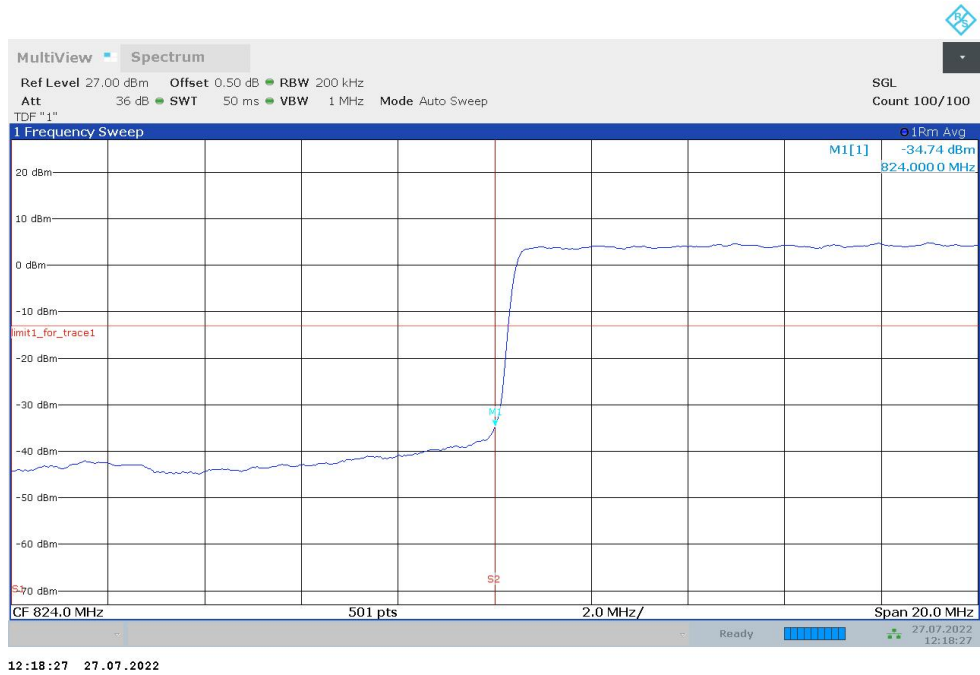


HIGH BAND EDGE BLOCK-20M-100%RB

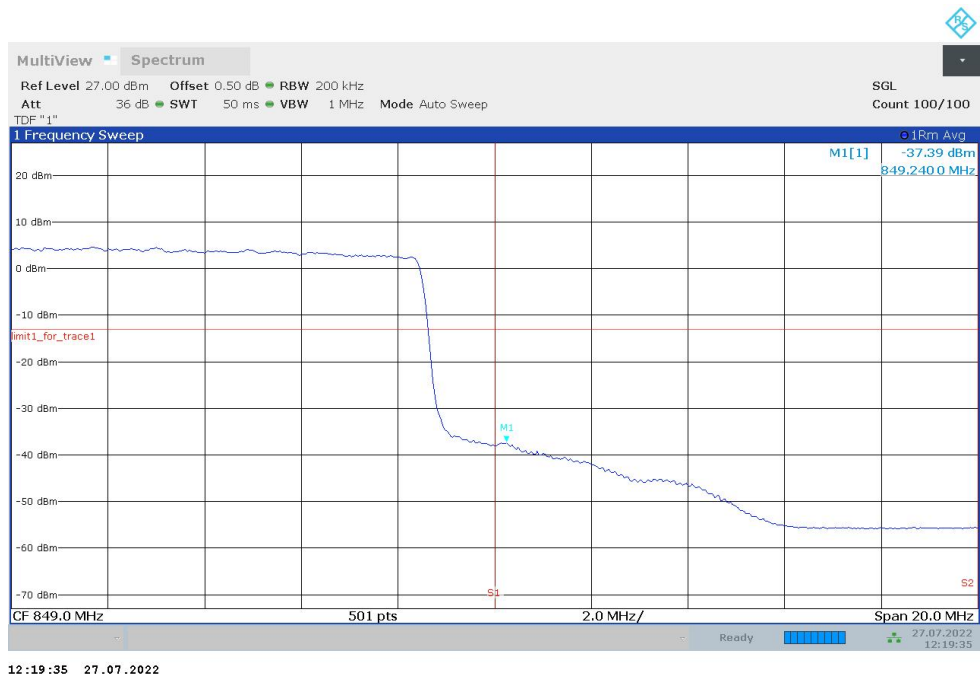


NR n7

OBW: 1RB-LOW_offset

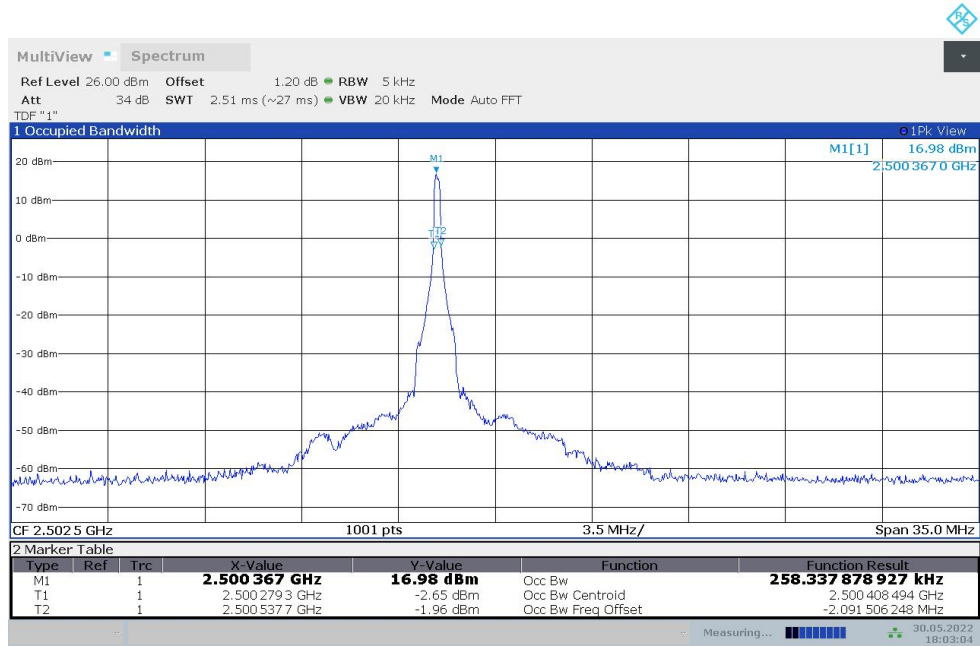


18:03:04 30.05.2022

LOW BAND EDGE BLOCK-1RB-LOW_offset

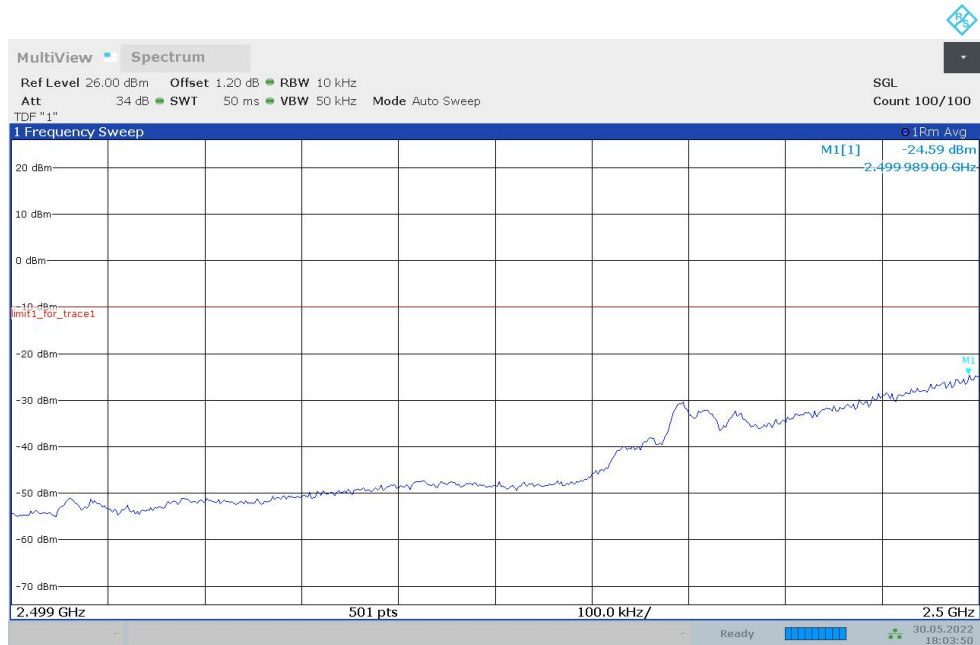

18:03:50 30.05.2022

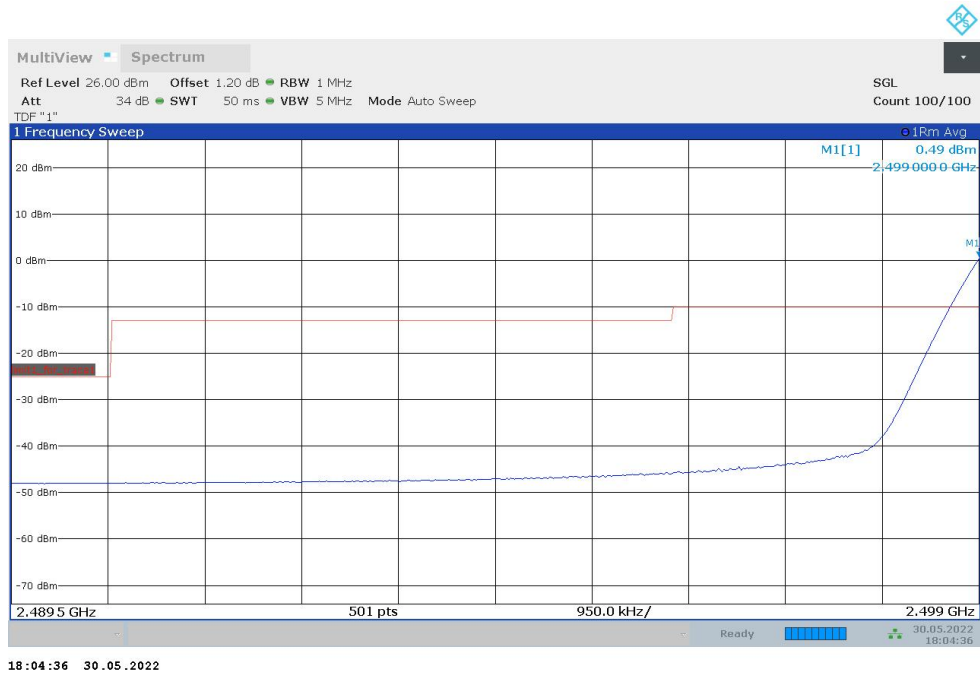

Channel Power

