

AVERAGE Results:
802.11a

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17983.00	42.53	-25.50	46.66	21.37	54.00	11.47	H
17997.80	42.42	-25.50	46.66	21.26	54.00	11.58	H
13260.10	37.84	-29.67	39.55	27.96	54.00	16.16	H
13336.00	37.66	-29.49	39.71	27.44	54.00	16.34	H
5150.00	51.17	-27.61	33.67	45.11	54.00	2.83	H
5149.80	51.02	-27.61	33.67	44.96	54.00	2.98	H

Channel 40

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17978.50	42.40	-25.50	46.66	21.24	54.00	11.60	V
17944.50	42.37	-25.50	46.66	21.21	54.00	11.63	V
13347.50	37.62	-29.49	39.71	27.40	54.00	16.38	V
13287.00	37.59	-29.67	39.55	27.71	54.00	16.41	H
11856.00	36.11	-31.85	39.05	28.91	54.00	17.89	V
11859.80	36.04	-31.85	39.05	28.84	54.00	17.96	H

Channel 48

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17965.90	42.40	-25.50	46.66	21.24	54.00	11.60	V
17978.00	42.34	-25.50	46.66	21.18	54.00	11.66	H
13270.00	37.79	-29.67	39.55	27.91	54.00	16.21	V
13344.20	37.77	-29.49	39.71	27.55	54.00	16.23	V
11862.50	36.40	-31.85	39.05	29.20	54.00	17.60	H
11922.50	36.27	-31.48	39.09	28.66	54.00	17.73	H

Channel 52

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17995.00	42.32	-25.50	46.66	21.16	54.00	11.68	V
17992.30	42.19	-25.50	46.66	21.03	54.00	11.81	V
13277.10	37.71	-29.67	39.55	27.83	54.00	16.29	H
13273.30	37.54	-29.67	39.55	27.66	54.00	16.46	H
11783.40	36.23	-31.99	38.98	29.24	54.00	17.77	H
11862.50	36.11	-31.85	39.05	28.91	54.00	17.89	V

Channel 56

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17998.90	42.22	-25.50	46.66	21.06	54.00	11.78	H
17996.70	42.15	-25.50	46.66	20.99	54.00	11.85	V
13341.50	37.82	-29.49	39.71	27.60	54.00	16.18	H
13294.20	37.56	-29.49	39.71	27.34	54.00	16.44	V
11857.00	36.14	-31.85	39.05	28.94	54.00	17.86	V
11870.20	36.13	-31.85	39.05	28.93	54.00	17.87	V

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17952.70	42.20	-25.50	46.66	21.04	54.00	11.80	V
17984.00	42.12	-25.50	46.66	20.96	54.00	11.88	H
13340.40	38.19	-29.49	39.71	27.97	54.00	15.81	V
13343.10	37.60	-29.49	39.71	27.38	54.00	16.40	H
5350.10	45.53	-27.43	34.01	38.95	54.00	8.47	H
5350.00	45.38	-27.43	34.01	38.80	54.00	8.62	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17969.80	42.49	-25.50	46.66	21.33	54.00	11.51	H
17955.50	42.32	-25.50	46.66	21.16	54.00	11.68	H
13271.10	37.88	-29.67	39.55	28.00	54.00	16.12	H
13350.30	37.81	-29.49	39.71	27.59	54.00	16.19	V
5459.80	43.45	-27.18	34.17	36.46	54.00	10.55	H
5459.40	43.39	-27.18	34.17	36.40	54.00	10.61	H

Channel 120

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17985.70	42.24	-25.50	46.66	21.08	54.00	11.76	H
17980.80	42.21	-25.50	46.66	21.05	54.00	11.79	H
13269.50	37.65	-29.67	39.55	27.77	54.00	16.35	V
13343.10	37.65	-29.49	39.71	27.43	54.00	16.35	V
11839.50	36.39	-31.85	39.05	29.19	54.00	17.61	V
11814.70	36.20	-31.85	39.05	29.00	54.00	17.80	V

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17982.40	42.39	-25.50	46.66	21.23	54.00	11.61	V
17996.20	42.34	-25.50	46.66	21.18	54.00	11.66	V
13264.00	37.70	-29.67	39.55	27.82	54.00	16.30	V
13273.30	37.70	-29.67	39.55	27.82	54.00	16.30	V
11854.30	36.57	-31.85	39.05	29.37	54.00	17.43	H
11845.00	36.26	-31.85	39.05	29.06	54.00	17.74	V

802.11n-HT20

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17974.70	42.35	-25.50	46.66	21.19	54.00	11.65	H
17985.20	42.16	-25.50	46.66	21.00	54.00	11.84	V
13253.00	37.83	-29.67	39.55	27.95	54.00	16.17	V
13334.40	37.69	-29.49	39.71	27.47	54.00	16.31	V
5149.90	46.78	-27.61	33.67	40.72	54.00	7.22	H
5149.60	46.57	-27.61	33.67	40.51	54.00	7.43	H

Channel 40

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17948.80	42.29	-25.50	46.66	21.13	54.00	11.71	H
17985.70	42.15	-25.50	46.66	20.99	54.00	11.85	H
13343.70	37.73	-29.49	39.71	27.51	54.00	16.27	H
13282.10	37.63	-29.67	39.55	27.75	54.00	16.37	H
11865.30	36.18	-31.85	39.05	28.98	54.00	17.82	V
11848.80	36.15	-31.85	39.05	28.95	54.00	17.85	H

Channel 48

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17969.20	42.49	-25.50	46.66	21.33	54.00	11.51	V
17958.80	42.31	-25.50	46.66	21.15	54.00	11.69	H
13281.00	37.55	-29.67	39.55	27.67	54.00	16.45	H
13345.40	37.54	-29.49	39.71	27.32	54.00	16.46	H
11847.10	36.08	-31.85	39.05	28.88	54.00	17.92	V
11847.70	36.06	-31.85	39.05	28.86	54.00	17.94	V

Channel 52

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17963.20	42.32	-25.50	46.66	21.16	54.00	11.68	V
17972.00	42.22	-25.50	46.66	21.06	54.00	11.78	H
13290.40	37.47	-29.67	39.55	27.59	54.00	16.53	V
13352.00	37.46	-29.49	39.71	27.24	54.00	16.54	H
11835.60	36.12	-31.85	39.05	28.92	54.00	17.88	V
11848.20	36.06	-31.85	39.05	28.86	54.00	17.94	V

Channel 56

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17962.00	42.15	-25.50	46.66	20.99	54.00	11.85	V
17964.80	42.14	-25.50	46.66	20.98	54.00	11.86	V
13338.80	37.94	-29.49	39.71	27.72	54.00	16.06	H
13267.80	37.73	-29.67	39.55	27.85	54.00	16.27	H
11846.60	36.20	-31.85	39.05	29.00	54.00	17.80	V
11864.20	36.14	-31.85	39.05	28.94	54.00	17.86	V

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17996.70	42.16	-25.50	46.66	21.00	54.00	11.84	V
17965.30	42.06	-25.50	46.66	20.90	54.00	11.94	H
13268.90	37.76	-29.67	39.55	27.88	54.00	16.24	H
13264.00	37.63	-29.67	39.55	27.75	54.00	16.37	V
5350.00	50.39	-27.43	34.01	43.81	54.00	3.61	H
5350.10	50.35	-27.43	34.01	43.77	54.00	3.65	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17996.70	42.52	-25.50	46.66	21.36	54.00	11.48	H
17995.60	42.26	-25.50	46.66	21.10	54.00	11.74	H
13351.40	37.68	-29.49	39.71	27.46	54.00	16.32	H
13352.00	37.56	-29.49	39.71	27.34	54.00	16.44	H
5459.10	42.95	-27.18	34.17	35.96	54.00	11.05	H
5459.00	42.87	-27.18	34.17	35.88	54.00	11.13	H

Channel 120

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17986.20	42.12	-25.50	46.66	20.96	54.00	11.88	V
17976.90	42.11	-25.50	46.66	20.95	54.00	11.89	H
13280.50	37.66	-29.67	39.55	27.78	54.00	16.34	V
13348.60	37.64	-29.49	39.71	27.42	54.00	16.36	V
11787.20	36.00	-31.99	38.98	29.01	54.00	18.00	H
11868.00	35.97	-31.85	39.05	28.77	54.00	18.03	V

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17976.30	42.20	-25.50	46.66	21.04	54.00	11.80	H
17979.70	42.16	-25.50	46.66	21.00	54.00	11.84	V
13338.20	37.63	-29.49	39.71	27.41	54.00	16.37	H
13343.70	37.58	-29.49	39.71	27.36	54.00	16.42	V
11869.70	36.16	-31.85	39.05	28.96	54.00	17.84	H
11821.30	36.07	-31.85	39.05	28.87	54.00	17.93	V

802.11n-HT40

Channel 38

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17974.20	42.11	-25.50	46.66	20.95	54.00	11.89	V
17979.70	42.09	-25.50	46.66	20.93	54.00	11.91	H
13265.60	37.74	-29.67	39.55	27.86	54.00	16.26	V
13257.40	37.70	-29.67	39.55	27.82	54.00	16.30	V
5149.90	48.85	-27.61	33.67	42.79	54.00	5.15	H
5150.00	48.84	-27.61	33.67	42.78	54.00	5.16	H

Channel 46

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17983.50	42.40	-25.50	46.66	21.24	54.00	11.60	V
17954.90	42.33	-25.50	46.66	21.17	54.00	11.67	H
13253.00	38.04	-29.67	39.55	28.16	54.00	15.96	V
13273.30	37.74	-29.67	39.55	27.86	54.00	16.26	V
11851.00	36.38	-31.85	39.05	29.18	54.00	17.62	V
11803.70	36.03	-31.85	39.05	28.83	54.00	17.97	H

Channel 54

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17945.50	42.32	-25.50	46.66	21.16	54.00	11.68	V
17954.90	42.22	-25.50	46.66	21.06	54.00	11.78	H
13265.60	37.60	-29.67	39.55	27.72	54.00	16.40	V
13257.90	37.56	-29.67	39.55	27.68	54.00	16.44	V
11868.60	36.25	-31.85	39.05	29.05	54.00	17.75	H
11847.10	36.23	-31.85	39.05	29.03	54.00	17.77	H

Channel 62

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17976.90	42.22	-25.50	46.66	21.06	54.00	11.78	H
17964.80	42.14	-25.50	46.66	20.98	54.00	11.86	H
13297.50	37.57	-29.49	39.71	27.35	54.00	16.43	V
13265.00	37.56	-29.67	39.55	27.68	54.00	16.44	V
5350.40	49.21	-27.43	34.01	42.63	54.00	4.79	V
5350.70	49.18	-27.43	34.01	42.60	54.00	4.82	V

Channel 102

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17967.50	42.33	-25.50	46.66	21.17	54.00	11.67	V
17989.50	42.19	-25.50	46.66	21.03	54.00	11.81	V
13284.90	37.63	-29.67	39.55	27.75	54.00	16.37	V
13340.40	37.61	-29.49	39.71	27.39	54.00	16.39	H
5456.30	42.46	-27.18	34.17	35.47	54.00	11.54	H
5457.80	42.42	-27.18	34.17	35.43	54.00	11.58	H

Channel 118

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17984.00	42.26	-25.50	46.66	21.10	54.00	11.74	V
17982.40	42.25	-25.50	46.66	21.09	54.00	11.75	H
13264.50	37.88	-29.67	39.55	28.00	54.00	16.12	V
13251.30	37.72	-29.67	39.55	27.84	54.00	16.28	V
11787.20	36.43	-31.99	38.98	29.44	54.00	17.57	H
11798.80	36.18	-31.85	39.05	28.98	54.00	17.82	V

Channel 134

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17968.70	42.39	-25.50	46.66	21.23	54.00	11.61	H
17978.50	42.24	-25.50	46.66	21.08	54.00	11.76	V
13281.50	37.69	-29.67	39.55	27.81	54.00	16.31	H
13345.90	37.65	-29.49	39.71	27.43	54.00	16.35	V
11870.80	36.22	-31.85	39.05	29.02	54.00	17.78	V
11796.50	36.18	-31.85	39.05	28.98	54.00	17.82	H

802.11ac-HT20

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17956.00	42.32	-25.50	46.66	21.16	54.00	11.68	H
17990.10	42.10	-25.50	46.66	20.94	54.00	11.90	V
13343.10	37.52	-29.49	39.71	27.30	54.00	16.48	V
13346.50	37.48	-29.49	39.71	27.26	54.00	16.52	V
5149.90	46.73	-27.61	33.67	40.67	54.00	7.27	H
5150.00	46.64	-27.61	33.67	40.58	54.00	7.36	H

Channel 40

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17985.70	42.25	-25.50	46.66	21.09	54.00	11.75	H
17956.50	42.19	-25.50	46.66	21.03	54.00	11.81	H
13345.90	37.75	-29.49	39.71	27.53	54.00	16.25	V
13346.50	37.56	-29.49	39.71	27.34	54.00	16.44	H
11856.00	36.22	-31.85	39.05	29.02	54.00	17.78	V
11846.60	36.00	-31.85	39.05	28.80	54.00	18.00	H

Channel 48

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17969.20	42.27	-25.50	46.66	21.11	54.00	11.73	V
17962.60	42.22	-25.50	46.66	21.06	54.00	11.78	H
13259.50	37.95	-29.67	39.55	28.07	54.00	16.05	V
13350.90	37.80	-29.49	39.71	27.58	54.00	16.20	V
11842.80	36.33	-31.85	39.05	29.13	54.00	17.67	H
11848.80	36.29	-31.85	39.05	29.09	54.00	17.71	H

Channel 52

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17966.50	42.16	-25.50	46.66	21.00	54.00	11.84	H
17992.30	42.09	-25.50	46.66	20.93	54.00	11.91	H
13342.00	37.78	-29.49	39.71	27.56	54.00	16.22	V
13255.70	37.72	-29.67	39.55	27.84	54.00	16.28	H
11853.80	36.28	-31.85	39.05	29.08	54.00	17.72	V
11862.00	36.10	-31.85	39.05	28.90	54.00	17.90	V

Channel 56

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17966.50	42.16	-25.50	46.66	21.00	54.00	11.84	H
17992.30	42.09	-25.50	46.66	20.93	54.00	11.91	H
13342.00	37.78	-29.49	39.71	27.56	54.00	16.22	V
13255.70	37.72	-29.67	39.55	27.84	54.00	16.28	H
11853.80	36.28	-31.85	39.05	29.08	54.00	17.72	V
11862.00	36.10	-31.85	39.05	28.90	54.00	17.90	V

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17960.40	42.15	-25.50	46.66	20.99	54.00	11.85	V
17974.70	42.07	-25.50	46.66	20.91	54.00	11.93	H
13344.80	37.58	-29.49	39.71	27.36	54.00	16.42	V
13276.60	37.51	-29.67	39.55	27.63	54.00	16.49	V
5350.05	49.83	-27.43	34.01	43.25	54.00	4.17	H
5350.03	49.69	-27.43	34.01	43.11	54.00	4.31	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17996.70	42.52	-25.50	46.66	21.36	54.00	11.48	H
17995.60	42.26	-25.50	46.66	21.10	54.00	11.74	H
13351.40	37.68	-29.49	39.71	27.46	54.00	16.32	H
13352.00	37.56	-29.49	39.71	27.34	54.00	16.44	H
5459.10	42.95	-27.18	34.17	35.96	54.00	11.05	H
5459.00	42.87	-27.18	34.17	35.88	54.00	11.13	H

Channel 120

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17986.20	42.12	-25.50	46.66	20.96	54.00	11.88	V
17976.90	42.11	-25.50	46.66	20.95	54.00	11.89	H
13280.50	37.66	-29.67	39.55	27.78	54.00	16.34	V
13348.60	37.64	-29.49	39.71	27.42	54.00	16.36	V
11787.20	36.00	-31.99	38.98	29.01	54.00	18.00	H
11868.00	35.97	-31.85	39.05	28.77	54.00	18.03	V

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17976.30	42.20	-25.50	46.66	21.04	54.00	11.80	H
17979.70	42.16	-25.50	46.66	21.00	54.00	11.84	V
13338.20	37.63	-29.49	39.71	27.41	54.00	16.37	H
13343.70	37.58	-29.49	39.71	27.36	54.00	16.42	V
11869.70	36.16	-31.85	39.05	28.96	54.00	17.84	H
11821.30	36.07	-31.85	39.05	28.87	54.00	17.93	V

802.11ac-HT40

Channel 38

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17946.70	42.25	-25.50	46.66	21.09	54.00	11.75	V
17977.50	42.20	-25.50	46.66	21.04	54.00	11.80	V
13341.00	37.96	-29.49	39.71	27.74	54.00	16.04	V
13263.40	37.71	-29.67	39.55	27.83	54.00	16.29	V
5149.80	48.66	-27.61	33.67	42.60	54.00	5.34	H
5149.70	48.63	-27.61	33.67	42.57	54.00	5.37	H

Channel 46

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17992.30	42.44	-25.50	46.66	21.28	54.00	11.56	H
17935.70	42.15	-25.50	46.66	20.99	54.00	11.85	H
13337.60	37.53	-29.49	39.71	27.31	54.00	16.47	V
13350.90	37.51	-29.49	39.71	27.29	54.00	16.49	V
11779.00	36.20	-31.99	38.98	29.21	54.00	17.80	V
11861.50	36.20	-31.85	39.05	29.00	54.00	17.80	V

Channel 54

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17968.10	42.41	-25.50	46.66	21.25	54.00	11.59	H
17969.20	42.23	-25.50	46.66	21.07	54.00	11.77	H
13262.90	37.73	-29.67	39.55	27.85	54.00	16.27	H
13275.00	37.69	-29.67	39.55	27.81	54.00	16.31	H
11875.20	36.12	-31.85	39.05	28.92	54.00	17.88	V
11821.90	36.10	-31.85	39.05	28.90	54.00	17.90	H

Channel 62

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17992.30	42.07	-25.50	46.66	20.91	54.00	11.93	V
17954.30	42.06	-25.50	46.66	20.90	54.00	11.94	V
13337.10	37.60	-29.49	39.71	27.38	54.00	16.40	V
13356.40	37.57	-29.49	39.71	27.35	54.00	16.43	V
5350.80	47.17	-27.43	34.01	40.59	54.00	6.83	H
5350.20	47.04	-27.43	34.01	40.46	54.00	6.96	H

Channel 102

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17973.00	42.18	-25.50	46.66	21.02	54.00	11.82	V
17975.80	42.17	-25.50	46.66	21.01	54.00	11.83	H
13253.00	37.66	-29.67	39.55	27.78	54.00	16.34	H
13254.00	37.65	-29.67	39.55	27.77	54.00	16.35	H
5455.60	42.79	-27.18	34.17	35.80	54.00	11.21	H
5456.80	42.71	-27.18	34.17	35.72	54.00	11.29	H

Channel 118

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17959.80	42.26	-25.50	46.66	21.10	54.00	11.74	V
17969.80	42.23	-25.50	46.66	21.07	54.00	11.77	V
13271.60	37.50	-29.67	39.55	27.62	54.00	16.50	V
13255.10	37.47	-29.67	39.55	27.59	54.00	16.53	V
11848.20	36.28	-31.85	39.05	29.08	54.00	17.72	H
11840.00	36.13	-31.85	39.05	28.93	54.00	17.87	H

Channel 134

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17982.40	42.07	-25.50	46.66	20.91	54.00	11.93	V
17931.80	42.06	-25.50	46.66	20.90	54.00	11.94	H
13342.00	37.77	-29.49	39.71	27.55	54.00	16.23	V
13352.00	37.47	-29.49	39.71	27.25	54.00	16.53	H
11802.60	36.18	-31.85	39.05	28.98	54.00	17.82	V
11792.10	35.99	-31.99	38.98	29.00	54.00	18.01	V

802.11ac-HT80
Channel 42

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17978.50	42.38	-25.50	46.66	21.22	54.00	11.62	H
17954.30	42.26	-25.50	46.66	21.10	54.00	11.74	H
13256.20	37.84	-29.67	39.55	27.96	54.00	16.16	V
13272.80	37.74	-29.67	39.55	27.86	54.00	16.26	V
5149.90	51.77	-27.61	33.67	45.71	54.00	2.23	H
5150.00	51.71	-27.61	33.67	45.65	54.00	2.29	H

Channel 58

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17987.90	42.16	-25.50	46.66	21.00	54.00	11.84	V
17972.50	42.12	-25.50	46.66	20.96	54.00	11.88	V
13274.40	37.54	-29.67	39.55	27.66	54.00	16.46	V
13264.00	37.51	-29.67	39.55	27.63	54.00	16.49	H
5350.10	48.12	-27.43	34.01	41.54	54.00	5.88	H
5350.20	48.05	-27.43	34.01	41.47	54.00	5.95	H

Channel 106

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17965.90	42.22	-25.50	46.66	21.06	54.00	11.78	H
17984.60	42.15	-25.50	46.66	20.99	54.00	11.85	V
13350.90	37.68	-29.49	39.71	27.46	54.00	16.32	V
13264.50	37.64	-29.67	39.55	27.76	54.00	16.36	V
5457.90	44.48	-27.18	34.17	37.49	54.00	9.52	H
5458.00	44.38	-27.18	34.17	37.39	54.00	9.62	H

Channel 122

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17984.00	42.54	-25.50	46.66	21.38	54.00	11.46	H
17987.90	42.21	-25.50	46.66	21.05	54.00	11.79	H
13335.50	37.73	-29.49	39.71	27.51	54.00	16.27	V
13344.20	37.66	-29.49	39.71	27.44	54.00	16.34	V
11858.70	36.18	-31.85	39.05	28.98	54.00	17.82	V
11867.00	36.14	-31.85	39.05	28.94	54.00	17.86	V

PEAK Results:
802.11a

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17976.30	54.71	-25.50	46.66	33.55	74.00	19.29	H
17632.00	53.88	-25.74	45.95	33.67	68.30	14.42	H
13681.40	50.90	-29.50	40.43	39.97	68.30	17.40	V
13833.20	50.57	-29.51	41.30	38.78	68.30	17.73	V
5149.80	72.11	-27.61	33.67	66.05	74.00	1.89	H
5147.50	71.33	-27.61	33.67	65.27	74.00	2.67	H

Channel 40

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17956.50	53.76	-25.50	46.66	32.60	74.00	20.24	H
17788.80	53.60	-25.50	46.66	32.44	74.00	20.40	V
13651.70	50.83	-29.50	40.43	39.90	68.30	17.47	V
13738.60	50.66	-29.10	40.86	38.89	68.30	17.64	H
11796.00	47.97	-31.85	39.05	40.77	74.00	26.03	H
11856.50	47.94	-31.85	39.05	40.74	74.00	26.06	H

Channel 48

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17953.80	54.58	-25.50	46.66	33.42	74.00	19.42	V
17968.10	54.08	-25.50	46.66	32.92	74.00	19.92	V
14214.90	50.42	-28.99	42.00	37.40	68.30	17.88	H
13597.80	50.39	-29.50	40.43	39.46	68.30	17.91	V
11603.50	47.96	-32.31	38.91	41.37	74.00	26.04	H
11332.40	47.85	-32.36	38.77	41.45	74.00	26.15	V

Channel 52

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17996.20	54.88	-25.50	46.66	33.72	74.00	19.12	H
17931.20	53.88	-25.50	46.66	32.72	74.00	20.12	V
13645.10	50.54	-29.50	40.43	39.61	68.30	17.76	V
14396.40	50.25	-28.59	42.46	36.38	68.30	18.05	V
11960.50	47.92	-31.48	39.09	40.31	74.00	26.08	V
11850.50	47.88	-31.85	39.05	40.68	74.00	26.12	V

Channel 56

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17941.20	54.56	-25.50	46.66	33.40	74.00	19.44	V
17984.60	54.48	-25.50	46.66	33.32	74.00	19.52	V
13658.30	50.74	-29.50	40.43	39.81	68.30	17.56	V
13335.50	50.56	-29.49	39.71	40.34	74.00	23.44	H
11776.80	48.10	-31.99	38.98	41.11	74.00	25.90	V
11865.30	47.82	-31.85	39.05	40.62	74.00	26.18	H

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17435.70	54.48	-26.85	45.25	36.08	68.30	13.82	H
17400.00	53.80	-26.85	45.25	35.40	68.30	14.50	V
13672.00	50.86	-29.50	40.43	39.93	68.30	17.44	V
13751.20	50.46	-29.10	40.86	38.69	68.30	17.84	H
5350.30	65.94	-27.43	34.01	59.36	74.00	8.06	H
5350.60	64.61	-27.43	34.01	58.03	74.00	9.39	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17995.60	54.89	-25.50	46.66	33.73	74.00	19.11	H
17403.80	54.26	-26.85	45.25	35.86	68.30	14.04	V
14158.80	50.58	-28.99	42.00	37.56	68.30	17.72	H
13691.90	50.38	-29.50	40.43	39.45	68.30	17.92	V
5459.60	61.06	-27.18	34.17	54.07	74.00	12.94	H
5469.90	66.34	-27.18	34.17	59.35	68.30	1.96	H

Channel 120

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17973.00	54.85	-25.50	46.66	33.69	74.00	19.15	V
17952.20	54.20	-25.50	46.66	33.04	74.00	19.80	H
13655.50	50.70	-29.50	40.43	39.77	68.30	17.60	H
13744.10	50.49	-29.10	40.86	38.72	68.30	17.81	V
11925.80	47.82	-31.48	39.09	40.21	74.00	26.18	H
11796.50	47.73	-31.85	39.05	40.53	74.00	26.27	H

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17892.20	53.58	-25.50	46.66	32.42	74.00	20.42	H
17946.70	53.48	-25.50	46.66	32.32	74.00	20.52	V
14614.80	50.39	-27.29	41.90	35.78	68.30	17.91	V
13734.80	50.38	-29.10	40.86	38.61	68.30	17.92	H
5725.50	67.11	-27.07	34.31	59.87	68.30	1.19	H
5725.00	66.96	-27.07	34.31	59.72	68.30	1.34	H

802.11n-HT20

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17918.60	54.44	-25.50	46.66	33.28	74.00	19.56	V
17882.30	53.96	-25.50	46.66	32.80	74.00	20.04	V
13601.10	50.68	-29.50	40.43	39.75	68.30	17.62	H
13685.20	50.67	-29.50	40.43	39.74	68.30	17.63	H
5148.40	68.14	-27.61	33.67	62.08	74.00	5.86	H
5149.80	67.47	-27.61	33.67	61.41	74.00	6.53	H

Channel 40

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17876.20	54.01	-25.50	46.66	32.85	74.00	19.99	H
17951.00	54.00	-25.50	46.66	32.84	74.00	20.00	V
13755.60	50.90	-29.10	40.86	39.13	68.30	17.40	V
13734.20	50.40	-29.10	40.86	38.63	68.30	17.90	H
11799.30	47.97	-31.85	39.05	40.77	74.00	26.03	H
11523.20	47.85	-32.26	38.84	41.28	74.00	26.15	V

Channel 48

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17932.30	54.07	-25.50	46.66	32.91	74.00	19.93	H
17921.30	53.83	-25.50	46.66	32.67	74.00	20.17	V
13717.10	50.52	-29.10	40.86	38.75	68.30	17.78	V
13814.50	50.20	-29.10	40.86	38.43	68.30	18.10	V
11787.20	48.59	-31.99	38.98	41.60	74.00	25.41	V
11811.40	47.80	-31.85	39.05	40.60	74.00	26.20	V

Channel 52

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17968.10	53.71	-25.50	46.66	32.55	74.00	20.29	H
17881.20	53.65	-25.50	46.66	32.49	74.00	20.35	V
13670.40	50.29	-29.50	40.43	39.36	68.30	18.01	V
13757.90	49.95	-29.10	40.86	38.18	68.30	18.35	V
10943.00	47.85	-32.82	38.70	41.97	74.00	26.15	V
11791.00	47.39	-31.99	38.98	40.40	74.00	26.61	H

Channel 56

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17923.50	53.80	-25.50	46.66	32.64	74.00	20.20	H
17957.70	53.37	-25.50	46.66	32.21	74.00	20.63	V
13646.80	50.78	-29.50	40.43	39.85	68.30	17.52	H
13606.00	50.60	-29.50	40.43	39.67	68.30	17.70	V
11412.60	48.57	-32.42	38.79	42.20	74.00	25.43	H
11859.80	47.49	-31.85	39.05	40.29	74.00	26.51	H

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17953.80	54.85	-25.50	46.66	33.69	74.00	19.15	H
17975.20	54.50	-25.50	46.66	33.34	74.00	19.50	H
13651.10	50.43	-29.50	40.43	39.50	68.30	17.87	V
14606.50	50.22	-27.29	41.90	35.61	68.30	18.08	V
5353.10	70.43	-27.43	34.01	63.85	74.00	3.57	H
5351.00	70.29	-27.43	34.01	63.71	74.00	3.71	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17970.80	53.67	-25.50	46.66	32.51	74.00	20.33	H
17953.20	53.49	-25.50	46.66	32.33	74.00	20.51	V
13627.50	50.07	-29.50	40.43	39.14	68.30	18.23	V
13422.40	49.99	-29.49	39.71	39.77	68.30	18.31	V
5457.20	61.23	-27.18	34.17	54.24	74.00	12.77	H
5468.70	66.67	-27.18	34.17	59.68	68.30	1.63	H

Channel 120

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17898.20	54.23	-25.50	46.66	33.07	74.00	19.77	H
17998.90	54.17	-25.50	46.66	33.01	74.00	19.83	H
13749.00	51.12	-29.10	40.86	39.35	68.30	17.18	H
13854.10	50.84	-29.51	41.30	39.05	68.30	17.46	H
11450.60	48.32	-32.26	38.84	41.75	74.00	25.68	V
11802.60	47.98	-31.85	39.05	40.78	74.00	26.02	H

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17419.80	54.07	-26.85	45.25	35.67	68.30	14.23	V
17973.00	53.99	-25.50	46.66	32.83	74.00	20.01	H
13739.70	51.25	-29.10	40.86	39.48	68.30	17.05	H
13748.50	50.36	-29.10	40.86	38.59	68.30	17.94	V
5725.40	67.17	-27.07	34.31	59.93	68.30	1.13	H
5725.30	66.15	-27.07	34.31	58.91	68.30	2.15	H

802.11n-HT40

Channel 38

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17992.80	54.25	-25.50	46.66	33.09	74.00	19.75	H
17994.50	53.54	-25.50	46.66	32.38	74.00	20.46	H
13749.00	51.22	-29.10	40.86	39.45	68.30	17.08	H
13644.00	50.47	-29.50	40.43	39.54	68.30	17.83	H
5147.50	70.43	-27.61	33.67	64.37	74.00	3.57	H
5148.60	70.09	-27.61	33.67	64.03	74.00	3.91	H

Channel 46

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17889.50	54.55	-25.50	46.66	33.39	74.00	19.45	V
17588.00	53.99	-25.74	45.95	33.78	68.30	14.31	H
13642.40	50.26	-29.50	40.43	39.33	68.30	18.04	H
13671.00	50.10	-29.50	40.43	39.17	68.30	18.20	V
10861.50	48.28	-32.33	38.59	42.02	74.00	25.72	H
11999.50	48.14	-31.48	39.09	40.53	74.00	25.86	H

Channel 54

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17968.10	53.97	-25.50	46.66	32.81	74.00	20.03	V
17997.20	53.81	-25.50	46.66	32.65	74.00	20.19	H
13660.00	50.83	-29.50	40.43	39.90	68.30	17.47	V
13746.30	50.79	-29.10	40.86	39.02	68.30	17.51	V
11846.60	47.72	-31.85	39.05	40.52	74.00	26.28	H
11817.50	47.64	-31.85	39.05	40.44	74.00	26.36	V

Channel 62

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17996.70	53.61	-25.50	46.66	32.45	74.00	20.39	H
17977.50	53.48	-25.50	46.66	32.32	74.00	20.52	H
14164.30	50.12	-28.99	42.00	37.10	68.30	18.18	V
13662.10	50.08	-29.50	40.43	39.15	68.30	18.22	H
5350.40	72.20	-27.43	34.01	65.62	74.00	1.80	H
5351.90	72.07	-27.43	34.01	65.49	74.00	1.93	H

Channel 102

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17832.20	54.99	-25.50	46.66	33.83	74.00	19.01	H
17904.80	53.77	-25.50	46.66	32.61	74.00	20.23	V
13656.60	50.46	-29.50	40.43	39.53	68.30	17.84	H
13543.40	50.40	-29.56	39.99	39.97	68.30	17.90	H
5458.30	62.97	-27.18	34.17	55.98	74.00	11.03	H
5466.10	64.69	-27.18	34.17	57.70	68.30	3.61	H

Channel 118

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17948.80	53.98	-25.50	46.66	32.82	74.00	20.02	H
17987.30	53.59	-25.50	46.66	32.43	74.00	20.41	H
13705.60	50.13	-29.10	40.86	38.36	68.30	18.17	V
12955.40	50.05	-30.49	39.24	41.30	68.30	18.25	H
11055.70	47.95	-32.49	38.72	41.71	74.00	26.05	H
11210.80	47.85	-32.60	38.75	41.71	74.00	26.15	H

Channel 134

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17400.00	54.75	-26.85	45.25	36.35	68.30	13.55	V
17308.10	53.79	-25.95	44.35	35.38	68.30	14.51	V
14078.50	50.37	-29.44	41.66	38.15	68.30	17.93	V
14179.70	50.33	-28.99	42.00	37.31	68.30	17.97	V
5737.90	66.63	-27.07	34.31	59.39	68.30	1.67	H
5725.50	66.60	-27.07	34.31	59.36	68.30	1.70	H

802.11ac-HT20

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17996.70	54.14	-25.50	46.66	32.98	74.00	19.86	V
17446.70	53.71	-26.85	45.25	35.31	68.30	14.59	H
13678.60	50.03	-29.50	40.43	39.10	68.30	18.27	H
13550.50	49.88	-29.56	39.99	39.45	68.30	18.42	V
5149.40	67.32	-27.61	33.67	61.26	74.00	6.68	H
5149.70	66.92	-27.61	33.67	60.86	74.00	7.08	H

Channel 40

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17398.80	53.71	-26.85	45.25	35.31	68.30	14.59	V
17419.80	53.27	-26.85	45.25	34.87	68.30	15.03	H
13638.50	50.70	-29.50	40.43	39.77	68.30	17.60	H
13649.50	50.23	-29.50	40.43	39.30	68.30	18.07	H
11444.00	48.54	-32.42	38.79	42.17	74.00	25.46	V
11822.40	47.85	-31.85	39.05	40.65	74.00	26.15	H

Channel 48

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17996.70	54.33	-25.50	46.66	33.17	74.00	19.67	H
17395.50	53.85	-26.85	45.25	35.45	68.30	14.45	V
13658.30	50.47	-29.50	40.43	39.54	68.30	17.83	H
13680.90	50.23	-29.50	40.43	39.30	68.30	18.07	H
11043.00	47.90	-32.49	38.72	41.66	74.00	26.10	V
11774.00	47.54	-31.99	38.98	40.55	74.00	26.46	H

Channel 52

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17976.30	54.51	-25.50	46.66	33.35	74.00	19.49	V
17894.40	53.60	-25.50	46.66	32.44	74.00	20.40	V
13653.40	50.36	-29.50	40.43	39.43	68.30	17.94	H
13754.50	50.12	-29.10	40.86	38.35	68.30	18.18	V
10944.00	47.99	-32.82	38.70	42.11	74.00	26.01	V
11865.90	47.67	-31.85	39.05	40.47	74.00	26.33	H

Channel 56

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17976.30	54.51	-25.50	46.66	33.35	74.00	19.49	V
17894.40	53.60	-25.50	46.66	32.44	74.00	20.40	V
13653.40	50.36	-29.50	40.43	39.43	68.30	17.94	H
13754.50	50.12	-29.10	40.86	38.35	68.30	18.18	V
10944.00	47.99	-32.82	38.70	42.11	74.00	26.01	V
11865.90	47.67	-31.85	39.05	40.47	74.00	26.33	H

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17965.30	53.94	-25.50	46.66	32.78	74.00	20.06	H
17881.80	53.71	-25.50	46.66	32.55	74.00	20.29	V
13814.00	50.55	-29.10	40.86	38.78	68.30	17.75	H
13662.70	50.44	-29.50	40.43	39.51	68.30	17.86	H
5350.50	70.51	-27.43	34.01	63.93	74.00	3.49	H
5355.00	69.51	-27.43	34.01	62.93	74.00	4.49	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17891.70	54.32	-25.50	46.66	33.16	74.00	19.68	V
17404.30	54.19	-26.85	45.25	35.79	68.30	14.11	H
13726.00	50.73	-29.10	40.86	38.96	68.30	17.57	V
13674.80	50.72	-29.50	40.43	39.79	68.30	17.58	V
5459.70	65.60	-27.18	34.17	58.61	74.00	8.40	H
5469.00	66.34	-27.18	34.17	59.35	68.30	1.96	H

Channel 120

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17968.10	54.11	-25.50	46.66	32.95	74.00	19.89	H
17607.30	53.54	-25.74	45.95	33.33	68.30	14.76	H
13617.00	50.59	-29.50	40.43	39.66	68.30	17.71	V
13658.90	50.55	-29.50	40.43	39.62	68.30	17.75	H
11851.50	47.79	-31.85	39.05	40.59	74.00	26.21	H
11888.40	47.79	-31.85	39.05	40.59	74.00	26.21	V

Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17997.20	54.17	-25.50	46.66	33.01	74.00	19.83	V
17972.50	54.12	-25.50	46.66	32.96	74.00	19.88	V
13585.10	50.33	-29.50	40.43	39.40	68.30	17.97	V
13664.40	50.19	-29.50	40.43	39.26	68.30	18.11	V
5725.30	67.40	-27.07	34.31	60.16	68.30	0.90	H
5725.20	67.23	-27.07	34.31	59.99	68.30	1.07	H

802.11ac-HT40

Channel 38

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17948.80	54.50	-25.50	46.66	33.34	74.00	19.50	V
17933.50	54.34	-25.50	46.66	33.18	74.00	19.66	H
13647.90	50.93	-29.50	40.43	40.00	68.30	17.37	V
13711.60	50.32	-29.10	40.86	38.55	68.30	17.98	V
5148.10	71.16	-27.61	33.67	65.10	74.00	2.84	H
5149.30	70.56	-27.61	33.67	64.50	74.00	3.44	H

Channel 46

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17598.50	53.91	-25.74	45.95	33.70	68.30	14.39	V
17992.30	53.66	-25.50	46.66	32.50	74.00	20.34	H
13839.80	50.49	-29.51	41.30	38.70	68.30	17.81	V
13628.60	50.47	-29.50	40.43	39.54	68.30	17.83	V
11880.10	48.18	-31.85	39.05	40.98	74.00	25.82	H
11828.50	47.79	-31.85	39.05	40.59	74.00	26.21	V

Channel 54

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17894.40	54.13	-25.50	46.66	32.97	74.00	19.87	V
17989.50	53.71	-25.50	46.66	32.55	74.00	20.29	H
13597.80	50.22	-29.50	40.43	39.29	68.30	18.08	V
13739.70	50.05	-29.10	40.86	38.28	68.30	18.25	V
11882.90	47.69	-31.85	39.05	40.49	74.00	26.31	H
11705.20	47.66	-31.99	38.98	40.67	74.00	26.34	V

Channel 62

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17419.80	54.01	-26.85	45.25	35.61	68.30	14.29	H
17959.30	53.85	-25.50	46.66	32.69	74.00	20.15	H
13738.60	50.81	-29.10	40.86	39.04	68.30	17.49	H
13650.00	50.72	-29.50	40.43	39.79	68.30	17.58	V
5350.00	71.82	-27.43	34.01	65.24	74.00	2.18	H
5351.10	71.69	-27.43	34.01	65.11	74.00	2.31	H

Channel 102

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17398.30	55.23	-26.85	45.25	36.83	68.30	13.07	V
17991.80	54.13	-25.50	46.66	32.97	74.00	19.87	H
13630.80	50.57	-29.50	40.43	39.64	68.30	17.73	H
14009.20	50.31	-29.44	41.66	38.09	68.30	17.99	H
5458.40	60.86	-27.18	34.17	53.87	74.00	13.14	H
5468.40	64.91	-27.18	34.17	57.92	68.30	3.39	H

Channel 118

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17955.50	53.89	-25.50	46.66	32.73	74.00	20.11	H
17630.40	53.85	-25.74	45.95	33.64	68.30	14.45	H
13650.00	50.91	-29.50	40.43	39.98	68.30	17.39	H
13728.70	50.67	-29.10	40.86	38.90	68.30	17.63	H
11853.20	47.86	-31.85	39.05	40.66	74.00	26.14	V
10855.50	47.80	-32.33	38.59	41.54	74.00	26.20	H

Channel 134

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17975.20	53.91	-25.50	46.66	32.75	74.00	20.09	H
17962.60	53.47	-25.50	46.66	32.31	74.00	20.53	H
13668.80	50.50	-29.50	40.43	39.57	68.30	17.80	H
13693.00	50.50	-29.50	40.43	39.57	68.30	17.80	H
5726.70	67.80	-27.07	34.31	60.56	68.30	0.50	H
5725.10	67.04	-27.07	34.31	59.80	68.30	1.26	H

802.11ac-HT80

Channel 42

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17994.00	54.71	-25.50	46.66	33.55	74.00	19.29	H
17897.20	53.99	-25.50	46.66	32.83	74.00	20.01	H
13643.50	50.82	-29.50	40.43	39.89	68.30	17.48	V
13739.70	50.60	-29.10	40.86	38.83	68.30	17.70	H
5149.20	72.79	-27.61	33.67	66.73	74.00	1.21	H
5149.10	72.69	-27.61	33.67	66.63	74.00	1.31	H

Channel 58

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17395.00	54.02	-26.85	45.25	35.62	68.30	14.28	H
17570.50	53.53	-25.74	45.95	33.32	68.30	14.77	H
13640.70	50.47	-29.50	40.43	39.54	68.30	17.83	H
13669.90	50.41	-29.50	40.43	39.48	68.30	17.89	H
5350.20	70.58	-27.43	34.01	64.00	74.00	3.42	H
5361.20	69.79	-27.43	34.01	63.21	74.00	4.21	H

Channel 106

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17988.50	55.35	-25.50	46.66	34.19	74.00	18.65	H
17963.70	53.65	-25.50	46.66	32.49	74.00	20.35	V
13755.60	50.63	-29.10	40.86	38.86	68.30	17.67	V
13543.40	50.31	-29.56	39.99	39.88	68.30	17.99	V
5460.00	65.78	-27.18	34.17	58.79	74.00	8.22	H
5466.90	66.71	-27.18	34.17	59.72	68.30	1.59	H

Channel 122

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17947.20	53.81	-25.50	46.66	32.65	74.00	20.19	H
17715.70	53.53	-25.74	45.95	33.32	74.00	20.47	H
14196.80	50.01	-28.99	42.00	36.99	68.30	18.29	V
14162.10	49.98	-28.99	42.00	36.96	68.30	18.32	H
5732.10	66.07	-27.07	34.31	58.83	68.30	2.23	H
5736.10	65.97	-27.07	34.31	58.73	68.30	2.33	H

A.7. AC Powerline Conducted Emission (150kHz- 30MHz)

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement uncertainty:

Expanded measurement uncertainty for this test item is $U = 3.10\text{dB}$, $k=2$.

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger AE1		
		802.11a	Idle	
0.15 to 0.5	66 to 56	Fig.58	Fig.59	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger AE1		
		802.11a	Idle	
0.15 to 0.5	67 56 to 46	Fig.58	Fig.59	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: PASS

Test graphs as below:

Traffic:

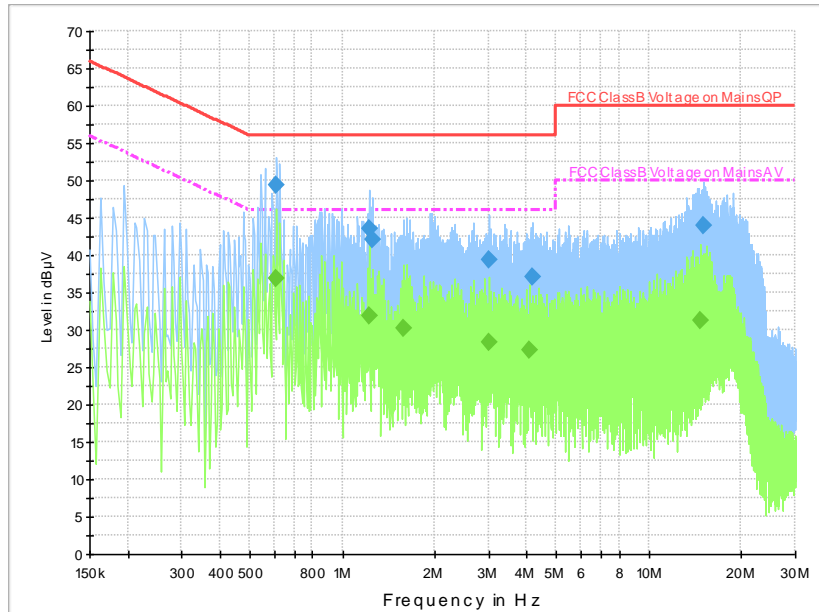


Fig.58 Conducted Emission (802.11a, Ch36, TX)

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.610000	49.4	5000.0	9.000	On	L1	19.7	6.6	56.0
1.222000	43.5	5000.0	9.000	On	L1	19.5	12.5	56.0
1.254000	42.1	5000.0	9.000	On	L1	19.5	13.9	56.0
3.018000	39.4	5000.0	9.000	On	L1	19.5	16.6	56.0
4.194000	37.0	5000.0	9.000	On	N	19.7	19.0	56.0
15.066000	43.9	5000.0	9.000	On	L1	19.9	16.1	60.0

Final Result 2

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.610000	36.9	5000.0	9.000	On	L1	19.7	9.1	46.0
1.222000	31.8	5000.0	9.000	On	L1	19.5	14.2	46.0
1.590000	30.3	5000.0	9.000	On	L1	19.5	15.7	46.0
3.018000	28.4	5000.0	9.000	On	L1	19.5	17.6	46.0
4.062000	27.3	5000.0	9.000	On	L1	19.6	18.7	46.0
14.802000	31.3	5000.0	9.000	On	L1	19.8	18.7	50.0

Note2: The measurement results showed here are worst cases of the combinations of different cables and chargers if applicable.

Idle:

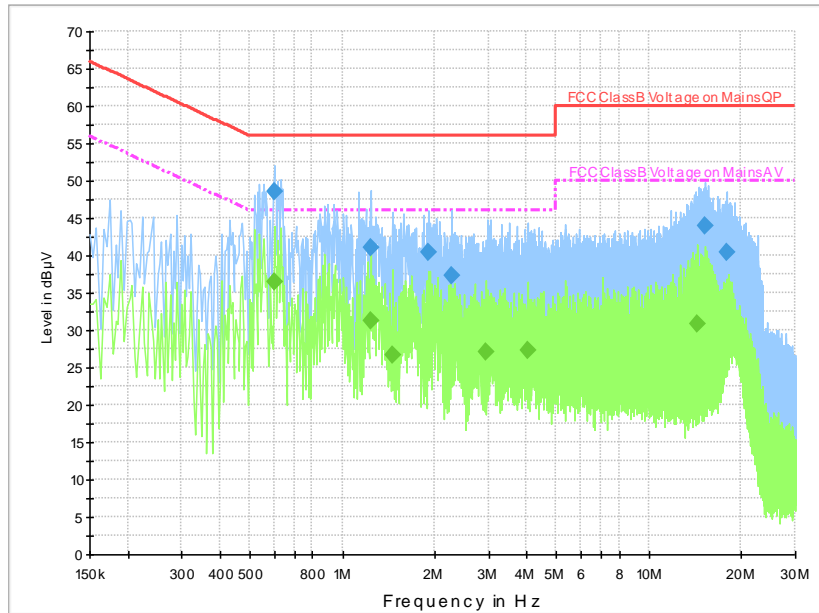


Fig.59 Conducted Emission(802.11a, IDLE)

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.598000	48.5	5000.0	9.000	On	L1	19.8	7.5	56.0
1.234000	41.0	5000.0	9.000	On	N	19.8	15.0	56.0
1.918000	40.5	5000.0	9.000	On	L1	19.4	15.5	56.0
2.266000	37.3	5000.0	9.000	On	N	19.7	18.8	56.0
15.258000	43.9	5000.0	9.000	On	L1	19.9	16.1	60.0
17.990000	40.3	5000.0	9.000	On	N	19.9	19.7	60.0

Final Result 2

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.598000	36.4	5000.0	9.000	On	L1	19.8	9.6	46.0
1.242000	31.3	5000.0	9.000	On	L1	19.5	14.7	46.0
1.462000	26.8	5000.0	9.000	On	L1	19.5	19.2	46.0
2.946000	27.1	5000.0	9.000	On	L1	19.5	18.9	46.0
4.046000	27.3	5000.0	9.000	On	L1	19.6	18.7	46.0
14.382000	30.8	5000.0	9.000	On	L1	19.8	19.2	50.0

Note2: The measurement results showed here are worst cases of the combinations of different cables and chargers if applicable.

A.8. 99% Occupied bandwidth

Method of Measurement: See ANSI C63.10-2013-clause 12.4.2.

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Measurement Result:

Mode	Frequency	99% Occupied bandwidth (MHz)		conclusion
802.11a	5180 MHz	Fig.60	17.76	P
	5200 MHz	Fig.61	17.92	P
	5240 MHz	Fig.62	17.88	P
802.11n HT20	5180 MHz	Fig.63	18.60	P
	5200 MHz	Fig.64	18.56	P
	5240 MHz	Fig.65	18.56	P
802.11n HT40	5190 MHz	Fig.66	36.56	P
	5230 MHz	Fig.67	36.40	P
802.11ac HT80	5210 MHz	Fig.68	75.68	P

Conclusion: PASS
Test graphs as below:

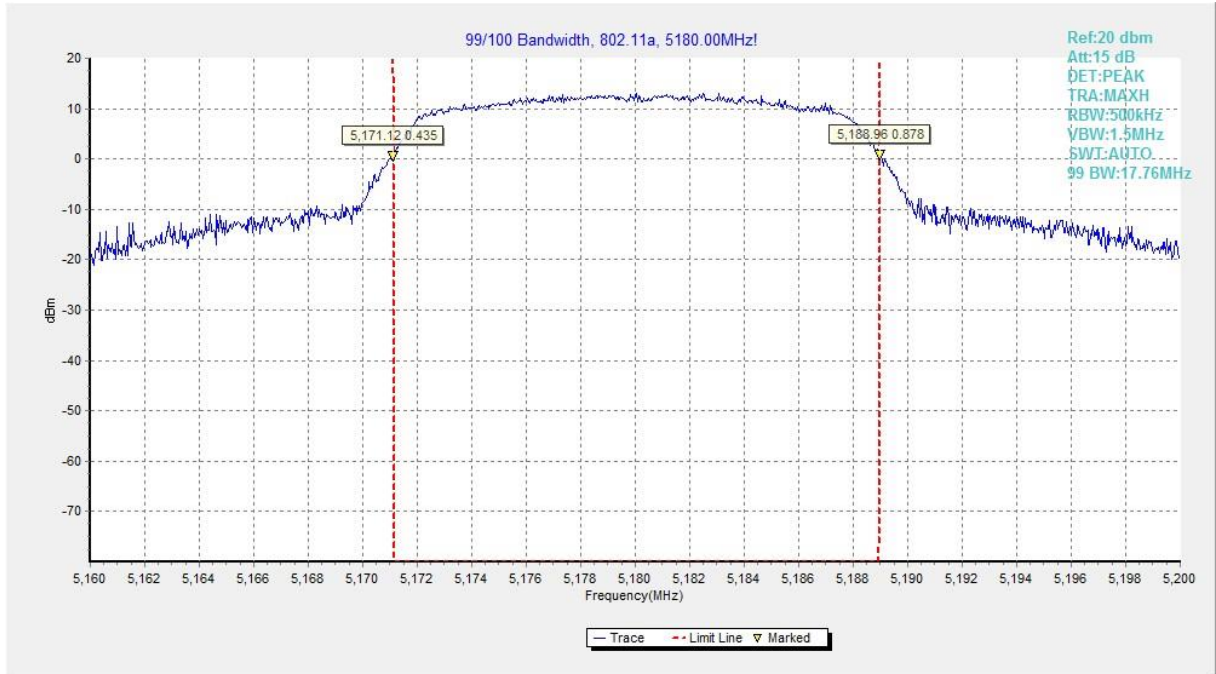


Fig.60 99% Occupied bandwidth (802.11a, 5180MHz)

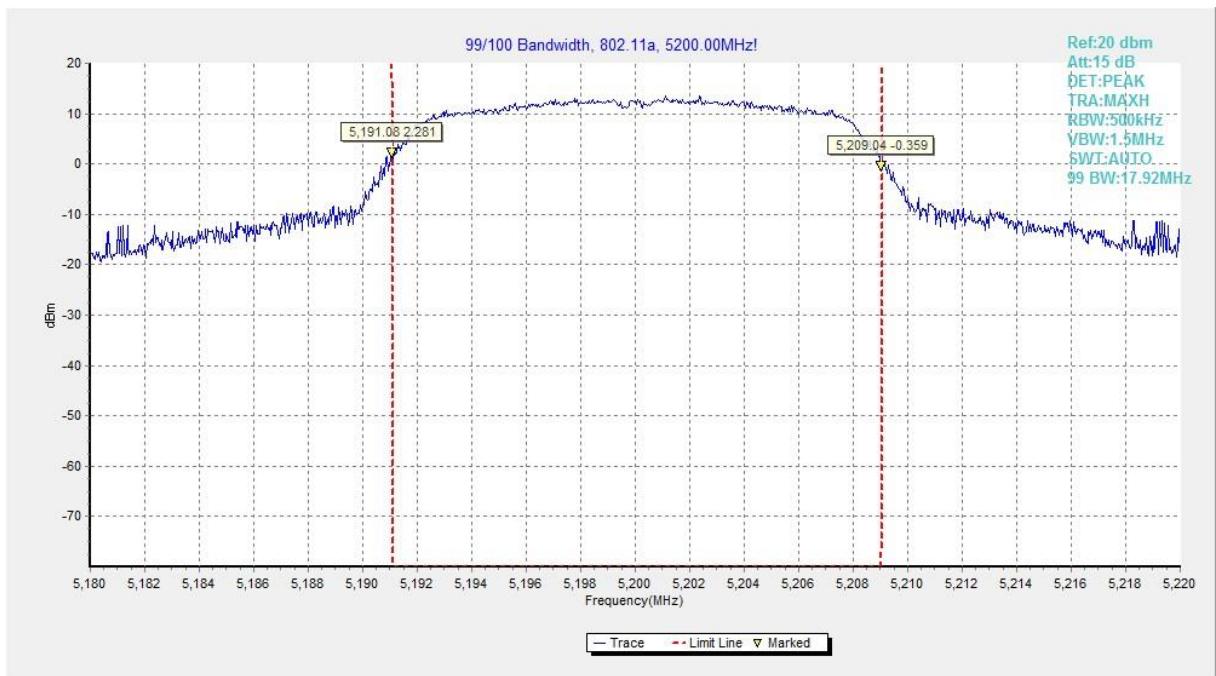


Fig.61 99% Occupied bandwidth (802.11a, 5200MHz)

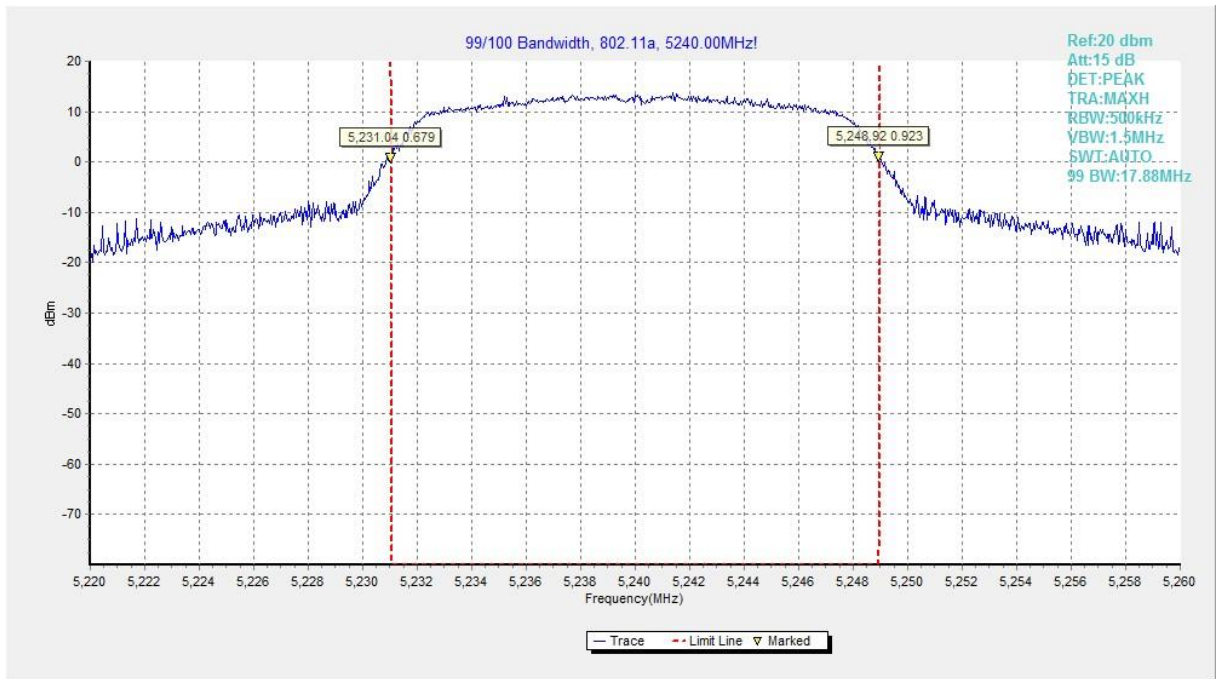


Fig.62 99% Occupied bandwidth (802.11a, 5240MHz)

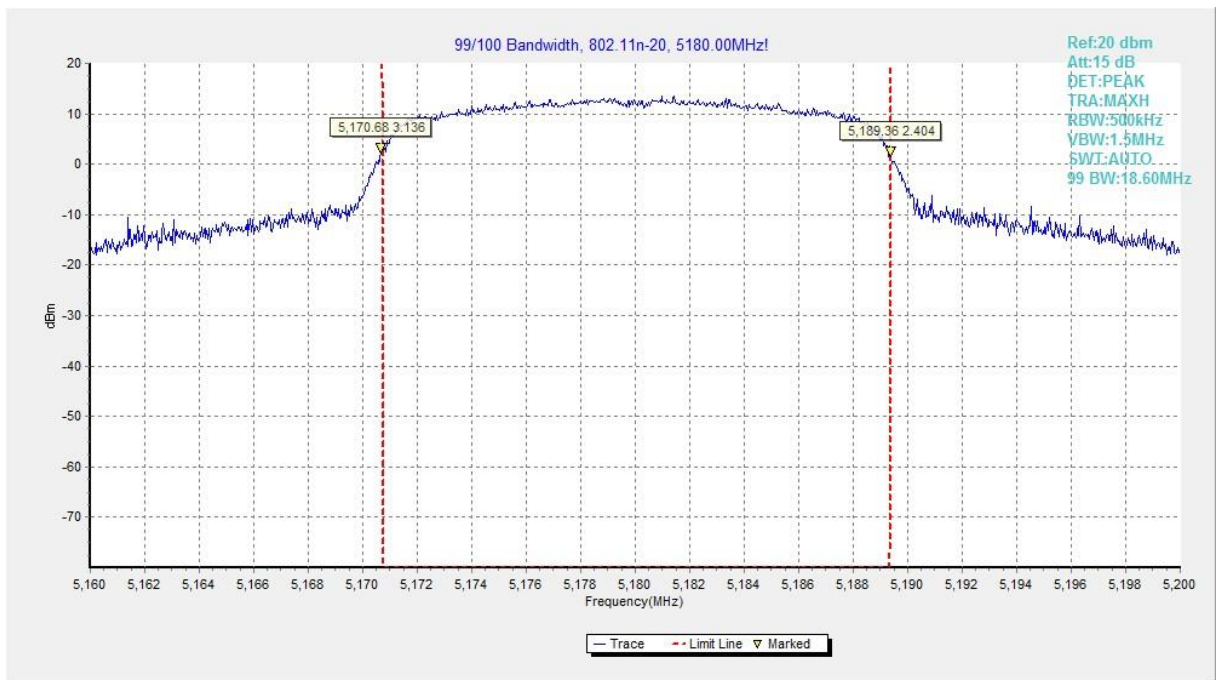


Fig.63 99% Occupied bandwidth (802.11n-HT20, 5180MHz)

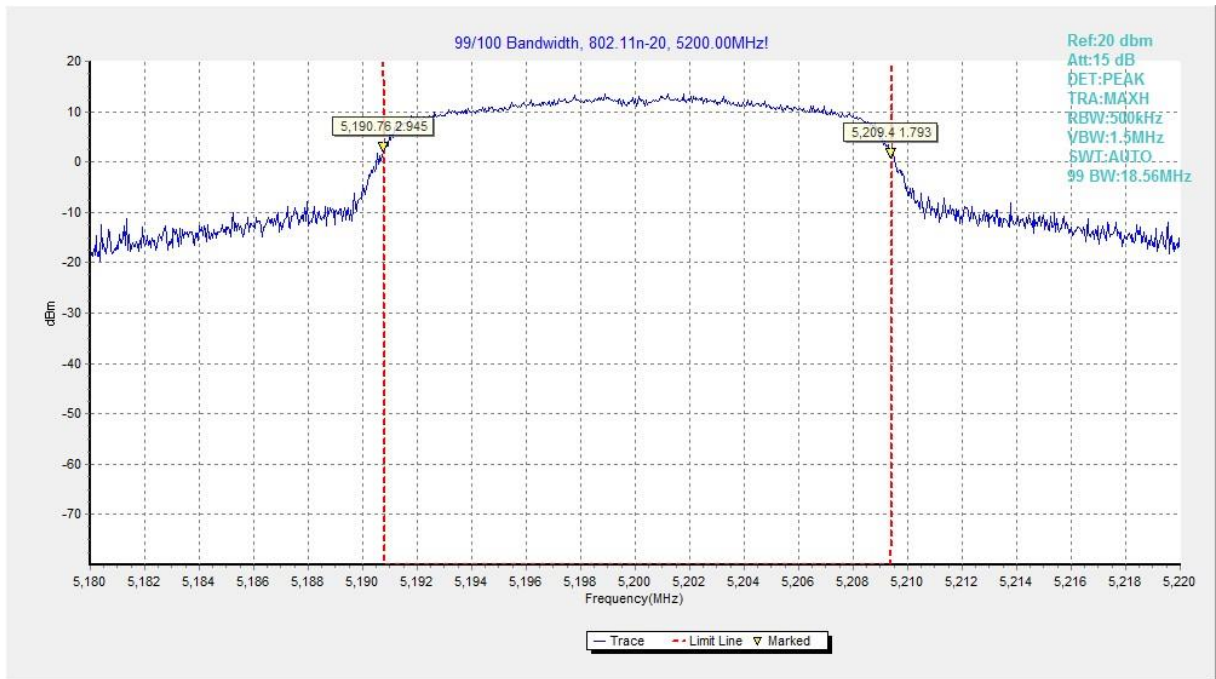


Fig.64 99% Occupied bandwidth (802.11n-HT20, 5200MHz)

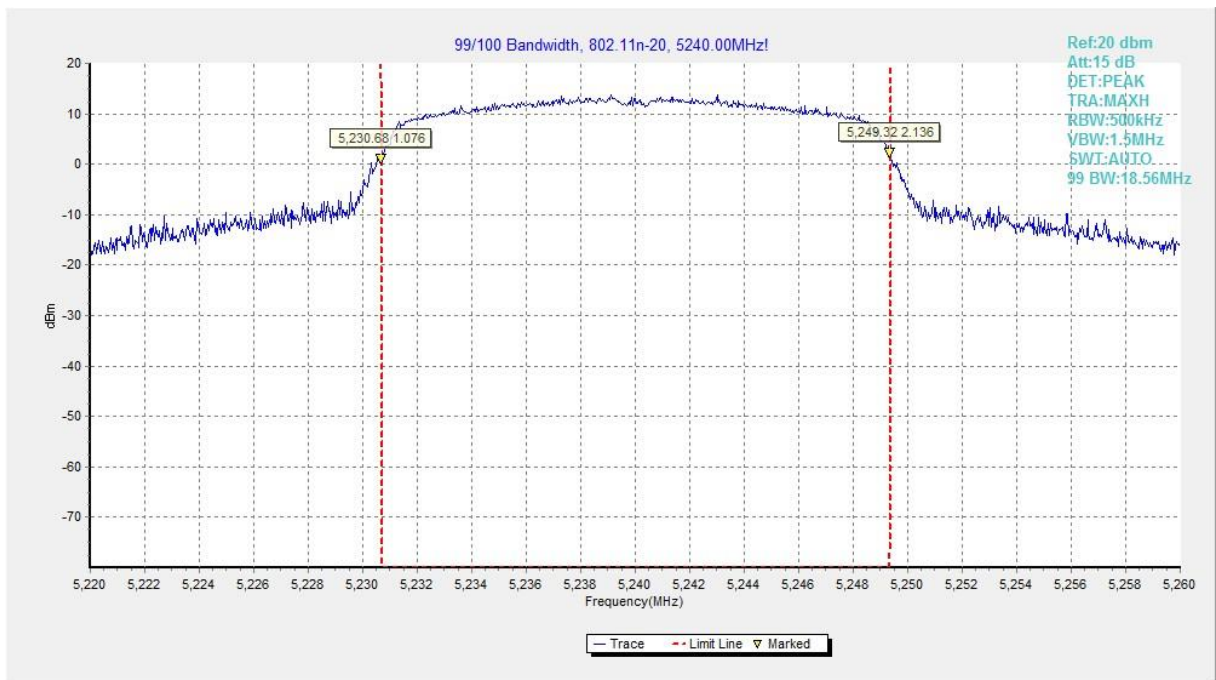


Fig.65 99% Occupied bandwidth (802.11n-HT20, 5240MHz)

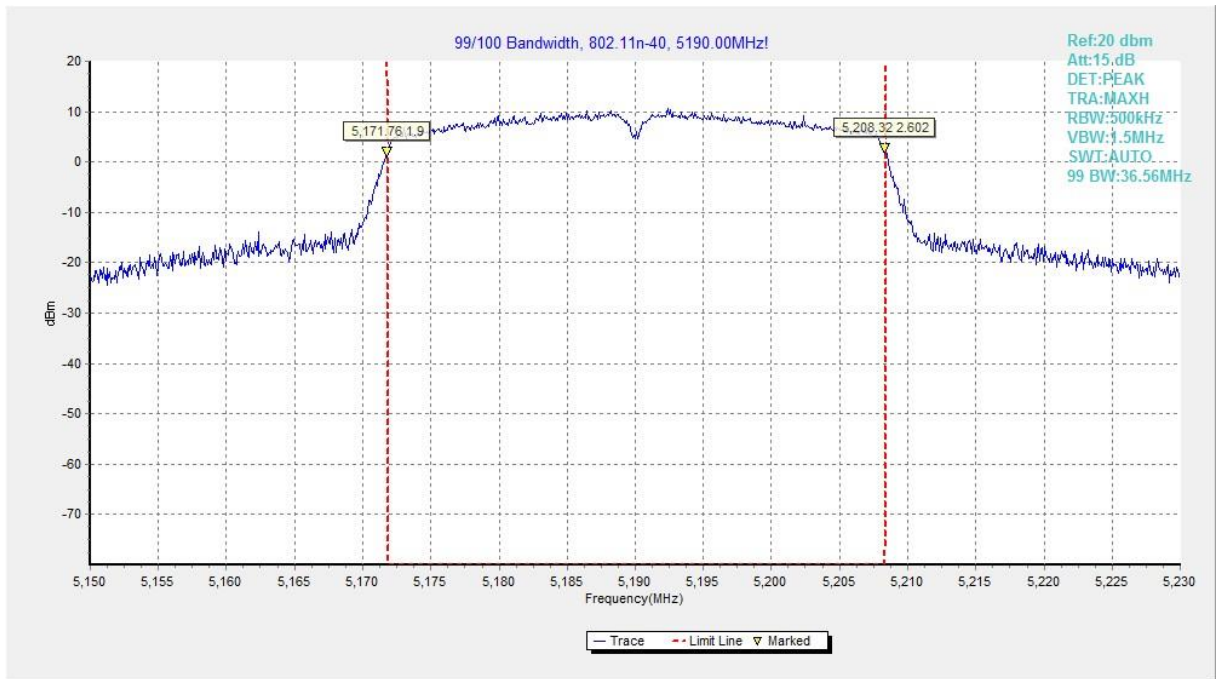


Fig.66 99% Occupied bandwidth (802.11n-HT40, 5190MHz)

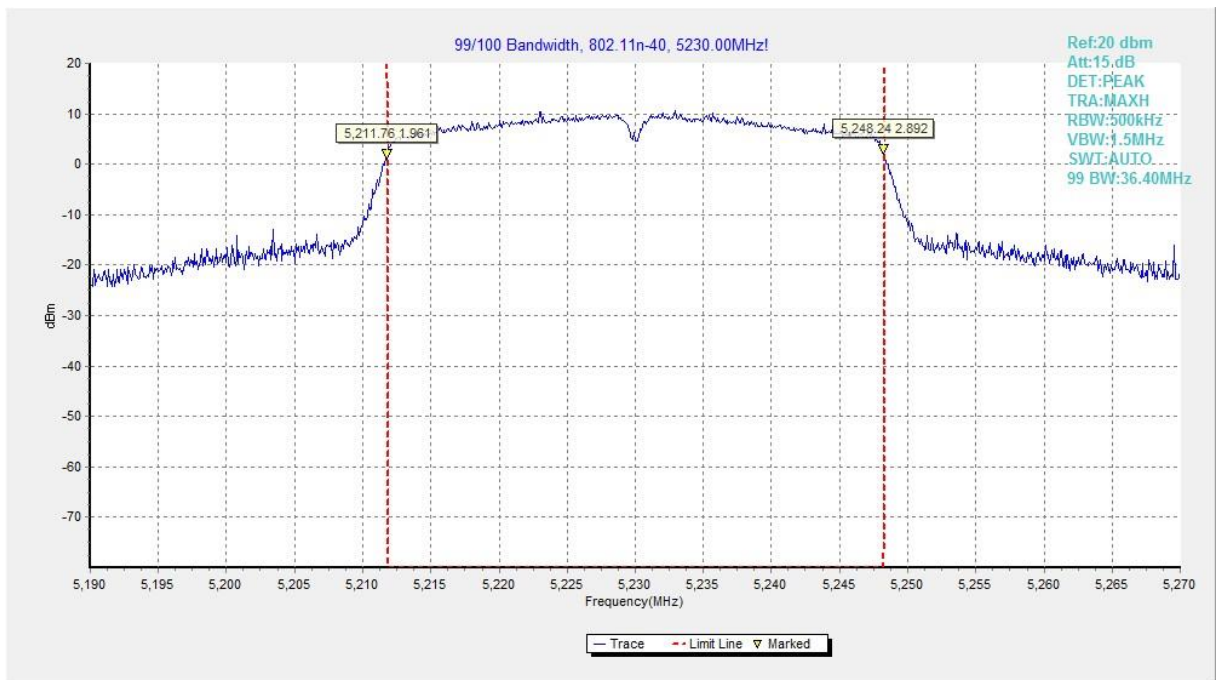


Fig.67 99% Occupied bandwidth (802.11n-HT40, 5230MHz)

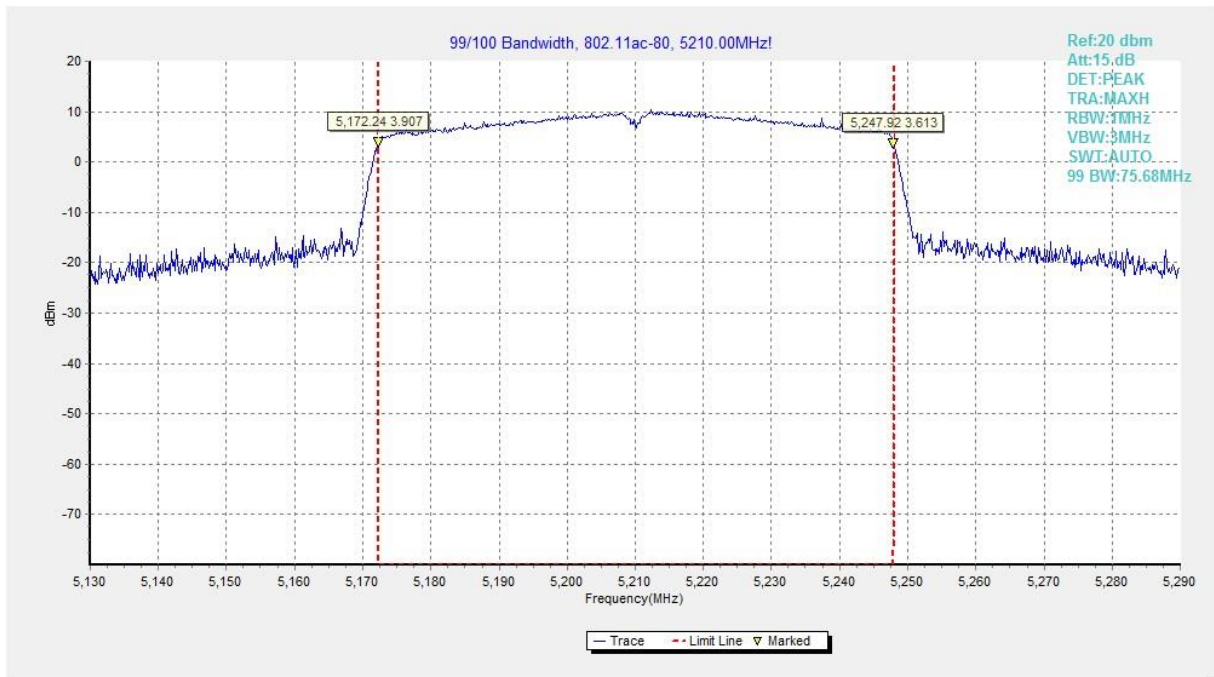


Fig.68 99% Occupied bandwidth (802.11ac-HT80, 5210MHz)

A.9. Power control

A Transmission Power Control mechanism is not required for systems with an e.i.r.p. of less than 27dBm (500 mW).

ANNEX B: EUT parameters

Disclaimer: The worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p>  	
<hr/> Certificate of Accreditation to ISO/IEC 17025:2017 <hr/>	
NVLAP LAB CODE: 600118-0	
Telecommunication Technology Labs, CAICT Beijing China	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
Electromagnetic Compatibility & Telecommunications	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i>	
<hr/> 2021-09-29 through 2022-09-30 <i>Effective Dates</i>	 For the National Voluntary Laboratory Accreditation Program

*** END OF REPORT BODY ***