



# FCC PART 15 TEST REPORT No.I21Z62273-IOT02

for

**HMD Global Oy**

**Smart Phone**

**N152DL**

With

**FCC ID: 2AJOTTA-1520**

**Hardware Version: V1.0**

**Software Version: 000T\_0\_090**

**Issued Date: 2022-01-24**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

**CTTL-Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I21Z62273-IOT02	Rev.0	1st edition	2022-01-14
I21Z62273-IOT02	Rev.1	Update A.2 description.	2022-01-24

## **CONTENTS**

<b>CONTENTS .....</b>	<b>3</b>
<b>1. TEST LATORATORY .....</b>	<b>5</b>
1.1. INTRODUCTION & ACCREDITATION .....	5
1.2. TESTING LOCATION .....	5
1.3. TESTING ENVIRONMENT.....	5
1.4. PROJECT DATE .....	5
1.5. SIGNATURE .....	5
<b>2. CLIENT INFORMATION.....</b>	<b>6</b>
2.1 APPLICANT INFORMATION .....	6
2.2 MANUFACTURER INFORMATION .....	6
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARYEQUIPMENT(AE) .....</b>	<b>7</b>
3.1. ABOUT EUT .....	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
3.4. GENERAL DESCRIPTION.....	8
3.5. INTERPRETATION OF THE TEST ENVIRONMENT.....	8
<b>4. REFERENCE DOCUMENTS .....</b>	<b>8</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	8
4.2. REFERENCE DOCUMENTS FOR TESTING.....	8
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
6.1. SUMMARY OF TEST RESULTS.....	9
6.2. STATEMENTS.....	9
6.3. TEST CONDITIONS .....	9
<b>7. TEST EQUIPMENTS UTILIZED .....</b>	<b>10</b>
<b>8. MEASUREMENT UNCERTAINTY .....</b>	<b>11</b>
8.1 TRANSMITTER OUTPUT POWER .....	11
8.2 PEAK POWER SPECTRAL DENSITY .....	11
8.3 OCCUPIED CHANNEL BANDWIDTH .....	11
8.4 BAND EDGES COMPLIANCE .....	11
8.5 SPURIOUS EMISSIONS .....	11
8.6 AC POWER-LINE CONDUCTED EMISSION .....	11
<b>ANNEX A: MEASUREMENT RESULTS.....</b>	<b>12</b>
A.1. MEASUREMENT METHOD .....	12
A.2. MAXIMUM OUTPUT POWER(NORMAL).....	13
A.3. PEAK POWER SPECTRAL DENSITY (CONDUCTED).....	15



A.4. OCCUPIED 26DB BANDWIDTH(CONDUCTED)..... 16

A.5. BAND EDGES COMPLIANCE ..... 34

A5.1 BAND EDGES - RADIATED..... 34

A.6. TRANSMITTER SPURIOUS EMISSION ..... 45

A.7. AC POWERLINE CONDUCTED EMISSION (150KHZ- 30MHZ)..... 84

A.8. 99% OCCUPIED BANDWIDTH ..... 87

A.9. POWER CONTROL ..... 92

**ANNEX B: EUT PARAMETERS..... 92**

**ANNEX C: ACCREDITATION CERTIFICATE ..... 93**

## 1. TEST LABORATORY

### 1.1. Introduction & Accreditation

**Telecommunication Technology Labs, CAICT** is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (ISED#: 24849). The detail accreditation scope can be found on NVLAP website.

### 1.2. Testing Location

Testing Location: CTTL(Huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

### 1.3. Testing Environment

Normal Temperature: 15-35°C


Relative Humidity: 20-75%

### 1.4. Project date

Testing Start Date: 2021-11-19


Testing End Date: 2022-01-14

### 1.5. Signature




---

Xie Xiuzhen  
( Prepared this test report )



---

Zheng Wei  
(Reviewed this test report)



---

Hu Xiaoyu  
(Approved this test report)



## **2. CLIENT INFORMATION**

### **2.1 Applicant Information**

Company Name: HMD Global Oy  
Address: Bertel Jungin aukio 9, 02600 Espoo, Finland  
City: Espoo  
Postal Code: /  
Country: Finland  
Telephone: +491735287964  
Fax: /

### **2.2 Manufacturer Information**

Company Name: HMD Global Oy  
Address: Bertel Jungin aukio 9, 02600 Espoo, Finland  
City: Espoo  
Postal Code: /  
Country: Finland  
Telephone: +491735287964  
Fax: /

### 3. EQUIPMENT UNDER TEST (EUT) AND

#### ANCILLARY EQUIPMENT(AE)

#### 3.1. About EUT

Description	Smart Phone
Model name	N152DL
FCC ID	2AJOTTA-1520
WLAN Frequency Band	ISM Bands: 5150MHz~5250MHz 5250MHz~5350MHz 5470MHz~5725MHz
Type of modulation	OFDM
Antenna	Integral Antenna
Voltage	3.8V

#### 3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	358205600015278	V1.0	000T_0_090
EUT2	358205600007549	V1.0	000T_0_090

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE used during the test

AE ID*	Description	Note
AE1	Adapter	/
AE2	USB Cable	/
AE3-1	Battery	/
AE3-2	Battery	/

#### AE1

Model	TN-050120U8
Manufacturer	Chongqing Lianmao Electronic Co., Ltd.

#### AE2

Model	SNJY-A002A
Manufacturer	Saibao(Jiangxi) Communication Industrial Co., Ltd
Length	/

#### AE3-1

Model	TN-BL3000R1
Manufacturer	Guangdong Fenghua New Energy Co., Ltd.
Capacitance	3000mAh
Nominal voltage	3.85V

AE3-2

Model TN-BL3000R1  
Manufacturer Shenzhen Utility Power Source Co.,ltd.  
Capacitance 3000mAh  
Nominal voltage 3.85V

\*AE ID: is used to identify the test sample in the lab internally.

### 3.4. General Description

The Equipment under Test (EUT) is a model of Smart Phone with integrated antenna and inbuilt battery.

It has Bluetooth (EDR)function.

It consists of normal options: travel charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

### 3.5. Interpretation of the Test Environment

For the test methods, the test environment uncertainty figures correspond to an expansion factor k=2.

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

## 4. REFERENCE DOCUMENTS

### 4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices	2018
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
UNII: KDB 789033 D02	General U-NII Test Procedures New Rules v02r01	2017-12
KDB 558074 D01	Federal Communications Commission Office of Engineering and Technology Laboratory Division GUIDANCE FOR COMPLIANCE MEASUREMENTS ON	2019



DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

## 5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

## 6. SUMMARY OF TEST RESULTS

### 6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15E	Sub-clause of IC	Verdict
Maximum Output Power	15.407	/	P
Peak Power Spectral Density	15.407	/	P
Occupied 26dB Bandwidth	15.403	/	P
Band edge compliance (Radiated)	15.209	/	P
Transmitter spurious emissions (Radiated)	15.407	/	P
AC Powerline Conducted Emission (150kHz- 30MHz)	15.407	/	P
Frequency Stability	15.407	/	P
99% Occupied bandwidth	/	/	P
Transmit Power Control	15.407	/	NA

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

### 6.2. Statements

CTTL has evaluated the test cases requested by the client/manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

### 6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature                      26°C

Voltage 3.8V  
Humidity 44%

## 7. TEST EQUIPMENTS UTILIZED

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2022-05-24
2	LISN	ENV216	101200	Rohde & Schwarz	1 year	2022-05-30
3	Test Receiver	ESCI 7	100344	Rohde & Schwarz	1 year	2022-02-26
4	Shielding Room	S81	/	ETS-Lindgren	/	/

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103015	Rohde & Schwarz	1 year	2022-09-05
2	BiLog Antenna	VULB9163	9163-01223	Schwarzbeck	1 year	2022-03-22
3	EMI Antenna	3115	6914	ETS-Lindgren	1 year	2022-02-03

## 8. Measurement Uncertainty

### 8.1 Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

### 8.2 Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

### 8.3 Occupied Channel Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

### 8.4 Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

### 8.5 Spurious Emissions

#### Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

#### Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	/
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.16
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.44
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.28

### 8.6 AC Power-line Conducted Emission


Measurement Uncertainty : 3.10,k=2

## ANNEX A: MEASUREMENT RESULTS

### A.1. Measurement Method

#### A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

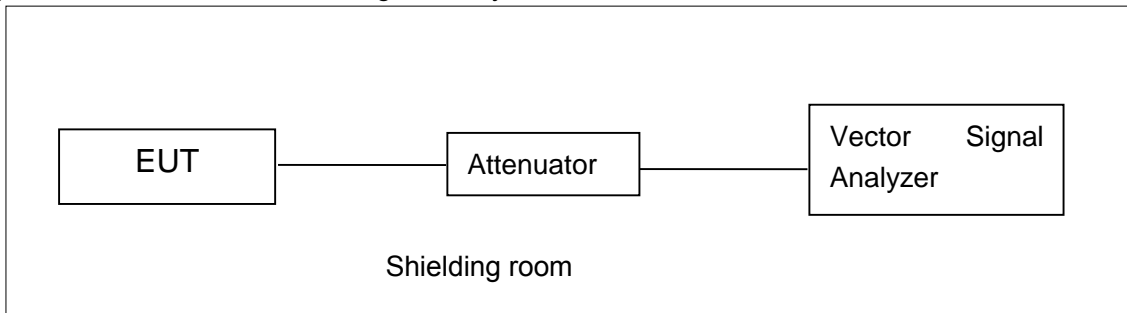


#### A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

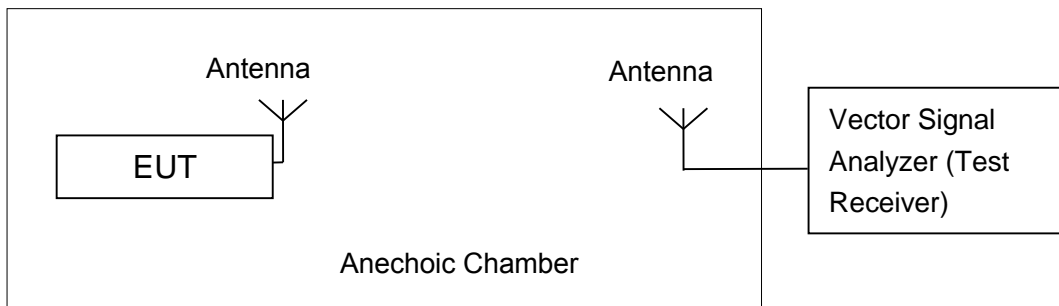

The measurement is made according to KDB 789033

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

## A.2. Maximum output Power(normal)

### Measurement Limit and Method:

Standard	Frequency (MHz)	Limit (dBm)
FCC CRF Part 15.407(a)	5150MHz~5250MHz	24dBm
	5250MHz~5350MHz	24dBm or 11+10logB
	5470MHz~5725MHz	24dBm or 11+10logB

Limit use the less value, and B is the 26dB bandwidth.

The measurement method SA-2 is made according to KDB 789033

Note:

For straddle channel 20MHz Bandwidth 5720MHz, Conducted Output Power Limit:

802.11a=11+10\*log(B)=24.05, B=30.40/2+5=20.20MHz,

802.11n-HT20=11+10\*log(B)=24.31, B=32.85/2+5=21.425MHz,

802.11ac-VHT20=11+10\*log(B)=24.15, B=31.35/2+5=20.675MHz,

For straddle channel 40/80MHz Bandwidth, conducted output power limit=24 dBm

802.11n-HT40: B=48.24/2+15=39.12MHz,

802.11ac-VHT40: B=54.00/2+15=42MHz,

802.11ac-VHT80: B=95.20/2+35=82.60MHz,

### Measurement Results:

#### 802.11a mode

Mode	Rate	Test Result (dBm)									
		Frequency (MHz)									
		5180	5200	5240	5260	5280	5320	5500	5580	5700	5720
802.11a	6Mbps	17.17	16.99	17.15	17.32	17.66	17.89	16.93	17.23	17.14	17.09

The data rate 6Mbps is selected as worse condition, and the following cases are performed with this condition.

#### 802.11n-HT20 mode

Mode	Rate	Test Result (dBm)									
		Frequency (MHz)									
		5180	5200	5240	5260	5280	5320	5500	5580	5700	5720
802.11n(HT20)	MCS0	17.44	17.21	17.45	17.49	17.34	17.48	16.67	16.75	16.74	16.79

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

#### 802.11ac-HT20 mode

Mode	Rate	Test Result (dBm)									
		Frequency (MHz)									
		5180	5200	5240	5260	5280	5320	5500	5580	5700	5720
802.11ac(HT20)	MCS0	17.16	17.17	17.23	17.44	17.46	17.48	16.67	16.69	16.71	16.72

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

**802.11n-HT40 mode**

Mode	Rate	Test Result (dBm)							
		Frequency (MHz)							
		5190	5230	5270	5310	5510	5550	5670	5710
802.11n(HT40)	MCS0	17.22	17.32	17.45	17.43	16.93	16.91	17.12	17.22

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

**802.11ac-HT40 mode**

Mode	Rate	Test Result (dBm)							
		Frequency (MHz)							
		5190	5230	5270	5310	5510	5550	5670	5710
802.11ac(HT40)	MCS0	17.15	17.17	17.13	17.18	16.74	16.79	16.72	16.80

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

**802.11ac-HT80 mode**

Mode	Rate	Test Result (dBm)				
		Frequency (MHz)				
		5210	5290	5530	5610	5690
802.11ac(HT80)	MCS0	16.47	16.65	15.92	16.13	16.07

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

The duty cycle of all mode are 100%.

### A.3. Peak Power Spectral Density (conducted)

#### Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC CRF Part 15.407(a)	5150MHz~5250MHz	11
	5250MHz~5350MHz	11
	5470MHz~5725MHz	11

The output power measurement method Section F is made according to KDB 789033

#### Measurement Results:

Mode	Frequency	Power Spectral Density (dBm/MHz)	Conclusion
802.11a	5180 MHz	6.59	P
	5200 MHz	6.14	P
	5240 MHz	6.63	P
	5260 MHz	6.26	P
	5280 MHz	6.64	P
	5320 MHz	6.33	P
	5500 MHz	6.22	P
	5580 MHz	6.05	P
	5700 MHz	6.07	P
	5720 MHz	6.49	P
802.11n HT20	5180 MHz	6.43	P
	5200 MHz	5.82	P
	5240 MHz	6.33	P
	5260 MHz	6.18	P
	5280 MHz	6.33	P
	5320 MHz	5.98	P
	5500 MHz	6.13	P
	5580 MHz	5.73	P
	5700 MHz	5.73	P
	5720 MHz	6.76	P
802.11n HT40	5190 MHz	3.39	P
	5230 MHz	3.36	P
	5270 MHz	3.39	P
	5310 MHz	2.98	P
	5510 MHz	2.67	P
	5550 MHz	3.39	P
	5670 MHz	2.83	P
	5710 MHz	3.02	P
802.11ac HT80	5210MHz	-1.38	P
	5290MHz	-0.57	P
	5530MHz	-1.34	P

	5610MHz	-1.21	P
	5690MHz	-1.82	P

**Conclusion: PASS**

#### A.4. Occupied 26dB Bandwidth(conducted)

**Measurement Limit:**

Standard	Limit (kHz)
FCC 47 CFR Part 15.403 (i)	/

The measurement is made according to KDB 789033

**Measurement Uncertainty:**

Measurement Uncertainty	60.80Hz
-------------------------	---------

**Measurement Result:**

Mode	Frequency	Occupied 26dB Bandwidth ( MHz)		conclusion
802.11a	5180 MHz	Fig.1	37.50	P
	5200 MHz	Fig.2	38.55	P
	5240 MHz	Fig.3	38.00	P
	5260 MHz	Fig.4	34.25	P
	5280 MHz	Fig.5	38.15	P
	5320 MHz	Fig.6	38.15	P
	5500 MHz	Fig.7	32.75	P
	5580 MHz	Fig.8	30.30	P
	5700 MHz	Fig.9	30.90	P
	5720 MHz	Fig.10	30.40	P
802.11n HT20	5180 MHz	Fig.11	37.85	P
	5200 MHz	Fig.12	35.20	P
	5240 MHz	Fig.13	35.35	P
	5260 MHz	Fig.14	34.50	P
	5280 MHz	Fig.15	35.65	P
	5320 MHz	Fig.16	35.40	P
	5500 MHz	Fig.17	31.40	P
	5580 MHz	Fig.18	28.45	P
	5700 MHz	Fig.19	30.10	P
	5720 MHz	Fig.20	32.85	P

802.11n HT40	5190 MHz	Fig.21	66.48	P
	5230 MHz	Fig.22	60.08	P
	5270 MHz	Fig.23	64.88	P




	5310 MHz	Fig.24	57.52	P
	5510 MHz	Fig.25	54.48	P
	5550 MHz	Fig.26	54.00	P
	5670 MHz	Fig.27	46.24	P
	5710 MHz	Fig.28	48.24	P


802.11ac HT80	5210MHz	Fig.29	102.56	P
	5290MHz	Fig.30	122.24	P
	5530MHz	Fig.31	103.04	P
	5610MHz	Fig.32	85.76	P
	5690MHz	Fig.33	95.20	P

**Conclusion: PASS**


Test graphs as below:

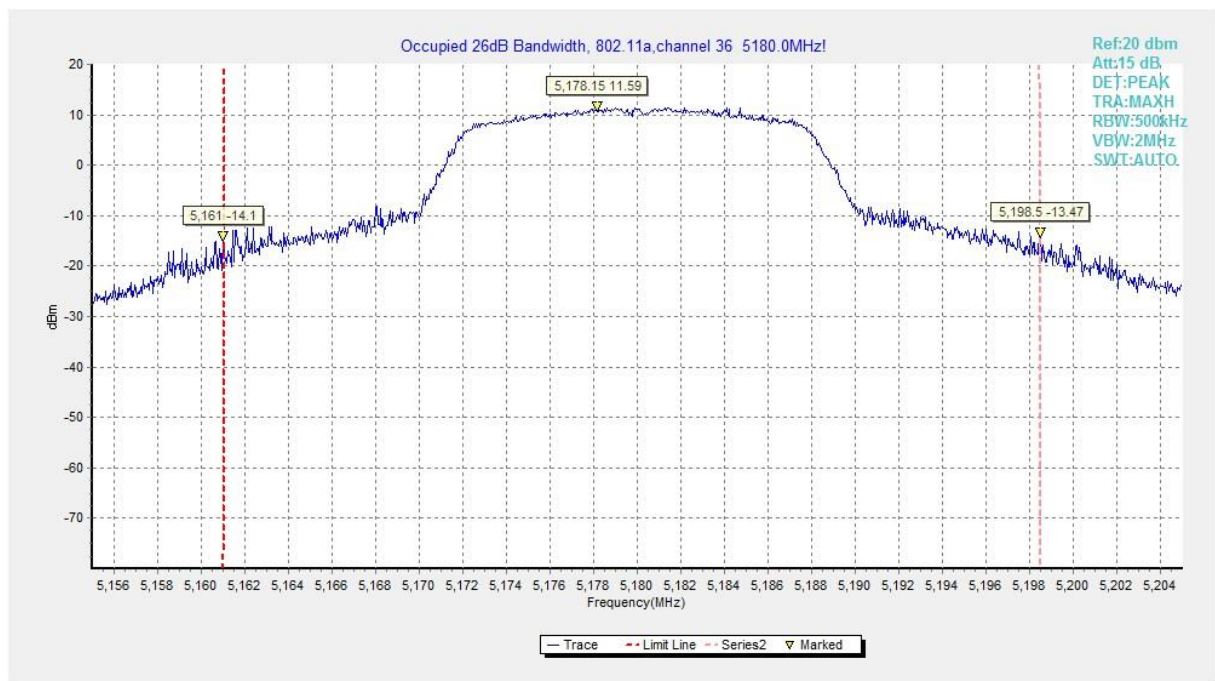


**Fig.1 Occupied 26dB Bandwidth (802.11a, 5180MHz)**

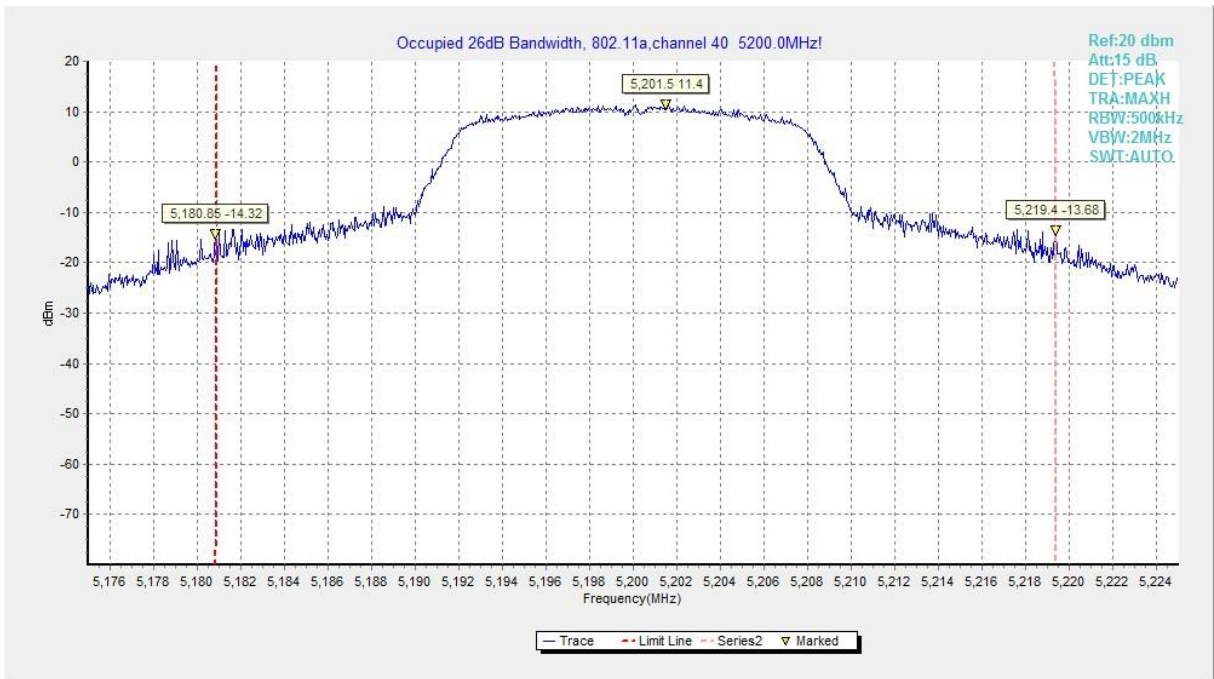


**Fig.2 Occupied 26dB Bandwidth (802.11a, 5200MHz)**

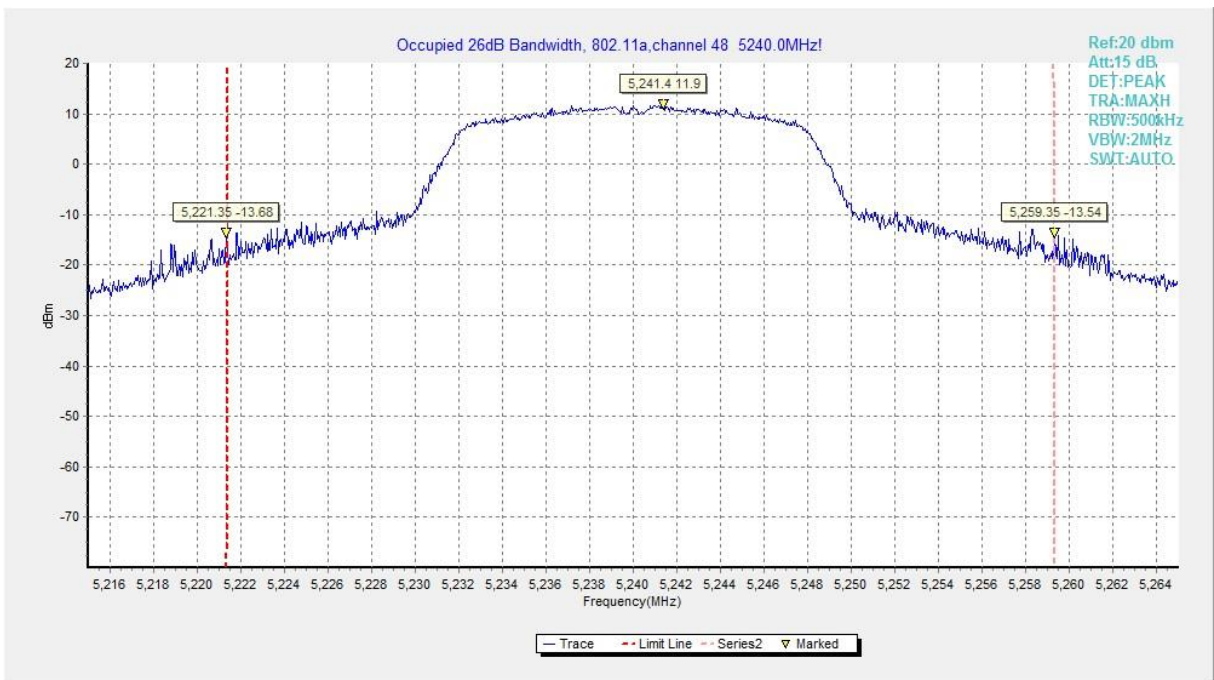


**Fig.3 Occupied 26dB Bandwidth (802.11a, 5240MHz)**

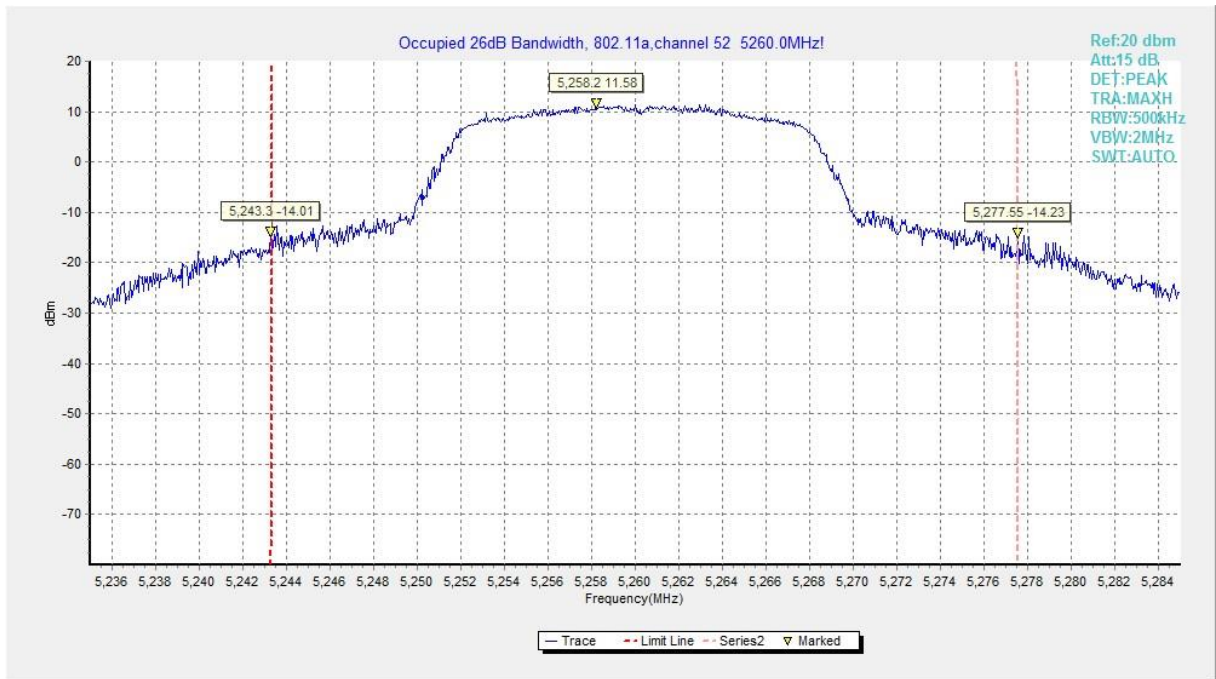


**Fig.4 Occupied 26dB Bandwidth (802.11a, 5260MHz)**

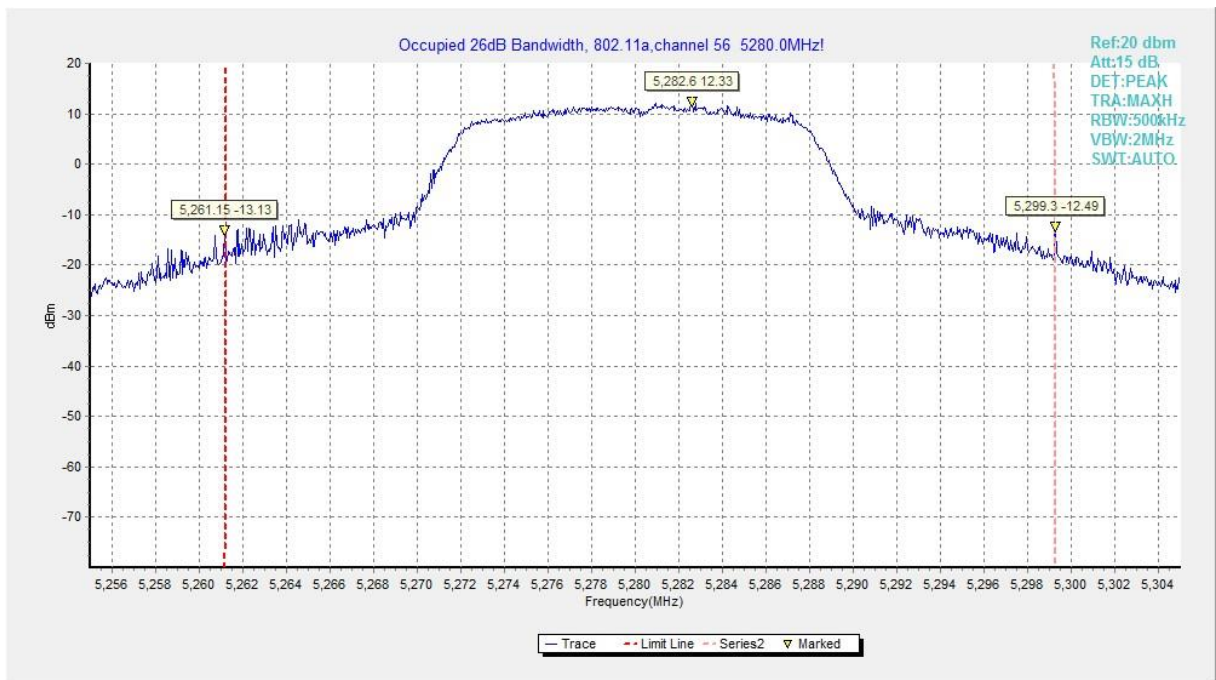


**Fig.5 Occupied 26dB Bandwidth (802.11a, 5280MHz)**

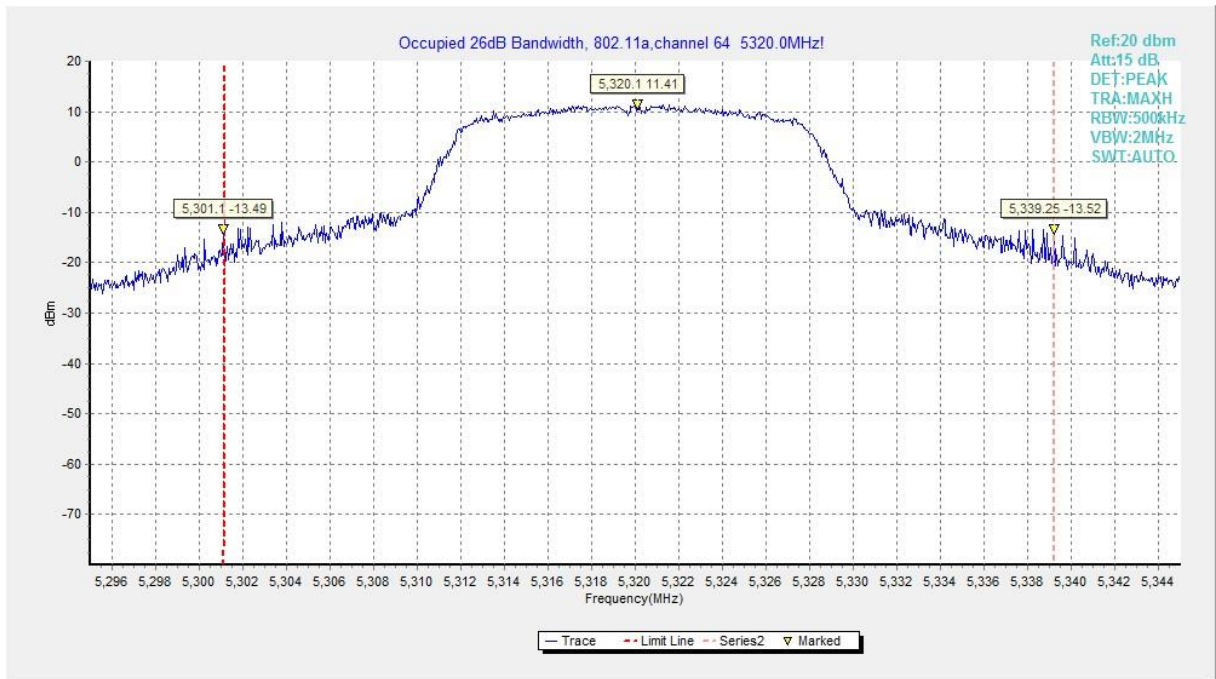


**Fig.6 Occupied 26dB Bandwidth (802.11a, 5320MHz)**

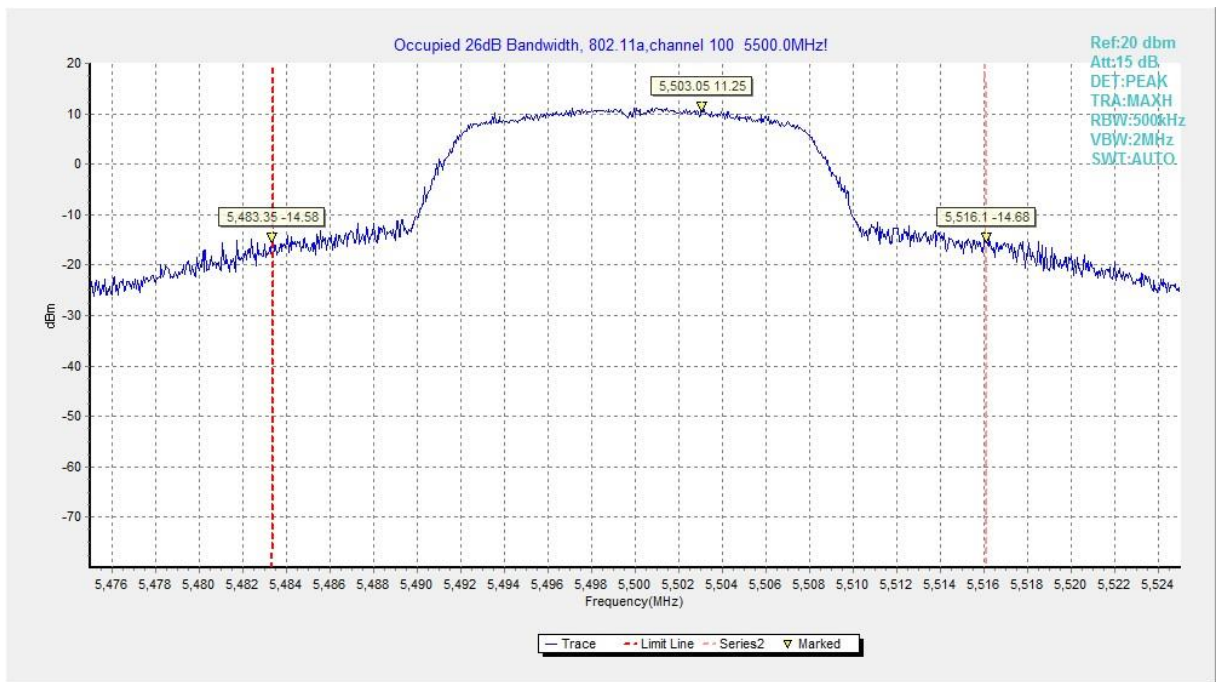


**Fig.7 Occupied 26dB Bandwidth (802.11a, 5500MHz)**

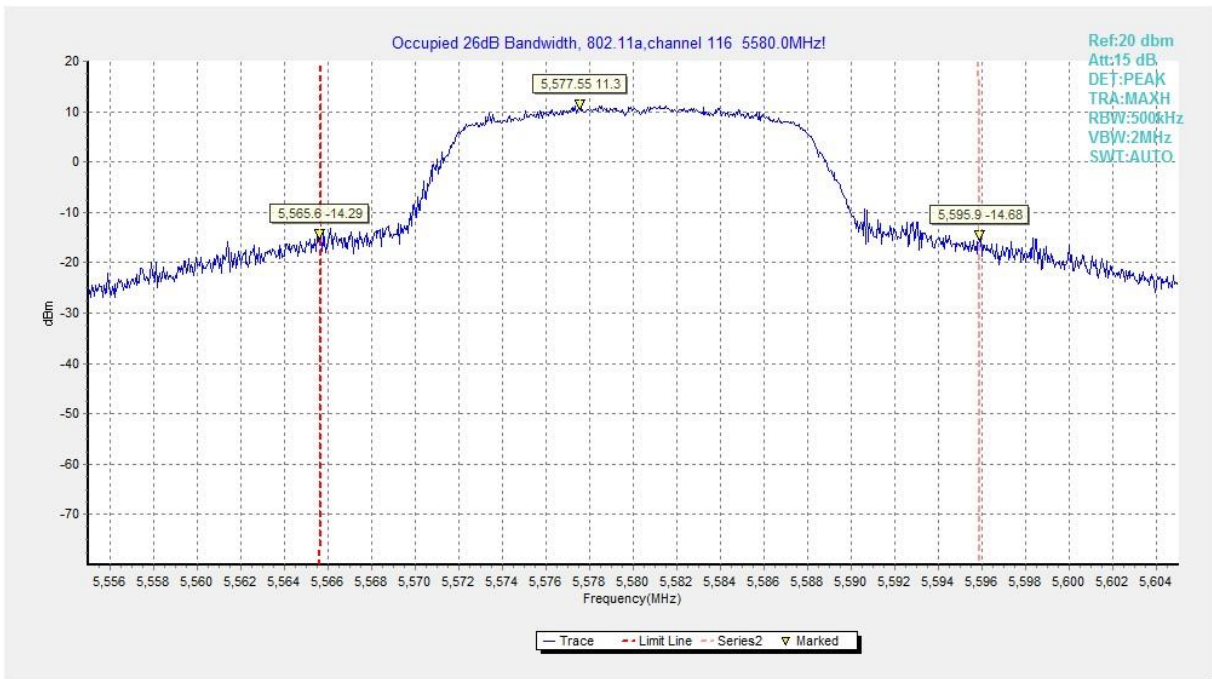


**Fig.8 Occupied 26dB Bandwidth (802.11a, 5580MHz)**

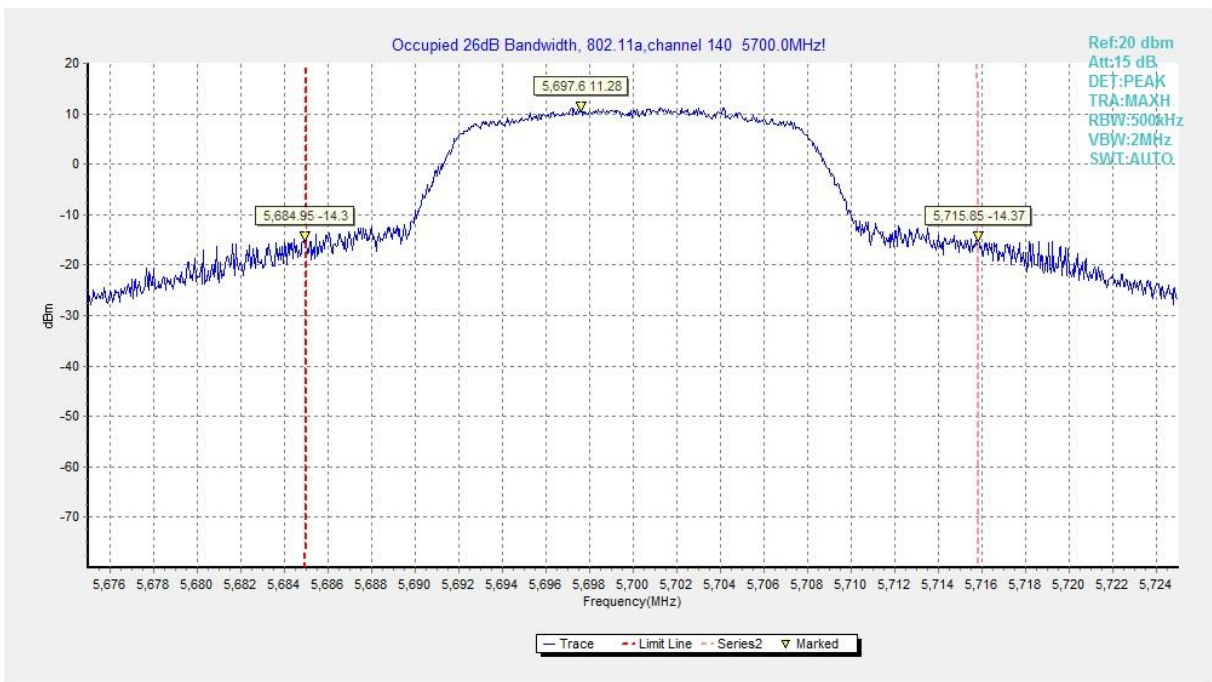


**Fig.9 Occupied 26dB Bandwidth (802.11a, 5700MHz)**

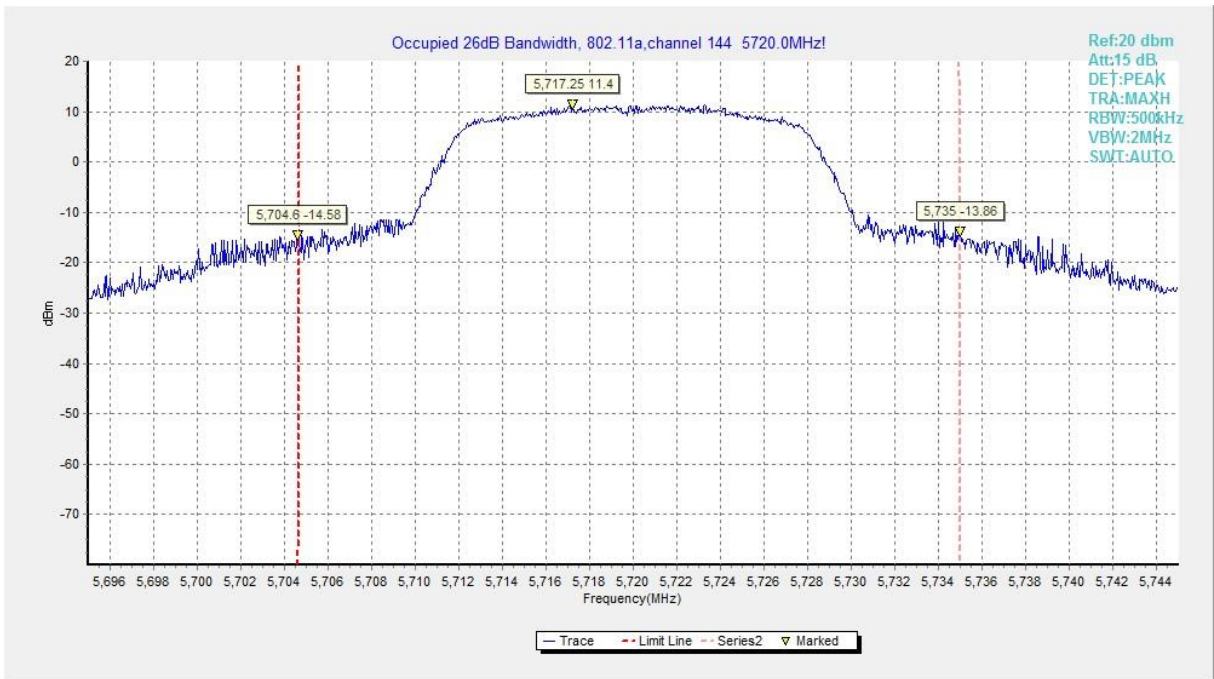


**Fig.10 Occupied 26dB Bandwidth (802.11a, 5720MHz)**

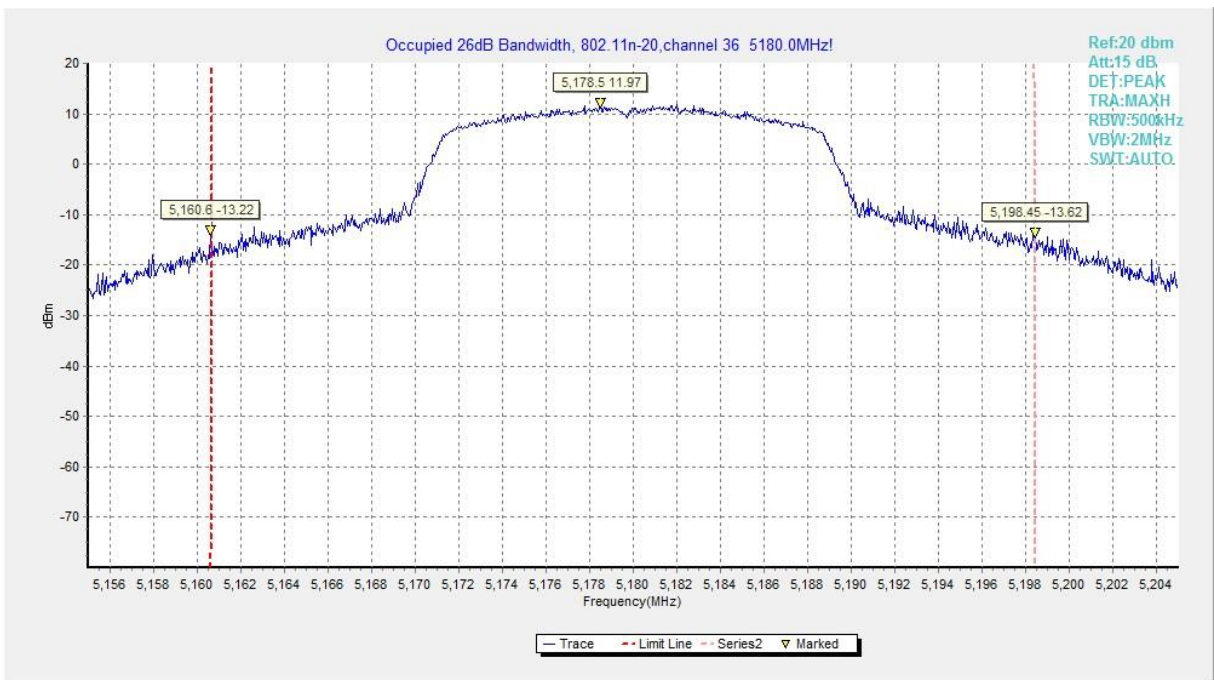


**Fig.11 Occupied 26dB Bandwidth (802.11n-HT20, 5180MHz)**

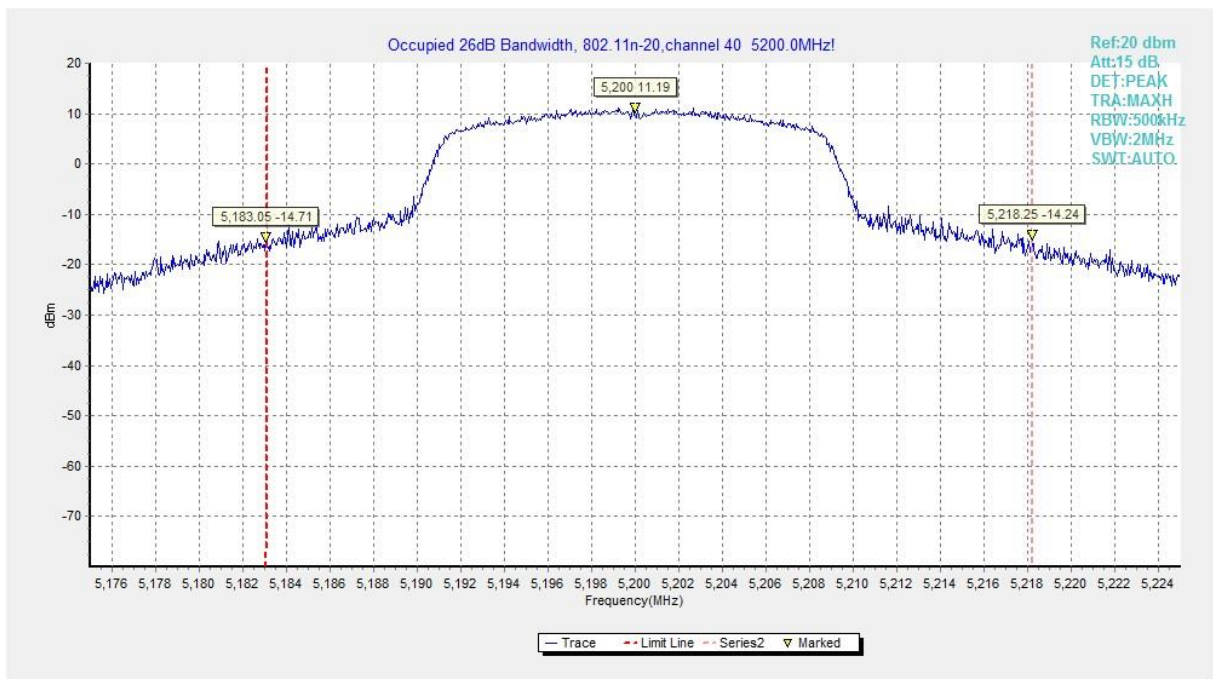


**Fig.12 Occupied 26dB Bandwidth (802.11n-HT20, 5200MHz)**

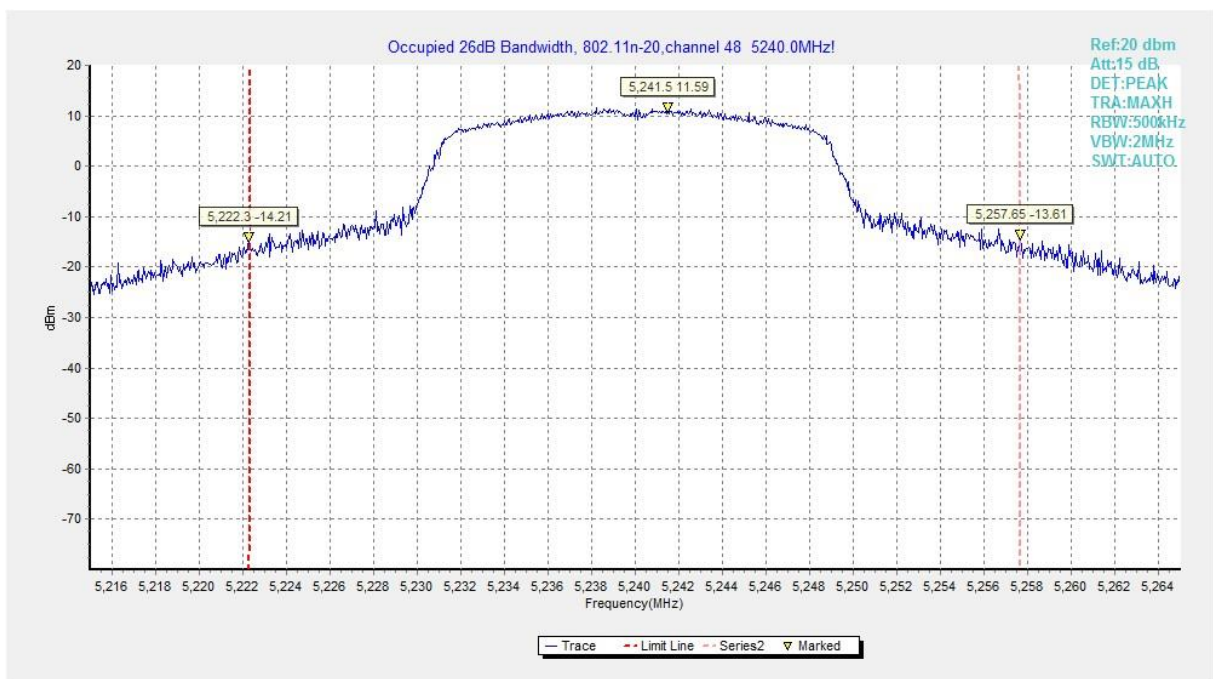

**Fig.13 Occupied 26dB Bandwidth (802.11n-HT20, 5240MHz)**

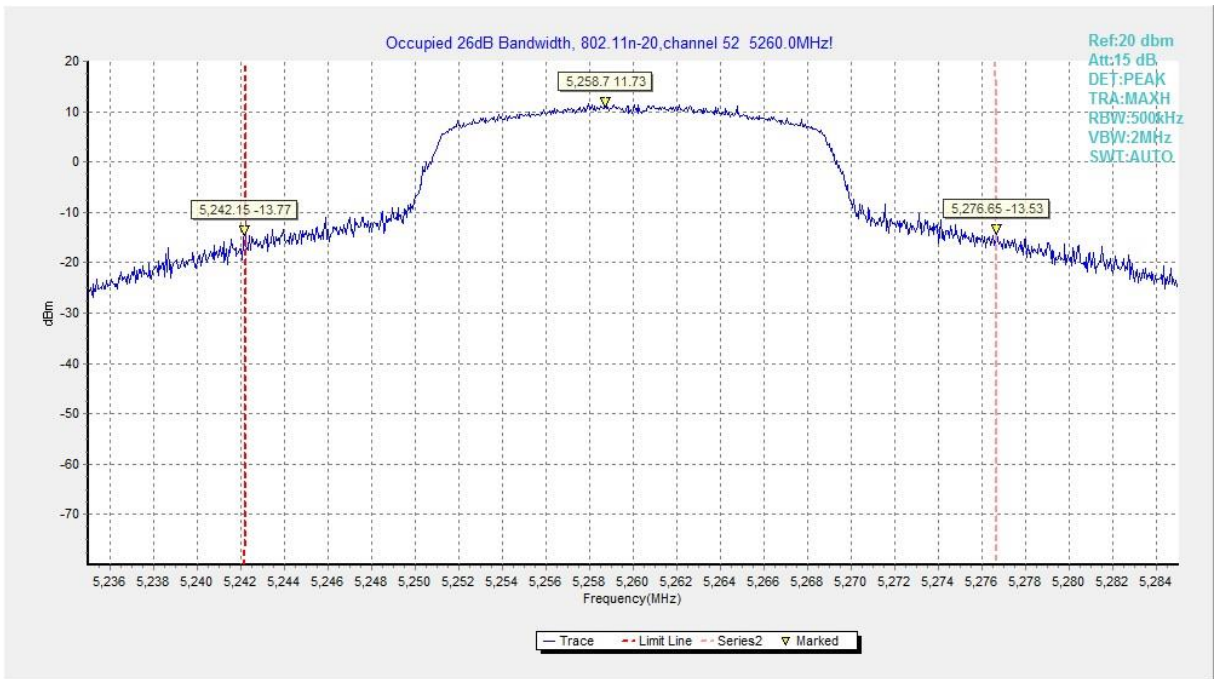


**Fig.14 Occupied 26dB Bandwidth (802.11n-HT20, 5260MHz)**

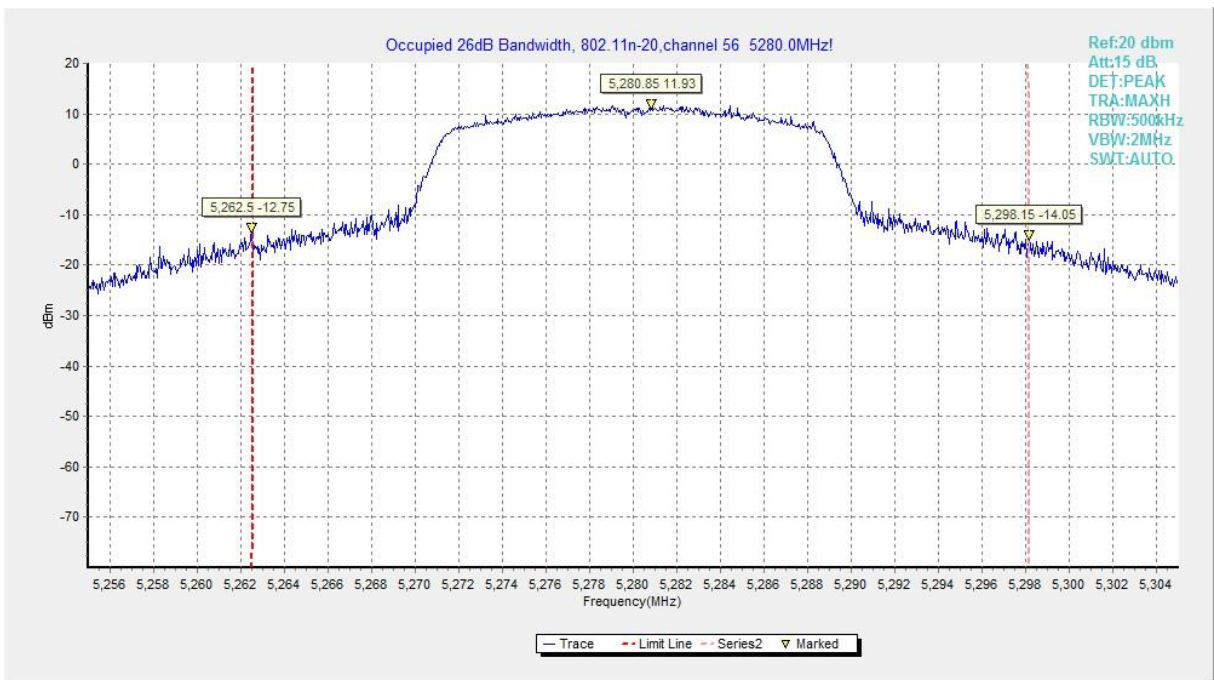


**Fig.15 Occupied 26dB Bandwidth (802.11n-HT20, 5280MHz)**




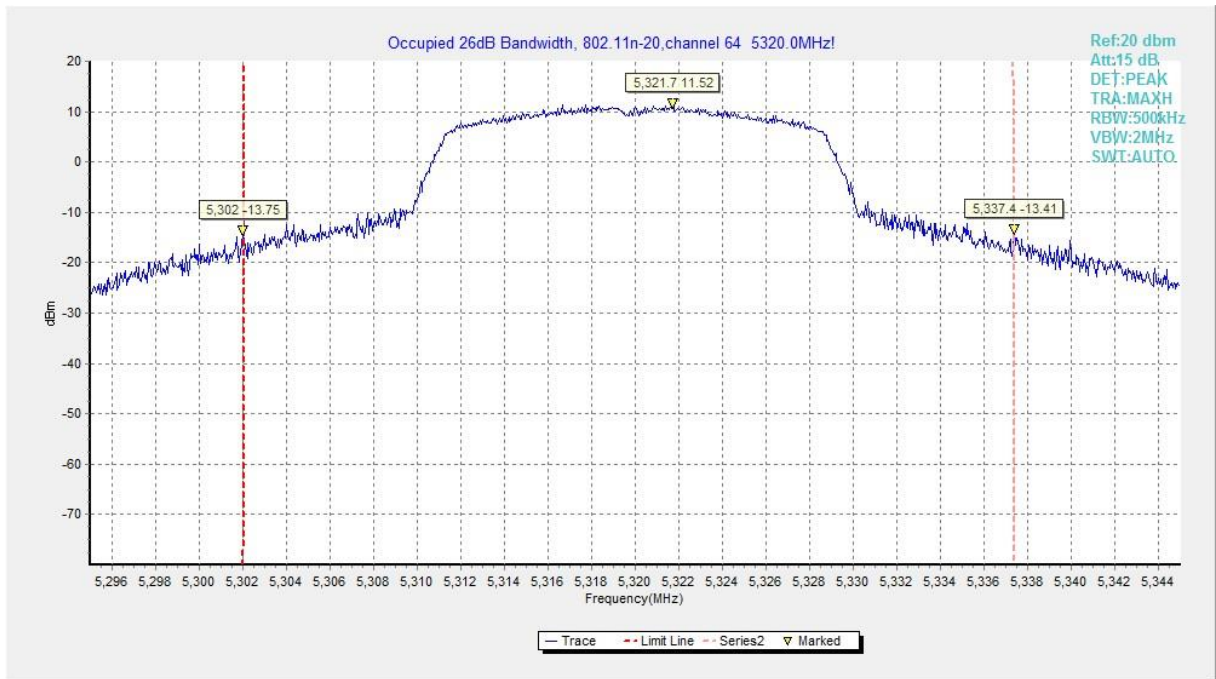


**Fig.16 Occupied 26dB Bandwidth (802.11n-HT20, 5320MHz)**

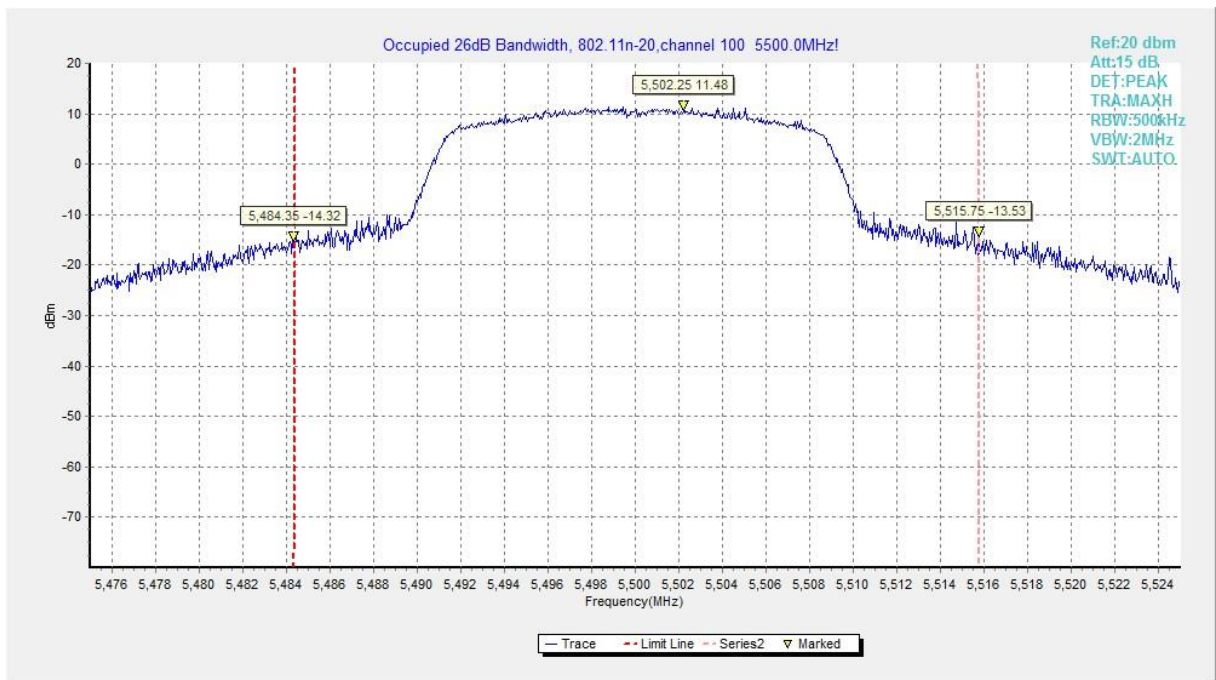


**Fig.17 Occupied 26dB Bandwidth (802.11n-HT20, 5500MHz)**

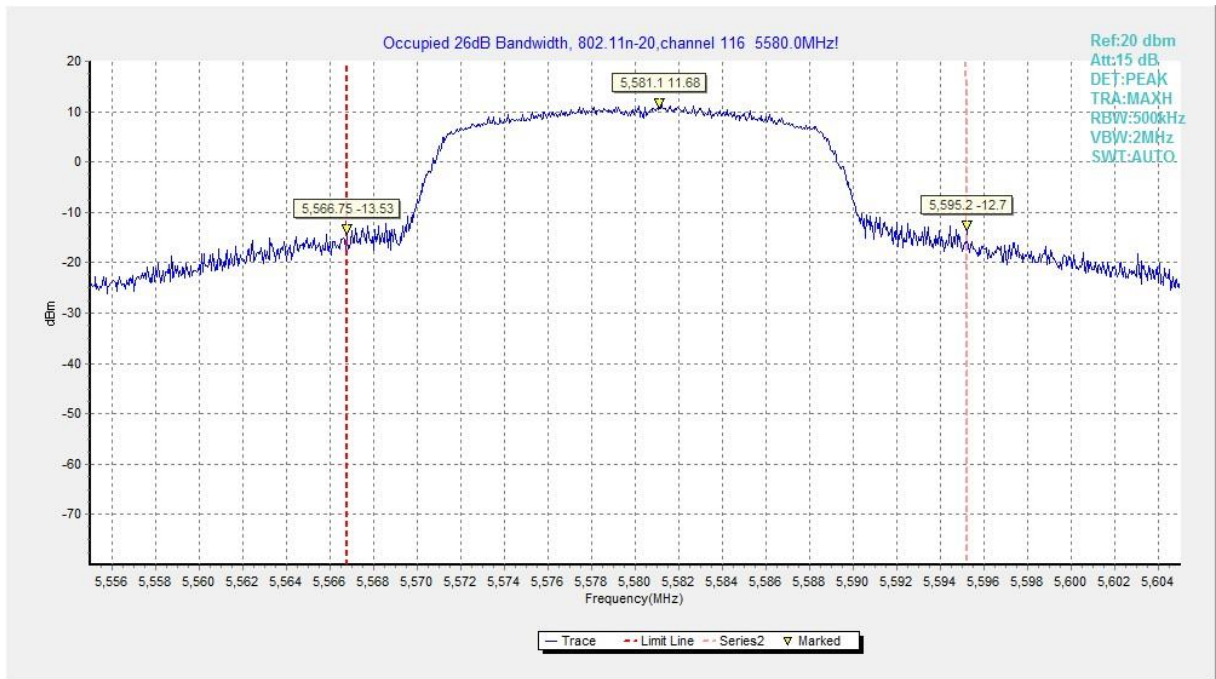


**Fig.18 Occupied 26dB Bandwidth (802. 11n-HT20, 5580MHz)**

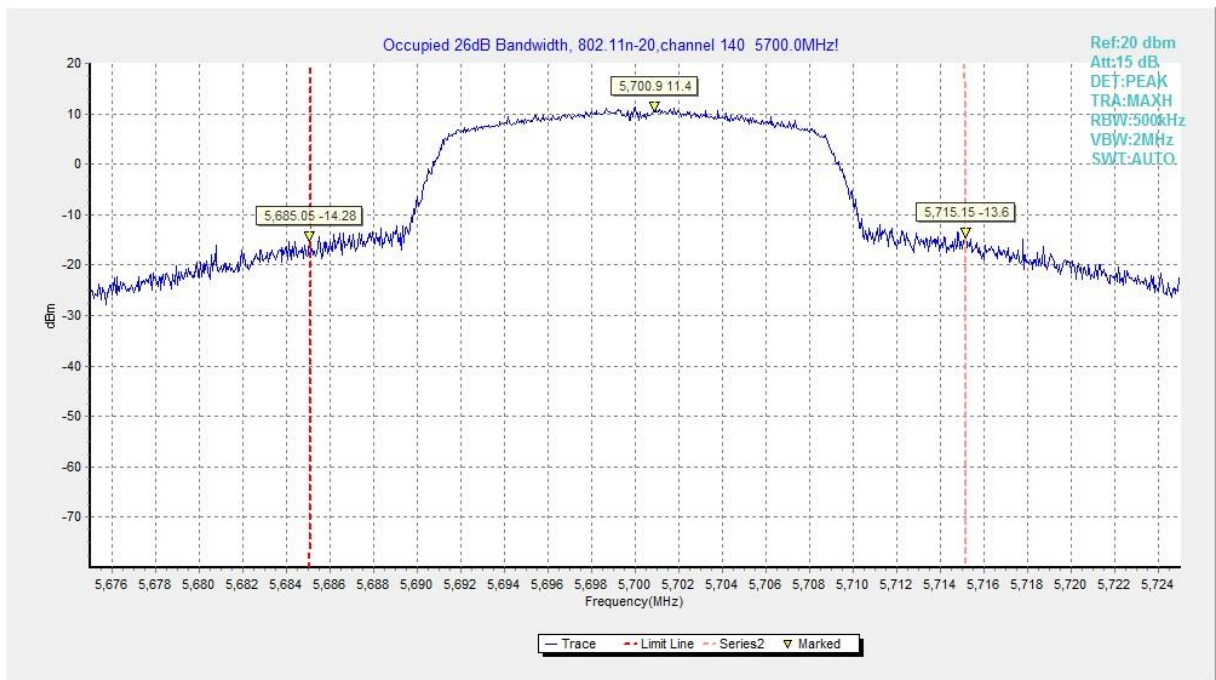


**Fig.19 Occupied 26dB Bandwidth (802. 11n-HT20, 5700MHz)**

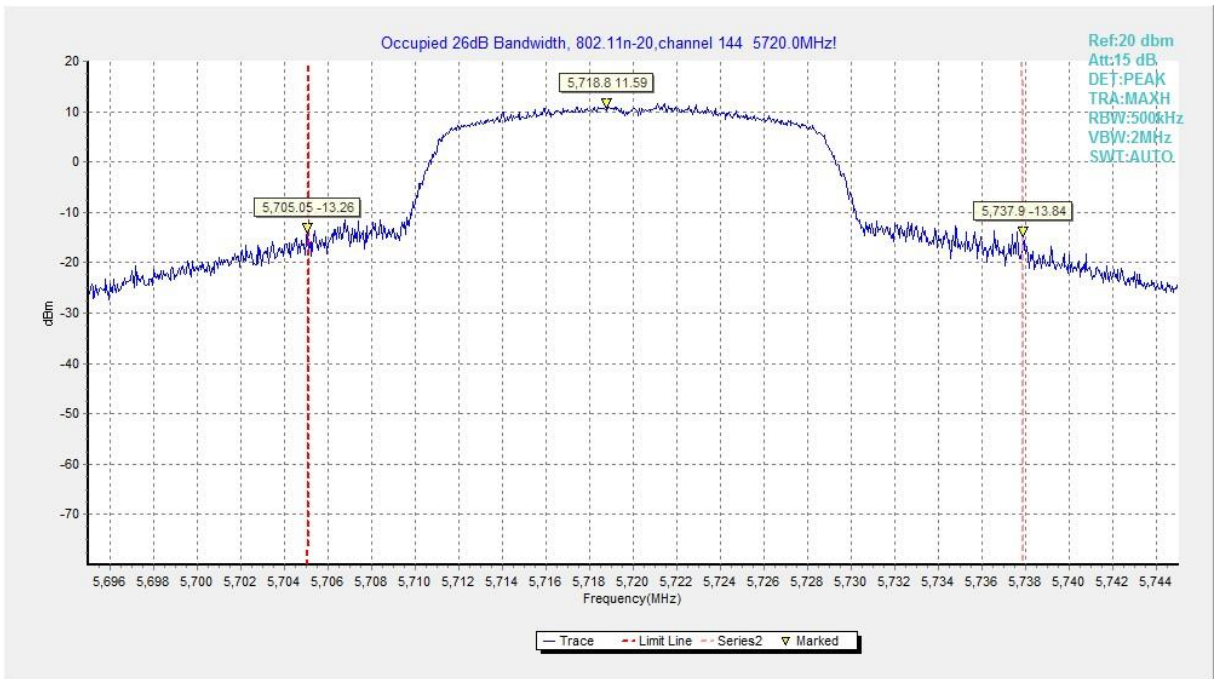


**Fig.20 Occupied 26dB Bandwidth (802. 11n-HT20, 5720MHz)**

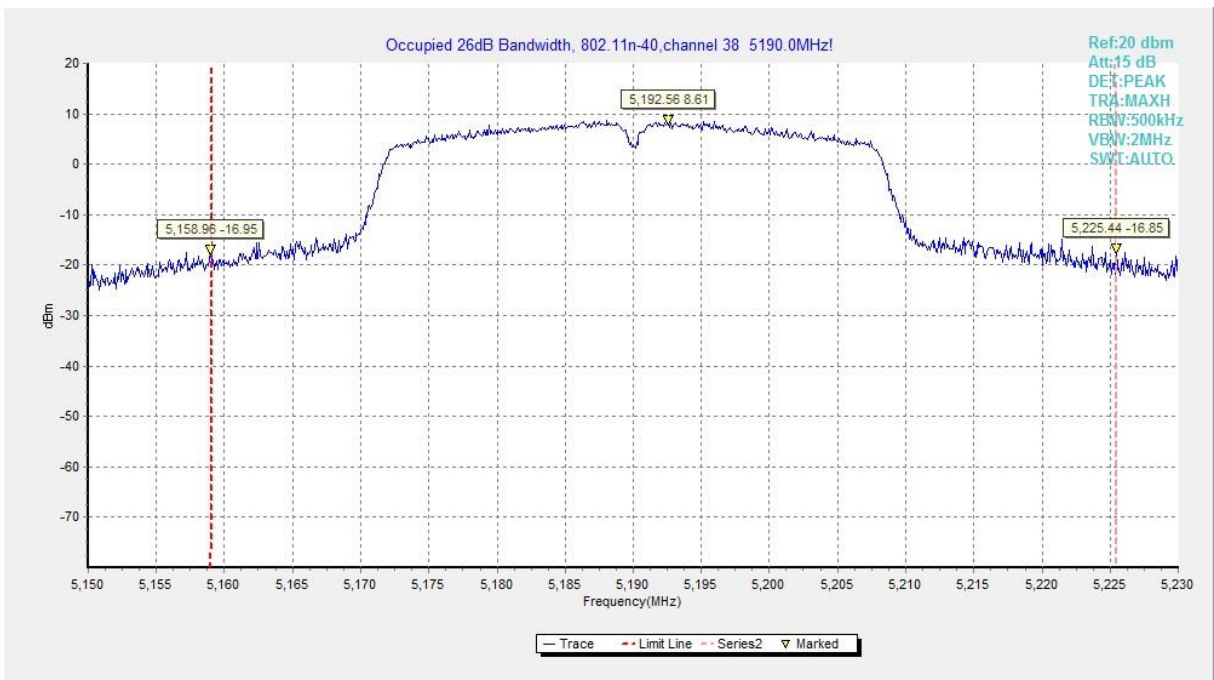


**Fig.21 Occupied 26dB Bandwidth (802.11n-HT40, 5190MHz)**

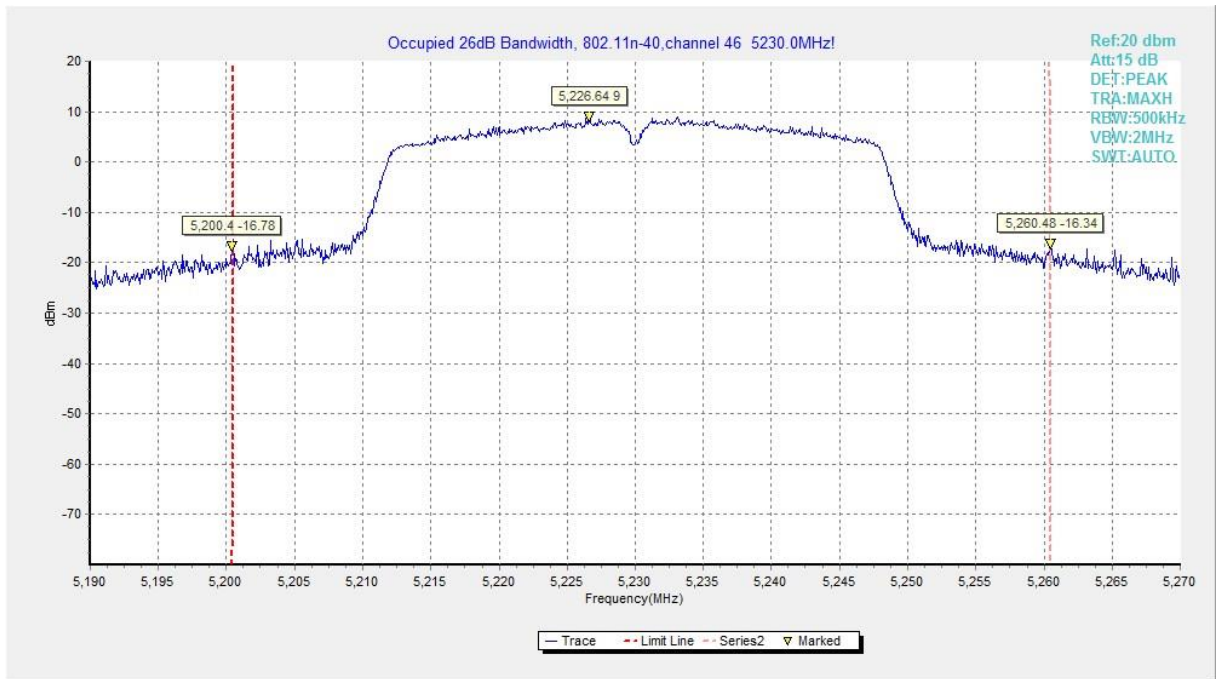


**Fig.22 Occupied 26dB Bandwidth (802.11n-HT40, 5230MHz)**

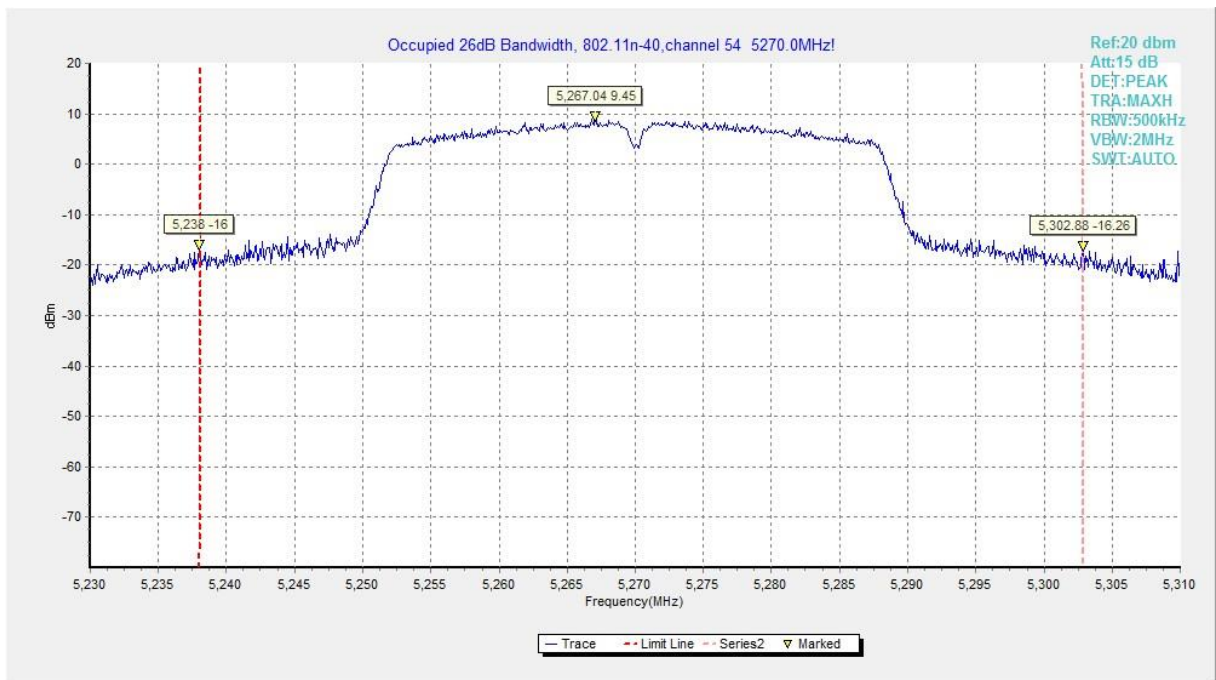

**Fig.23 Occupied 26dB Bandwidth (802.11n-HT40, 5270MHz)**

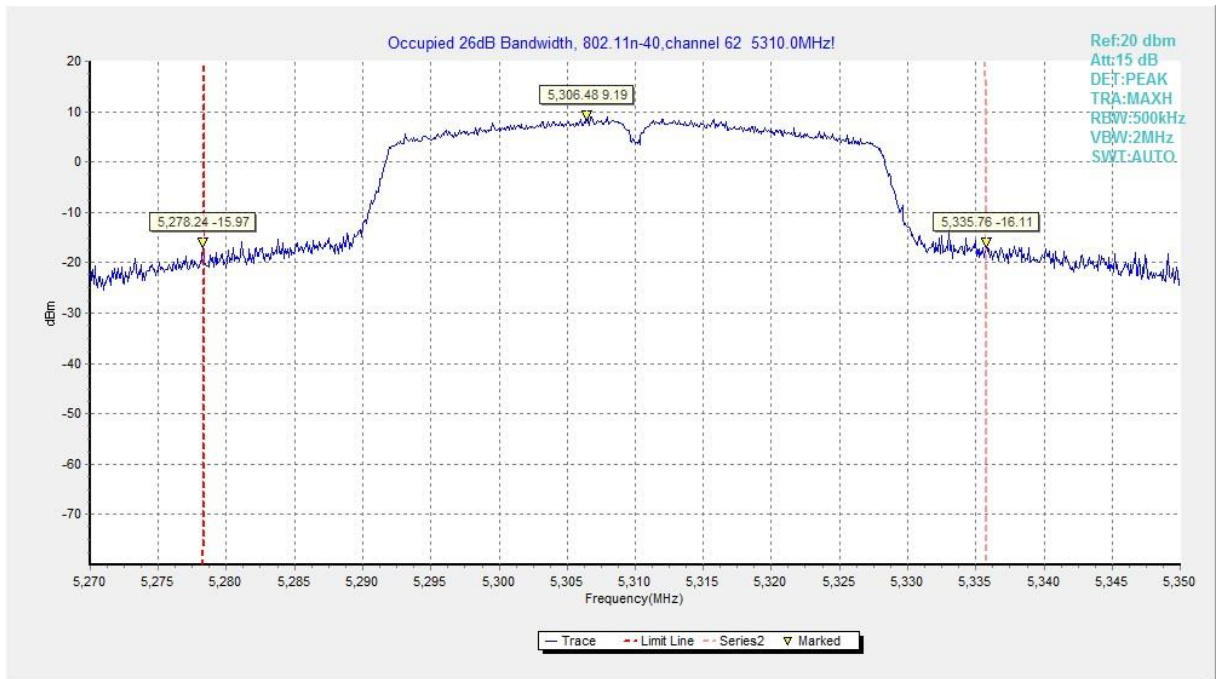

**Fig.24 Occupied 26dB Bandwidth (802.11n-HT40, 5310MHz)**

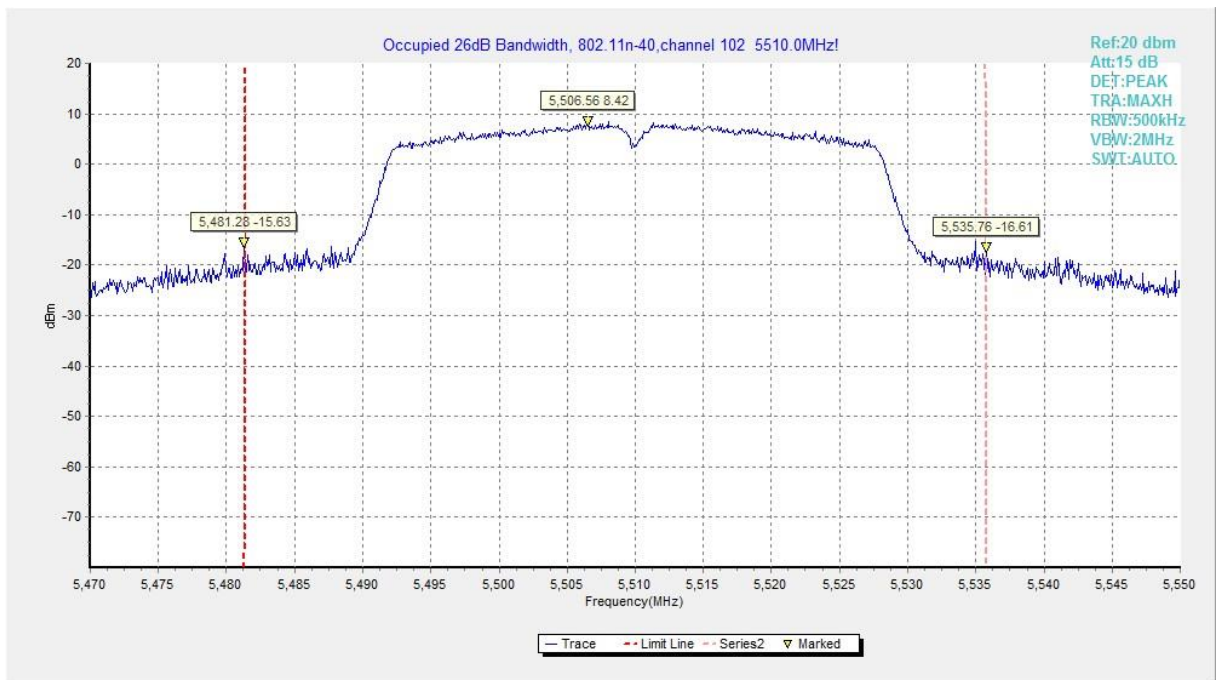

**Fig.25 Occupied 26dB Bandwidth (802.11n-HT40, 5510MHz)**

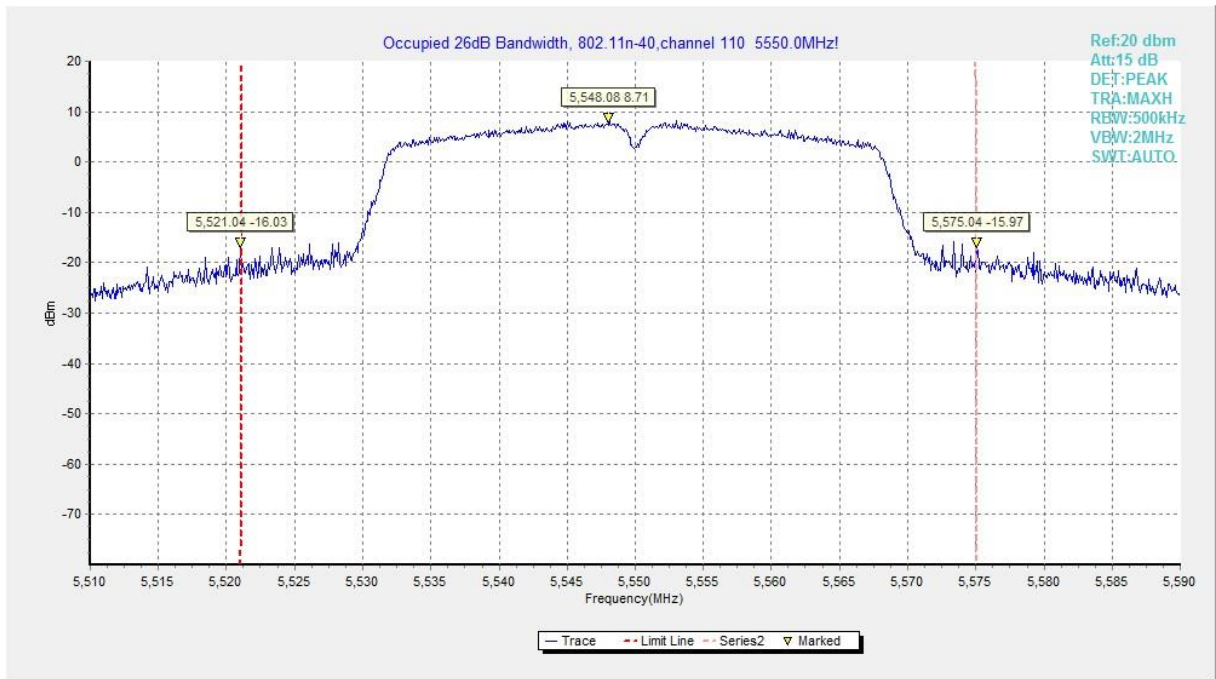


Fig.26 Occupied 26dB Bandwidth (802. 11n-HT40, 5590MHz)



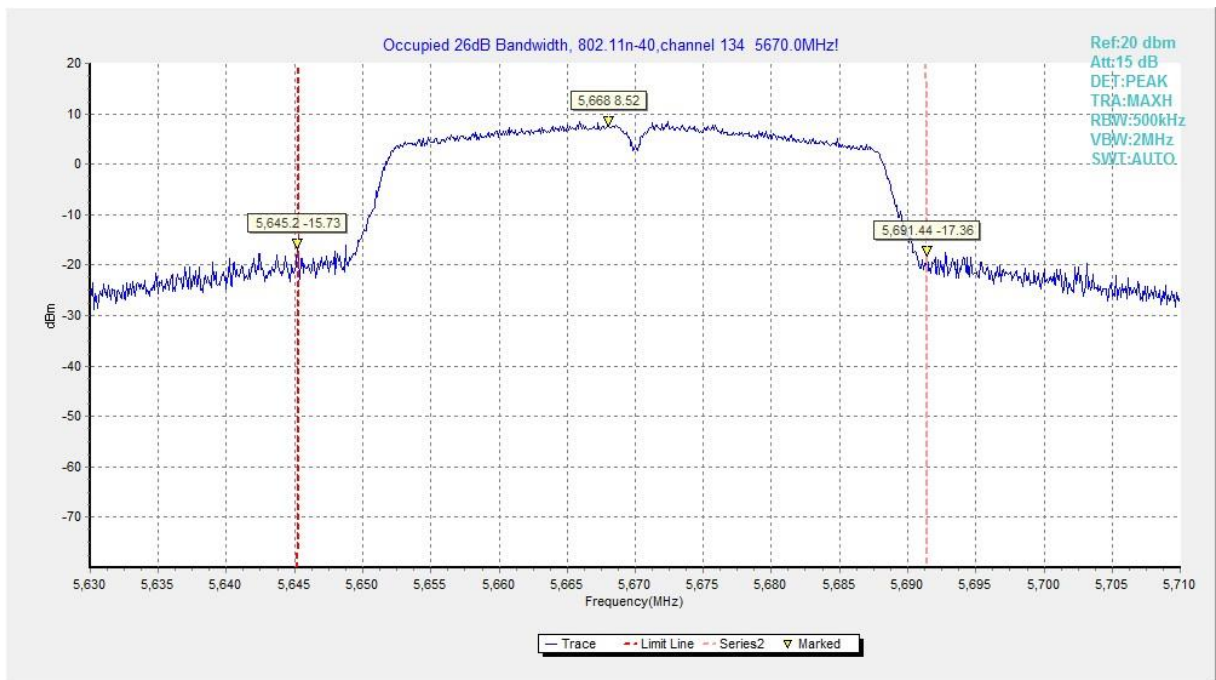



Fig.27 Occupied 26dB Bandwidth (802. 11n-HT40, 5670MHz)

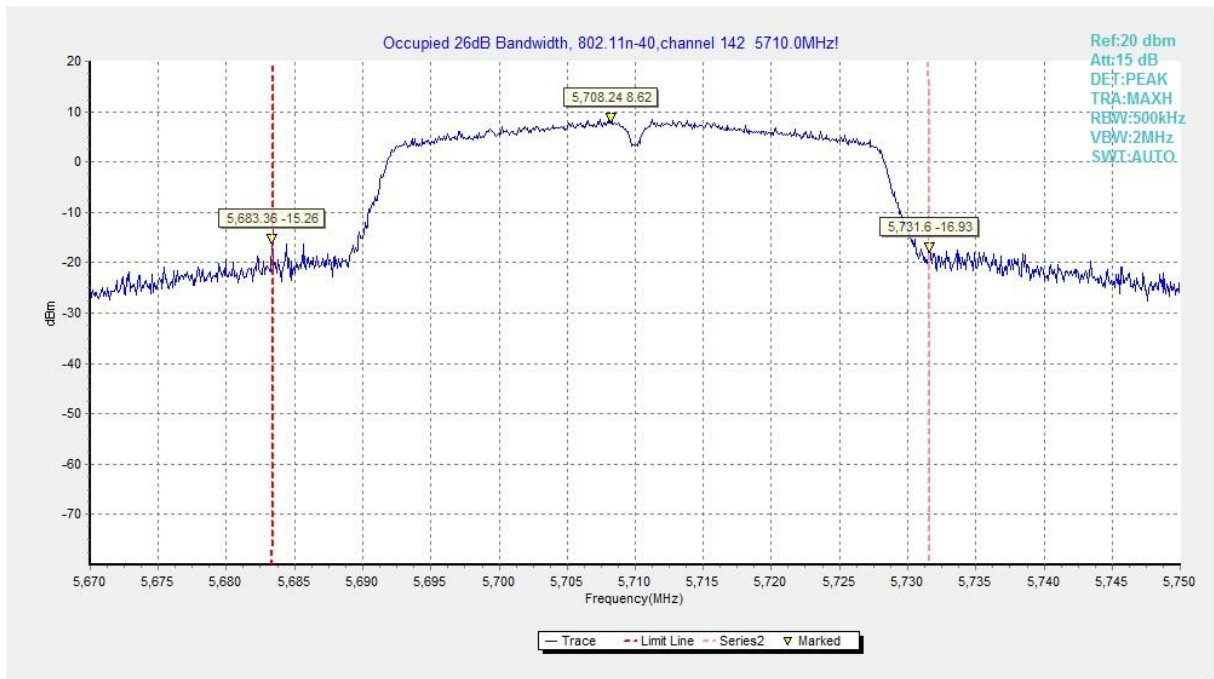


**Fig.28 Occupied 26dB Bandwidth (802. 11n-HT40, 5710MHz)**

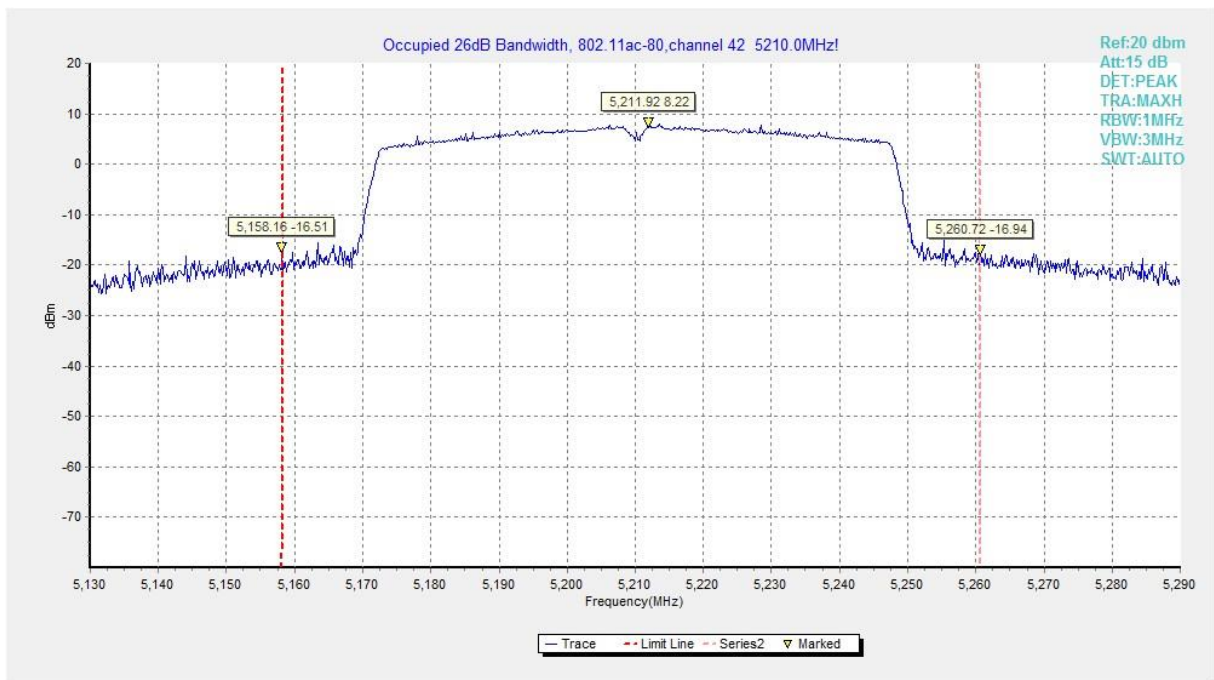

**Fig.29 Occupied 26dB Bandwidth (802. 11ac-HT80, 5210MHz)**

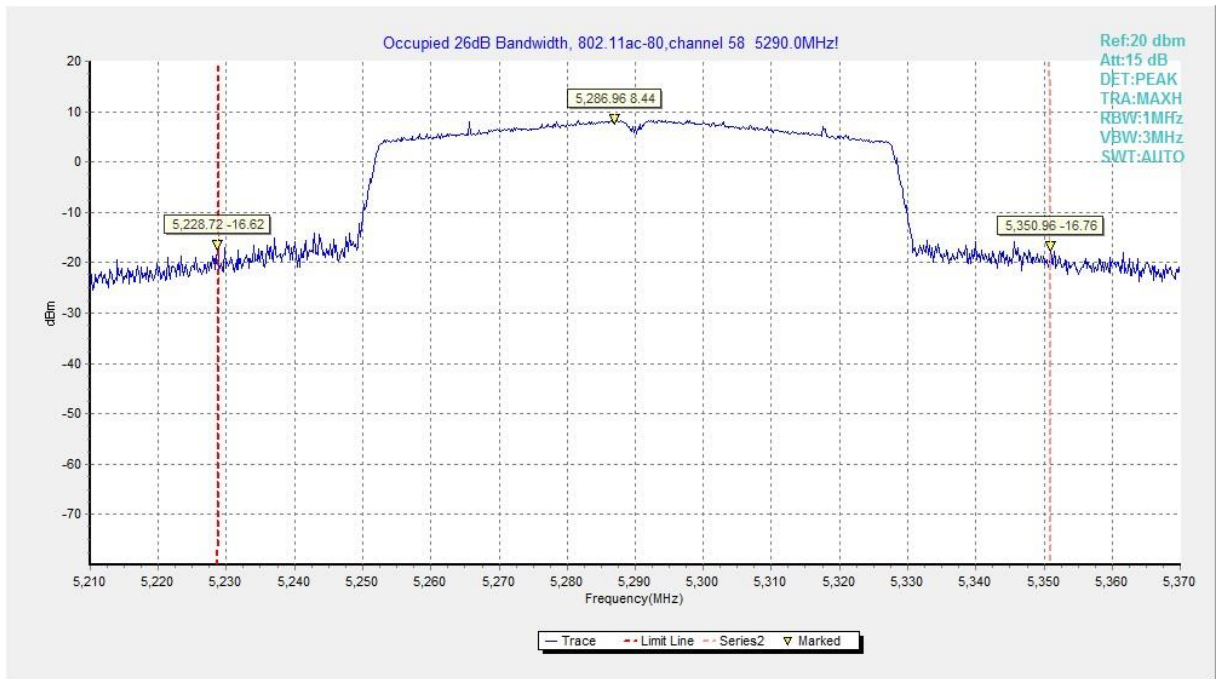


**Fig.30 Occupied 26dB Bandwidth (802. 11ac-HT80, 5290MHz)**

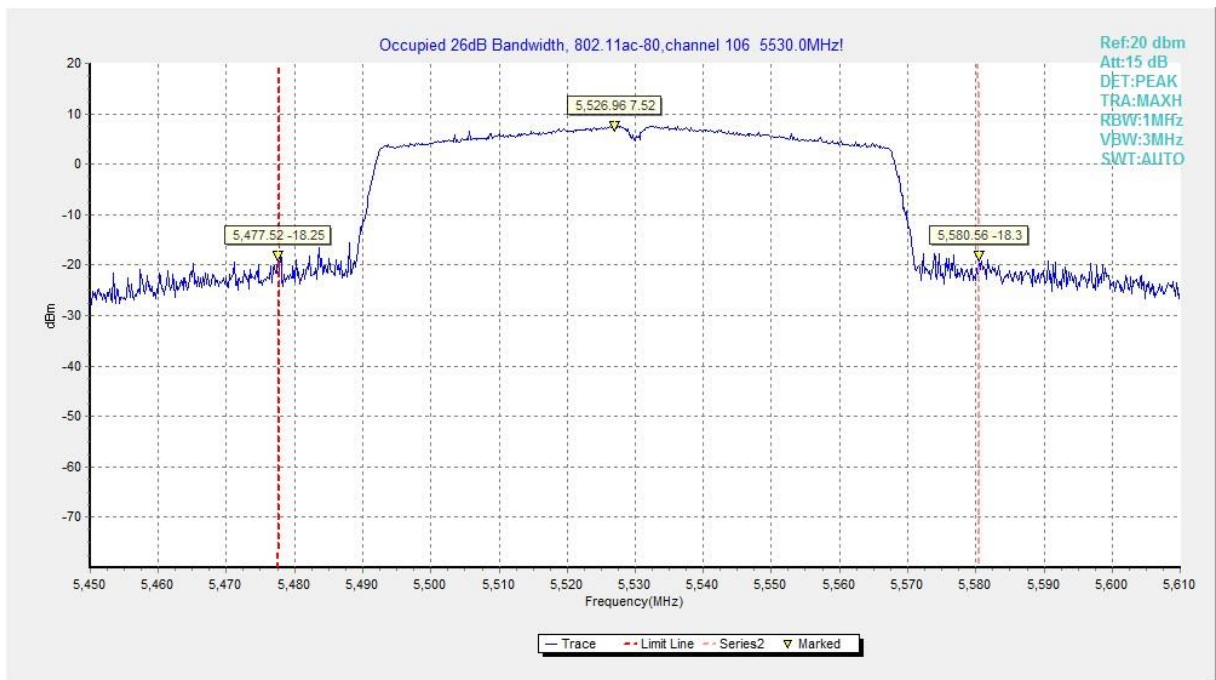


**Fig.31 Occupied 26dB Bandwidth (802. 11ac-HT80, 5530MHz)**



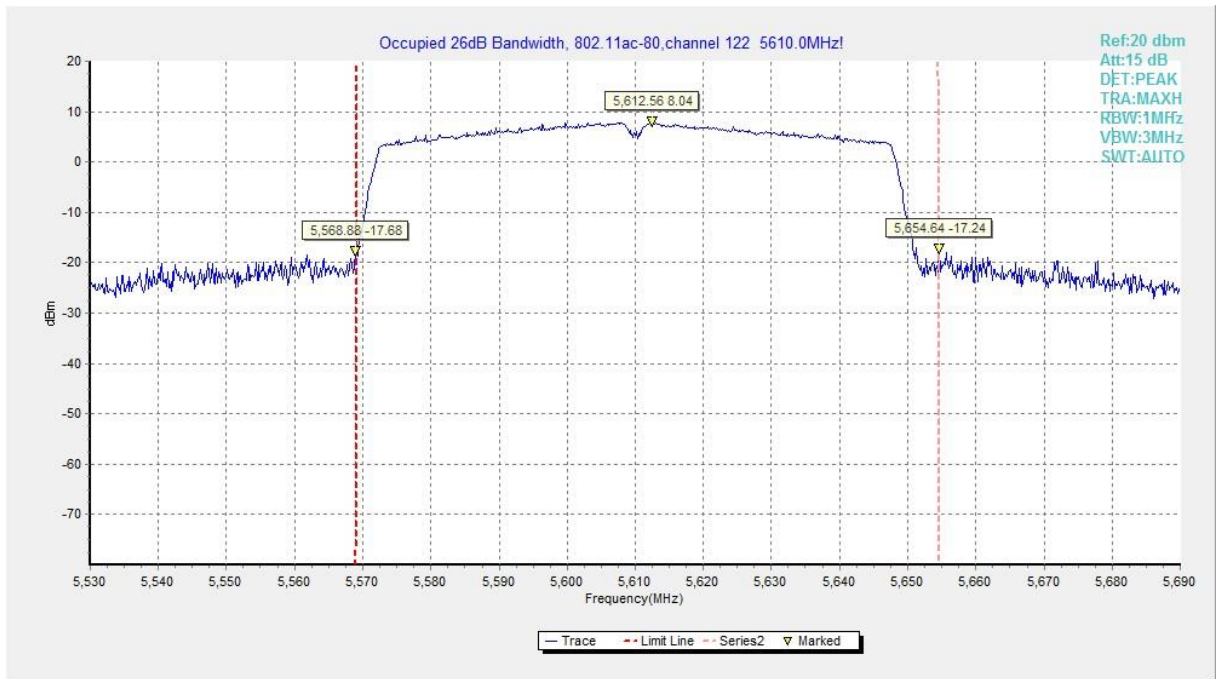

**Fig.32 Occupied 26dB Bandwidth (802.11ac-HT80, 5610MHz)**

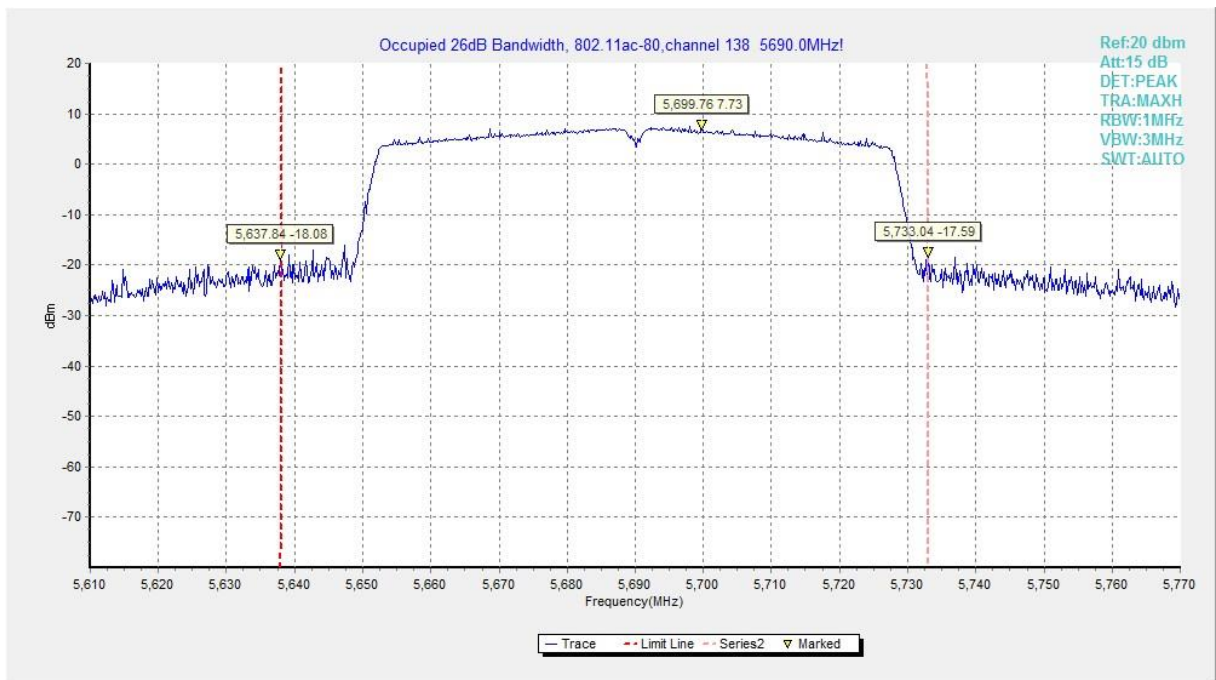

**Fig.33 Occupied 26dB Bandwidth (802.11ac-HT80, 5690MHz)**

## A.5. Band Edges Compliance

### A5.1 Band Edges - Radiated

#### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407	-27 dBm/MHz

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

#### Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)	Measurement distance(m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3


The measurement is made according to ANSI C63.10-2013 and KDB 789033

#### Measurement Result:


Mode	Channel	Test Results	Conclusion
802.11a	5180 MHz	Fig.34	P
	5320 MHz	Fig.35	P
	5500 MHz	Fig.36	P
	5700 MHz	Fig.37	P
802.11n HT20	5180 MHz	Fig.38	P
	5320 MHz	Fig.39	P
	5500 MHz	Fig.40	P
	5700 MHz	Fig.41	P
802.11ac HT20	5180 MHz	Fig.42	P
	5320 MHz	Fig.43	P
	5500 MHz	Fig.44	P
	5700 MHz	Fig.45	P
802.11n HT40	5190 MHz	Fig.46	P
	5310 MHz	Fig.47	P
	5510 MHz	Fig.48	P
	5670 MHz	Fig.49	P
802.11ac HT40	5190 MHz	Fig.50	P
	5310 MHz	Fig.51	P
	5510 MHz	Fig.52	P
	5670 MHz	Fig.53	P
802.11ac HT80	5210MHz	Fig.54	P
	5290MHz	Fig.55	P
	5530MHz	Fig.56	P
	5610MHz	Fig.57	P

**Conclusion: PASS**

Test graphs as below:

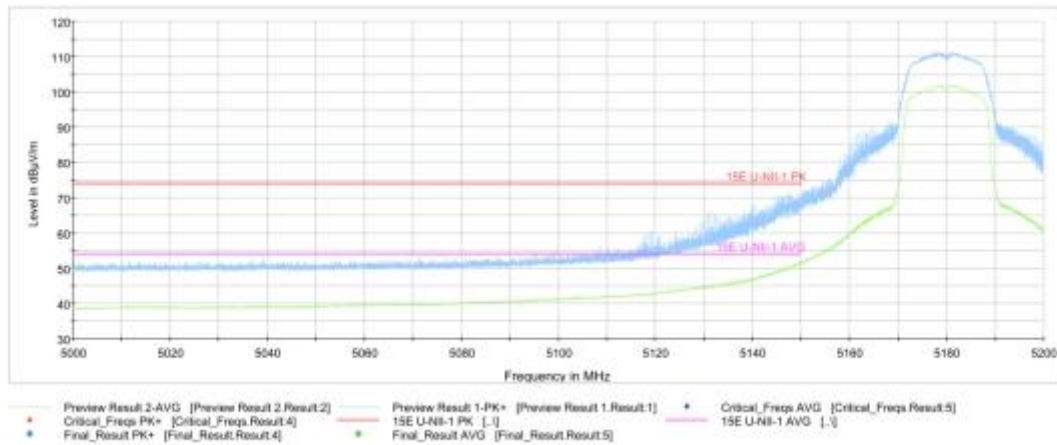

**Fig. 34 Band Edges (802.11a Ch36, 5180MHz)**

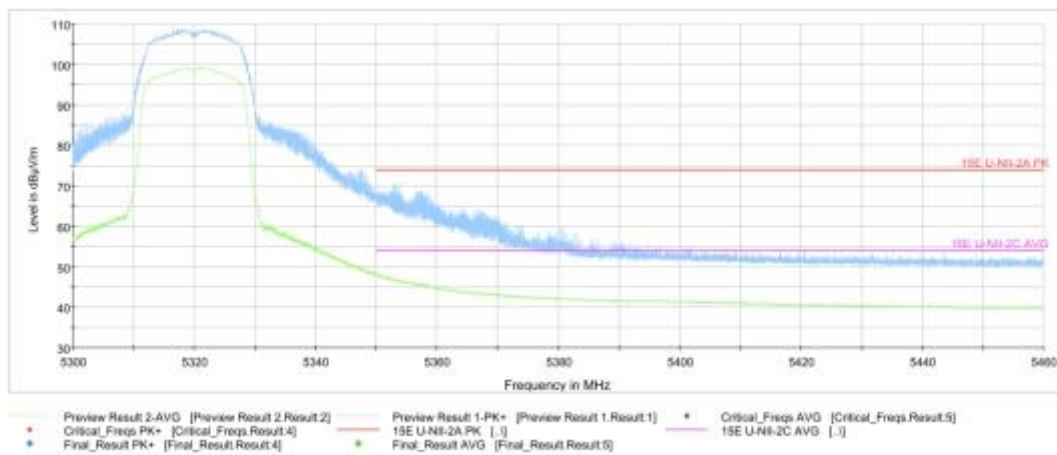

**Fig. 35 Band Edges (802.11a Ch64, 5320MHz)**

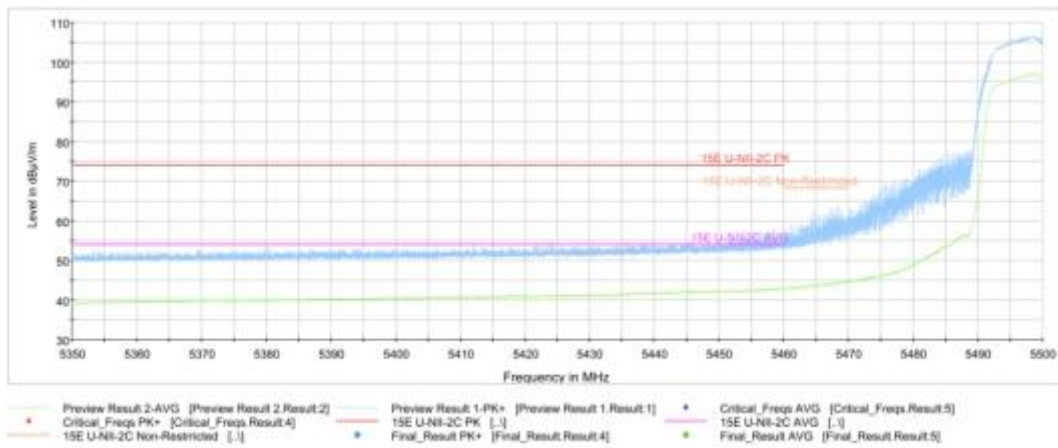


Fig. 36 Band Edges (802.11a Ch100, 5500MHz)



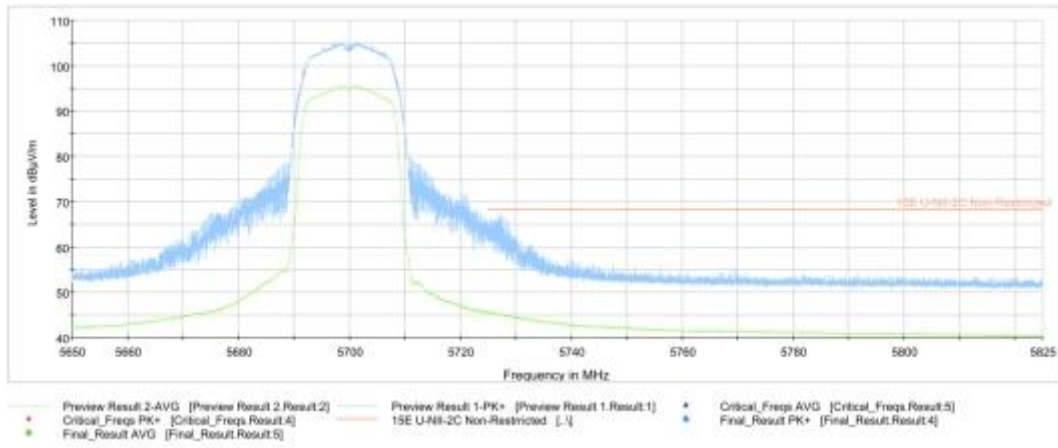



Fig. 37 Band Edges (802.11a Ch140, 5700MHz)

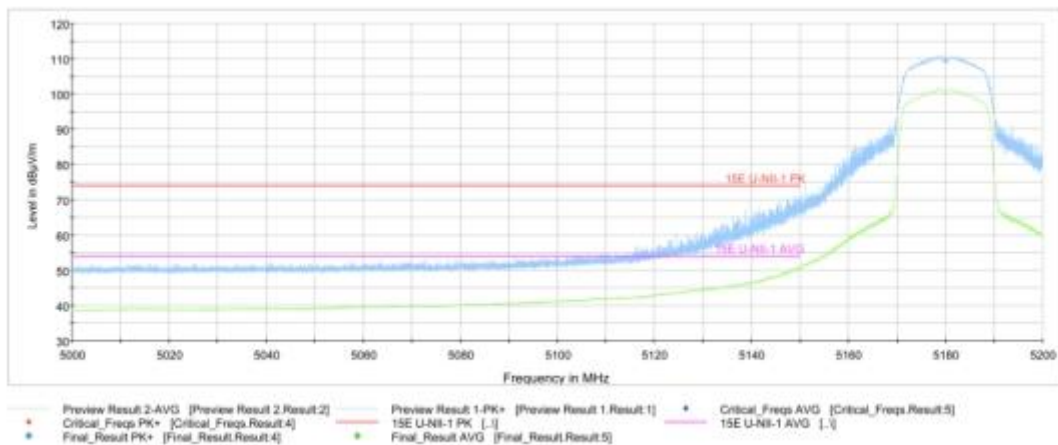

**Fig. 38 Band Edges (802.11n-HT20 Ch36, 5180MHz)**

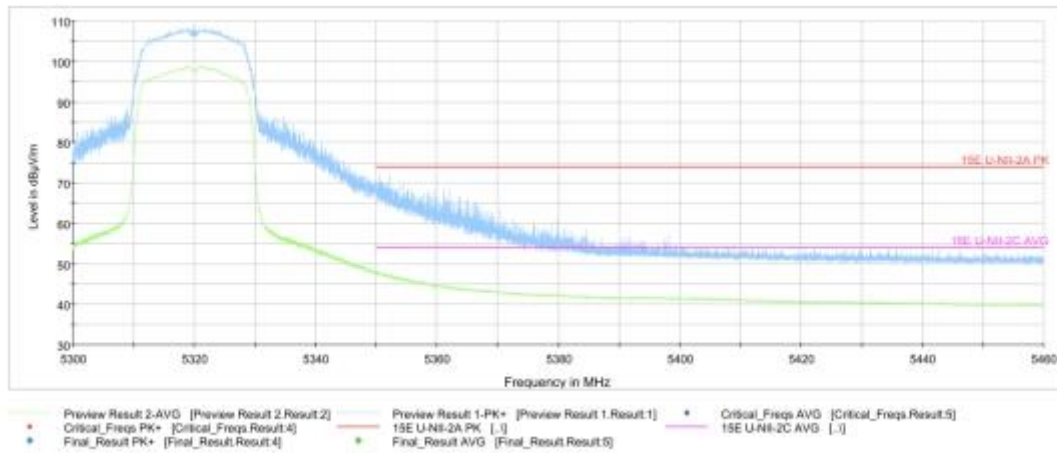

**Fig. 39 Band Edges (802.11n-HT20 Ch64, 5320MHz)**

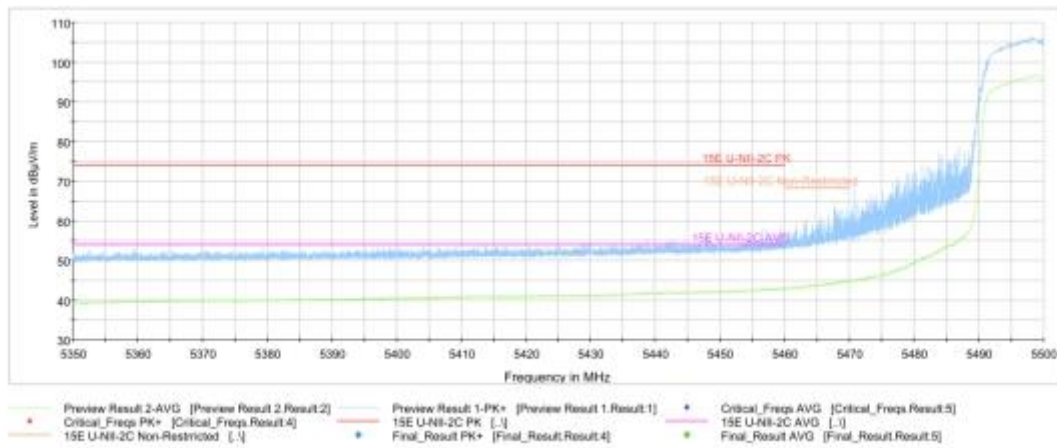

**Fig. 40 Band Edges (802.11n-HT20 Ch100, 5500MHz)**

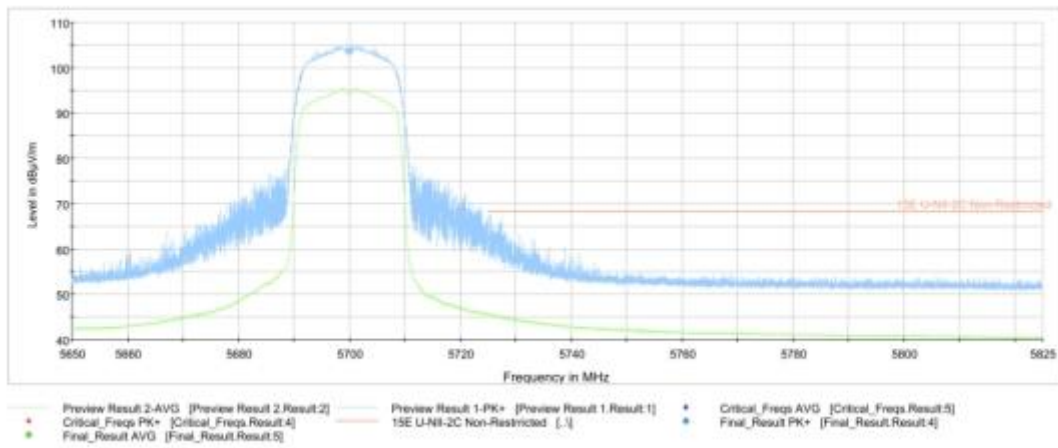


Fig. 41 Band Edges (802.11n-HT20 Ch140, 5700MHz)



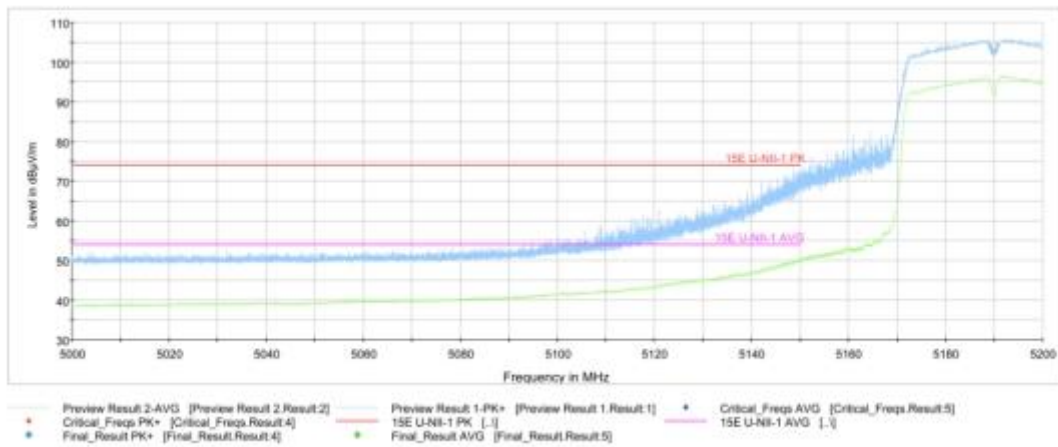



Fig. 42 Band Edges (802.11n-HT40 Ch38, 5190MHz)

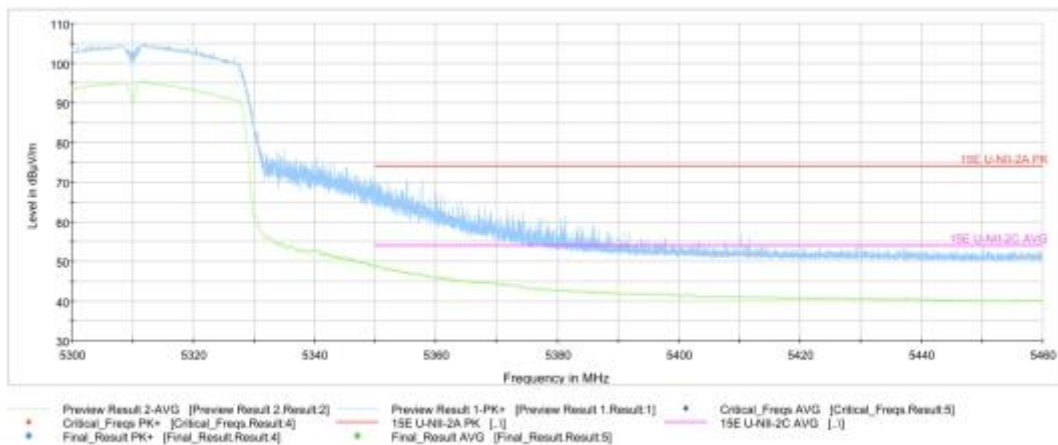


**Fig. 43 Band Edges (802.11n-HT40 Ch62, 5310MHz)**

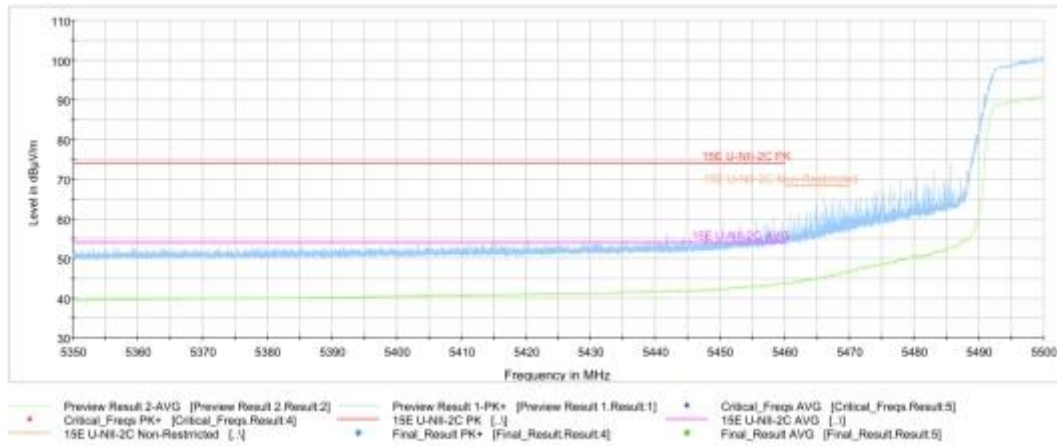


**Fig. 44 Band Edges (802.11n-HT40 Ch102, 5510MHz)**

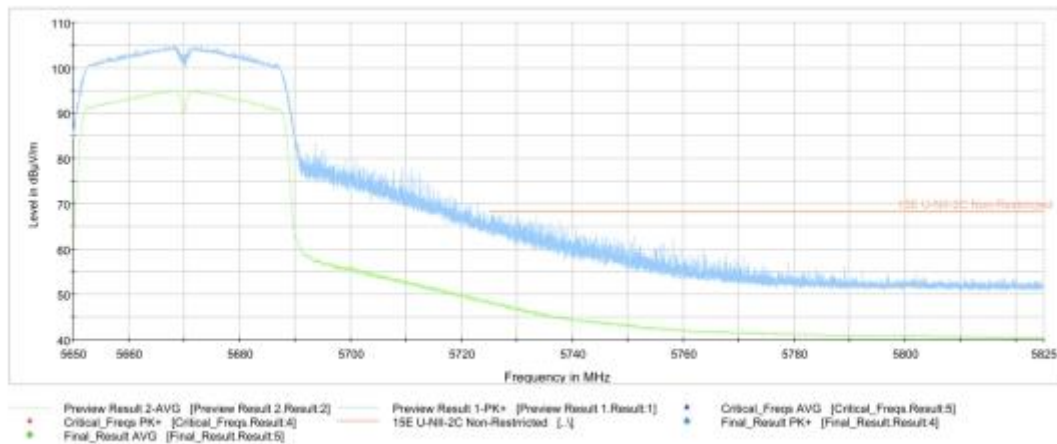


**Fig. 45 Band Edges (802.11n-HT40 Ch134, 5670MHz)**

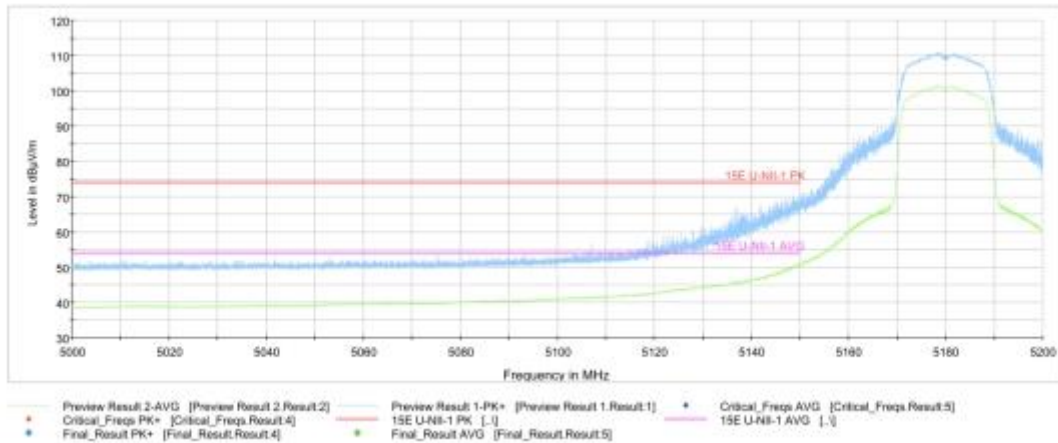

**Fig. 46 Band Edges (802.11ac-HT20 Ch36, 5180MHz)**

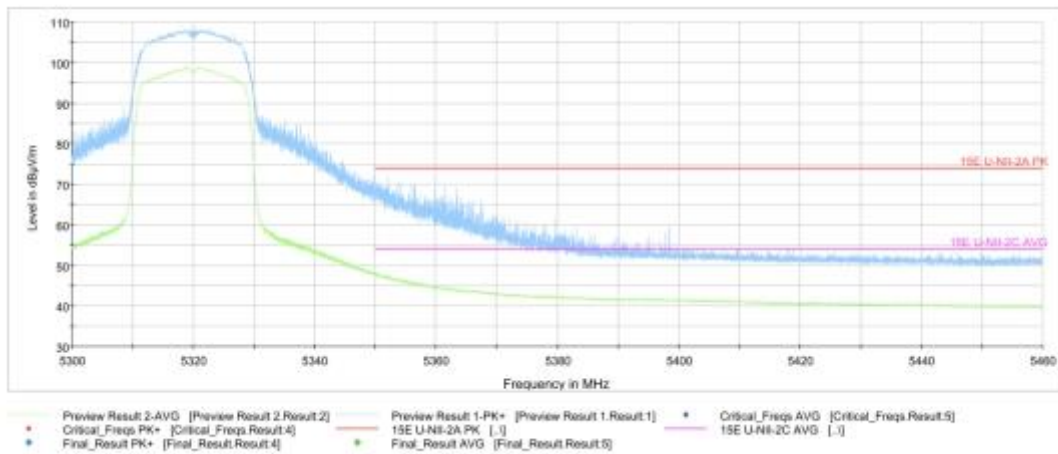


**Fig. 47 Band Edges (802.11ac-HT20 Ch64, 5320MHz)**

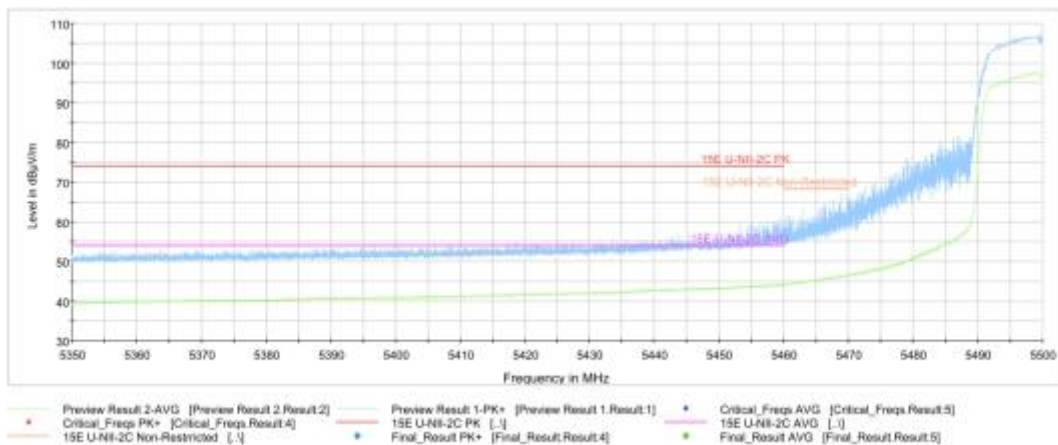





**Fig. 48 Band Edges (802.11ac-HT20 Ch100, 5500MHz)**

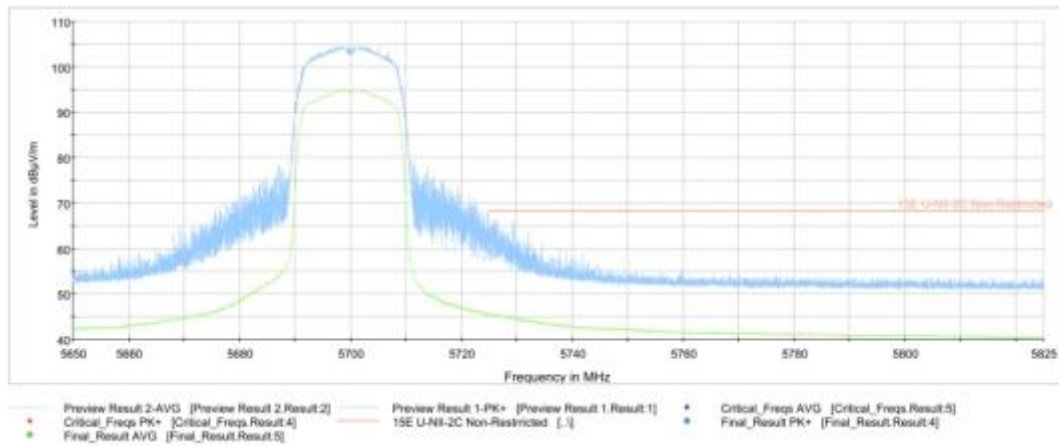


**Fig. 49 Band Edges (802.11ac-HT20 Ch140, 5700MHz)**

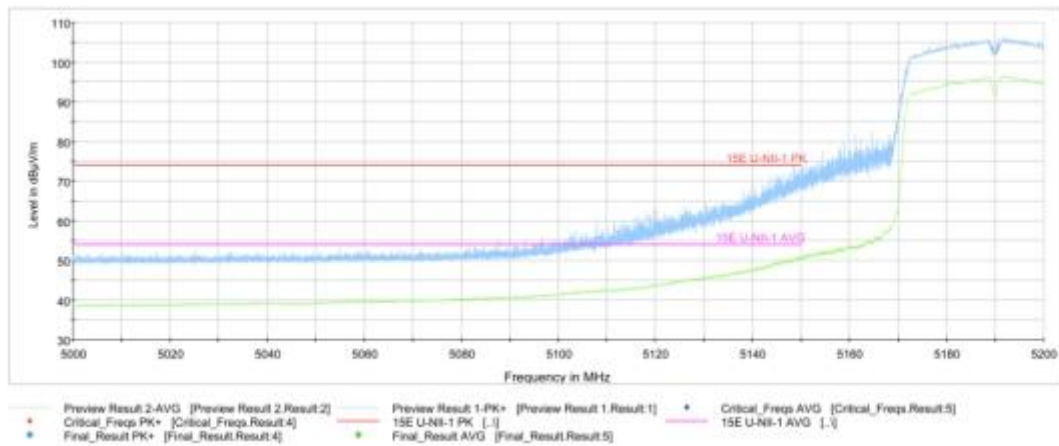


**Fig. 50 Band Edges (802.11ac-HT40 Ch38, 5190MHz)**

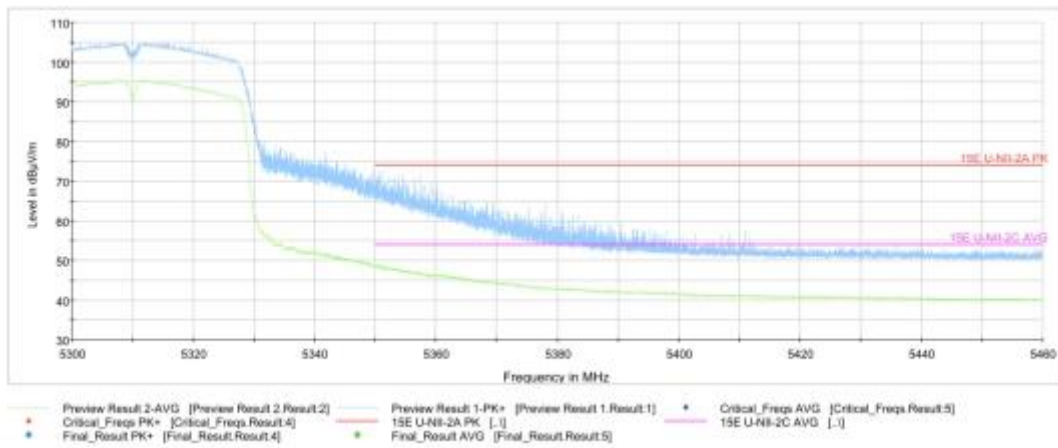


**Fig. 51 Band Edges (802.11ac-HT40 Ch62, 5310MHz)**

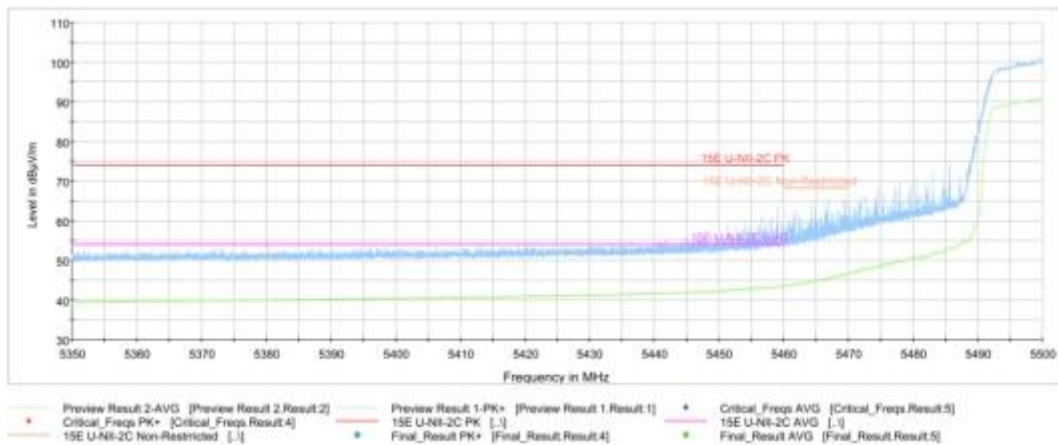


**Fig. 52 Band Edges (802.11ac-HT40 Ch102, 5510MHz)**

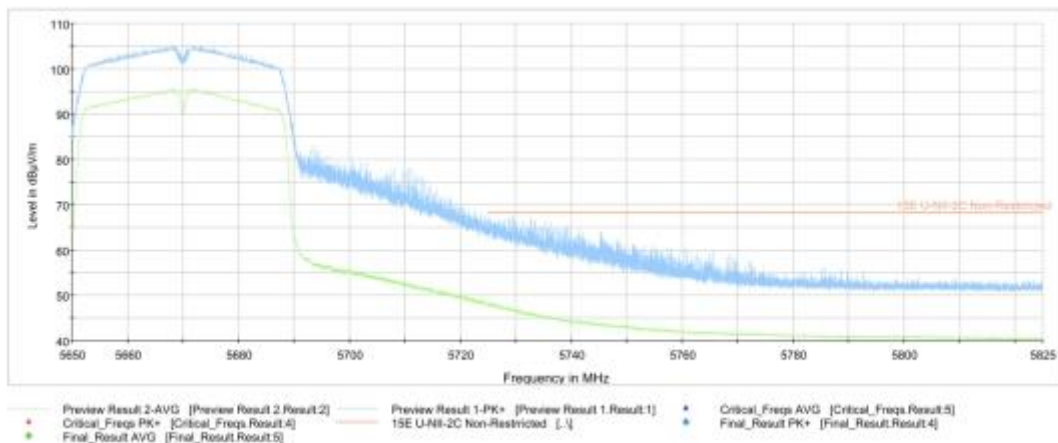


**Fig. 53 Band Edges (802.11ac-HT40 Ch134, 5670MHz)**

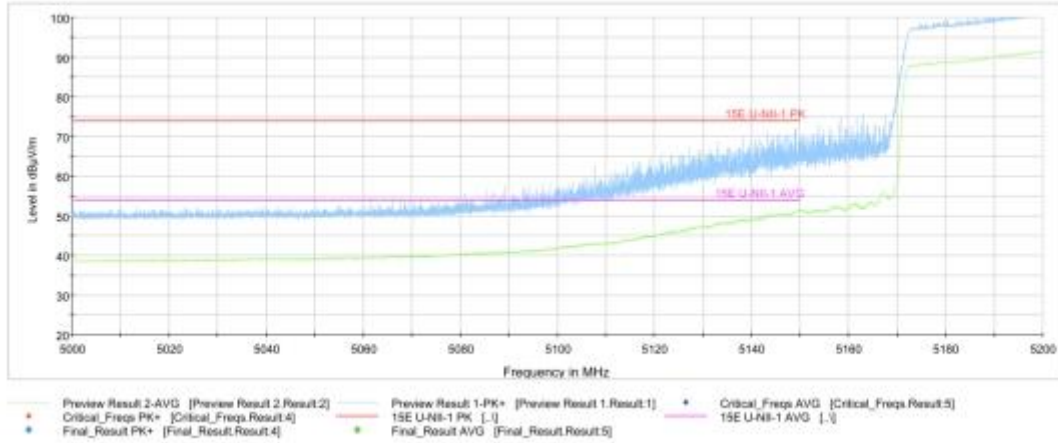


**Fig. 54 Band Edges (802.11ac-HT80 Ch42 , 5210MHz)**

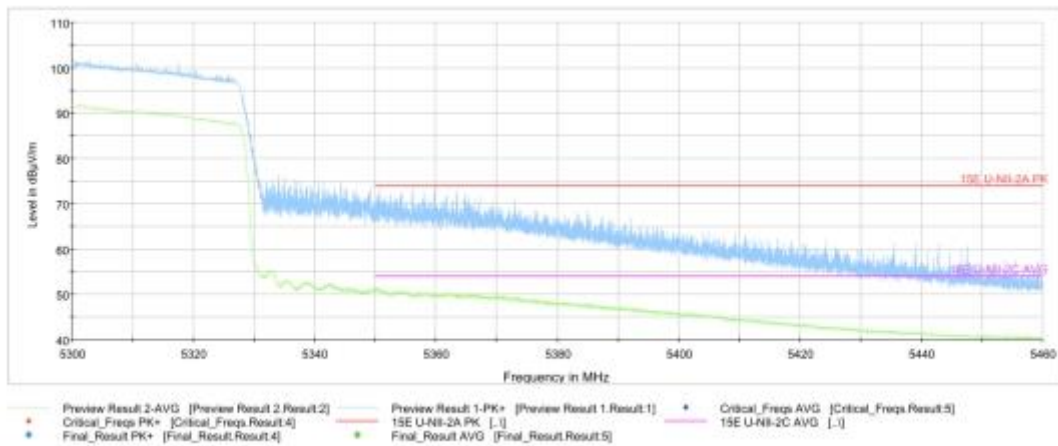

**Fig. 55 Band Edges (802.11ac-HT80 Ch58, 5290MHz)**

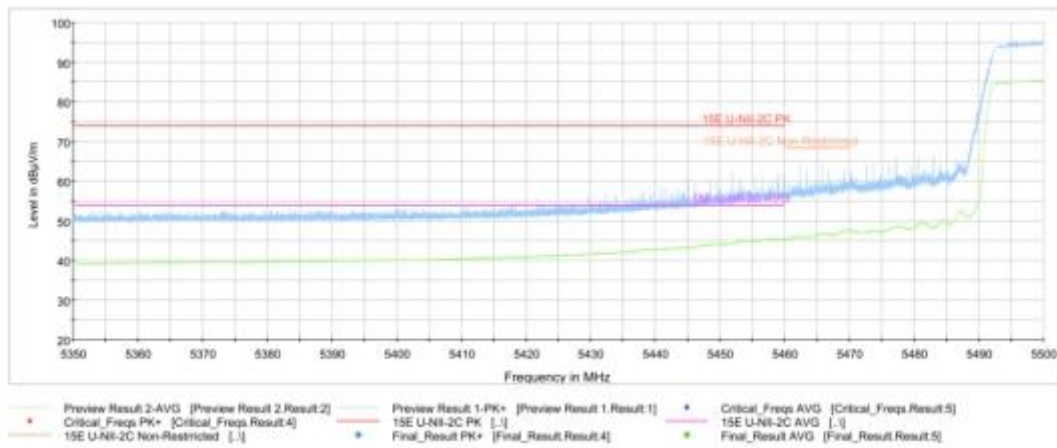

**Fig. 56 Band Edges (802.11ac-HT80 Ch106, 5530MHz)**

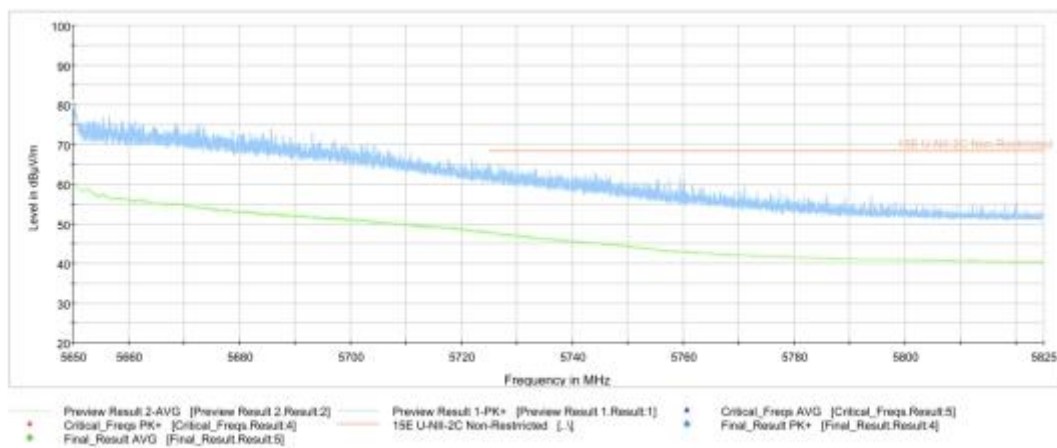

**Fig. 57 Band Edges (802.11ac-HT80 Ch122, 5610MHz)**

## A.6. Transmitter Spurious Emission

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407	-27 dBm/MHz

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

### Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)	Measurement distance(m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

The measurement is made according to ANSI C63.10-2013 and KDB 789033

### Measurement Results:

**802.11a mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11a	36(5180MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	40(5200MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	48(5240MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	52(5260MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	56(5280MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	64(5320MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	100(5500MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	120(5600MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	140(5700MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

**802.11n-HT20 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n -HT20	36(5180MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	40(5200MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	48(5240MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	52(5260MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	56(5280MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	64(5320MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	100(5500MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	120(5600MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	140(5700MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

**802.11n-HT40 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n HT40	38(5190MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	46(5230MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	54(5270MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	62(5310MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	102(5510MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	118(5590MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
134(5670MHz)	30 MHz ~1 GHz	---	P	
	1 GHz ~ 3 GHz	---	P	
	3 GHz ~ 7 GHz	---	P	
	7 GHz ~ 18 GHz	---	P	
	18 GHz ~ 26.5 GHz	---	P	
	26.5 GHz ~ 40 GHz	---	P	



**802.11ac-HT20 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11ac -HT20	36(5180MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	40(5200MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	48(5240MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	52(5260MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	56(5280MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	64(5320MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	100(5500MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	120(5600MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	140(5700MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P

**802.11ac-HT40 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11ac HT40	38(5190MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	46(5230MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	54(5270MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	62(5310MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	102(5510MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P
	118(5590MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	134(5670MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
		26.5 GHz ~ 40 GHz	---	P

**802.11ac-HT80 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11ac – HT80	42(5210MHz)	1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
	58(5290MHz)	30 MHz ~1 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
		7 GHz ~ 18 GHz	---	P
		18 GHz ~ 26.5 GHz	---	P
	106(5530MHz)	26.5 GHz ~ 40 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
	122(5610MHz)	7 GHz ~ 18 GHz	---	P
		1 GHz ~ 3 GHz	---	P
		3 GHz ~ 7 GHz	---	P
			7 GHz ~ 18 GHz	---

**Conclusion: PASS**

**Note:**

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

**AVERAGE Results:**
**802.11a**

## Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17990.100	41.84	-25.50	46.66	20.68	54.00	12.16	V
17983.500	41.82	-25.50	46.66	20.66	54.00	12.18	H
13255.100	37.16	-29.67	39.55	27.28	54.00	16.84	H
13348.600	37.16	-29.49	39.71	26.94	54.00	16.84	H
5149.900	51.72	-27.61	33.67	45.66	54.00	2.28	H
5150.000	51.50	-27.61	33.67	45.44	54.00	2.50	H

## Channel 40

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17995.000	41.88	-25.50	46.66	20.72	54.00	12.12	V
17992.300	41.85	-25.50	46.66	20.69	54.00	12.15	V
13306.300	37.14	-29.49	39.71	26.92	54.00	16.86	V
13346.500	37.13	-29.49	39.71	26.91	54.00	16.87	V
11843.900	36.04	-31.85	39.05	28.84	54.00	17.96	H
11811.400	35.99	-31.85	39.05	28.79	54.00	18.01	H

## Channel 48

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17998.300	41.84	-25.50	46.66	20.68	54.00	12.16	H
17994.500	41.83	-25.50	46.66	20.67	54.00	12.17	H
13350.300	37.23	-29.49	39.71	27.01	54.00	16.77	V
13351.400	37.19	-29.49	39.71	26.97	54.00	16.81	H
11824.600	36.06	-31.85	39.05	28.86	54.00	17.94	V
11829.600	36.05	-31.85	39.05	28.85	54.00	17.95	H

## Channel 52

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17974.700	41.83	-25.50	46.66	20.67	54.00	12.17	V
17981.800	41.73	-25.50	46.66	20.57	54.00	12.27	H
13348.600	37.15	-29.49	39.71	26.93	54.00	16.85	V
13250.200	37.08	-29.67	39.55	27.20	54.00	16.92	V
11821.900	36.16	-31.85	39.05	28.96	54.00	17.84	V
11797.100	36.00	-31.85	39.05	28.80	54.00	18.00	H

## Channel 56

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17995.600	41.92	-25.50	46.66	20.76	54.00	12.08	V
17991.200	41.86	-25.50	46.66	20.70	54.00	12.14	H
13349.800	37.19	-29.49	39.71	26.97	54.00	16.81	H
13342.000	37.17	-29.49	39.71	26.95	54.00	16.83	H
11818.000	36.02	-31.85	39.05	28.82	54.00	17.98	V
11821.300	35.98	-31.85	39.05	28.78	54.00	18.02	H

## Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17991.200	41.87	-25.50	46.66	20.71	54.00	12.13	H
17996.700	41.87	-25.50	46.66	20.71	54.00	12.13	V
13322.800	37.20	-29.49	39.71	26.98	54.00	16.80	V
13258.500	37.09	-29.67	39.55	27.21	54.00	16.91	V
5350.400	48.22	-27.43	34.01	41.64	54.00	5.78	H
5350.100	48.19	-27.43	34.01	41.61	54.00	5.81	H

## Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17997.200	41.80	-25.50	46.66	20.64	54.00	12.20	V
17995.000	41.76	-25.50	46.66	20.60	54.00	12.24	H
13343.700	37.18	-29.49	39.71	26.96	54.00	16.82	V
13256.800	37.13	-29.67	39.55	27.25	54.00	16.87	H
5459.600	42.96	-27.18	34.17	35.97	54.00	11.04	H
5459.400	42.95	-27.18	34.17	35.96	54.00	11.05	H

## Channel 120

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17992.800	41.81	-25.50	46.66	20.65	54.00	12.19	H
17998.300	41.77	-25.50	46.66	20.61	54.00	12.23	V
13251.900	37.13	-29.67	39.55	27.25	54.00	16.87	H
13312.900	37.11	-29.49	39.71	26.89	54.00	16.89	H
11801.500	36.05	-31.85	39.05	28.85	54.00	17.95	H
11803.700	36.03	-31.85	39.05	28.83	54.00	17.97	V

## Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17997.800	41.96	-25.50	46.66	20.80	54.00	12.04	H
17993.400	41.81	-25.50	46.66	20.65	54.00	12.19	H
13330.500	37.23	-29.49	39.71	27.01	54.00	16.77	V
13327.200	37.19	-29.49	39.71	26.97	54.00	16.81	H
11401.700	36.26	-32.42	38.79	29.89	54.00	17.74	V
11400.000	36.20	-32.42	38.79	29.83	54.00	17.80	V

## Channel 144

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17997.800	42.12	-25.50	46.66	20.96	54.00	11.88	V
17972.500	42.11	-25.50	46.66	20.95	54.00	11.89	V
11440.700	37.88	-32.42	38.79	31.51	54.00	16.12	V
11440.200	37.87	-32.42	38.79	31.50	54.00	16.13	V
13253.000	37.50	-29.67	39.55	27.62	54.00	16.50	H
13360.800	37.49	-29.49	39.71	27.27	54.00	16.51	H



**802.11n-HT20**

## Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17987.300	41.89	-25.50	46.66	20.73	54.00	12.11	H
17988.500	41.87	-25.50	46.66	20.71	54.00	12.13	V
13257.900	37.33	-29.67	39.55	27.45	54.00	16.67	H
13343.100	37.25	-29.49	39.71	27.03	54.00	16.75	H
5150.000	50.91	-27.61	33.67	44.85	54.00	3.09	H
5149.800	50.87	-27.61	33.67	44.81	54.00	3.13	H

## Channel 40

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17989.000	41.96	-25.50	46.66	20.80	54.00	12.04	H
17994.500	41.89	-25.50	46.66	20.73	54.00	12.11	H
13305.200	37.31	-29.49	39.71	27.09	54.00	16.69	H
13353.000	37.25	-29.49	39.71	27.03	54.00	16.75	H
11825.700	35.97	-31.85	39.05	28.77	54.00	18.03	V
11821.300	35.95	-31.85	39.05	28.75	54.00	18.05	H

## Channel 48

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17990.100	41.79	-25.50	46.66	20.63	54.00	12.21	H
17953.200	41.76	-25.50	46.66	20.60	54.00	12.24	H
13355.200	37.16	-29.49	39.71	26.94	54.00	16.84	V
13319.500	37.12	-29.49	39.71	26.90	54.00	16.88	V
11815.800	35.98	-31.85	39.05	28.78	54.00	18.02	H
11824.600	35.98	-31.85	39.05	28.78	54.00	18.02	V



## Channel 52

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17987.900	41.87	-25.50	46.66	20.71	54.00	12.13	H
17991.200	41.79	-25.50	46.66	20.63	54.00	12.21	V
13260.600	37.12	-29.67	39.55	27.24	54.00	16.88	H
13294.800	37.12	-29.49	39.71	26.90	54.00	16.88	H
11817.500	36.03	-31.85	39.05	28.83	54.00	17.97	H
11791.100	36.00	-31.99	38.98	29.01	54.00	18.00	H

## Channel 56

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17976.900	41.88	-25.50	46.66	20.72	54.00	12.12	H
17998.900	41.83	-25.50	46.66	20.67	54.00	12.17	V
13253.000	37.26	-29.67	39.55	27.38	54.00	16.74	V
13380.500	37.23	-29.49	39.71	27.01	54.00	16.77	V
11832.300	35.96	-31.85	39.05	28.76	54.00	18.04	V
11834.500	35.93	-31.85	39.05	28.73	54.00	18.07	H

## Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17989.500	41.89	-25.50	46.66	20.73	54.00	12.11	V
17991.200	41.86	-25.50	46.66	20.70	54.00	12.14	H
13364.600	37.17	-29.49	39.71	26.95	54.00	16.83	V
13344.800	37.11	-29.49	39.71	26.89	54.00	16.89	V
5350.200	47.98	-27.43	34.01	41.40	54.00	6.02	H
5350.000	47.97	-27.43	34.01	41.39	54.00	6.03	H

## Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17994.500	41.81	-25.50	46.66	20.65	54.00	12.19	V
17990.100	41.77	-25.50	46.66	20.61	54.00	12.23	V
13284.900	37.16	-29.67	39.55	27.28	54.00	16.84	H
13285.400	37.12	-29.67	39.55	27.24	54.00	16.88	V
5459.900	43.02	-27.18	34.17	36.03	54.00	10.98	H
5459.700	42.99	-27.18	34.17	36.00	54.00	11.01	H

## Channel 120

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17982.400	41.87	-25.50	46.66	20.71	54.00	12.13	V
17985.700	41.86	-25.50	46.66	20.70	54.00	12.14	V
13262.300	37.19	-29.67	39.55	27.31	54.00	16.81	V
13251.900	37.11	-29.67	39.55	27.23	54.00	16.89	H
11818.600	36.02	-31.85	39.05	28.82	54.00	17.98	V
11829.600	35.99	-31.85	39.05	28.79	54.00	18.01	V

## Channel 140

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17989.000	41.79	-25.50	46.66	20.63	54.00	12.21	H
17977.500	41.78	-25.50	46.66	20.62	54.00	12.22	V
13356.900	37.18	-29.49	39.71	26.96	54.00	16.82	V
13261.800	37.14	-29.67	39.55	27.26	54.00	16.86	H
11402.200	36.06	-32.42	38.79	29.69	54.00	17.94	V
11820.800	36.03	-31.85	39.05	28.83	54.00	17.97	V

## Channel 144

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17987.300	42.03	-25.50	46.66	20.87	54.00	11.97	H
17996.700	41.95	-25.50	46.66	20.79	54.00	12.05	V
11440.200	37.55	-32.42	38.79	31.18	54.00	16.45	V
13256.800	37.36	-29.67	39.55	27.48	54.00	16.64	H
13259.000	37.34	-29.67	39.55	27.46	54.00	16.66	V
11442.900	37.31	-32.42	38.79	30.94	54.00	16.69	V

**802.11n-HT40**

## Channel 38

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17980.800	41.80	-25.50	46.66	20.64	54.00	12.20	H
17990.100	41.78	-25.50	46.66	20.62	54.00	12.22	V
13251.900	37.37	-29.67	39.55	27.49	54.00	16.63	H
13367.900	37.23	-29.49	39.71	27.01	54.00	16.77	H
5149.900	50.45	-27.61	33.67	44.39	54.00	3.55	H
5149.600	50.14	-27.61	33.67	44.08	54.00	3.86	H

## Channel 46

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17985.200	41.88	-25.50	46.66	20.72	54.00	12.12	V
17987.300	41.80	-25.50	46.66	20.64	54.00	12.20	V
13258.500	37.25	-29.67	39.55	27.37	54.00	16.75	H
13257.900	37.09	-29.67	39.55	27.21	54.00	16.91	V
11820.800	36.03	-31.85	39.05	28.83	54.00	17.97	V
11817.500	35.98	-31.85	39.05	28.78	54.00	18.02	V

## Channel 54

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17997.200	41.87	-25.50	46.66	20.71	54.00	12.13	H
17983.500	41.84	-25.50	46.66	20.68	54.00	12.16	V
13256.800	37.11	-29.67	39.55	27.23	54.00	16.89	H
13283.800	37.11	-29.67	39.55	27.23	54.00	16.89	V
11800.400	36.14	-31.85	39.05	28.94	54.00	17.86	V
11835.600	36.08	-31.85	39.05	28.88	54.00	17.92	H

## Channel 62

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17996.700	41.87	-25.50	46.66	20.71	54.00	12.13	V
17995.600	41.83	-25.50	46.66	20.67	54.00	12.17	V
13263.400	37.27	-29.67	39.55	27.39	54.00	16.73	V
13352.000	37.27	-29.49	39.71	27.05	54.00	16.73	H
5350.100	48.95	-27.43	34.01	42.37	54.00	5.05	H
5350.300	48.87	-27.43	34.01	42.29	54.00	5.13	H

## Channel 102

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17969.200	41.92	-25.50	46.66	20.76	54.00	12.08	V
17995.600	41.84	-25.50	46.66	20.68	54.00	12.16	H
13260.100	37.25	-29.67	39.55	27.37	54.00	16.75	H
13259.000	37.21	-29.67	39.55	27.33	54.00	16.79	H
5459.700	43.83	-27.18	34.17	36.84	54.00	10.17	H
5459.800	43.81	-27.18	34.17	36.82	54.00	10.19	H

## Channel 118

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17997.200	41.97	-25.50	46.66	20.81	54.00	12.03	V
17990.700	41.80	-25.50	46.66	20.64	54.00	12.20	H
13321.100	37.25	-29.49	39.71	27.03	54.00	16.75	V
13343.700	37.25	-29.49	39.71	27.03	54.00	16.75	V
11797.100	36.09	-31.85	39.05	28.89	54.00	17.91	V
11818.000	36.05	-31.85	39.05	28.85	54.00	17.95	V

## Channel 134

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17993.400	41.90	-25.50	46.66	20.74	54.00	12.10	V
17992.800	41.88	-25.50	46.66	20.72	54.00	12.12	V
13253.000	37.18	-29.67	39.55	27.30	54.00	16.82	V
13331.600	37.17	-29.49	39.71	26.95	54.00	16.83	V
11337.300	36.72	-32.42	38.79	30.35	54.00	17.28	V
11340.600	36.56	-32.42	38.79	30.19	54.00	17.44	V

## Channel 142

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17982.400	42.02	-25.50	46.66	20.86	54.00	11.98	V
17985.200	41.92	-25.50	46.66	20.76	54.00	12.08	V
13256.800	37.19	-29.67	39.55	27.31	54.00	16.81	V
13372.300	37.19	-29.49	39.71	26.97	54.00	16.81	V
11419.800	36.51	-32.42	38.79	30.14	54.00	17.49	V
11419.300	36.30	-32.42	38.79	29.93	54.00	17.70	V