



Test Report No.: W7L-P23010004-2RF01



Certificate #6613.01

FCC TEST REPORT (PART 22)



Applicant:	HMD Global Oy
Address:	Bertel Jungin aukio 9, 02600 Espoo, Finland

Manufacturer or Supplier:	HMD Global Oy
Address:	Bertel Jungin aukio 9, 02600 Espoo, Finland
Product:	Mobile phone
Brand Name:	NOKIA
Model Name:	TA-1541
FCC ID:	2AJOTTA-1541
Date of tests:	Jan. 16, 2023 ~ Feb. 23, 2023

The tests have been carried out according to the requirements of the following standard:

- FCC PART 22, Subpart H FCC Part 2
- ANSI/TIA/EIA-603-D ANSI C63.26-2015
- ANSI/TIA/EIA-603-E

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Chao Wu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
 Date: Feb. 23, 2023	 Date: Feb. 23, 2023

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

- RELEASE CONTROL RECORD 5**
- 1 SUMMARY OF TEST RESULTS 6**
 - 1.1 MEASUREMENT UNCERTAINTY 8
 - 1.2 TEST SITE AND INSTRUMENTS 9
- 2 GENERAL INFORMATION 11**
 - 2.1 GENERAL DESCRIPTION OF EUT 11
 - 2.2 CONFIGURATION OF SYSTEM UNDER TEST 15
 - 2.3 DESCRIPTION OF SUPPORT UNITS 16
 - 2.4 TEST ITEM AND TEST CONFIGURATION 16
 - 2.5 EUT OPERATING CONDITIONS 20
 - 2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS 21
- 3 TEST TYPES AND RESULTS 22**
 - 3.1 OUTPUT POWER MEASUREMENT 22
 - 3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT 22
 - 3.1.2 TEST PROCEDURES 22
 - 3.1.3 TEST SETUP 23
 - 3.1.4 TEST RESULTS 23
 - 3.2 FREQUENCY STABILITY MEASUREMENT 31
 - 3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT 31
 - 3.2.2 TEST PROCEDURE 31
 - 3.2.3 TEST SETUP 31
 - 3.2.4 TEST RESULTS 32
 - 3.3 OCCUPIED BANDWIDTH MEASUREMENT 33
 - 3.3.1 TEST PROCEDURES 33
 - 3.3.2 TEST SETUP 33
 - 3.3.3 TEST RESULTS 34
 - 3.4 BAND EDGE MEASUREMENT 35
 - 3.4.1 LIMITS OF BAND EDGE MEASUREMENT 35
 - 3.4.2 TEST SETUP 35
 - 3.4.3 TEST PROCEDURES 36
 - 3.4.4 TEST RESULTS 36
 - 3.5 CONDUCTED SPURIOUS EMISSIONS 37
 - 3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT 37
 - 3.5.2 TEST PROCEDURE 37
 - 3.5.1 TEST SETUP 37
 - 3.5.2 TEST RESULTS 37
 - 3.6 RADIATED EMISSION MEASUREMENT 38
 - 3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT 38
 - 3.6.2 TEST PROCEDURES 38
 - 3.6.3 DEVIATION FROM TEST STANDARD 38
 - 3.6.4 TEST SETUP 39
 - 3.6.5 TEST RESULTS 41
 - 3.7 PEAK TO AVERAGE RATIO 73
 - 3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT 73



Test Report No.: W7L-P23010004-2RF01

3.7.2	TEST SETUP	73
3.7.3	TEST PROCEDURES	73
3.7.4	TEST RESULTS	73
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	74
5	INFORMATION ON THE TESTING LABORATORIES	75
6	MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	76
7	APPENDIX:	77
	GSM850	77
	PEAK-TO-AVERAGE RATIO(CCDF)	77
	TEST RESULT	77
	TEST GRAPHS	78
	26DB BANDWIDTH AND OCCUPIED BANDWIDTH	84
	TEST RESULT	84
	TEST GRAPHS	85
	26DB BANDWIDTH	85
	BAND EDGE	97
	TEST RESULT	97
	TEST GRAPHS	98
	CONDUCTED SPURIOUS EMISSION	102
	TEST RESULT	102
	TEST GRAPHS	103
	FREQUENCY STABILITY	115
	TEST RESULT	115
	WCDMA V	117
	PEAK-TO-AVERAGE RATIO	117
	TEST RESULT	117
	TEST GRAPHS	118
	26DB BANDWIDTH AND OCCUPIED BANDWIDTH	121
	TEST RESULT	121
	BAND EDGE	128
	TEST RESULT	128
	TEST GRAPHS	129
	CONDUCTED SPURIOUS EMISSION	131
	TEST RESULT	131
	TEST GRAPHS	132
	FREQUENCY STABILITY	138
	TEST RESULT	138
	LTE BAND5	139
	PEAK-TO-AVERAGE RATIO(CCDF)	139
	TEST RESULT	139
	TEST GRAPHS	140
	26DB BANDWIDTH AND OCCUPIED BANDWIDTH	158
	TEST RESULT	158
	TEST GRAPHS	159
	BAND EDGE	231
	TEST RESULT	231



Test Report No.: W7L-P23010004-2RF01

TEST GRAPHS	232
CONDUCTED SPURIOUS EMISSION	280
TEST RESULT	280
TEST GRAPHS	281
FREQUENCY STABILITY	354
TEST RESULT	354



Test Report No.: W7L-P23010004-2RF01

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P23010004-2RF01	Original release	Feb. 23, 2023



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 22 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	Test lab*
§2.1046	Conducted Output Power	Compliance	A
§22.913 (a)(5)	Effective Radiated Power	Compliance	A
§2.1055 §22.355	Frequency Stability	Compliance	A
§2.1049	Occupied Bandwidth	Compliance	A
§22.913 (d)	Peak to average ratio*	Compliance	A
§22.917(a)	Band Edge Measurements	Compliance	A
§2.1051 §22.917(a)	Conducted Spurious Emissions	Compliance	A
§2.1053 §22.917(a)	Radiated Spurious Emissions	Compliance	A/B

NOTE:

1. This report refers to the data of W7L-P23010004-1RF01(model:TA-1536, FCC ID: 2AJOTTA-1536), the difference of TA-1536 and TA-1541 is TA-1541 change model name, TA-1536 is dual card, TA-1541 is single card, and functions are realized through software. The test data of this report is copied from the report W7L-P23010004-1RF01(model:TA-1536, FCC ID: 2AJOTTA-1536).
2. For radiation spurious testing, the GSM850 is in Lab B and the other Band are in Lab A



Test Report No.: W7L-P23010004-2RF01

* Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01.

***Test Lab Information Reference**

Lab A:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zhuyi Road, High-tech District, Suzhou City, Anhui Province

Accredited Test Lab Cert 6613.01

The FCC Site Registration No. is 434559; The Designation No. is CN1325.

Lab B:

BV 7Layers Communications Technology (Shenzhen) Co. Ltd

Lab Address:

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park,
Nanshan District, Shenzhen, Guangdong, China

Accredited Test Lab Cert 3939.01

The FCC Site Registration No. is 525120; The Designation No. is CN1171.



1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Maximum Peak Output Power	$\pm 2.06\text{dB}$
Frequency Stability	$\pm 76.97\text{Hz}$
Radiated emissions (30MHz~1GMHz)	$\pm 4.98\text{dB}$
Radiated emissions (1GMHz ~6GMHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GMHz ~18GMHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GMHz ~40GMHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Band Edge Measurements	$\pm 4.70\text{dB}$
Peak to average ratio	$\pm 0.76\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,22	Aug.29,24
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Vector Signal Generator	R&S	SMBV100B	102176	Feb.16,22	Feb.15,24
Signal Generator	R&S	SMB100A	182185	Feb.16,22	Feb.15,24
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EM C-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EM C-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESR26	101734	Feb.25,22	Feb.24,24
EMI TEST Receiver	R&S	ESW44	101973	Feb.25,22	Feb.24,24
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.28,22	Feb.27,24
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,22	Aug.21,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.23,22	Feb.22,24
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.22,22	Aug.21,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,22	Feb.22,24
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.27,22	Jun.26,24
Test Software	EMC32	EMC32	N/A	N/A	N/A
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	Oct.01,22	Sep.30,24
DC Source	HYELEC	HY3010B	551016	Aug.31,22	Aug.30,24
Hygrothermograph	DELI	20210528	SZ014	Sep.06,22	Sep.05,24
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Oct.31,22	Apr.29,23
CABLE	R&S	W12.14	N/A	Oct.31,22	Apr.29,23
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Oct.31,22	Apr.29,23
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Oct.31,22	Apr.29,23
Temperature Chamber	votsch	VT4002	58566078100050	May.31,22	May.30,24



Test Report No.: W7L-P23010004-2RF01

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Feb. 21,22	Feb. 20,23
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Feb. 20,23	Feb. 19,24
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.15,22	May.14,23
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.04,22	Sep.03,23
Bilog Antenna	ETS-LINDGRE N	3143B	00161965	Mar. 06,22	Mar. 05,23
Horn Antenna	ETS-LINDGRE N	3117	00168692	Mar. 06,22	Mar. 05,23
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K- SG/QMS-00361	15433	Aug. 24, 22	Aug. 23, 23
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 15,22	Feb. 14,23
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 14,23	Feb. 13,24
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May.12,22	May.11,23
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.12,22	May.11,23
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 21,22	Feb.20,23
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 20,23	Feb.19,24
3m Semi-anechoic Chamber	ETS-LINDGRE N	9m*6m*6m	Euroshieldpn- CT0001143-121 6	May. 19,20	May. 18,23
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	JS1120	3.1.36	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	May. 07,22	May. 06,23
Power Meter	Anritsu	ML2495A	1506002	Feb. 22,22	Feb. 21,23
Power Meter	Anritsu	ML2495A	1506002	Feb. 21,23	Feb. 20,24
Power Sensor	Anritsu	MA2411B	1339352	May. 07,22	May. 06,23
Temperature Chamber	ESPEC	SH-242	93000855	May. 12,22	May. 11,23
MXG Analog Microvave Signal Generator	KEYSIGHT	N5183A	MY50143024	Feb. 18,22	Feb. 17,23
MXG Analog Microvave Signal Generator	KEYSIGHT	N5183A	MY50143024	Feb. 17,23	Feb. 16,24
Base station R&S CMW500	Rohde&Schwa rz	CMW500	153085	May.12,22	May.11,23
DC Source	Kikusui/JP	PMX18-5A	0000001	Aug. 24,22	Aug. 23,23

- NOTE:**
1. The calibration interval of the above test instruments is 6 months or 12 months or 24 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Mobile phone	
BRAND NAME	NOKIA	
MODEL NAME	TA-1541	
NOMINAL VOLTAGE	5.0Vdc(adapter) 3.85Vdc (Li-ion, battery)	
MODULATION TYPE	GSM/EDGE	GMSK,8PSK
	WCDMA	HSDPA/HSUPA/DC-HSDPA /HSPA+
	LTE	QPSK/16QAM/64QAM
FREQUENCY RANGE	GSM/EDGE	824.2MHz ~ 848.8MHz
	WCDMA	826.4MHz ~ 846.6MHz
	LTE Band 5 (Channel Bandwidth: 1.4MHz)	824.7MHz ~ 848.3MHz
	LTE Band 5 (Channel Bandwidth: 3MHz)	825.5MHz ~ 847.5MHz
	LTE Band 5 (Channel Bandwidth: 5MHz)	826.5MHz ~ 846.5MHz
	LTE Band 5 (Channel Bandwidth: 10MHz)	829MHz ~ 844MHz
MAX. ERP POWER	GSM	653.13mW
	EDGE	124.17mW
	WCDMA	106.91mW
	LTE Band 5 (Channel Bandwidth: 1.4MHz)	99.08mW
	LTE Band 5 (Channel Bandwidth: 3MHz)	98.17mW
	LTE Band 5 (Channel Bandwidth: 5MHz)	99.31mW
	LTE Band 5 (Channel Bandwidth: 10MHz)	99.77mW
EMISSION DESIGNATOR GOGN	GSM	246KGXW
	EDGE	245KG7W
	WCDMA	4M15F9W
	LTE Band 5 (Channel Bandwidth: 1.4MHz)	QPSK: 1M10G7D
		16QAM: 1M10W7D
		64QAM: 1M09W7D
	LTE Band 5 (Channel Bandwidth: 3MHz)	QPSK: 2M78G7D
		16QAM: 2M74W7D
64QAM: 2M77W7D		



Test Report No.: W7L-P23010004-2RF01

	LTE Band 5 (Channel Bandwidth: 5MHz)	QPSK: 4M65G7D
		16QAM: 4M66W7D
		64QAM: 4M52W7D
	LTE Band 5 (Channel Bandwidth: 10MHz)	QPSK: 9M06G7D
		16QAM: 9M00W7D
		64QAM: 9M06W7D
ANTENNA TYPE	Fixed Internal Antenna with -1.3dBi gain for GSM850/ WCDMA V/ LTE B5	
HW VERSION	SPR_S63Q0	
SW VERSION	00WW_0_090	
I/O PORTS	Refer to user's manual	
CABLE SUPPLIED	USB cable1: non-shielded cable, with w/o ferrite core, 1 meter USB cable2: non-shielded cable, with w/o ferrite core, 1 meter USB cable3: non-shielded cable, with w/o ferrite core, 1 meter Earphone: non-shielded cable, with w/o ferrite core, 1.2 meter	
EXTREME TEMPERATURE	-20-60 °C	
EXTREME VOLTAGE	EUT 3.4V - EUT 4.4V	

NOTE:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
GSM/EDGE	1TX/1RX
WCDMA	1TX/1RX
LTE	1TX/1RX

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
- The product of TA-1541(FCC ID: 2AJOTTA-1541) have version and components manufacturer from a second supplier. The first version is 090, the second one is 103, only the version changes, and the RF parameters do not change, components manufacturer with following changes as below:

NO.	Change Description	specifications	first supplier	specifications	second supplier
1	PCBA	FEMDNN064G-A3 A56 BWCTARV11X64G	Longsys	FEMDNN064G-A3A 56 BWCTARV11X64G	Biwin
2		2GB LPDDR	Longsys	FLXC2002G-N2 BWMZEX32H2A-16 G-X	Biwin
3		3GB LPDDR	Longsys	FLXC4003G-50 BWMEXX32H2A-24 Gb-X	Biwin
4		4GB LPDDR	Longsys	FLXC2004G-30 BWMZCX32H2A-32 2G-X	Biwin



BUREAU
VERITAS

Test Report No.: W7L-P23010004-2RF01

5		PCB	/	KINGSHINE	/	WUZH U
6	LCM	LCD	6.517 HKC, 360min,400typ, 2.5D	TCL	6.517 BOE (B8) , 360min,400typ, 2.5D	Lian Chuang
7	Front camera	Camera	8M FF COM	Lian Heyingxiang	8M FF COM	Shijia
8	Rear camera	Camera	13M-AF COB	Lian Heyingxiang	13M-AF COB	Ruiche ng
9	Macro CAM	Camera	2M FF	Shijia	2M FF	Lian Heying xiang
10	fingerprint	module	Back fingerprint	Hedayuan	Back fingerprint	Sanyin gxin
11	Speaker		1712 1W	Dong Sheng	1712 1W	Xin Rongda
12	Vibrator		1027 FPC	Kai Long	1027 FPC	Chao Yin
13	Receiver		0809	Dong Sheng	0809	Xin Rongda
14	FPC		/	Lante	/	Kaihon gxing
15	Battery		5000MAH	Gaoyuan	5000MAH	Feng Hua
16	Data cable		2A typeC	Yuwei	2A typeC	Juwei




BUREAU
VERITAS

Test Report No.: W7L-P23010004-2RF01

5. List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
LCD Panel 1	HKC	MianYang HKC Optoelectronics Technology Co., Ltd.	QM065HS03-1	6.517
LCD Panel 2	BOE	BOE	BV065WBQ-L1B	6.517
Battery 1	Nokia	Guangdong Fenghua New Energy Co.,Ltd.	WT510	Capacity : 3.85 Vdc, 4900mAh
Battery 2	Nokia	HUNAN GAOYUAN BATTERY Co., Ltd.	WT510	Capacity : 3.85 Vdc, 4900mAh
AC Adapter	Nokia	SHENZHEN BAIJUNDA ELECTRONICS.,LTD	AD-010U	I/P: 100-240Vac, 0.35A, O/P: 5.0Vdc, 2.0A
Earphone	Juwei Electronics Co., LTD	Juwei Electronics Co., LTD	JWEP1252-H21H	Signal Line, 1.2meter
USB Cable 1	Juwei Electronics Co., LTD	Juwei Electronics Co., LTD	JWUB1536-H21H	Signal Line, 1.0meter
USB Cable 2	Yu Wei	Dongguan Yuwei Electronic Technology Co., Ltd.	CH2212TC	Signal Line, 1.0meter
USB Cable 3	Sai bao	Saibao (Jiangxi) Industrial Co., Ltd	SHM1-A003A	Signal Line, 1.0meter

2.2 CONFIGURATION OF SYSTEM UNDER TEST FOR RADIATION EMISSION

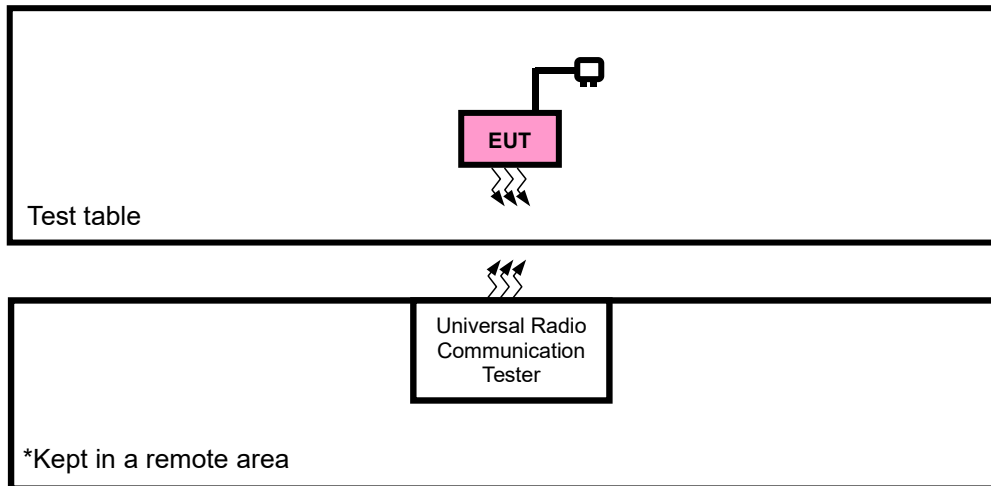



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	N/A	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in ERP and radiated emission was found when positioned on X-plane for GSM /WCDMA/ LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + GSM/WCDMA/LTE
B	EUT + DC source with GSM or WCDMA or LTE link



GSM MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	ERP	128 to 251	128, 190, 251	GSM, EDGE
B	FREQUENCY STABILITY	128 to 251	128, 190, 251	GSM, EDGE
A	OCCUPIED BANDWIDTH	128 to 251	128, 190, 251	GSM, EDGE
A	BAND EDGE	128 to 251	128, 251	GSM, EDGE
A	CONDCUDETED EMISSION	128 to 251	128, 190, 251	GSM, EDGE
A	RADIATED EMISSION	128 to 251	128, 190, 251	GSM, EDGE
A	PEAK TO AVERAGE RATIO	128 to 251	128, 190, 251	GSM, EDGE

WCDMA MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	ERP	4132 to 4233	4132, 4182, 4233	WCDMA
B	FREQUENCY STABILITY	4132 to 4233	4132, 4182, 4233	WCDMA
A	OCCUPIED BANDWIDTH	4132 to 4233	4132, 4182, 4233	WCDMA
A	BAND EDGE	4132 to 4233	4132, 4233	WCDMA
A	CONDCUDETED EMISSION	4132 to 4233	4132, 4182, 4233	WCDMA
A	RADIATED EMISSION	4132 to 4233	4132, 4182, 4233	WCDMA
A	PEAK TO AVERAGE RATIO	4132 to 4233	4132, 4182, 4233	WCDMA



LTE BAND 5 MODE

EUT CONFIGURE MODE	TEST ITEM	Available Channel	Tested Channel	Channel bandwidth	modulation	mode
A	ERP	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM, 64QAM	Full RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM, 64QAM	Full RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM, 64QAM	Full RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM, 64QAM	Full RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM, 64QAM	Full RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM, 64QAM	Full RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM, 64QAM	Full RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM, 64QAM	Full RB / 0 RB Offset
A	BAND EDGE	20407 to 20643	20407	1.4 MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
						Full RB / 0 RB Offset
		20407 to 20643	20643	1.4 MHz	QPSK,16QAM, 64QAM	1 RB / 5 RB Offset
						Full RB / 0 RB Offset
		20415 to 20635	20415	3 MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
						Full RB / 0 RB Offset
		20415 to 20635	20635	3 MHz	QPSK,16QAM, 64QAM	1 RB / 14 RB Offset
						Full RB / 0 RB Offset
		20425 to 20625	20425	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
						Full RB / 0 RB Offset
		20425 to 20625	20625	5MHz	QPSK,16QAM, 64QAM	1 RB / 24 RB Offset
						Full RB / 0 RB Offset
		20450 to 20600	20450	10MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
						Full RB / 0 RB Offset
		20450 to 20600	20600	10MHz	QPSK,16QAM, 64QAM	1 RB / 49 RB Offset
						Full RB / 0 RB Offset



Test Report No.: W7L-P23010004-2RF01

A	CONDCUDED EMISSION	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	20407 to 20643	20425, 20525, 20625	1.4MHz	QPSK	1 RB / 0 RB Offset
		20415 to 20635	20525	3MHz	QPSK	1 RB / 0 RB Offset
		20425 to 20625	20525	5MHz	QPSK	1 RB / 0 RB Offset
		20450 to 20600	20525	10MHz	QPSK	1 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset Full RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset Full RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset Full RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset Full RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP	23deg. C, 70%RH	DC 5.0V By Adapter	Chao Wu
FREQUENCY STABILITY	23deg. C, 70%RH	DC 5.0V By Adapter	Chao Wu
OCCUPIED BANDWIDTH	23deg. C, 70%RH	DC 5.0V By Adapter	Chao Wu
BAND EDGE	23deg. C, 70%RH	DC 5.0V By Adapter	Chao Wu
CONDCUDED EMISSION	23deg. C, 70%RH	DC 5.0V By Adapter	Chao Wu
RADIATED EMISSION	23deg. C, 70%RH	DC 5.0V By Adapter	Chao Wu/Jace Hu
PEAK TO AVERAGE RATIO	23deg. C, 70%RH	DC 5.0V By Adapter	Chao Wu

2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency



Test Report No.: W7L-P23010004-2RF01

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.



3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile / Portable station are limited to 7 watts e.r.p.

3.1.2 TEST PROCEDURES

EIRP / ERP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_{T} = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_{C} = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

CONDUCTED POWER MEASUREMENT:


The EUT was set up for the maximum power with GSM/WCDMA/LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



3.1.3 TEST SETUP

EIRP / ERP Measurement:

CONDUCTED POWER MEASUREMENT:



3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Band	GSM850			Max. Tune-up Power
	128	190	251	
Channel	128	190	251	
Frequency	824.2	836.6	848.8	
GSM	31.60	31.58	31.53	32.50
GPRS 1Tx Slot	31.47	31.42	31.37	32.50
GPRS 2Tx Slot	29.82	29.75	29.66	30.50
GPRS 3Tx Slot	28.18	28.08	27.95	29.00
GPRS 4Tx Slot	26.17	26.06	25.90	27.00
EDGE 1Tx Slot	24.39	24.16	24.01	25.50
EDGE 2Tx Slot	22.92	22.69	22.51	23.50
EDGE 3Tx Slot	19.74	19.64	19.10	20.50
EDGE 4Tx Slot	16.41	16.52	16.34	17.50

Band	WCDMA V			Max. Tune-up Power
	4132	4182	4233	
Channel	4132	4182	4233	
Frequency	826.4	836.4	846.6	
RMC 12.2K	23.73	23.70	23.74	24.50
HSDPA Subtest-1	23.15	23.16	23.12	24.00
HSDPA Subtest-2	23.14	23.15	23.11	24.00
HSDPA Subtest-3	22.63	22.64	22.60	23.50
HSDPA Subtest-4	22.62	22.63	22.59	23.50
DC-HSDPA Subtest-1	22.87	22.90	22.84	24.00
DC-HSDPA Subtest-2	22.86	22.89	22.83	24.00
DC-HSDPA Subtest-3	22.44	22.38	22.34	23.50
DC-HSDPA Subtest-4	22.43	22.37	22.33	23.50
HSUPA Subtest-1	23.11	23.12	23.08	24.00
HSUPA Subtest-2	22.10	22.11	22.07	22.50
HSUPA Subtest-3	22.58	22.60	22.56	23.50
HSUPA Subtest-4	22.07	22.09	22.05	22.50
HSUPA Subtest-5	23.06	23.08	23.04	24.00
HSPA+ Subtest-1	21.62	21.65	21.61	22.50



Test Report No.: W7L-P23010004-2RF01

LTE Band 5

Band/BW	Modulation	RB Size	RB Offset	Low CH 20407	Mid CH 20525	High CH 20643	MPR
				Frequency 824.7 MHz	Frequency 836.5 MHz	Frequency 848.3 MHz	
5/ 1.4	QPSK	1	0	23.21	23.19	22.97	0
		1	2	23.41	23.28	23.13	0
		1	5	23.29	23.20	23.09	0
		3	0	23.02	22.98	23.16	0
		3	1	23.05	23.10	23.09	0
		3	3	23.17	23.08	23.13	0
		6	0	22.16	22.03	22.14	1
	16QAM	1	0	22.26	22.40	22.47	1
		1	2	22.44	22.29	22.52	1
		1	5	22.63	22.29	22.51	1
		3	0	22.35	22.28	22.07	1
		3	1	22.23	22.41	22.11	1
		3	3	22.33	22.41	22.21	1
		6	0	21.04	21.14	21.12	2
	64QAM	1	0	21.64	21.11	21.11	2
		1	2	21.75	21.13	21.46	2
		1	5	21.67	21.49	21.36	2
		3	0	21.58	21.41	21.01	2
		3	1	21.29	21.56	21.49	2
		3	3	21.31	21.22	21.17	2
		6	0	20.37	20.11	20.64	3



Test Report No.: W7L-P23010004-2RF01

Band/BW	Modulation	RB Size	RB Offset	Low CH 20415	Mid CH 20525	High CH 20635	MPR
				Frequency 825.5 MHz	Frequency 836.5 MHz	Frequency 847.5 MHz	
5/3	QPSK	1	0	23.23	23.21	22.96	0
		1	7	23.37	23.29	23.13	0
		1	14	23.25	23.20	23.09	0
		8	0	22.01	22.01	22.16	1
		8	3	21.98	22.10	22.11	1
		8	7	22.14	22.15	22.17	1
		15	0	22.13	22.04	22.08	1
	16QAM	1	0	22.23	22.46	22.50	1
		1	7	22.41	22.32	22.50	1
		1	14	22.66	22.29	22.51	1
		8	0	21.31	21.29	21.07	2
		8	3	21.28	21.36	21.14	2
		8	7	21.35	21.39	21.17	2
		15	0	21.04	21.08	21.15	2
	64QAM	1	0	21.70	21.14	21.05	2
		1	7	21.78	21.07	21.45	2
		1	14	21.68	21.51	21.36	2
		8	0	20.61	20.45	20.02	3
		8	3	20.33	20.50	20.54	3
		8	7	20.28	20.26	20.13	3
		15	0	20.39	20.08	20.68	3



Test Report No.: W7L-P23010004-2RF01

Band/BW	Modulation	RB Size	RB Offset	Low CH 20425	Mid CH 20525	High CH 20625	MPR
				Frequency 826.5 MHz	Frequency 836.5 MHz	Frequency 846.5 MHz	
5 / 5	QPSK	1	0	23.24	23.16	22.97	0
		1	12	23.42	23.26	23.13	0
		1	24	23.26	23.19	23.13	0
		12	0	22.04	22.01	22.13	1
		12	6	21.98	22.11	22.12	1
		12	13	22.18	22.11	22.18	1
		25	0	22.11	22.07	22.11	1
	16QAM	1	0	22.24	22.42	22.50	1
		1	12	22.38	22.35	22.49	1
		1	24	22.66	22.29	22.50	1
		12	0	21.31	21.27	21.04	2
		12	6	21.25	21.40	21.10	2
		12	13	21.30	21.41	21.20	2
		25	0	21.04	21.09	21.12	2
	64QAM	1	0	21.64	21.11	21.11	2
		1	12	21.75	21.13	21.45	2
		1	24	21.61	21.56	21.36	2
		12	0	20.62	20.42	20.01	3
		12	6	20.27	20.57	20.53	3
		12	13	20.32	20.25	20.10	3
		25	0	20.35	20.14	20.66	3



Test Report No.: W7L-P23010004-2RF01

Band/BW	Modulation	RB Size	RB Offset	Low CH 20450	Mid CH 20525	High CH 20600	MPR
				Frequency 829 MHz	Frequency 836.5 MHz	Frequency 844 MHz	
5/ 10	QPSK	1	0	23.29	23.23	23.02	0
		1	24	23.44	23.34	23.15	0
		1	49	23.31	23.27	23.14	0
		25	0	22.08	22.06	22.18	1
		25	12	22.06	22.12	22.17	1
		25	25	22.22	22.16	22.19	1
		50	0	22.17	22.09	22.16	1
	16QAM	1	0	22.31	22.47	22.52	1
		1	24	22.46	22.37	22.54	1
		1	49	22.68	22.37	22.52	1
		25	0	21.39	21.33	21.12	2
		25	12	21.31	21.42	21.16	2
		25	25	21.37	21.46	21.22	2
		50	0	21.10	21.16	21.17	2
	64QAM	1	0	21.71	21.16	21.13	2
		1	24	21.83	21.15	21.51	2
		1	49	21.69	21.57	21.38	2
		25	0	20.66	20.47	20.09	3
		25	12	20.35	20.58	20.55	3
		25	25	20.36	20.30	20.18	3
		50	0	20.41	20.16	20.69	3



Test Report No.: W7L-P23010004-2RF01

ERP POWER (dBm)

GSM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
128	824.2	31.6	-1.3	28.15	653.13	7
190	836.6	31.58	-1.3	28.13	650.13	7
251	848.8	31.53	-1.3	28.08	642.69	7

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

EDGE

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
128	824.2	24.39	-1.3	20.94	124.17	7
190	836.6	24.16	-1.3	20.71	117.76	7
251	848.8	24.01	-1.3	20.56	113.76	7

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

WCDMA

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
4132	826.4	23.73	-1.3	20.28	106.66	7
4182	836.4	23.7	-1.3	20.25	105.93	7
4233	846.6	23.74	-1.3	20.29	106.91	7

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



BUREAU
VERITAS

Test Report No.: W7L-P23010004-2RF01

LTE BAND 5

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20407	824.7	23.41	-1.3	19.96	99.08	7
20525	836.5	23.28	-1.3	19.83	96.16	7
20643	848.3	23.16	-1.3	19.71	93.54	7

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20407	824.7	22.63	-1.3	19.18	82.79	7
20525	836.5	22.41	-1.3	18.96	78.7	7
20643	848.3	22.52	-1.3	19.07	80.72	7

CHANNEL BANDWIDTH: 1.4MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20407	824.7	21.75	-1.3	18.3	67.61	7
20525	836.5	21.56	-1.3	18.11	64.71	7
20643	848.3	21.49	-1.3	18.04	63.68	7

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20415	825.5	23.37	-1.3	19.92	98.17	7
20525	836.5	23.29	-1.3	19.84	96.38	7
20635	847.5	23.13	-1.3	19.68	92.9	7

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20415	825.5	22.66	-1.3	19.21	83.37	7
20525	836.5	22.46	-1.3	19.01	79.62	7
20635	847.5	22.51	-1.3	19.06	80.54	7

CHANNEL BANDWIDTH: 3MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20415	825.5	21.78	-1.3	18.33	68.08	7
20525	836.5	21.51	-1.3	18.06	63.97	7
20635	847.5	21.45	-1.3	18	63.1	7



Test Report No.: W7L-P23010004-2RF01

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20425	826.5	23.42	-1.3	19.97	99.31	7
20525	836.5	23.26	-1.3	19.81	95.72	7
20625	846.5	23.13	-1.3	19.68	92.9	7

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20425	826.5	22.66	-1.3	19.21	83.37	7
20525	836.5	22.42	-1.3	18.97	78.89	7
20625	846.5	22.5	-1.3	19.05	80.35	7

CHANNEL BANDWIDTH: 5MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20425	826.5	21.75	-1.3	18.3	67.61	7
20525	836.5	21.56	-1.3	18.11	64.71	7
20625	846.5	21.45	-1.3	18	63.1	7

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20450	829	23.44	-1.3	19.99	99.77	7
20525	836.5	23.34	-1.3	19.89	97.5	7
20600	844	23.15	-1.3	19.7	93.33	7

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20450	829	22.68	-1.3	19.23	83.75	7
20525	836.5	22.47	-1.3	19.02	79.8	7
20600	844	22.54	-1.3	19.09	81.1	7

CHANNEL BANDWIDTH: 10MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20450	829	21.83	-1.3	18.38	68.87	7
20525	836.5	21.57	-1.3	18.12	64.86	7
20600	844	21.51	-1.3	18.06	63.97	7

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

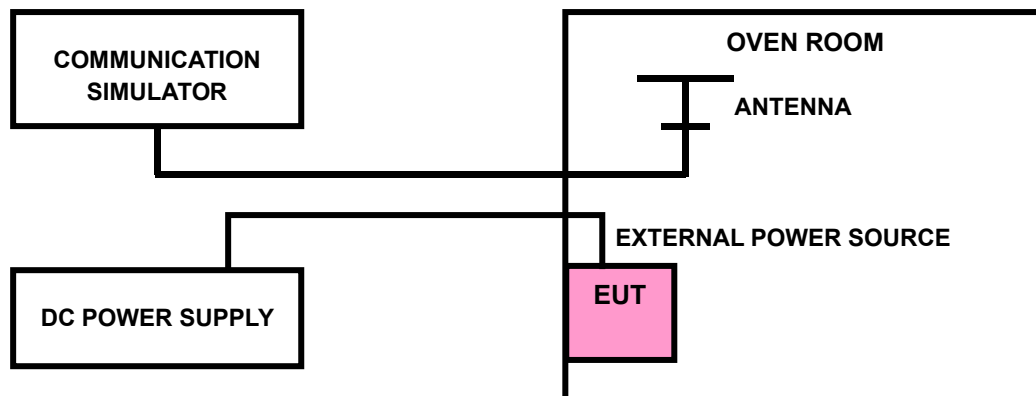



Test Report No.: W7L-P23010004-2RF01

3.2.4 TEST RESULTS


Please Refer to Appendix Of this test report.

3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

3.3.2 TEST SETUP

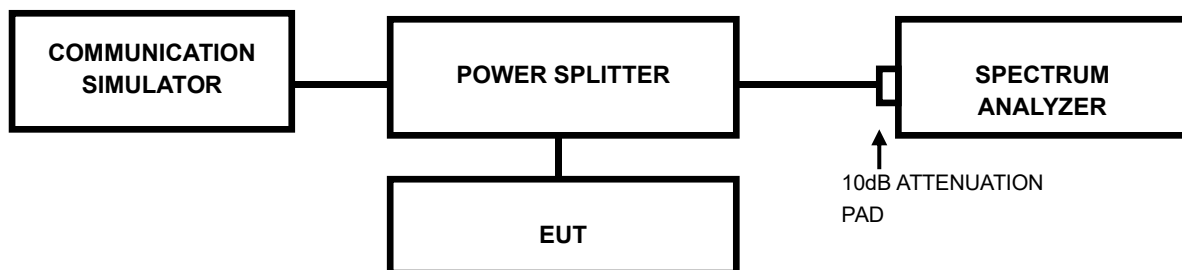



**BUREAU
VERITAS**

Test Report No.: W7L-P23010004-2RF01

3.3.3 TEST RESULTS


Please Refer to Appendix Of this test report.

3.4 BAND EDGE MEASUREMENT

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.4.2 TEST SETUP

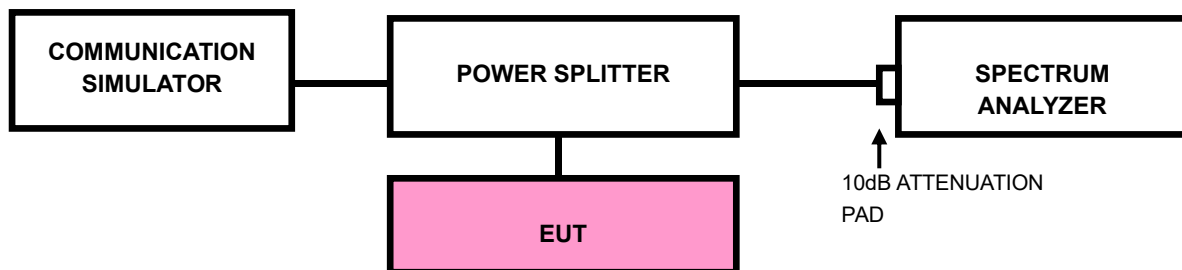



3.4.3 TEST PROCEDURES

- a) All measurements were done at low and high operational frequency range
- b) Connect the transmitter to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
- c) Tune the analyzer to the nominal center frequency of the emission bandwidth (EBW)
- d) Set the resolution bandwidth (RBW) \cong 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
- e) Beyond the 1MHz band from the band edge, RBW=1MHz was used.
- f) Set the video bandwidth (VBW) to \cong 3 x RBW.
- g) Select the average power (RMS) display detector.
- h) Set the number of measurement points to \cong 1001.
- i) Use auto-coupled sweep time.
- j) Perform the measurement over an interval of time when the transmission is continuous and at its maximum power level.
- k) The RF fundamental frequency should be excluded against the limit line in the operating frequency band and use RBW is 10KHz or 100KHz.
- l) Record the max trace plot into the test report.

3.4.4 TEST RESULTS

Please Refer to Appendix Of this test report.

3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9kHz up to a frequency including its 10th harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.1 TEST SETUP

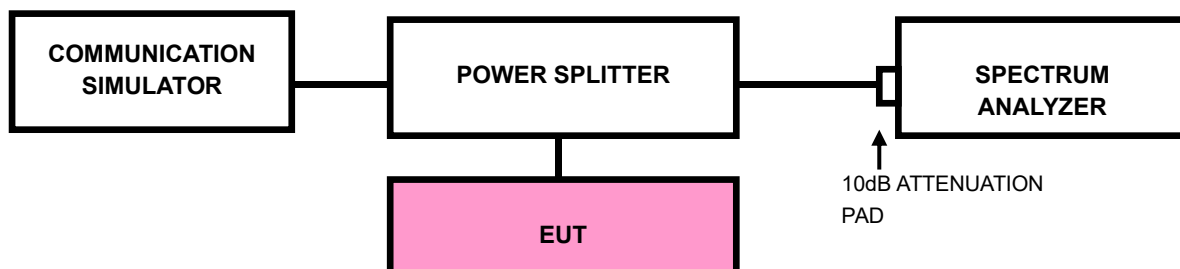

3.5.2 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Appendix Of this test report.



3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,
 $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi.}$


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

3.6.3 DEVIATION FROM TEST STANDARD


No deviation

3.6.4 TEST SETUP


< Frequency Range below 30MHz >

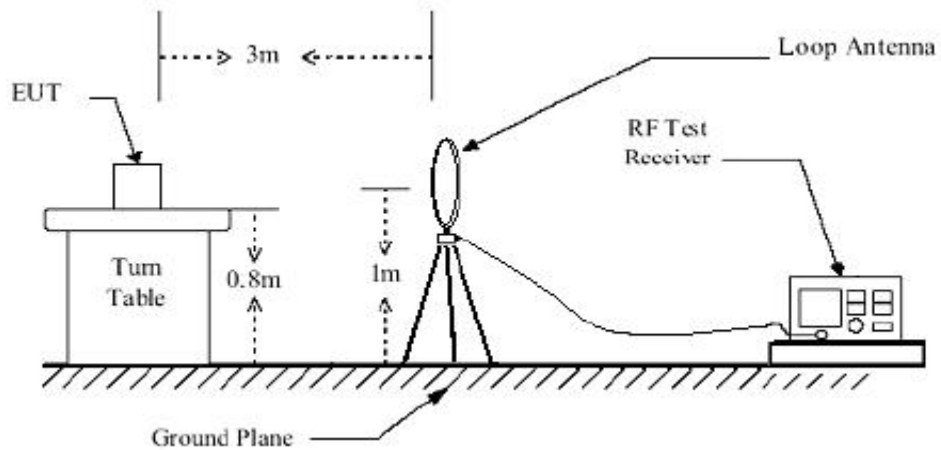

< Frequency Range 30MHz~1GHz >

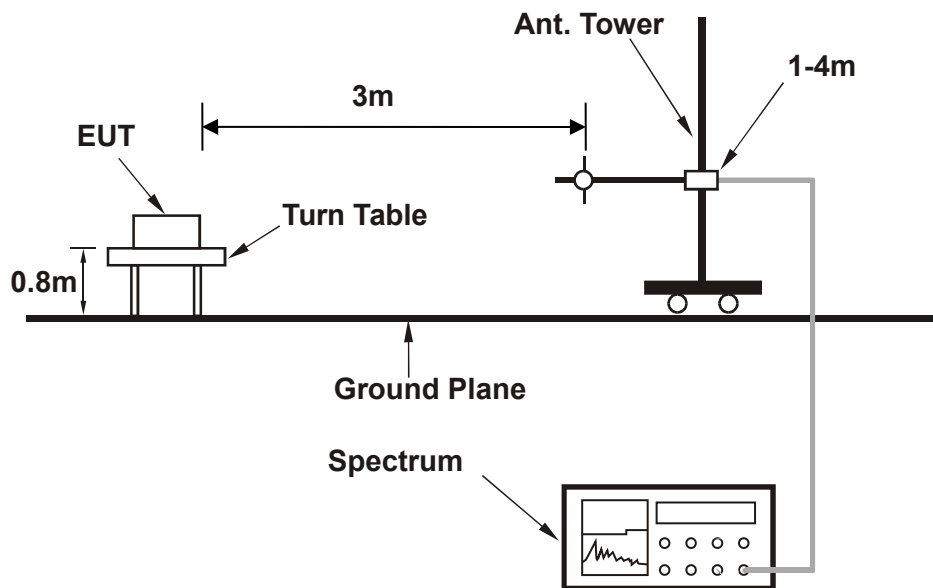

<Frequency Range above 1GHz>

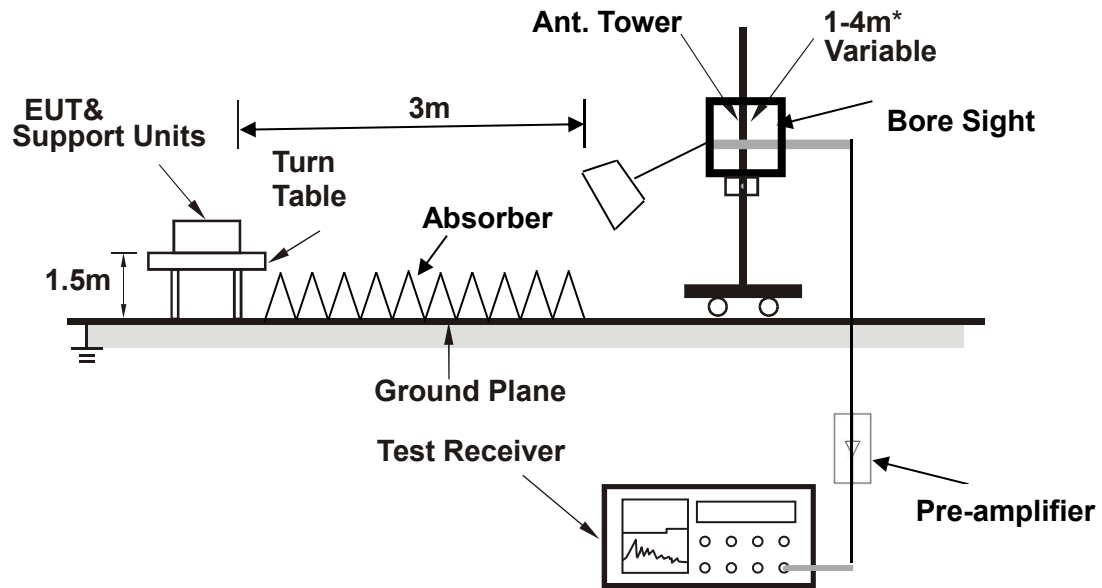

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

GSM 850

CHANNEL BANDWIDTH: 128 ~ 251

MODE	TX channel 190	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	33.880	-68.02	-56.79	-13.00	-55.02	-11.23	Peak	Horizontal
2	52.310	-69.58	-52.21	-13.00	-56.58	-17.37	Peak	Horizontal
3	81.410	-69.63	-48.15	-13.00	-56.63	-21.48	Peak	Horizontal
4	227.880	-62.06	-47.97	-13.00	-49.06	-14.09	Peak	Horizontal
5 PP	302.570	-59.48	-47.08	-13.00	-46.48	-12.40	Peak	Horizontal
6	422.850	-70.70	-61.08	-13.00	-57.70	-9.62	Peak	Horizontal

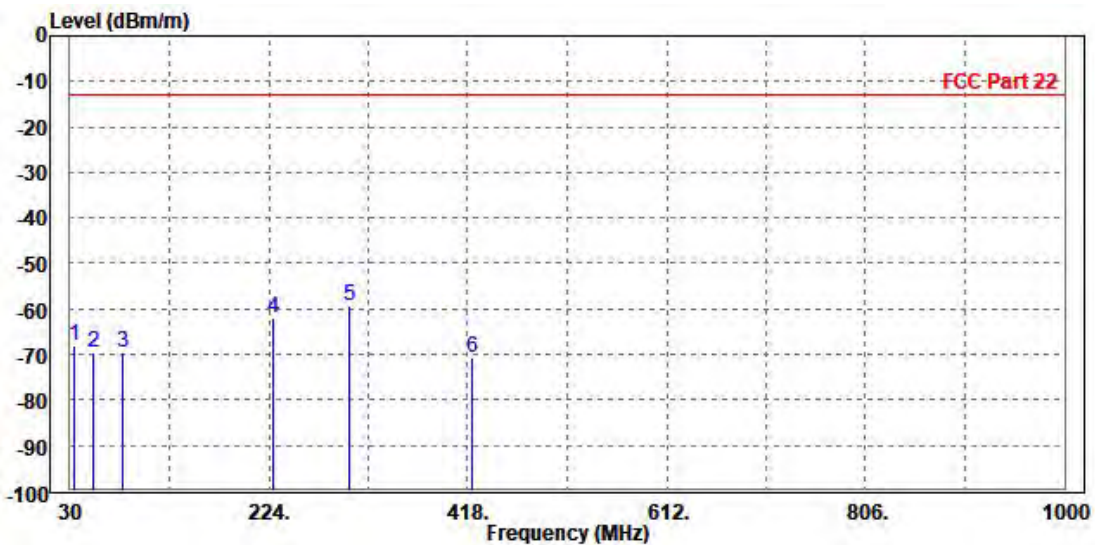




Test Report No.: W7L-P23010004-2RF01

MODE	TX channel 190	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	33.880	-64.15	-44.39	-13.00	-51.15	-19.76	Peak	Vertical
2	81.410	-63.68	-45.01	-13.00	-50.68	-18.67	Peak	Vertical
3 PP	101.780	-63.26	-56.15	-13.00	-50.26	-7.11	Peak	Vertical
4	206.540	-68.79	-51.34	-13.00	-55.79	-17.45	Peak	Vertical
5	294.810	-68.73	-57.63	-13.00	-55.73	-11.10	Peak	Vertical
6	387.930	-68.25	-59.03	-13.00	-55.25	-9.22	Peak	Vertical

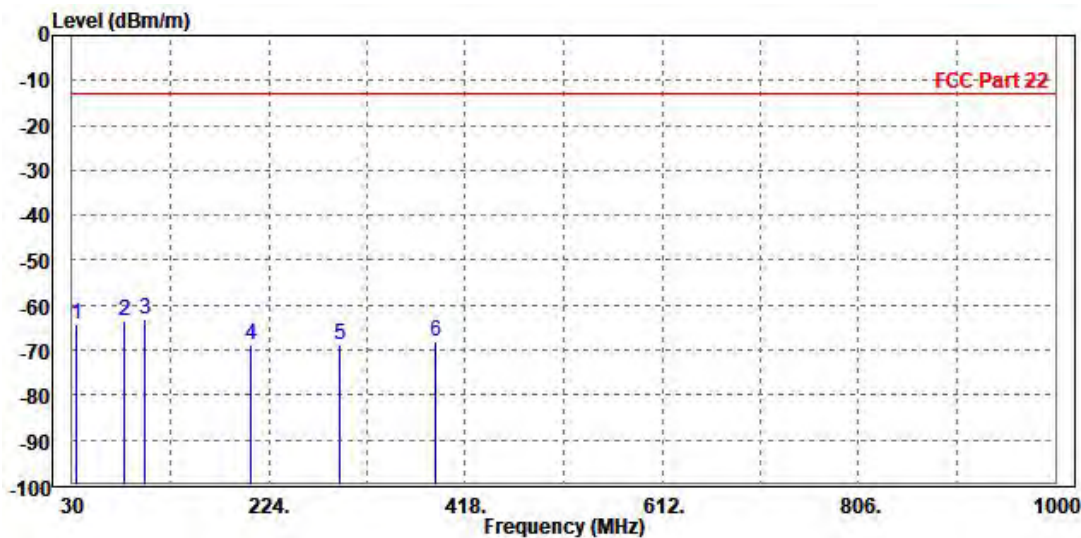



**BUREAU
VERITAS**

Test Report No.: W7L-P23010004-2RF01

ABOVE 1GHz DATA


Note: For higher frequency, the emission is too low to be detected.

GSM 850

CH 128:

MODE	TX channel 128	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.400	-46.74	-47.52	-13.00	-33.74	0.78	Peak	Horizontal
2	PP 2476.000	-43.92	-49.27	-13.00	-30.92	5.35	Peak	Horizontal

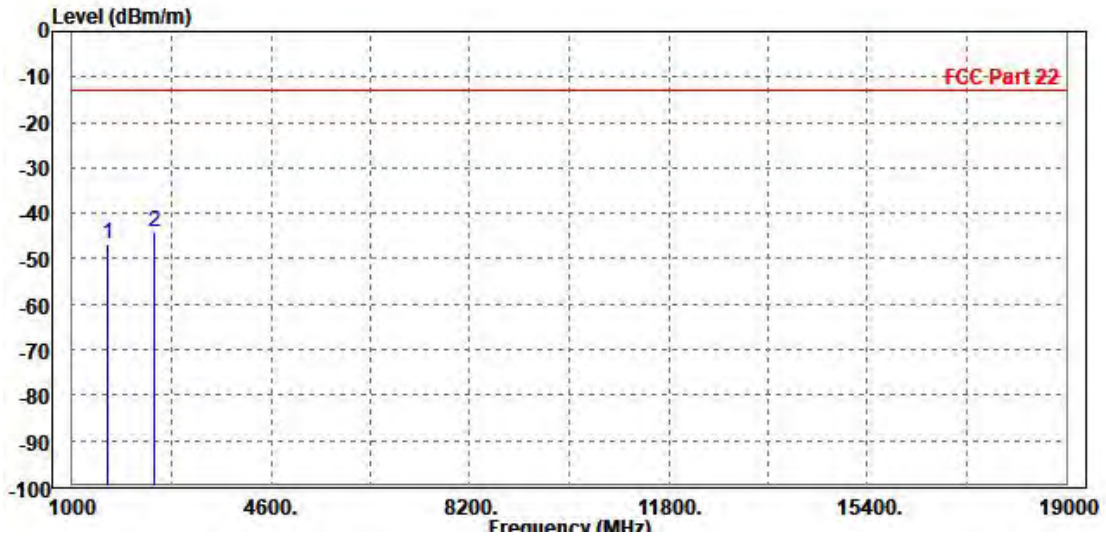




Test Report No.: W7L-P23010004-2RF01

MODE	TX channel 128	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.000	-53.83	-54.87	-13.00	-40.83	1.04	Peak	Vertical
2 PP	2472.600	-47.67	-52.53	-13.00	-34.67	4.86	Peak	Vertical

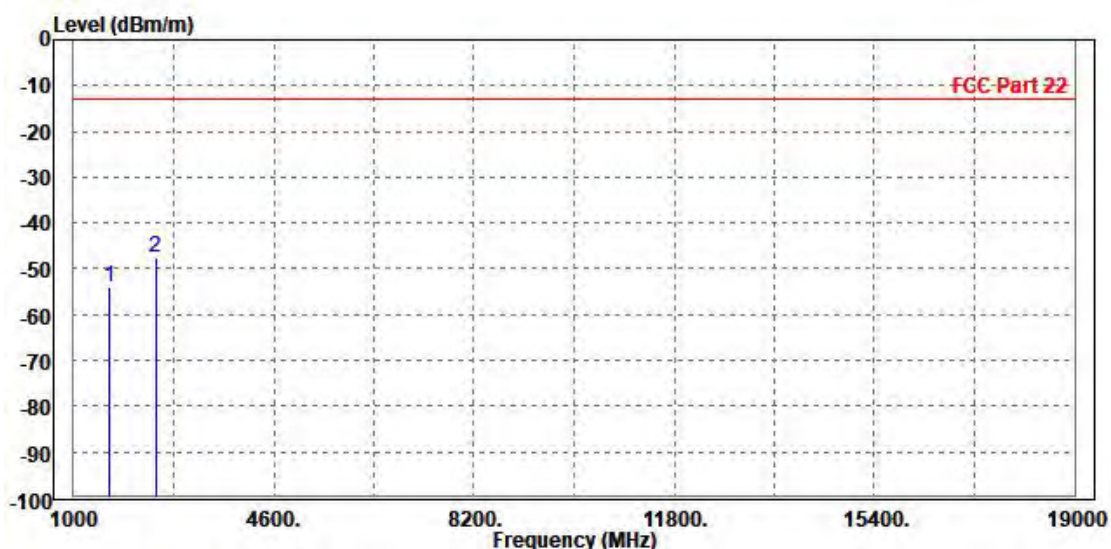




Test Report No.: W7L-P23010004-2RF01

CH 190:

MODE	TX channel 190	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-44.16	-45.08	-13.00	-31.16	0.92	Peak	Horizontal
2 PP	2512.000	-40.19	-45.66	-13.00	-27.19	5.47	Peak	Horizontal

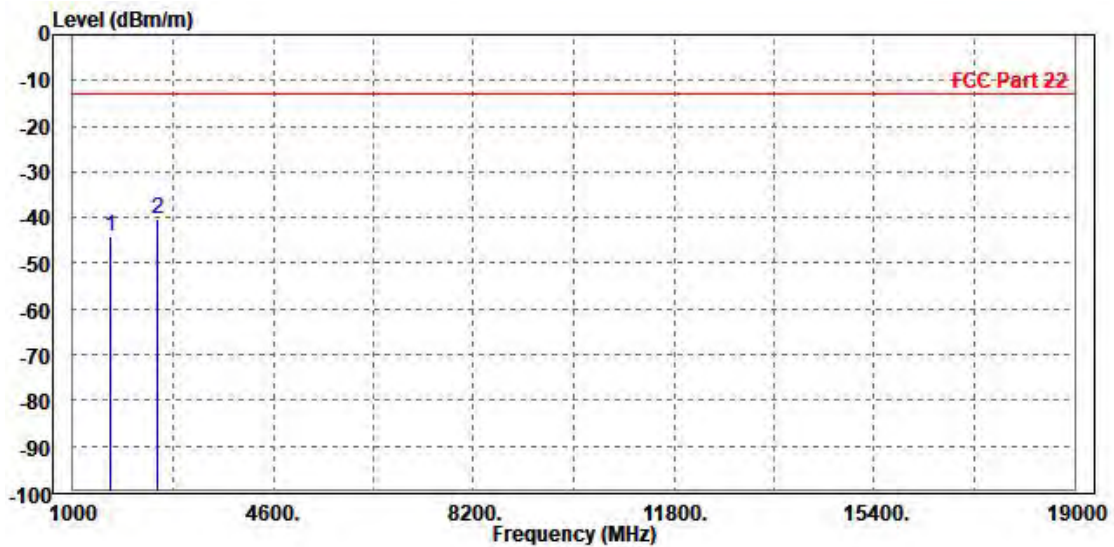




Test Report No.: W7L-P23010004-2RF01

MODE	TX channel 190	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1672.800	-46.46	-47.68	-13.00	-33.46	1.22	Peak	Vertical
2	PP 2512.000	-45.02	-50.00	-13.00	-32.02	4.98	Peak	Vertical

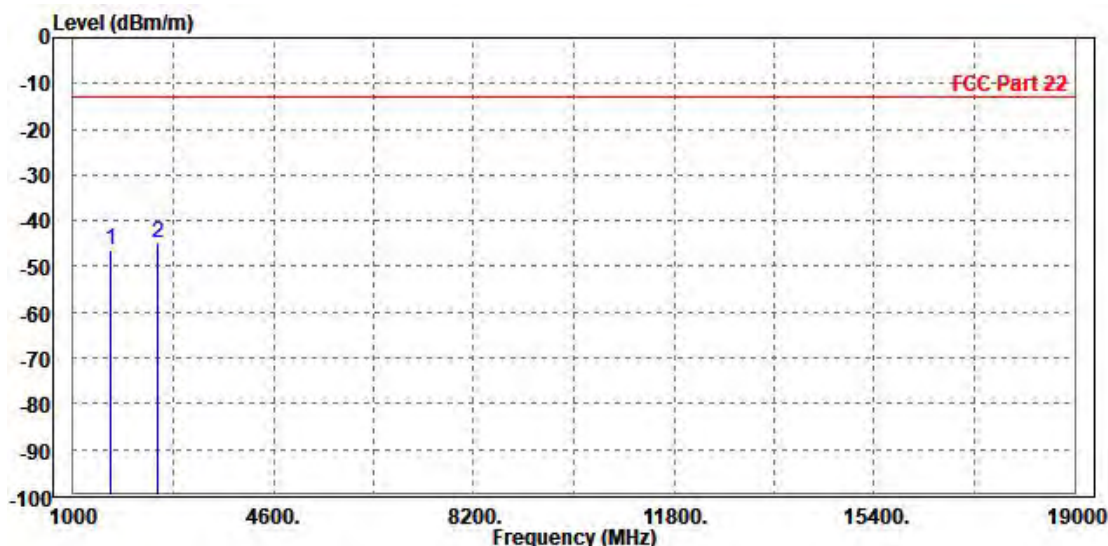




Test Report No.: W7L-P23010004-2RF01

CH 251:

MODE	TX channel 251	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1702.000	-42.98	-44.19	-13.00	-29.98	1.21	Peak	Horizontal
2	PP 2548.000	-40.81	-46.36	-13.00	-27.81	5.55	Peak	Horizontal

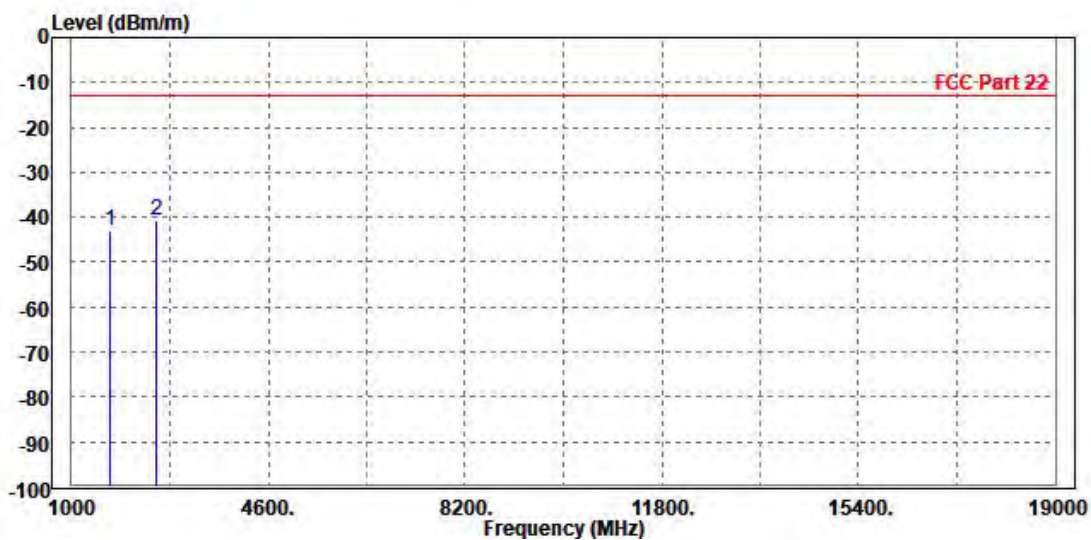




Test Report No.: W7L-P23010004-2RF01

MODE	TX channel 251	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Read	Limit	Over				
Freq	Level	Level	Line	Limit	Factor	Remark	Pol/Phase
MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP 1702.000	-43.30	-44.73	-13.00	-30.30	1.43	Peak	Vertical
2 2548.000	-46.88	-51.97	-13.00	-33.88	5.09	Peak	Vertical

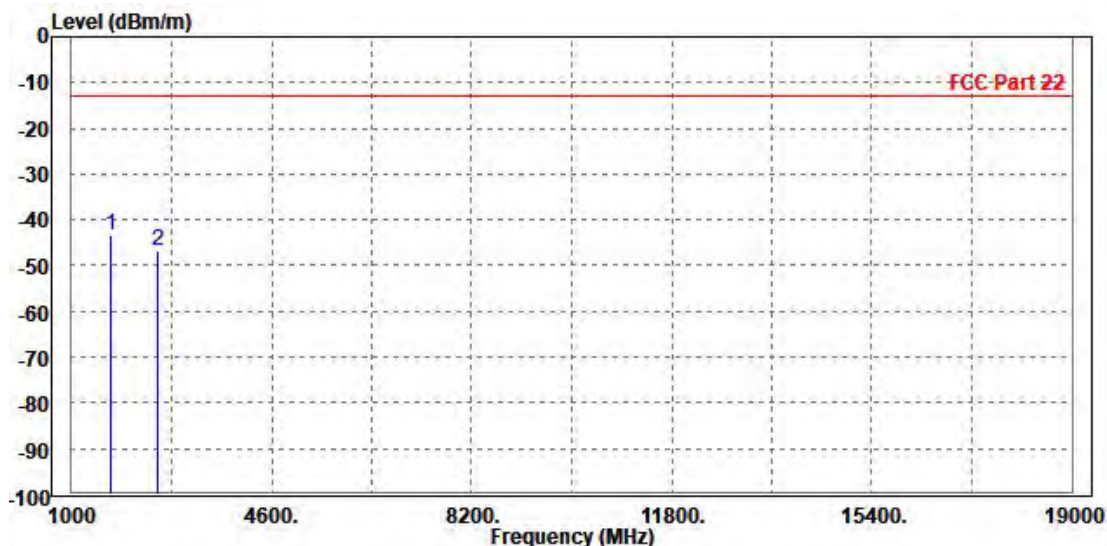



**BUREAU
VERITAS**


Test Report No.: W7L-P23010004-2RF01

EDGE 850:

CH 128:

MODE	TX channel 128	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.000	-49.23	-50.00	-13.00	-36.23	0.77	Peak	Horizontal
2 PP	2472.600	-42.73	-48.07	-13.00	-29.73	5.34	Peak	Horizontal

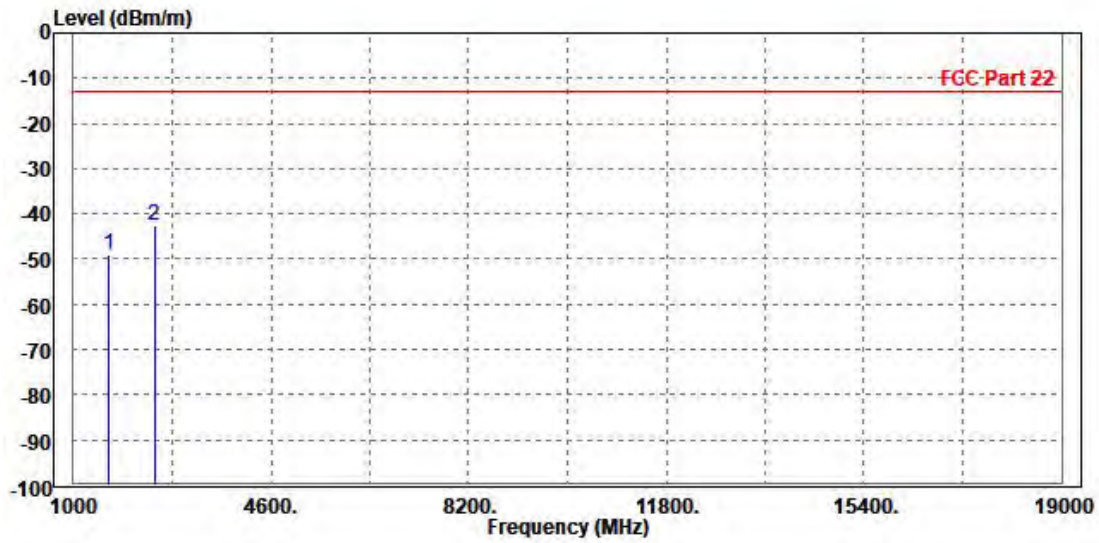




Test Report No.: W7L-P23010004-2RF01

MODE	TX channel 128	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.400	-48.75	-49.79	-13.00	-35.75	1.04	Peak	Vertical
2 PP	2476.000	-44.35	-49.22	-13.00	-31.35	4.87	Peak	Vertical

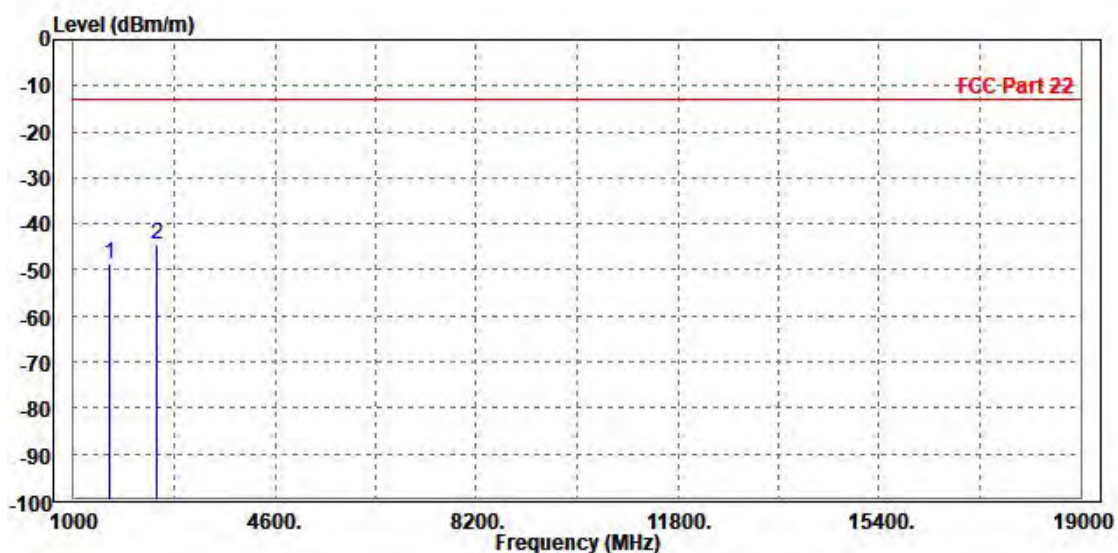




Test Report No.: W7L-P23010004-2RF01

CH 190:

MODE	TX channel 190	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-45.27	-46.19	-13.00	-32.27	0.92	Peak	Horizontal
2 PP	2512.000	-42.72	-48.19	-13.00	-29.72	5.47	Peak	Horizontal

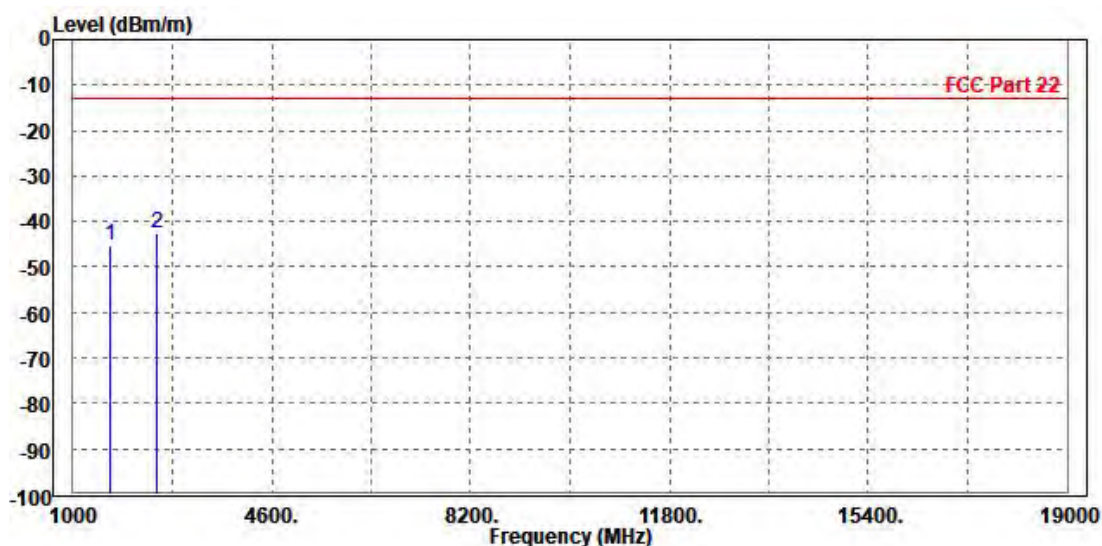




Test Report No.: W7L-P23010004-2RF01

MODE	TX channel 190	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-47.57	-48.74	-13.00	-34.57	1.17	Peak	Vertical
2 PP	2512.000	-45.10	-50.08	-13.00	-32.10	4.98	Peak	Vertical

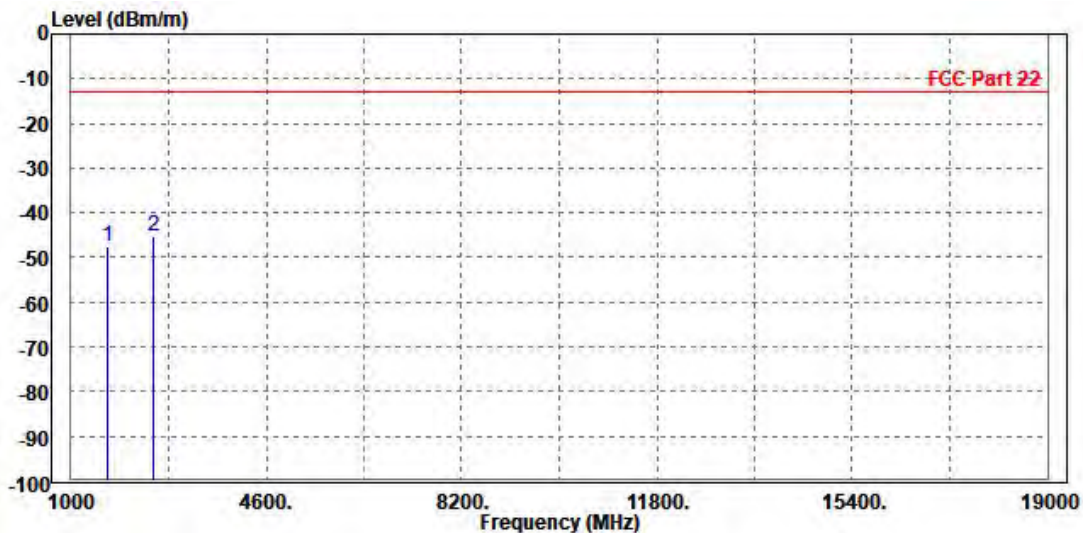




**BUREAU
VERITAS**

Test Report No.: W7L-P23010004-2RF01

CH 251:

MODE	TX channel 251	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1702.000	-44.91	-46.12	-13.00	-31.91	1.21	Peak	Horizontal
2 PP	2548.000	-43.52	-49.07	-13.00	-30.52	5.55	Peak	Horizontal

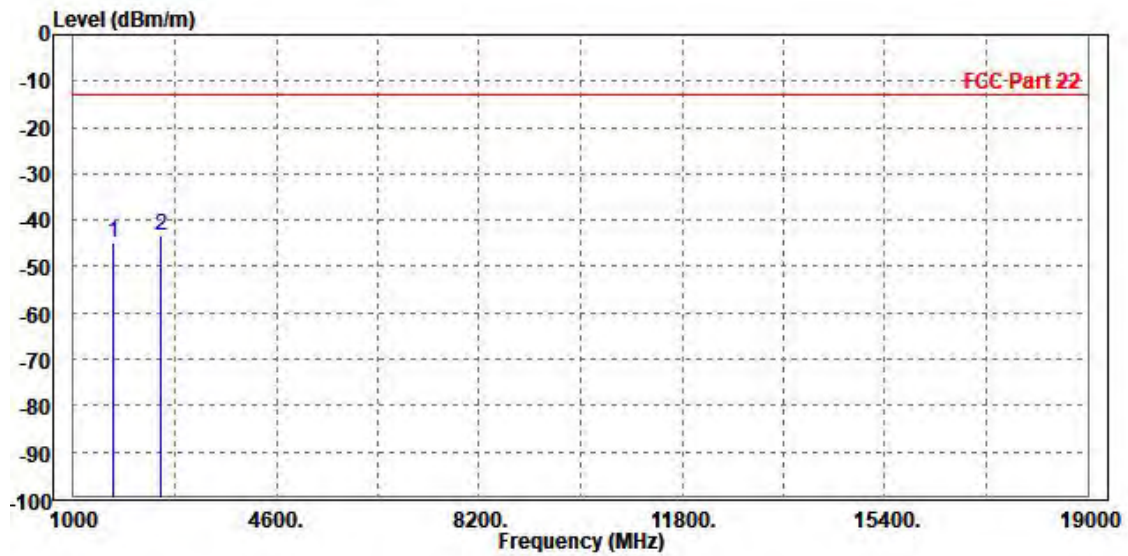




Test Report No.: W7L-P23010004-2RF01

MODE	TX channel 251	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1702.000	-49.61	-53.48	-13.00	-36.61	3.87	Peak	Vertical
2	2546.400	-51.10	-58.32	-13.00	-38.10	7.22	Peak	Vertical

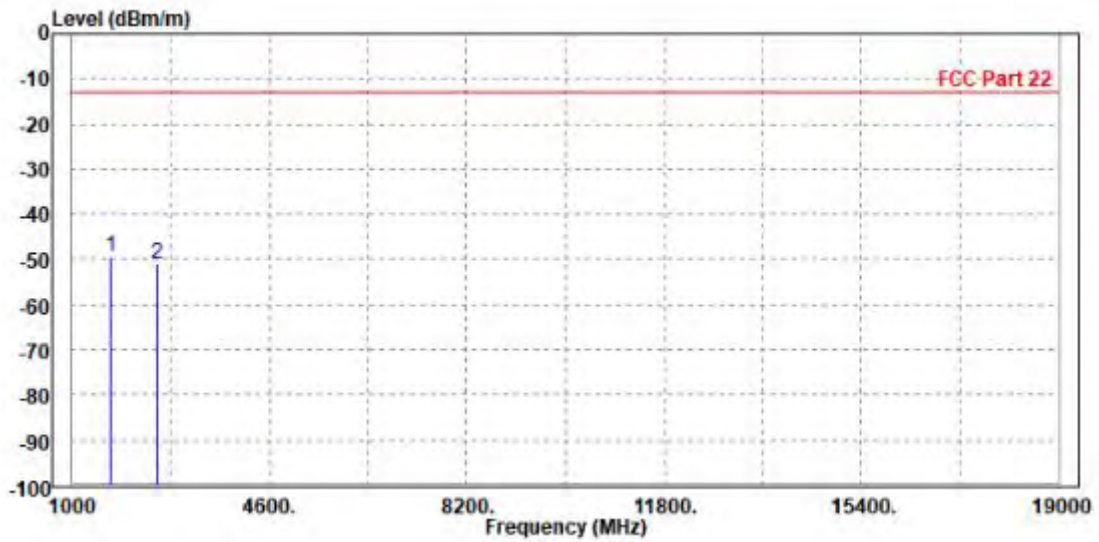




WCDMA Band V:

CH 4132:

MODE	TX channel 4132	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Chao Wu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,653.500	-57.70	-13.00	44.70	14.54	H	297	2
5	7,828.000	-44.22	-13.00	31.22	32.96	H	1	1

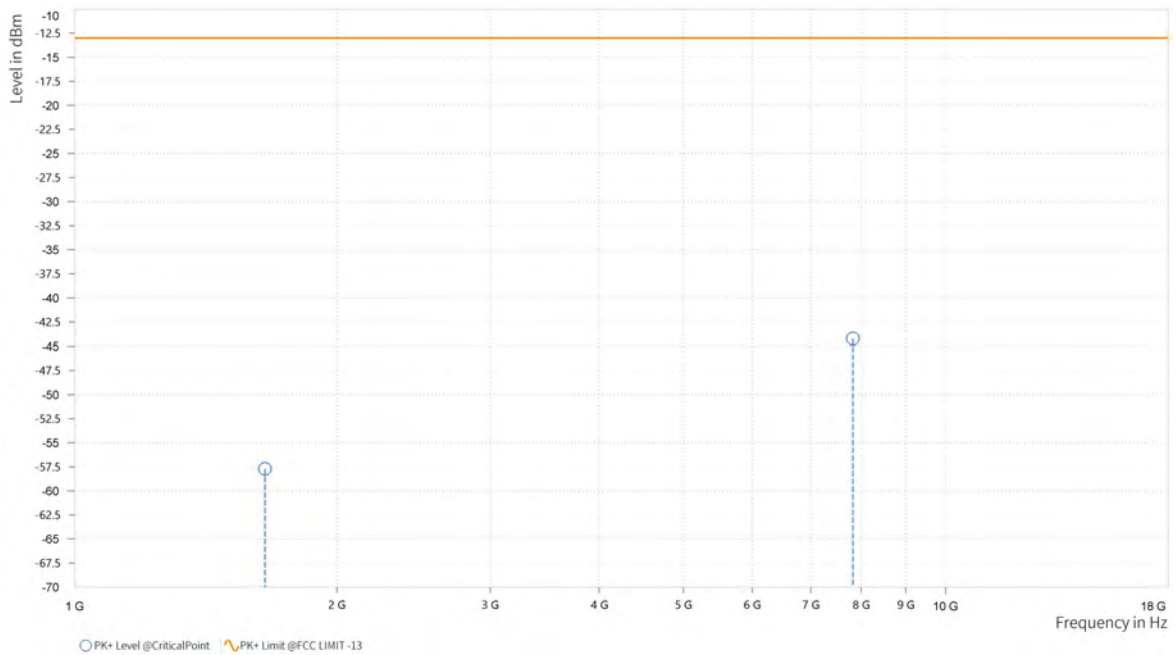




Test Report No.: W7L-P23010004-2RF01

MODE	TX channel 4132	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Chao Wu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,653.000	-59.06	-13.00	46.06	14.48	V	294.7	2
5	7,999.500	-43.25	-13.00	30.25	33.35	V	87.8	2

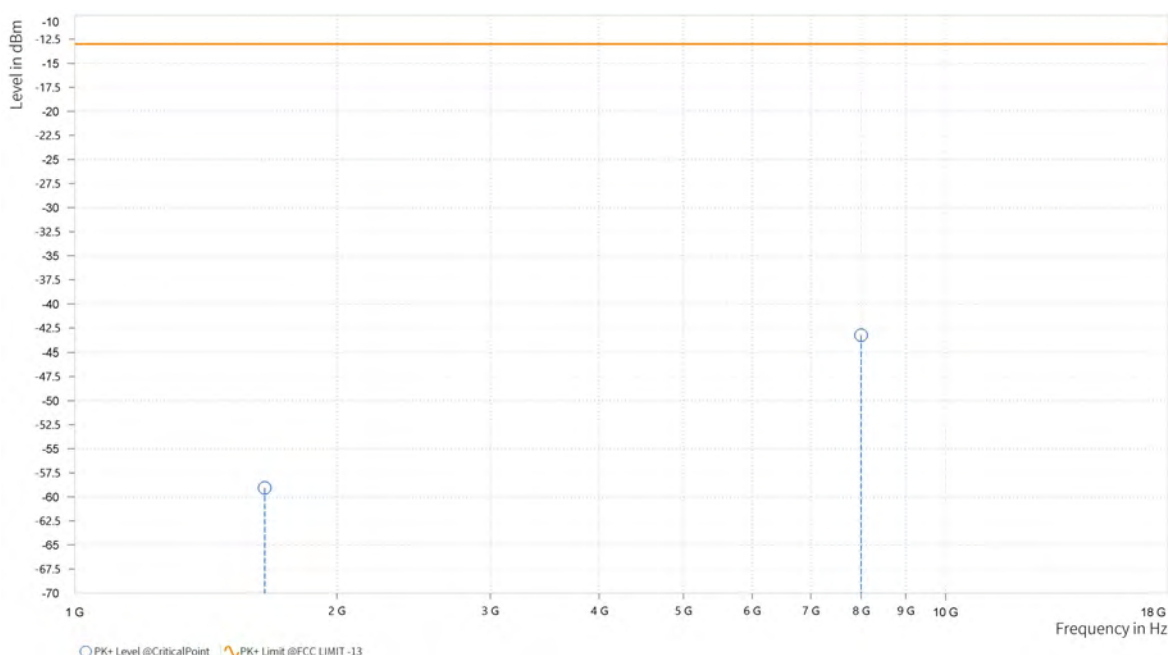




CH 4182:

MODE	TX channel 4182	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Chao Wu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,672.000	-58.89	-13.00	45.89	15.06	H	1	1
5	7,882.000	-43.99	-13.00	30.99	33.00	H	359.1	1

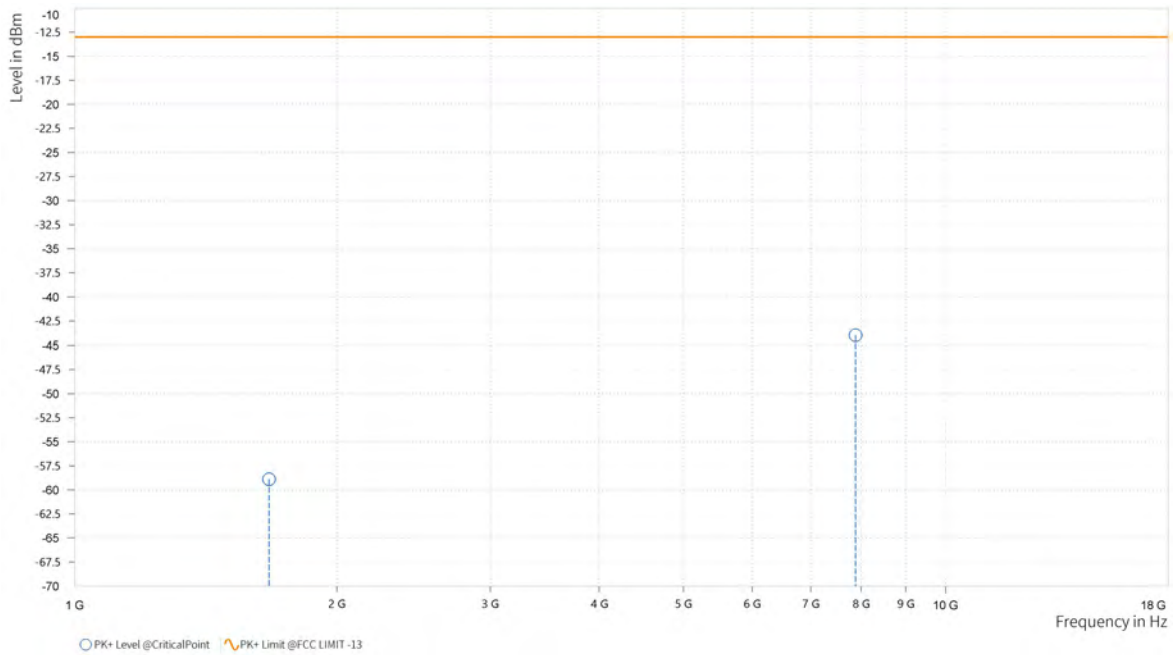




Test Report No.: W7L-P23010004-2RF01

MODE	TX channel 4182	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Chao Wu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,672.500	-56.15	-13.00	43.15	15.10	V	359.1	1
5	7,930.000	-44.28	-13.00	31.28	33.16	V	267.4	1

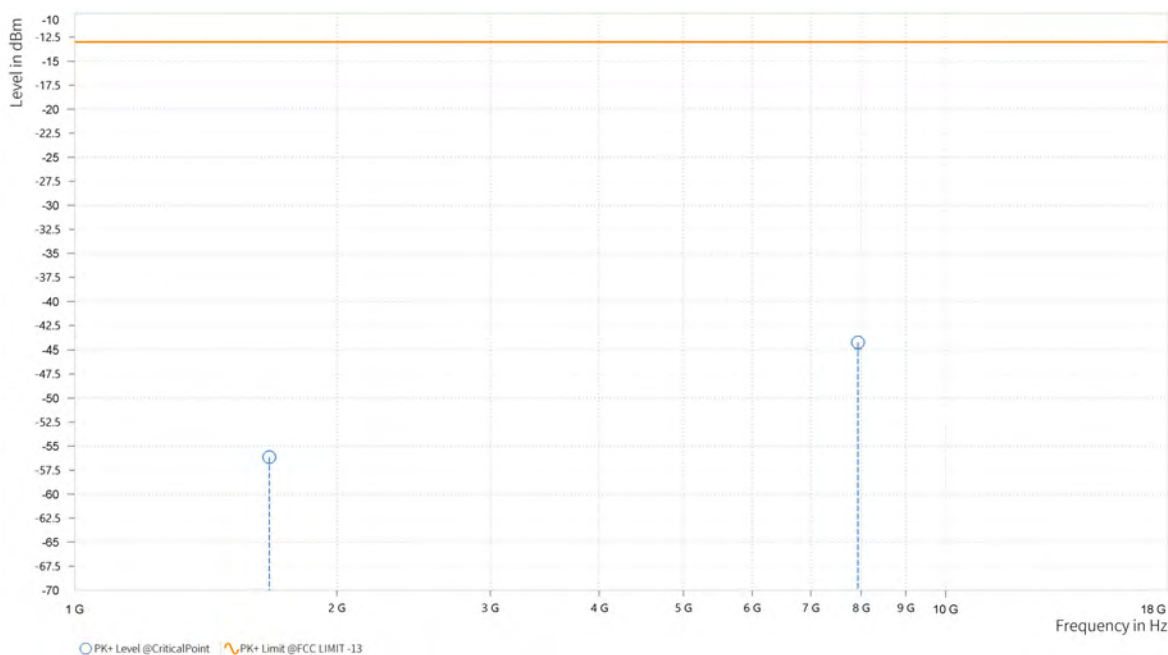




CH 4233:

MODE	TX channel 4233	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Chao Wu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,694.000	-56.31	-13.00	43.31	15.40	H	297	2
5	7,900.000	-44.46	-13.00	31.46	33.01	H	359	2

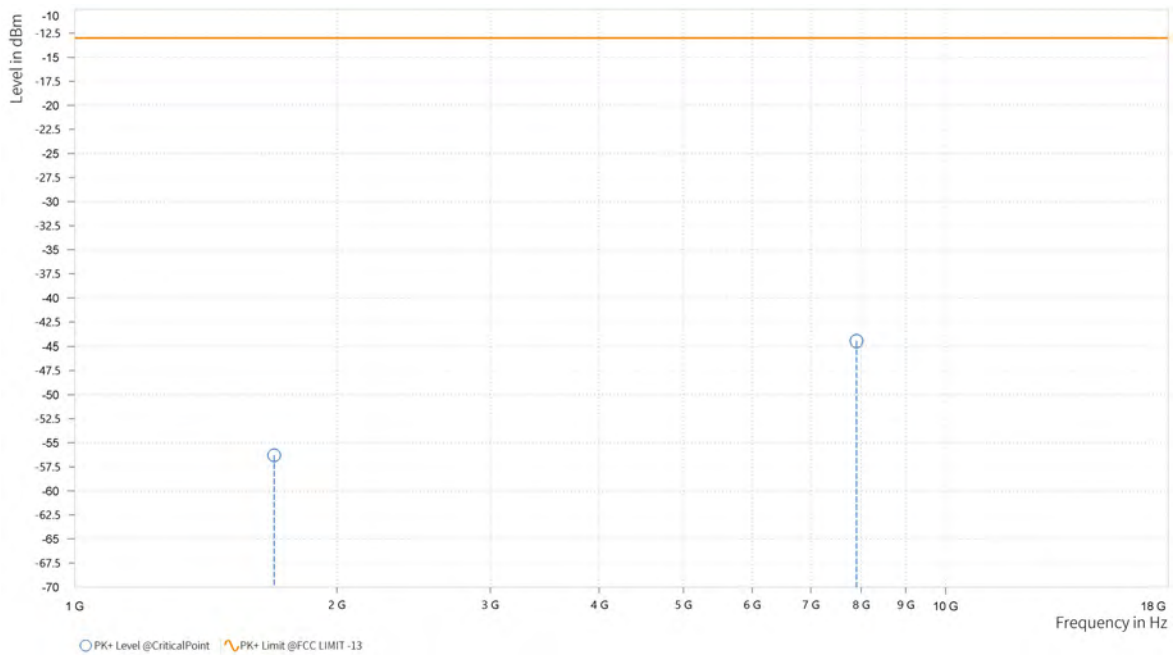




Test Report No.: W7L-P23010004-2RF01

MODE	TX channel 4233	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Chao Wu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,672.500	-57.94	-13.00	44.94	15.10	V	1	2
5	7,967.000	-43.96	-13.00	30.96	33.26	V	1	1

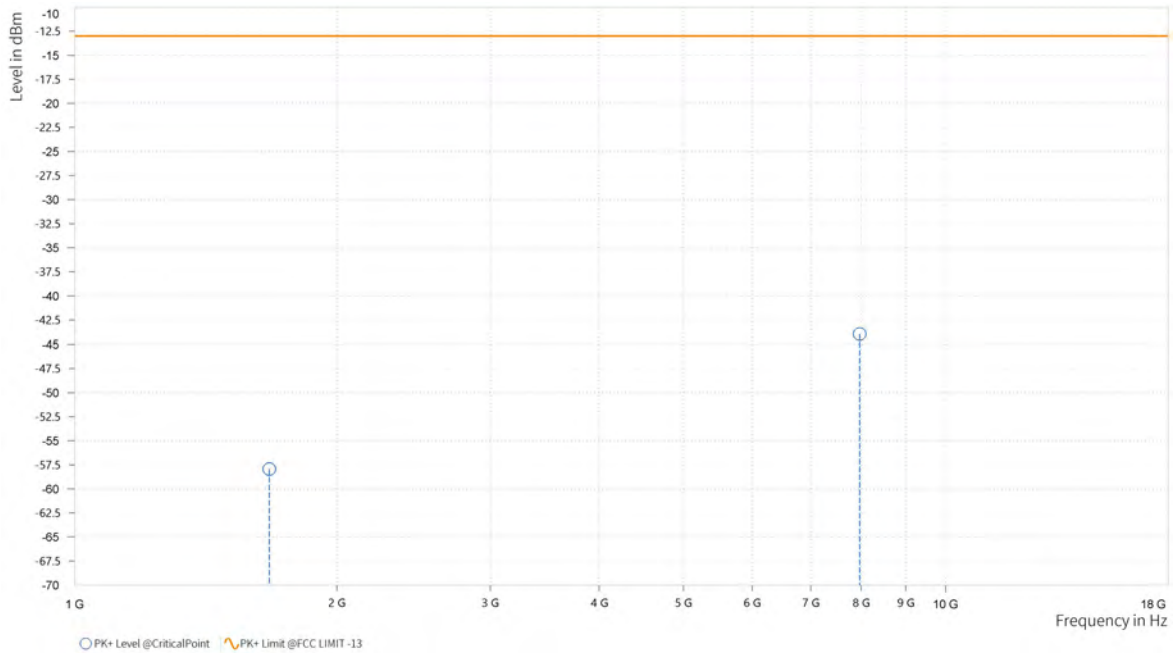



Test Report No.: W7L-P23010004-2RF01


LTE Band 5

CHANNEL BANDWIDTH: 1.4MHz / QPSK

CH 20407:

MODE	TX channel 20407	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Chao Wu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,657.000	-56.90	-13.00	43.90	14.70	H	297.1	2
5	8,000.000	-44.16	-13.00	31.16	33.16	H	1	2

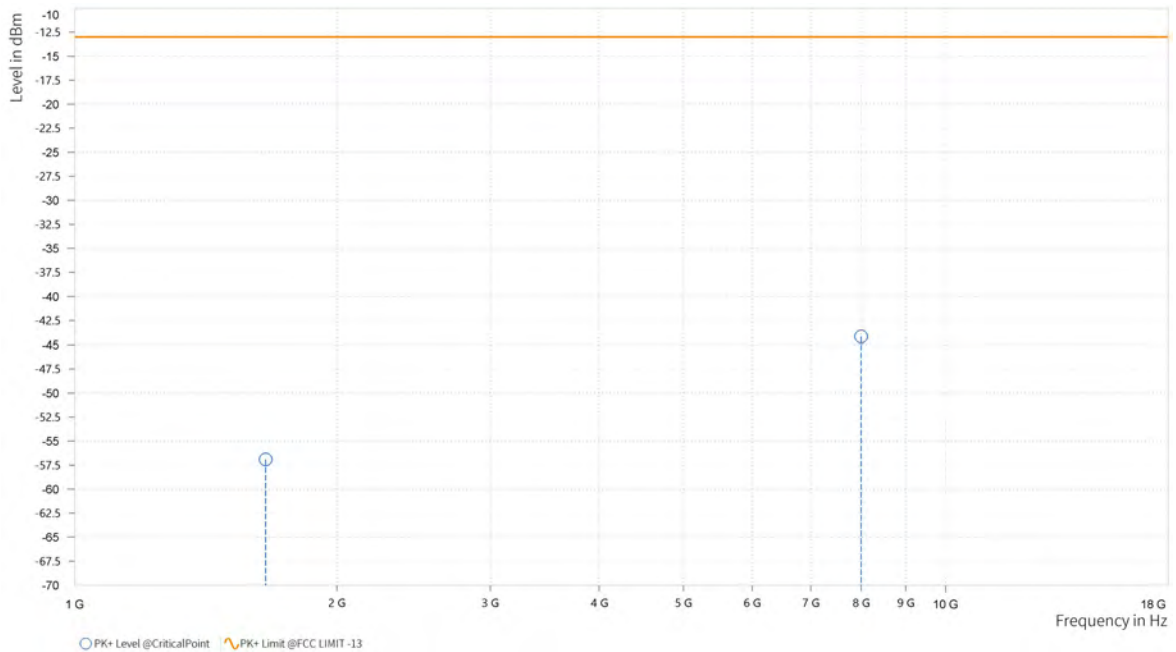




Test Report No.: W7L-P23010004-2RF01

MODE	TX channel 20407	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Chao Wu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,657.000	-56.98	-13.00	43.98	14.68	V	1	1
5	7,960.000	-44.45	-13.00	31.45	33.24	V	0.9	2

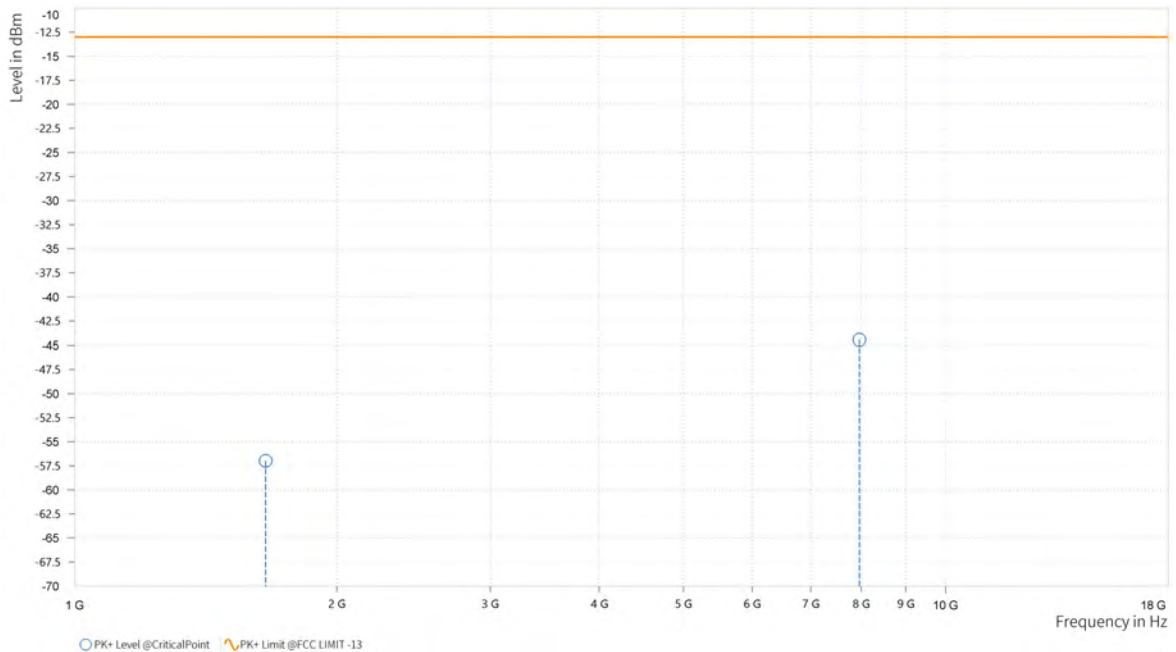




Test Report No.: W7L-P23010004-2RF01

CH 20525:

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Chao Wu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,672.000	-53.59	-13.00	40.59	15.06	H	65.3	1
5	7,960.000	-44.10	-13.00	31.10	32.98	H	84.3	2

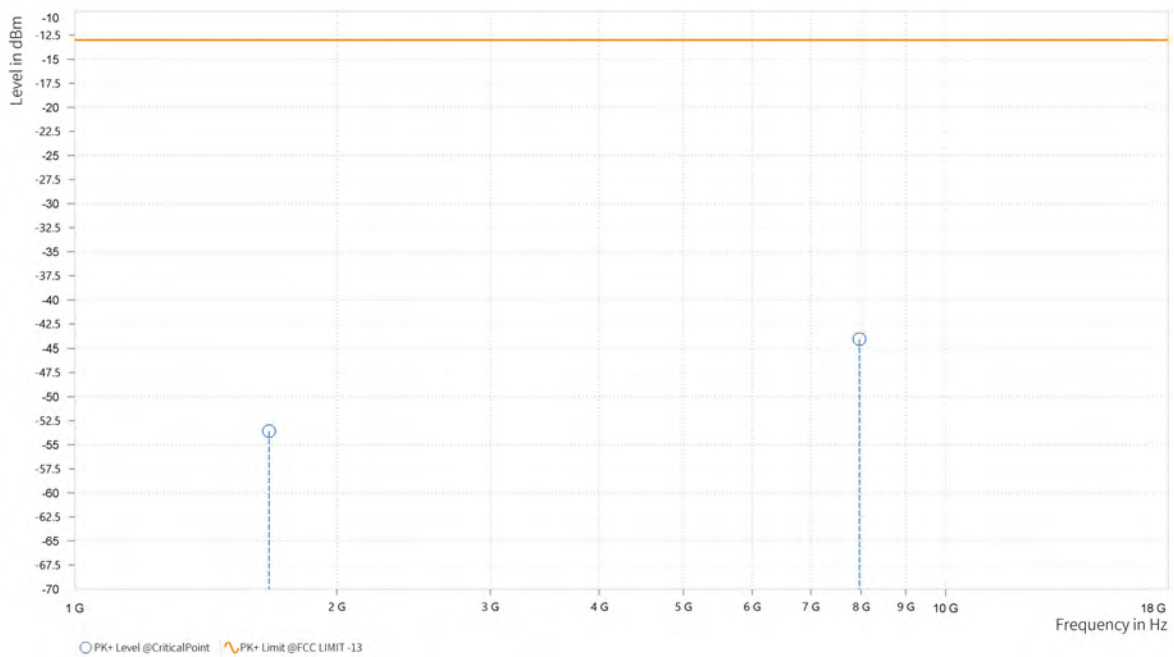




Test Report No.: W7L-P23010004-2RF01

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Chao Wu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,672.000	-56.20	-13.00	43.20	15.09	V	0.9	2
5	7,978.000	-43.51	-13.00	30.51	33.29	V	278.1	1

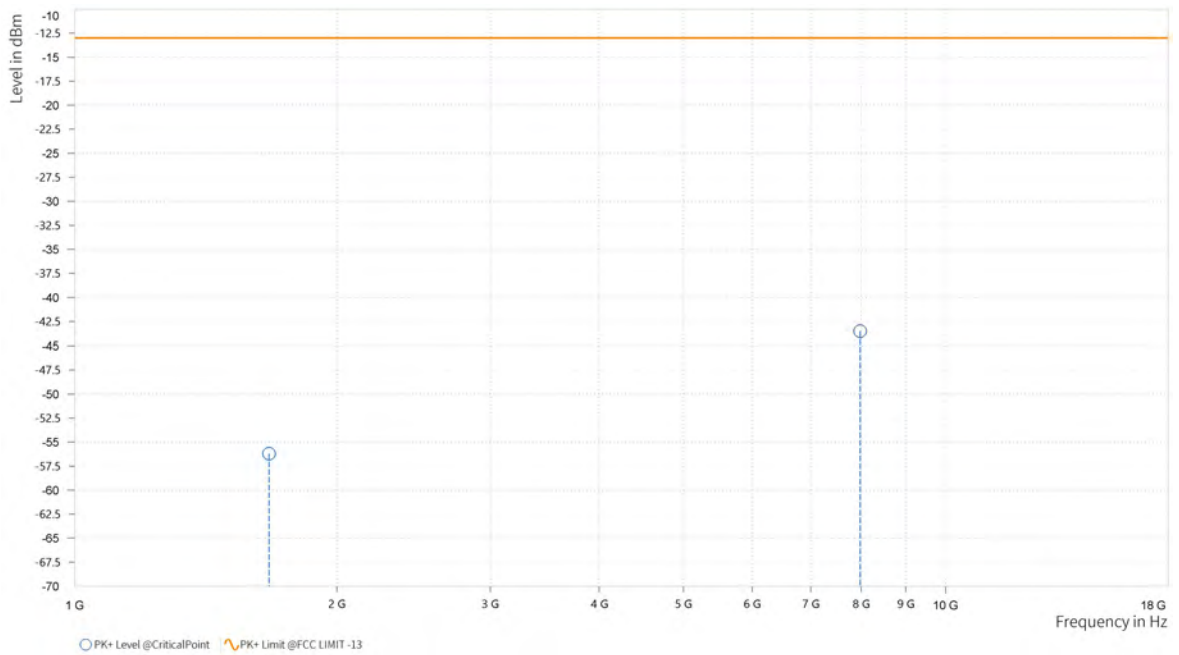




Test Report No.: W7L-P23010004-2RF01

CH 20643:

MODE	TX channel 20643	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Chao Wu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,687.500	-55.00	-13.00	42.00	15.23	H	297	2
5	7,833.500	-44.22	-13.00	31.22	32.96	H	359	2

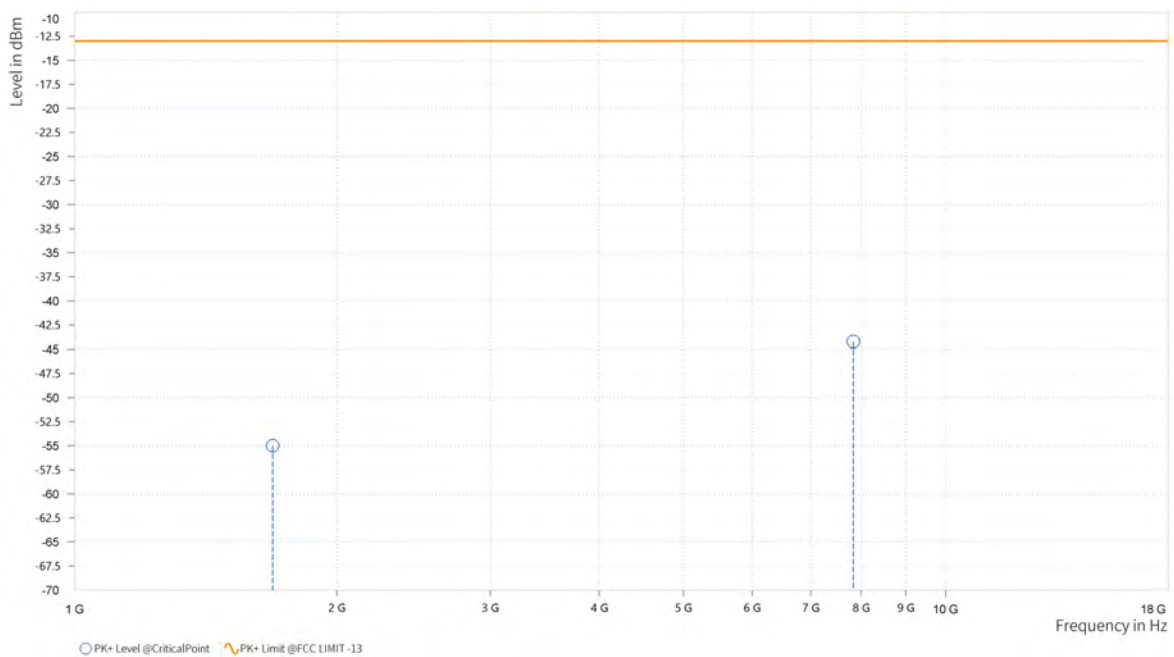




Test Report No.: W7L-P23010004-2RF01

MODE	TX channel 20643	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Chao Wu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,687.500	-55.85	-13.00	42.85	15.68	V	64.1	1
5	7,926.500	-43.52	-13.00	30.52	33.15	V	359	2

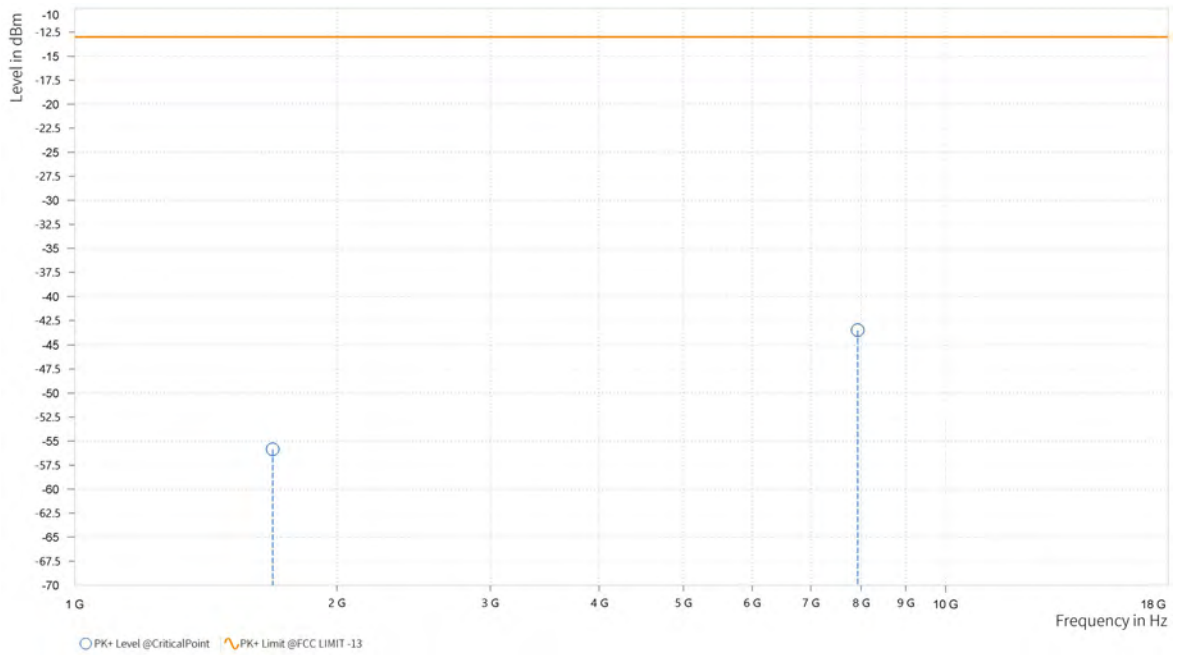




Test Report No.: W7L-P23010004-2RF01

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Chao Wu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,670.000	-53.22	-13.00	40.22	15.01	H	64.1	1
5	7,546.000	-44.41	-13.00	31.41	32.08	H	81.9	2

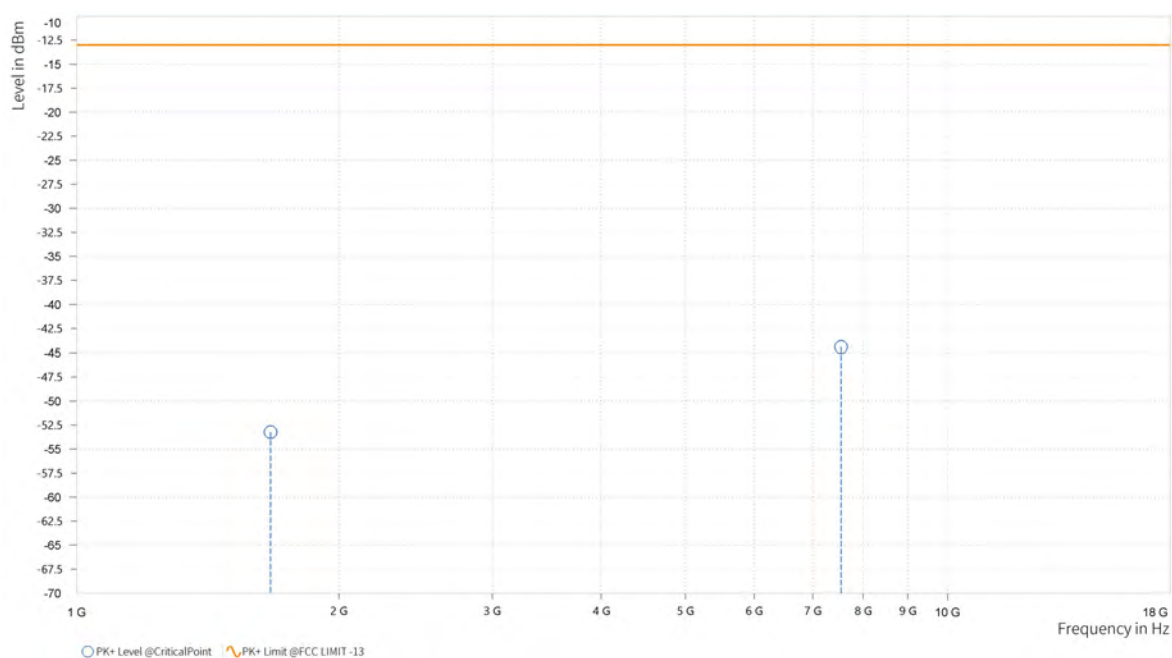




Test Report No.: W7L-P23010004-2RF01

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Chao Wu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,670.500	-56.86	-13.00	43.86	15.05	V	359	2
5	7,888.500	-44.34	-13.00	31.34	33.04	V	83.1	2

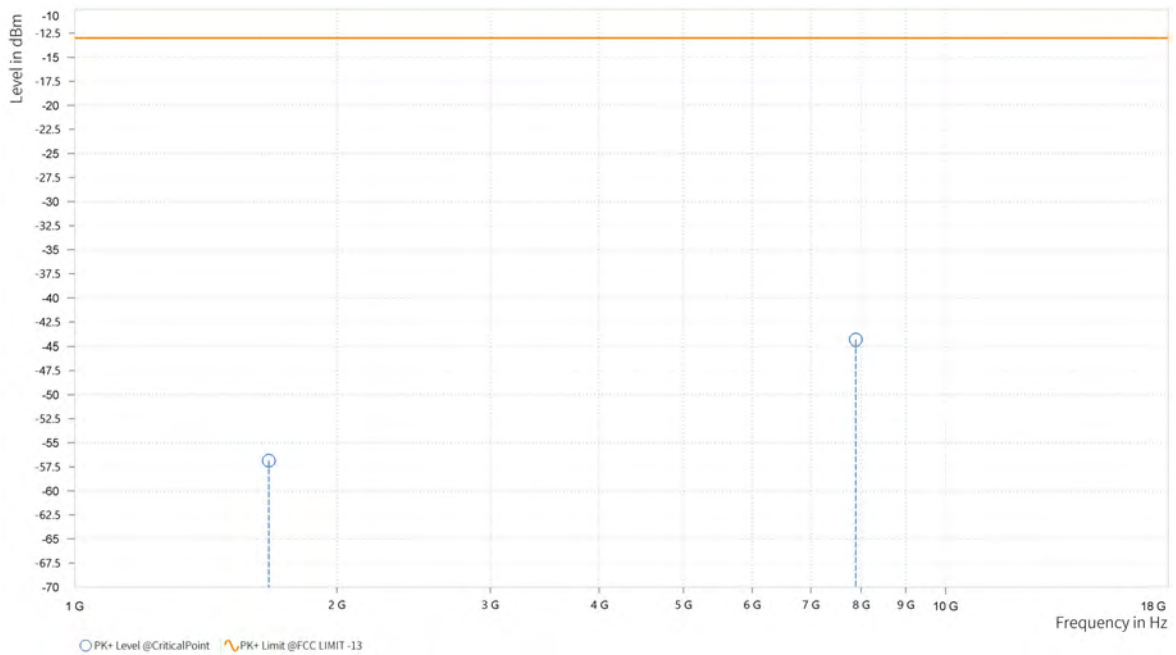




Test Report No.: W7L-P23010004-2RF01

CHANNEL BANDWIDTH: 5MHz / QPSK

CH 20525

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Chao Wu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,668.500	-53.14	-13.00	40.14	14.98	H	65.3	1
5	7,927.000	-43.98	-13.00	30.98	33.00	H	359	1

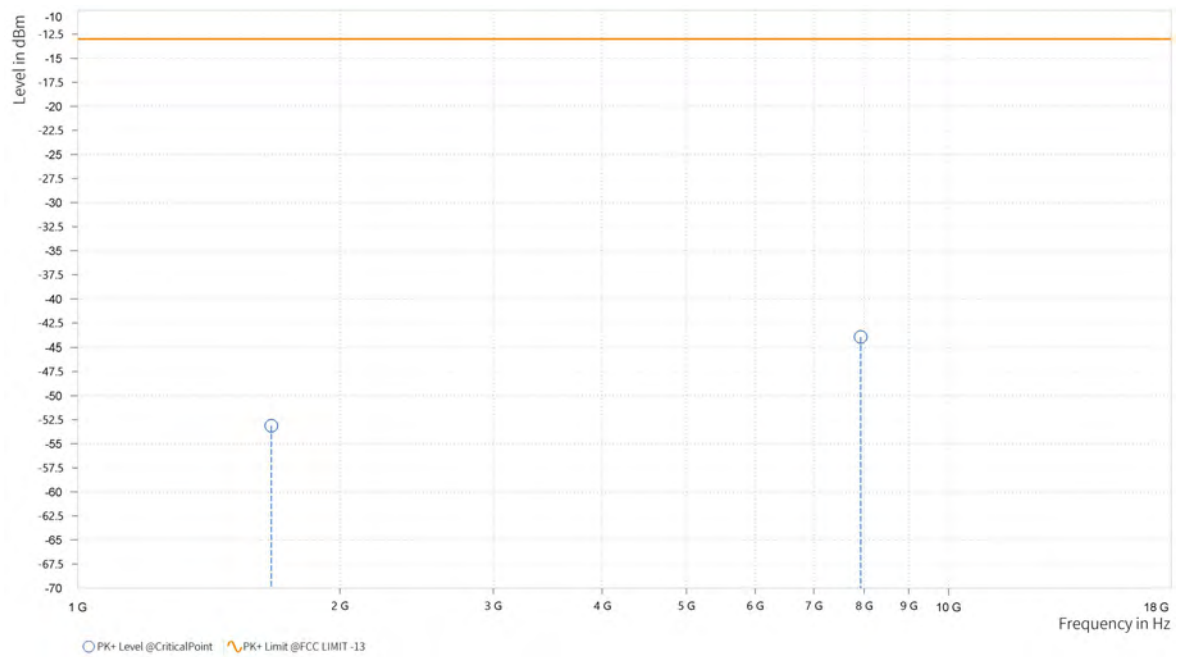




Test Report No.: W7L-P23010004-2RF01

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Chao Wu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,668.500	-55.60	-13.00	42.60	15.00	V	0.9	2
5	7,944.500	-44.28	-13.00	31.28	33.20	V	1	1

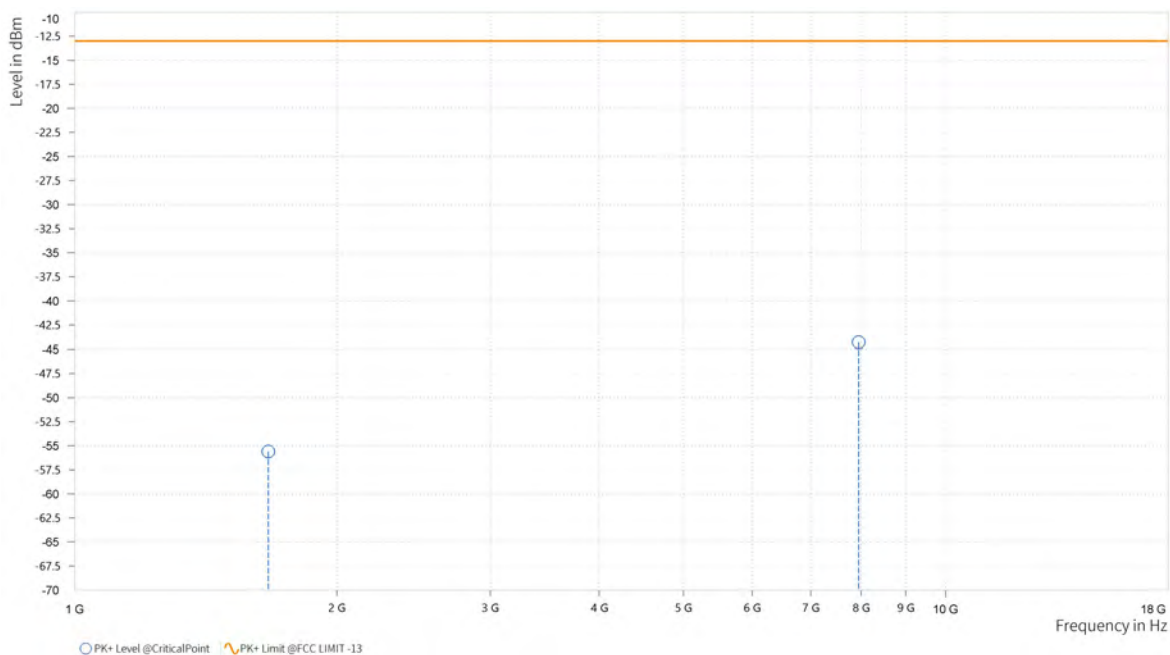




CHANNEL BANDWIDTH: 10MHz / QPSK

CH 20525

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Chao Wu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,664.500	-56.31	-13.00	43.31	14.89	H	295.9	2
5	7,947.000	-43.99	-13.00	30.99	32.99	H	1	1

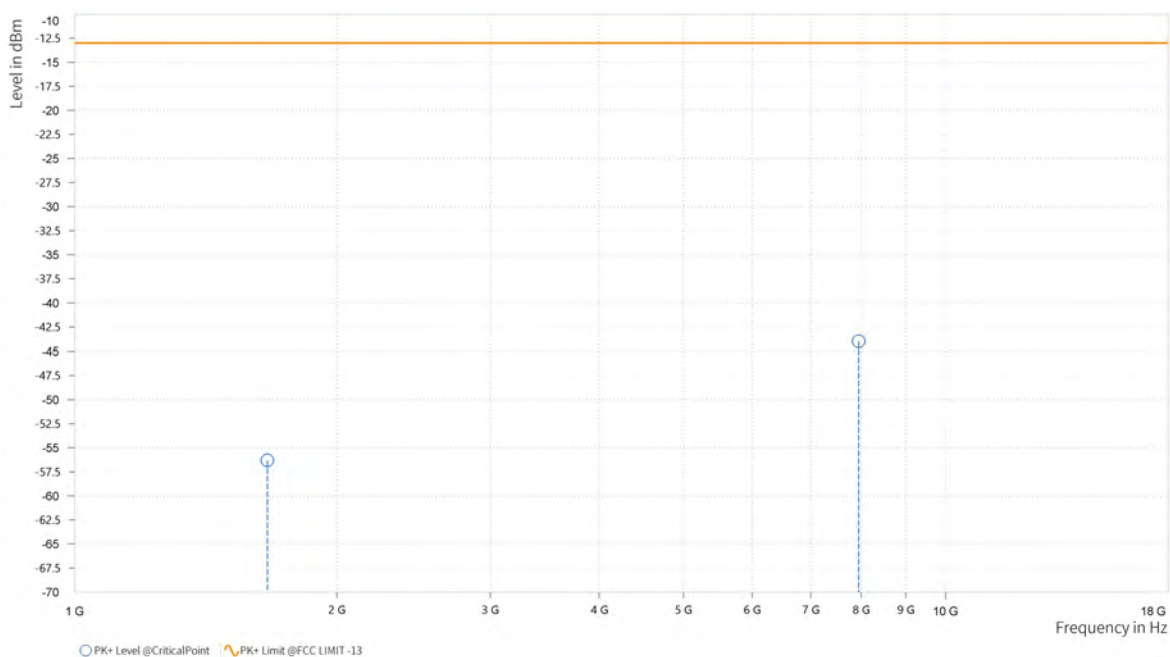




Test Report No.: W7L-P23010004-2RF01

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Chao Wu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,664.000	-55.65	-13.00	42.65	14.89	V	0.9	2
5	7,257.500	-43.63	-13.00	30.63	31.84	V	84.3	2

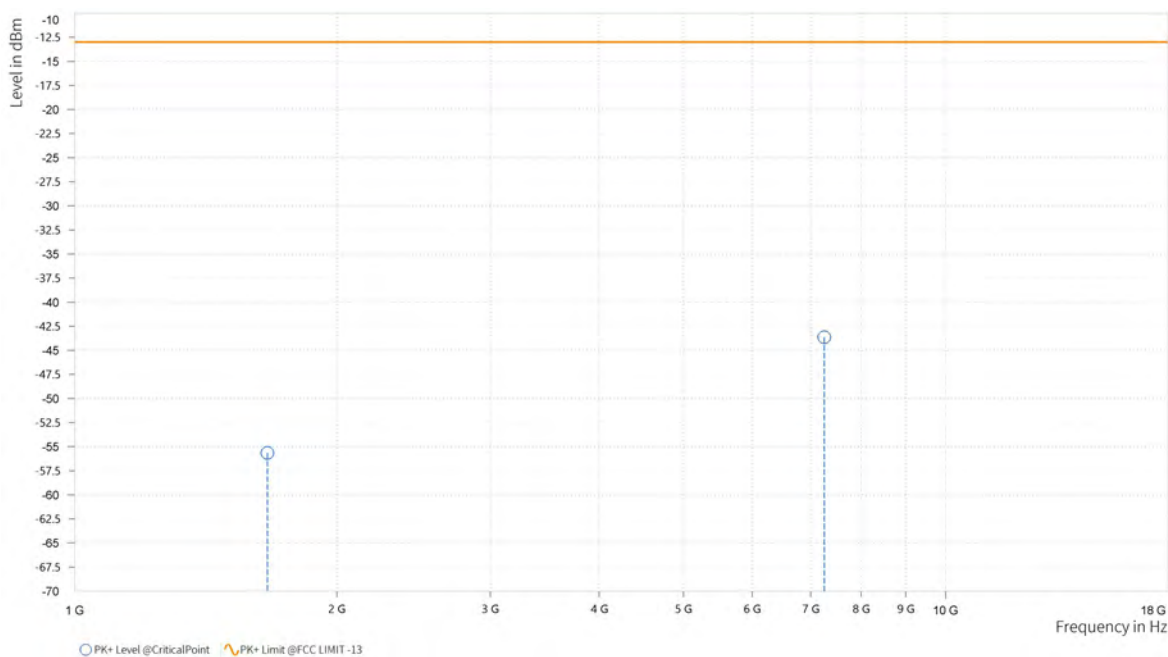


3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

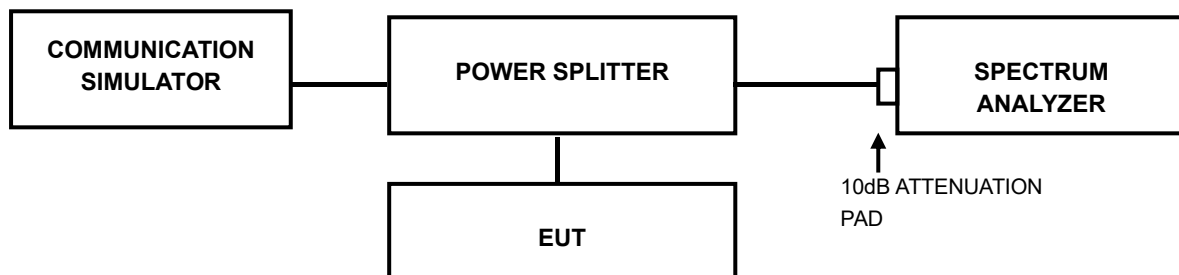

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

3.7.4 TEST RESULTS

Please Refer to Appendix Of this test report.



Test Report No.: W7L-P23010004-2RF01

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: W7L-P23010004-2RF01

5 INFORMATION ON THE TESTING LABORATORIES

We, Huarui 7layers High Technology (Suzhou) Co., Ltd. ,were founded in 2020 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Suzhou EMC/RF Lab:

Tel: +86 (0557) 368 1008



Test Report No.: W7L-P23010004-2RF01

6 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



7 APPENDIX:

GSM850

PEAK-TO-AVERAGE RATIO(CCDF)


Test Result

Band	Channel	Result(dB)	Limit(dB)	Verdict
GSM850	128	0.12	13	PASS
GSM850	189	0.12	13	PASS
GSM850	251	0.17	13	PASS
EGPRS850	128	0.20	13	PASS
EGPRS850	189	0.12	13	PASS
EGPRS850	251	0.12	13	PASS



Test Report No.: W7L-P23010004-2RF01

Test Graphs

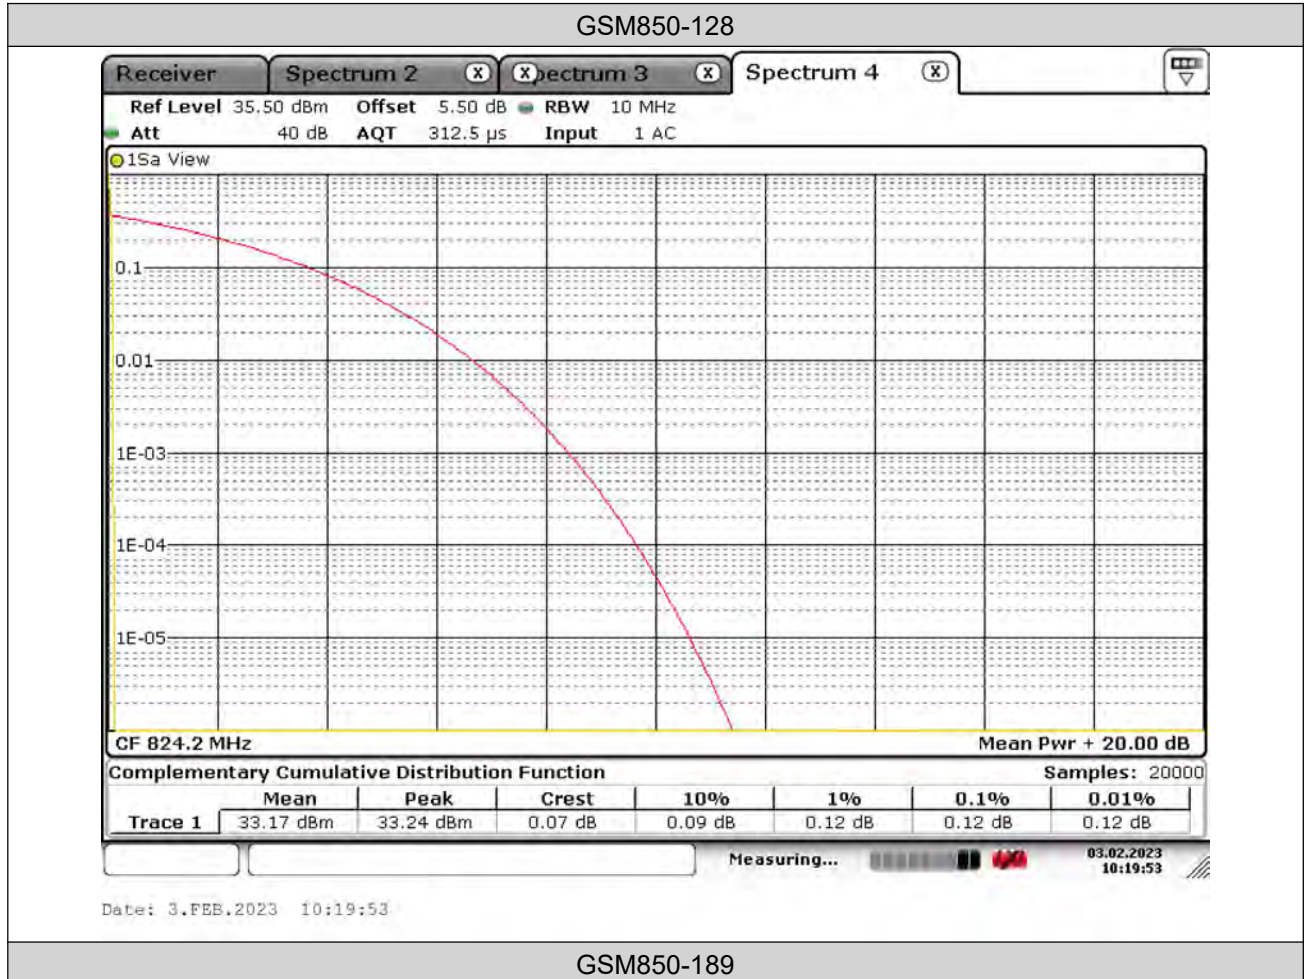



BUREAU VERITAS

Test Report No.: W7L-P23010004-2RF01




Date: 3.FEB.2023 10:28:50

GSM850-251



BUREAU VERITAS

Test Report No.: W7L-P23010004-2RF01

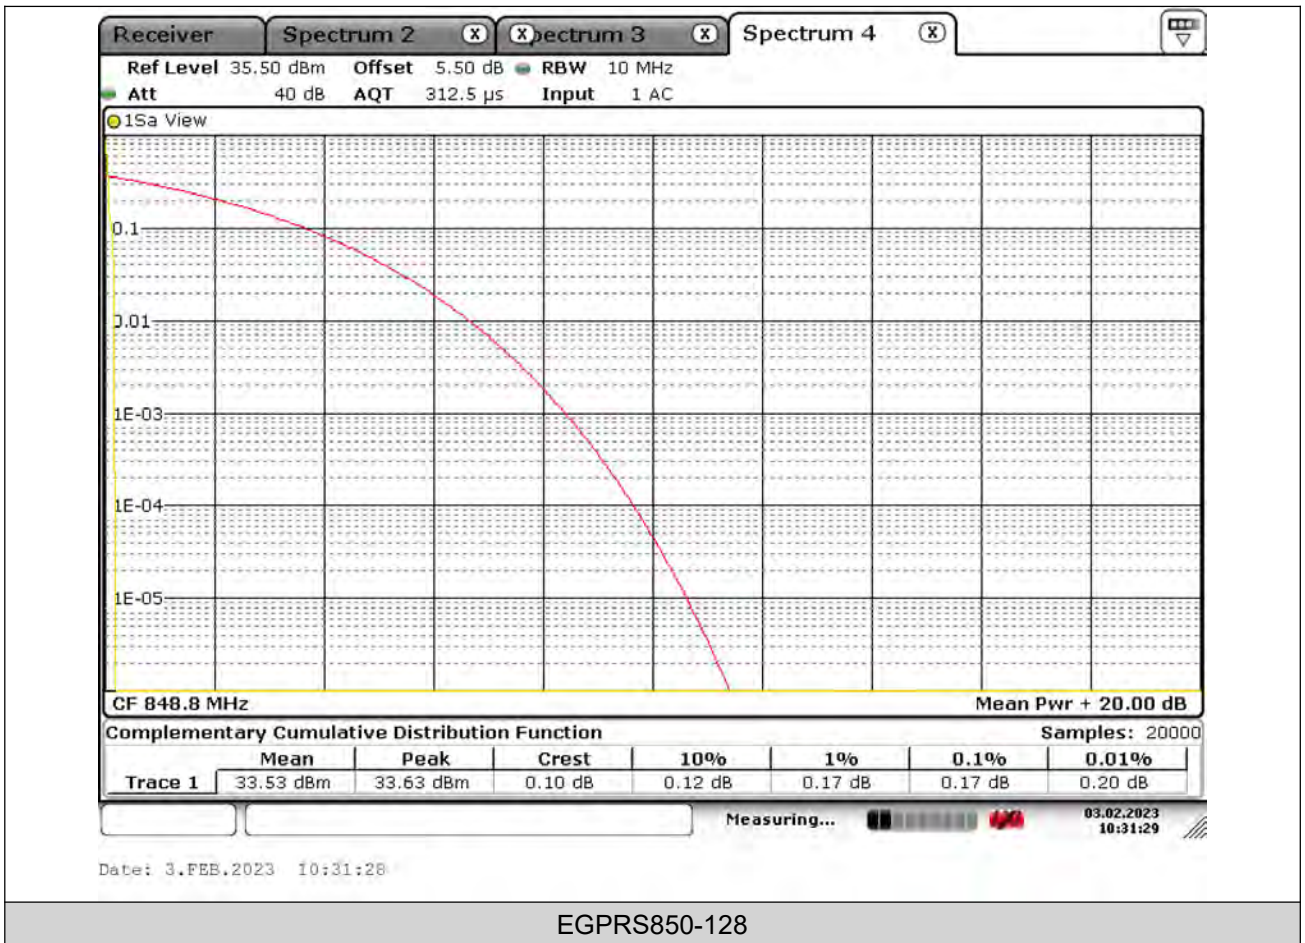



BUREAU VERITAS

Test Report No.: W7L-P23010004-2RF01



Date: 3.FEB.2023 10:40:08

EGPRS850-189



BUREAU VERITAS

Test Report No.: W7L-P23010004-2RF01




Date: 3.FEB.2023 10:37:51

EGPRS850-251



BUREAU VERITAS

Test Report No.: W7L-P23010004-2RF01

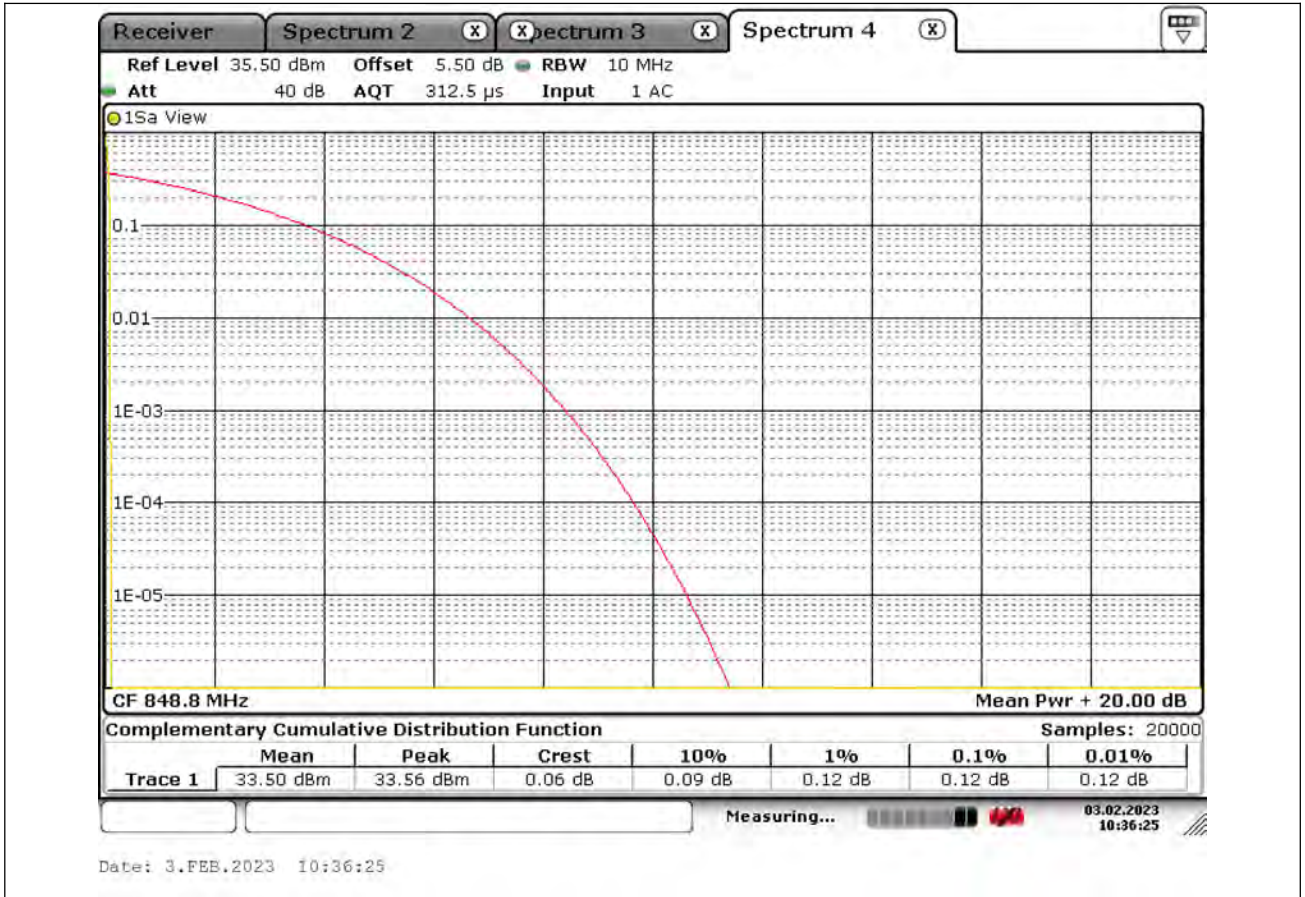



26DB BANDWIDTH AND OCCUPIED BANDWIDTH


Test Result

Band	Channel	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	Verdict
GSM850	128	0.246	0.3155	---	PASS
GSM850	189	0.243	0.314	---	PASS
GSM850	251	0.242	0.3155	---	PASS
EGPRS850	128	0.243	0.3126	---	PASS
EGPRS850	189	0.245	0.314	---	PASS
EGPRS850	251	0.245	0.314	---	PASS



Test Graphs


26dB Bandwidth

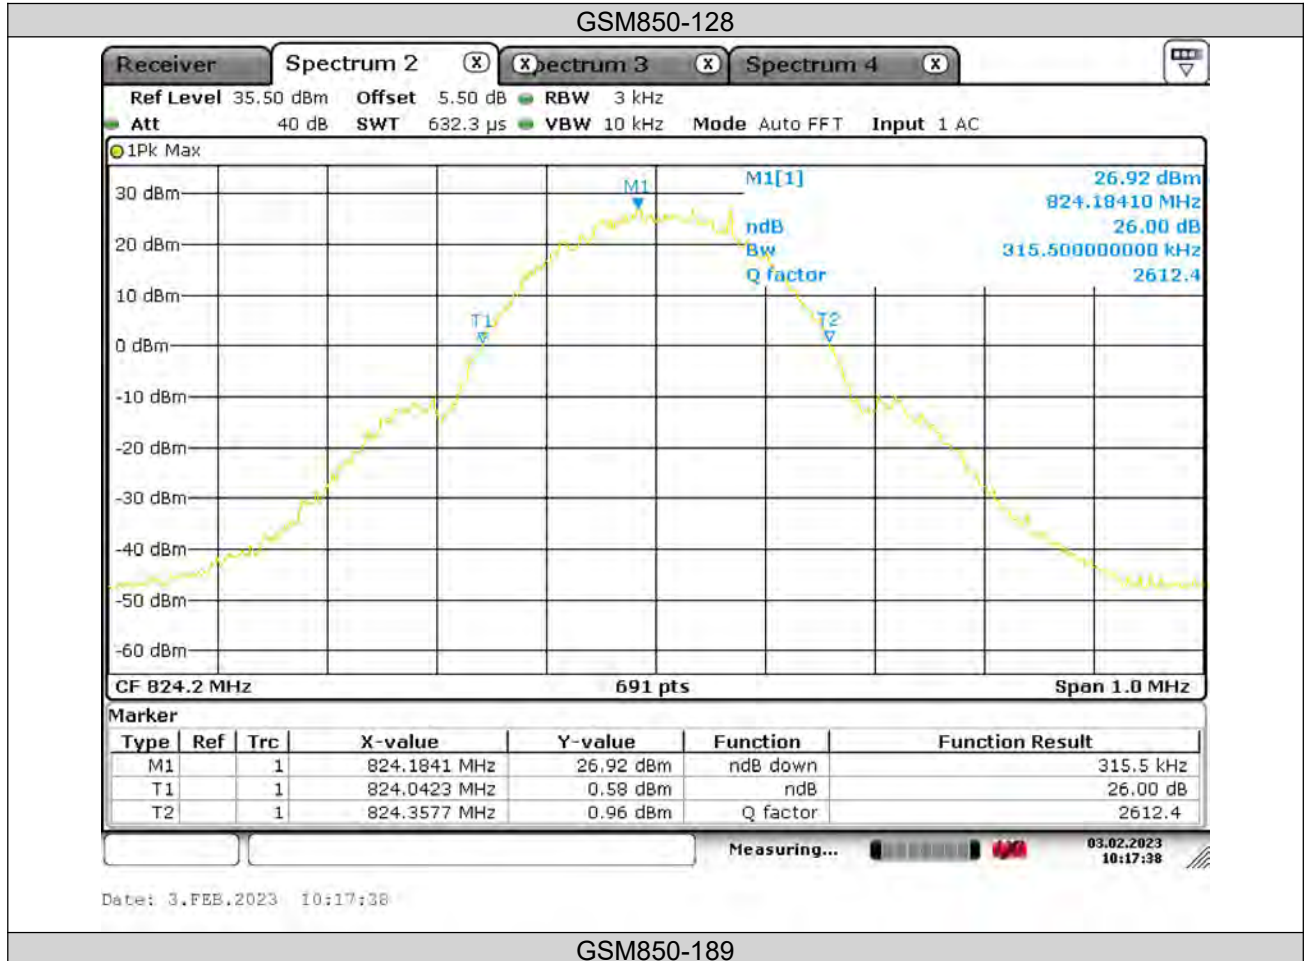



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

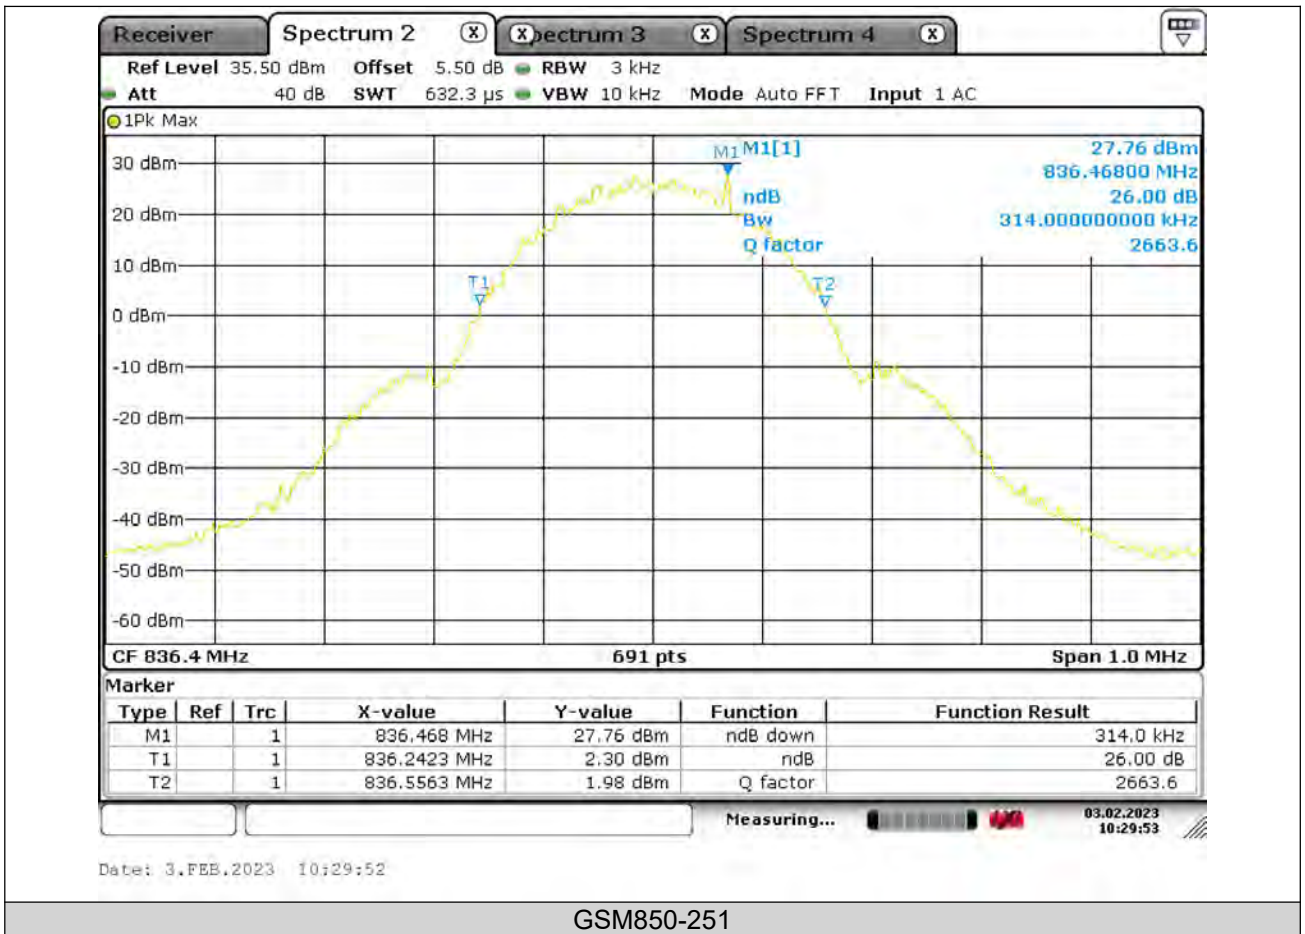



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

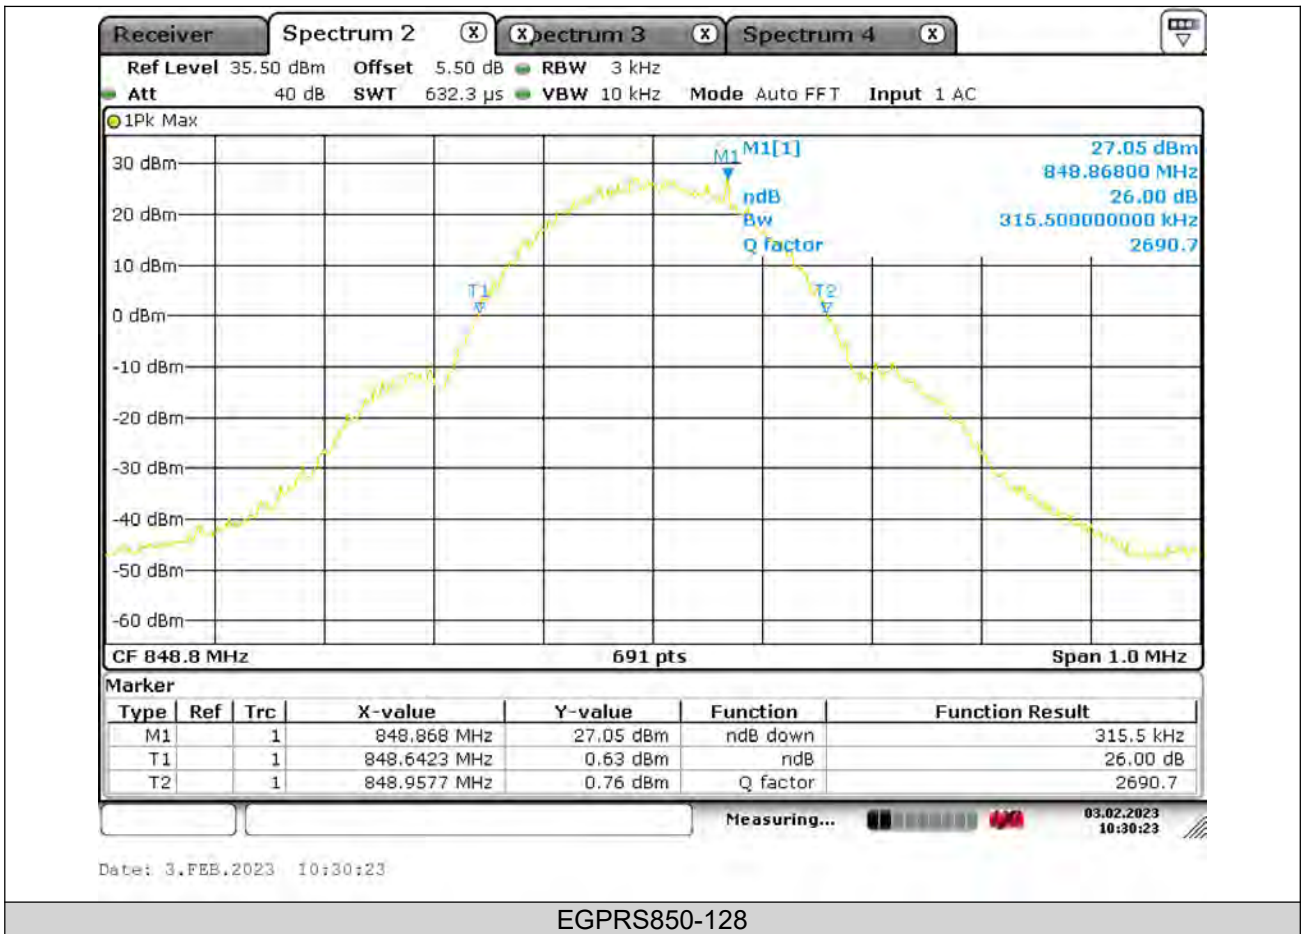



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

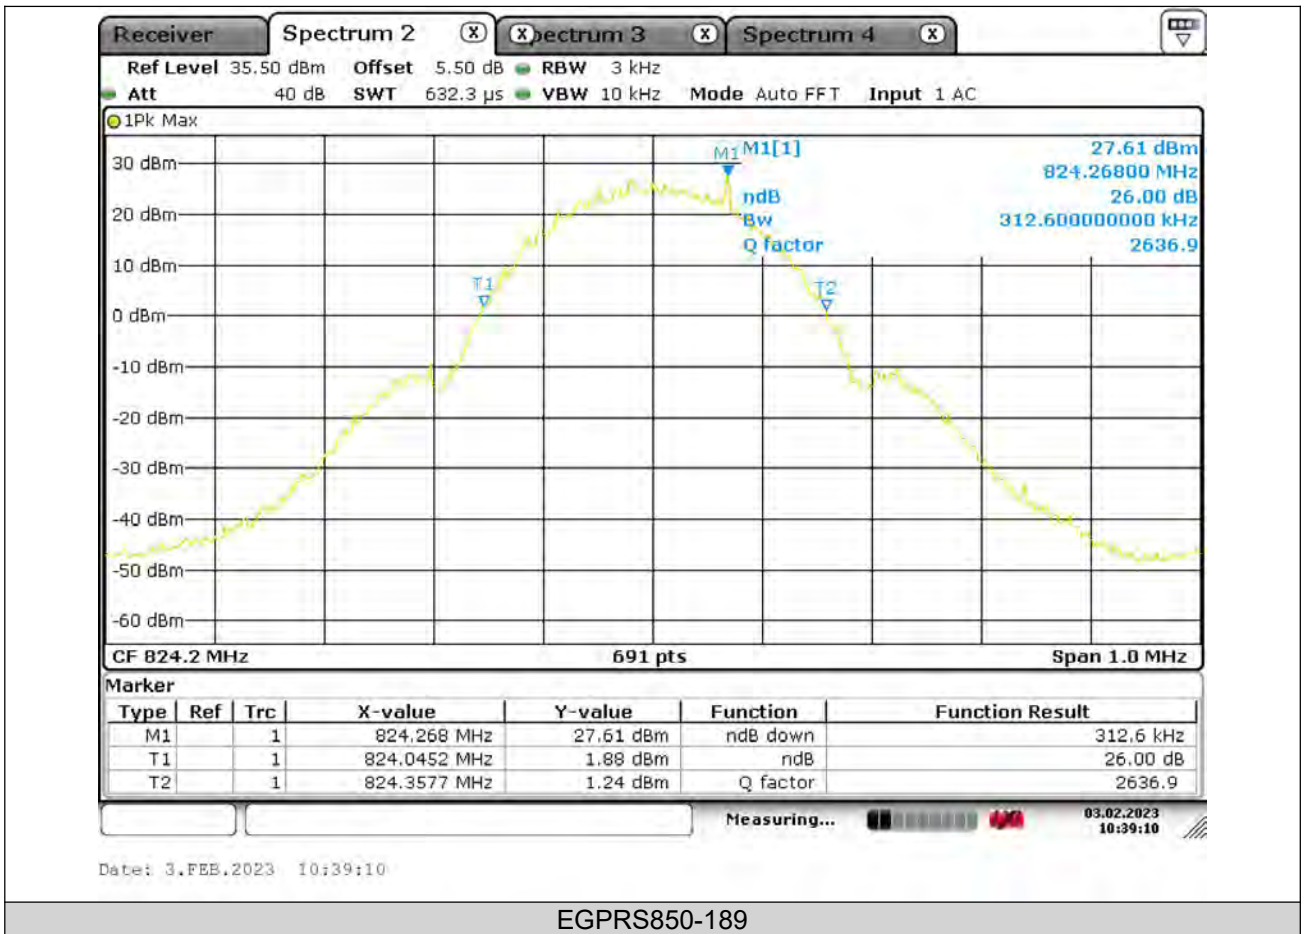



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

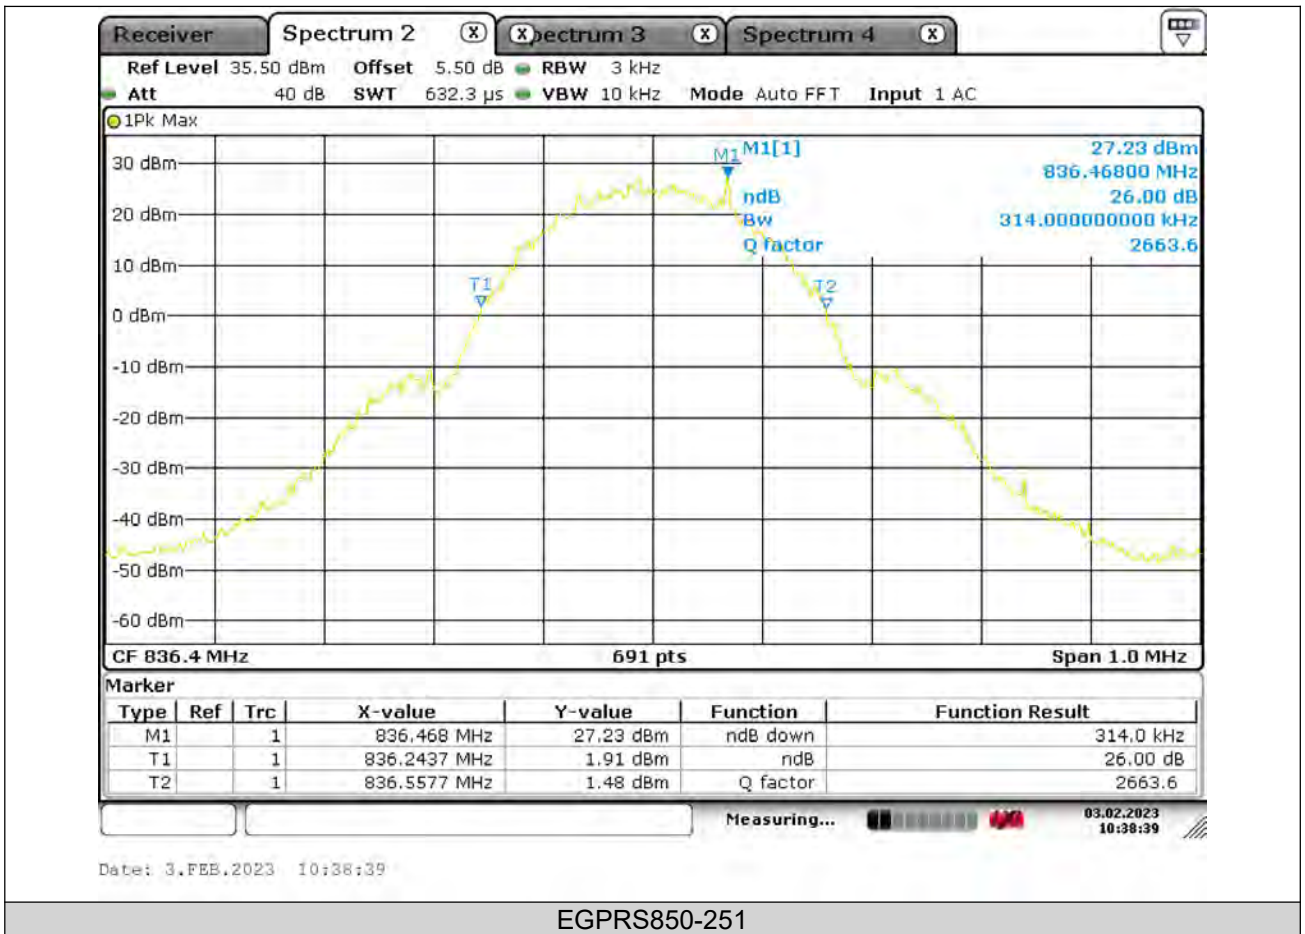



BUREAU
VERITAS

Test Report No.: W7L-P23010004-2RF01

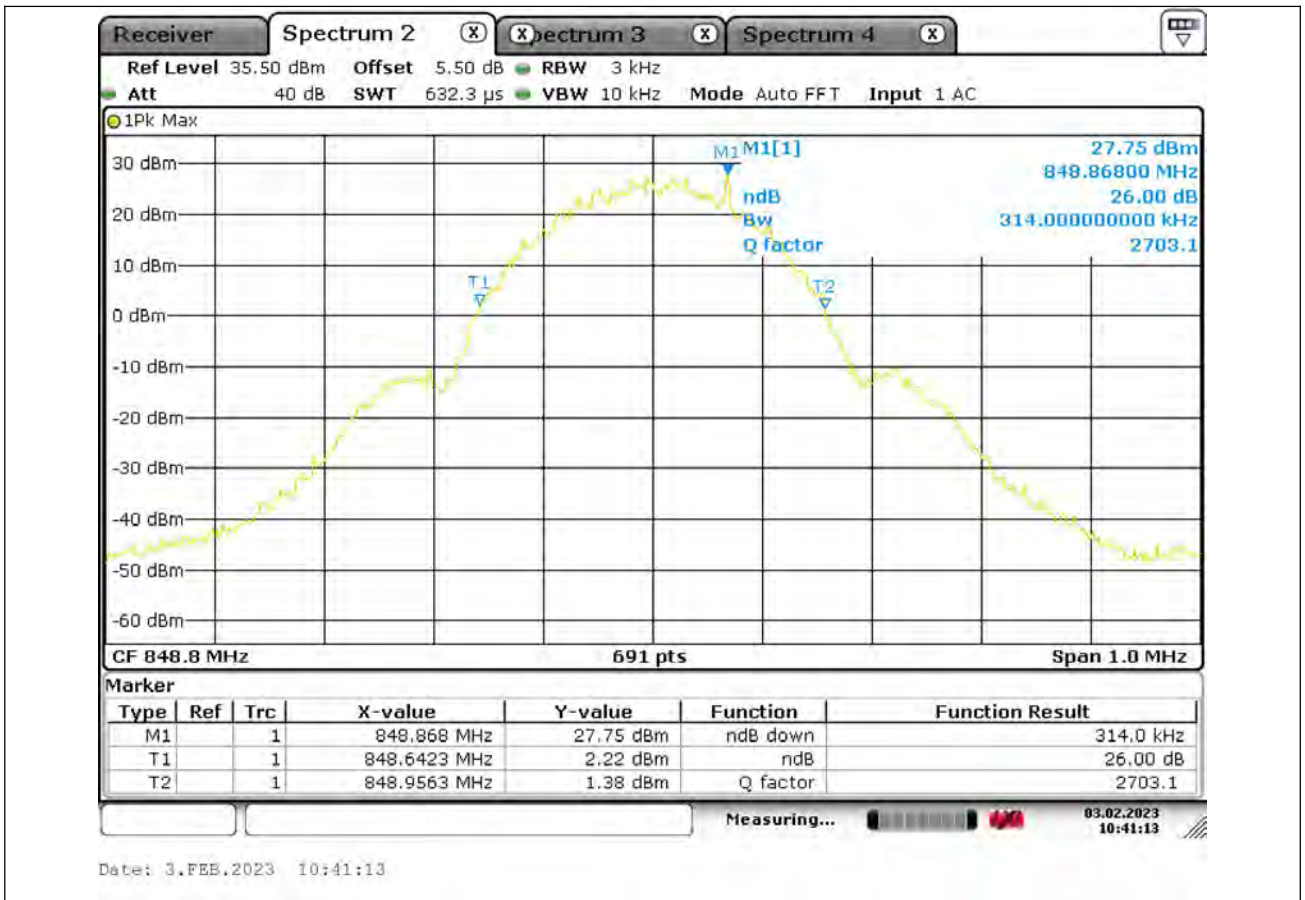


Occupied Bandwidth

GSM850-128



BUREAU
VERITAS

Test Report No.: W7L-P23010004-2RF01

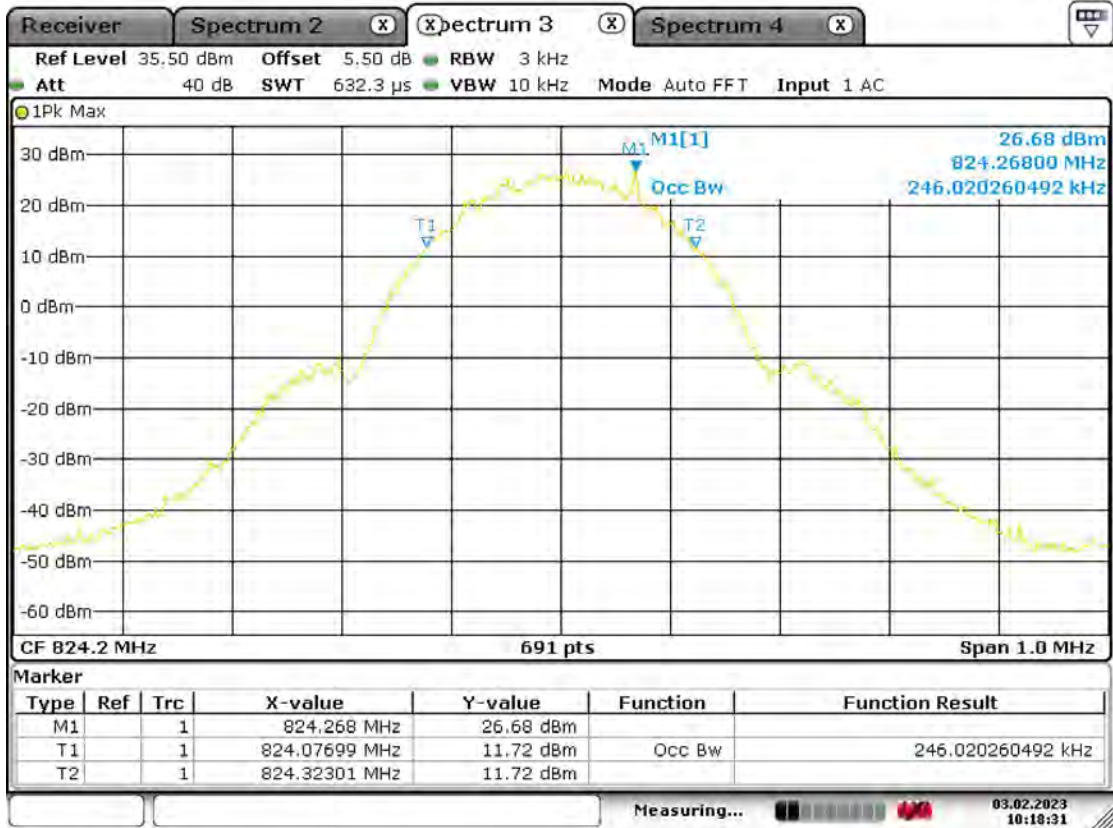


Date: 3.FEB.2023 10:18:31

GSM850-189



BUREAU VERITAS

Test Report No.: W7L-P23010004-2RF01

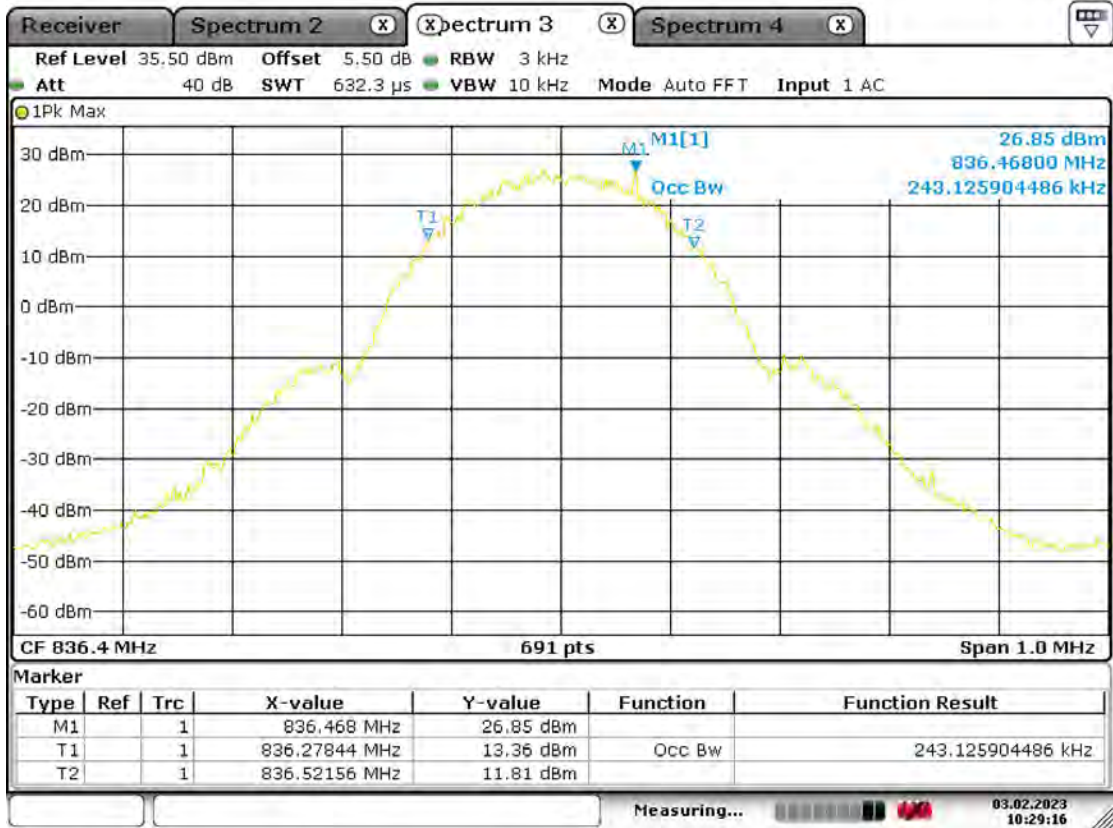


Date: 3.FEB.2023 10:29:16

GSM850-251



BUREAU
VERITAS

Test Report No.: W7L-P23010004-2RF01

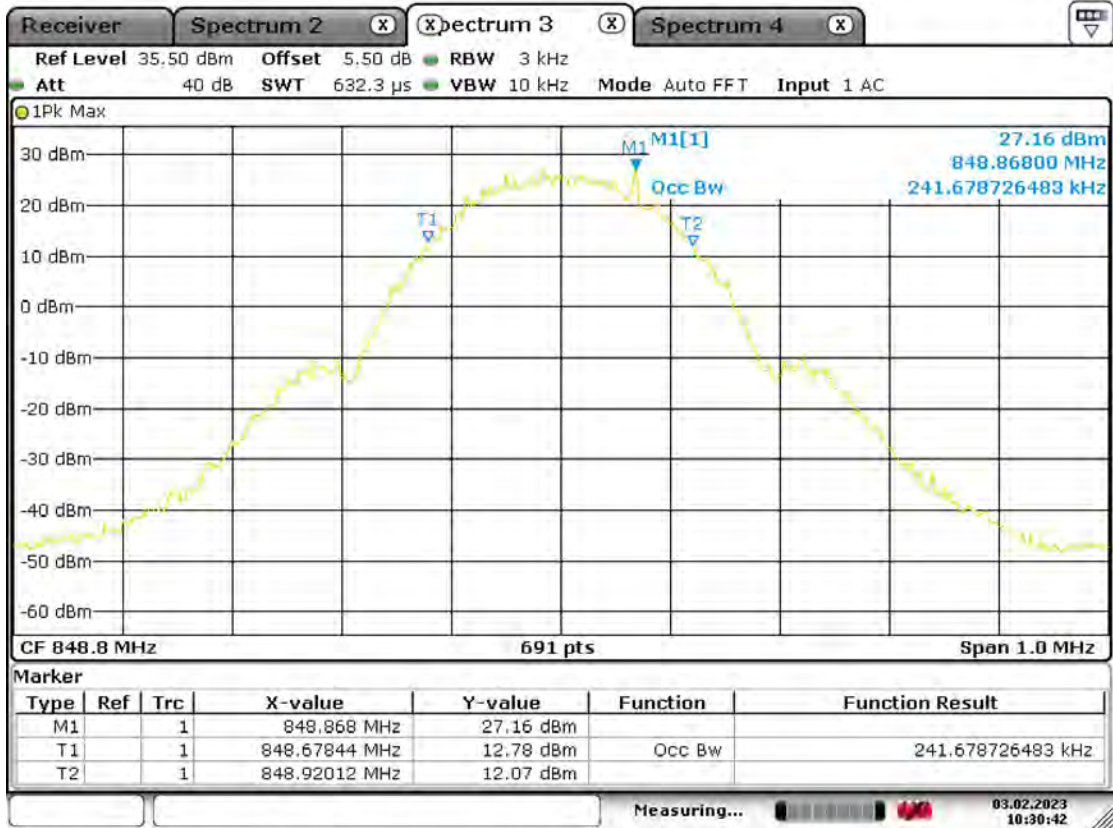


Date: 3.FEB.2023 10:30:42

EGPRS850-128



**BUREAU
VERITAS**


Test Report No.: W7L-P23010004-2RF01

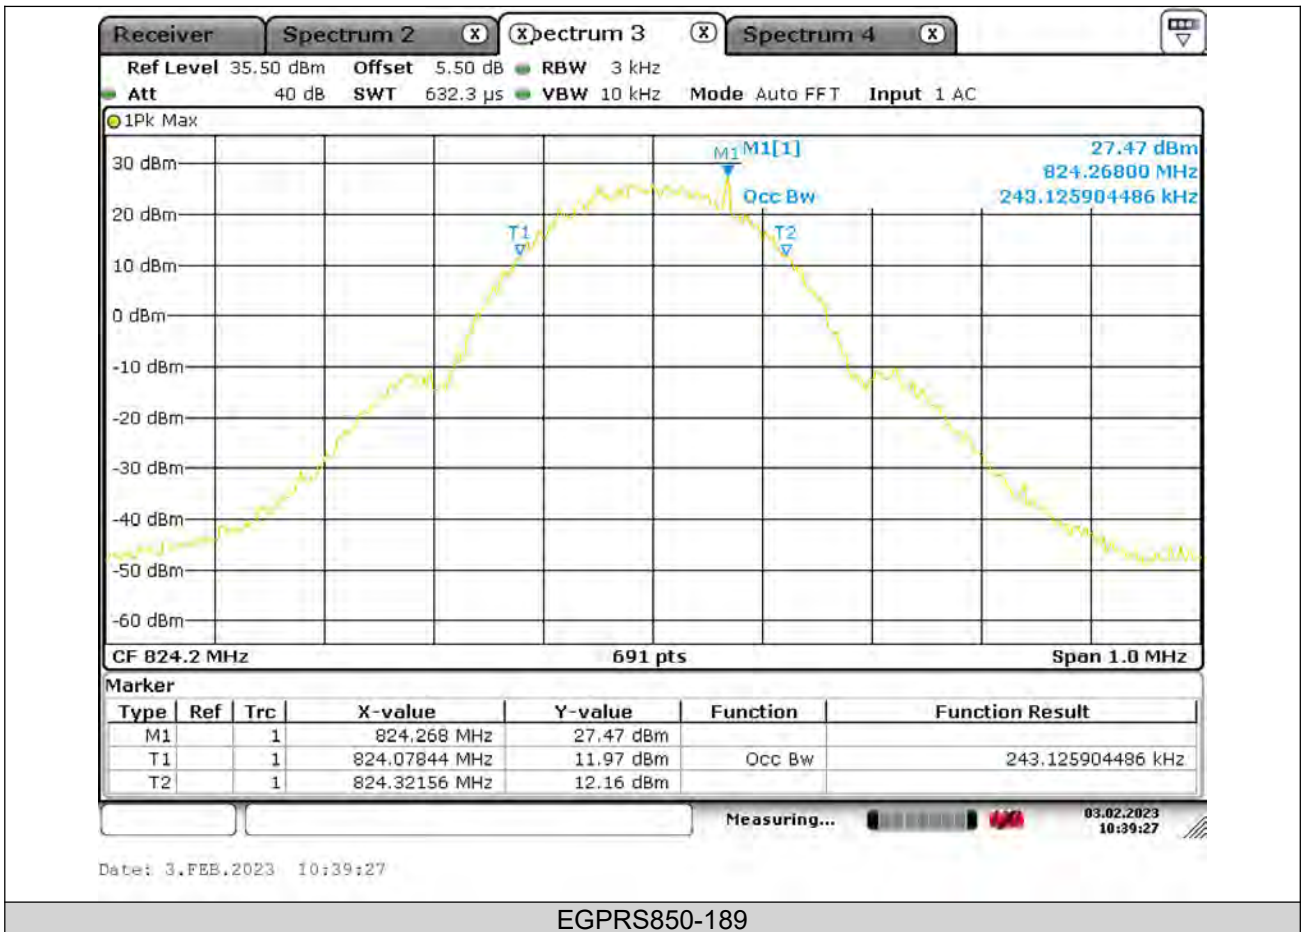



BUREAU VERITAS

Test Report No.: W7L-P23010004-2RF01

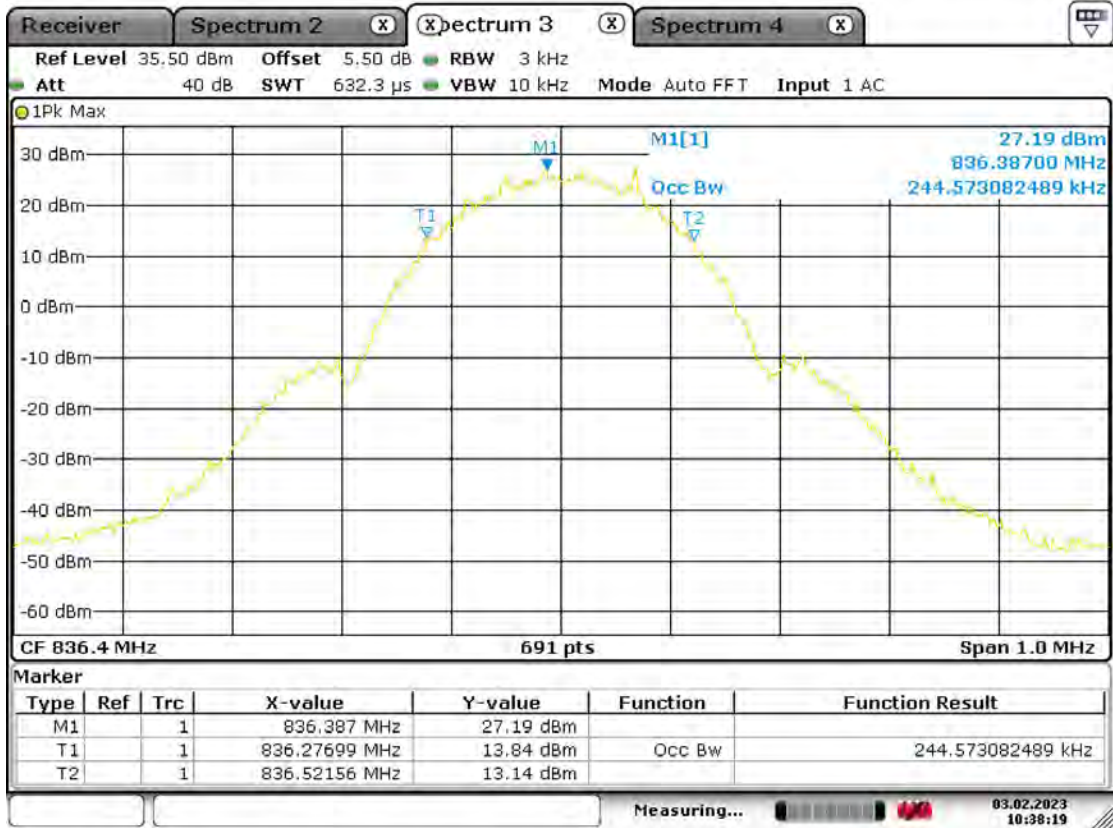


Date: 3.FEB.2023 10:38:19

EGPRS850-251



**BUREAU
VERITAS**

Test Report No.: W7L-P23010004-2RF01

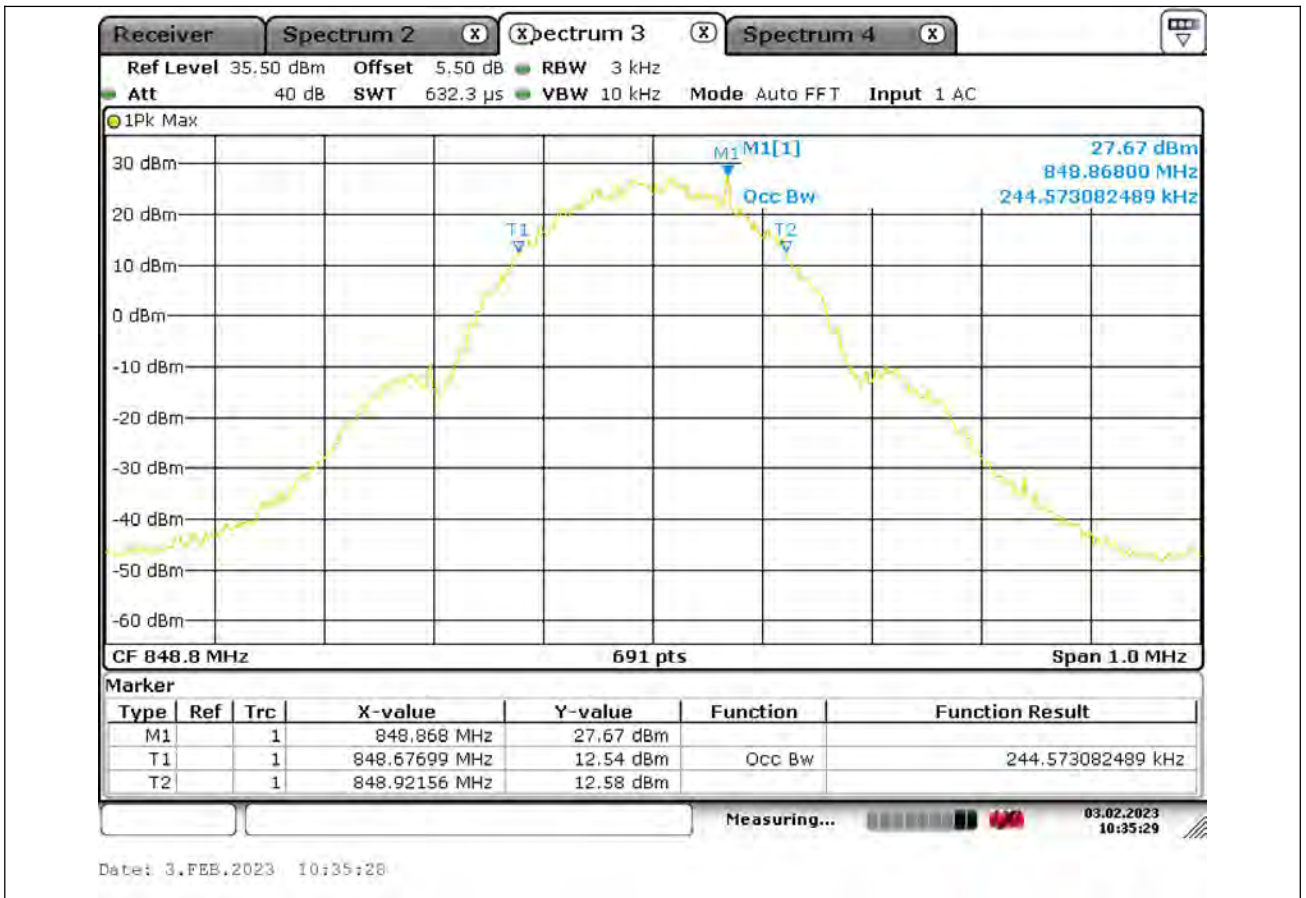



Test Report No.: W7L-P23010004-2RF01

BAND EDGE


Test Result

Band	Channel	Freq (MHz)	Result (dBm)	Limit(dBm)	Verdict
GSM850	128	823.97626	-23.38	-13	PASS
GSM850	251	849.02124	-21.42	-13	PASS
EGPRS850	128	823.97876	-23.46	-13	PASS
EGPRS850	251	849.01774	-22.14	-13	PASS



Test Report No.: W7L-P23010004-2RF01


Test Graphs

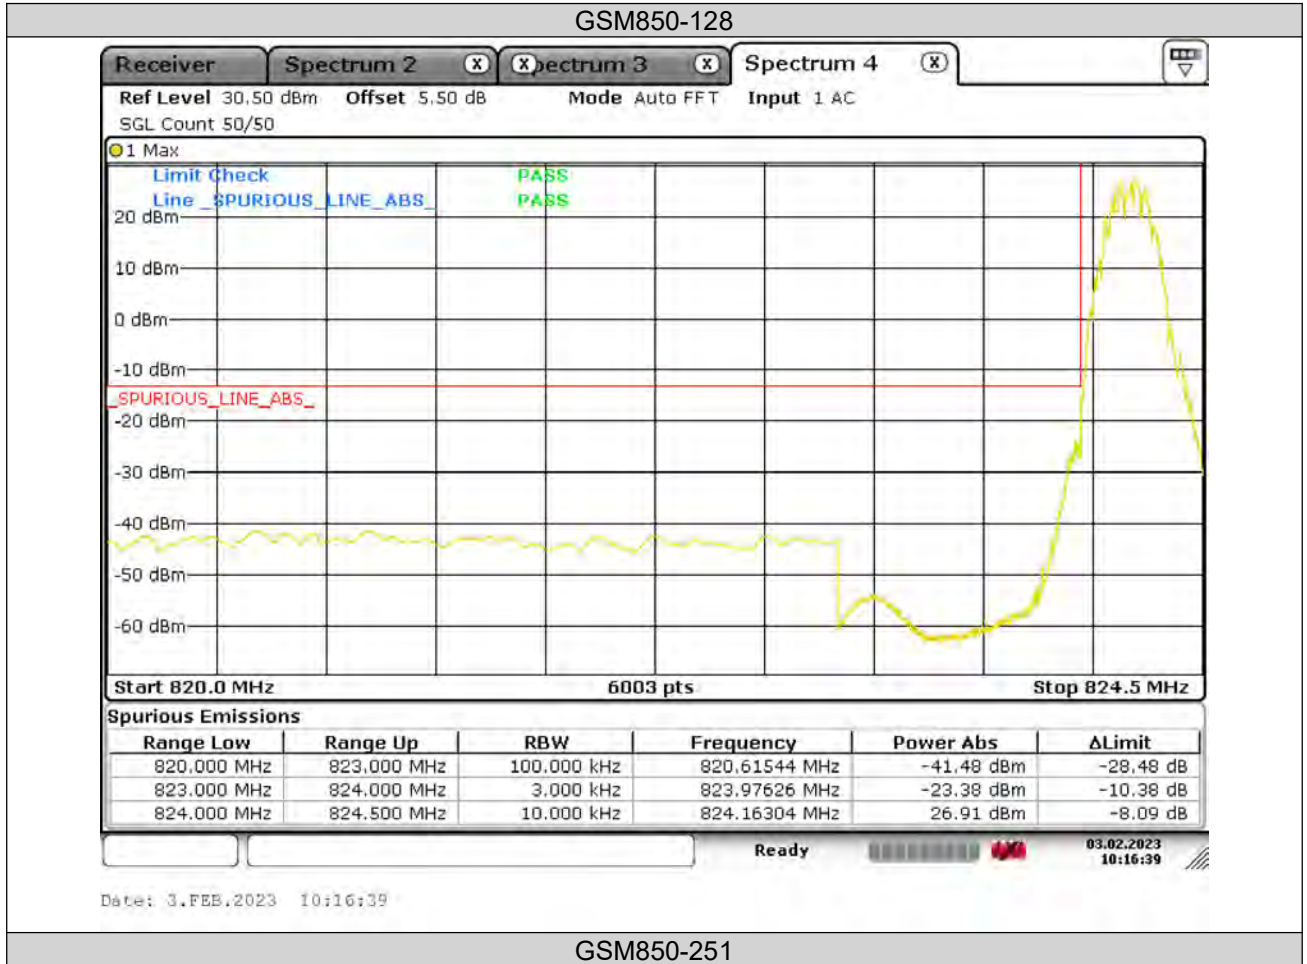



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

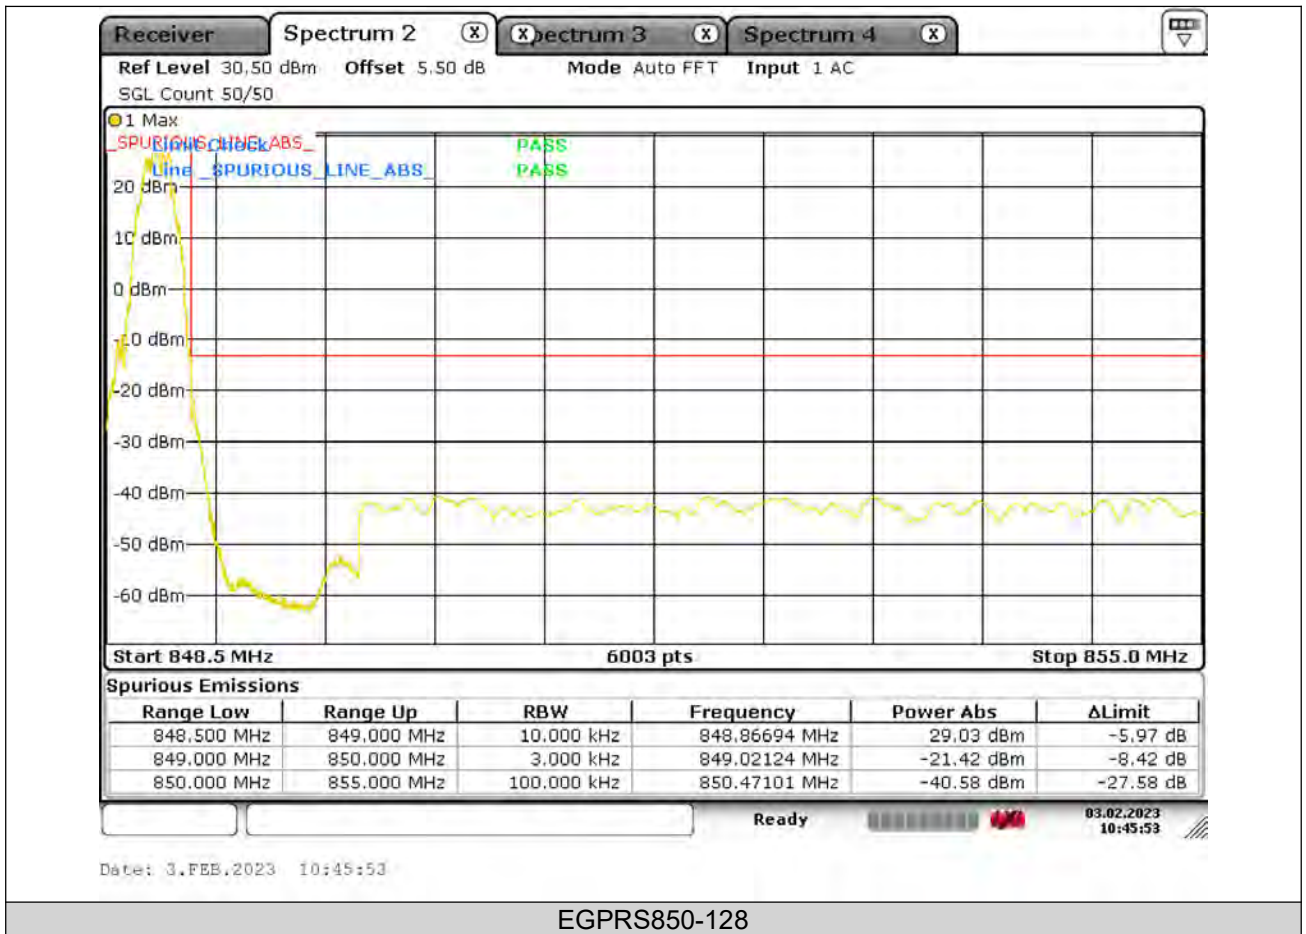



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

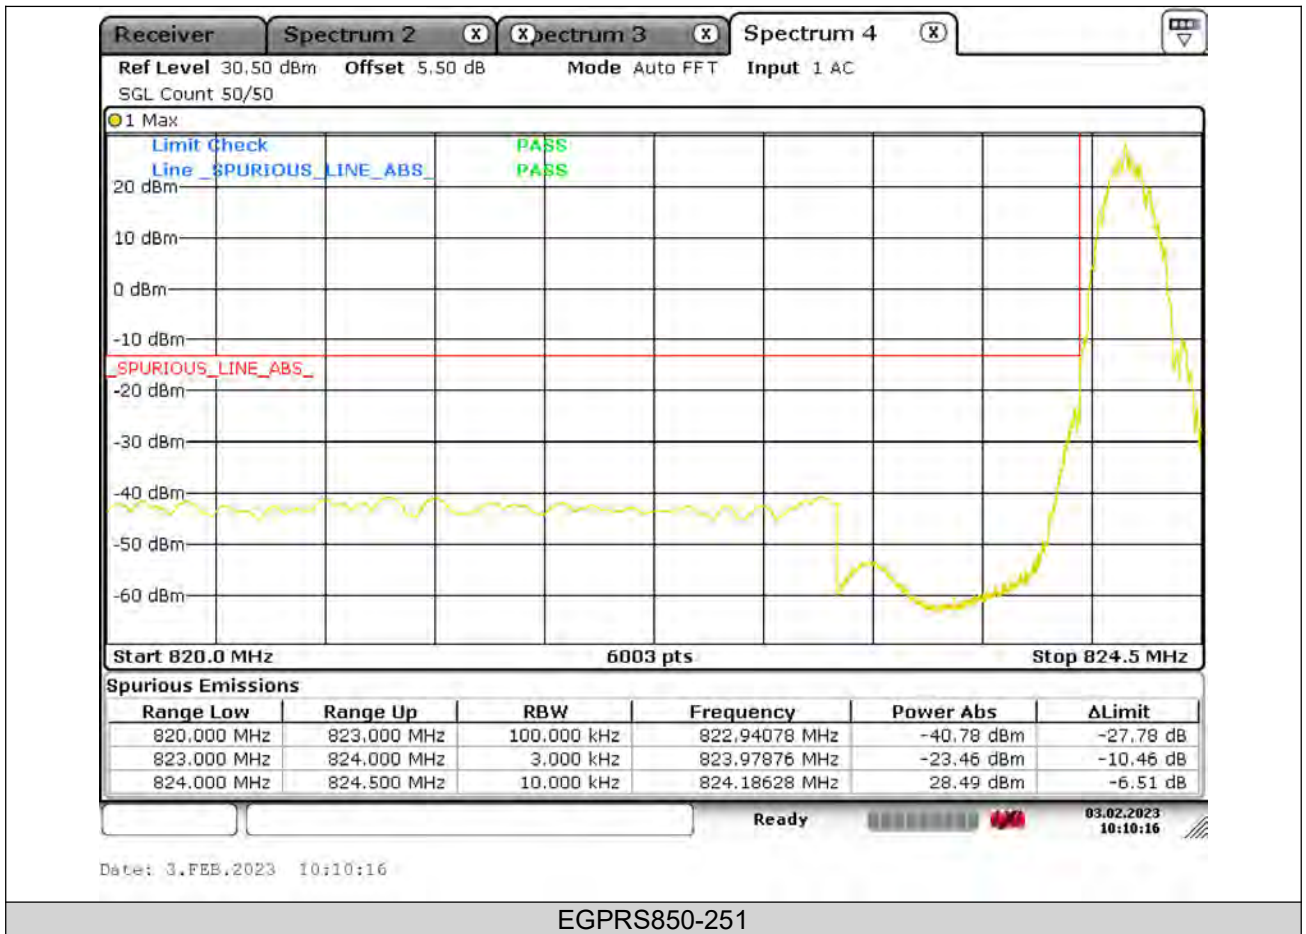



BUREAU
VERITAS

Test Report No.: W7L-P23010004-2RF01

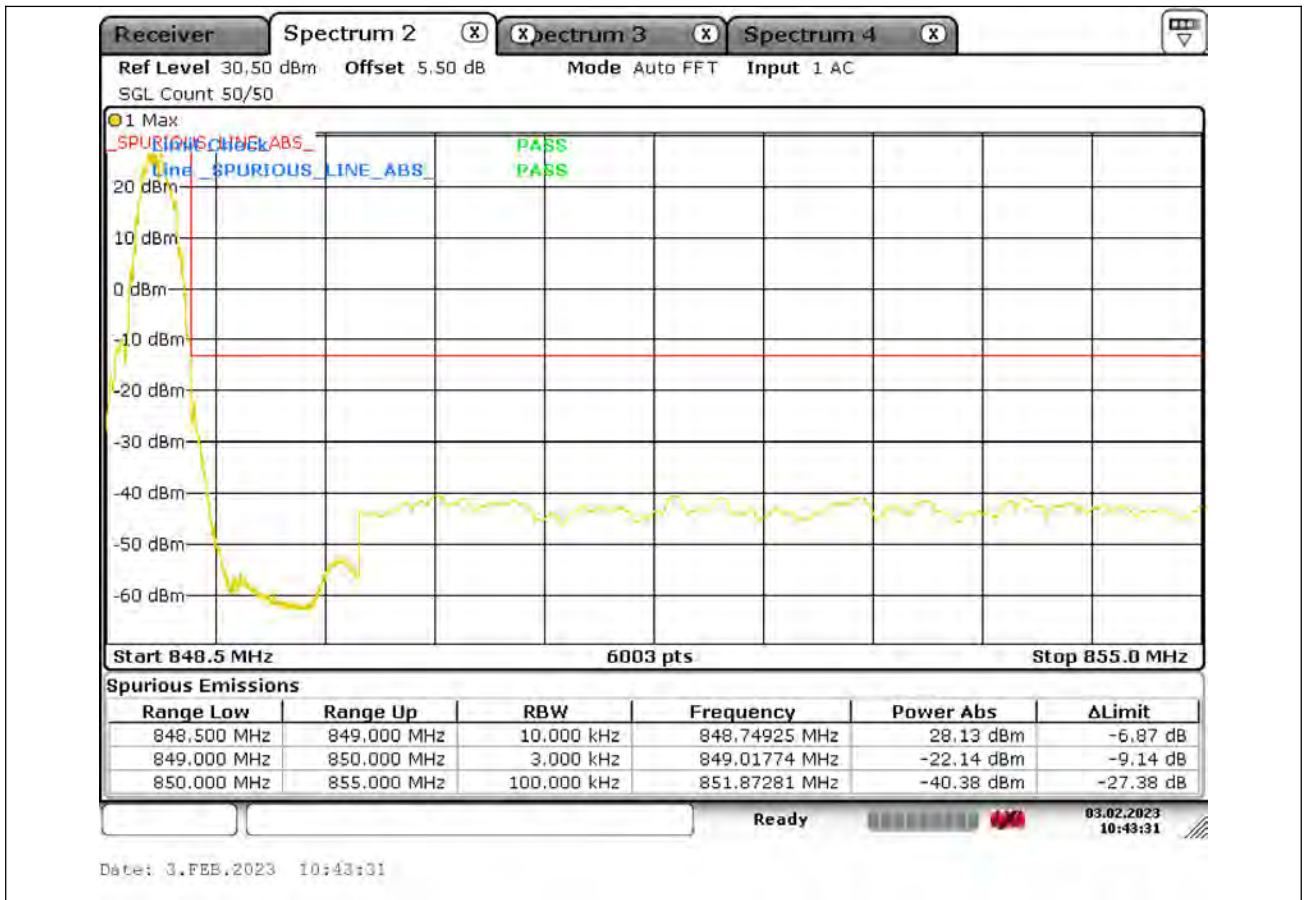



Test Report No.: W7L-P23010004-2RF01


CONDUCTED SPURIOUS EMISSION

Test Result

Band	Channel	Frequency Range(MHz)	Max.Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GSM850	128	30~1000MHz	640.16742	-42.51	-13	PASS
GSM850	128	1000~9000MHz	6084.99	-25.16	-13	PASS
GSM850	189	30~1000MHz	736.89405	-43.01	-13	PASS
GSM850	189	1000~9000MHz	6550.95	-25.58	-13	PASS
GSM850	251	30~1000MHz	749.92254	-42.76	-13	PASS
GSM850	251	1000~9000MHz	6890.43	-25.48	-13	PASS
EGPRS850	128	30~1000MHz	445.92454	-42.50	-13	PASS
EGPRS850	128	1000~9000MHz	7872.84	-26.30	-13	PASS
EGPRS850	189	30~1000MHz	636.21939	-43.05	-13	PASS
EGPRS850	189	1000~9000MHz	6912.92	-25.84	-13	PASS
EGPRS850	251	30~1000MHz	643.32584	-42.13	-13	PASS
EGPRS850	251	1000~9000MHz	6890.43	-25.74	-13	PASS




Test Graphs

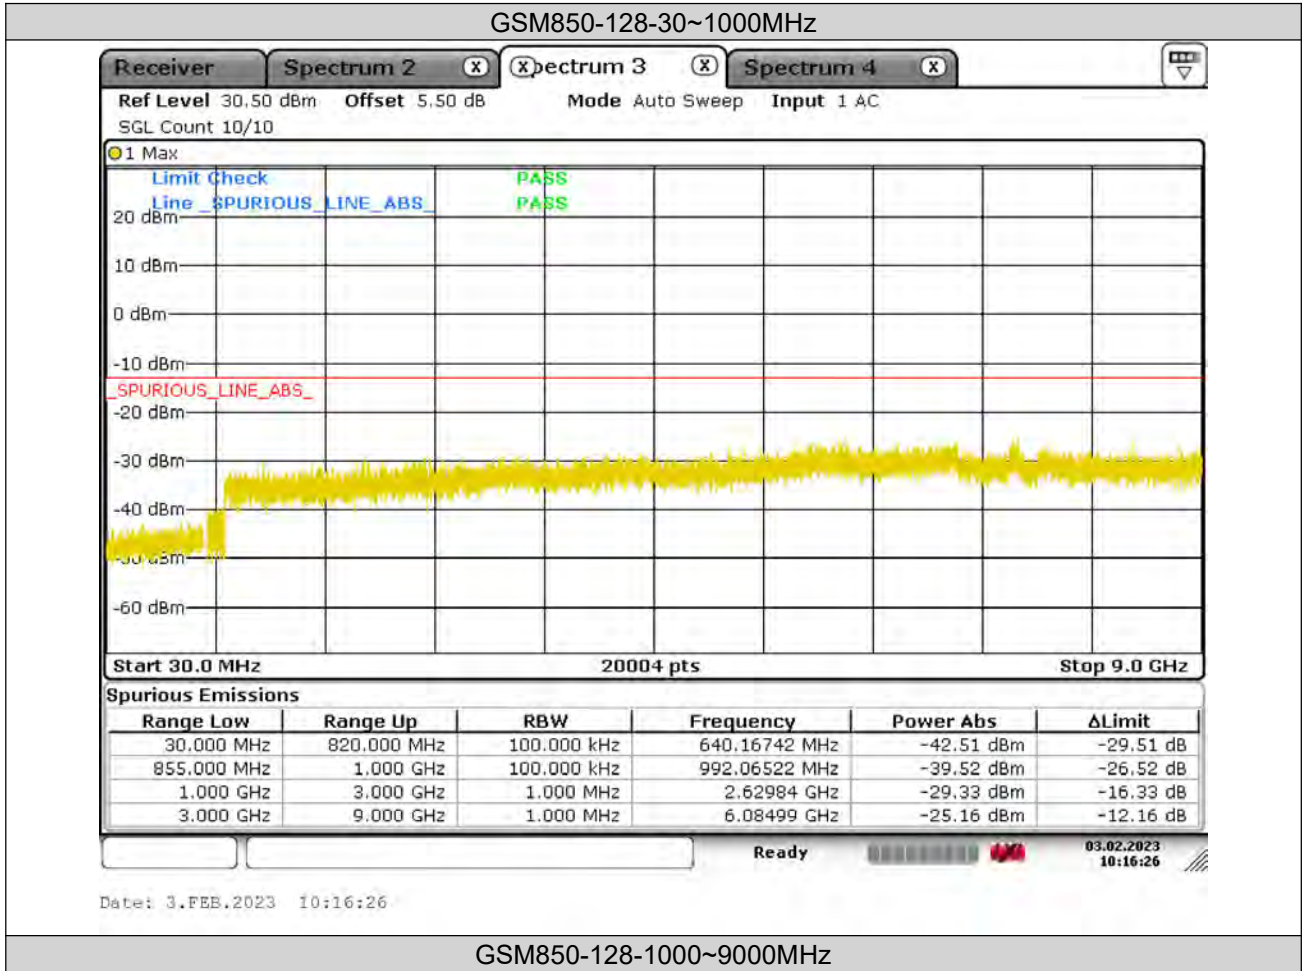



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

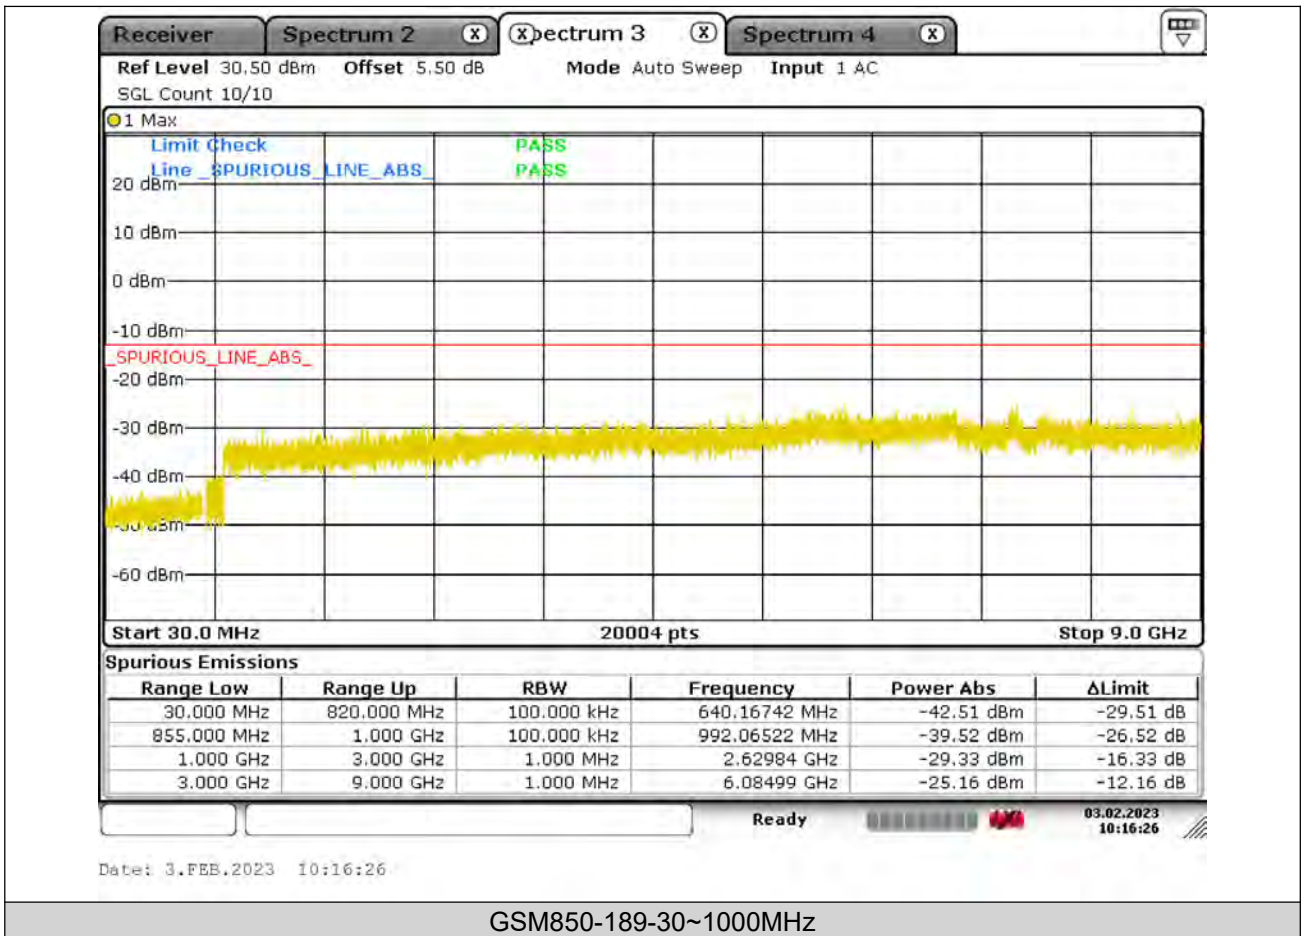



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

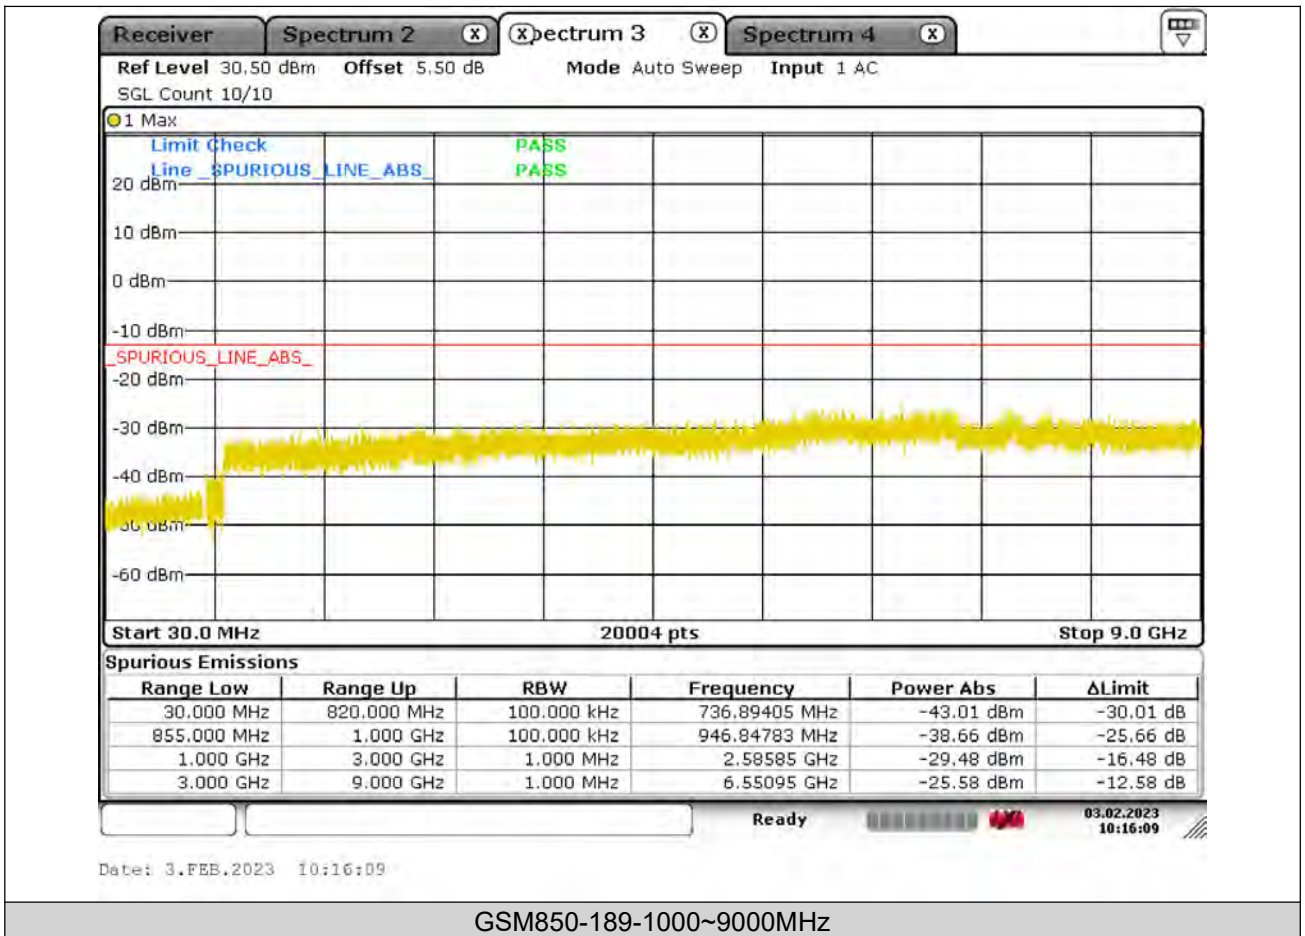



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

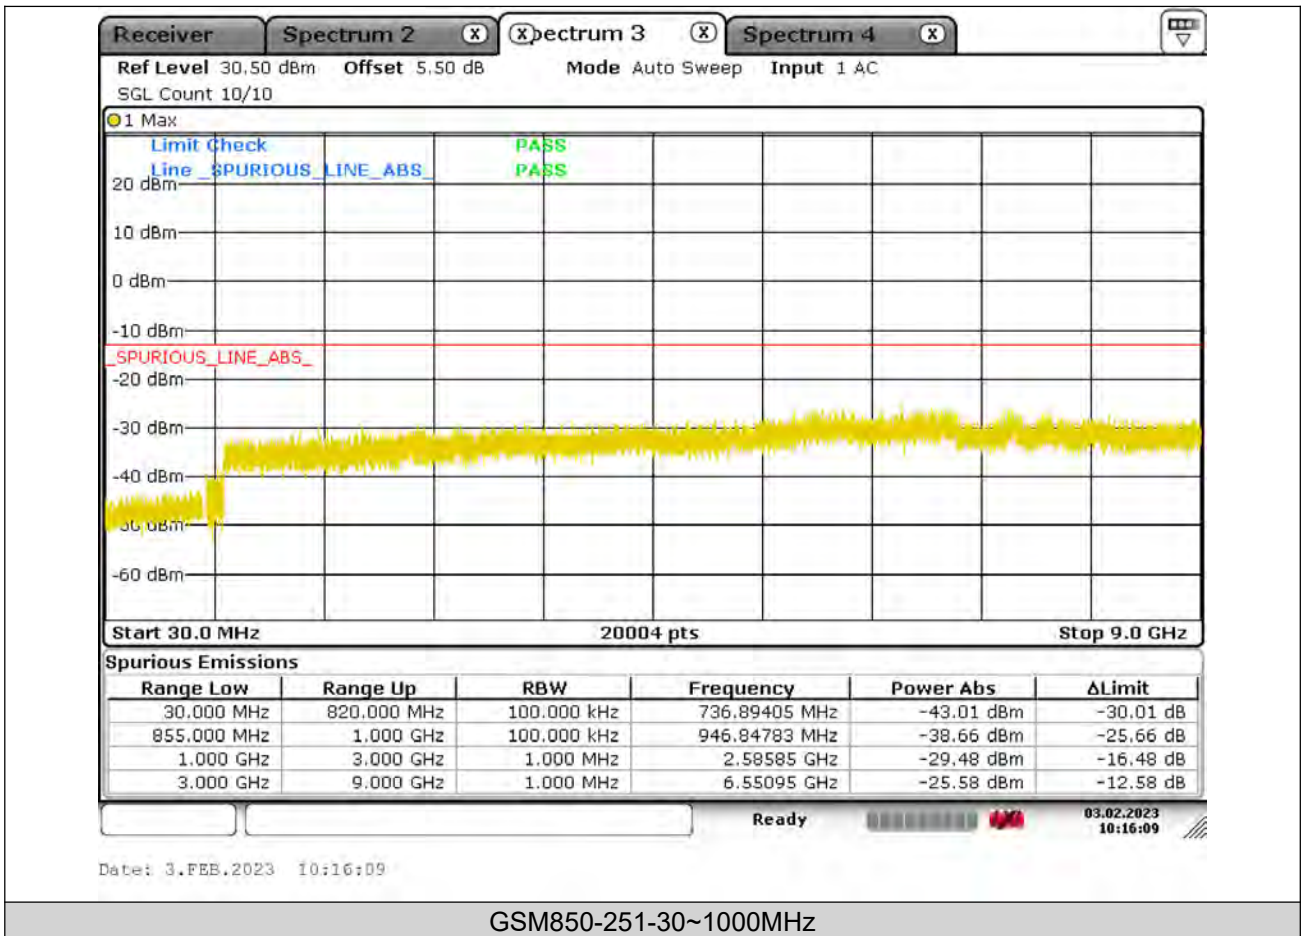



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

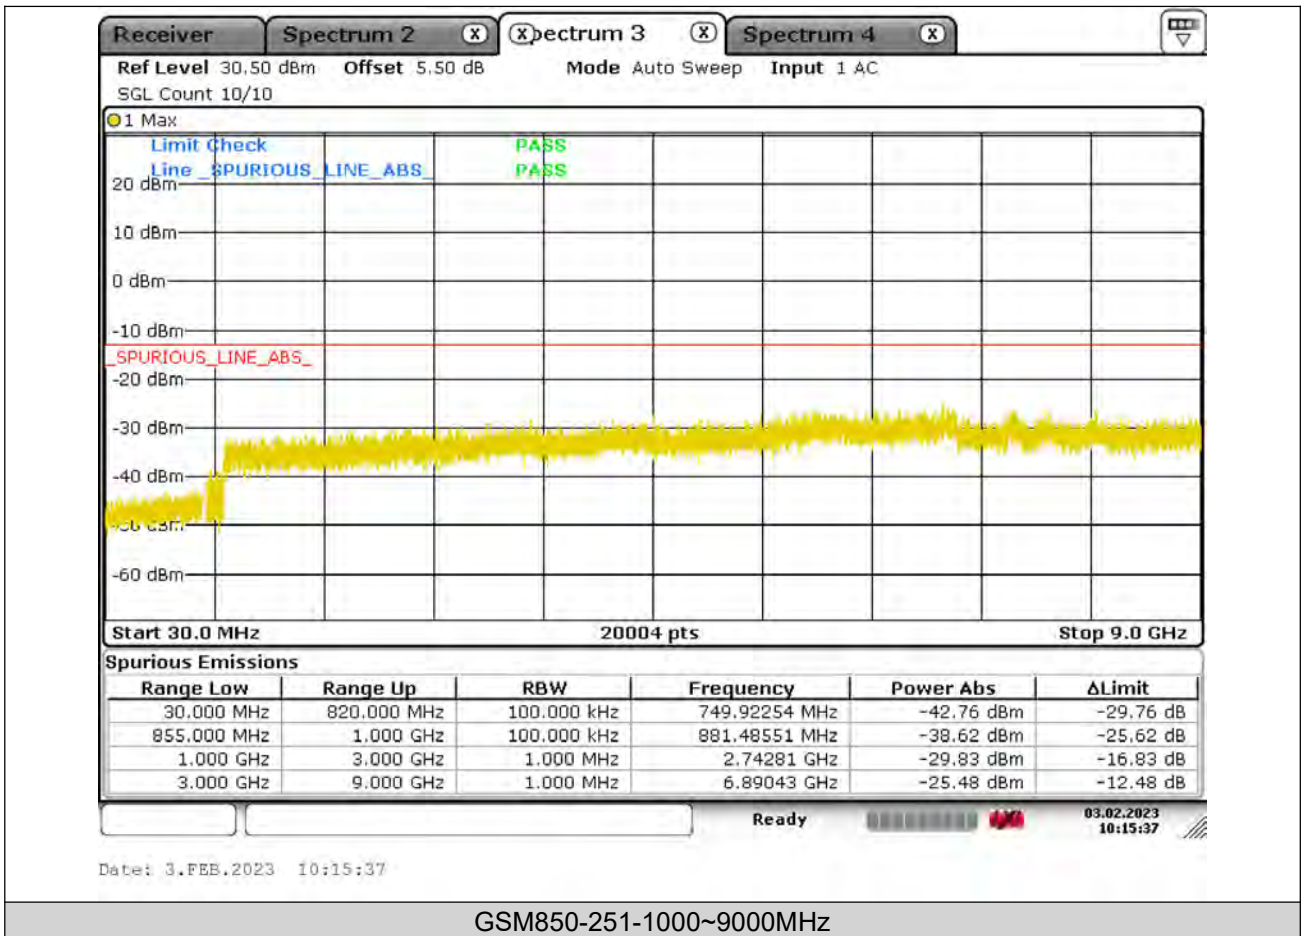



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

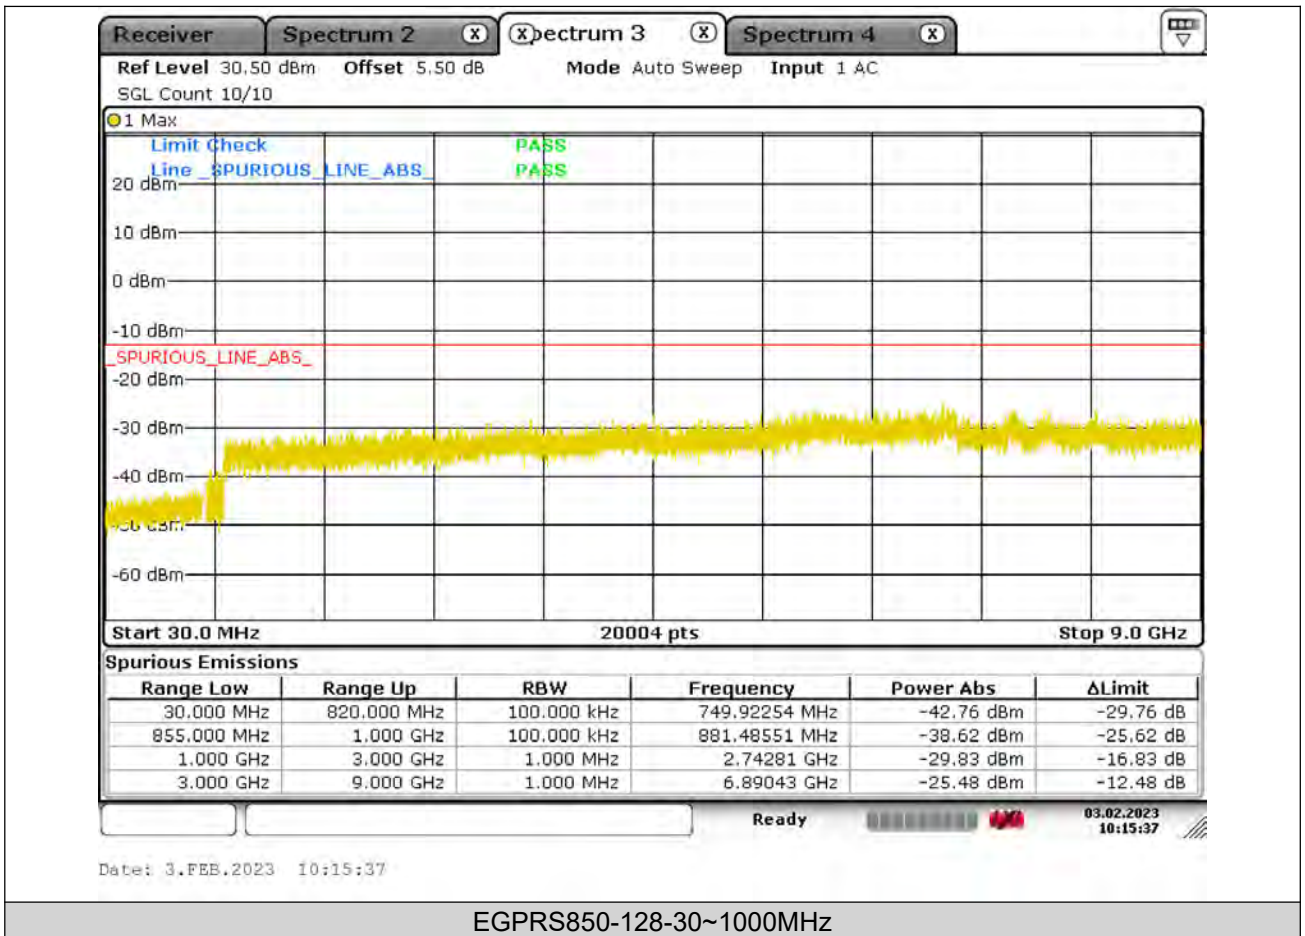



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

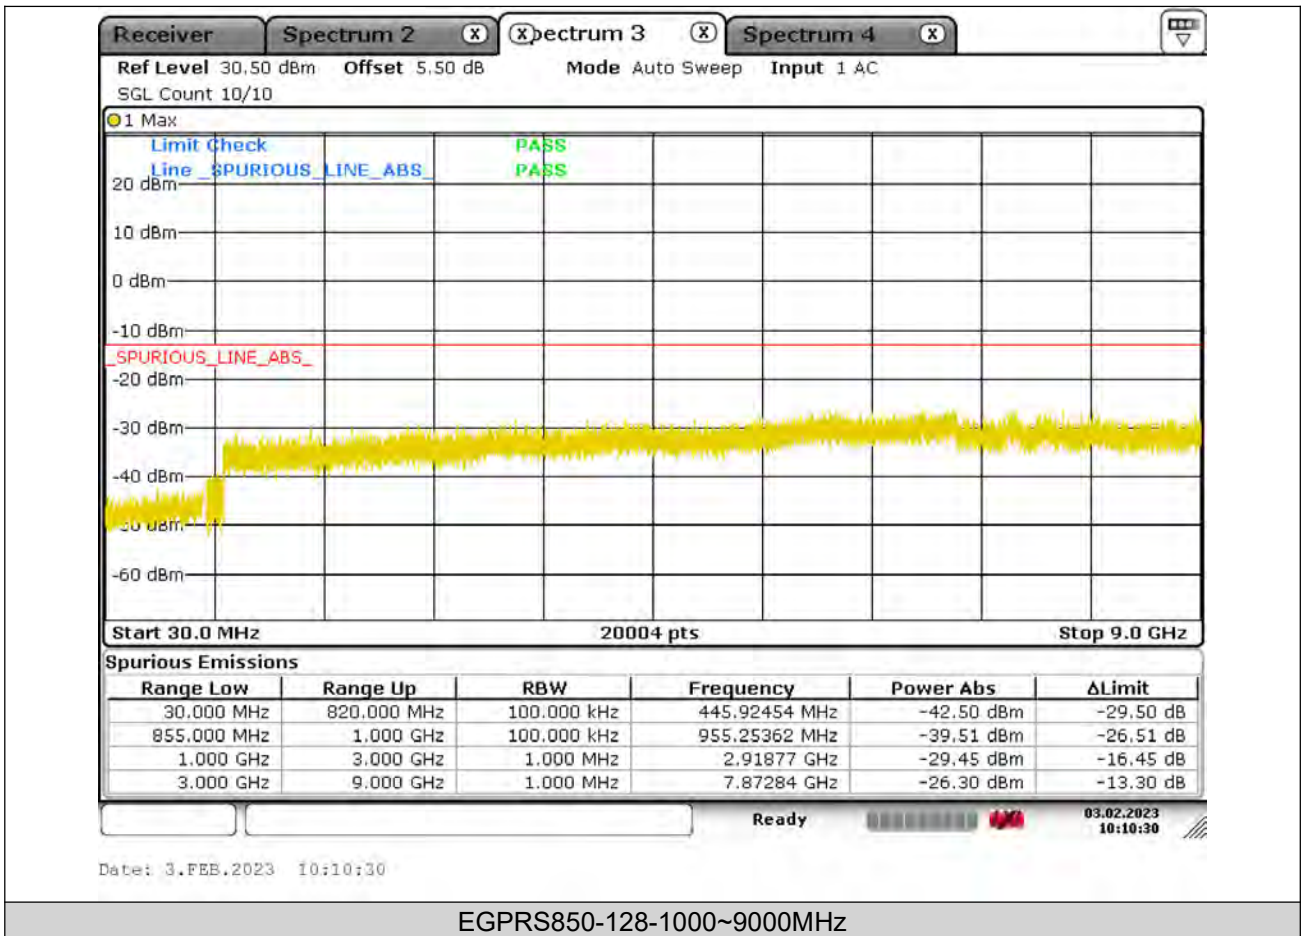



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

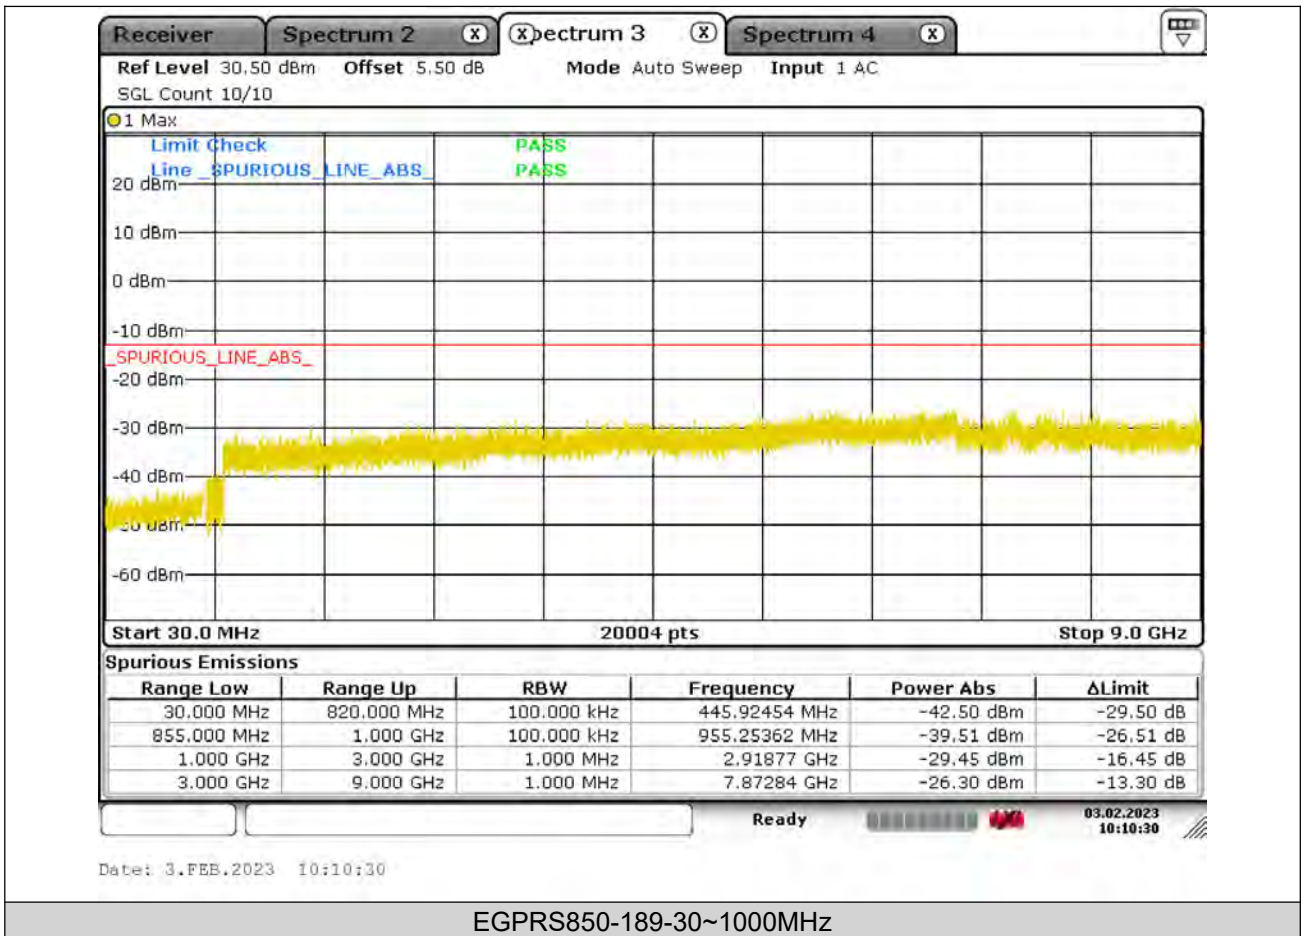



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

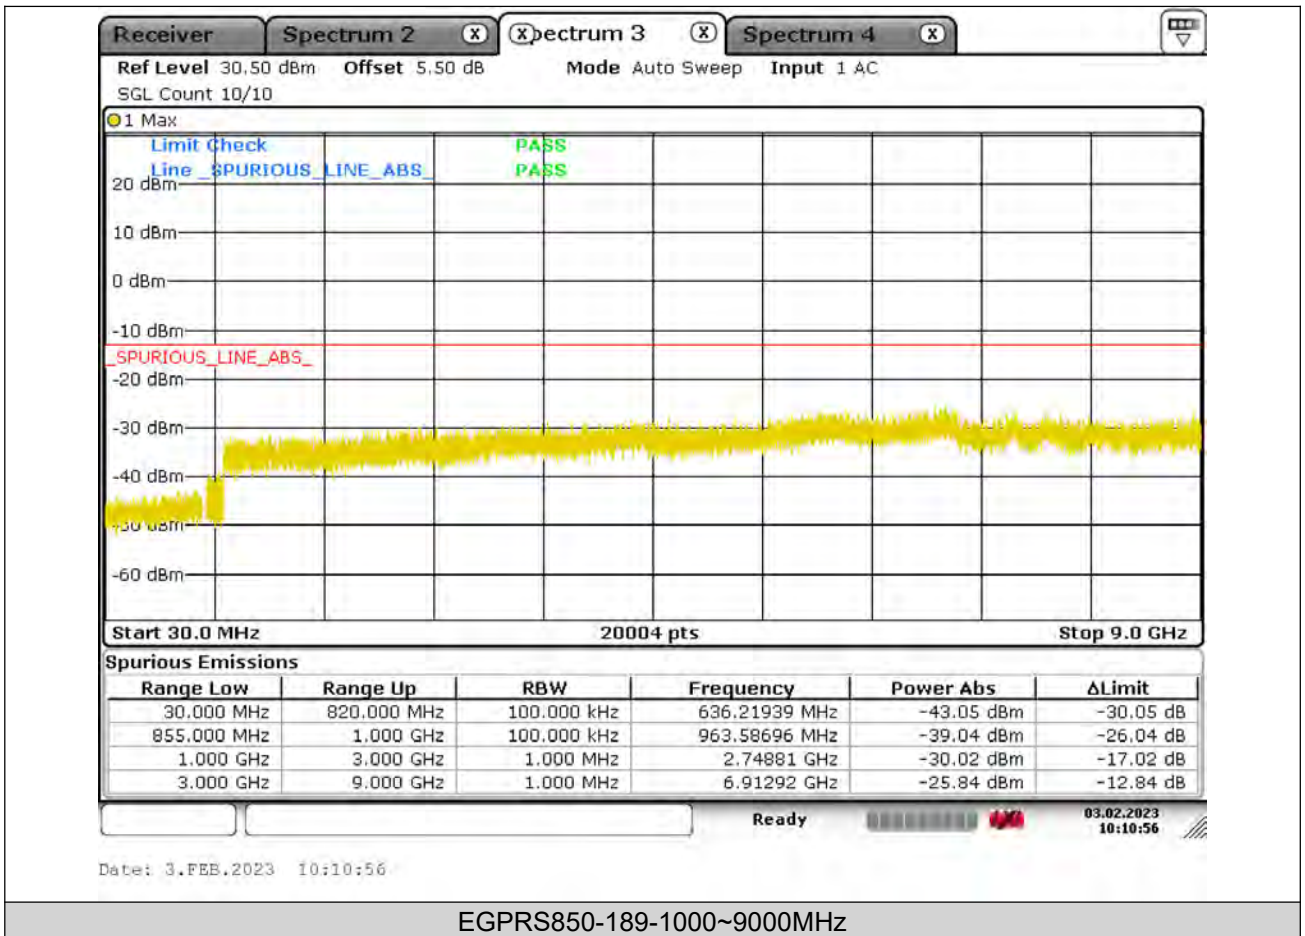



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

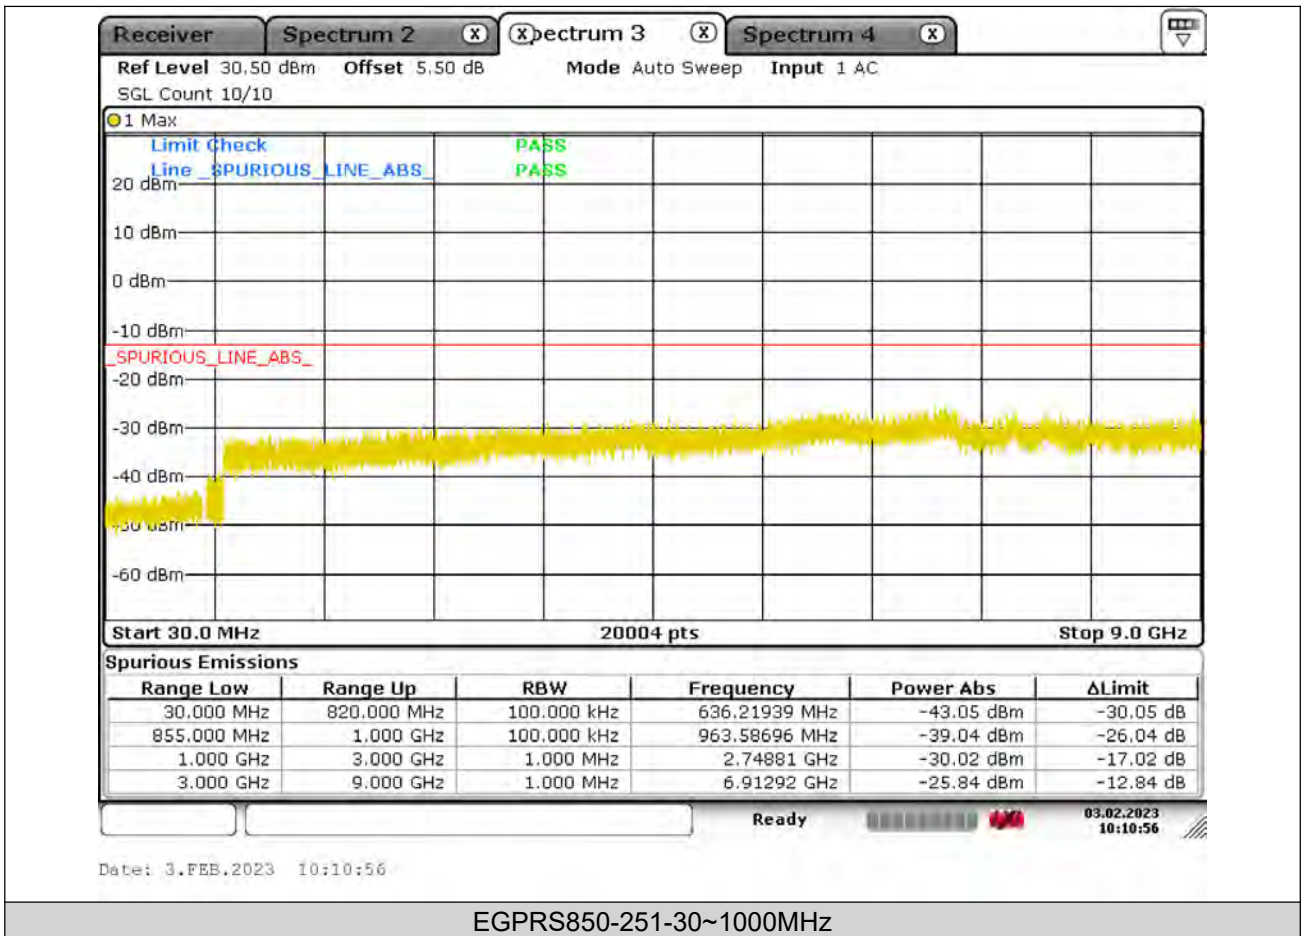



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

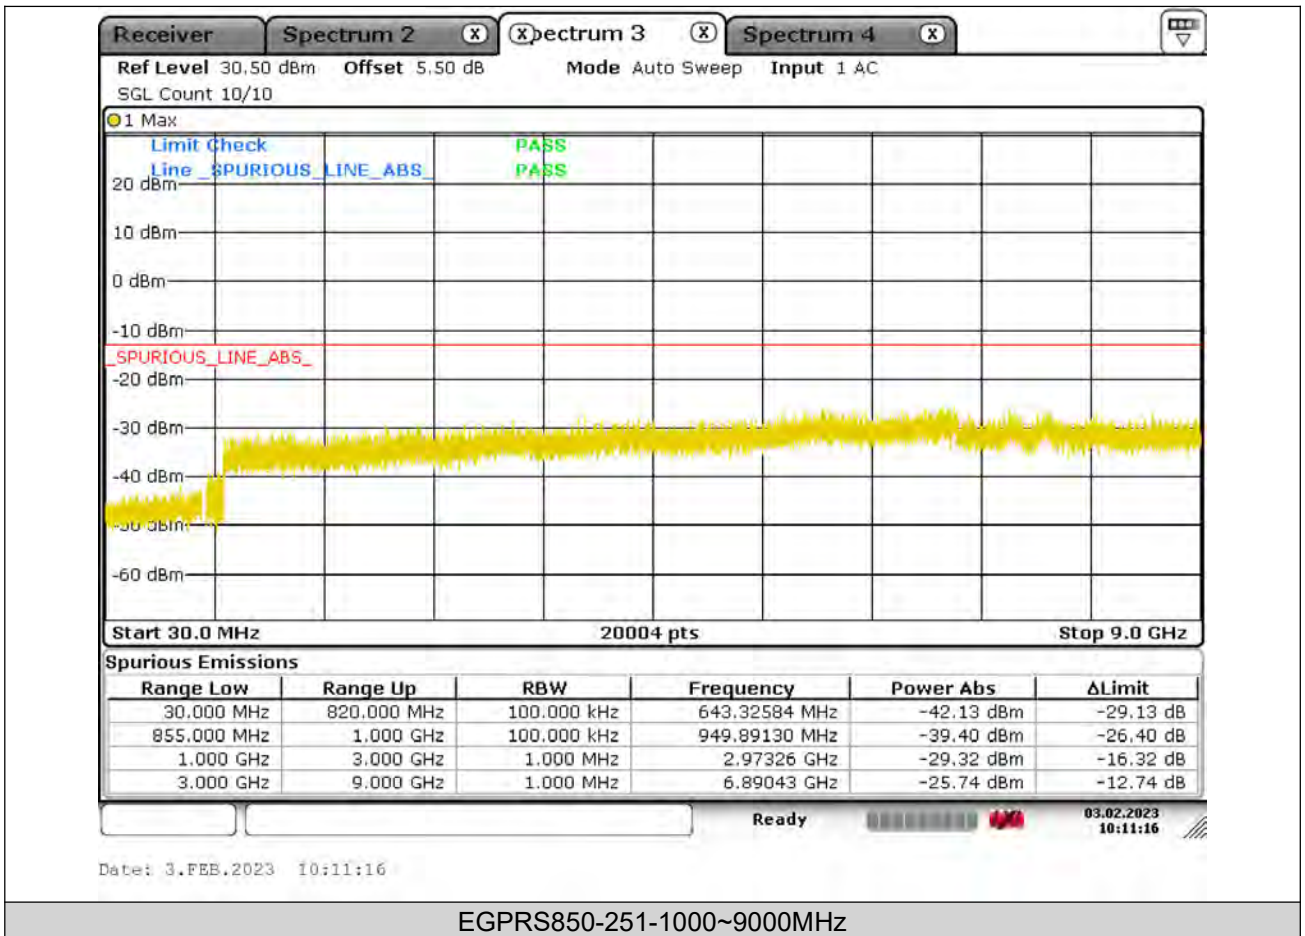



BUREAU VERITAS

Test Report No.: W7L-P23010004-2RF01

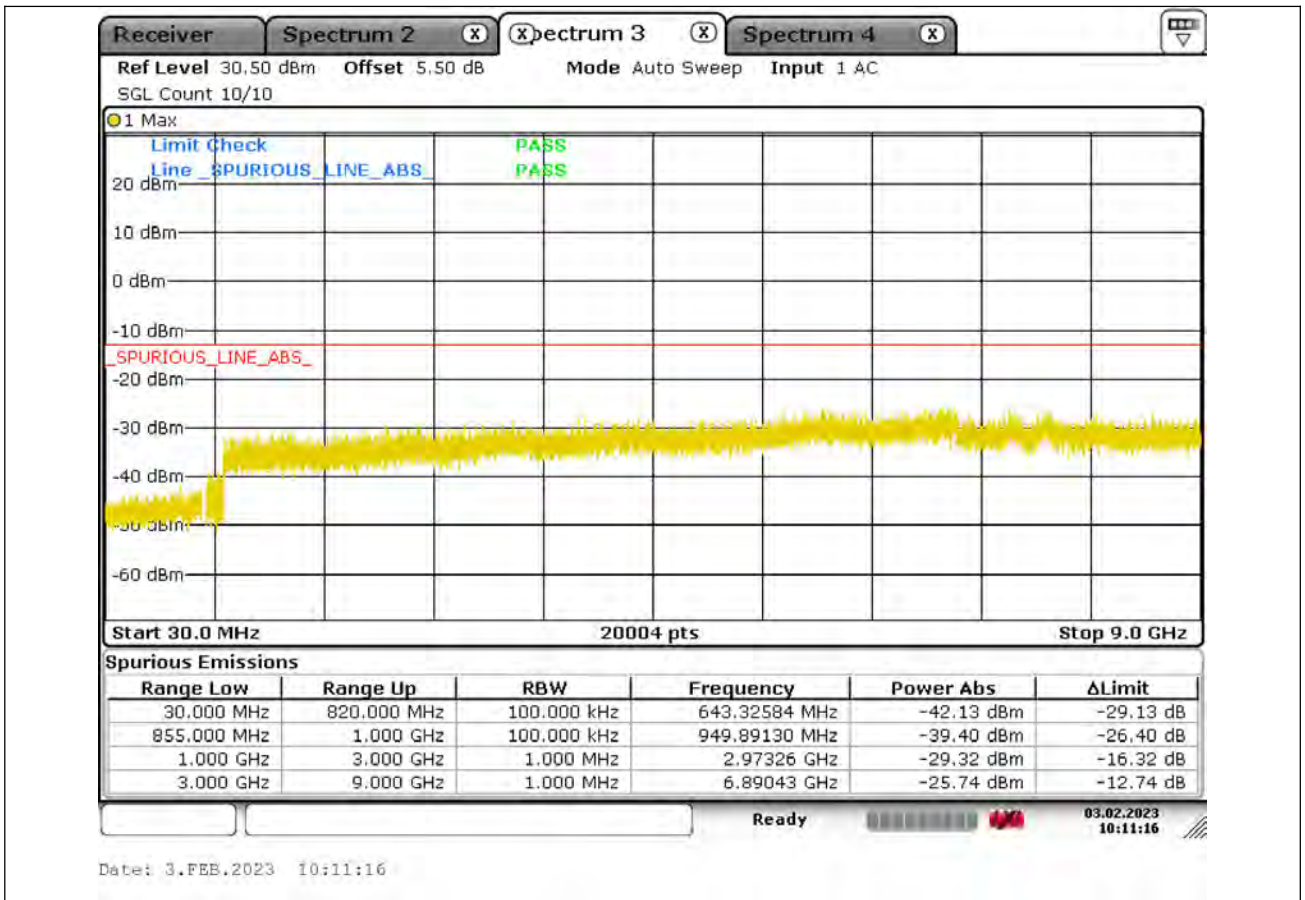



FREQUENCY STABILITY

Test Result

Voltage							
Band	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
GSM850	128	VL	NT	3.9	0.004732	±2.5	PASS
GSM850	128	VN	NT	-4.4	-0.005339	±2.5	PASS
GSM850	128	VH	NT	4.1	0.004975	±2.5	PASS
GSM850	189	VL	NT	-4.61	-0.005512	±2.5	PASS
GSM850	189	VN	NT	-6.62	-0.007915	±2.5	PASS
GSM850	189	VH	NT	1.79	0.002140	±2.5	PASS
GSM850	251	VL	NT	-5.15	-0.006067	±2.5	PASS
GSM850	251	VN	NT	-9.18	-0.010815	±2.5	PASS
GSM850	251	VH	NT	-0.76	-0.000895	±2.5	PASS
EGPRS850	128	VL	NT	1.21	0.001468	±2.5	PASS
EGPRS850	128	VN	NT	-5.13	-0.006224	±2.5	PASS
EGPRS850	128	VH	NT	7.52	0.009124	±2.5	PASS
EGPRS850	189	VL	NT	4.63	0.005536	±2.5	PASS
EGPRS850	189	VN	NT	-7.11	-0.008501	±2.5	PASS
EGPRS850	189	VH	NT	7.63	0.009122	±2.5	PASS
EGPRS850	251	VL	NT	-9.95	-0.011722	±2.5	PASS
EGPRS850	251	VN	NT	-6.24	-0.007352	±2.5	PASS
EGPRS850	251	VH	NT	-8.99	-0.010591	±2.5	PASS

Temperature							
Band	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
GSM850	128	NV	-30	4.8	0.005824	±2.5	PASS
GSM850	128	NV	-20	8.37	0.010155	±2.5	PASS
GSM850	128	NV	-10	4.45	0.005399	±2.5	PASS
GSM850	128	NV	0	7.52	0.009124	±2.5	PASS
GSM850	128	NV	10	-0.47	-0.000570	±2.5	PASS
GSM850	128	NV	20	9.88	0.011987	±2.5	PASS
GSM850	128	NV	30	8.55	0.010374	±2.5	PASS
GSM850	128	NV	40	-3.95	-0.004793	±2.5	PASS
GSM850	128	NV	50	6.29	0.007632	±2.5	PASS
GSM850	189	NV	-30	6.55	0.007831	±2.5	PASS
GSM850	189	NV	-20	6.14	0.007341	±2.5	PASS
GSM850	189	NV	-10	-1.39	-0.001662	±2.5	PASS
GSM850	189	NV	0	-0.55	-0.000658	±2.5	PASS
GSM850	189	NV	10	-1.02	-0.001220	±2.5	PASS
GSM850	189	NV	20	-9.72	-0.011621	±2.5	PASS
GSM850	189	NV	30	9.35	0.011179	±2.5	PASS
GSM850	189	NV	40	-8.72	-0.010426	±2.5	PASS



BUREAU
VERITAS

Test Report No.: W7L-P23010004-2RF01

GSM850	189	NV	50	2.66	0.003180	±2.5	PASS
GSM850	251	NV	-30	-8.52	-0.010038	±2.5	PASS
GSM850	251	NV	-20	6.54	0.007705	±2.5	PASS
GSM850	251	NV	-10	2.69	0.003169	±2.5	PASS
GSM850	251	NV	0	2.71	0.003193	±2.5	PASS
GSM850	251	NV	10	4.73	0.005573	±2.5	PASS
GSM850	251	NV	20	-7.76	-0.009142	±2.5	PASS
GSM850	251	NV	30	-1.69	-0.001991	±2.5	PASS
GSM850	251	NV	40	-7.94	-0.009354	±2.5	PASS
GSM850	251	NV	50	-0.85	-0.001001	±2.5	PASS
EGPRS850	128	NV	-30	-0.04	-0.000022	±2.5	PASS
EGPRS850	128	NV	-20	-6.56	-0.003546	±2.5	PASS
EGPRS850	128	NV	-10	1.58	0.000854	±2.5	PASS
EGPRS850	128	NV	0	7.16	0.003870	±2.5	PASS
EGPRS850	128	NV	10	-9.91	-0.005356	±2.5	PASS
EGPRS850	128	NV	20	1.66	0.000897	±2.5	PASS
EGPRS850	128	NV	30	3.79	0.002048	±2.5	PASS
EGPRS850	189	NV	40	-5.88	-0.003178	±2.5	PASS
EGPRS850	189	NV	50	-6.43	-0.003475	±2.5	PASS
EGPRS850	189	NV	-30	-4.45	-0.002367	±2.5	PASS
EGPRS850	189	NV	-20	5.07	0.002697	±2.5	PASS
EGPRS850	189	NV	-10	-7.66	-0.004074	±2.5	PASS
EGPRS850	189	NV	0	7.03	0.003739	±2.5	PASS
EGPRS850	189	NV	10	2.59	0.001378	±2.5	PASS
EGPRS850	189	NV	20	1.79	0.000952	±2.5	PASS
EGPRS850	189	NV	30	-5.15	-0.002739	±2.5	PASS
EGPRS850	189	NV	40	8.43	0.004484	±2.5	PASS
EGPRS850	189	NV	50	7.15	0.003803	±2.5	PASS
EGPRS850	251	NV	-30	-1.51	-0.000791	±2.5	PASS
EGPRS850	251	NV	-20	4.68	0.002451	±2.5	PASS
EGPRS850	251	NV	-10	-0.91	-0.000476	±2.5	PASS
EGPRS850	251	NV	0	-2.34	-0.001225	±2.5	PASS
EGPRS850	251	NV	10	3.73	0.001953	±2.5	PASS
EGPRS850	251	NV	20	-4.34	-0.002272	±2.5	PASS
EGPRS850	251	NV	30	4.2	0.002199	±2.5	PASS
EGPRS850	251	NV	40	8.78	0.004597	±2.5	PASS
EGPRS850	251	NV	50	4.03	0.002110	±2.5	PASS



Test Report No.: W7L-P23010004-2RF01

WCDMA V


PEAK-TO-AVERAGE RATIO

Test Result

Band	Channel	Peak-to-Average Ratio(dB)	Limit(dBm)	Verdict
Band5	4132	2.93	13	PASS
Band5	4182	2.93	13	PASS
Band5	4233	2.87	13	PASS




Test Graphs

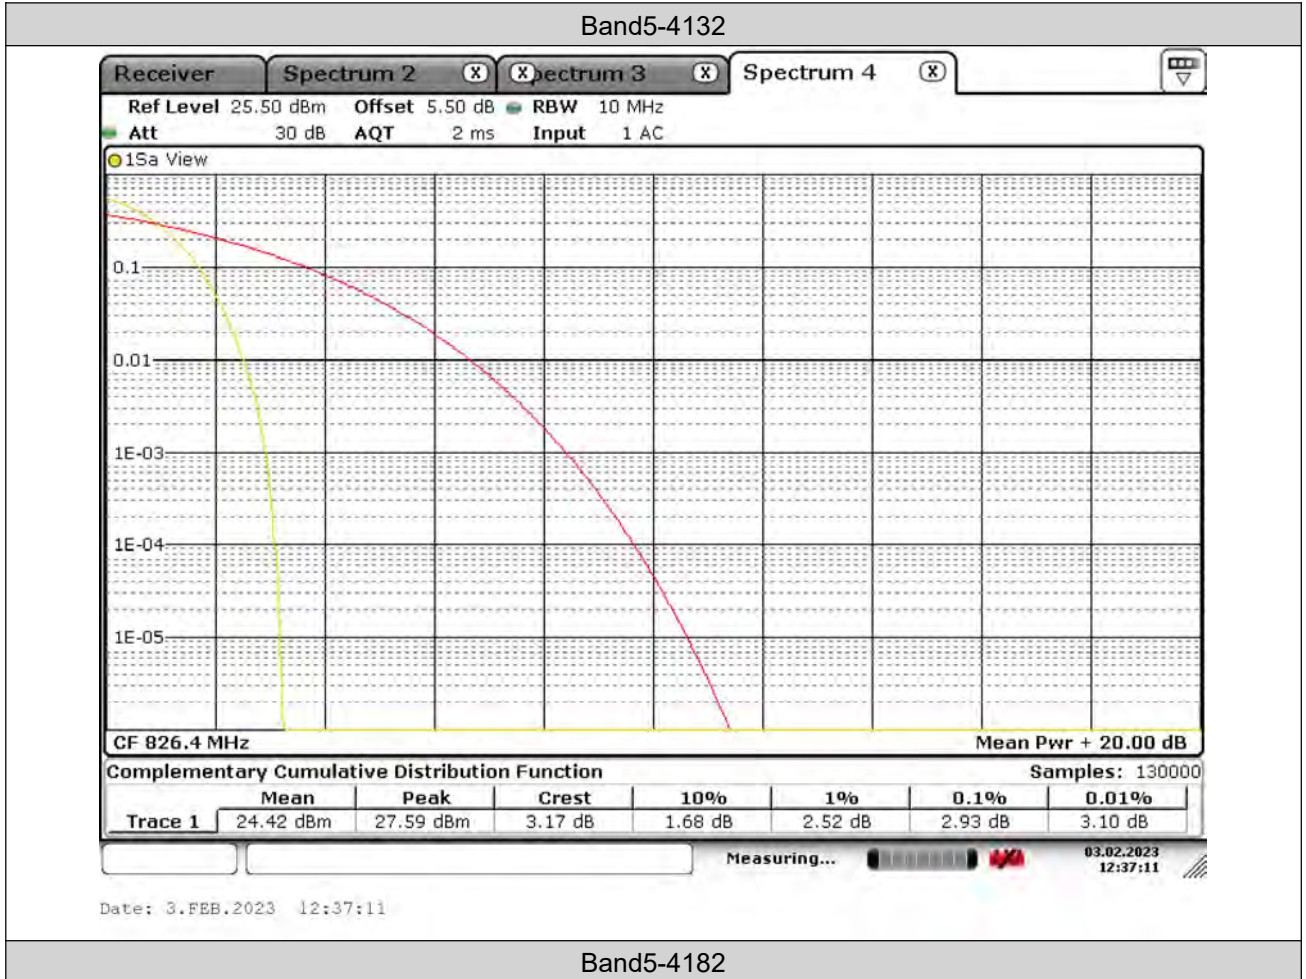



BUREAU VERITAS

Test Report No.: W7L-P23010004-2RF01

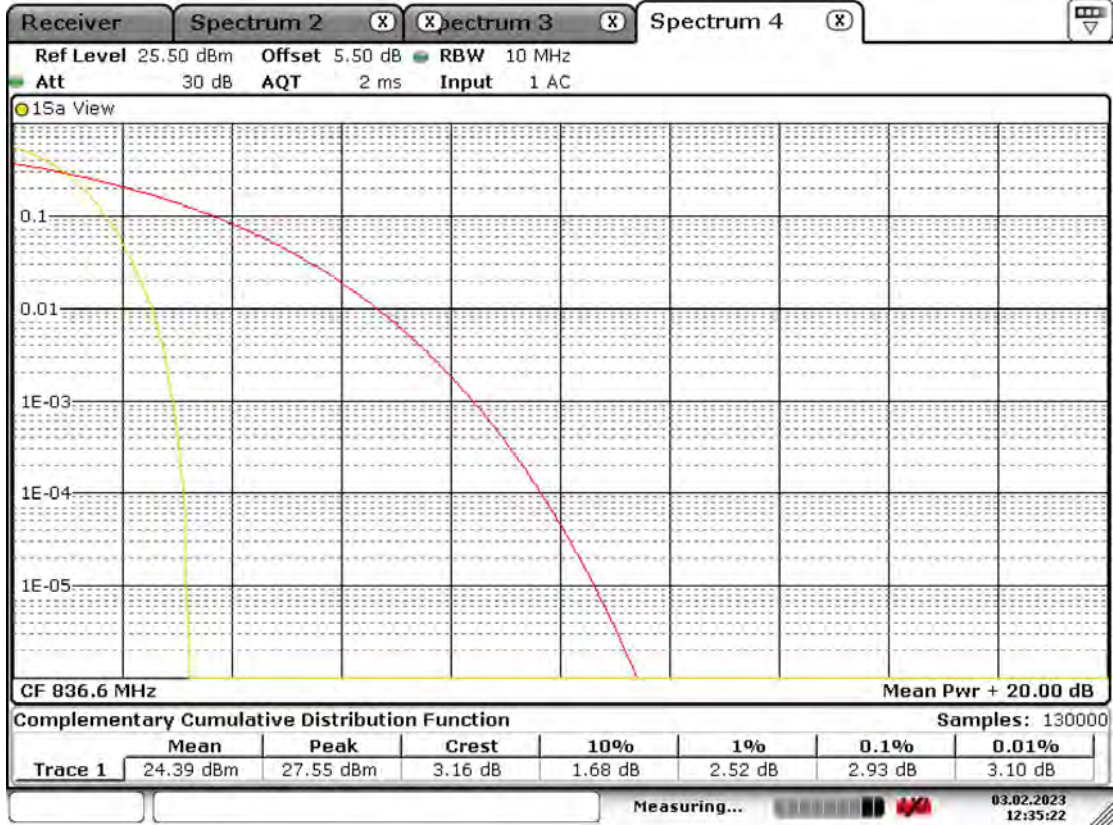


Date: 3.FEB.2023 12:35:22

Band5-4233



BUREAU VERITAS

Test Report No.: W7L-P23010004-2RF01

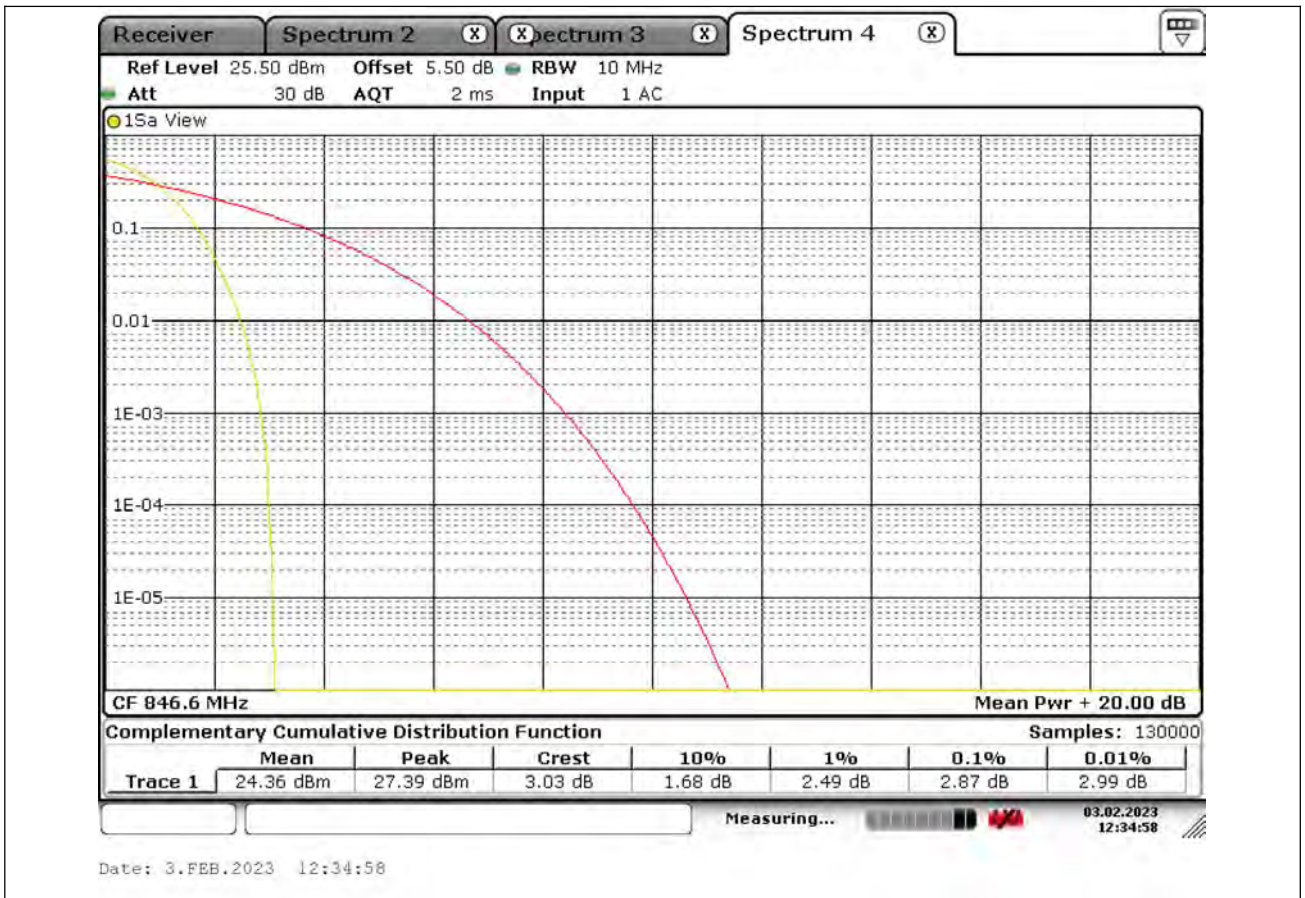



Test Report No.: W7L-P23010004-2RF01

26DB BANDWIDTH AND OCCUPIED BANDWIDTH


Test Result

Band	Channel	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit(kHz)	Verdict
Band5	4132	4.153	4.674	---	PASS
Band5	4182	4.139	4.674	---	PASS
Band5	4233	4.139	4.689	---	PASS



Test Report No.: W7L-P23010004-2RF01


Test Graphs Occupied Bandwidth

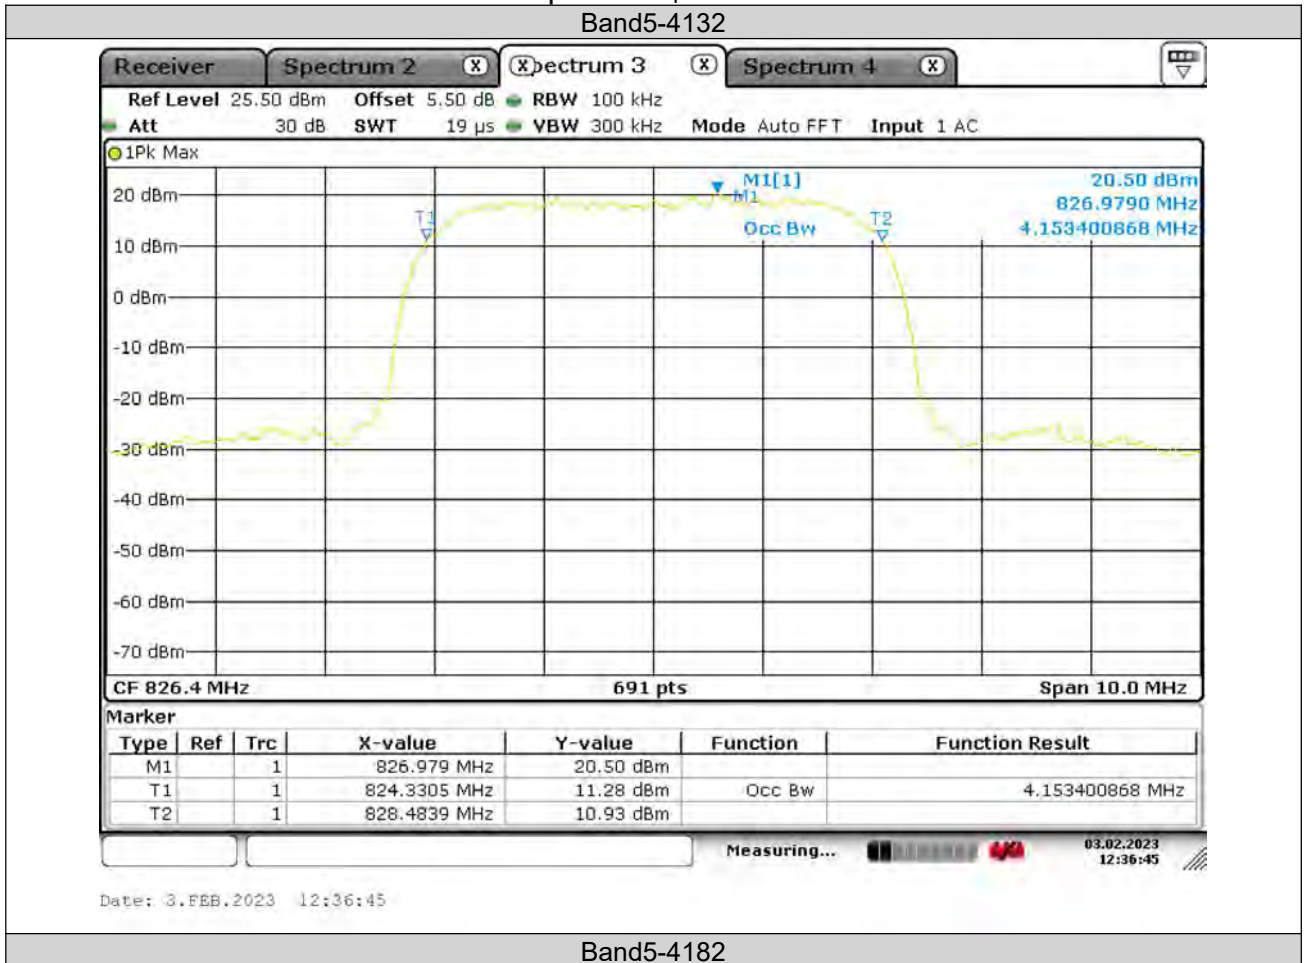



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

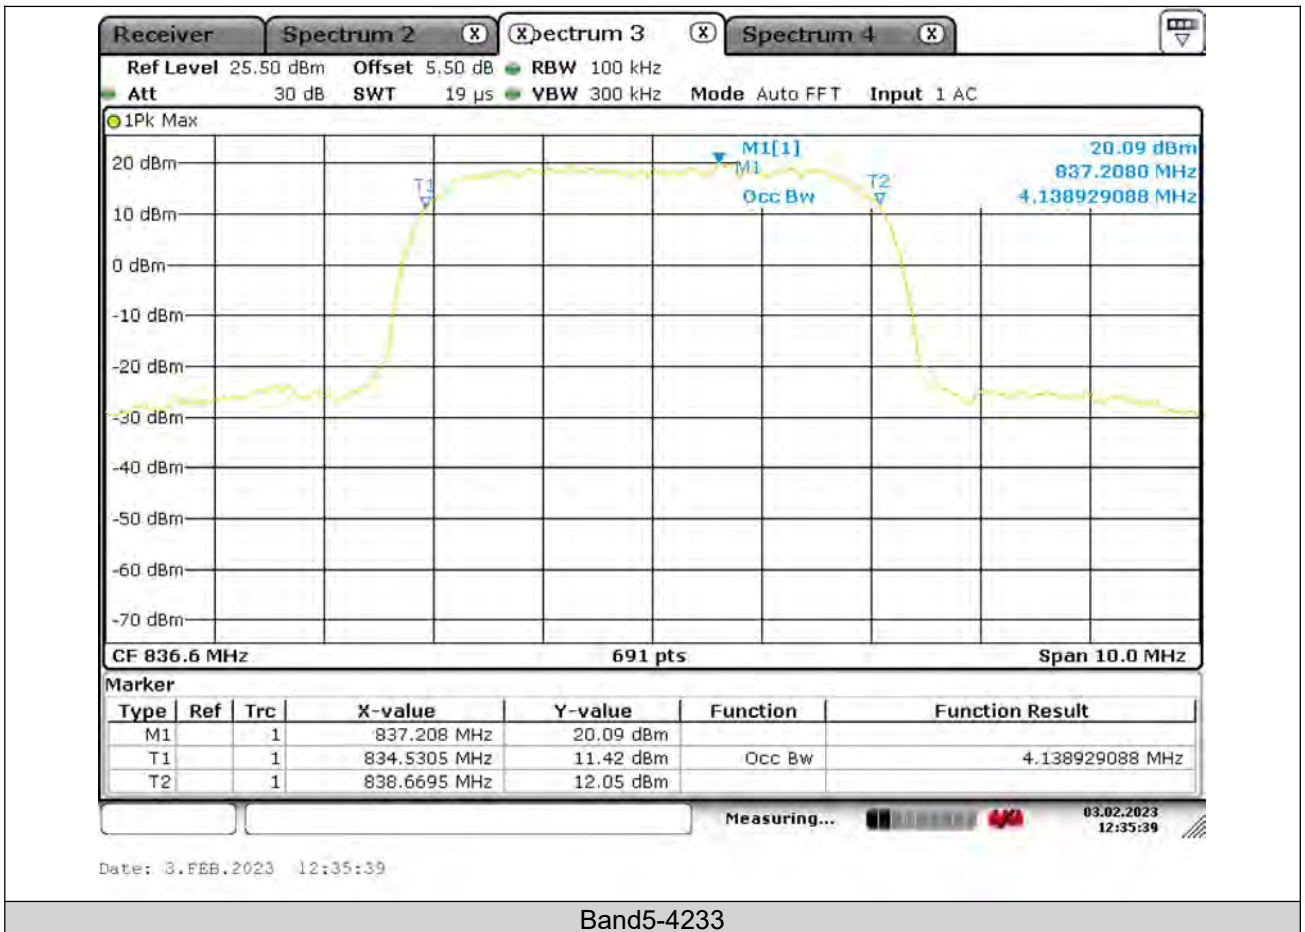



BUREAU
VERITAS

Test Report No.: W7L-P23010004-2RF01

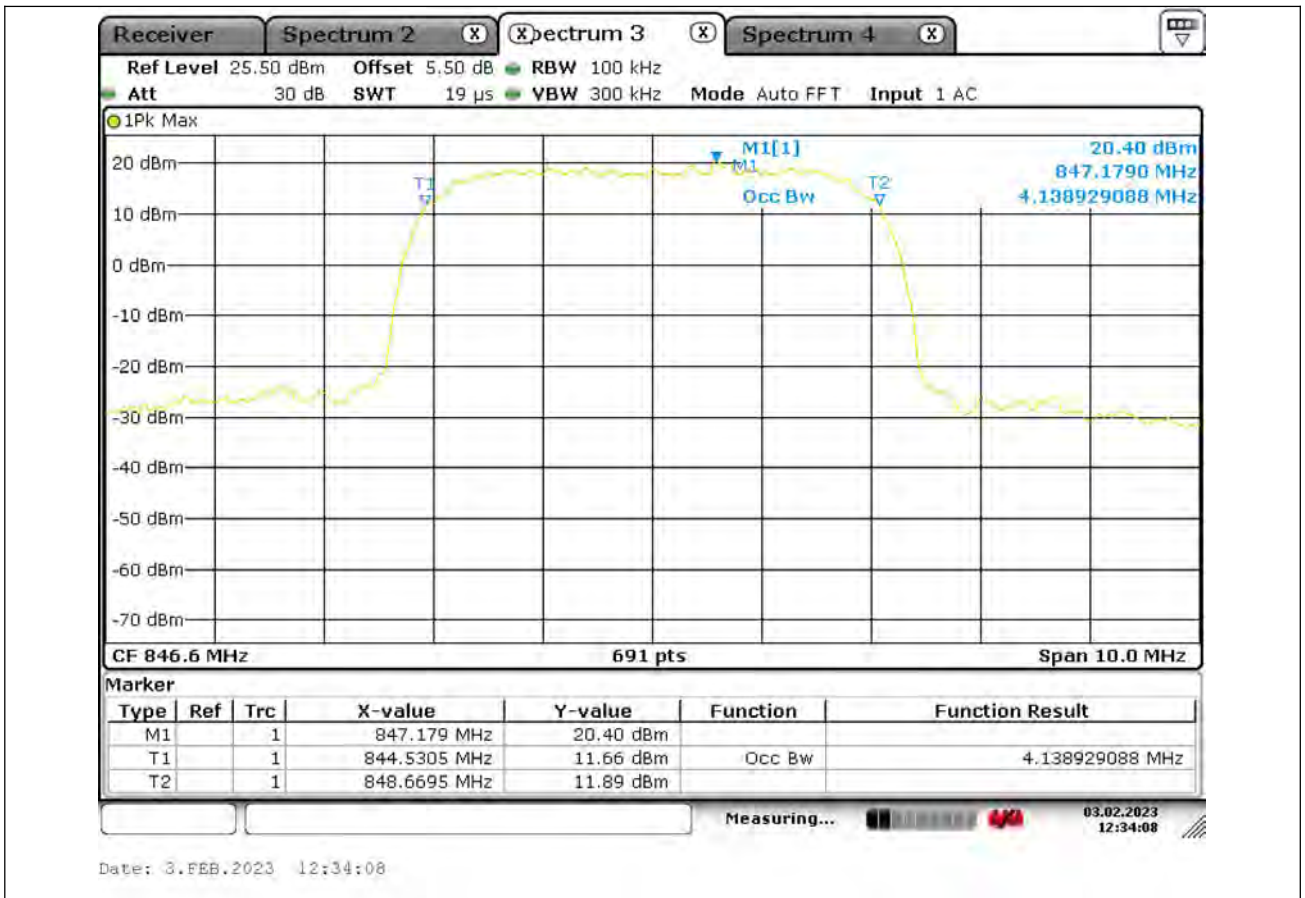


26dB Bandwidth

Band5-4132



**BUREAU
VERITAS**


Test Report No.: W7L-P23010004-2RF01

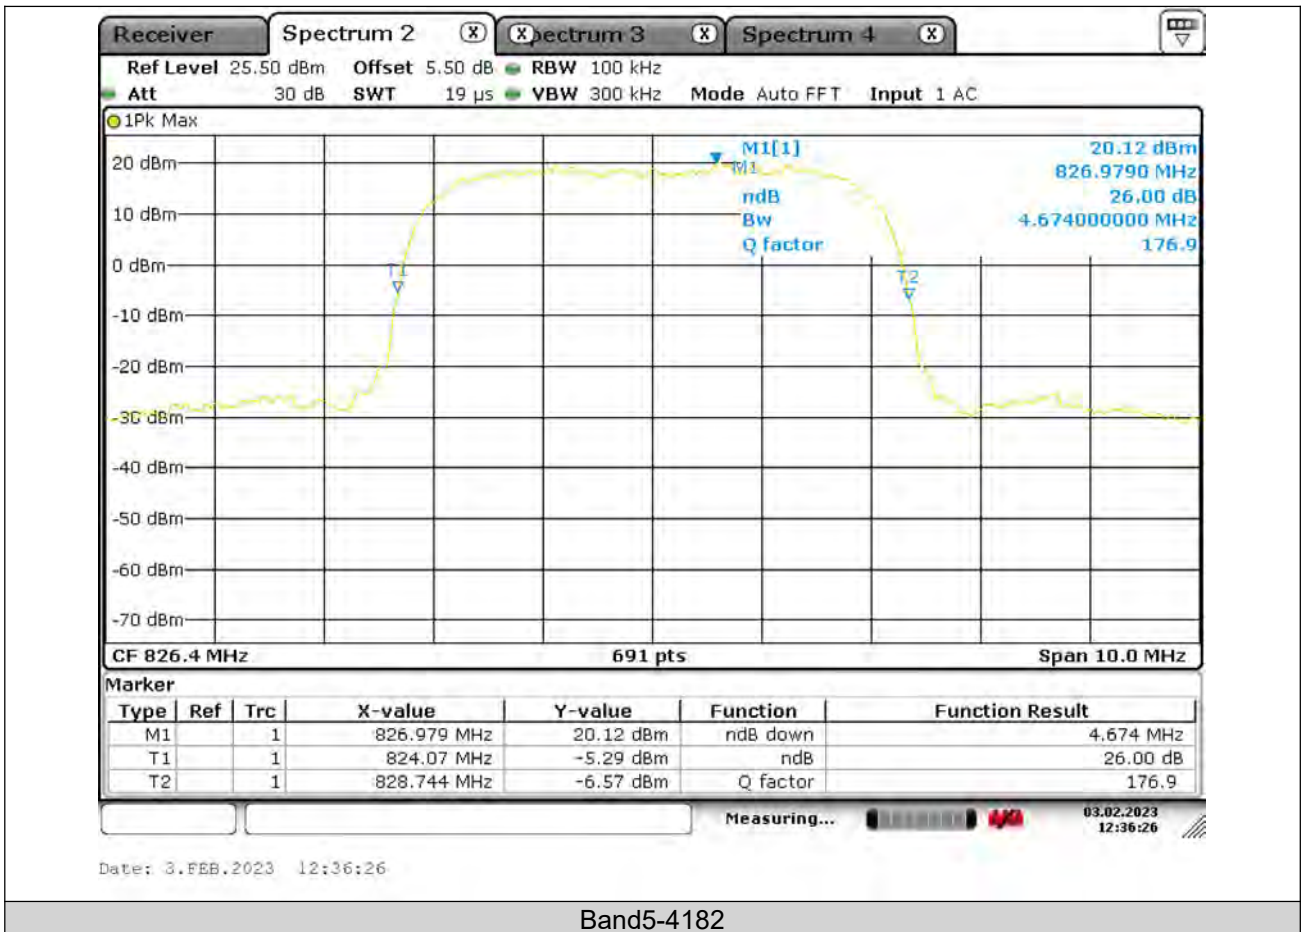



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

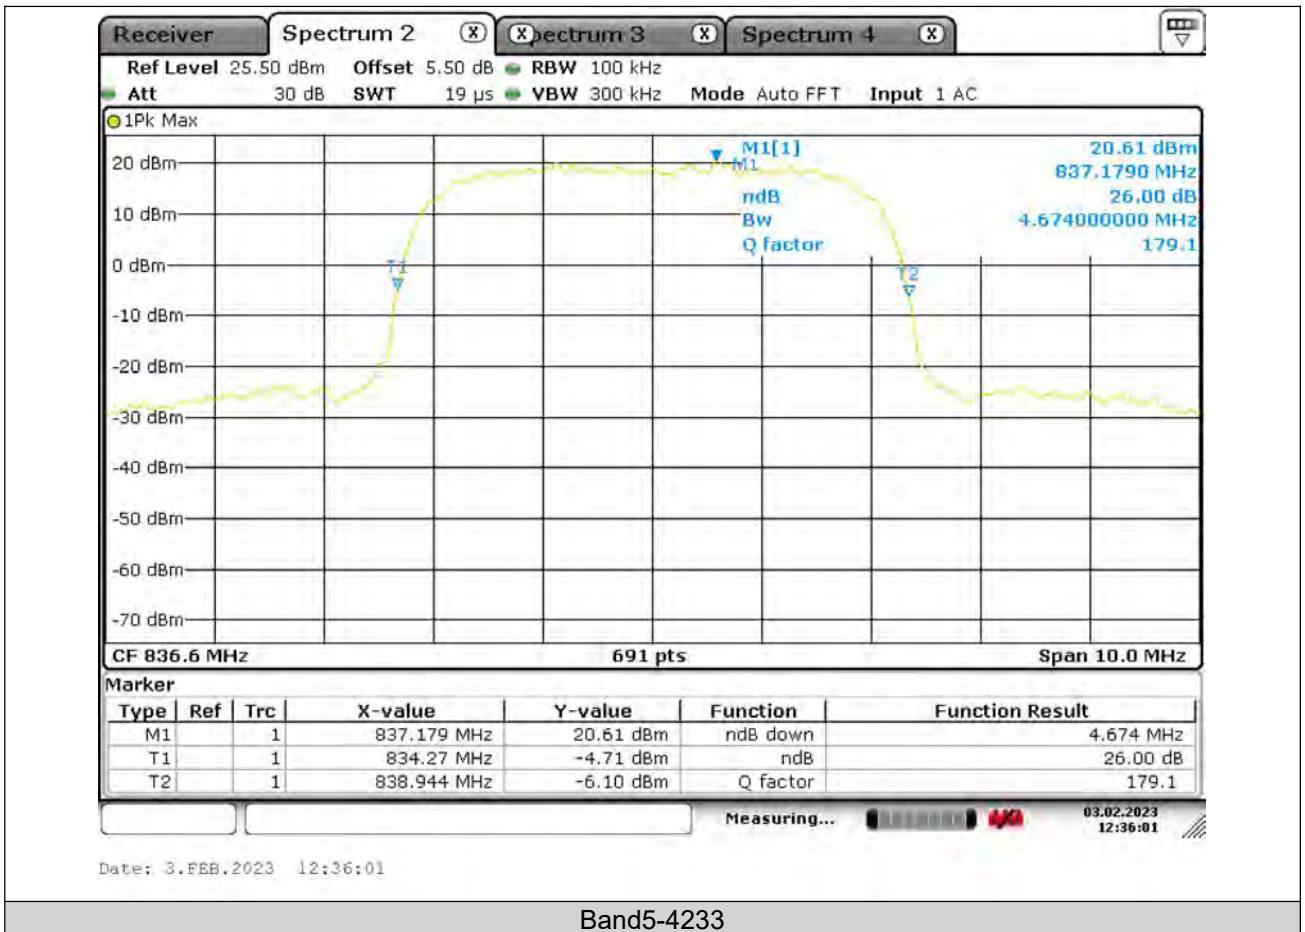



BUREAU
VERITAS

Test Report No.: W7L-P23010004-2RF01

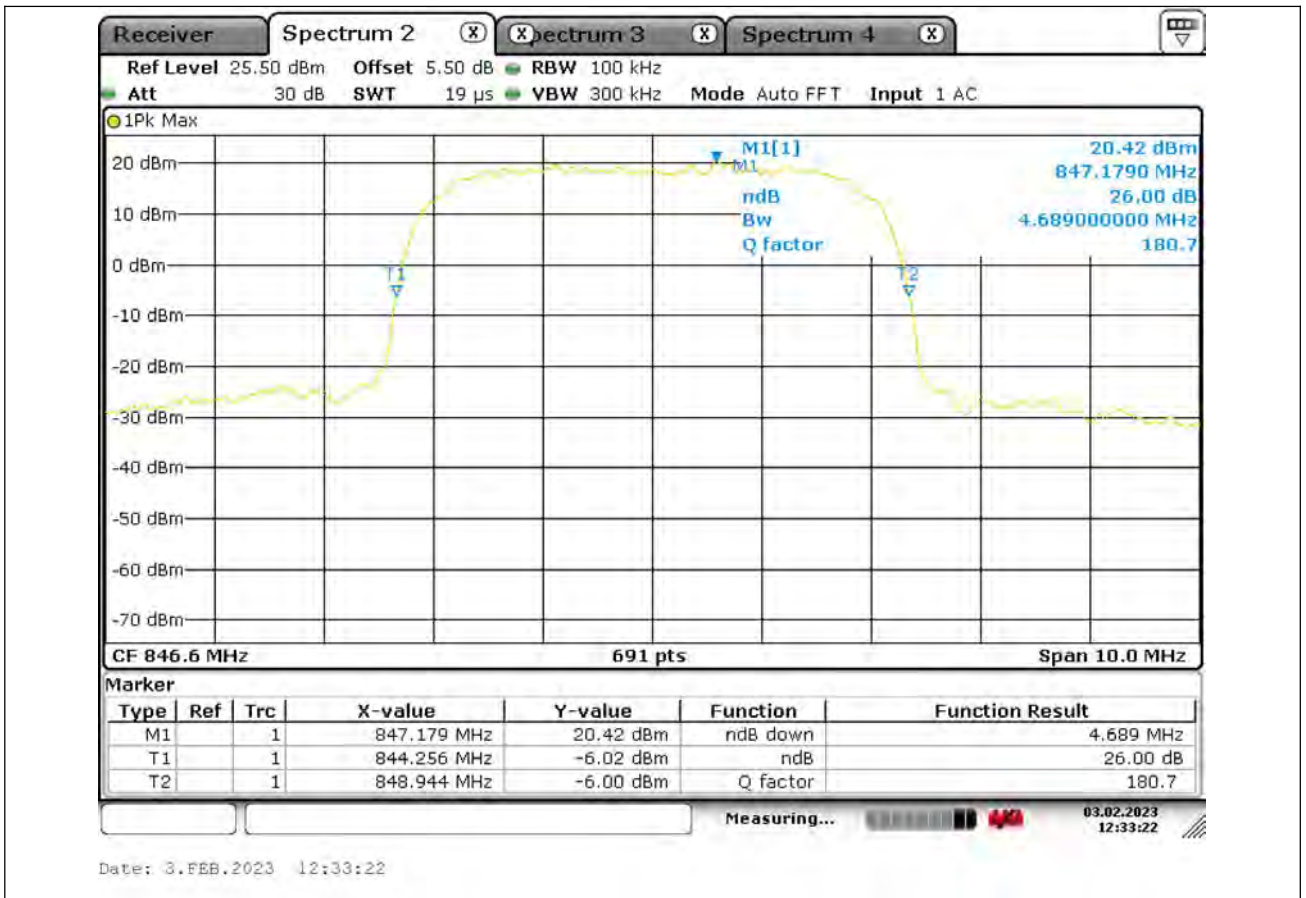



Test Report No.: W7L-P23010004-2RF01


BAND EDGE

Test Result

Band	Channel	Frequency (MHz)	Result (dBm)	Limit(dBm)	Verdict
Band5	4132	823.93078	-32.94	-13	PASS
Band5	4233	849.07021	-35.26	-13	PASS




Test Graphs

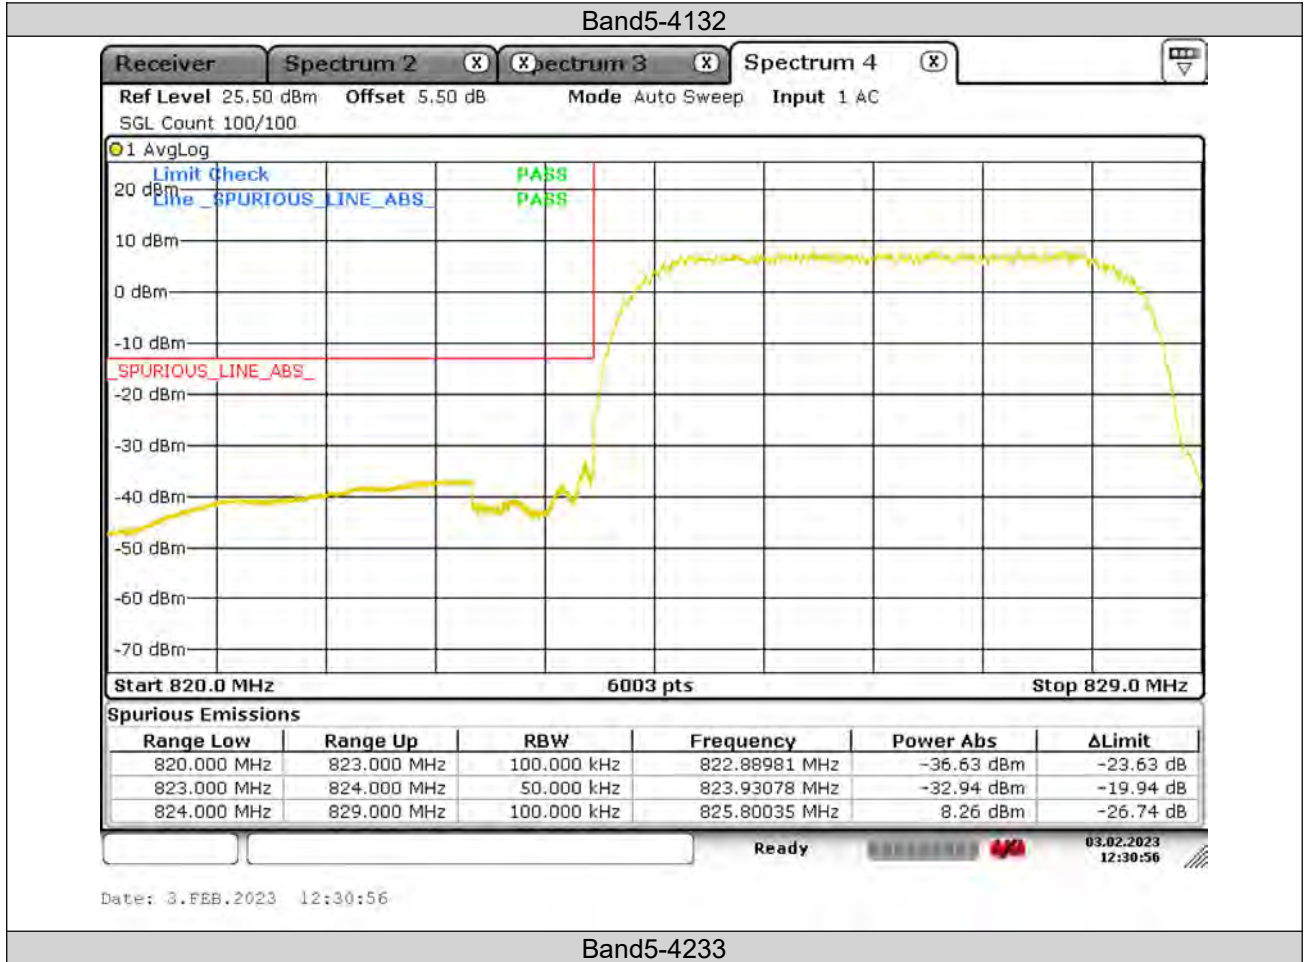



BUREAU
VERITAS

Test Report No.: W7L-P23010004-2RF01

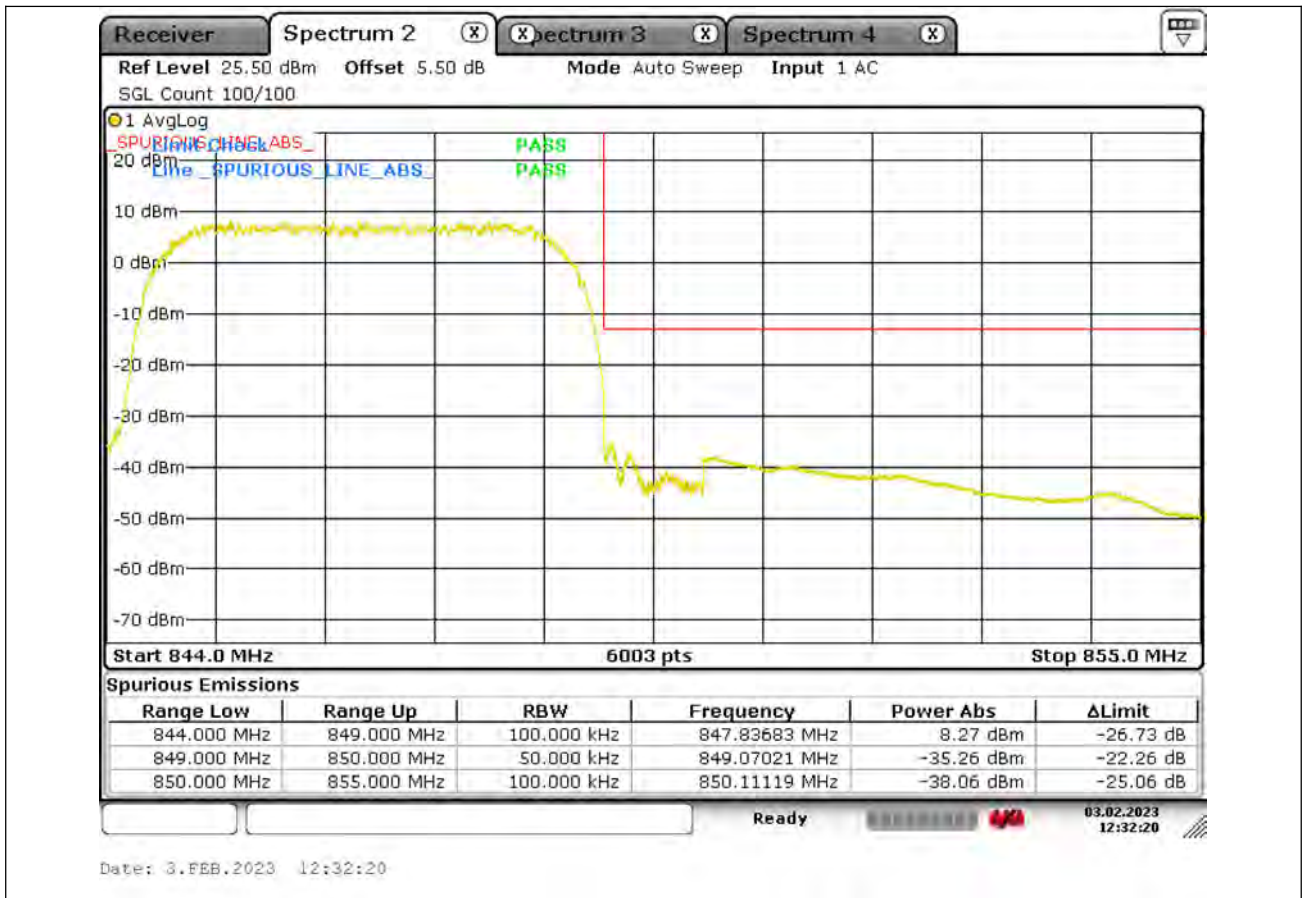



Test Report No.: W7L-P23010004-2RF01


CONDUCTED SPURIOUS EMISSION

Test Result

Band	Channel	Frequency Range (Mhz)	Frequency (dBm)	Result (dBm)	Limit (dBm)	Verdict
Band5	4132	30~1000MHz	819.01299	-42.96	-13	PASS
Band5	4132	1000~9000MHz	6844.77	-34.11	-13	PASS
Band5	4182	30~1000MHz	976.7029	-49.75	-13	PASS
Band5	4182	1000~9000MHz	5879.89	-34.76	-13	PASS
Band5	4233	30~1000MHz	855.32609	-44.73	-13	PASS
Band5	4233	1000~9000MHz	6128.36	-34.76	-13	PASS




Test Graphs

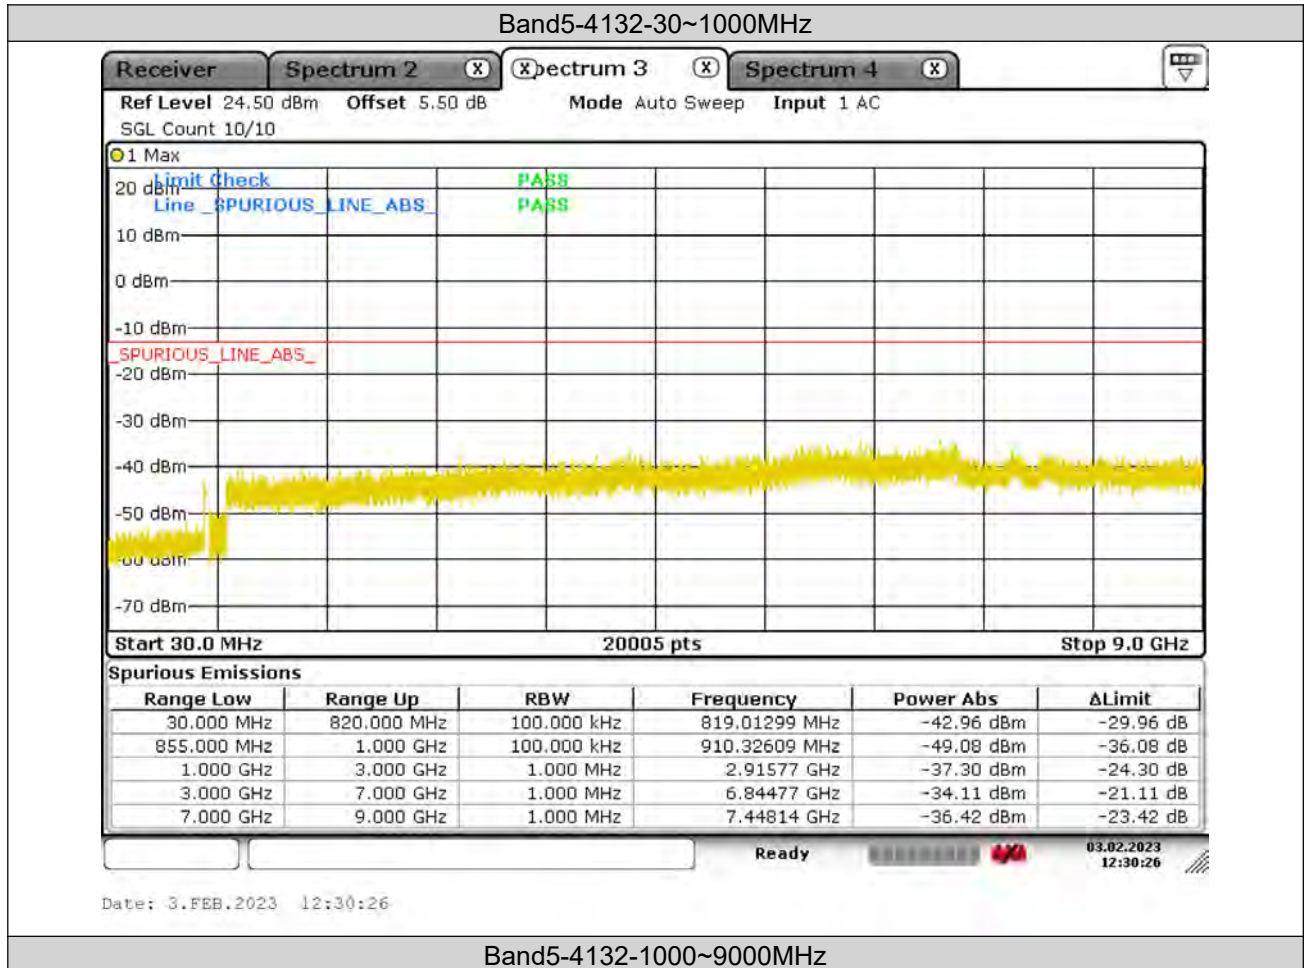



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

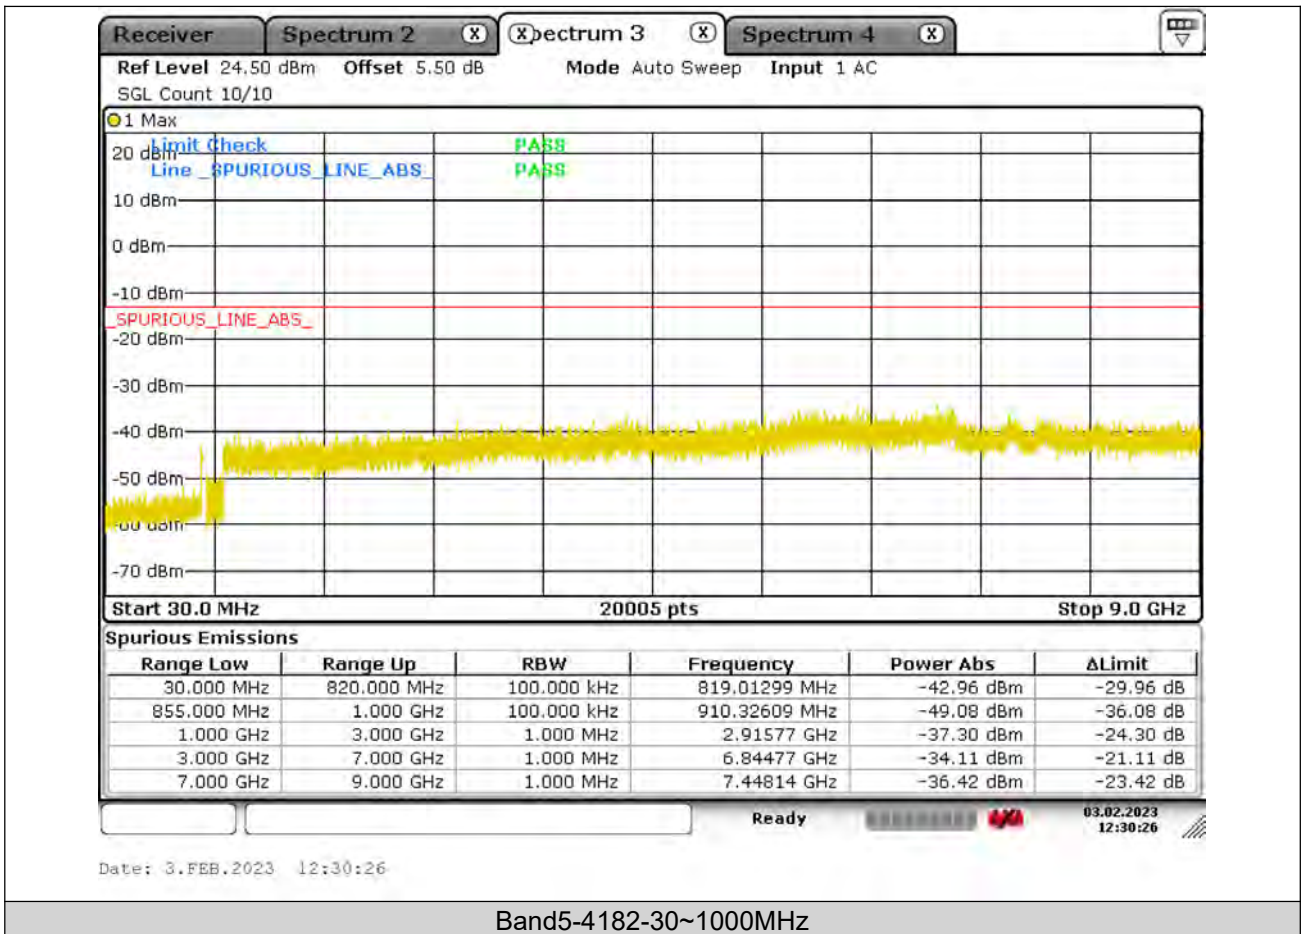



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

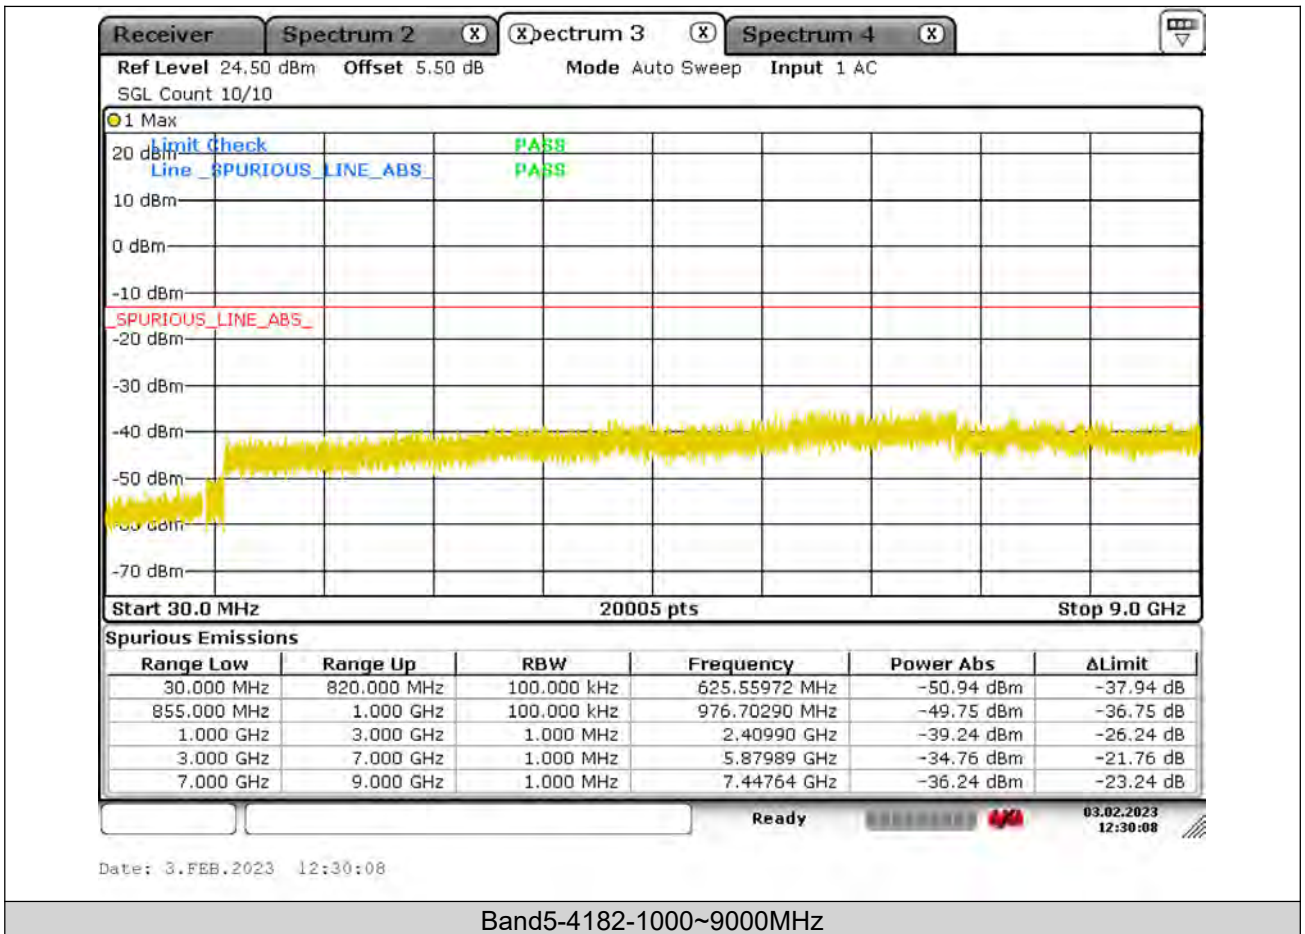



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

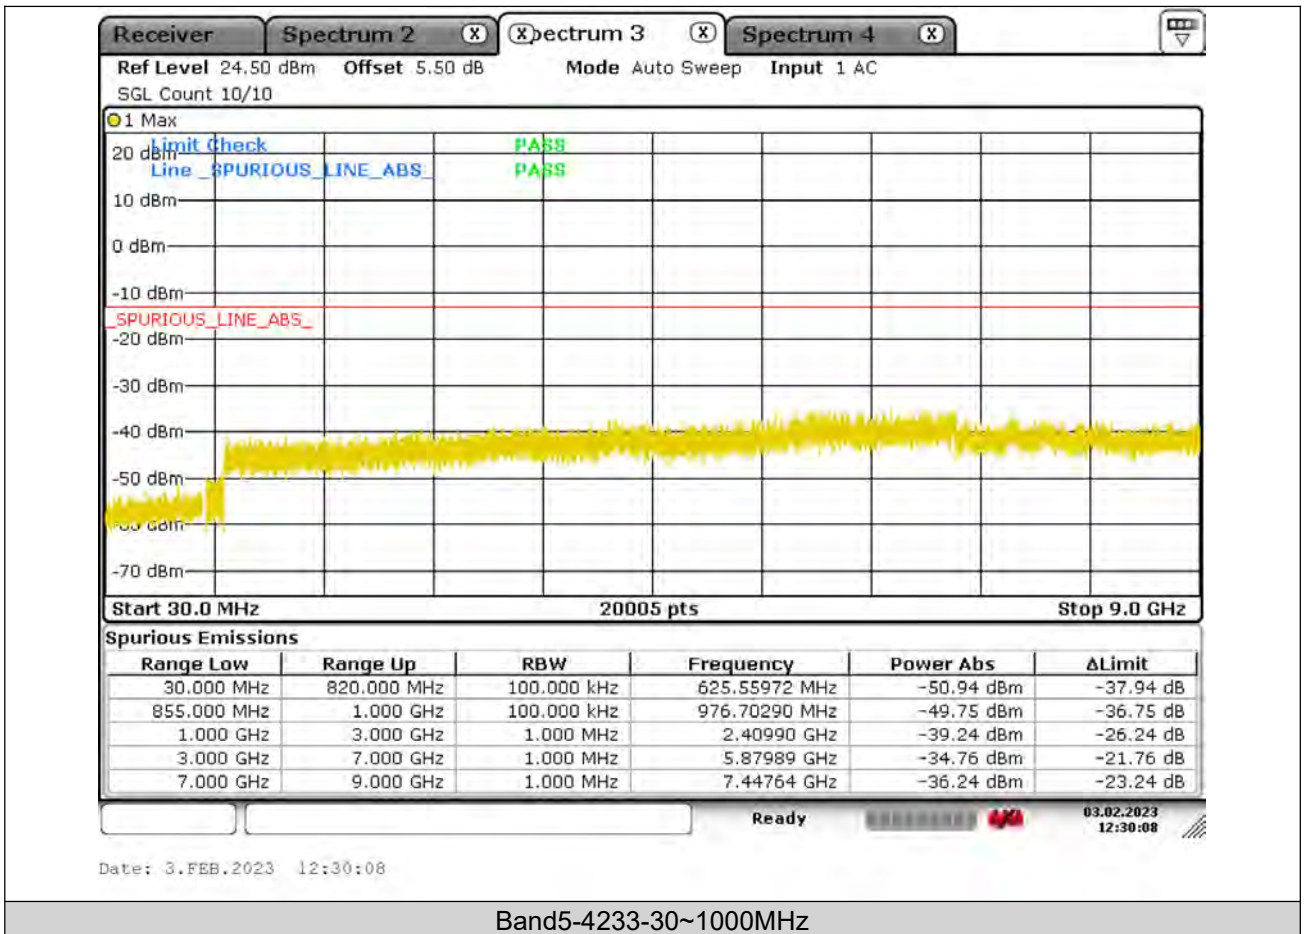



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

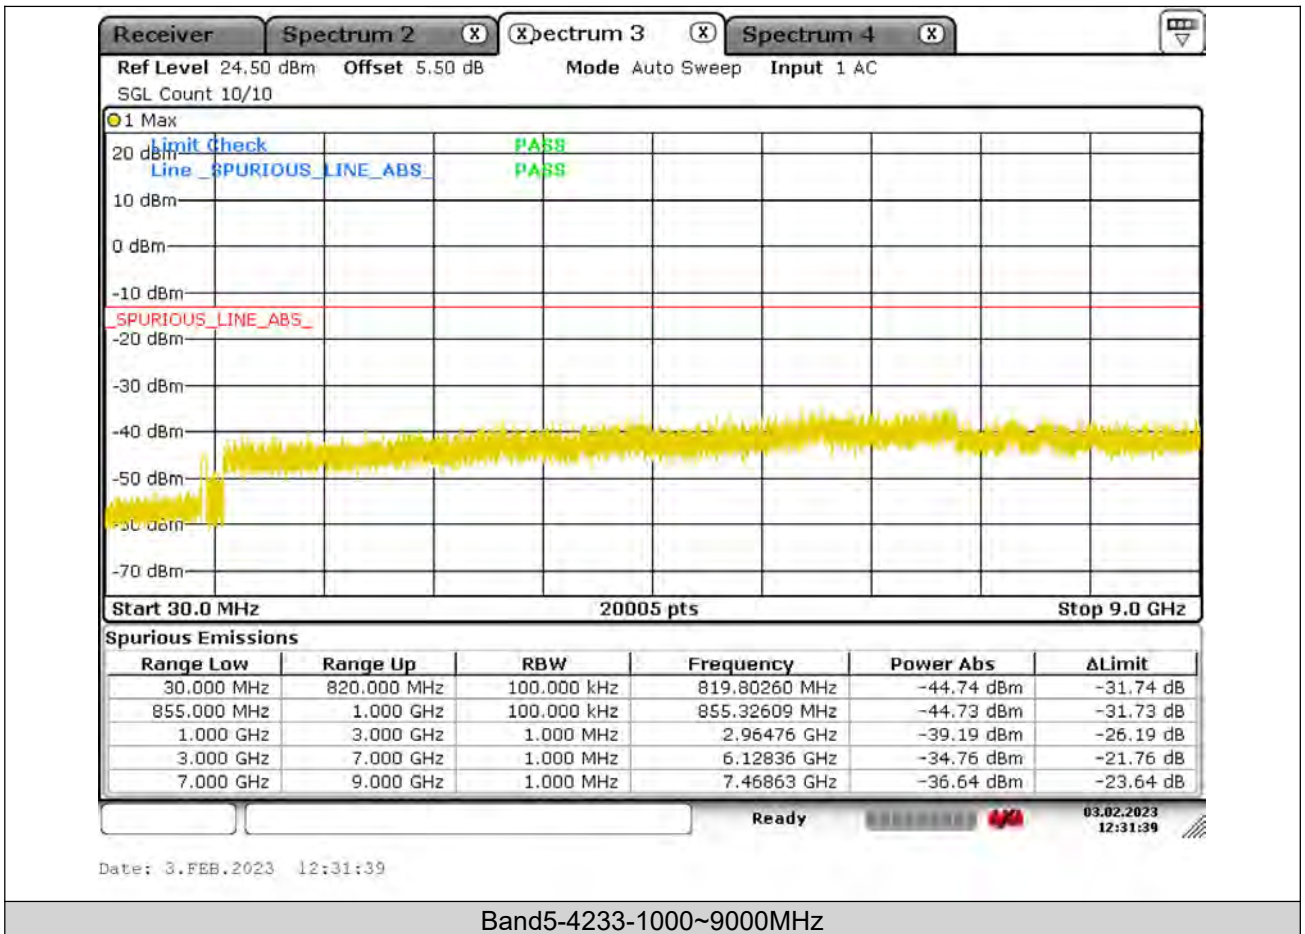



**BUREAU
VERITAS**

Test Report No.: W7L-P23010004-2RF01

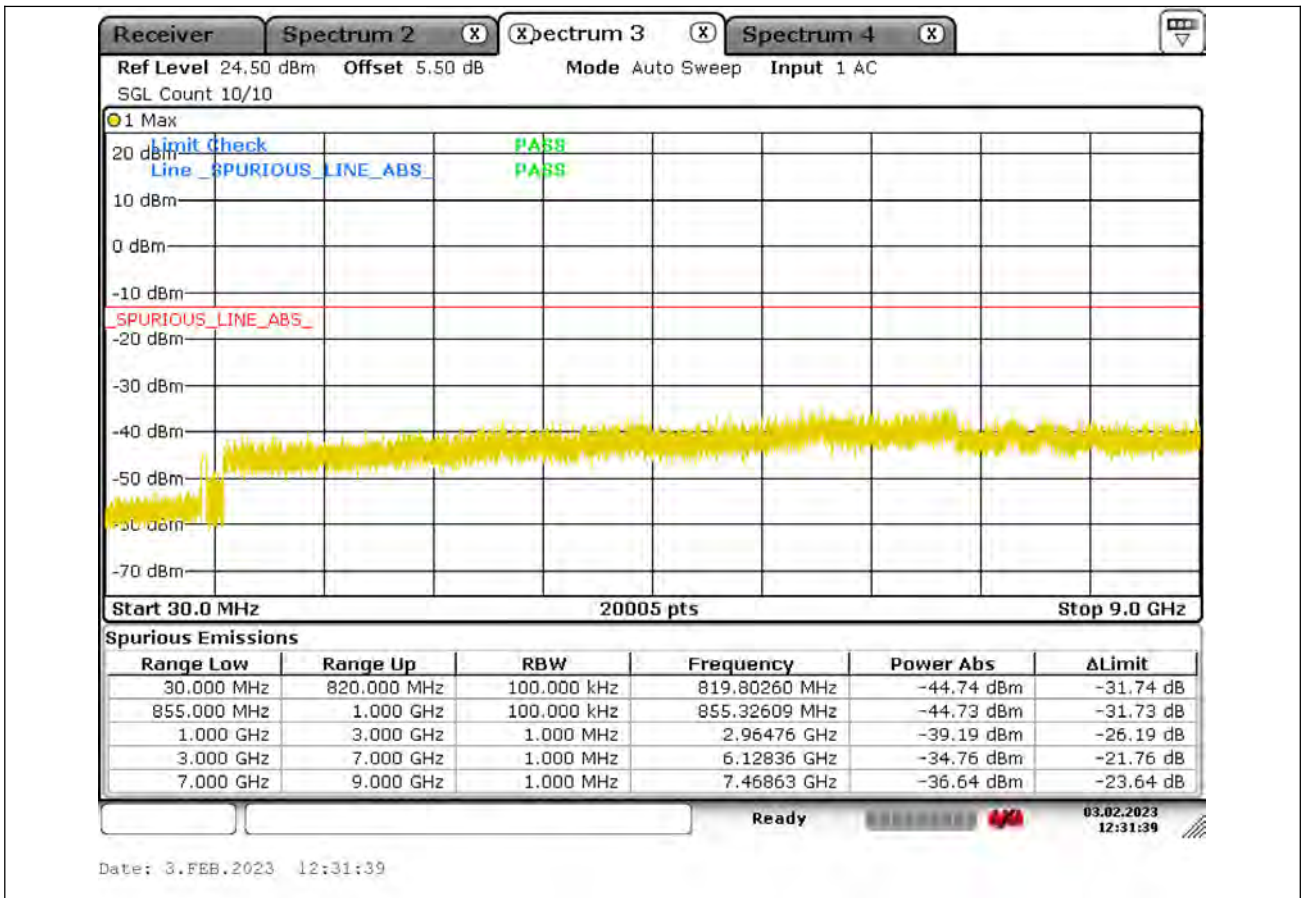



FREQUENCY STABILITY

Test Result

Voltage							
Band	Channel	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
Band5	4132	VL	NT	-6.64	-0.008035	±2.5	PASS
Band5	4132	VN	NT	9.51	0.011508	±2.5	PASS
Band5	4132	VH	NT	-7.52	-0.009100	±2.5	PASS
Band5	4182	VL	NT	9.77	0.011678	±2.5	PASS
Band5	4182	VN	NT	0.18	0.000215	±2.5	PASS
Band5	4182	VH	NT	-4.06	-0.004853	±2.5	PASS
Band5	4233	VL	NT	1.13	0.001335	±2.5	PASS
Band5	4233	VN	NT	-2.29	-0.002705	±2.5	PASS
Band5	4233	VH	NT	9.75	0.011517	±2.5	PASS

Temperature							
Band	Channel	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
Band5	826.4	NV	-30	4.45	0.005385	±2.5	PASS
Band5	826.4	NV	-20	-1.08	-0.001307	±2.5	PASS
Band5	826.4	NV	0	1.8	0.002178	±2.5	PASS
Band5	826.4	NV	10	2.51	0.003037	±2.5	PASS
Band5	826.4	NV	20	-9.86	-0.011931	±2.5	PASS
Band5	826.4	NV	30	4.34	0.005252	±2.5	PASS
Band5	826.4	NV	40	1.1	0.001331	±2.5	PASS
Band5	826.4	NV	50	7.51	0.009088	±2.5	PASS
Band5	836.6	NV	-30	-7.12	-0.008511	±2.5	PASS
Band5	836.6	NV	-20	-9.85	-0.011774	±2.5	PASS
Band5	836.6	NV	0	9.48	0.011332	±2.5	PASS
Band5	836.6	NV	10	7.78	0.009300	±2.5	PASS
Band5	836.6	NV	20	0.92	0.001100	±2.5	PASS
Band5	836.6	NV	30	-3.7	-0.004423	±2.5	PASS
Band5	836.6	NV	40	-3.26	-0.003897	±2.5	PASS
Band5	836.6	NV	50	-4.51	-0.005391	±2.5	PASS
Band5	846.6	NV	-30	4.52	0.005339	±2.5	PASS
Band5	846.6	NV	-20	4.89	0.005776	±2.5	PASS
Band5	846.6	NV	0	-3.6	-0.004252	±2.5	PASS
Band5	846.6	NV	10	-4.59	-0.005422	±2.5	PASS
Band5	846.6	NV	20	2.32	0.002740	±2.5	PASS
Band5	846.6	NV	30	8.11	0.009579	±2.5	PASS
Band5	846.6	NV	40	-0.12	-0.000142	±2.5	PASS
Band5	846.6	NV	50	-6.29	-0.007430	±2.5	PASS



Test Report No.: W7L-P23010004-2RF01

LTE BAND5


PEAK-TO-AVERAGE RATIO(CCDF)

Test Result

Band5	10MHz	QPSK	20450	1RB#0	4.70	13	PASS
Band5	10MHz	QPSK	20450	50RB#0	5.33	13	PASS
Band5	10MHz	QPSK	20525	1RB#0	5.04	13	PASS
Band5	10MHz	QPSK	20525	50RB#0	5.74	13	PASS
Band5	10MHz	QPSK	20600	1RB#0	4.93	13	PASS
Band5	10MHz	QPSK	20600	50RB#0	5.16	13	PASS
Band5	10MHz	16QAM	20450	1RB#0	5.48	13	PASS
Band5	10MHz	16QAM	20450	50RB#0	6.35	13	PASS
Band5	10MHz	16QAM	20525	1RB#0	5.94	13	PASS
Band5	10MHz	16QAM	20525	50RB#0	6.75	13	PASS
Band5	10MHz	16QAM	20600	1RB#0	5.45	13	PASS
Band5	10MHz	16QAM	20600	50RB#0	6.06	13	PASS
Band5	10MHz	64QAM	20450	1RB#0	6.12	13	PASS
Band5	10MHz	64QAM	20450	50RB#0	6.49	13	PASS
Band5	10MHz	64QAM	20525	1RB#0	6.23	13	PASS
Band5	10MHz	64QAM	20525	50RB#0	6.43	13	PASS
Band5	10MHz	64QAM	20600	1RB#0	6.29	13	PASS
Band5	10MHz	64QAM	20600	50RB#0	6.35	13	PASS




Test Graphs

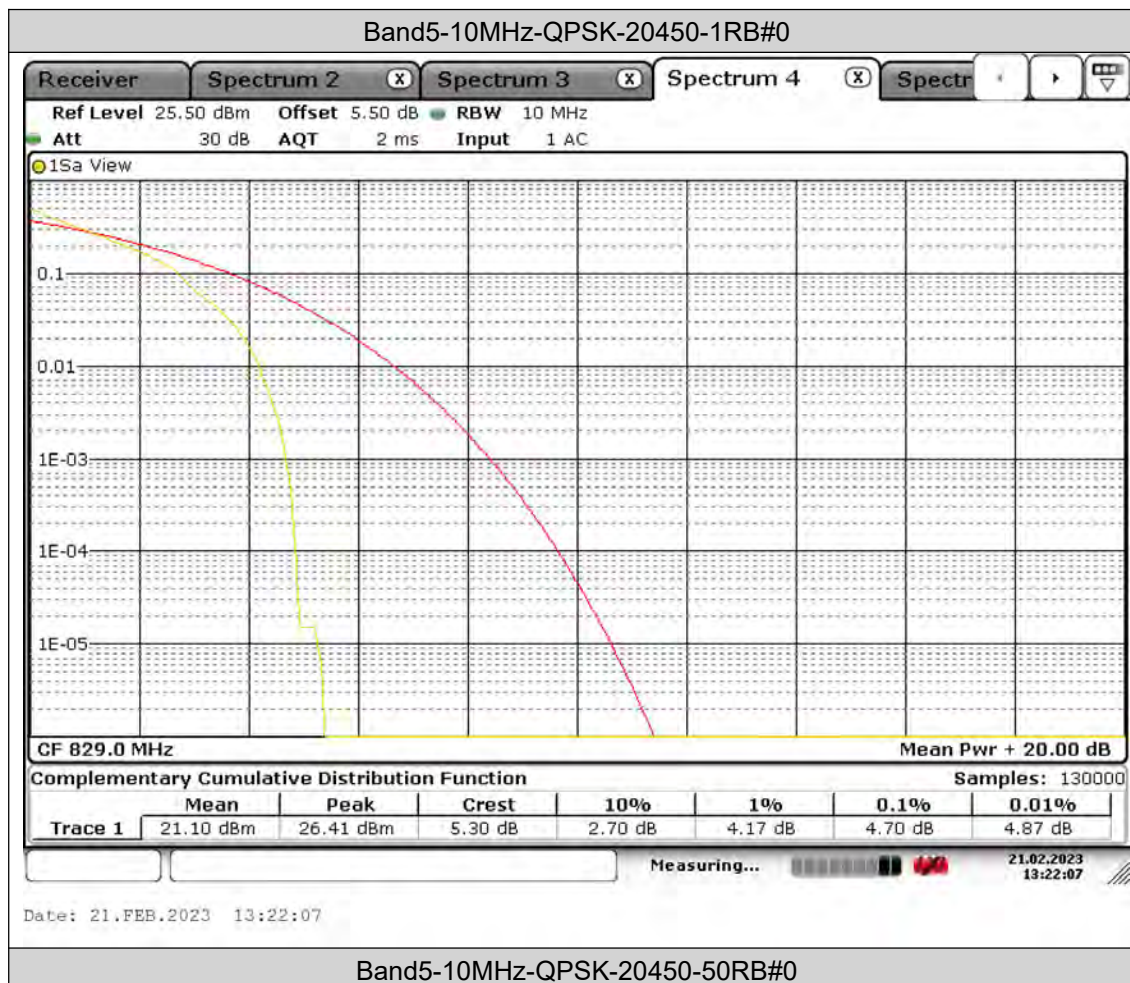



BUREAU VERITAS


Test Report No.: W7L-P23010004-2RF01

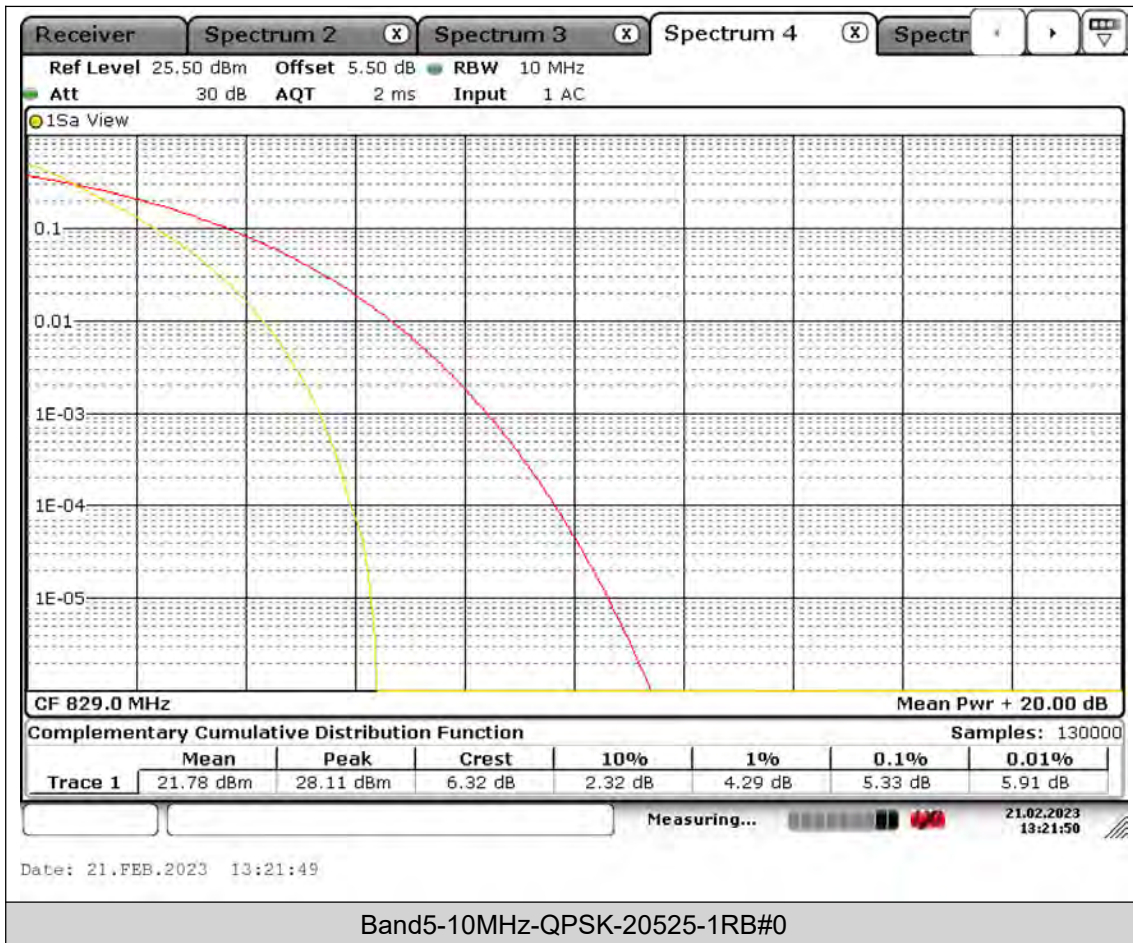



BUREAU VERITAS


Test Report No.: W7L-P23010004-2RF01

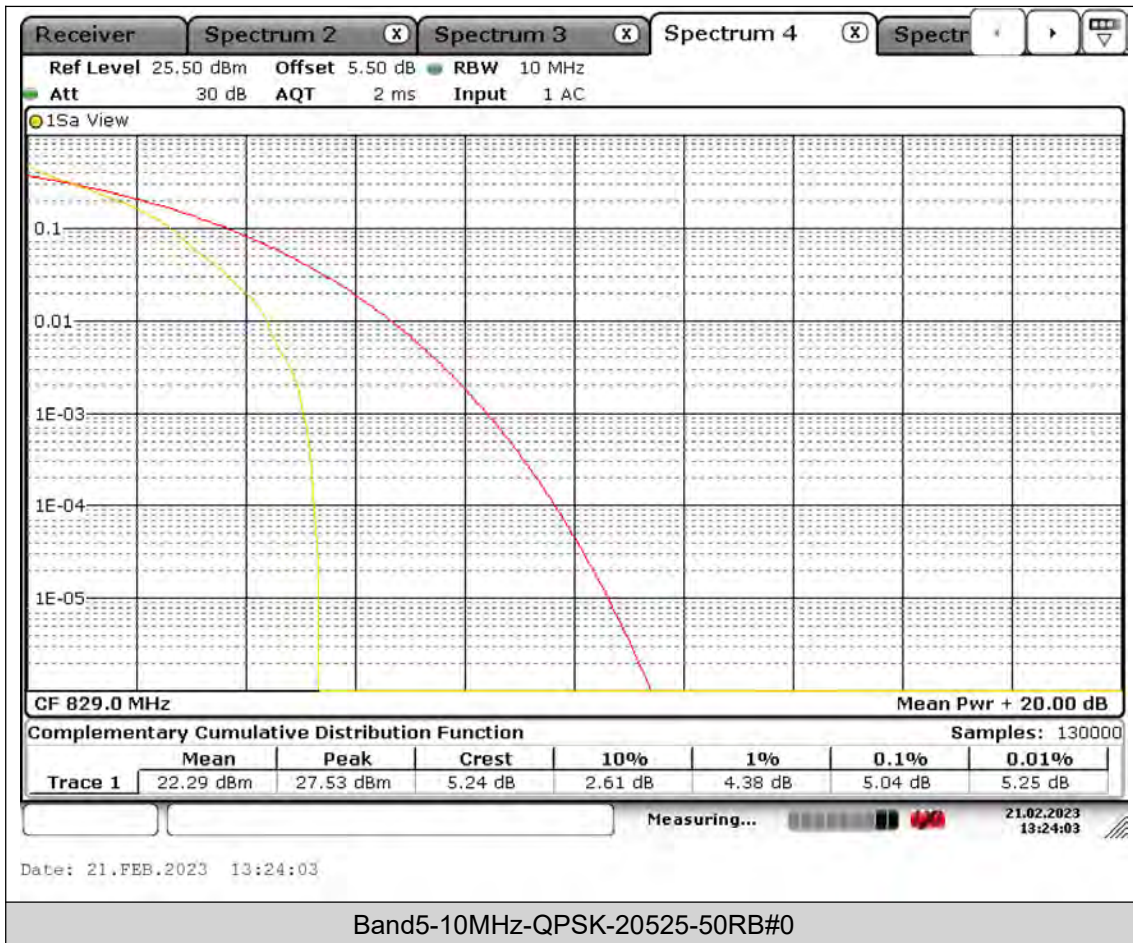



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

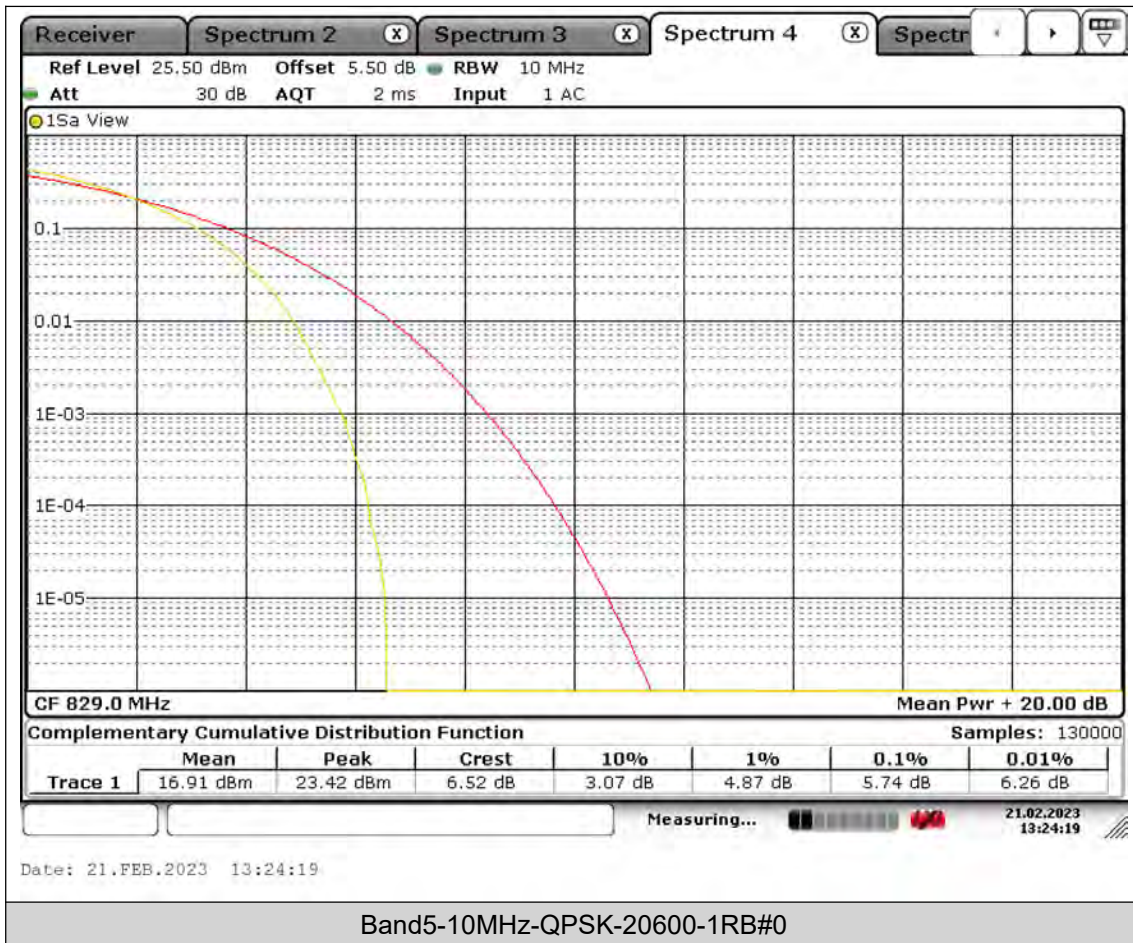



BUREAU VERITAS


Test Report No.: W7L-P23010004-2RF01

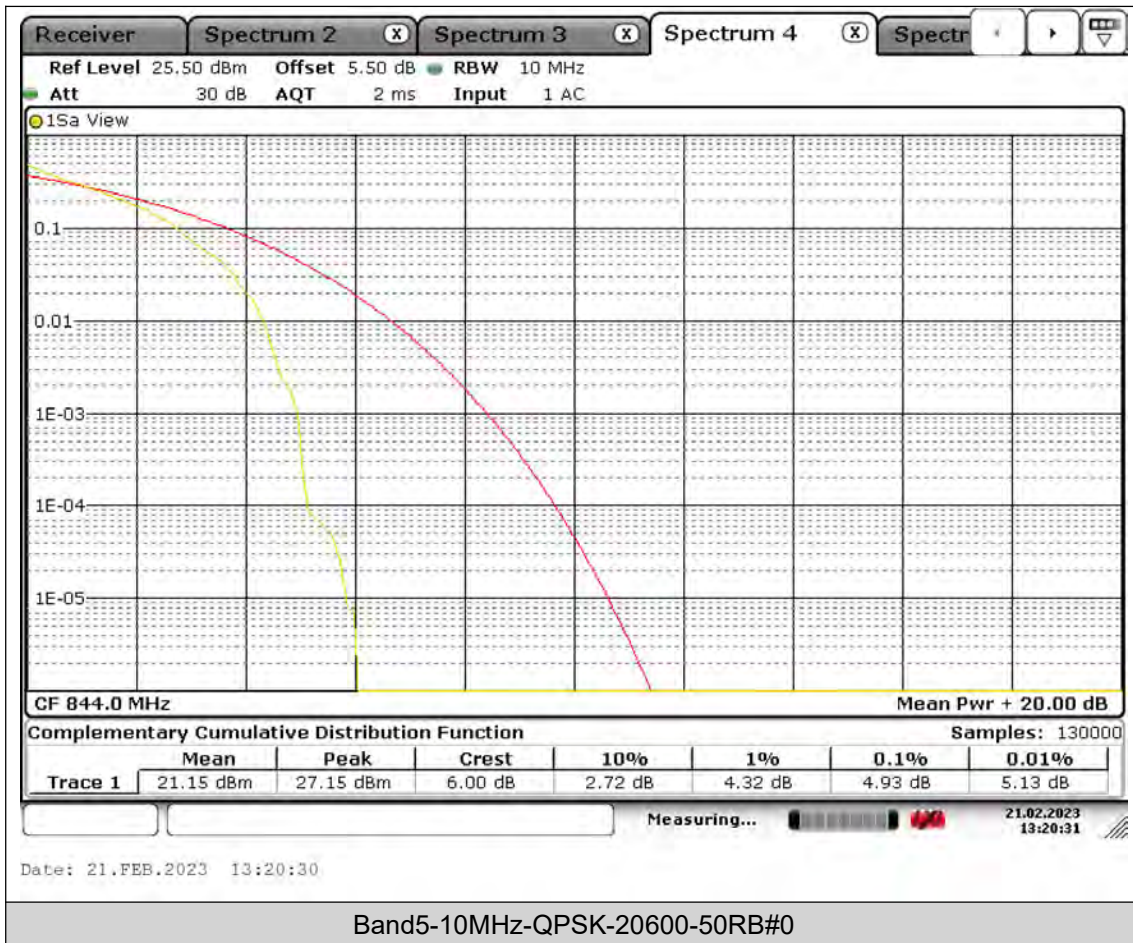



BUREAU VERITAS


Test Report No.: W7L-P23010004-2RF01

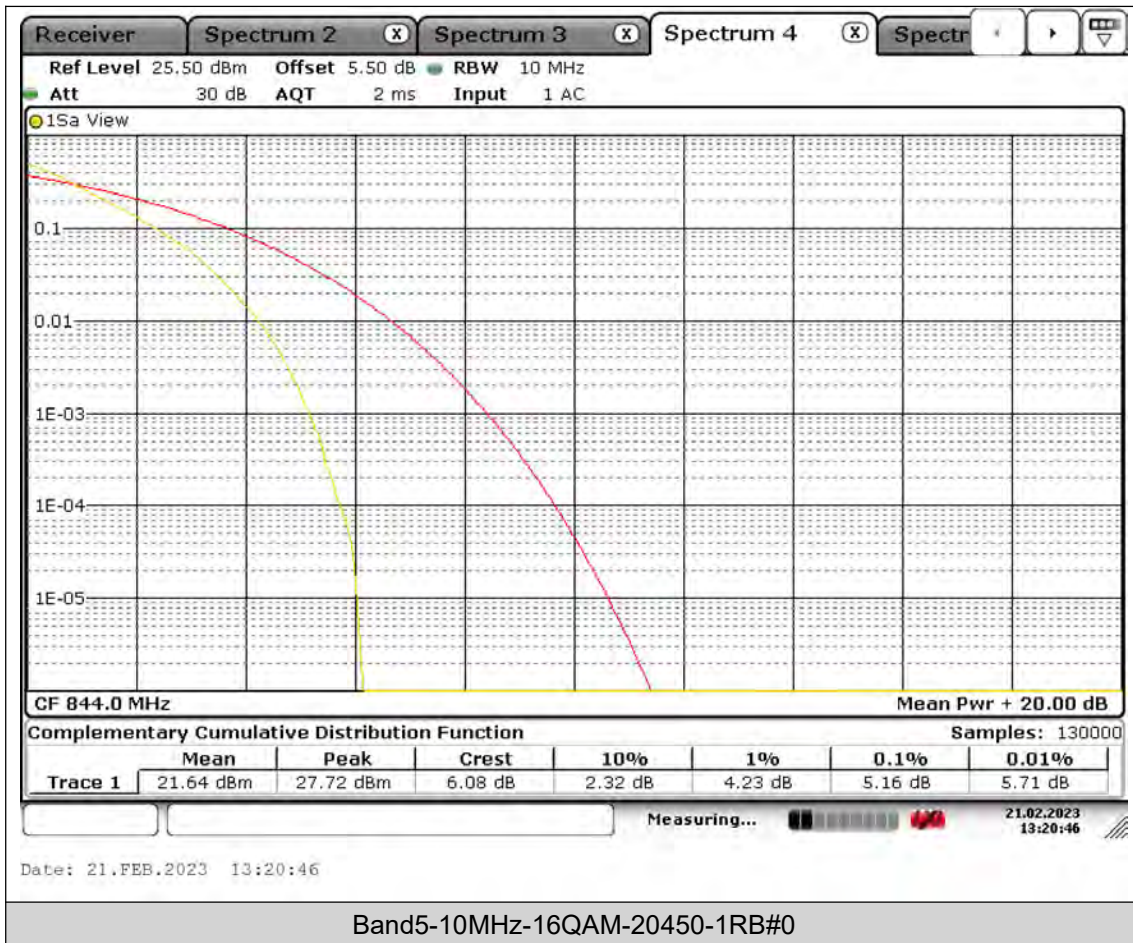



BUREAU VERITAS


Test Report No.: W7L-P23010004-2RF01

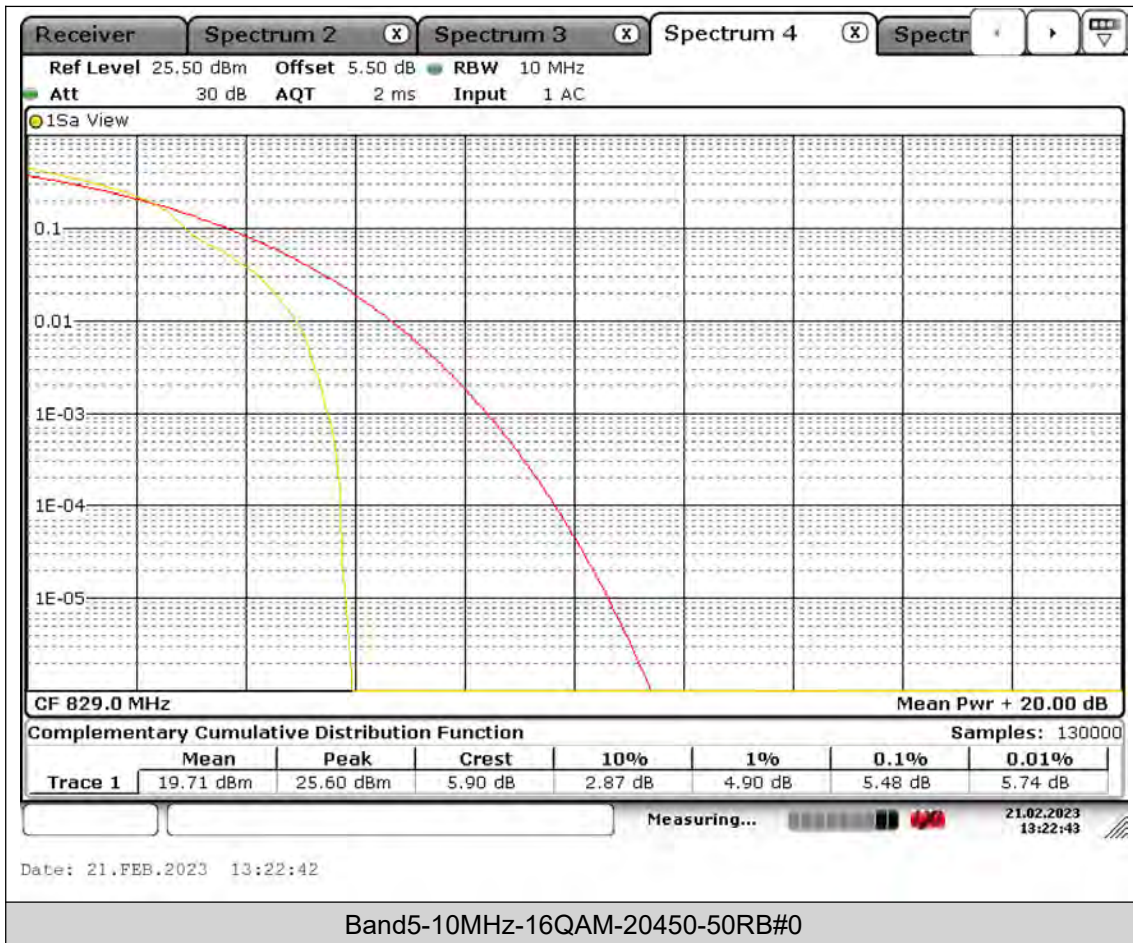



BUREAU VERITAS


Test Report No.: W7L-P23010004-2RF01

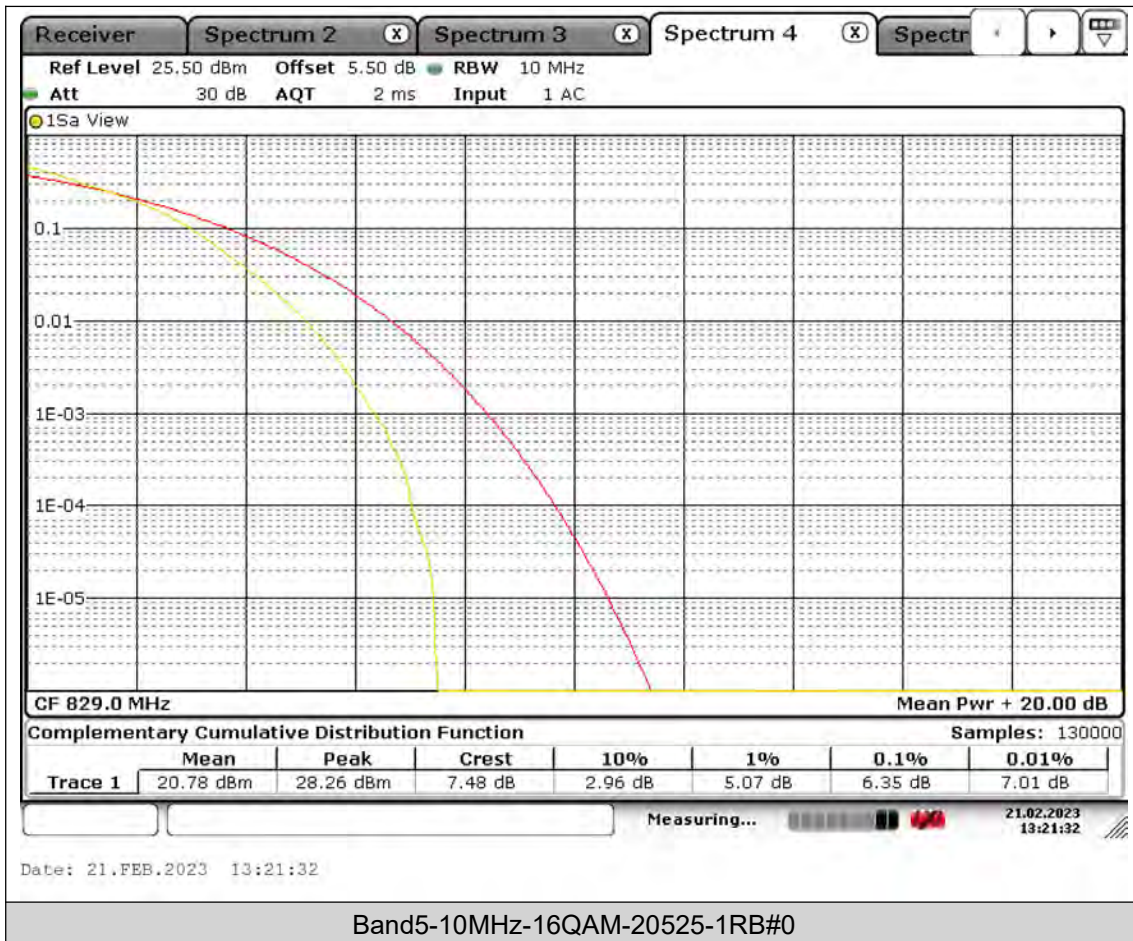



BUREAU VERITAS


Test Report No.: W7L-P23010004-2RF01

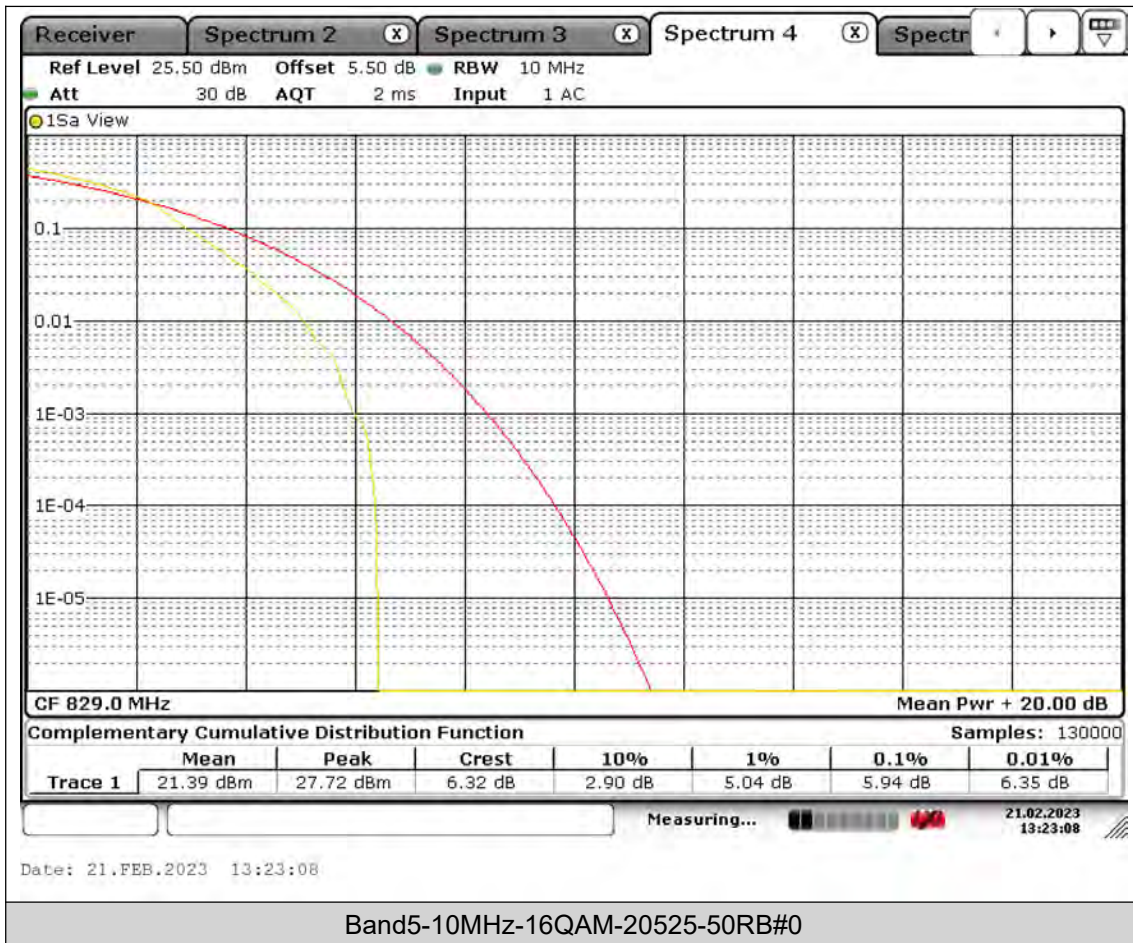



BUREAU VERITAS


Test Report No.: W7L-P23010004-2RF01

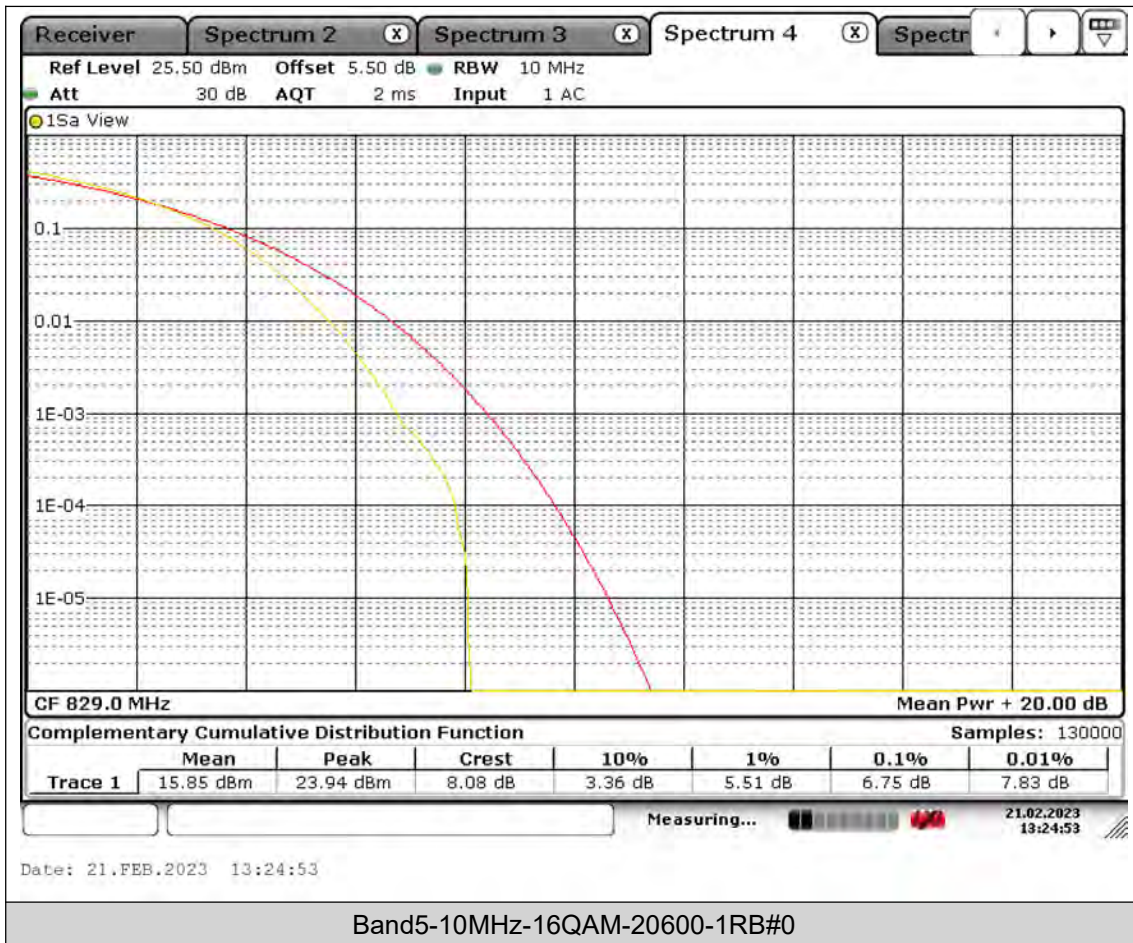



BUREAU VERITAS


Test Report No.: W7L-P23010004-2RF01

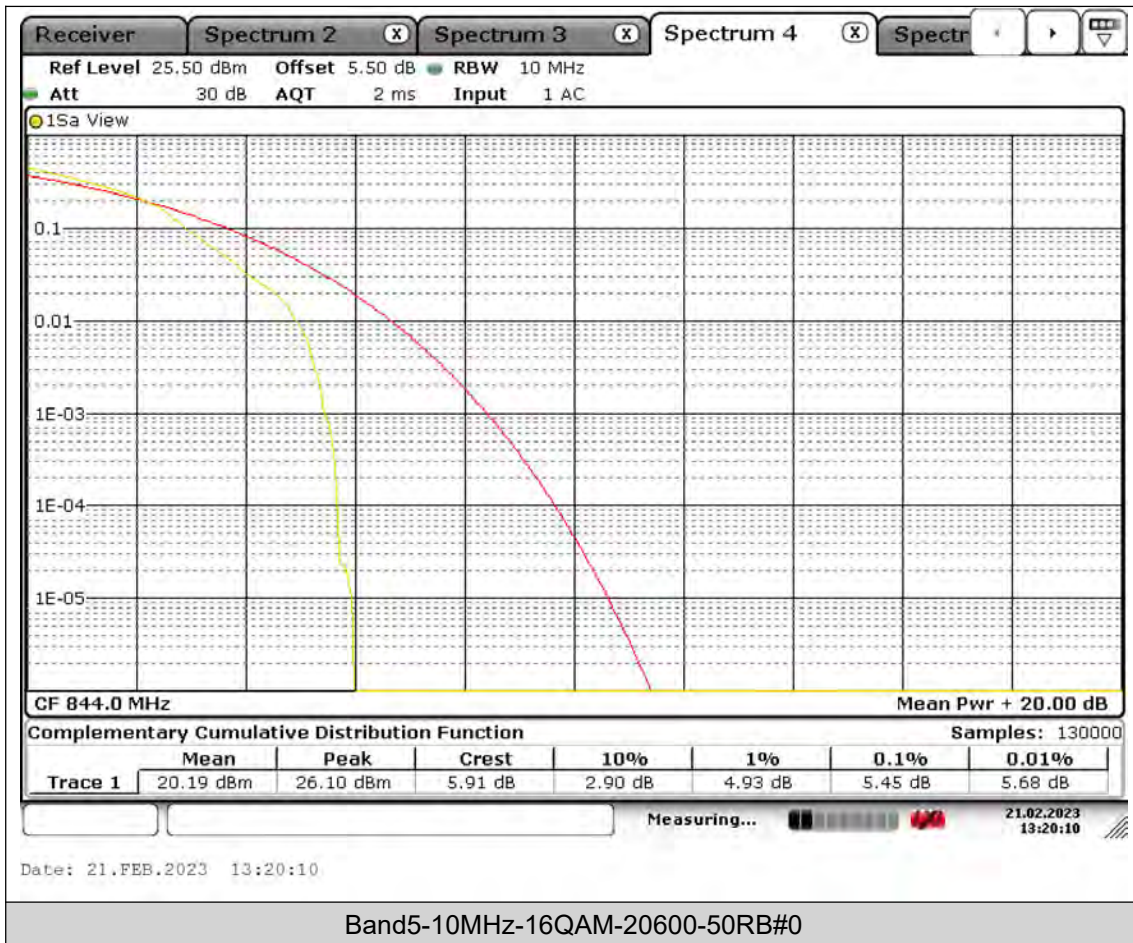



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

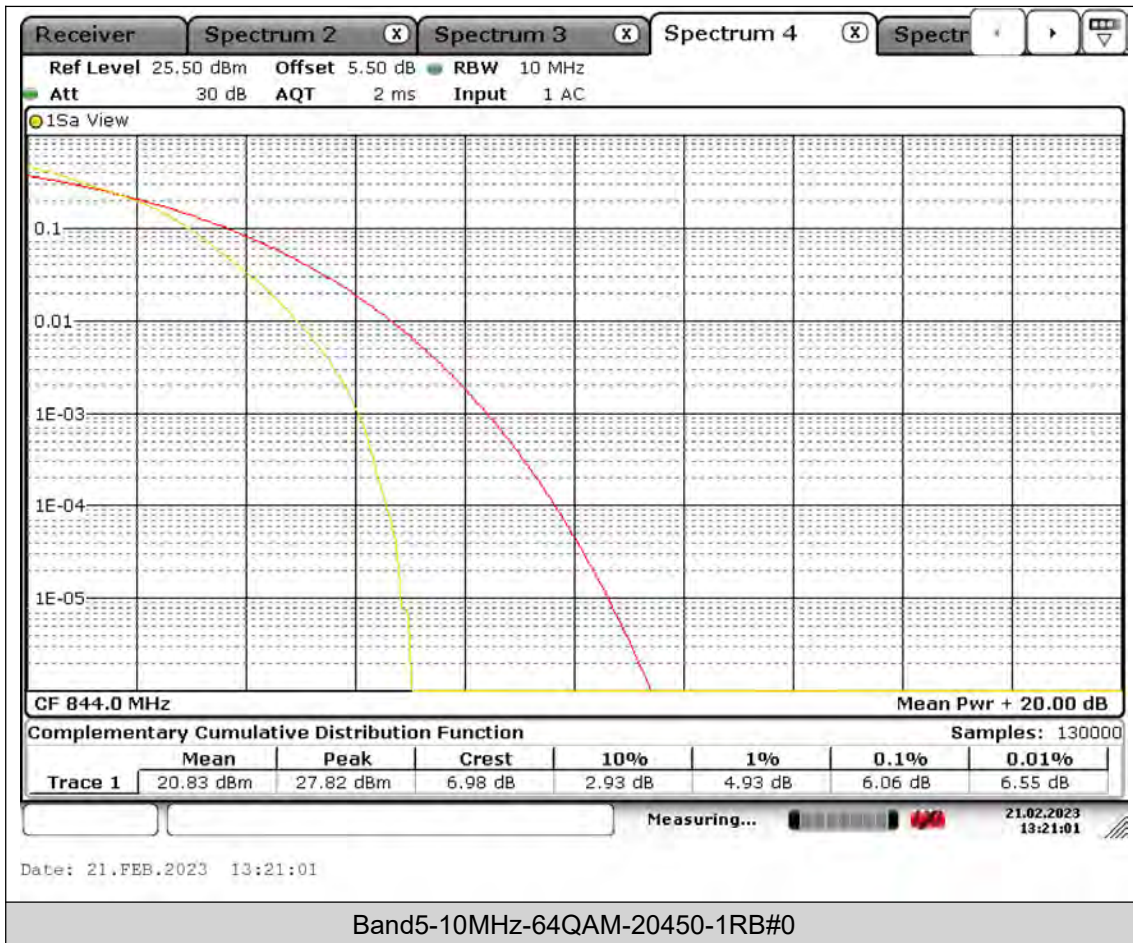



BUREAU VERITAS


Test Report No.: W7L-P23010004-2RF01

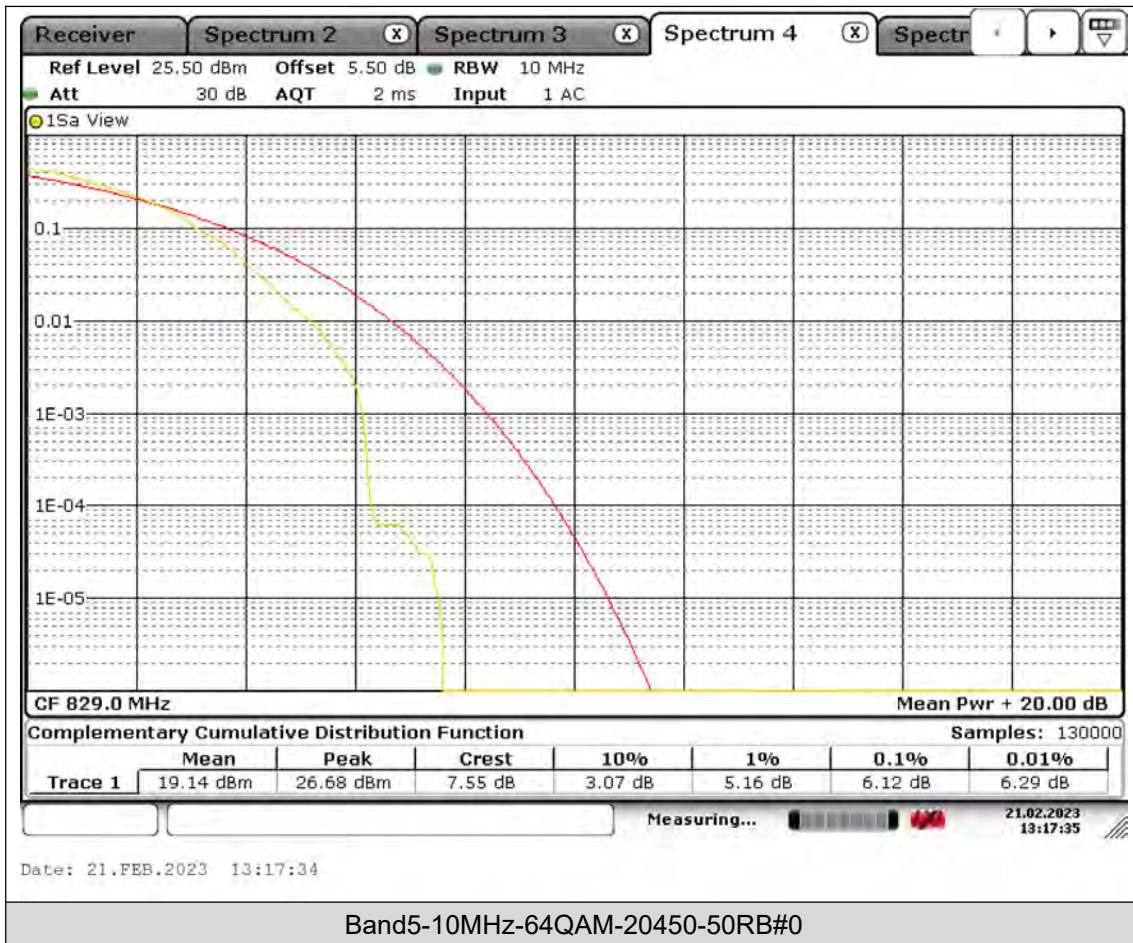



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

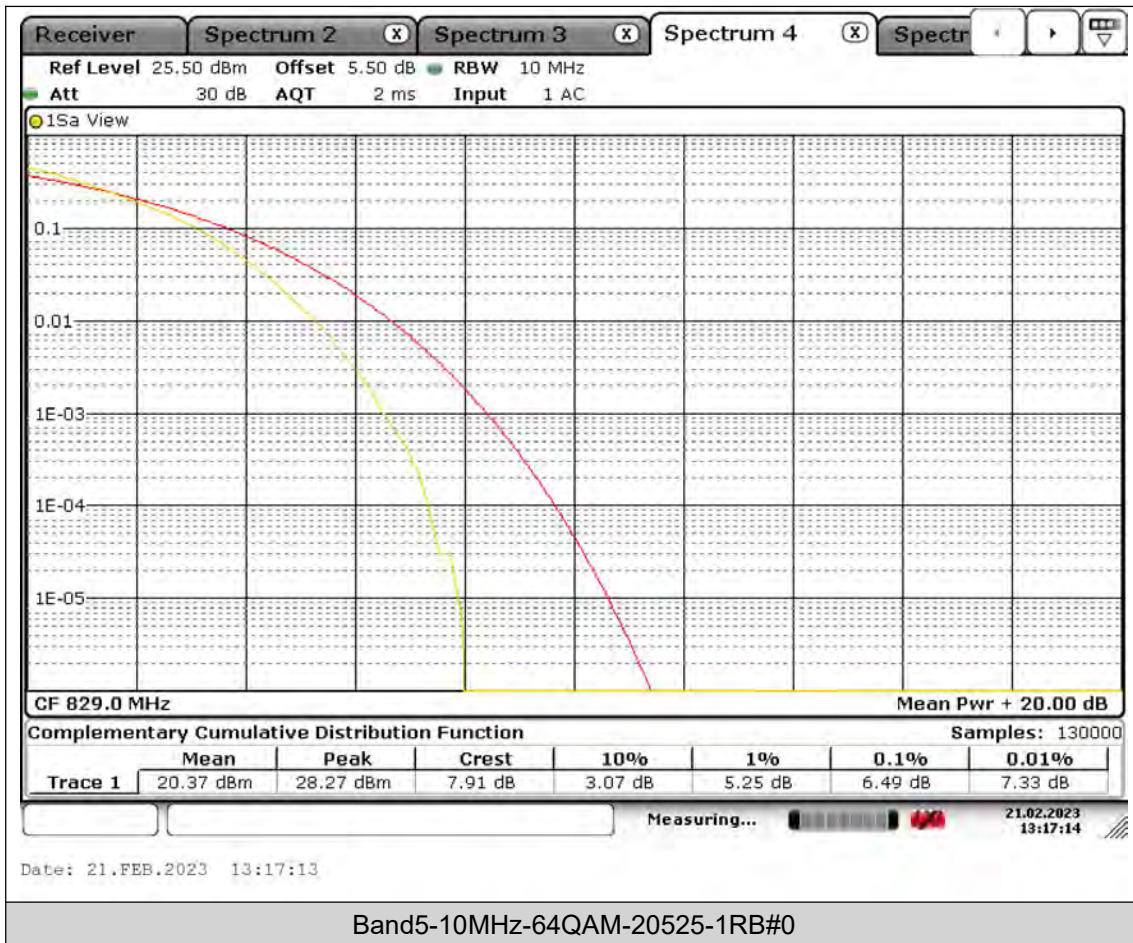



BUREAU VERITAS


Test Report No.: W7L-P23010004-2RF01

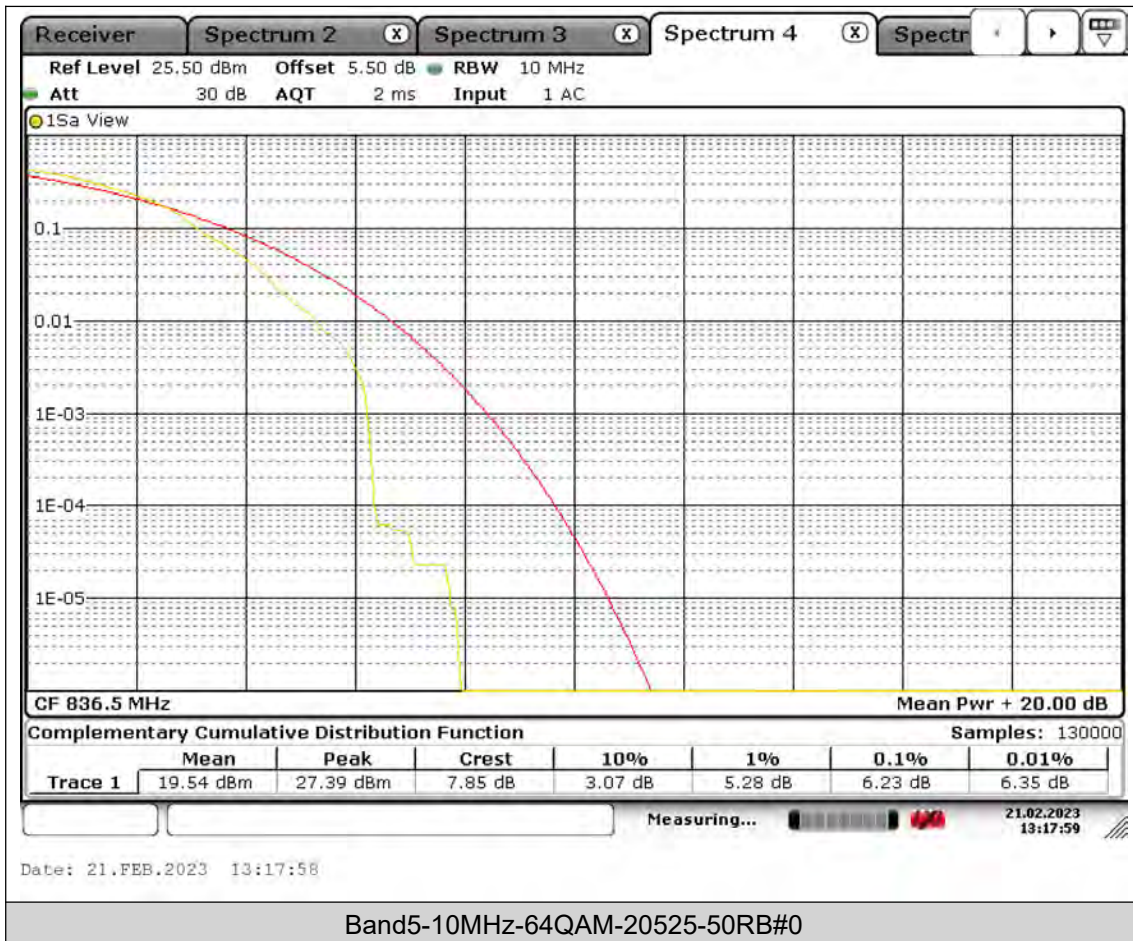



BUREAU VERITAS


Test Report No.: W7L-P23010004-2RF01

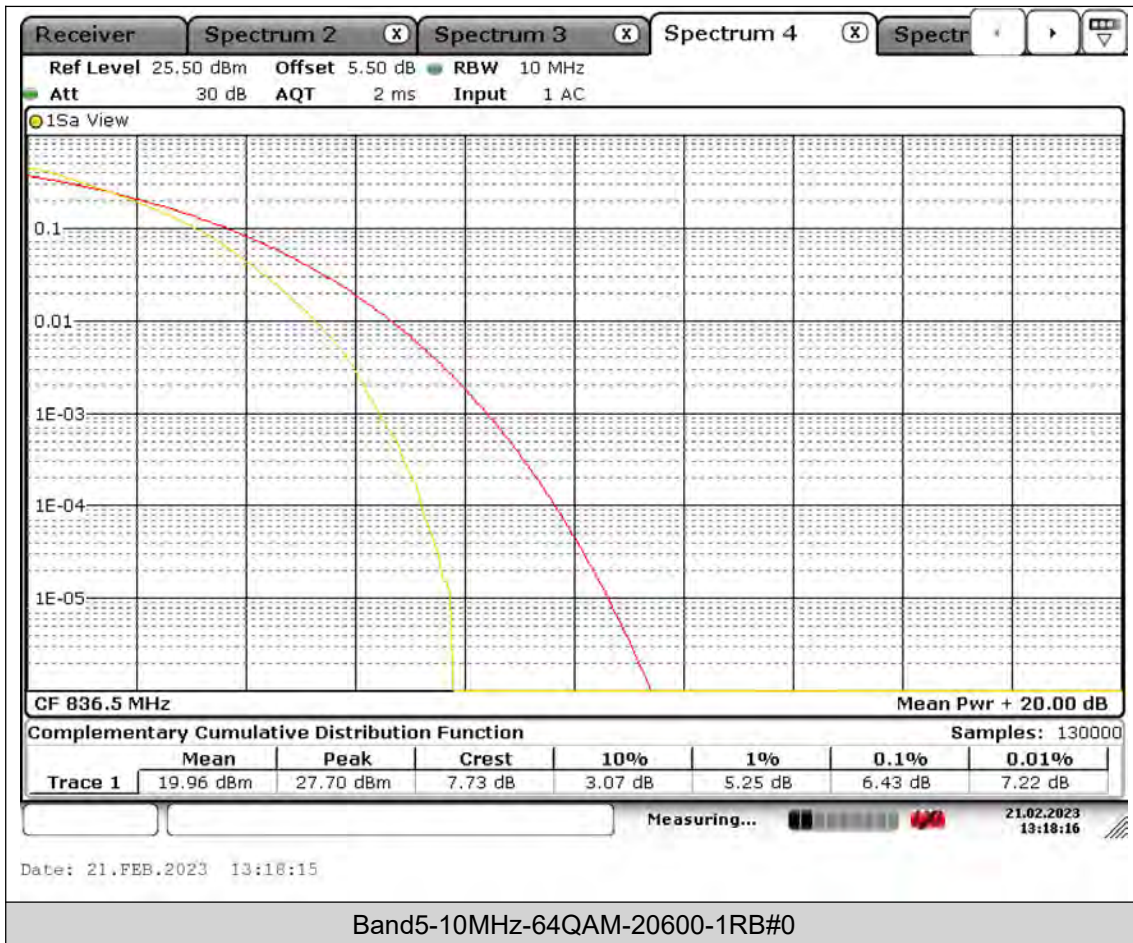



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

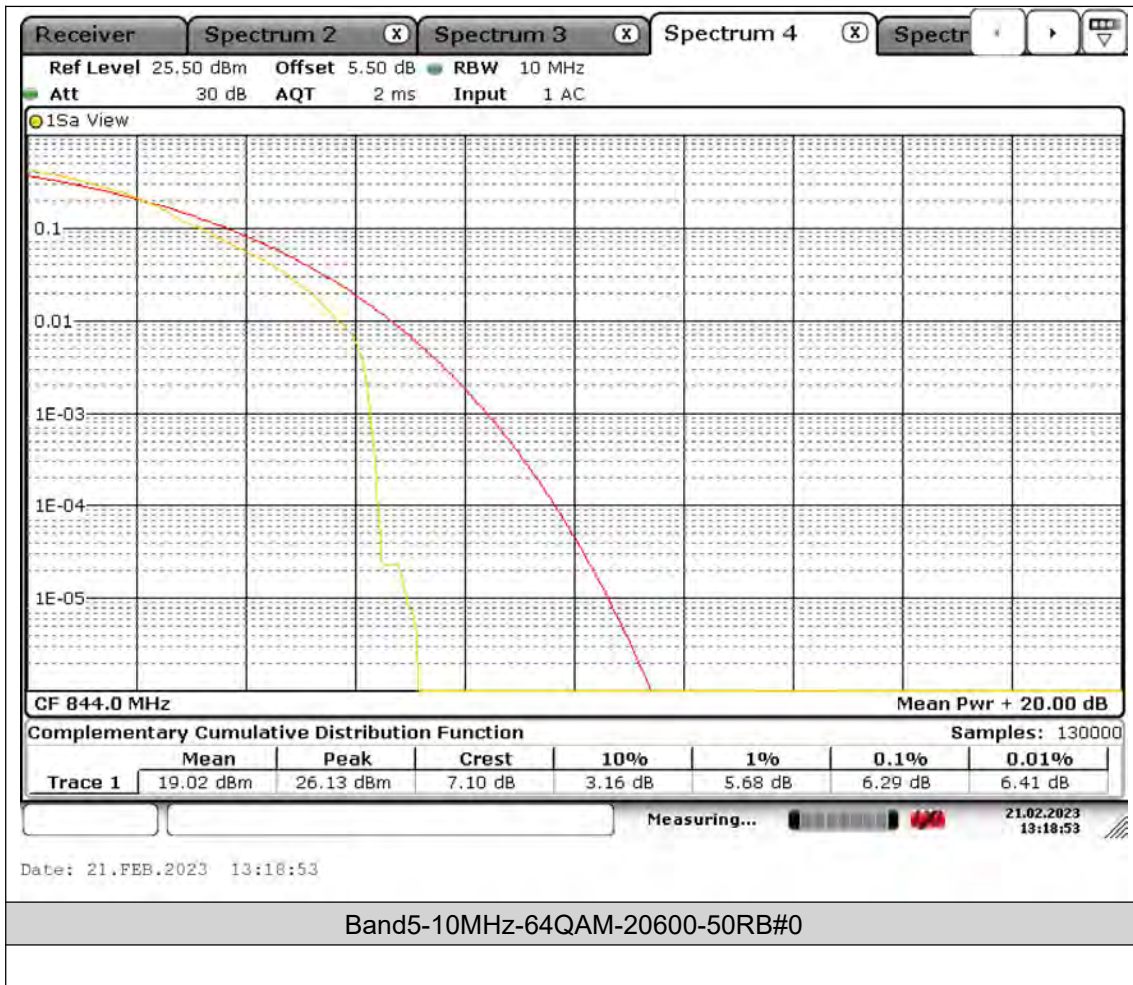



BUREAU
VERITAS

Test Report No.: W7L-P23010004-2RF01

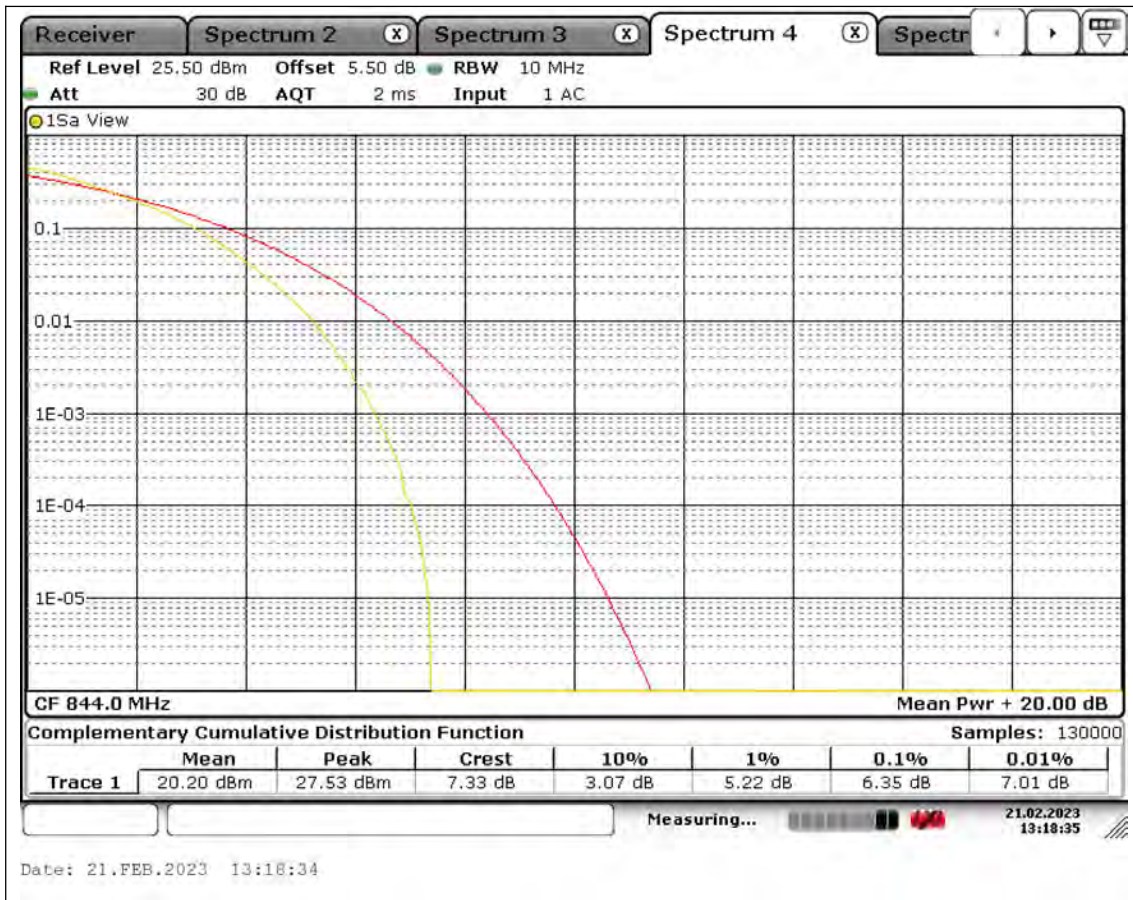



26DB BANDWIDTH AND OCCUPIED BANDWIDTH


Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
Band5	1.4MHz	QPSK	20407	6RB#0	1.086	1.240	PASS
Band5	1.4MHz	QPSK	20525	6RB#0	1.090	1.244	PASS
Band5	1.4MHz	QPSK	20643	6RB#0	1.098	1.244	PASS
Band5	1.4MHz	16QAM	20407	6RB#0	1.098	1.240	PASS
Band5	1.4MHz	16QAM	20525	6RB#0	1.094	1.236	PASS
Band5	1.4MHz	16QAM	20643	6RB#0	1.090	1.240	PASS
Band5	3MHz	QPSK	20415	15RB#0	2.770	3.065	PASS
Band5	3MHz	QPSK	20525	15RB#0	2.744	3.091	PASS
Band5	3MHz	QPSK	20635	15RB#0	2.735	3.091	PASS
Band5	3MHz	16QAM	20415	15RB#0	2.735	3.109	PASS
Band5	3MHz	16QAM	20525	15RB#0	2.735	3.083	PASS
Band5	3MHz	16QAM	20635	15RB#0	2.744	3.056	PASS
Band5	5MHz	QPSK	20425	25RB#0	4.501	4.935	PASS
Band5	5MHz	QPSK	20525	25RB#0	4.486	4.863	PASS
Band5	5MHz	QPSK	20625	25RB#0	4.645	4.877	PASS
Band5	5MHz	16QAM	20425	25RB#0	4.486	4.863	PASS
Band5	5MHz	16QAM	20525	25RB#0	4.515	4.920	PASS
Band5	5MHz	16QAM	20625	25RB#0	4.660	4.964	PASS
Band5	10MHz	QPSK	20450	50RB#0	9.059	9.783	PASS
Band5	10MHz	QPSK	20525	50RB#0	9.059	9.812	PASS
Band5	10MHz	QPSK	20600	50RB#0	9.059	9.986	PASS
Band5	10MHz	16QAM	20450	50RB#0	9.001	9.841	PASS
Band5	10MHz	16QAM	20525	50RB#0	9.001	9.841	PASS
Band5	10MHz	16QAM	20600	50RB#0	9.001	9.812	PASS
Band5	1.4MHz	64QAM	20407	6RB#0	1.094	1.256	PASS
Band5	1.4MHz	64QAM	20525	6RB#0	1.086	1.240	PASS
Band5	1.4MHz	64QAM	20643	6RB#0	1.094	1.232	PASS
Band5	3MHz	64QAM	20415	15RB#0	2.735	3.074	PASS
Band5	3MHz	64QAM	20525	15RB#0	2.735	3.048	PASS
Band5	3MHz	64QAM	20635	15RB#0	2.770	3.040	PASS
Band5	5MHz	64QAM	20425	25RB#0	4.486	4.978	PASS
Band5	5MHz	64QAM	20525	25RB#0	4.515	4.906	PASS
Band5	5MHz	64QAM	20625	25RB#0	4.472	4.935	PASS
Band5	10MHz	64QAM	20450	50RB#0	9.059	9.754	PASS
Band5	10MHz	64QAM	20525	50RB#0	9.030	9.899	PASS
Band5	10MHz	64QAM	20600	50RB#0	9.030	9.899	PASS



Test Graphs


Occupied Bandwidth

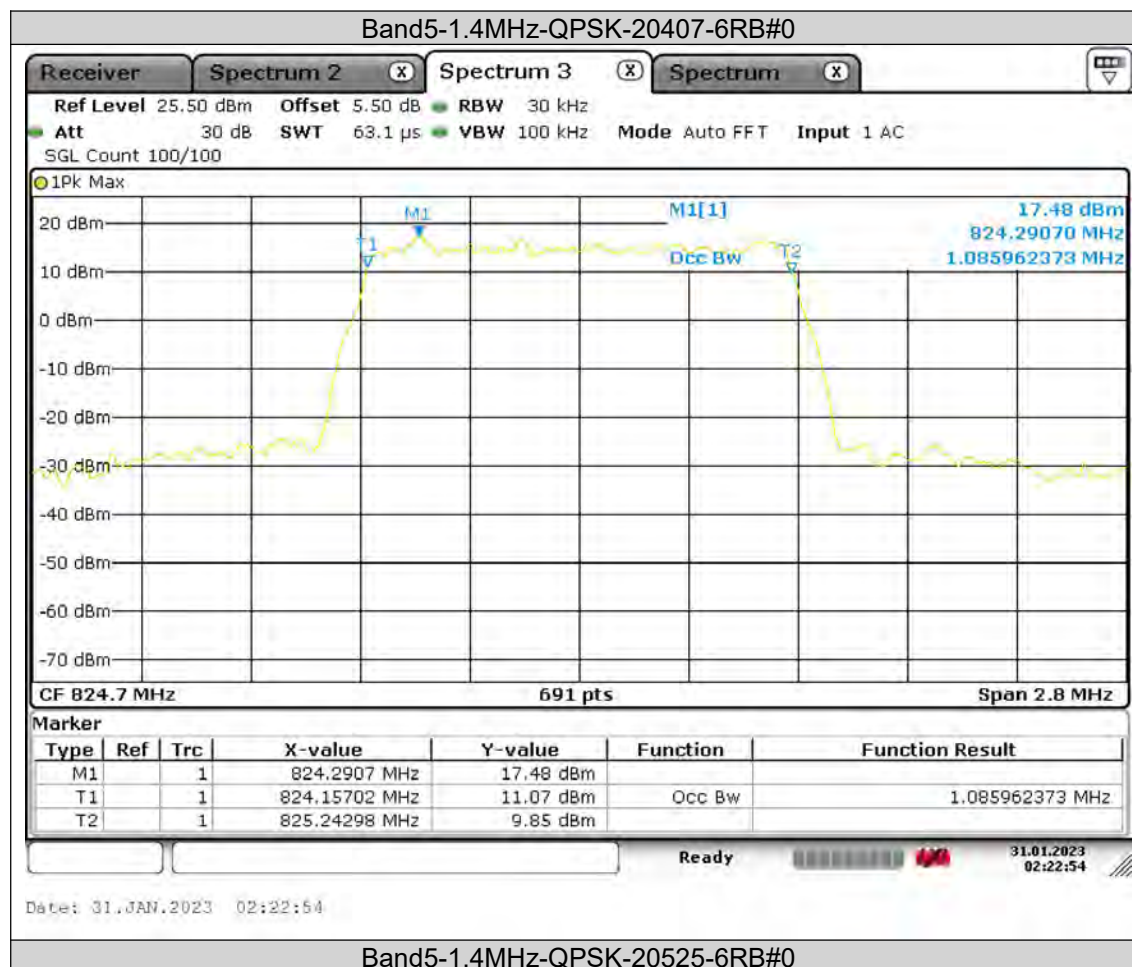



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

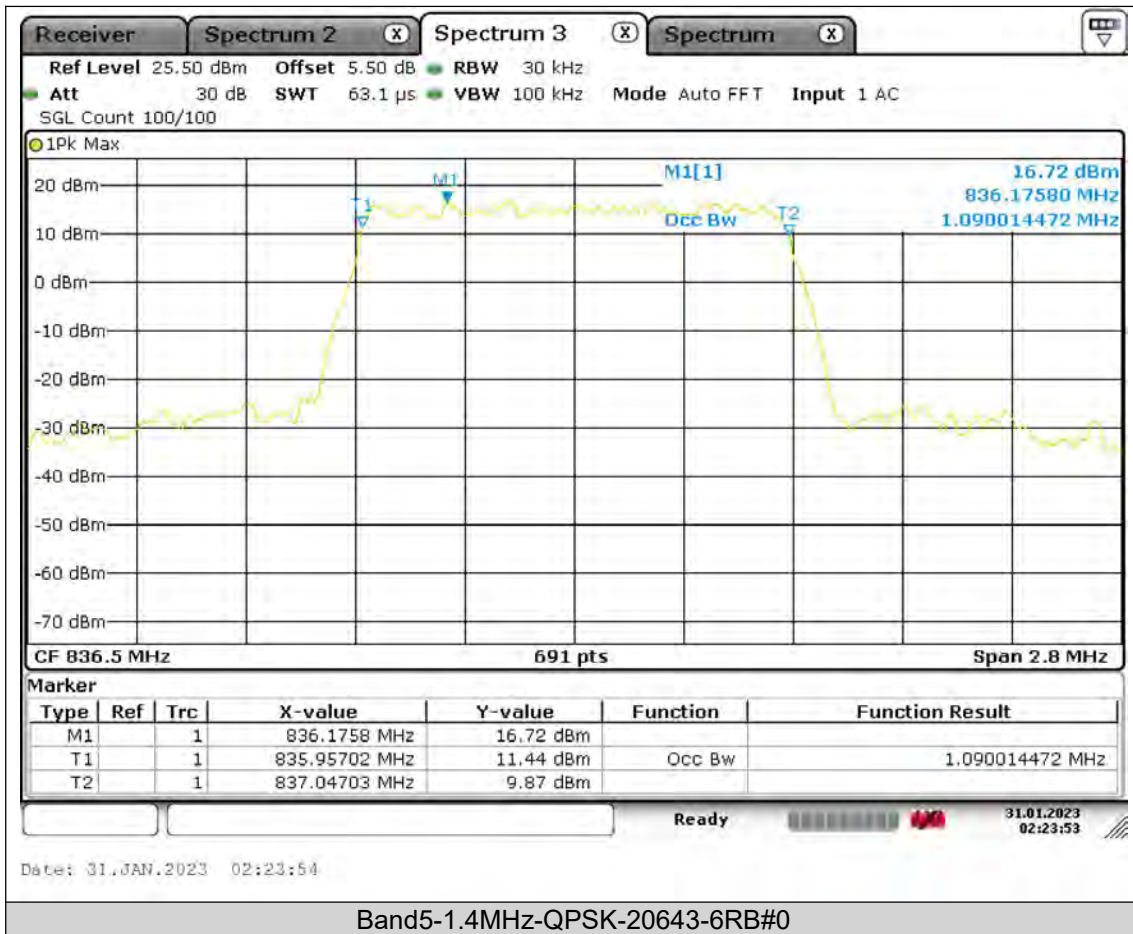



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

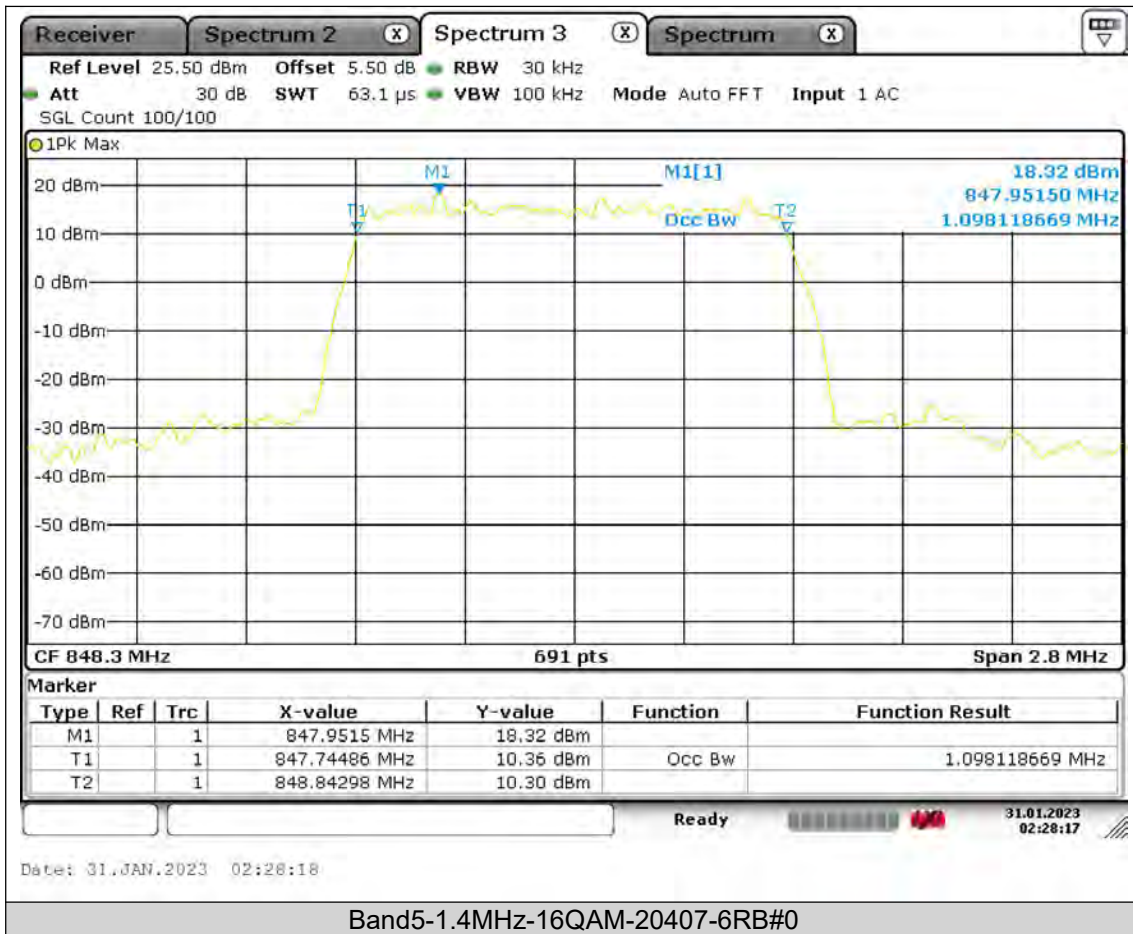



BUREAU VERITAS


Test Report No.: W7L-P23010004-2RF01

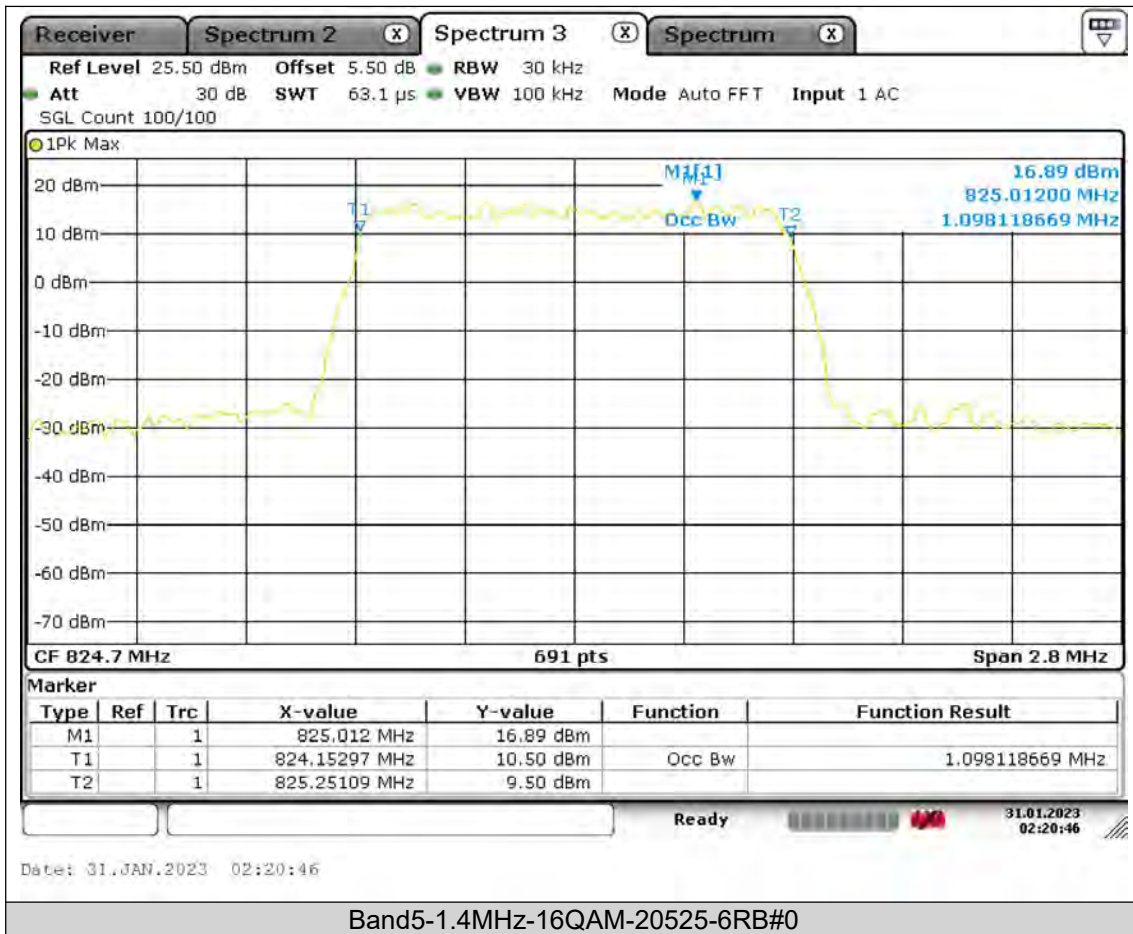



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

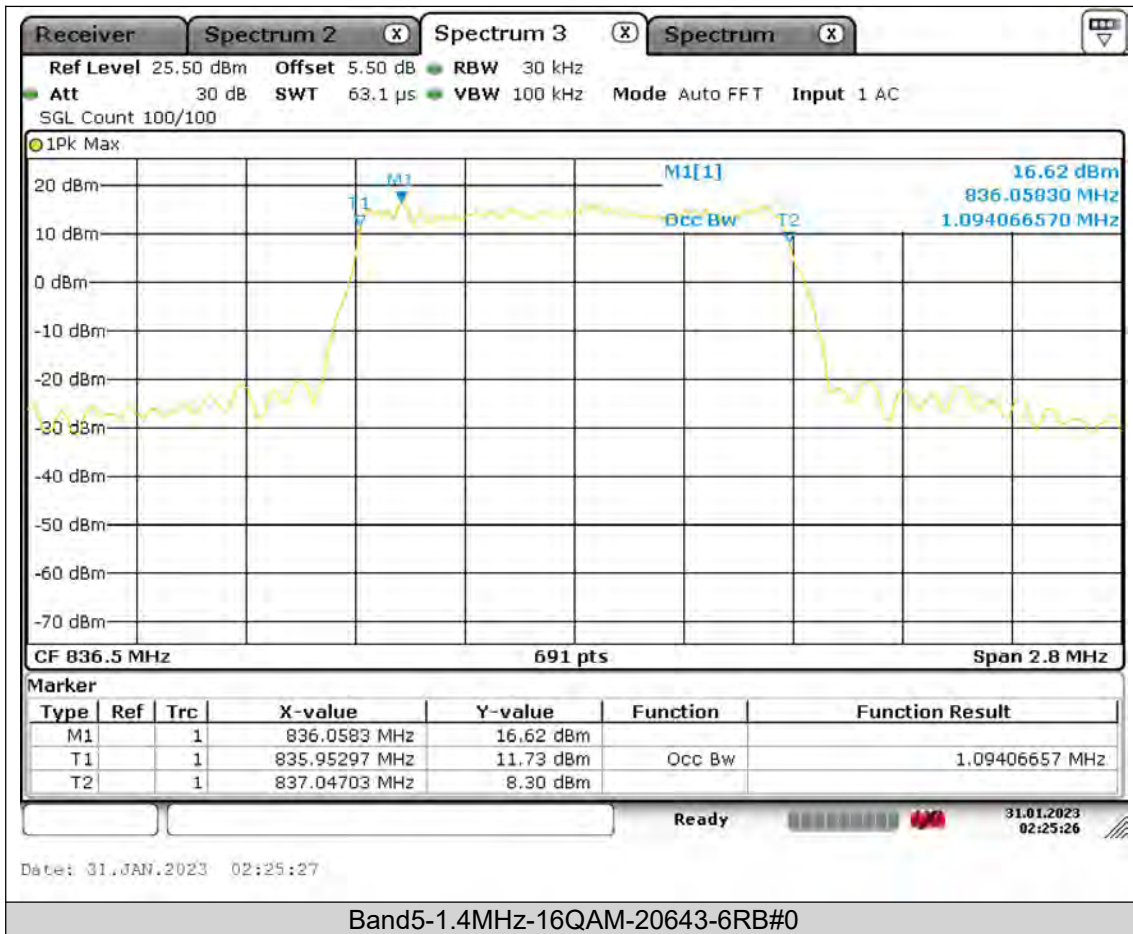



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

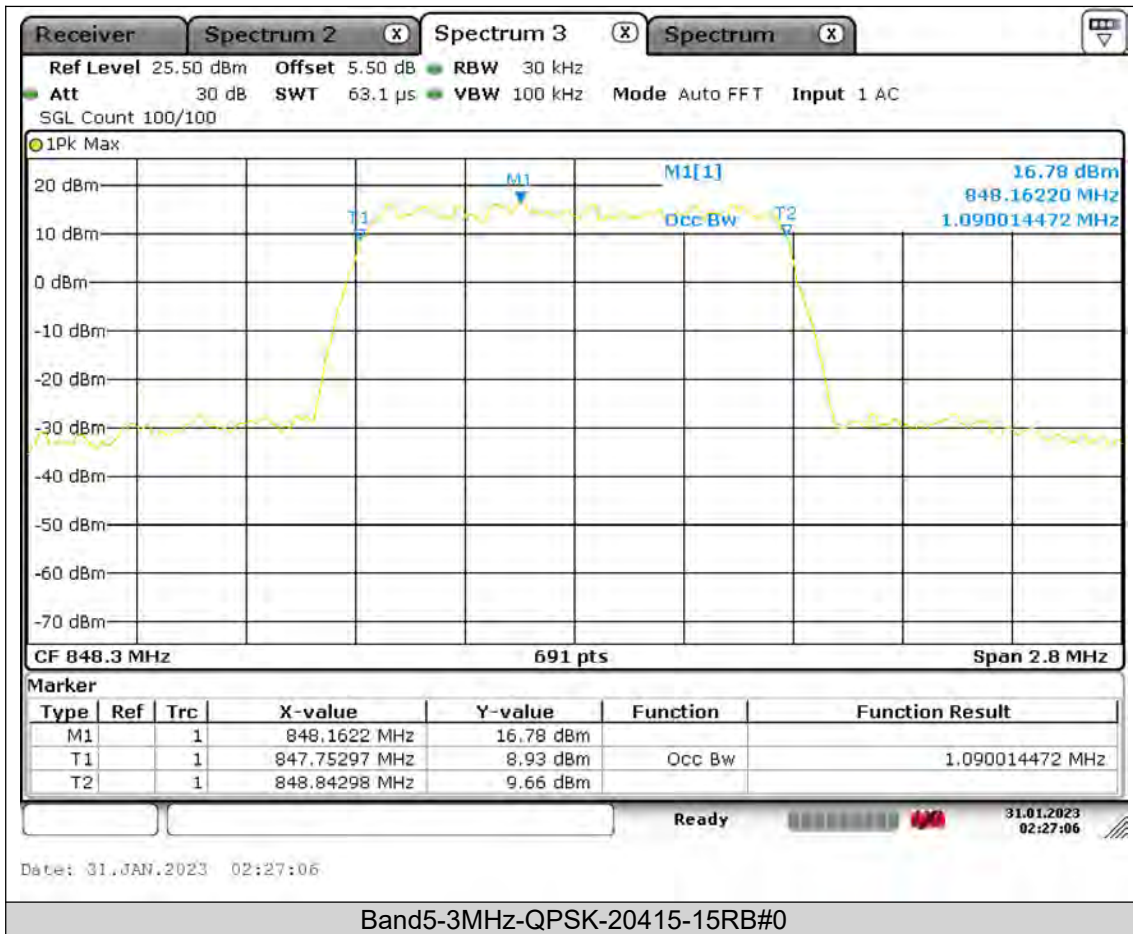



BUREAU VERITAS


Test Report No.: W7L-P23010004-2RF01

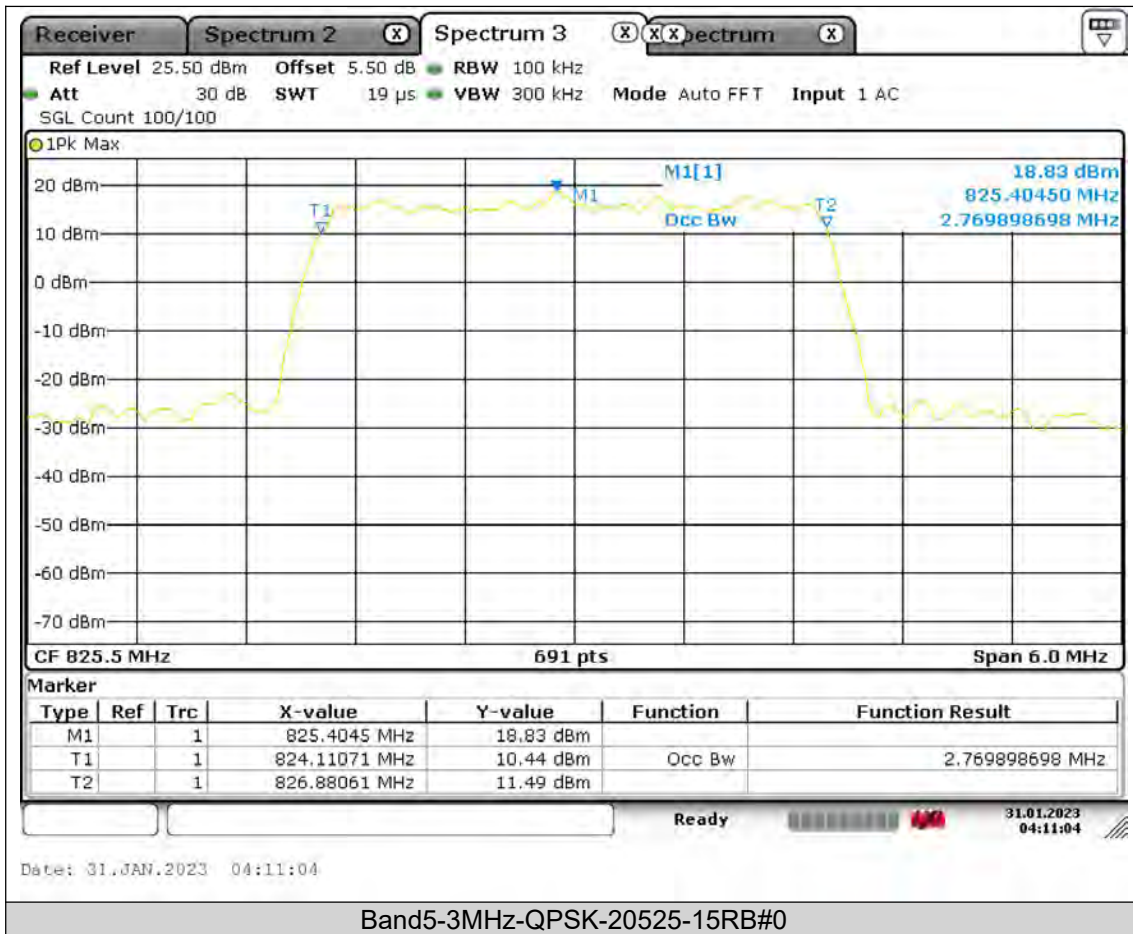



BUREAU VERITAS


Test Report No.: W7L-P23010004-2RF01

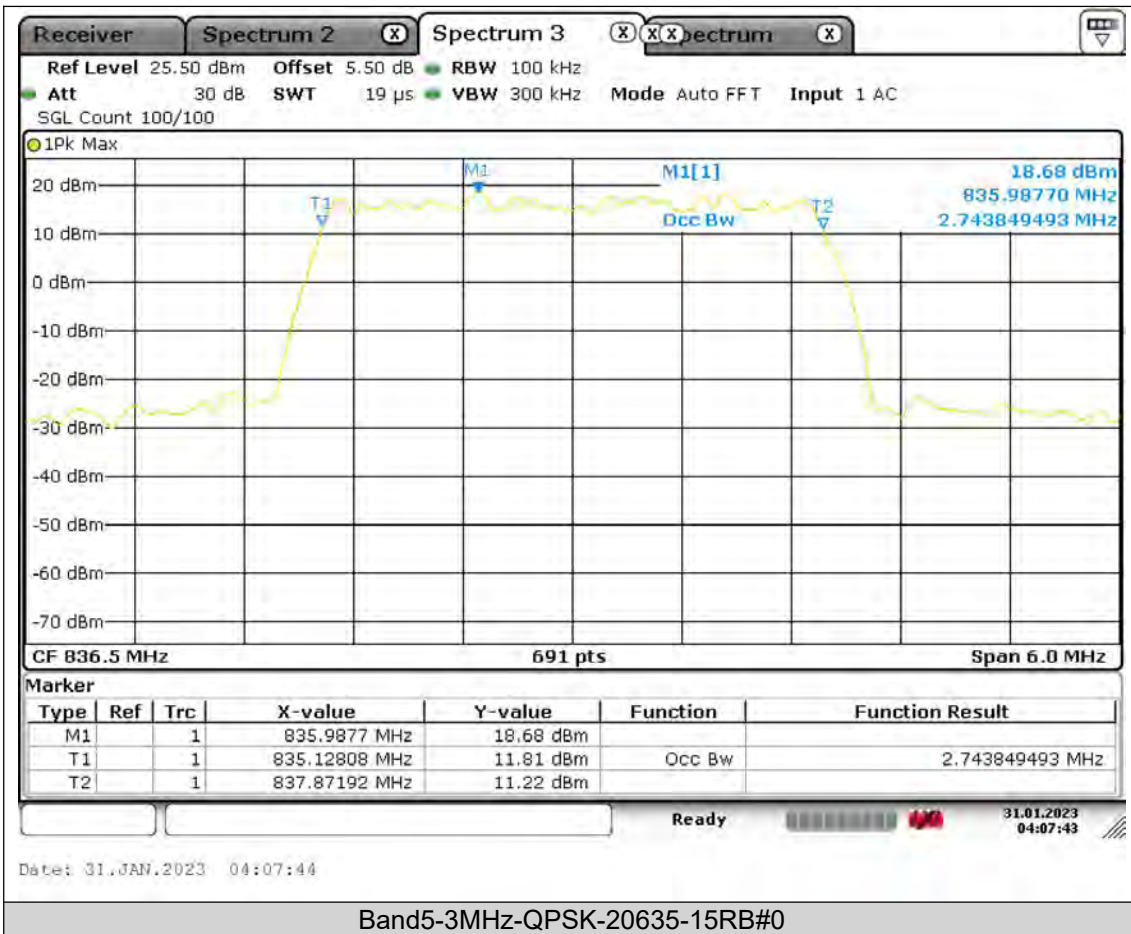



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

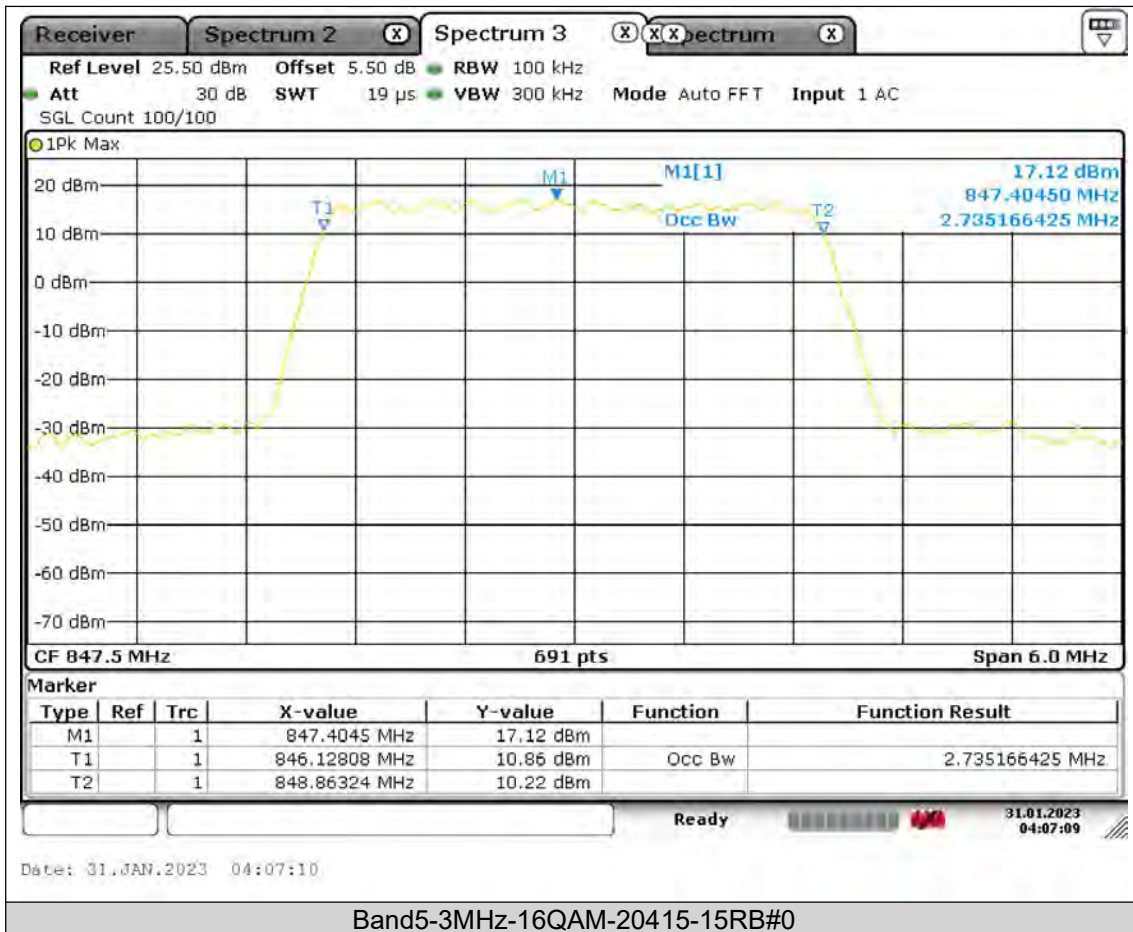



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

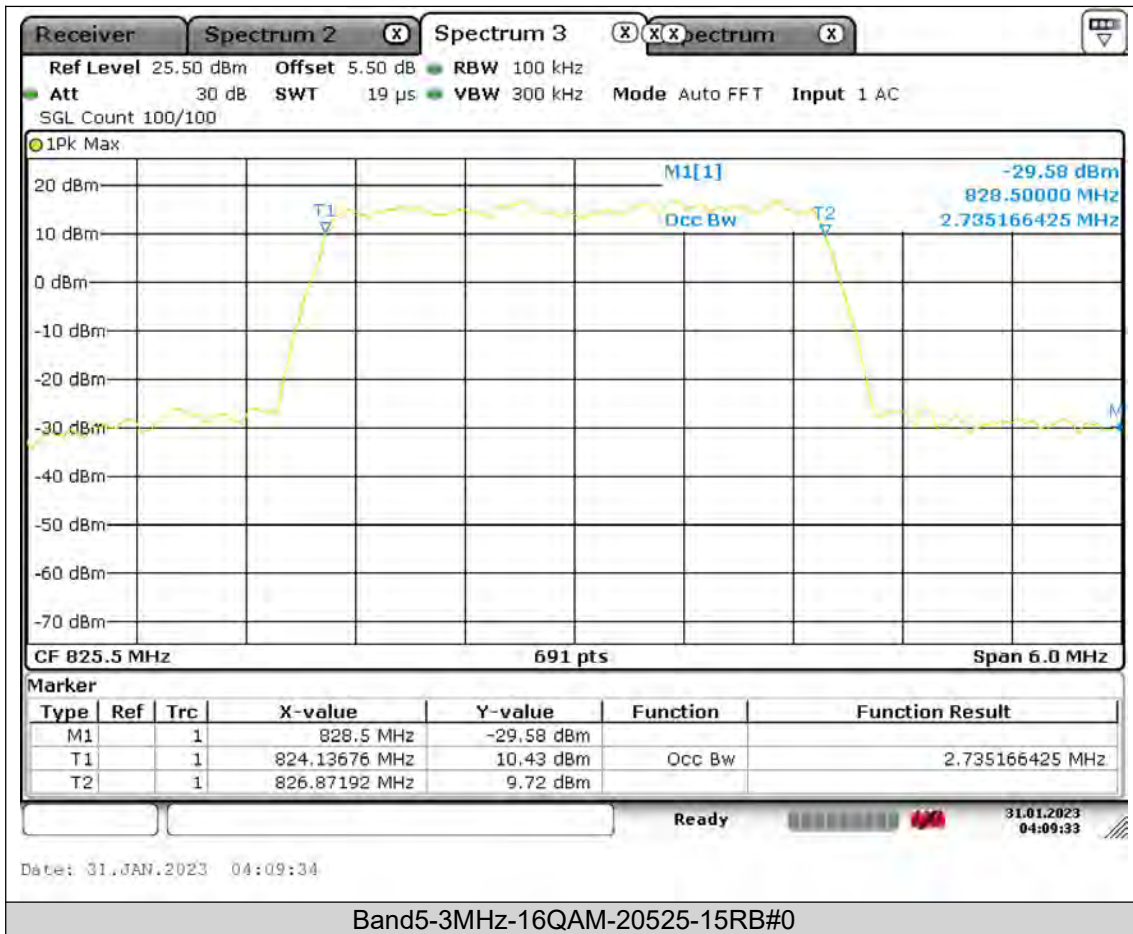



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

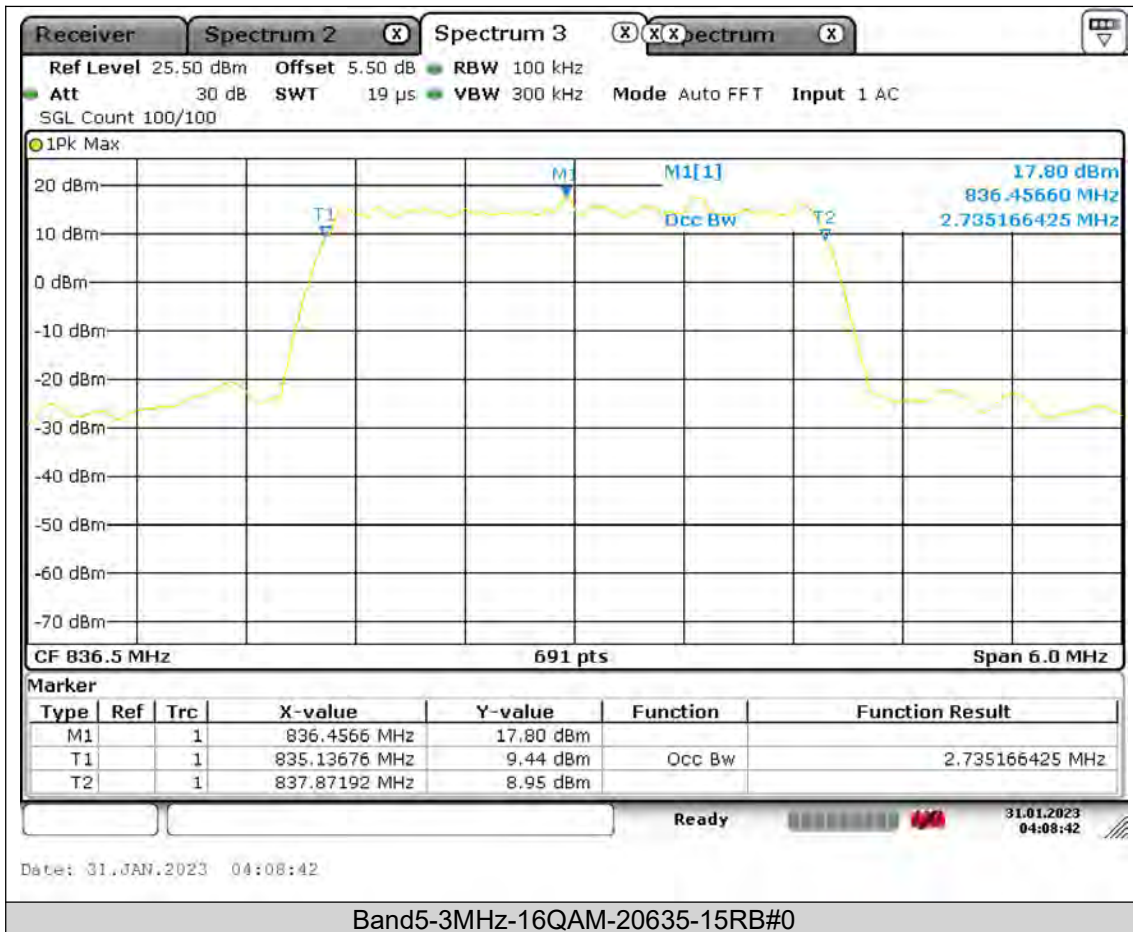



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

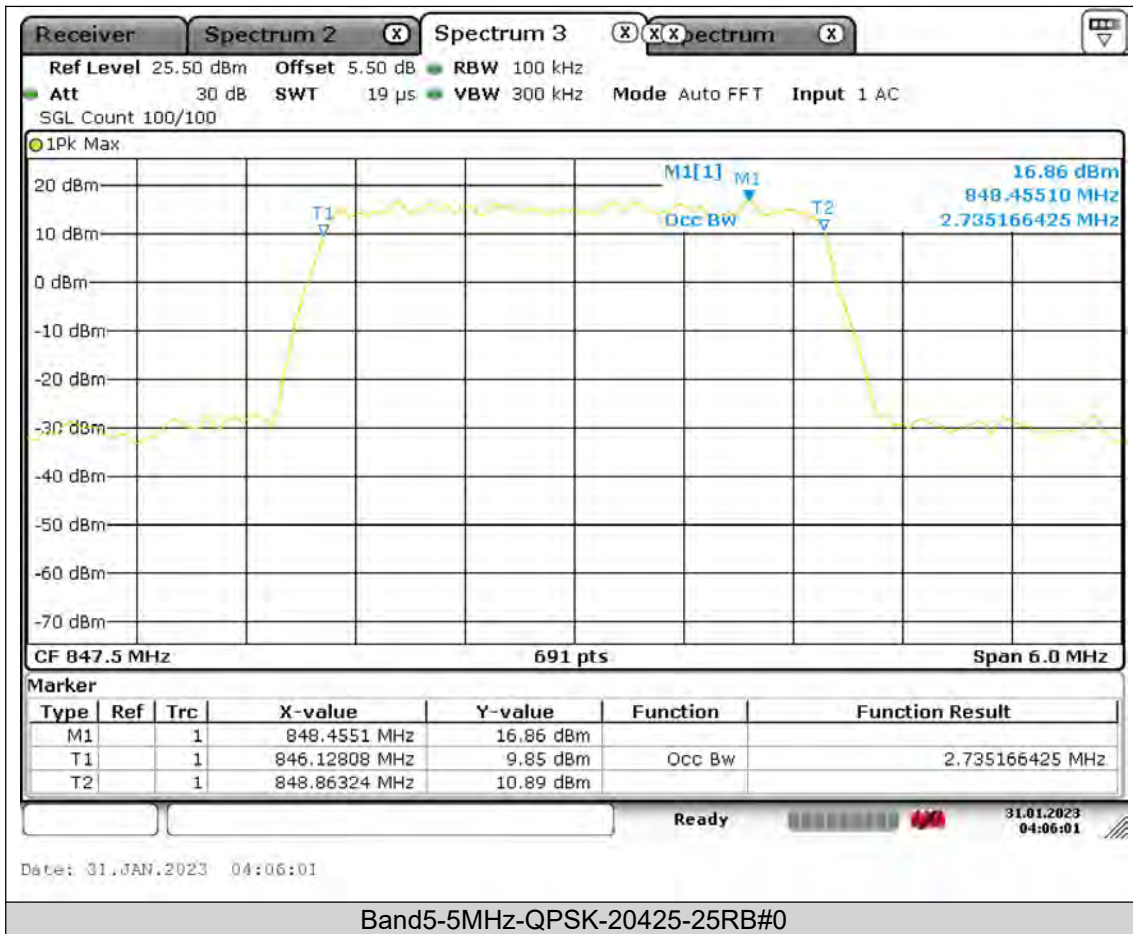



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

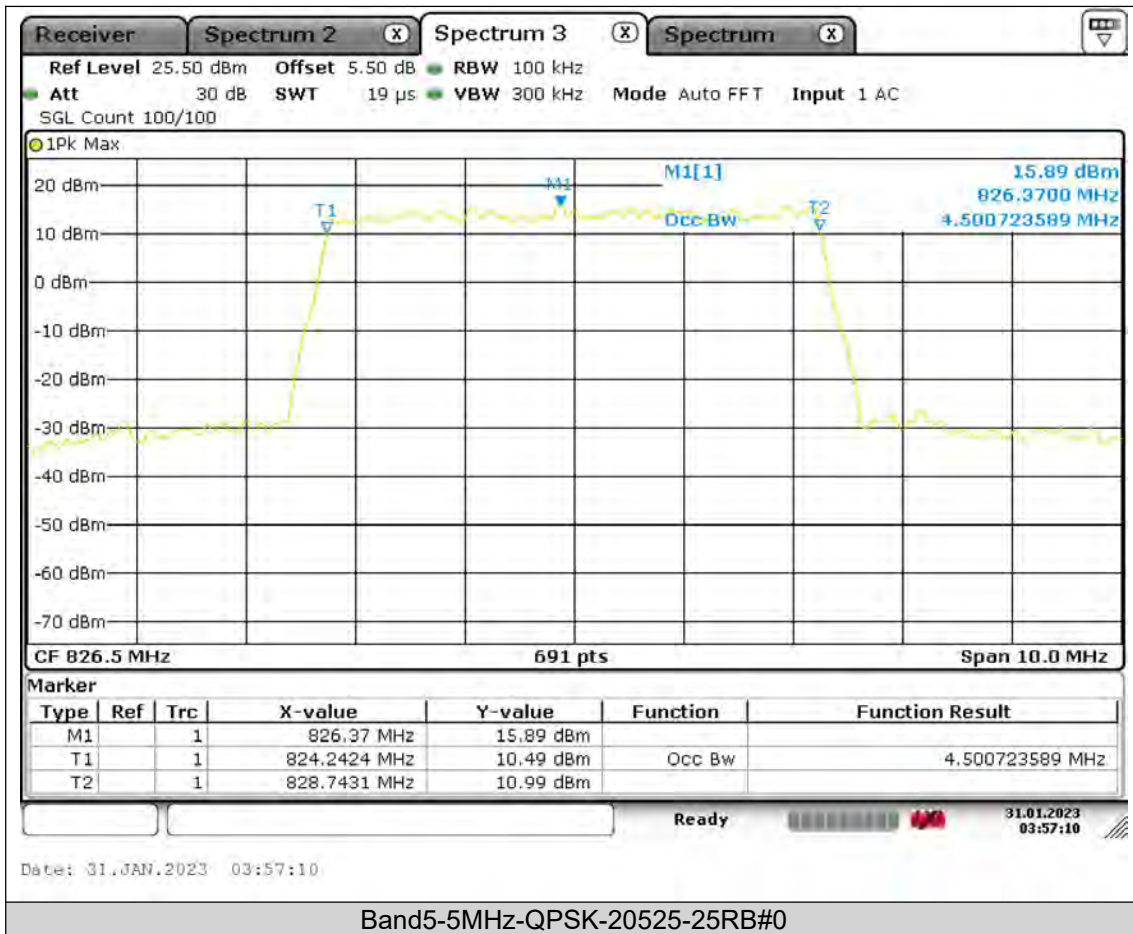



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

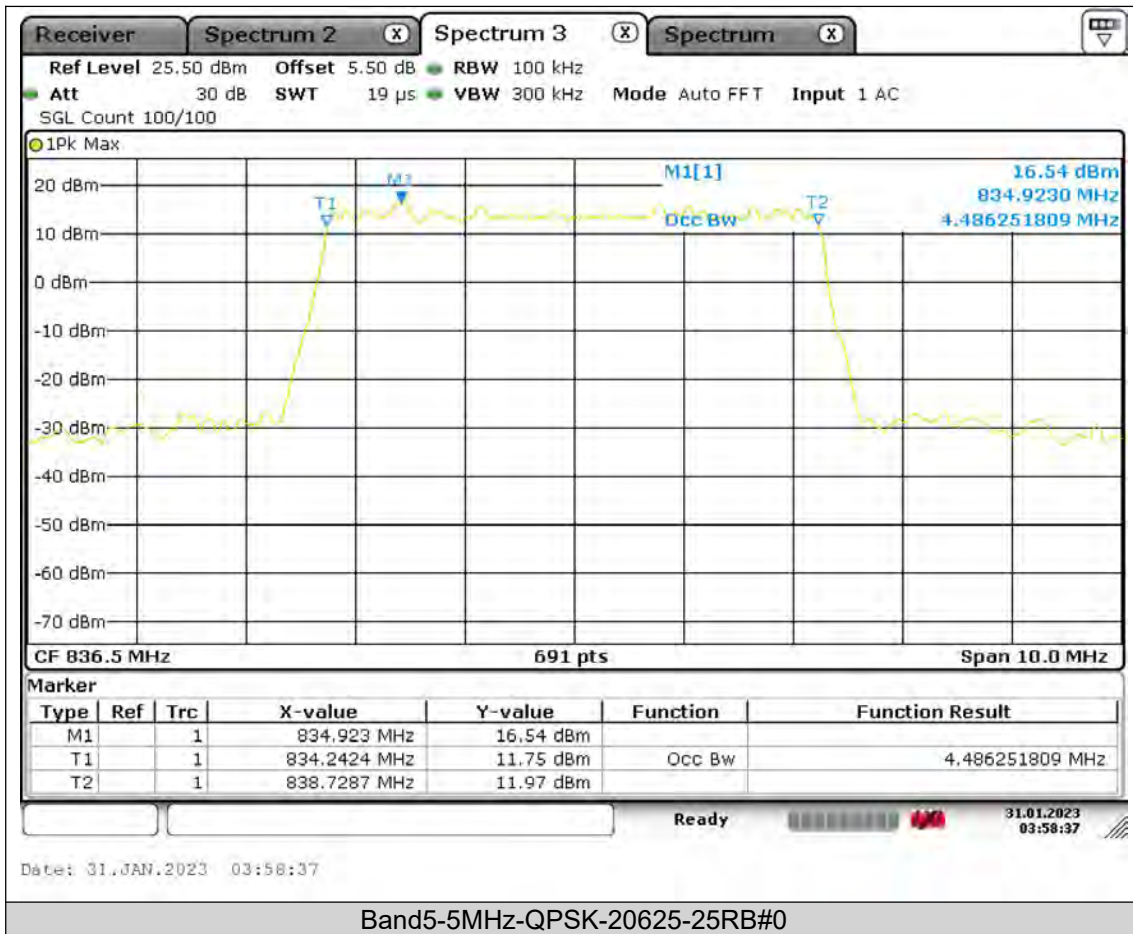



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

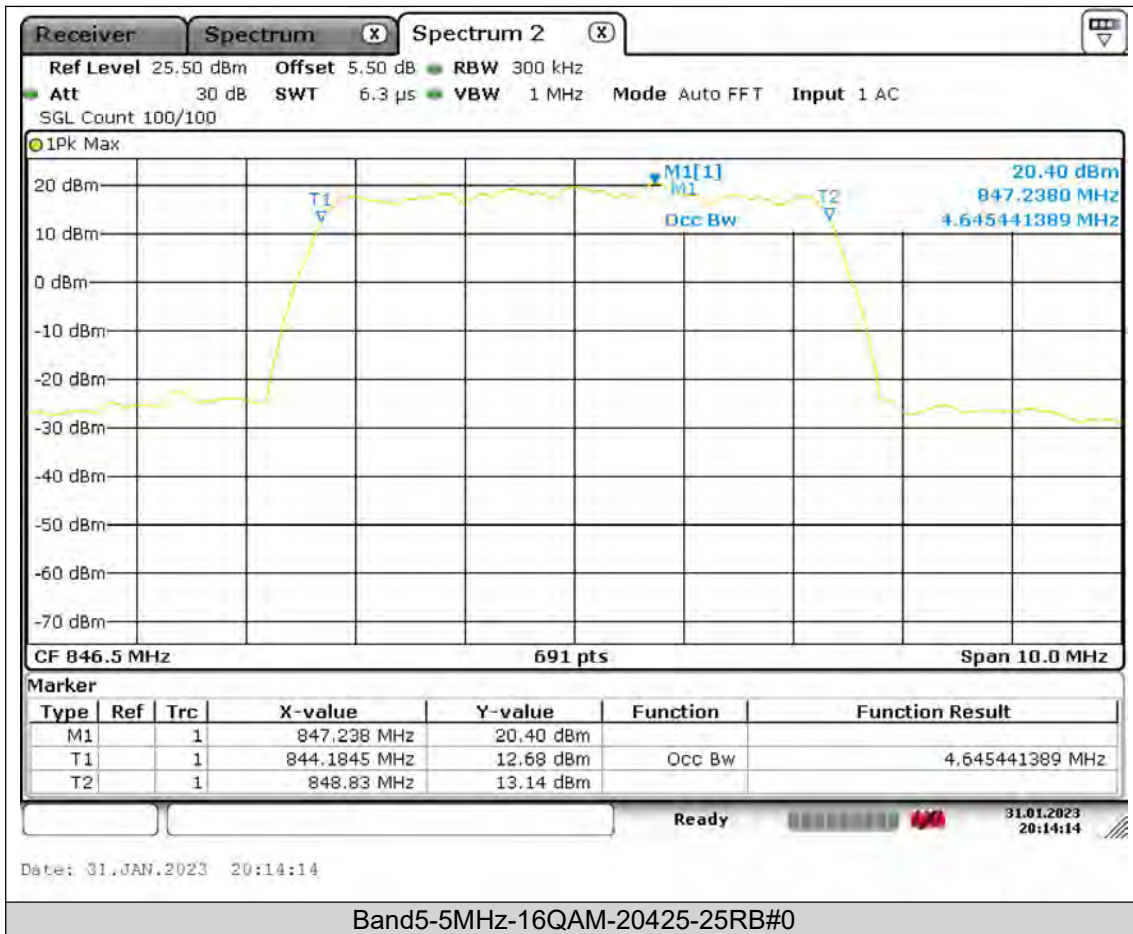



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

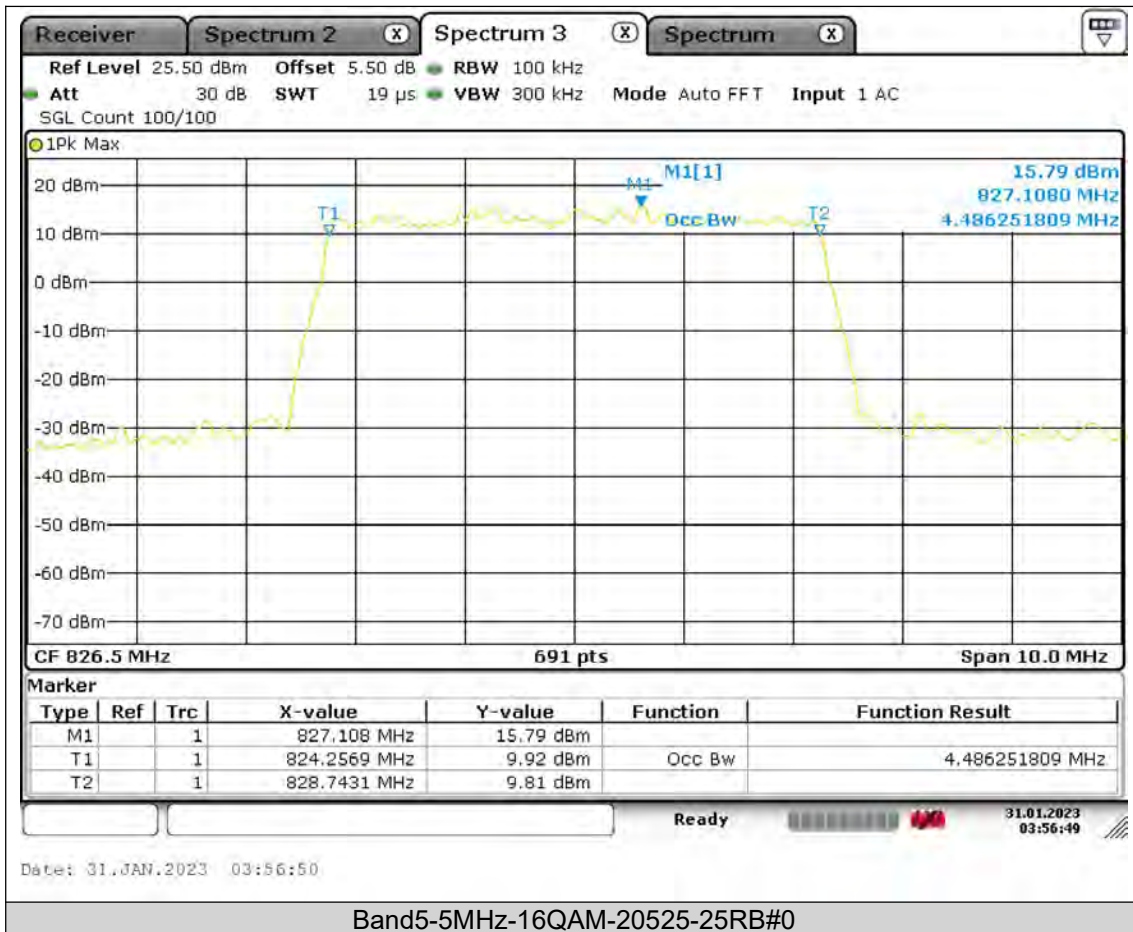



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

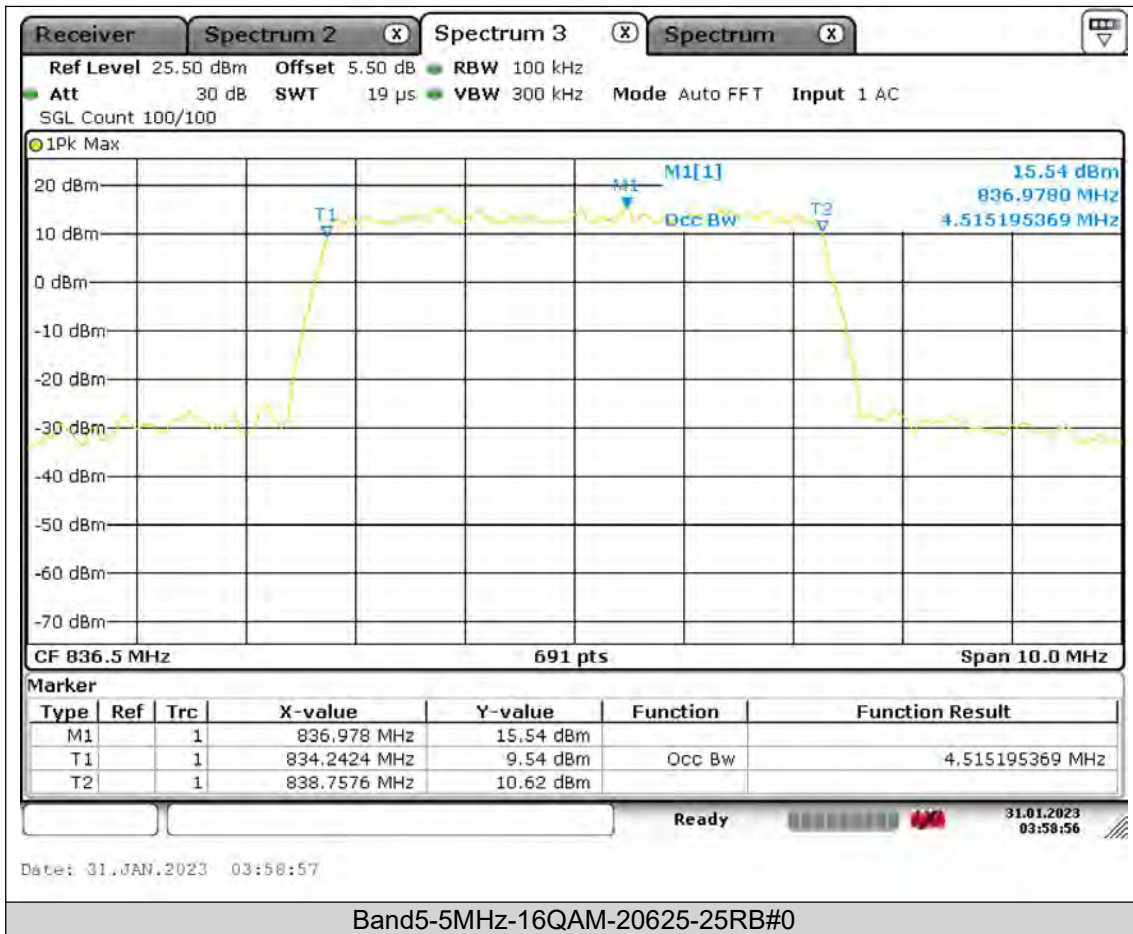



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

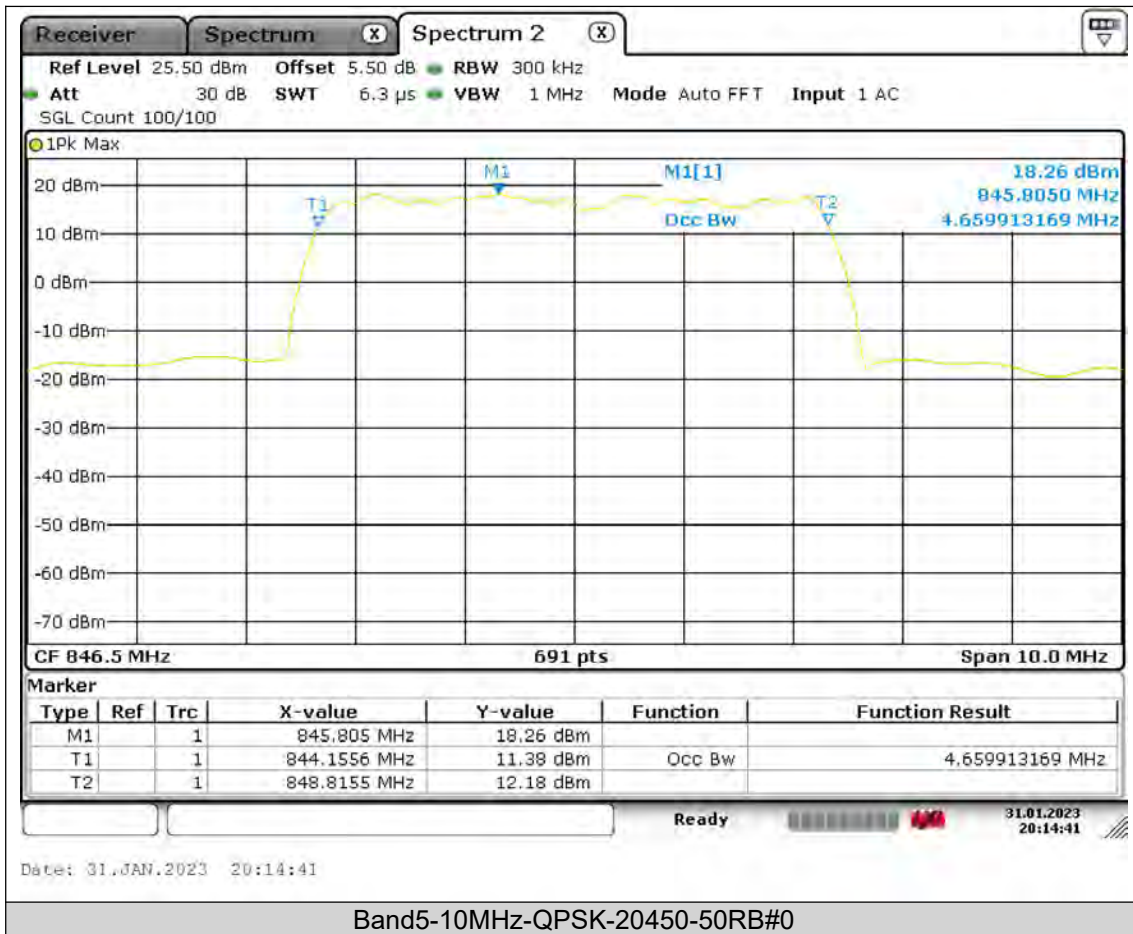



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

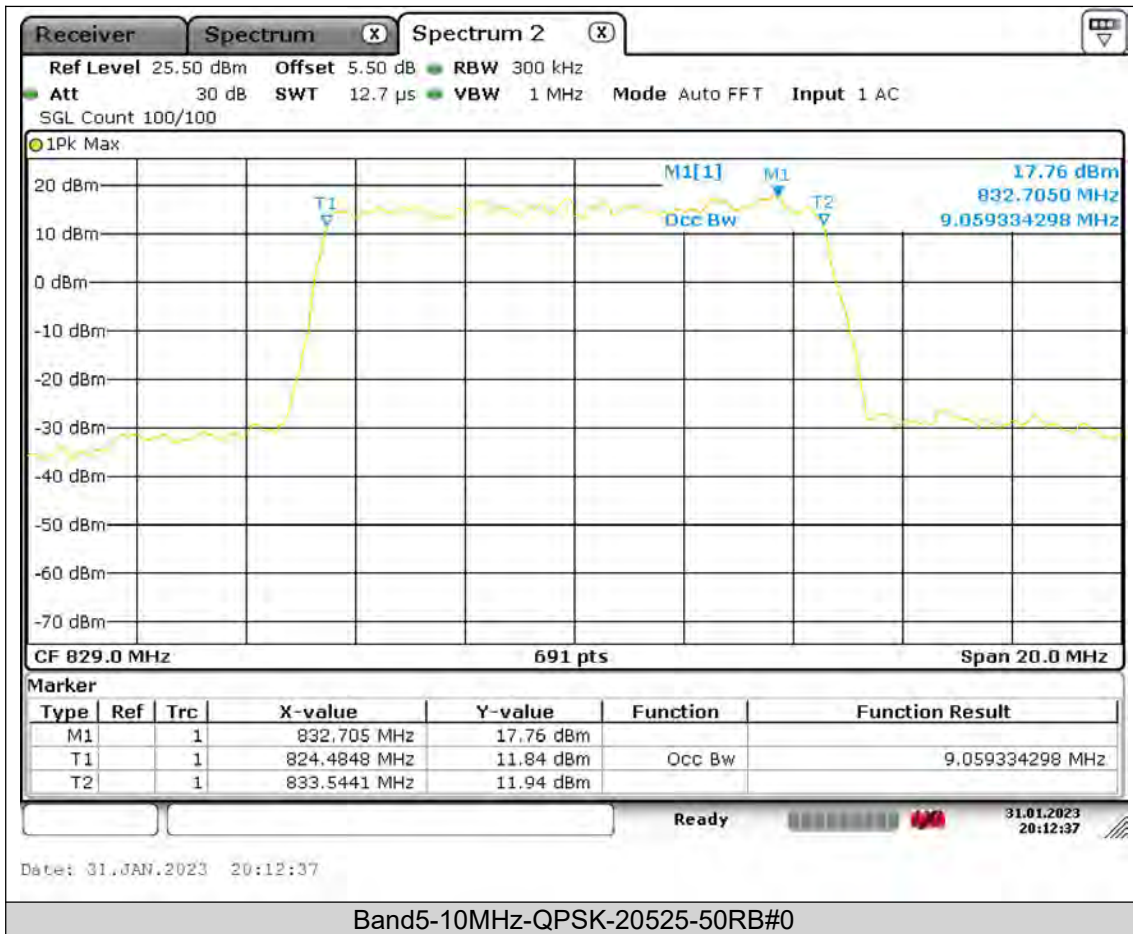



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

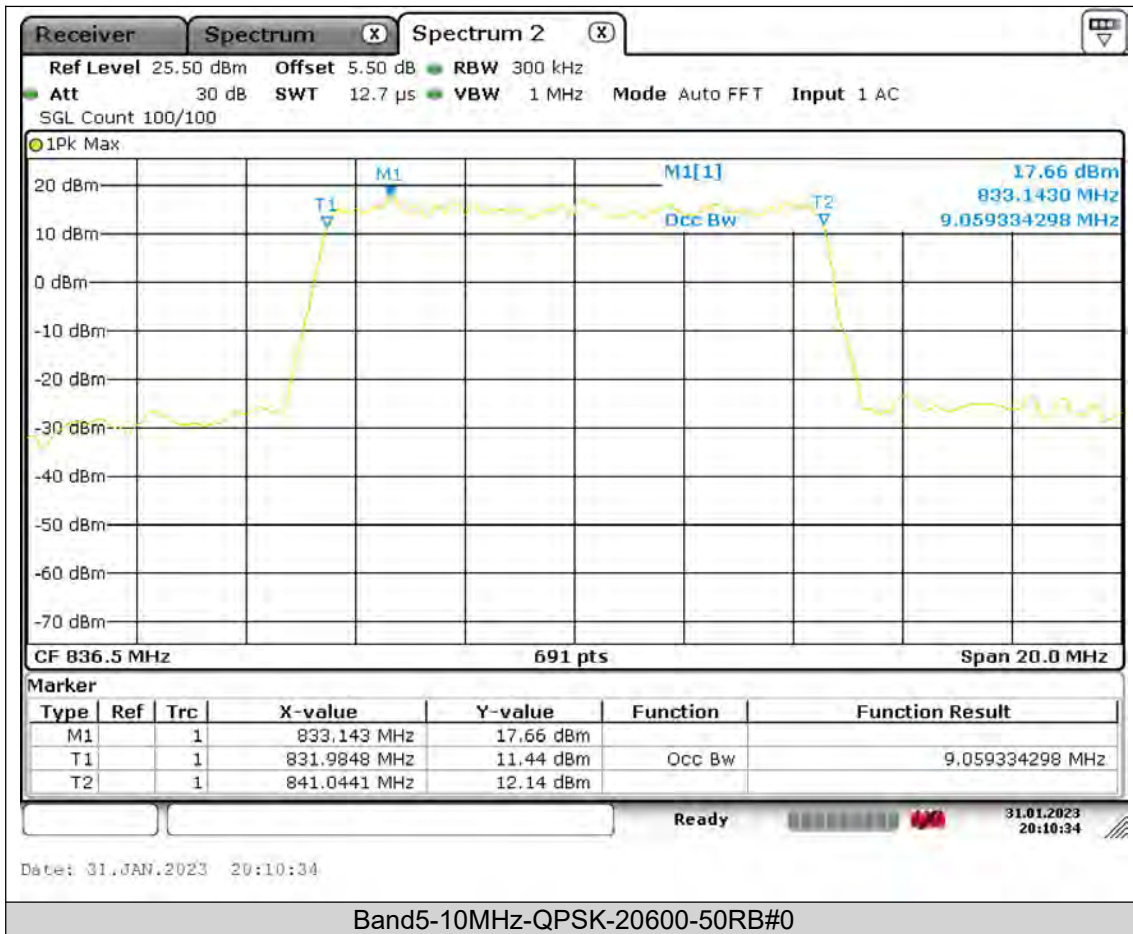



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

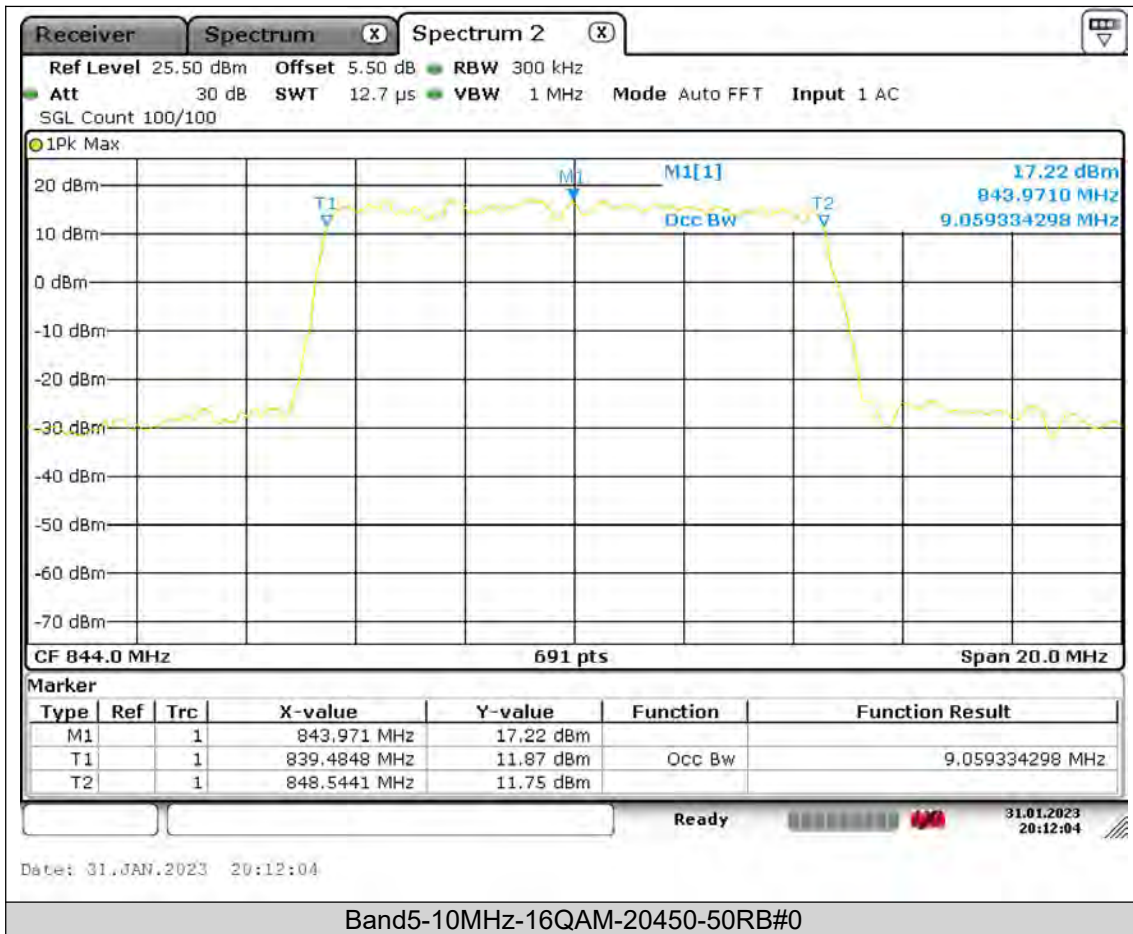



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

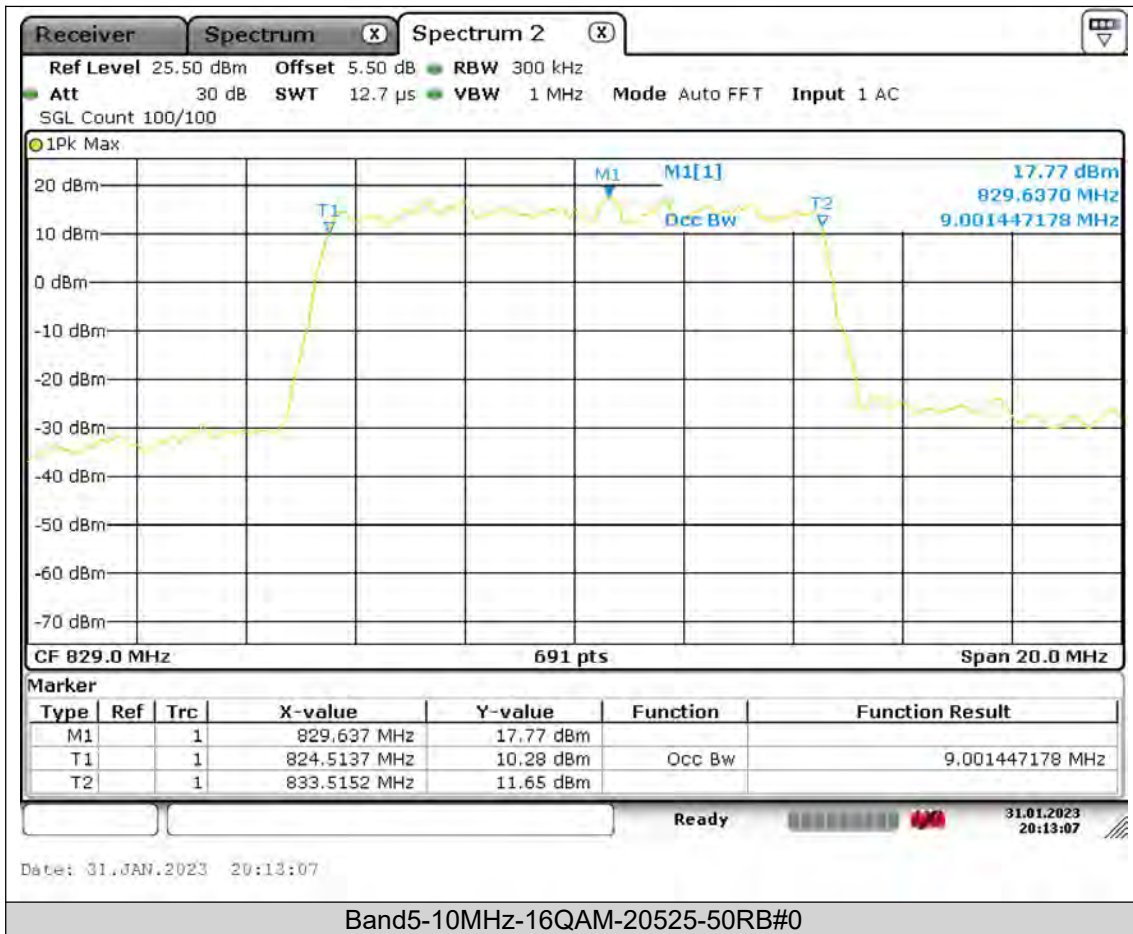



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

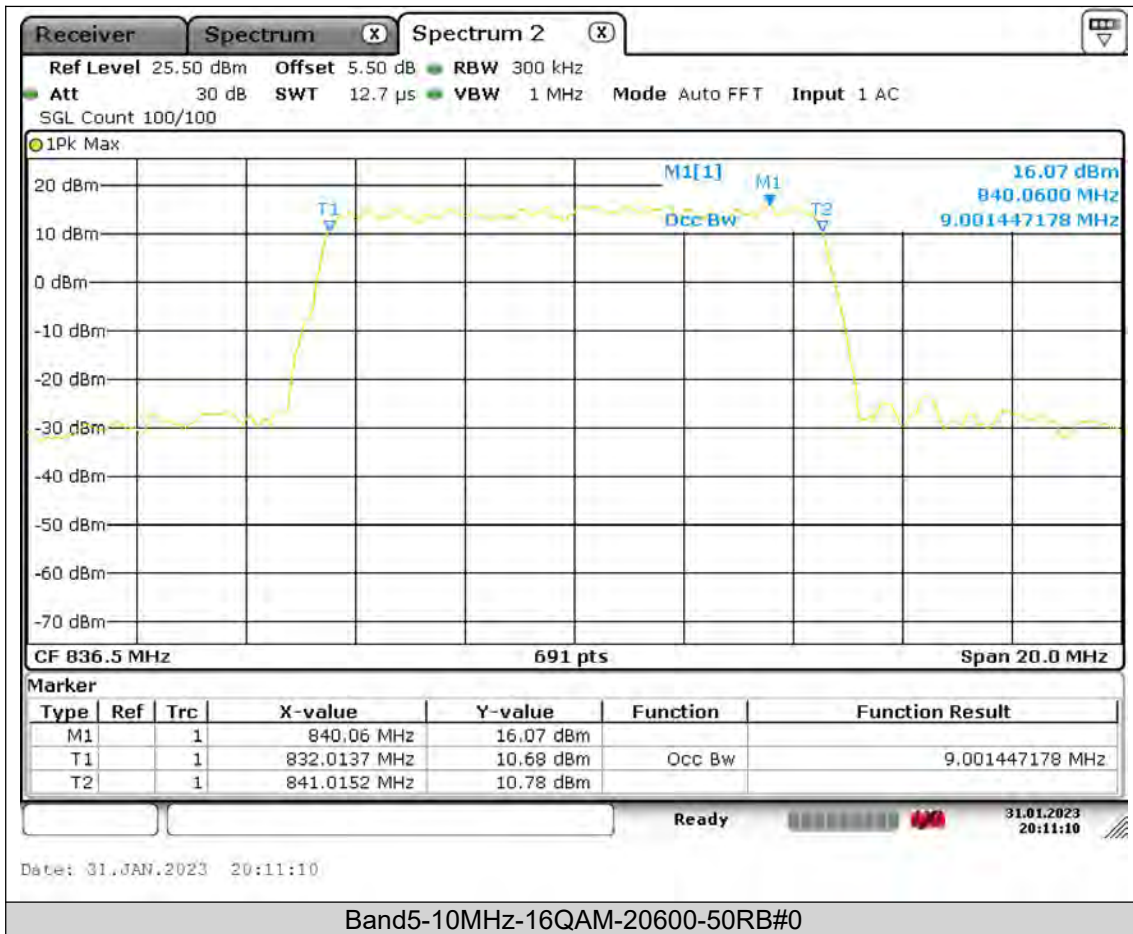



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

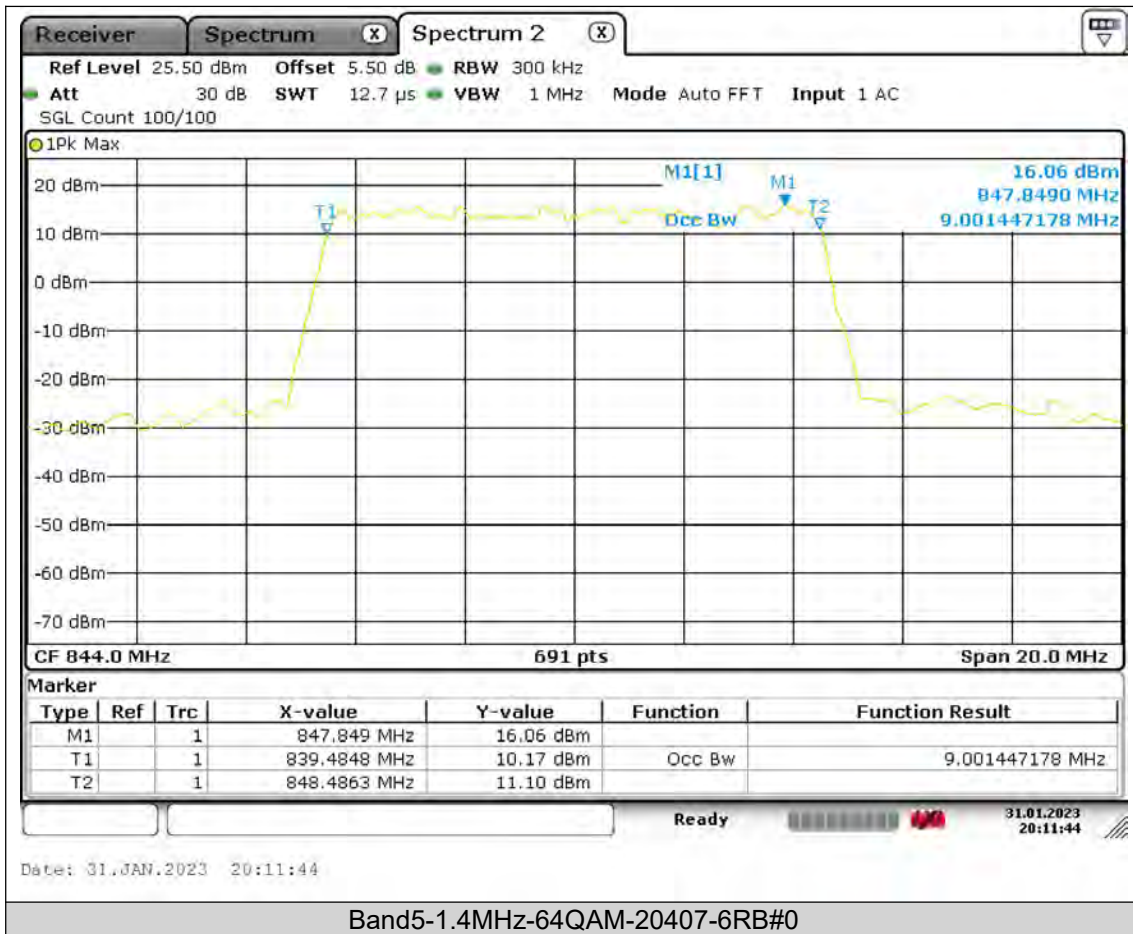



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

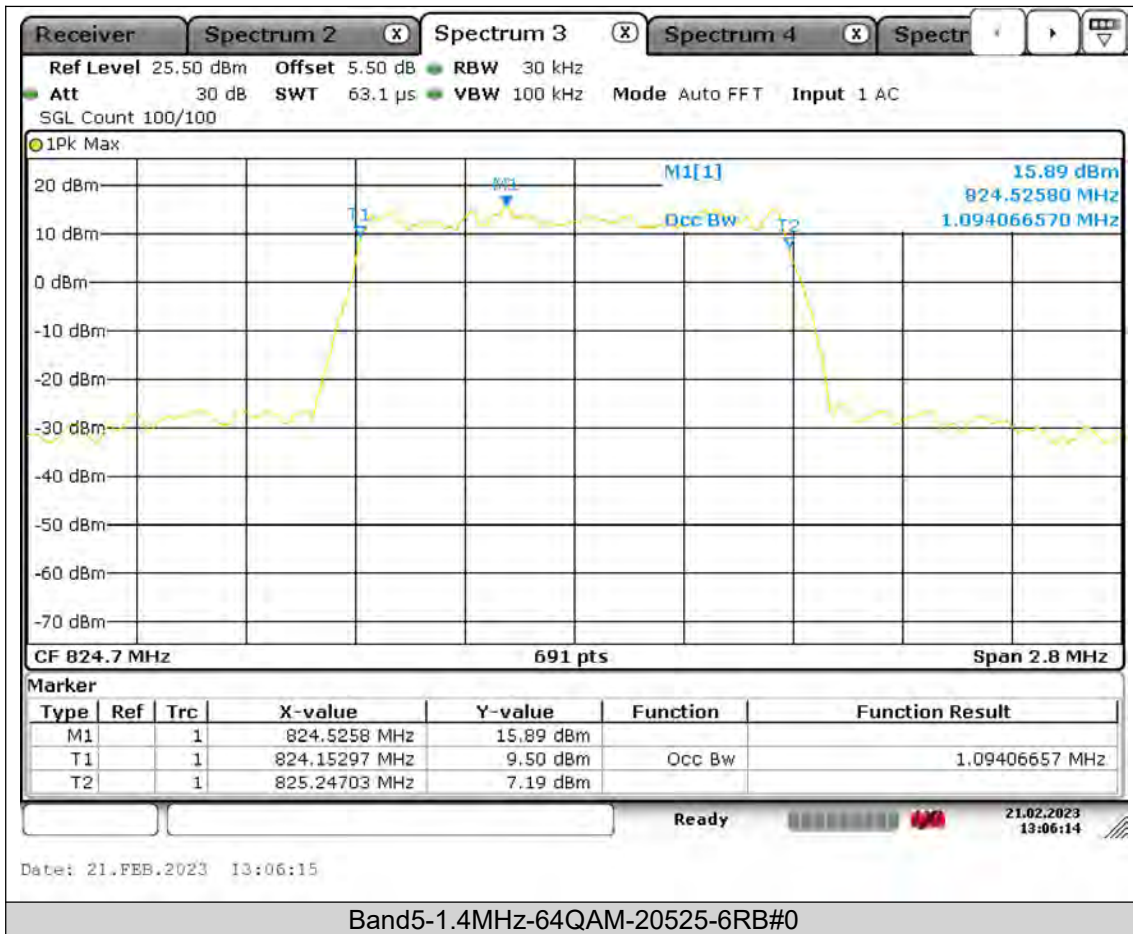



BUREAU VERITAS


Test Report No.: W7L-P23010004-2RF01

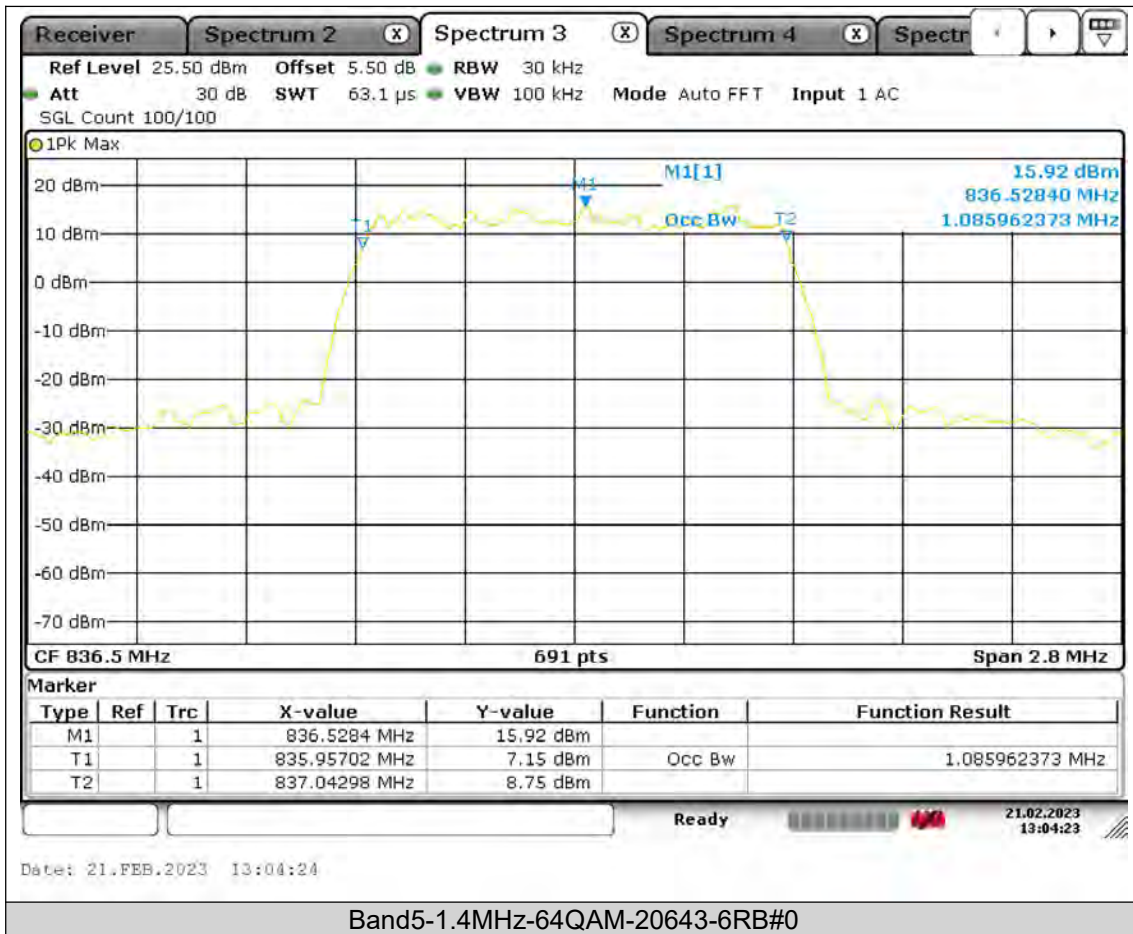



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

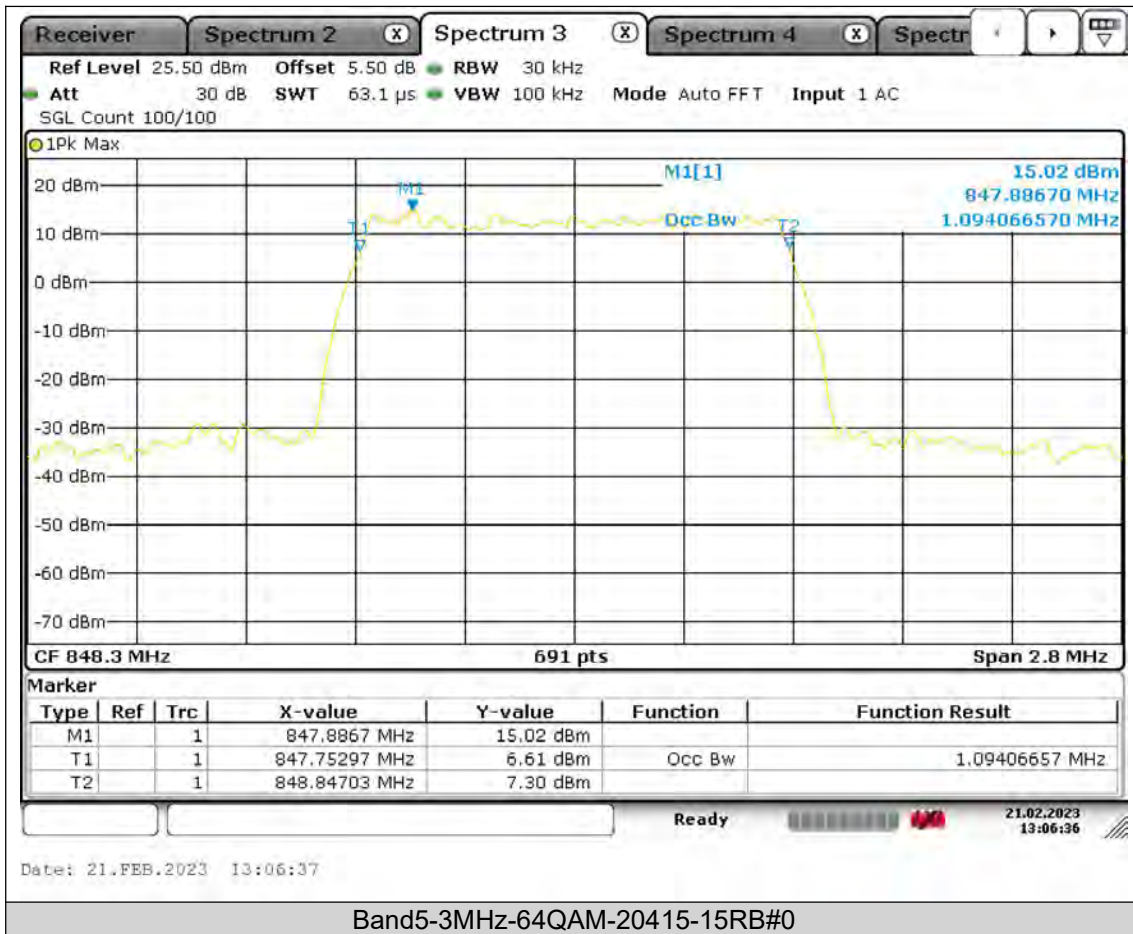



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

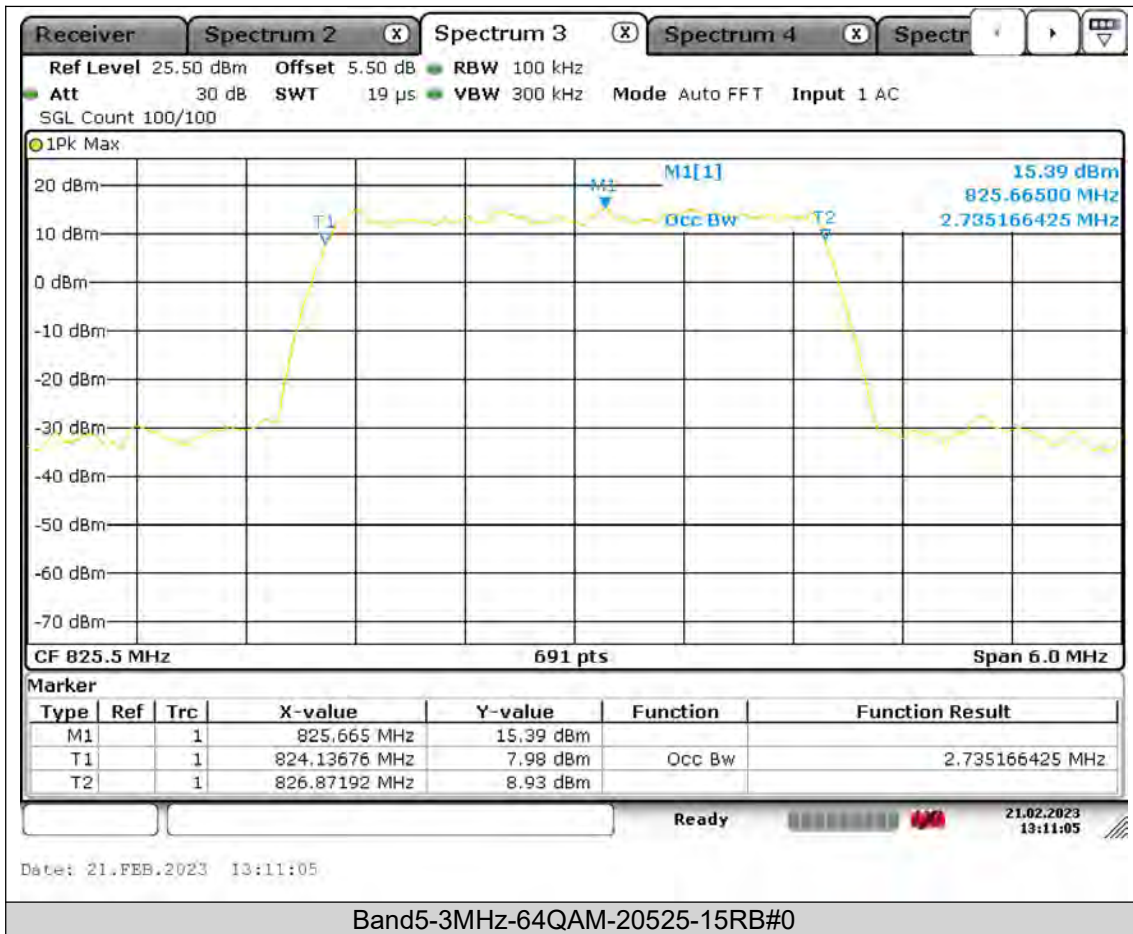



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

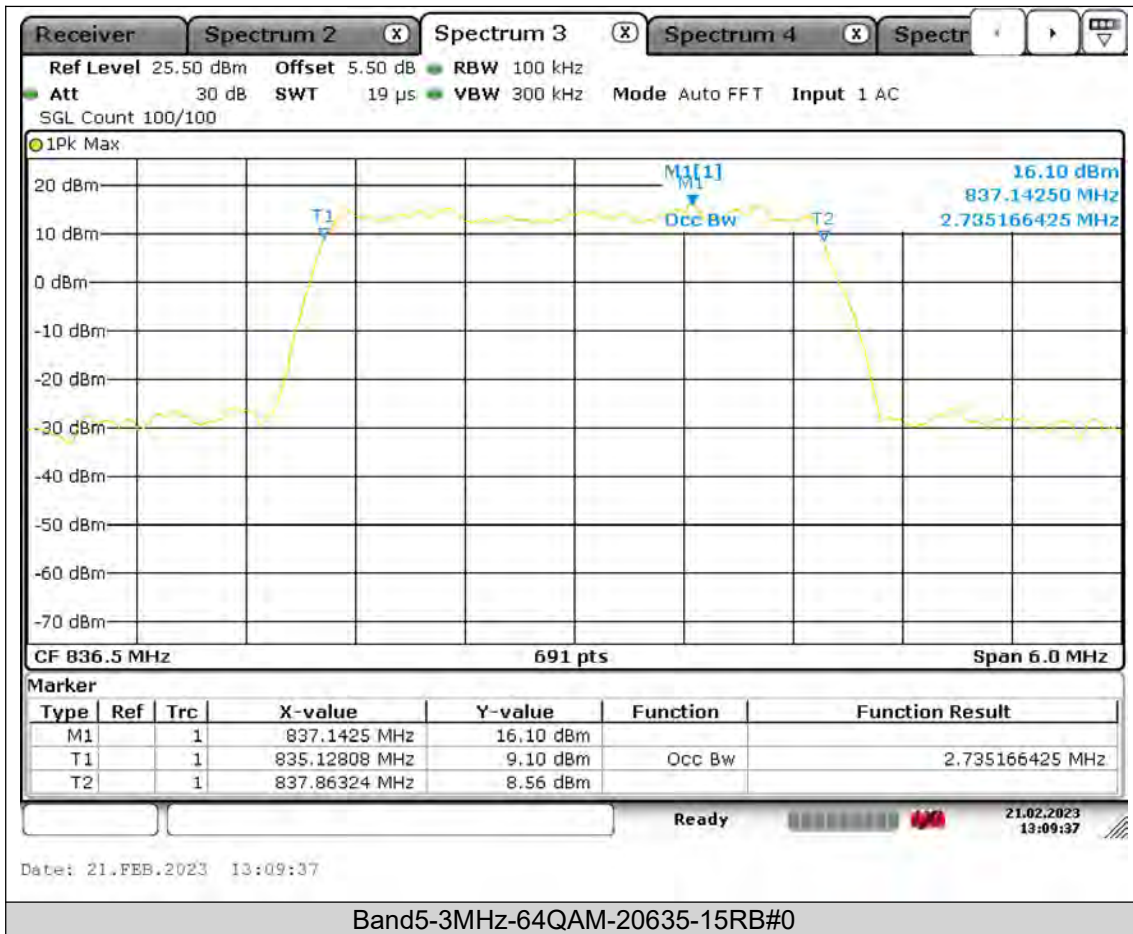



BUREAU
VERITAS


Test Report No.: W7L-P23010004-2RF01

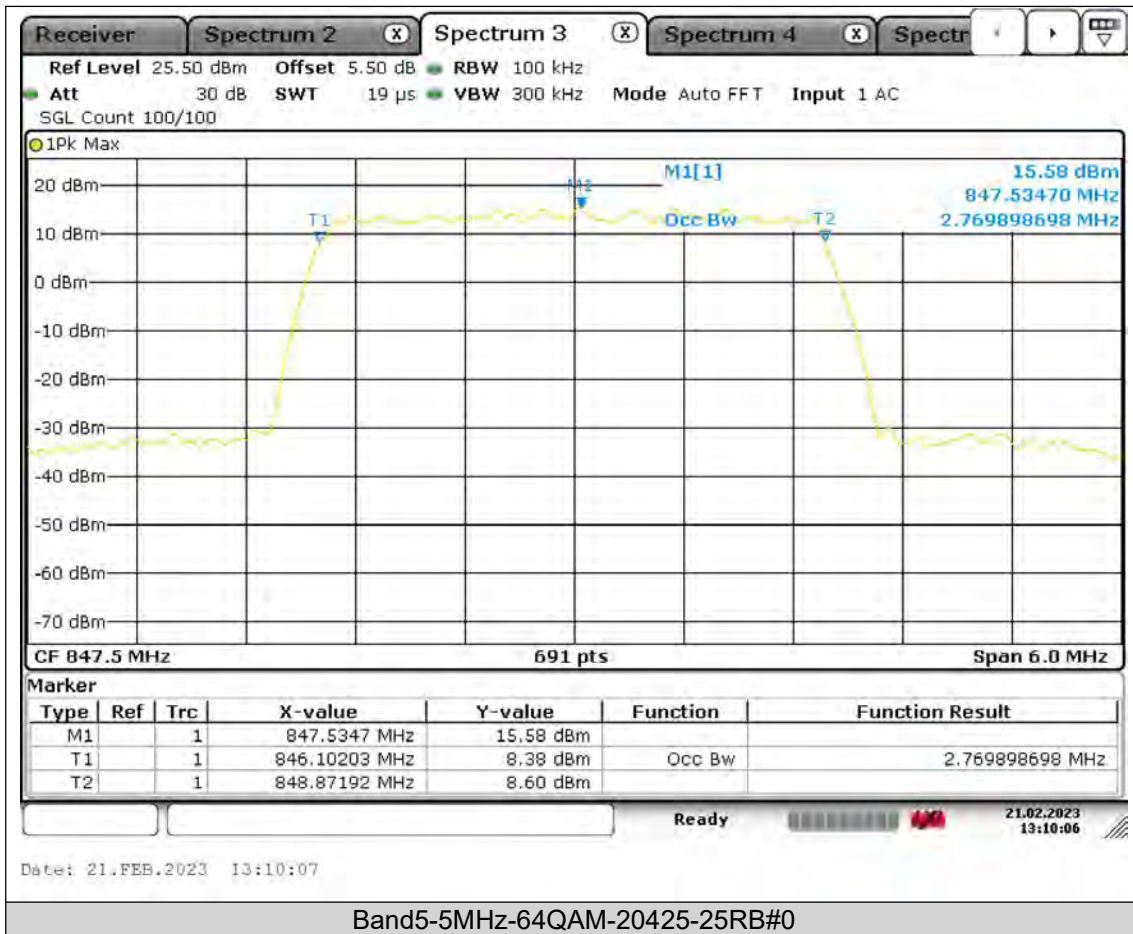



BUREAU
VERITAS

Test Report No.: W7L-P23010004-2RF01

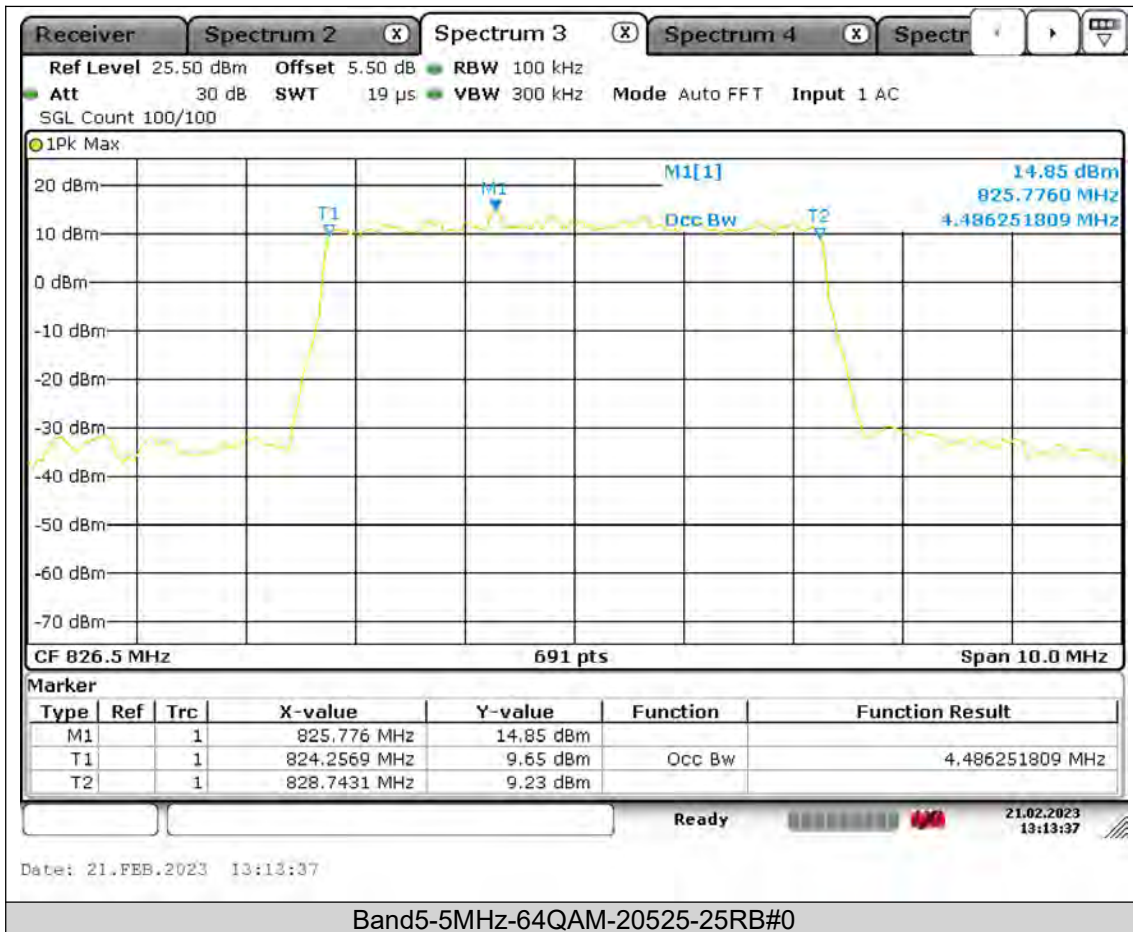



BUREAU
VERITAS

Test Report No.: W7L-P23010004-2RF01

