

**W1700 Body 10mm**

Date/Time: 3/27/2023

Electronics: DAE4 Sn777


Medium: H700-6000M

Medium parameters used (interpolated):  $f = 1732.4$  MHz;  $\sigma = 1.375$  S/m;  $\epsilon_r = 41.072$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, WCDMA 1700 Band4 (0) Frequency: 1732.4 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.49, 8.49, 8.49); Calibrated: 7/8/2022

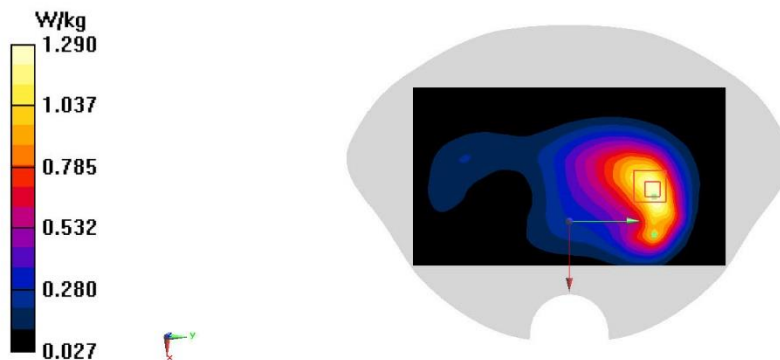**Area Scan (81x141x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 1.33 W/kg**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 17.08 V/m; Power Drift = 0.11 dB  
Peak SAR (extrapolated) = 1.50 W/kg  
**SAR(1 g) = 0.913 W/kg; SAR(10 g) = 0.557 W/kg**  
Maximum value of SAR (measured) = 1.29 W/kg

A. 11

**W1700 Body 15mm**

Date/Time: 3/27/2023

Electronics: DAE4 Sn777


Medium: H700-6000M

Medium parameters used (interpolated):  $f = 1712.4$  MHz;  $\sigma = 1.363$  S/m;  $\epsilon_r = 41.101$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, WCDMA 1700 Band4 (0) Frequency: 1712.4 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.49, 8.49, 8.49); Calibrated: 7/8/2022

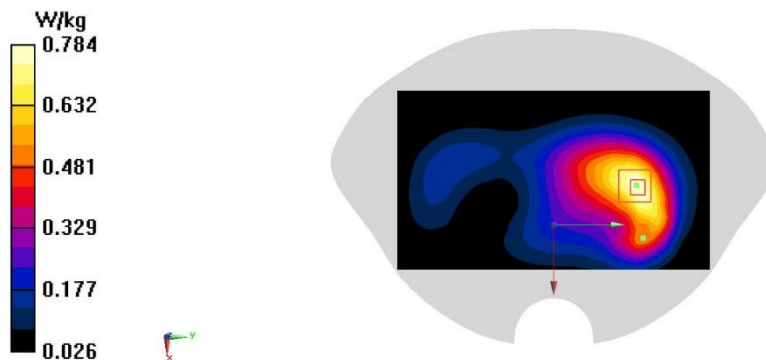**Area Scan (81x141x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.797 W/kg**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 14.59 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 0.910 W/kg  
**SAR(1 g) = 0.577 W/kg; SAR(10 g) = 0.363 W/kg**  
Maximum value of SAR (measured) = 0.784 W/kg

A. 12

**W1900 Head**

Date/Time: 4/1/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.443$  S/m;  $\epsilon_r = 40.813$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, WCDMA 1900 (0) Frequency: 1852.4 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.07, 8.07, 8.07); Calibrated: 7/8/2022

**Area Scan (81x141x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
 Maximum value of SAR (interpolated) = 0.315 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
 Reference Value = 5.379 V/m; Power Drift = 0.05 dB  
 Peak SAR (extrapolated) = 0.352 W/kg  
**SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.146 W/kg**  
 Maximum value of SAR (measured) = 0.309 W/kg



**W1900 Body 10mm**

Date/Time: 4/1/2023

Electronics: DAE4 Sn777


Medium: H700-6000M

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.458$  S/m;  $\epsilon_r = 40.787$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, WCDMA 1900 (0) Frequency: 1880 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.07, 8.07, 8.07)

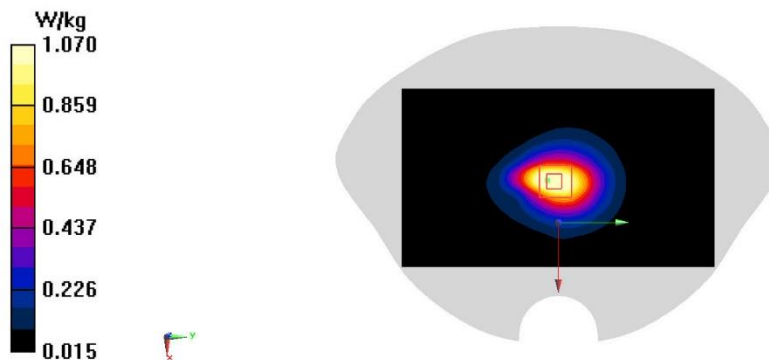**Area Scan (81x141x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.21 W/kg**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 30.65 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 1.28 W/kg  
**SAR(1 g) = 0.742 W/kg; SAR(10 g) = 0.424 W/kg**  
Maximum value of SAR (measured) = 1.07 W/kg

A. 14

**W1900 Body 15mm**

Date/Time: 4/1/2023

Electronics: DAE4 Sn777


Medium: H700-6000M

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.443$  S/m;  $\epsilon_r = 40.813$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, WCDMA 1900 (0) Frequency: 1852.4 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.07, 8.07, 8.07)

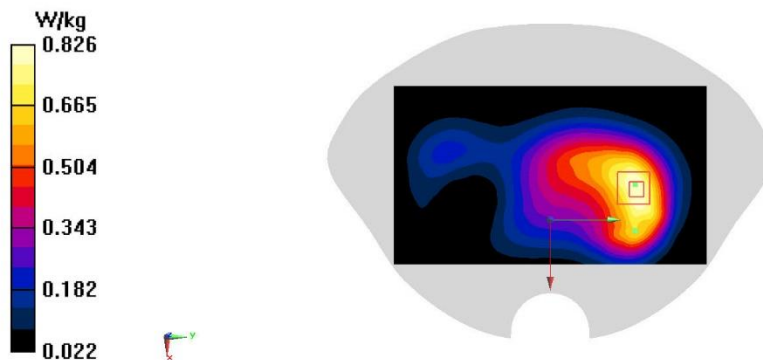**Area Scan (81x141x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.839 W/kg**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 17.36 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 0.969 W/kg  
**SAR(1 g) = 0.595 W/kg; SAR(10 g) = 0.371 W/kg**  
Maximum value of SAR (measured) = 0.826 W/kg

A. 15

## LTE B2 Head

Date/Time: 4/1/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.458$  S/m;  $\epsilon_r = 40.787$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band2(20MB) (0) Frequency: 1880 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.07, 8.07, 8.07)

**Area Scan (81x141x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.216 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 4.786 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 0.241 W/kg  
**SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.101 W/kg**  
Maximum value of SAR (measured) = 0.211 W/kg

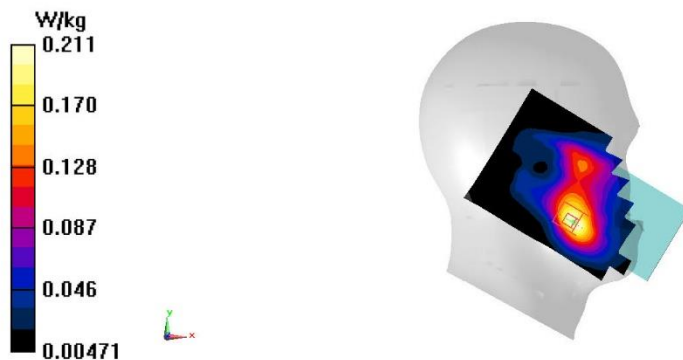

A. 16

**LTE B2 Body 10mm**

Date/Time: 4/1/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.448$  S/m;  $\epsilon_r = 40.804$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band2(20MB) (0) Frequency: 1860 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.07, 8.07, 8.07)

**Area Scan (81x141x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
 Maximum value of SAR (interpolated) = 0.988 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
 Reference Value = 26.53 V/m; Power Drift = -0.08 dB  
 Peak SAR (extrapolated) = 1.16 W/kg  
**SAR(1 g) = 0.675 W/kg; SAR(10 g) = 0.386 W/kg**  
 Maximum value of SAR (measured) = 0.971 W/kg

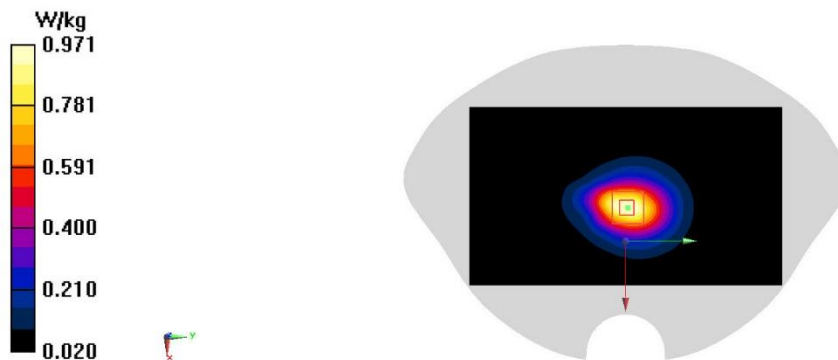

A. 17

### LTE B2 Body 15mm

Date/Time: 4/1/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.448$  S/m;  $\epsilon_r = 40.804$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band2(20MB) (0) Frequency: 1860 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.07, 8.07, 8.07); Calibrated: 7/8/2022

**Rear 15mm 1RB-Mid/Area Scan (81x141x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.439 W/kg

**Rear 15mm 1RB-Mid/Zoom Scan (7x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 13.87 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 0.494 W/kg  
**SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.188 W/kg**  
Maximum value of SAR (measured) = 0.421 W/kg

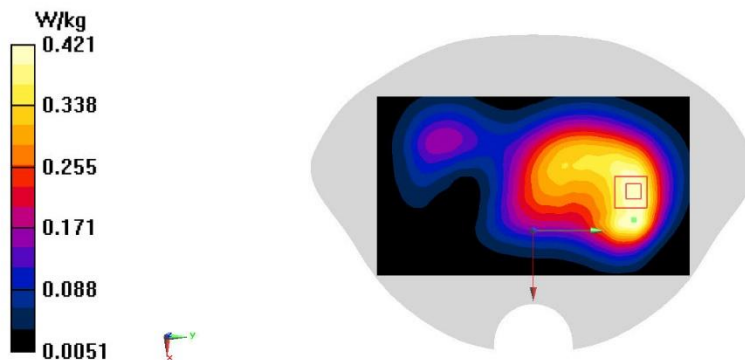

A. 18



## LTE B7 Head

Date/Time: 4/9/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used:  $f = 2560$  MHz;  $\sigma = 1.937$  S/m;  $\epsilon_r = 39.757$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band7-20M (0) Frequency: 2560 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(7.31, 7.31, 7.31)

**Area Scan (101x181x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm  
Maximum value of SAR (interpolated) = 2.01 W/kg

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 8.614 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 2.62 W/kg  
**SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.552 W/kg**  
Maximum value of SAR (measured) = 1.98 W/kg

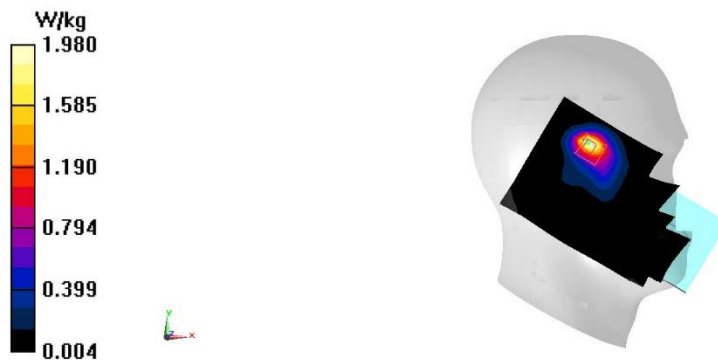

A. 19

**LTE B7 Body 10mm**

Date/Time: 4/9/2023

Electronics: DAE4 Sn777


Medium: H700-6000M

Medium parameters used:  $f = 2560$  MHz;  $\sigma = 1.937$  S/m;  $\epsilon_r = 39.757$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band7-20M (0) Frequency: 2560 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(7.31, 7.31, 7.31); Calibrated: 7/8/2022

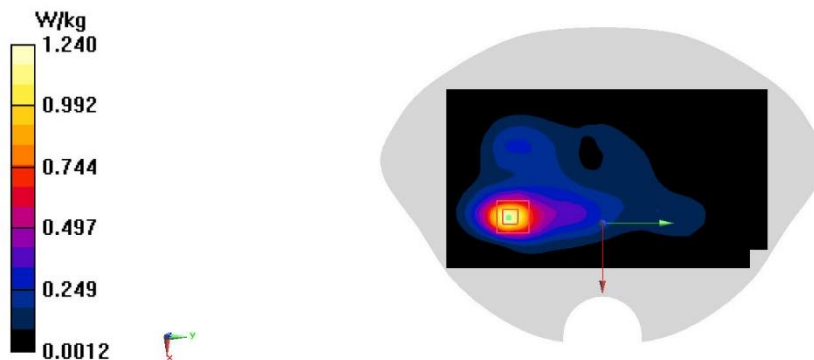**Area Scan (101x181x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm  
Maximum value of SAR (interpolated) = 1.23 W/kg**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 9.010 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 1.59 W/kg  
**SAR(1 g) = 0.723 W/kg; SAR(10 g) = 0.340 W/kg**  
Maximum value of SAR (measured) = 1.24 W/kg

A. 20

### LTE B7 Body 15mm

Date/Time: 4/9/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used:  $f = 2560$  MHz;  $\sigma = 1.937$  S/m;  $\epsilon_r = 39.757$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band7-20M (0) Frequency: 2560 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(7.31, 7.31, 7.31); Calibrated: 7/8/2022

**Area Scan (101x181x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm  
Maximum value of SAR (interpolated) = 0.429 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 7.097 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 0.528 W/kg  
**SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.129 W/kg**  
Maximum value of SAR (measured) = 0.417 W/kg

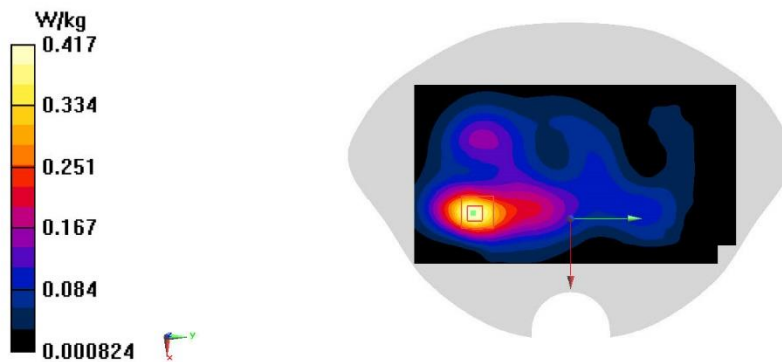

A. 21

## LTE B12 Head

Date/Time: 3/20/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated):  $f = 707.5$  MHz;  $\sigma = 0.885$  S/m;  $\epsilon_r = 43.564$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band12 (0) Frequency: 707.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(10.34, 10.34, 10.34); Calibrated: 7/8/2022

**Area Scan (81x141x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.120 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 2.965 V/m; Power Drift = 0.06dB  
Peak SAR (extrapolated) = 0.131 W/kg  
**SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.081 W/kg**  
Maximum value of SAR (measured) = 0.120 W/kg

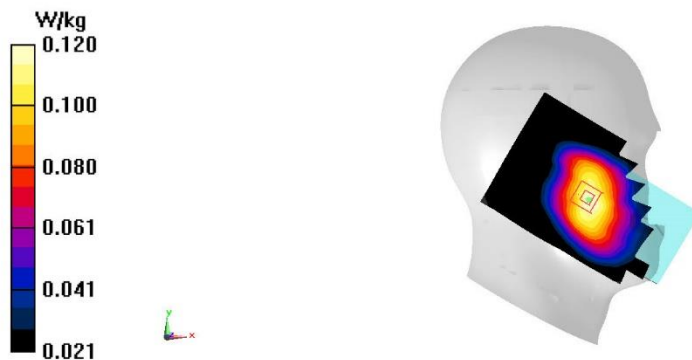

**LTE B12 Body 10mm**

Date/Time: 3/20/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated):  $f = 711 \text{ MHz}$ ;  $\sigma = 0.887 \text{ S/m}$ ;  $\epsilon_r = 43.55$ ;  $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band12 (0) Frequency: 711 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(10.34, 10.34, 10.34); Calibrated: 7/8/2022

**Area Scan (81x141x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.285 W/kg

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 15.80 V/m; Power Drift = -0.01 dB  
 Peak SAR (extrapolated) = 0.347 W/kg  
**SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.143 W/kg**  
 Maximum value of SAR (measured) = 0.283 W/kg

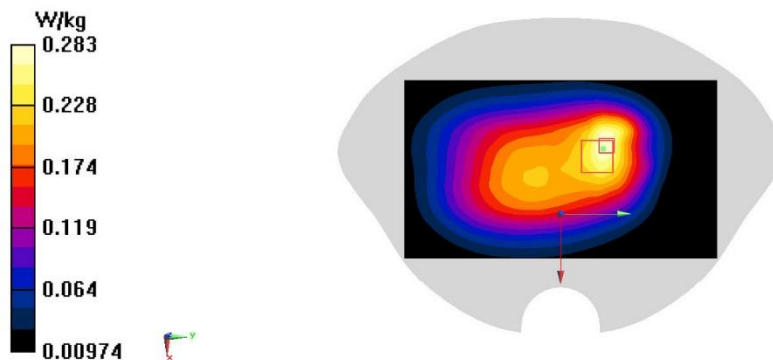

### LTE B12 Body 15mm

Date/Time: 3/20/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated):  $f = 707.5$  MHz;  $\sigma = 0.885$  S/m;  $\epsilon_r = 43.564$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band12 (0) Frequency: 707.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(10.34, 10.34, 10.34); Calibrated: 7/8/2022

**Area Scan (81x141x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.202 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 15.17 V/m; Power Drift = 0.00 dB  
Peak SAR (extrapolated) = 0.224 W/kg  
**SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.126 W/kg**  
Maximum value of SAR (measured) = 0.203 W/kg

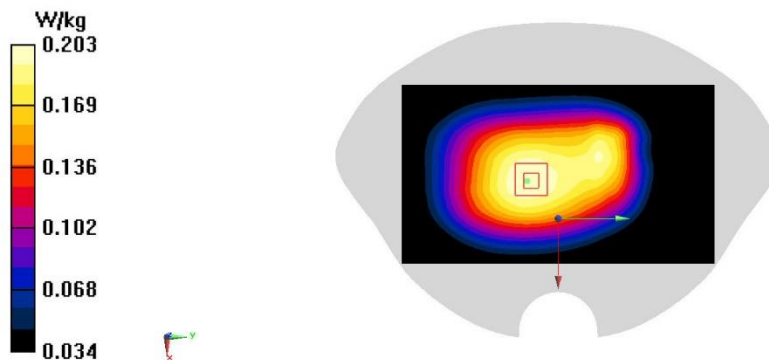

A. 24

## LTE B13 Head

Date/Time: 3/20/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated):  $f = 782$  MHz;  $\sigma = 0.913$  S/m;  $\epsilon_r = 43.229$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band13 (0) Frequency: 782 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(10.34, 10.34, 10.34)

**Area Scan (81x141x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.144 W/kg

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 3.343 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 0.160 W/kg  
**SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.092 W/kg**  
Maximum value of SAR (measured) = 0.146 W/kg

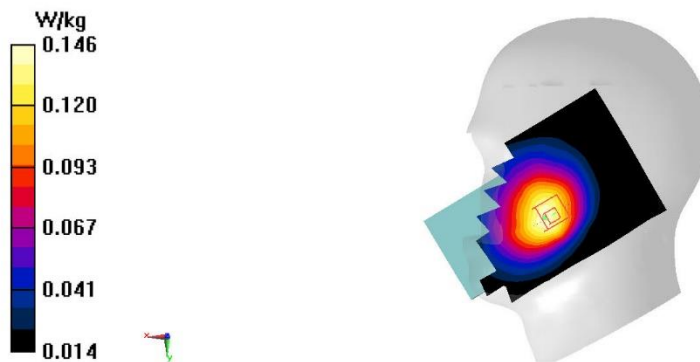

A. 25

**LTE B13 Body 10mm**

Date/Time: 3/20/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated):  $f = 782 \text{ MHz}$ ;  $\sigma = 0.913 \text{ S/m}$ ;  $\epsilon_r = 43.229$ ;  $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band13 (0) Frequency: 782 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(10.34, 10.34, 10.34)

**Area Scan (81x141x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.369 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 15.39 V/m; Power Drift = 0.06 dB  
 Peak SAR (extrapolated) = 0.464 W/kg  
**SAR(1 g) = 0.273 W/kg; SAR(10 g) = 0.175 W/kg**  
 Maximum value of SAR (measured) = 0.377 W/kg

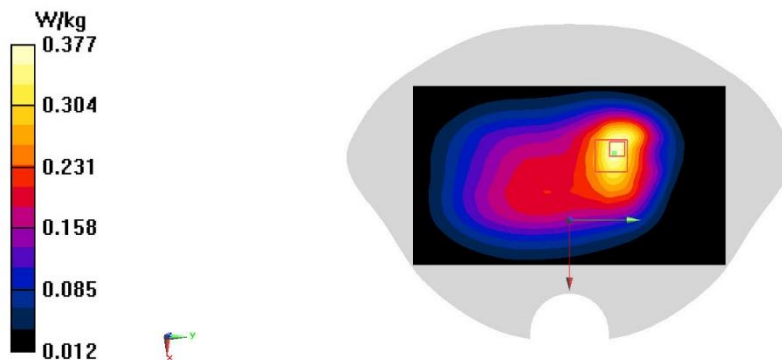



### LTE B13 Body 15mm

Date/Time: 3/20/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated):  $f = 782 \text{ MHz}$ ;  $\sigma = 0.913 \text{ S/m}$ ;  $\epsilon_r = 43.229$ ;  $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band13 (0) Frequency: 782 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(10.34, 10.34, 10.34); Calibrated: 7/8/2022

**Area Scan (81x141x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 0.233 W/kg

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 14.54 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 0.281 W/kg  
**SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.122 W/kg**  
Maximum value of SAR (measured) = 0.235 W/kg

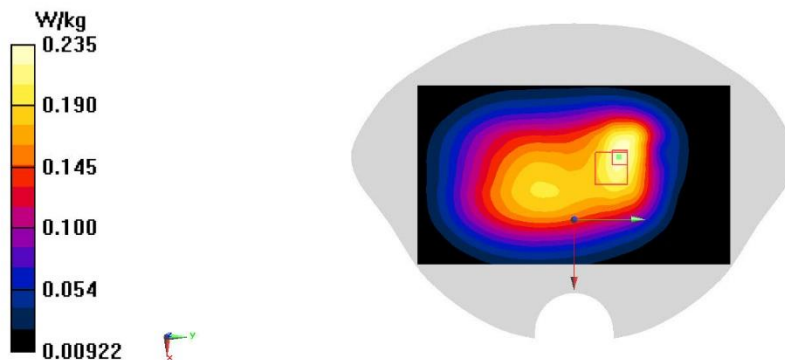

A. 27

## LTE B25 Head

Date/Time: 4/1/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.459$  S/m;  $\epsilon_r = 40.784$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band25 (0) Frequency: 1882.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.07, 8.07, 8.07)

**Area Scan (81x141x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.214 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 4.206 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 0.241 W/kg  
**SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.101 W/kg**  
Maximum value of SAR (measured) = 0.211 W/kg

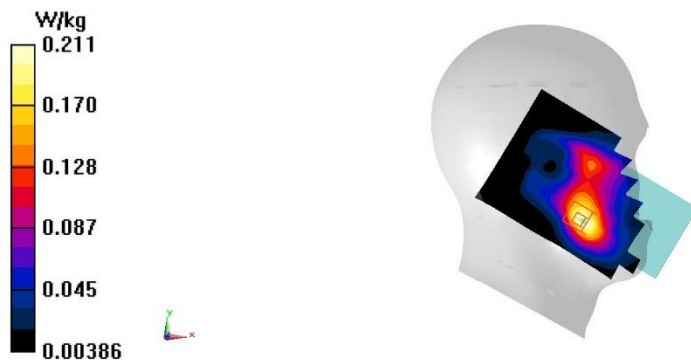

A. 28

### LTE B25 Body 10mm

Date/Time: 4/1/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.448$  S/m;  $\epsilon_r = 40.804$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band25 (0) Frequency: 1860 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.07, 8.07, 8.07)

**Area Scan (81x141x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.12 W/kg

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 26.57 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 1.28 W/kg  
**SAR(1 g) = 0.744 W/kg; SAR(10 g) = 0.426 W/kg**  
Maximum value of SAR (measured) = 1.06 W/kg

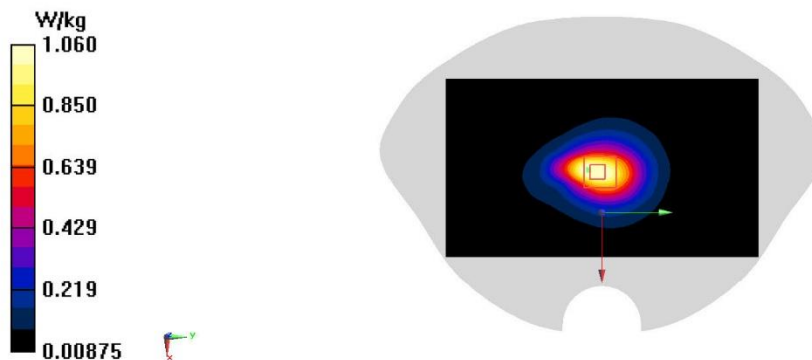

### LTE B25 Body 15mm

Date/Time: 4/1/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.448$  S/m;  $\epsilon_r = 40.804$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band25 (0) Frequency: 1860 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.07, 8.07, 8.07)

**Area Scan (81x141x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.734 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 16.00 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 0.863 W/kg  
**SAR(1 g) = 0.533 W/kg; SAR(10 g) = 0.331 W/kg**  
Maximum value of SAR (measured) = 0.742 W/kg

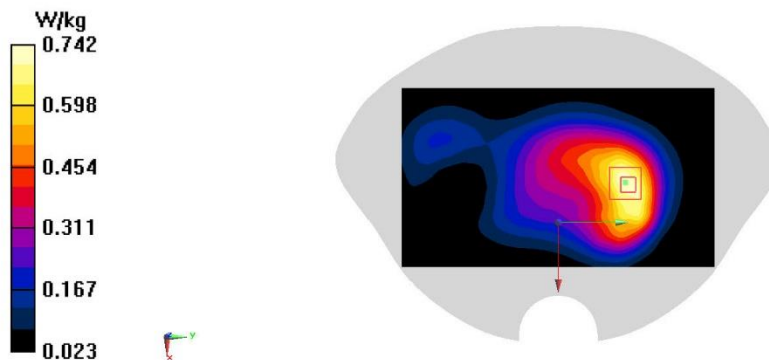

A. 30

### LTE B26 Head

Date/Time: 3/23/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated):  $f = 831.5$  MHz;  $\sigma = 0.934$  S/m;  $\epsilon_r = 43.127$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band26 (0) Frequency: 831.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(10.34, 10.34, 10.34)

**Area Scan (81x141x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.156 W/kg

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 4.621 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 0.178 W/kg  
**SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.105 W/kg**  
Maximum value of SAR (measured) = 0.160 W/kg

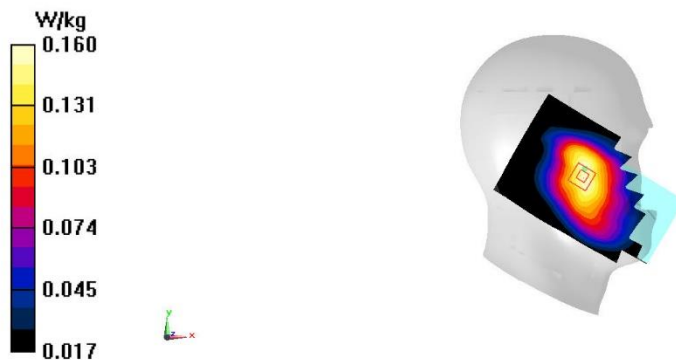

### LTE B26 Body 10mm

Date/Time: 3/23/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated):  $f = 841.5$  MHz;  $\sigma = 0.938$  S/m;  $\epsilon_r = 43.098$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band26 (0) Frequency: 841.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(10.34, 10.34, 10.34)

**Area Scan (81x141x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.401 W/kg

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 14.49 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 0.480 W/kg  
**SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.181 W/kg**  
Maximum value of SAR (measured) = 0.404 W/kg

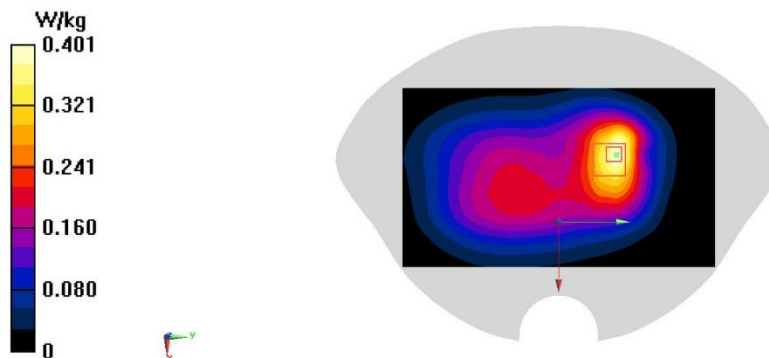

### LTE B26 Body 15mm

Date/Time: 3/23/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated):  $f = 841.5$  MHz;  $\sigma = 0.938$  S/m;  $\epsilon_r = 43.098$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band26 (0) Frequency: 841.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(10.34, 10.34, 10.34)

**Area Scan (81x141x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.288 W/kg

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 13.66 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 0.348 W/kg  
**SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.137 W/kg**  
Maximum value of SAR (measured) = 0.288 W/kg

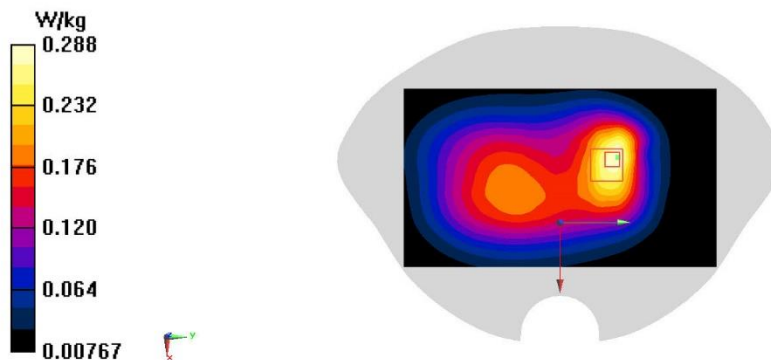

### LTE B41 PC2 Head

Date/Time: 4/9/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated):  $f = 2593$  MHz;  $\sigma = 1.963$  S/m;  $\epsilon_r = 39.684$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band41 PC2 (0) Frequency: 2593 MHz Duty Cycle: 1:2.30994

Probe: EX3DV4 - SN7673 ConvF(7.31, 7.31, 7.31)

**Area Scan (101x181x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm  
Maximum value of SAR (interpolated) = 1.74 W/kg

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 8.773 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 2.29 W/kg  
**SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.488 W/kg**  
Maximum value of SAR (measured) = 1.76 W/kg

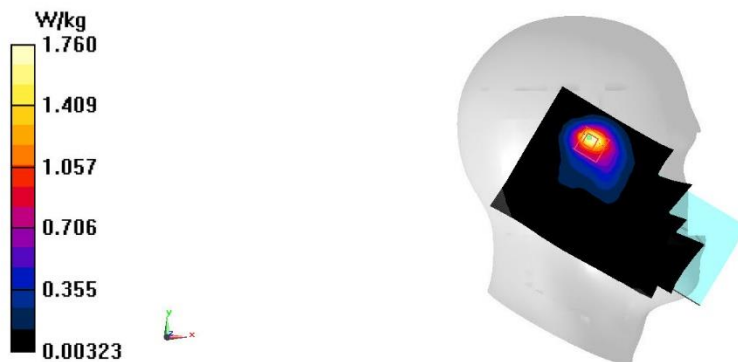



### LTE B41 PC2 Body 10mm

Date/Time: 4/9/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated):  $f = 2593$  MHz;  $\sigma = 1.963$  S/m;  $\epsilon_r = 39.684$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band41 PC2 (0) Frequency: 2593 MHz Duty Cycle: 1:2.30994

Probe: EX3DV4 - SN7673 ConvF(7.31, 7.31, 7.31)

**Area Scan (101x181x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm  
Maximum value of SAR (interpolated) = 0.742 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 12.62 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 0.878 W/kg  
**SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.206 W/kg**  
Maximum value of SAR (measured) = 0.702 W/kg

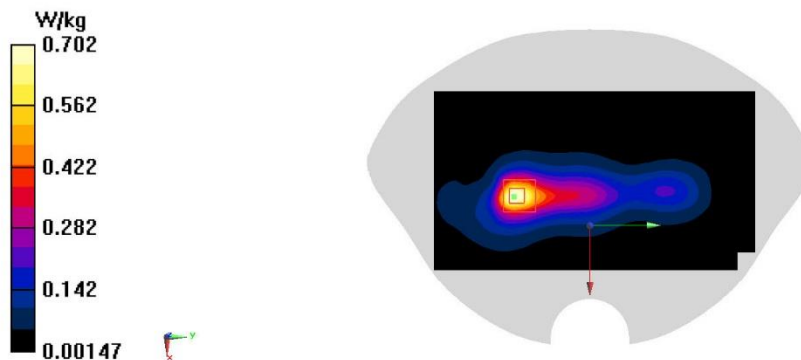

**LTE B41 PC2 Body 15mm**

Date/Time: 4/9/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated):  $f = 2593$  MHz;  $\sigma = 1.963$  S/m;  $\epsilon_r = 39.684$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band41 PC2 (0) Frequency: 2593 MHz Duty Cycle: 1:2.30994

Probe: EX3DV4 - SN7673 ConvF(7.31, 7.31, 7.31); Calibrated: 7/8/2022

**Area Scan (101x181x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm  
 Maximum value of SAR (interpolated) = 0.396 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
 Reference Value = 6.380 V/m; Power Drift = -0.17 dB  
 Peak SAR (extrapolated) = 0.485 W/kg  
**SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.117 W/kg**  
 Maximum value of SAR (measured) = 0.381 W/kg

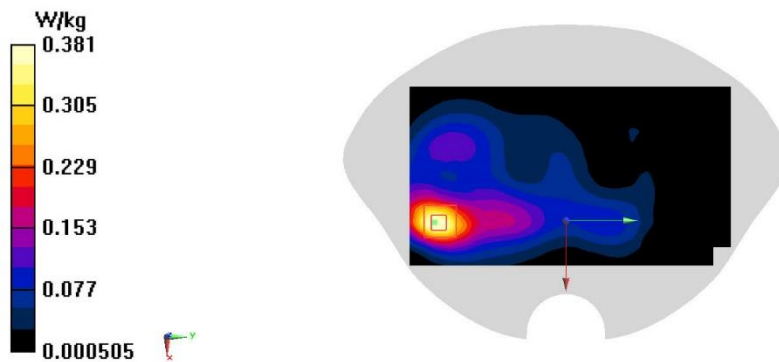

### LTE B41 PC3 Head

Date/Time: 4/9/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated):  $f = 2593$  MHz;  $\sigma = 1.963$  S/m;  $\epsilon_r = 39.684$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band41 PC3 (0) Frequency: 2593 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN7673 ConvF(7.31, 7.31, 7.31)

**Area Scan (101x181x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm  
Maximum value of SAR (interpolated) = 1.46 W/kg

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 7.950 V/m; Power Drift = 0.12 dB  
Peak SAR (extrapolated) = 1.94 W/kg  
**SAR(1 g) = 0.892 W/kg; SAR(10 g) = 0.410 W/kg**  
Maximum value of SAR (measured) = 1.49 W/kg

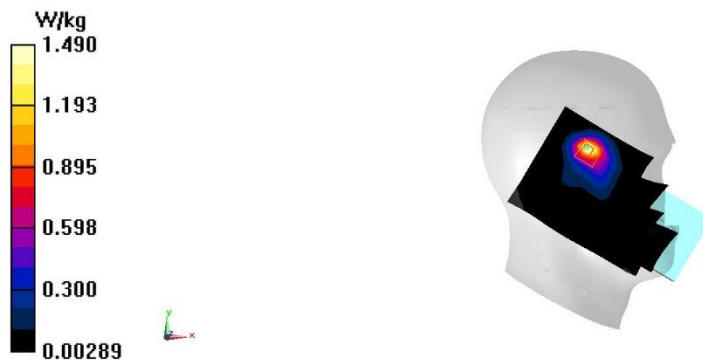

A. 37

**LTE B41 PC3 Body 10mm**

Date/Time: 4/9/2023

Electronics: DAE4 Sn777


Medium: H700-6000M

Medium parameters used (interpolated):  $f = 2593$  MHz;  $\sigma = 1.963$  S/m;  $\epsilon_r = 39.684$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band41 PC3 (0) Frequency: 2593 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN7673 ConvF(7.31, 7.31, 7.31)

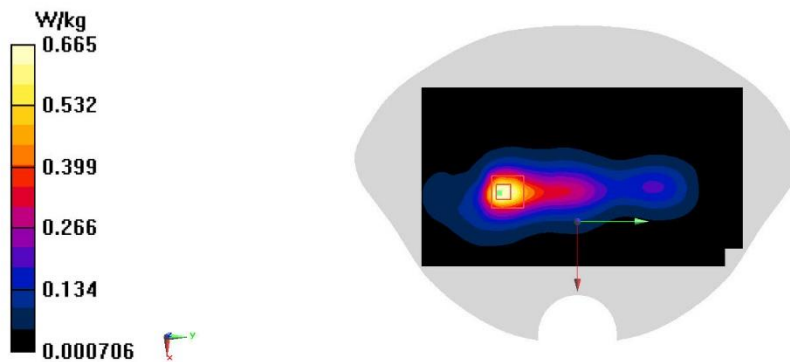**Area Scan (101x181x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm  
Maximum value of SAR (interpolated) = 0.711 W/kg**Zoom Scan (7x8x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 12.38 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 0.843 W/kg  
**SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.198 W/kg**  
Maximum value of SAR (measured) = 0.665 W/kg

### LTE B41 PC3 Body 15mm

Date/Time: 4/9/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated):  $f = 2593$  MHz;  $\sigma = 1.963$  S/m;  $\epsilon_r = 39.684$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature: 23.3°C      Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band41 PC2 (0) Frequency: 2593 MHz Duty Cycle: 1:2.30994

Probe: EX3DV4 - SN7673 ConvF(7.31, 7.31, 7.31); Calibrated: 7/8/2022

**Area Scan (101x181x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm  
Maximum value of SAR (interpolated) = 0.405 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 5.794 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 0.516 W/kg  
**SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.123 W/kg**  
Maximum value of SAR (measured) = 0.407 W/kg

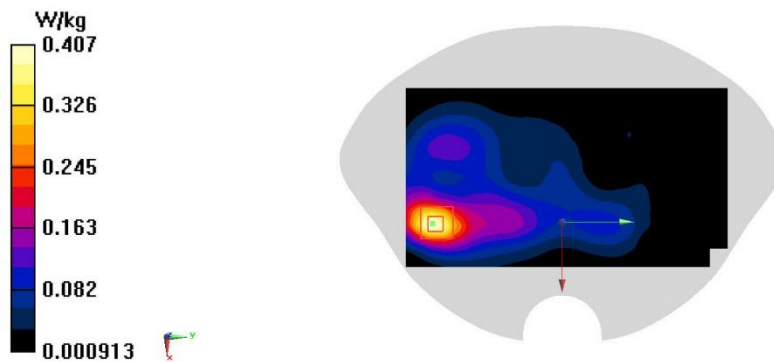

**LTE B66 Head**

Date/Time: 3/27/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used:  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.382 \text{ S/m}$ ;  $\epsilon_r = 41.055$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $23.3^\circ\text{C}$       Liquid Temperature:  $22.5^\circ\text{C}$

Communication System: UID 0, LTE Band66 (0) Frequency:  $1745 \text{ MHz}$  Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.49, 8.49, 8.49)

**Area Scan (81x141x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.212 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $5.801 \text{ V/m}$ ; Power Drift =  $-0.03 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.246 \text{ W/kg}$   
**SAR(1 g) =  $0.161 \text{ W/kg}$ ; SAR(10 g) =  $0.102 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.211 \text{ W/kg}$



A. 40