

Table of Contents

| | |
|--|----|
| Release Control Record | 3 |
| 1. Summary of Maximum T-Rating | 4 |
| 2. Description of Equipment Under Test..... | 5 |
| 3. HAC T-Coil Measurement System | 7 |
| 3.1 SPEAG DASY System | 7 |
| 3.1.1 Robot..... | 8 |
| 3.1.2 AM1D Probe..... | 8 |
| 3.1.3 Audio Magnetic Calibration Coil (AMCC) | 9 |
| 3.1.4 Audio Magnetic Measuring Instrument (AMMI) | 9 |
| 3.1.5 Data Acquisition Electronics (DAE) | 9 |
| 3.1.6 Phantoms | 10 |
| 3.1.7 Device Holder..... | 10 |
| 3.2 System Calibration | 11 |
| 3.3 EUT Measurements Reference and Plane..... | 12 |
| 3.4 HAC T-Coil Measurement Procedure..... | 13 |
| 3.5 Test System Setup and Audio Input Level..... | 15 |
| 4. HAC Measurement Evaluation..... | 18 |
| 4.1 Measurement Criteria..... | 18 |
| 4.1.1 Field Intensity | 18 |
| 4.1.2 Frequency Response | 18 |
| 4.1.3 Signal Quality | 19 |
| 4.2 EUT Configuration and Setting..... | 19 |
| 4.3 HAC T-Coil Testing Results | 19 |
| 4.3.1 GSM CMRS Voice Testing Results..... | 19 |
| 4.3.2 WCDMA CMRS Voice Testing Results | 19 |
| 4.3.3 VoLTE Testing Results..... | 21 |
| 4.3.4 VoWiFi Testing Results..... | 22 |
| 5. Calibration of Test Equipment..... | 24 |
| 6. Measurement Uncertainty | 25 |
| 7. Information of the Testing Laboratories..... | 26 |
| | |
| Appendix A. Plots of HAC T-Coil Measurement | |
| Appendix B. Calibration Certificate for Probe | |
| Appendix C. Photographs of EUT and Setup | |

1. Summary of Maximum T-Rating

| Mode | Band | T-Rating | Frequency Response | Magnetic Intensity |
|---------|---------|----------|--------------------|--------------------|
| GSM | GSM850 | T4 | PASS | PASS |
| | GSM1900 | T4 | PASS | PASS |
| WCDMA | Band II | T4 | PASS | PASS |
| | Band IV | T4 | PASS | PASS |
| | Band V | T4 | PASS | PASS |
| FDD-LTE | Band 2 | T4 | PASS | PASS |
| | Band 4 | T4 | PASS | PASS |
| | Band 5 | T4 | PASS | PASS |
| | Band 12 | T4 | PASS | PASS |
| | Band 25 | T4 | PASS | PASS |
| | Band 26 | T4 | PASS | PASS |
| | Band 66 | T4 | PASS | PASS |
| | Band 71 | T4 | PASS | PASS |
| TDD-LTE | Band 41 | T4 | PASS | PASS |
| WLAN | 2.4G | T4 | PASS | PASS |
| | 5.2G | T4 | PASS | PASS |
| | 5.3G | T4 | PASS | PASS |
| | 5.6G | T4 | PASS | PASS |
| | 5.8G | T4 | PASS | PASS |
| Summary | | T4 | | |

Note:

1. The HAC T-Coil limit (**T-Rating Category T3**) is specified in FCC 47 CFR part 20.19 and ANSIC63.19.
2. The device T-Coil rating is determined by the minimum rating.



2. Description of Equipment Under Test

| | |
|--|--|
| EUT Type | Smart Phone |
| Brand Name | NOKIA |
| Model Name | TA-1584 |
| Sample 1 IMEI Code | IMEI 1: 354668350020950 |
| Sample 2 IMEI Code | IMEI 1: 354668350023111 |
| HW Version | V1.0 |
| SW Version | 04US_0_023 |
| Tx Frequency Bands (Unit: MHz) | GSM850 : 824 ~ 849 GSM1900 : 1850 ~ 1910 WCDMA Band II : 1850 ~ 1910 WCDMA Band IV : 1710 ~ 1755 WCDMA Band V : 824 ~ 849 LTE Band 2 : 1850 ~ 1910 LTE Band 4 : 1710 ~ 1755 LTE Band 5 : 824 ~ 849 LTE Band 12 : 699 ~ 716 LTE Band 25 : 1850 ~ 1915 LTE Band 26 : 814 ~ 849 LTE Band 41 : 2496 ~ 2690 LTE Band 66 : 1710 ~ 1780 LTE Band 71 : 663 ~ 698 WLAN : 2412 ~ 2462, 5180 ~ 5240, 5260 ~ 5320, 5500 ~ 5720, 5745 ~ 5825 Bluetooth : 2402 ~ 2480 |
| Uplink Modulations | GSM & GPRS & EDGE : GMSK, 8PSK WCDMA : QPSK LTE : QPSK, 16QAM, 64QAM 802.11b : DSSS 802.11a/g/n/ac : OFDM Bluetooth : GFSK, $\pi/4$ -DQPSK, 8-DPSK, LE |
| Maximum Tune-up Conducted Power (Unit: dBm) | Please refer to section 4.5.1 of this report. |
| Antenna Type | WLAN: PIFA Antenna WWAN: Fixed Internal Antenna |
| EUT Stage | Identical Prototype |

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.
2. According to the document <Difference of change> provided by the manufacturer, these changes do not affect the RF parameters, so sample 1 is fully tested, and sample 2 verifies the worst case.



**BUREAU
VERITAS**

FCC HAC (T-Coil) Test Report



Certificate #6613.01

Air Interface and Operational Mode:

| Air Interface | Bands | Transport Type | ANSI C63.19 Tested | Simultaneous But Not Tested | Name of Voice Service | Power Reduction |
|---------------|-------|----------------|--------------------|-----------------------------|---------------------------|-----------------|
| GSM | 850 | VO | YES | WLAN or BT | CMRS Voice ⁽¹⁾ | No |
| | 1900 | | | | | No |
| | EGPRS | DT | No | WLAN or BT | N/A | No |
| WCDMA | II | VO | YES | WLAN or BT | CMRS Voice ⁽¹⁾ | No |
| | IV | | | | | No |
| | V | | | | | No |
| | HSPA | DT | No | WLAN or BT | N/A | No |
| FDD-LTE | 2 | VD | YES | WLAN or BT | VoLTE(1) | No |
| | 4 | | | | | No |
| | 5 | | | | | No |
| | 12 | | | | | No |
| | 25 | | | | | No |
| | 26 | | | | | No |
| | 66 | | | | | No |
| | 71 | | | | | No |
| TDD-LTE | 41 | VD | YES | WLAN or BT | VoLTE(1) | No |
| WLAN | 2.4G | VD | YES | WWAN | VoWiFi ⁽²⁾ | No |
| | 5.2G | VD | YES | | VoWiFi ⁽²⁾ | No |
| | 5.3G | | | | No | |
| | 5.6G | | | | No | |
| | 5.8G | | | | No | |
| Bluetooth | 2.4G | DT | No | WWAN | N/A | No |

Transport Type

VO = Legacy Cellular Voice Service
 DT = Digital Transport Only (No Voice)
 VD = IP Voice Service over Digital Transport

Remark:

- Reference level in accordance with 7.4.2.1 of ANSI C63.19-2011 and the July 2012 VoLTE interpretation.
- Reference level is -20 dBm0 in accordance with FCC KDB 285076
- The device have similar frequency in some bands: LTE B5/26, 4/66, 2/25, since the supported frequency spans for the smaller bands are completely cover by the larger bands, therefore, only larger bands were required to be tested for hearing-aid compliance

3. HAC T-Coil Measurement System

3.1 SPEAG DASY System

DASY system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY5 software defined. The DASY software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion form the optical into digital electric signal of the DAE and transfers data to the PC.

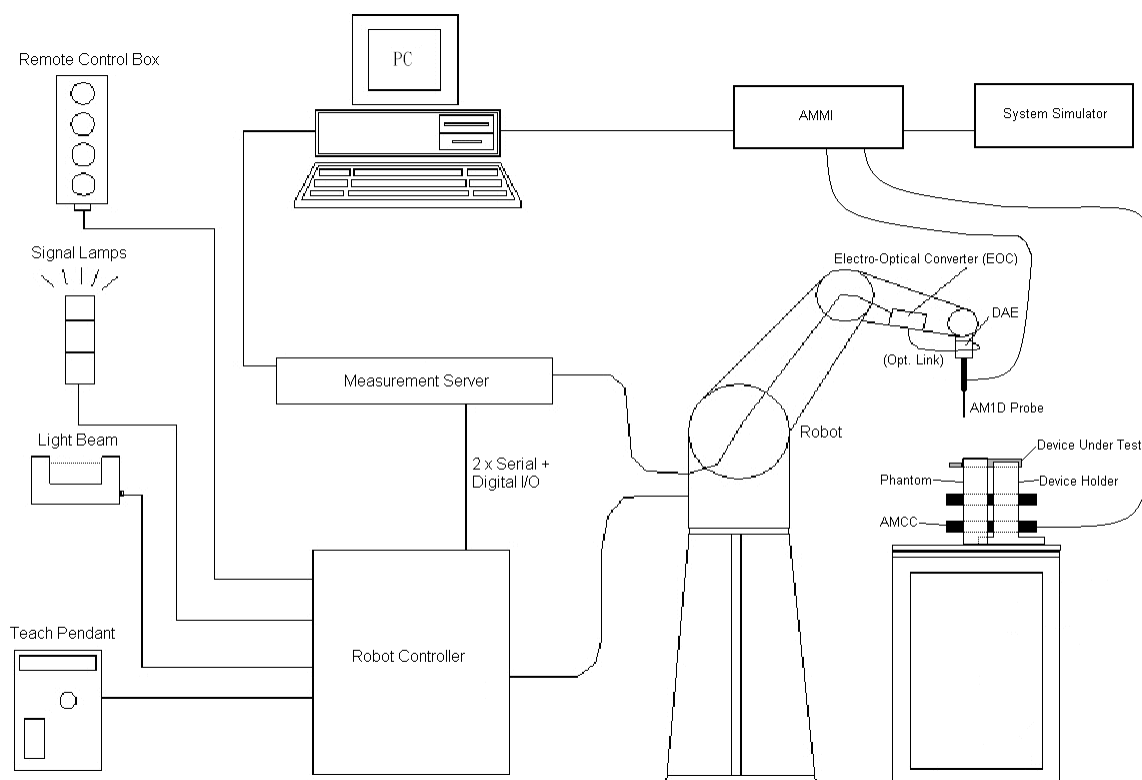


Fig-3.1 DASY System Setup

3.1.1 Robot

The DASY6 system uses the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY6: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

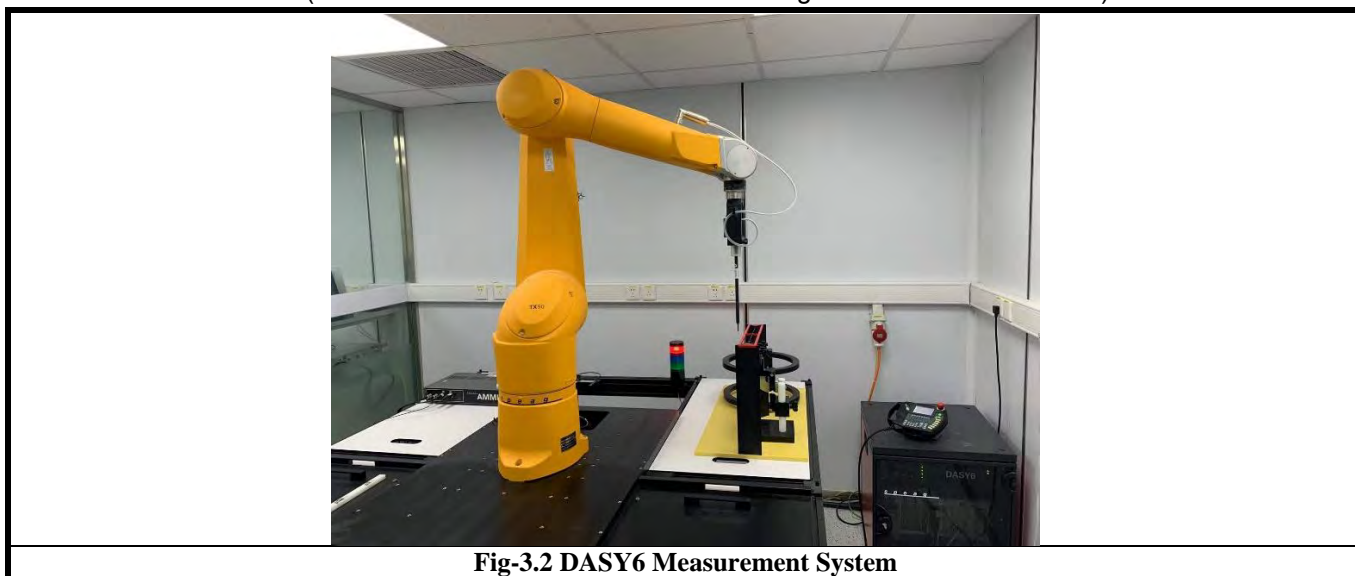



Fig-3.2 DASY6 Measurement System


3.1.2 AM1D Probe

The AM1D probe is an active probe with a single sensor. It is fully RF-shielded and has a rounded tip 6 mm in diameter incorporating a pickup coil with its center offset 3 mm from the tip and the sides. The symmetric signal preamplifier in the probe is fed via the shielded symmetric output cable from the AMMI with a 48V “phantom” voltage supply. The 7-pin connector on the back in the axis of the probe does not carry any signals. It is mounted to the DAE for the correct orientation of the sensor. If the probe axis is tilted 54.7 degrees from the vertical, the sensor is approximately vertical when the signal connector is at the underside of the probe (cable hanging downwards).

| | | |
|----------------------|---|---|
| Model | AM1DV3 |  |
| Sampling Rate | 0.1 kHz to 20 kHz RF sensitivity < -100 dB | |
| Preamplifier | Symmetric, 40 dB | |
| Dynamic Range | -60 to 40 dB A/m | |
| Calibration | at 1kHz | |
| Dimensions | Tip diameter : 6 mm Length : 290 mm | |


3.1.3 Audio Magnetic Calibration Coil (AMCC)

The AMCC is a Helmholtz Coil designed for calibration of the AM1D probe. The two horizontal coils generate a homogeneous magnetic field in the z direction. The DC input resistance is adjusted by a series resistor to approximately 50 Ohm, and a shunt resistor of 10 Ohm permits monitoring the current with a scale of 1:10.


| Signal | Connector | Resistance |  |
|-------------------|--------------------|--|---|
| Coil In | BNC | Typically 50 Ohm | |
| Coil Monitor | BNO | 10 Ohm $\pm 1\%$ (100mV corresponding to 1 A/m) | |
| Dimensions | 370 x 370 x 196 mm | | |

3.1.4 Audio Magnetic Measuring Instrument (AMMI)


The AMMI is a desktop 19-inch unit containing a sampling unit, a waveform generator for test and calibration signals, and a USB interface.

| | | |
|-------------------------------|---|---|
| Sampling Rate | 48 kHz / 24 bit |  |
| Dynamic Range | 100 dB (with AM1DV3 probe) | |
| Test Signal Generation | User selectable and predefined (via PC) | |
| Calibration | Auto-calibration / full system calibration using AMCC with monitor output | |
| Dimensions | 482 x 65 x 270 mm | |


3.1.5 Data Acquisition Electronics (DAE)

| | | |
|-----------------------------|---|---|
| Model | DAE3, DAE4 |  |
| Construction | Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop. | |
| Measurement Range | -100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV) | |
| Input Offset Voltage | < 5 μ V (with auto zero) | |
| Input Bias Current | < 50 fA | |
| Dimensions | 60 x 60 x 68 mm | |

3.1.6 Phantoms

| | | |
|---------------------|--|---|
| Model | Test Arch |  |
| Construction | Enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot. | |
| Dimensions | Length : 370 mm Width : 370 mm Height : 370 mm | |

3.1.7 Device Holder

| | | |
|---------------------|---|---|
| Model | Mounting Device |  |
| Construction | The Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to ANSI C63.19. | |
| Material | POM | |

3.2 System Calibration

For correct and calibrated measurement of the voltages and ABM field, DASY will perform a calibration job as below. In phase 1, the audio output is switched off, and a 200 mV_{pp} symmetric rectangular signal of 1 kHz is generated and internally connected directly to both channels of the sampling unit (Coil in, Probe in).

In phase 2, the audio output is off, and a 20 mV_{pp} symmetric 100 Hz signal is internally connected. The signals during phases 1 and 2 are available at the output on the rear panel of the AMMI. However, the output must not be loaded, in order to avoid influencing the calibration. An RMS voltmeter would indicate 100 mV_{RMS} during the first phase and 10 mV_{RMS} during the second phase. After the first two phases, the two input channels are both calibrated for absolute measurements of voltages. The resulting factors are displayed above the multi-meter window.

After phases 1 and 2, the input channels are calibrated to measure exact voltages. This is required to use the inputs for measuring voltages with their peak and RMS value.

In phase 3, a multi-sine signal covering each third-octave band from 50 Hz to 10 kHz is generated and applied to both audio outputs. The probe should be positioned in the center of the AMCC and aligned in the z-direction, the field orientation of the AMCC. The "Coil In" channel is measuring the voltage over the AMCC internal shunt, which is proportional to the magnetic field in the AMCC. At the same time, the "Probe In" channel samples the amplified signal picked up by the probe coil and provides it to a numerical integrator. The ratio of the two voltages in each third-octave filter leads to the spectral representation over the frequency band of interest. The Coil signal is scaled in dBV, and the Probe signal is first integrated and normalized to show dB A/m. The ratio probe-to-coil at the frequency of 1 kHz is the sensitivity which will be used in the consecutive T-Coil jobs.

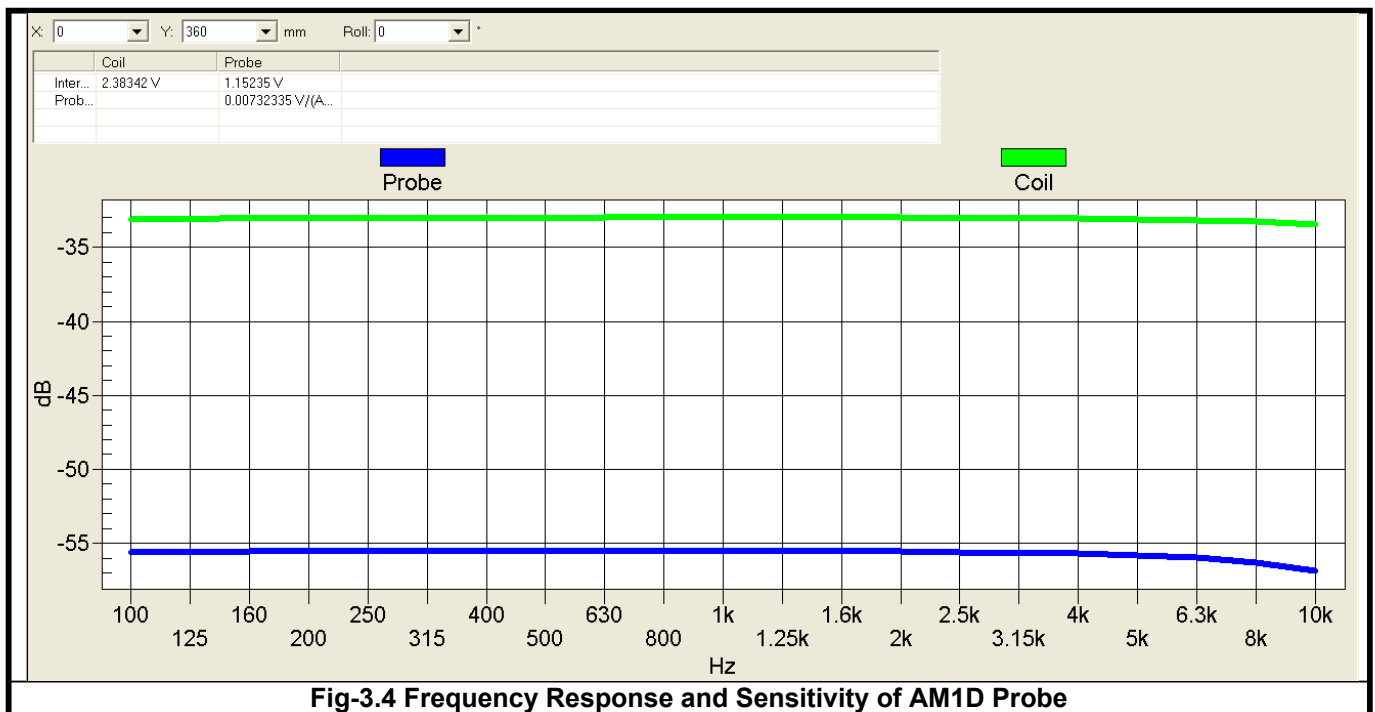


Fig-3.4 Frequency Response and Sensitivity of AM1D Probe

3.3 EUT Measurements Reference and Plane

The EUT is mounted in the device holder. The acoustic output of the EUT will coincide with the center point of the area formed by the dielectric wire and the middle bar of the arch's top frame. Then EUT will be moved vertically upwards until it touches the frame.

Figure 3.5 illustrates the three standard probe orientations. Position 1 is the perpendicular (axial) orientation of the probe coil. Orientation 2 is the transverse (radial) orientation. The space between the measurement positions is not fixed. It is recommended that a scan of the EUT be done for each probe coil orientation and that the maximum level recorded be used as the reading for that orientation of the probe coil.

- (1) The reference plane is the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset that, in normal handset use, rest against the ear.
- (2) The measurement plane is parallel to, and 10 mm in front of the reference plane.
- (3) The reference axis is normal to the reference plane and passes through the center of the receiver speaker section or it may be centered on a secondary inductive source.
- (4) The measurement points may be located where the perpendicular (axial) and transverse (radial) field intensity measurements are optimum with regard to the requirements. However, the measurement points should be near the acoustic output of the EUT and shall be located in the same half of the phone as the EUT receiver. In a EUT handset with a centered receiver and a circularly symmetrical magnetic field, the measurement axis and the reference axis would coincide.
- (5) The relative spacing of each measurement orientations is not fixed. The perpendicular (axial) and transverse (radial) orientations should be chosen to select the optimal position.
- (6) The measurement point for the axial position is located 10 mm from the reference plane on the measurement axis.

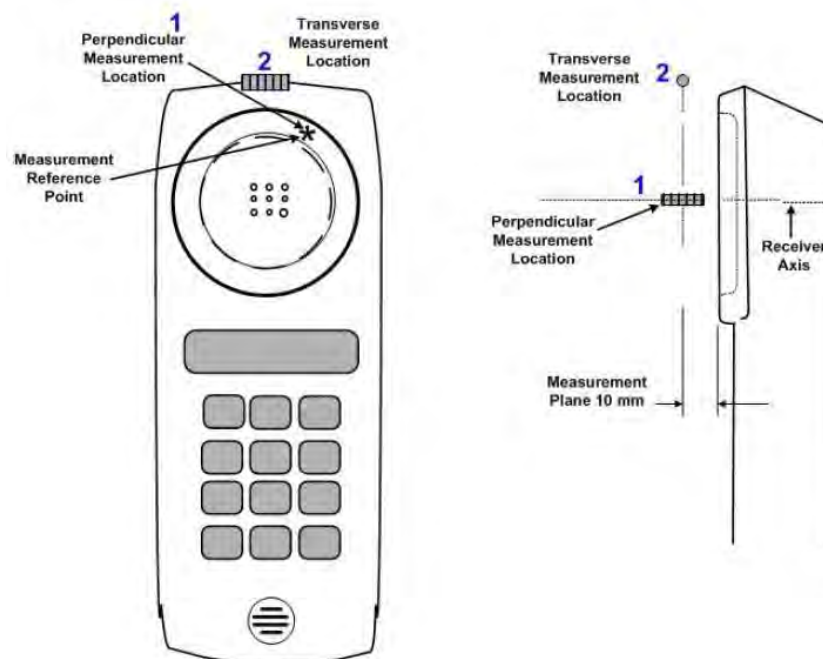


Fig-3.5 Axis and Planes

3.4 HAC T-Coil Measurement Procedure

According to ANSI C63.19-2011, the T-Coil test procedure for wireless communications device is as below.

1. Position the EUT in the test setup and connect the EUT RF connector to a base station simulator.
2. The drive level to the EUT is set such that the reference input level specified in Table 7.1 is input to the base station simulator in the 1 kHz, 1/3 octave band. This drive level shall be used for the T-Coil signal test (ABM1) at $f = 1$ kHz. Either a sine wave at 1025 Hz or a voice-like signal, band-limited to the 1 kHz 1/3 octave, as defined in 7.4.2, shall be used for the reference audio signal. If interference is found at 1025 Hz, an alternate nearby reference audio signal frequency may be used. The same drive level will be used for the ABM1 frequency response measurements at each 1/3 octave band center frequency. The EUT volume control may be set at any level up to maximum, provided that a signal at any frequency at maximum modulation would not result in clipping or signal overload.
3. Determine the magnetic measurement locations for the EUT, if not already specified by the manufacturer, as described in 7.4.4.1.1 and 7.4.4.2.
4. At each measurement location, measure and record the desired T-Coil magnetic signals (ABM1 at f_i) as described in 7.4.4.2 in each individual ISO 266-1975 R10 standard 1/3 octave band. The desired audio band input frequency (f_i) shall be centered in each 1/3 octave band maintaining the same drive level as determined in Step 2 and the reading taken for that band. Equivalent methods of determining the frequency response may also be employed, such as fast Fourier transform (FFT) analysis using noise excitation or input-output comparison using simulated speech. The full-band integrated or half-band integrated probe output, as described in D.9, may be used, as long as the appropriate calibration curve is applied to the measured result, so as to yield an accurate measurement of the field magnitude. (The resulting measurement shall be an accurate measurement in dB A/m.) All measurements of the desired signal shall be shown to be of the desired signal and not of an undesired signal. This may be shown by turning the desired signal on and off with the probe measuring the same location. If the scanning method is used, the scans shall show that all measurement points selected for the ABM1 measurement meet the ambient and test system noise criterion in 7.3.1.
5. At the measurement location for each orientation, measure and record the undesired broadband audio magnetic signal (ABM2) as described in 7.4.4.4 with no audio signal applied (or digital zero applied, if appropriate) using A-weighting, and the half-band integrator. Calculate the ratio of the desired to undesired signal strength (i.e., signal quality).
6. Determine the category that properly classifies the signal quality based on Table 8.5.

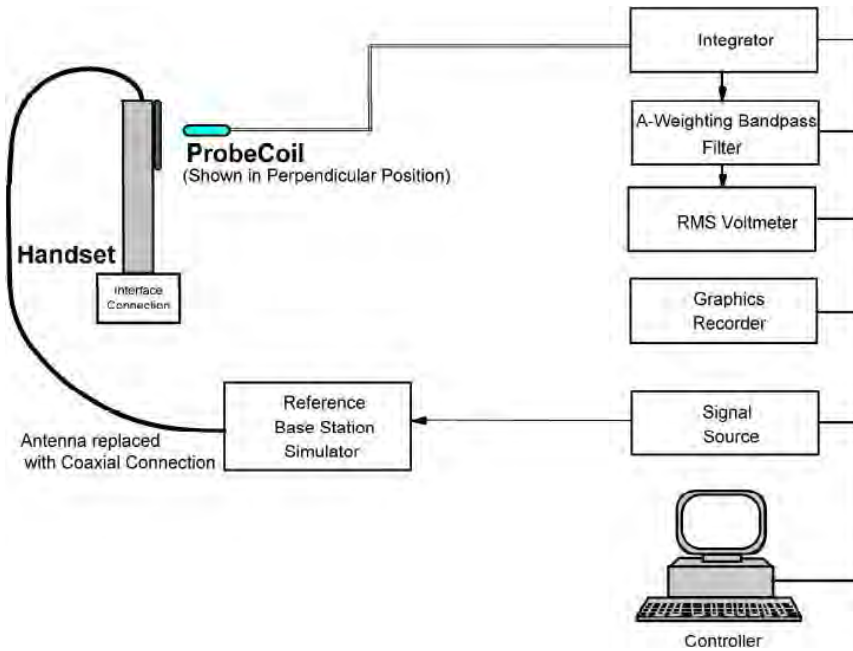


Fig-3.6 T-Coil Measurement Test Setup

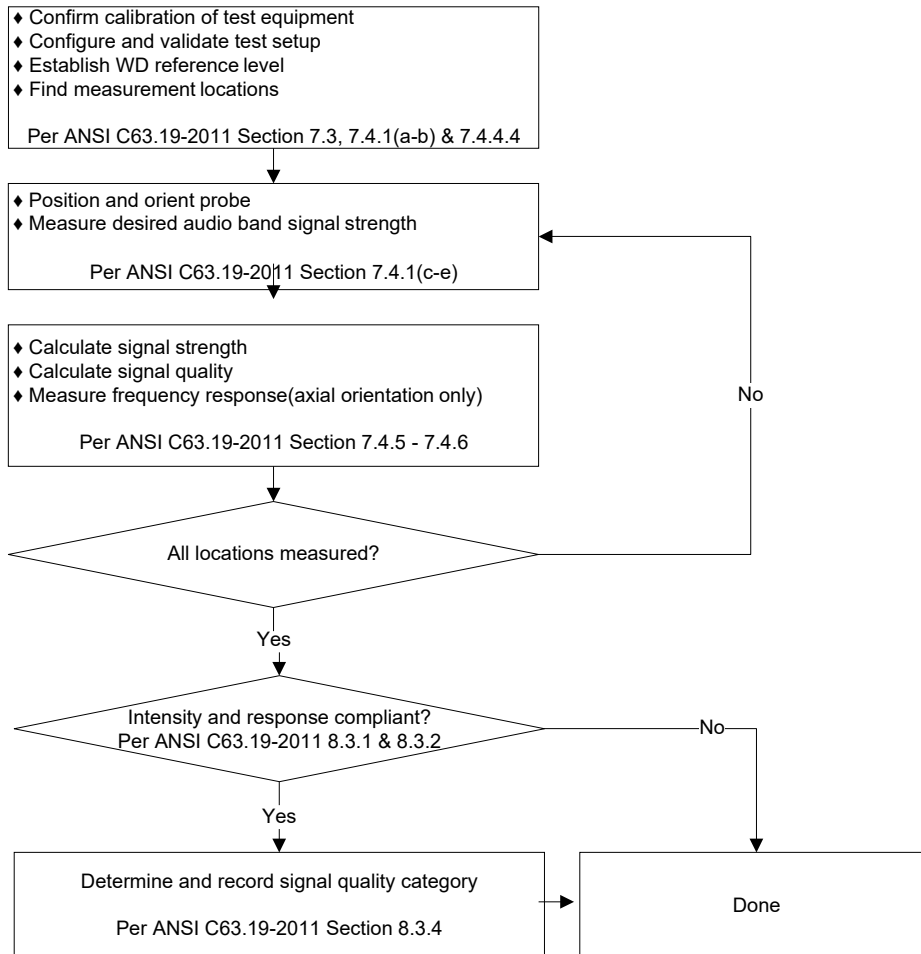


Fig-3.7 T-Coil Signal Test Flowchart

3.5 Test System Setup and Audio Input Level

The test setup shown in below is to extend DASY system with the capability of Audio Band Magnetic (ABM) measurements according to standard ANSI C63.19-2011. Together with the HAC RF extension, it permits complete characterization of the emissions of a wireless device (WD). The signals measured during these tests represent the field picked up by the T-Coil of a hearing aid. Using DASY software, these orthogonal axes can be scanned with a probe incorporating a single sensor coil. The WD is mounted on the Test Arch Phantom. The acoustic center of the WD is mounted in such a way that it is centered, and this represents the reference for the combination of ABM and RF field evaluation. The ABM fields of the WD (frequency range <20 kHz) are scanned with a fully RF-shielded active 1-D probe. The probe axis is oriented in the space diagonal to the three orthogonal axes, and its single sensor can be oriented to the axes by 120 degree rotation. The probe signal is evaluated by an Audio Magnetic Measurement Instrument (AMMI) which is interfaced to the DASY computer via USB. The AMMI also provides test and calibration signals and interfaces to the Helmholtz Audio Magnetic Calibration Coil (AMCC). Through the connector at the AMMI, predefined or user-definable audio signals are available for injection into the WD during the test.

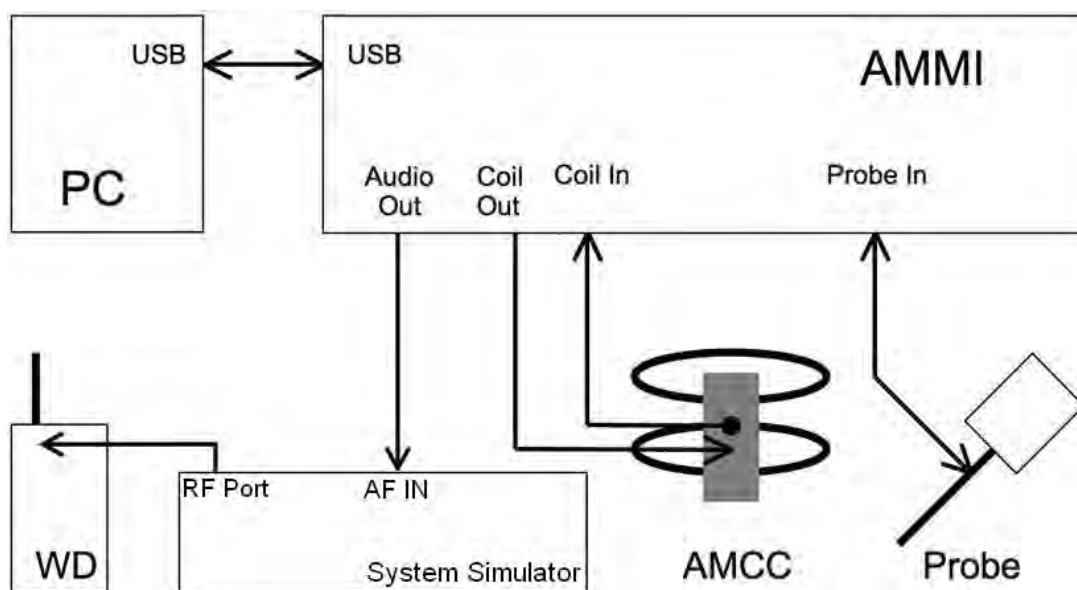


Fig-3.8 System Setup for T-Coil Testing

According to KDB 285076 D02, T-Coil testing for VoLTE and VoWiFi requires test instrumentation that can (1) for the system to be able to establish an IP call from/to the handset under test, (2) through an IMS (IP Multimedia Subsystem) and SIP/IP server, (3) to an analog audio adapter containing the permissible set of codecs used by the device under test, and (4) inject the necessary C63.19 test tones at the average speech level for the measurement. The test setup is illustrated in Figure 3.9. The R&S CMW500 was used as system simulator for VoLTE and VoWiFi T-Coil testing. The DAU (Data Application Unit) in CMW500 integrates IMS and SIP/IP server that can establish VoLTE and Wi-Fi calling, and transport the test tones from AMMI (Audio Magnetic Measuring Instrument) to EUT.

The speech levels with the settings at the AF connector of R&S CMW500 have been calibrated, and it can be set manually to ensure the specific full-scale speech level during T-Coil testing. For an example, the gain setting for -16 dBm0 has been calculated through below formula.

$$3.14 \text{ dBm0} = X \text{ dBV} = -3.01 \text{ dBV}$$

$$-16 \text{ dBm0} = L_{-16\text{dBm0}} \text{ dBV} = -22.00 \text{ dBV}$$

$$\text{Gain } 100 = G \text{ dBV} = 3.13 \text{ dBV}$$

$$\text{Difference for } -16 \text{ dBm0} = D_{-16\text{dBm0}} = L_{-16\text{dBm0}} - G = -22 - 3.13 = -25.13 \text{ dBV}$$

$$\text{Resulting Gain for } -16 \text{ dBm0} = 10^{(D_{-16\text{dBm0}} / 20)} \times 100 = 5.54$$

$$\text{Gain Setting} = \text{Resulting Gain} \times \text{Required Gain Factor}$$

$$\text{Gain setting for voice } 1\text{kHz} = 5.54 \times 4.33 = 23.99$$

$$\text{Gain setting for voice } 300\text{-}3\text{kHz} = 5.54 \times 8.48 = 46.98$$

The gain setting for other signal types need to be adjusted to achieve the same average level. Those signal types have the following differences/factors compared to the 1 kHz sine signal:

| Signal Type | Duration (s) | BWC (dB) | Required Gain Factor |
|--------------------|--------------|----------|----------------------|
| 1 kHz sine | - | 0.0 | 1.00 |
| 48k_voice_1kHz | 1 | 0.16 | 4.33 |
| 48k_voice_300-3000 | 2 | 10.8 | 8.48 |

4. HAC Measurement Evaluation

4.1 Measurement Criteria

The HAC Standard ANSI C63.19-2011 represents performance requirements for acceptable interoperability of hearing aids with wireless communications devices. When these parameters are met, a hearing aid operates acceptably in close proximity to a wireless communications device.

4.1.1 Field Intensity

When measured as specified in this standard, the T-Coil signal shall be ≥ -18 dB (A/m) at 1 kHz, in a 1/3 octave band filter for all orientations.

4.1.2 Frequency Response

The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the below response curve, over the frequency range 300 Hz to 3000 Hz. Figure 4.1 and Figure 4.2 provide the boundaries for the specified frequency. These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

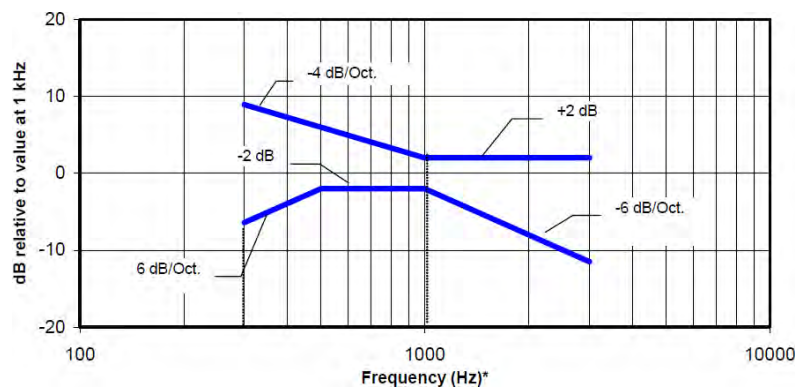


Fig-4.1 Boundaries for EUT with a field ≤ -15 dB (A/m) at 1 kHz

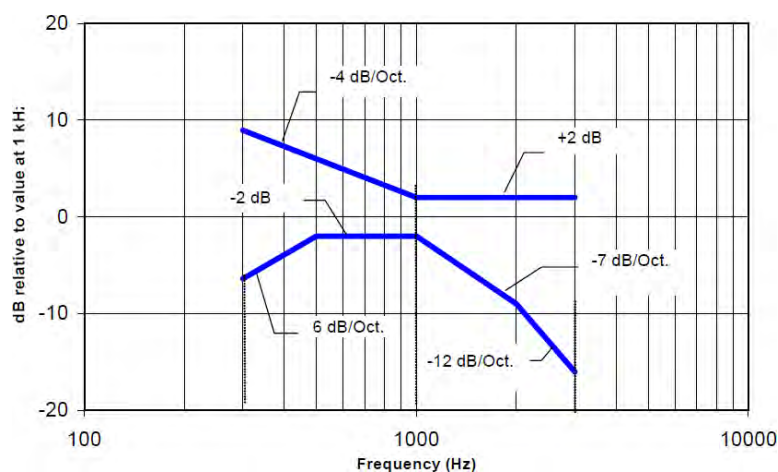


Fig-4.2 Boundaries for EUT with a field > -15 dB (A/m) at 1 kHz

4.1.3 Signal Quality

The worst signal quality of the three T-Coil signal measurements shall be used to determine the T-Coil mode category per below table.

| Category | Telephone Parameters WD Signal Quality (Signal to Noise Ratio, in dB) |
|-------------|--|
| Category T1 | 0 – 10 |
| Category T2 | 10 – 20 |
| Category T3 | 20 – 30 |
| Category T4 | > 30 |

4.2 EUT Configuration and Setting

For HAC T-Coil testing, the EUT was linked and controlled by base station emulator. Communication between the EUT and the emulator was established by coaxial connection. The EUT was set from the emulator to radiate maximum output power during HAC testing. Also EUT was set to mute on, maximum volume, and backlight off during T-Coil testing.

4.3 HAC T-Coil Testing Results

4.3.1 GSM CMRS Voice Testing Results

General Note:

1. Codec Investigation: For a voice service/air interface, investigate the variations of codec configurations (:NB, NB bit rate) and document the parameters (ABM1, ABM2, S+N/N, frequency response) for that voice service. It is only necessary to document this for one channel/band, the following worst investigation codec would be remarked to be used for the testing for the handset.

2. Air Interface Investigation:

a. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface.

b. According to the ANSI C63.19 2011 section 7.3.2, test middle channel of each frequency band for HAC testing for each orientation to determine worst HAC T-Coil rating.

Codec Investigation

| Band | Channel | Codec Setting | Probe Orientation | ABM1 (dB A/m) | ABM2 (dB A/m) | Frequency Response | SNR (dB) |
|--------|---------|---------------|-------------------|---------------|---------------|--------------------|----------|
| GSM850 | 189 | FR V1 | Axial (Z) | 7.06 | -26.02 | PASS | 33.08 |
| GSM850 | 189 | HR V1 | Axial (Z) | 7.86 | -28.45 | PASS | 36.31 |

Test Summary

| Plot No. | Band | Channel | Sample | Codec Setting | Probe Orientation | ABM1 (dB A/m) | ABM2 (dB A/m) | Ambient Noise (dB A/m) | Frequency Response Margin (dB) | Frequency Response | SNR (dB) | T-Rating |
|----------|---------|---------|--------|---------------|-------------------|---------------|---------------|------------------------|--------------------------------|--------------------|--------------|----------|
| 01 | GSM850 | 189 | 1 | FR V1 | Axial (Z) | 7.06 | -26.02 | -50.23 | 1.72 | PASS | 33.08 | T4 |
| | GSM850 | 189 | | FR V1 | Radial (Y) | -10.07 | -49.01 | | | | 38.94 | T4 |
| 02 | GSM1900 | 661 | 1 | FR V1 | Axial (Z) | -9.90 | -50.66 | -50.31 | 1.75 | PASS | 35.94 | T4 |
| | GSM1900 | 661 | | FR V1 | Radial (Y) | 5.37 | -30.57 | | | | 40.76 | T4 |
| | GSM850 | 189 | 2 | FR V1 | Axial (Z) | 6.99 | -28.27 | -50.44 | 1.65 | PASS | 35.26 | T4 |
| | GSM850 | 189 | | FR V1 | Radial (Y) | -9.69 | -51.65 | | | | 41.96 | T4 |

4.3.2 WCDMA CMRS Voice Testing Results

Codec Investigation

| Band | Channel | Codec Setting | Probe Orientation | ABM1 (dB A/m) | ABM2 (dB A/m) | Frequency Response | SNR (dB) |
|---------|---------|---------------|-------------------|---------------|---------------|--------------------|--------------|
| WCDMA V | 4182 | AMR 4.75kbps | Axial (Z) | 5.00 | -49.50 | PASS | 54.50 |
| WCDMA V | 4182 | AMR 7.95kbps | Axial (Z) | 5.08 | -49.24 | PASS | 54.32 |
| WCDMA V | 4182 | AMR 12.2kbps | Axial (Z) | 5.25 | -49.36 | PASS | 54.61 |

Test Summary

| Plot No. | Band | Channel | Sample | Codec Setting | Probe Orientation | ABM1 (dB A/m) | ABM2 (dB A/m) | Ambient Noise (dB A/m) | Frequency Response Margin (dB) | Frequency Response | SNR (dB) | T-Rating |
|----------|----------|---------|--------|---------------|-------------------|---------------|---------------|------------------------|--------------------------------|--------------------|--------------|----------|
| 03 | WCDMA II | 9400 | 1 | AMR 7.95Kbps | Axial (Z) | 5.01 | -49.83 | -50.46 | 1.68 | PASS | 54.84 | T4 |
| | WCDMA II | 9400 | | AMR 7.95Kbps | Radial (Y) | -2.97 | -49.25 | | | | 46.28 | T4 |
| 04 | WCDMA IV | 1413 | 1 | AMR 7.95Kbps | Axial (Z) | 5.08 | -49.24 | -50.38 | 1.51 | PASS | 54.32 | T4 |
| | WCDMA IV | 1413 | | AMR 7.95Kbps | Radial (Y) | -3.93 | -50.6 | | | | 46.67 | T4 |
| 05 | WCDMA V | 4182 | 1 | AMR 7.95Kbps | Axial (Z) | 5.17 | -49.68 | -50.52 | 1.87 | PASS | 54.85 | T4 |
| | WCDMA V | 4182 | | AMR 7.95Kbps | Radial (Y) | -5.15 | -50.99 | | | | 45.84 | T4 |
| | WCDMA V | 4182 | 2 | AMR 7.95Kbps | Axial (Z) | 4.75 | -53.07 | -50.16 | 1.87 | PASS | 57.82 | T4 |
| | WCDMA V | 4182 | | AMR 7.95Kbps | Radial (Y) | -2.56 | -52.69 | | | | 50.13 | T4 |

4.3.3 VoLTE Testing Results

General Note:

1. Codec Investigation: For a voice service/air interface, investigate the variations of codec configurations (r, NB, NB bit rate) and document the parameters (ABM1, ABM2, S+N/N, frequency response) for that voice service. It is only necessary to document this for one channel / band, the following worst investigation codec would be remarked to be used for the testing for the handset.
2. Air Interface Investigation:
 - a. Use the worst-case codec test and document a limited set of bands / channel / bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface and the following worst configuration would be remarked to be used for the testing for the handset.
 - b. Select L TE FDD / TDD one frequency band to do measurement at the worst SNR position was additionally performed with varying the BWs/Modulations/RB size to verify the variation to find out worst configuration , the observed variation is very little to be within 1.5 dB which is much less than the margin from the rating threshold.
 - c. The TDD L TE power class 3 supports uplink-downlink configuration 0 and 6 and power class 2 supports uplink-downlink configuration 1 to 5 for this device, an investigation was performed to determine the worst-case uplink-downlink configuration to be used for the testing for the handset.
 - d. According to the ANSI C63.19 2011 section 7.3.2, test middle channel of each frequency band for HAC testing for each orientation to determine worst HAC T-Coil rating.

Radio Configuration Investigation

| Air Interface | Band | Bandwidth (MHz) | Modulation | RB Size | RB Offset | Channel | UL-DL Configuration | Probe Orientation | ABM1 (dB A/m) | ABM2 (dB A/m) | SNR (dB) |
|---------------|---------------|-----------------|------------|---------|-----------|--------------------------|---------------------|-------------------|---------------|---------------|--------------|
| FDD-LTE | LTE B2 | 20 | QPSK | 1 | 0 | 18900 | N/A | Axial (Z) | 1.97 | -46.91 | 48.88 |
| FDD-LTE | LTE B2 | 20 | QPSK | 50 | 0 | 18900 | N/A | Axial (Z) | -2.64 | -52.22 | 49.58 |
| FDD-LTE | LTE B2 | 20 | QPSK | 100 | 0 | 18900 | N/A | Axial (Z) | 1.55 | -47.85 | 49.40 |
| FDD-LTE | LTE B2 | 20 | 16QAM | 1 | 0 | 18900 | N/A | Axial (Z) | 2.68 | -47.43 | 50.11 |
| FDD-LTE | LTE B2 | 20 | 64QAM | 1 | 0 | 18900 | N/A | Axial (Z) | 2.42 | -47.11 | 49.53 |
| FDD-LTE | LTE B2 | 15 | QPSK | 1 | 0 | 18900 | N/A | Axial (Z) | -0.41 | -49.72 | 49.31 |
| FDD-LTE | LTE B2 | 10 | QPSK | 1 | 0 | 18900 | N/A | Axial (Z) | 2.99 | -46.94 | 49.93 |
| FDD-LTE | LTE B2 | 5 | QPSK | 1 | 0 | 18900 | N/A | Axial (Z) | -3.11 | -52.76 | 49.65 |
| FDD-LTE | LTE B2 | 3 | QPSK | 1 | 0 | 18900 | N/A | Axial (Z) | 2.56 | -47.21 | 49.77 |
| FDD-LTE | LTE B2 | 1.4 | QPSK | 1 | 0 | 18900 | N/A | Axial (Z) | 2.93 | -47.35 | 50.28 |
| TDD-LTE | LTE B41 | 20 | QPSK | 1 | 0 | 40620 | 0 | Axial (Z) | 4.28 | -43.88 | 48.16 |
| TDD-LTE | LTE B41 | 20 | QPSK | 1 | 0 | 40620 | 6 | Axial (Z) | 4.35 | -44.03 | 48.38 |
| TDD-LTE | UL CA B41_PC3 | 20 | QPSK | 1 | 0 | PCC: 40521 SCC: 40719 | 0 | Axial (Z) | 4.83 | -43.90 | 48.73 |
| TDD-LTE | LTE B41 | 20 | QPSK | 1 | 0 | 40620 | 1 | Axial (Z) | 5.36 | -43.16 | 48.52 |
| TDD-LTE | LTE B41 | 20 | QPSK | 1 | 0 | 40620 | 2 | Axial (Z) | 4.64 | -44.11 | 48.75 |
| TDD-LTE | LTE B41 | 20 | QPSK | 1 | 0 | 40620 | 3 | Axial (Z) | 4.04 | -44.93 | 48.97 |
| TDD-LTE | LTE B41_PC2 | 20 | QPSK | 1 | 0 | 40620 | 4 | Axial (Z) | 3.97 | -44.85 | 48.82 |
| TDD-LTE | LTE B41_PC2 | 20 | QPSK | 1 | 0 | 40620 | 5 | Axial (Z) | 7.99 | -40.26 | 48.25 |

Codec Investigation

| Band | Bandwidth (MHz) | Modulation | RB Size | RB Offset | Channel | Codec Setting | Probe Orientation | ABM1 (dB A/m) | ABM2 (dB A/m) | Frequency Response | SNR (dB) |
|---------|-----------------|------------|---------|-----------|---------|------------------|-------------------|---------------|---------------|--------------------|--------------|
| LTE B2 | 20 | QPSK | 1 | 0 | 18900 | AMR NB 4.75kbps | Axial (Z) | 4.38 | -51.99 | PASS | 56.37 |
| LTE B2 | 20 | QPSK | 1 | 0 | 18900 | AMR NB 12.2kbps | Axial (Z) | 4.64 | -48.05 | PASS | 52.69 |
| LTE B2 | 20 | QPSK | 1 | 0 | 18900 | AMR WB 6.6kbps | Axial (Z) | 4.69 | -48.14 | PASS | 52.83 |
| LTE B2 | 20 | QPSK | 1 | 0 | 18900 | AMR WB 23.85kbps | Axial (Z) | 4.67 | -47.26 | PASS | 51.93 |
| LTE B2 | 20 | QPSK | 1 | 0 | 18900 | EVS SWB 9.6kbps | Axial (Z) | 5.04 | -47.1 | PASS | 52.14 |
| LTE B2 | 20 | QPSK | 1 | 0 | 18900 | EVS SWB 128kbps | Axial (Z) | 5.11 | -47.68 | PASS | 52.79 |
| LTE B2 | 20 | QPSK | 1 | 0 | 18900 | EVS WB 5.9kbps | Axial (Z) | 1.97 | -46.91 | PASS | 48.88 |
| LTE B2 | 20 | QPSK | 1 | 0 | 18900 | EVS WB 128kbps | Axial (Z) | 4.82 | -47.1 | PASS | 51.92 |
| LTE B2 | 20 | QPSK | 1 | 0 | 18900 | EVS NB 5.9kbps | Axial (Z) | 4.29 | -47.89 | PASS | 52.18 |
| LTE B2 | 20 | QPSK | 1 | 0 | 18900 | EVS NB 24.4kbps | Axial (Z) | 5.54 | -46.7 | PASS | 52.24 |
| LTE B41 | 20 | QPSK | 1 | 0 | 40620 | AMR NB 4.75kbps | Axial (Z) | 4.33 | -44.54 | PASS | 48.87 |
| LTE B41 | 20 | QPSK | 1 | 0 | 40620 | AMR NB 12.2kbps | Axial (Z) | 4.47 | -44.47 | PASS | 48.94 |
| LTE B41 | 20 | QPSK | 1 | 0 | 40620 | AMR WB 6.6kbps | Axial (Z) | 4.28 | -43.88 | PASS | 48.16 |
| LTE B41 | 20 | QPSK | 1 | 0 | 40620 | AMR WB 23.85kbps | Axial (Z) | 4.35 | -43.84 | PASS | 48.19 |
| LTE B41 | 20 | QPSK | 1 | 0 | 40620 | EVS SWB 9.6kbps | Axial (Z) | 5.45 | -43.56 | PASS | 49.01 |
| LTE B41 | 20 | QPSK | 1 | 0 | 40620 | EVS SWB 128kbps | Axial (Z) | 5.43 | -43.25 | PASS | 48.68 |
| LTE B41 | 20 | QPSK | 1 | 0 | 40620 | EVS WB 5.9kbps | Axial (Z) | 5.32 | -43.74 | PASS | 49.06 |
| LTE B41 | 20 | QPSK | 1 | 0 | 40620 | EVS WB 128kbps | Axial (Z) | 5.86 | -43.26 | PASS | 49.12 |
| LTE B41 | 20 | QPSK | 1 | 0 | 40620 | EVS NB 5.9kbps | Axial (Z) | 5.84 | -43.30 | PASS | 49.14 |
| LTE B41 | 20 | QPSK | 1 | 0 | 40620 | EVS NB 24.4kbps | Axial (Z) | 5.27 | -43.78 | PASS | 49.05 |

Test Summary

| Plot No. | Band | Bandwidth (MHz) | Modulation | RB Size | RB Offset | Channel | Sample | UL-DL Configuration | Codec Setting | Probe Orientation | ABM1 (dB A/m) | ABM2 (dB A/m) | Ambient Noise (dB A/m) | Frequency Response Margin (dB) | Frequency Response | SNR (dB) | T-Rating |
|----------|---------|-----------------|------------|---------|-----------|---------|--------|---------------------|----------------|-------------------|---------------|---------------|------------------------|--------------------------------|--------------------|--------------|----------|
| P06 | LTE B12 | 10 | QPSK | 1 | 0 | 23095 | 1 | N/A | EVS WB 5.9kbp | Axial (Z) | 0.33 | -48.87 | -50.25 | 0.97 | PASS | 49.20 | T4 |
| | LTE B12 | 10 | QPSK | 1 | 0 | 23095 | | N/A | EVS WB 5.9kbp | Radial (Y) | -9.38 | -49.51 | | | | 40.13 | T4 |
| P07 | LTE B25 | 20 | QPSK | 1 | 0 | 26340 | 1 | N/A | EVS WB 5.9kbp | Axial (Z) | 3.23 | -47.5 | -50.33 | 1.50 | PASS | 50.73 | T4 |
| | LTE B25 | 20 | QPSK | 1 | 0 | 26340 | | N/A | EVS WB 5.9kbp | Radial (Y) | -4.35 | -47.57 | | | | 43.22 | T4 |
| P08 | LTE B26 | 15 | QPSK | 1 | 0 | 26865 | 1 | N/A | EVS WB 5.9kbp | Axial (Z) | -1.33 | -48.84 | -50.41 | 1.24 | PASS | 47.51 | T4 |
| | LTE B26 | 15 | QPSK | 1 | 0 | 26865 | | N/A | EVS WB 5.9kbp | Radial (Y) | -10.37 | -50.34 | | | | 39.97 | T4 |
| P09 | LTE B41 | 20 | QPSK | 1 | 0 | 40620 | 1 | 0 | AMR WB 6.6kbps | Axial (Z) | 4.77 | -43.16 | -50.19 | 1.45 | PASS | 47.93 | T4 |
| | LTE B41 | 20 | QPSK | 1 | 0 | 40620 | | 0 | AMR WB 6.6kbps | Radial (Y) | -7.30 | -48.49 | | | | 41.19 | T4 |
| P10 | LTE B66 | 20 | QPSK | 1 | 0 | 132322 | 1 | N/A | EVS WB 5.9kbp | Axial (Z) | 2.25 | -52.27 | -50.46 | 1.81 | PASS | 54.52 | T4 |
| | LTE B66 | 20 | QPSK | 1 | 0 | 132322 | | N/A | EVS WB 5.9kbp | Radial (Y) | -5.31 | -51.19 | | | | 45.88 | T4 |
| P11 | LTE B71 | 20 | QPSK | 1 | 0 | 133322 | 1 | N/A | EVS WB 5.9kbp | Axial (Z) | -3.59 | -50.78 | -50.11 | 1.02 | PASS | 47.19 | T4 |
| | LTE B71 | 20 | QPSK | 1 | 0 | 133322 | | N/A | EVS WB 5.9kbp | Radial (Y) | -9.15 | -49.35 | | | | 40.20 | T4 |
| | LTE B26 | 15 | QPSK | 1 | 0 | 26865 | 2 | N/A | EVS WB 5.9kbp | Axial (Z) | 1.32 | -49.69 | -50.48 | 1.24 | PASS | 51.01 | T4 |
| | LTE B26 | 15 | QPSK | 1 | 0 | 26865 | | N/A | EVS WB 5.9kbp | Radial (Y) | -5.38 | -51.37 | | | | 45.99 | T4 |

4.3.4 VoWiFi Testing Results

Radio Configuration Investigation

General Note:

1. Codec Investigation: For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters (ABM1, ABM2, S+N/N, frequency response) for that voice service. It is only necessary to document this for one channel/band, the following worst investigation codec would be remarked to be used for the testing for the handset.

2. Air Interface Investigation:

a. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface and the following worst configure would be remarked to be used for the testing for the handset.

b. Select WLAN 2.4GHz and WLAN 5GHz one frequency band to do measurement at the worst SNR position was additionally performed with varying the BWs/Modulations/data rate to verify the variation to find out worst configuration , the observed variation is very little to be within 1 dB which is much less than the margin from the rating threshold.

c. According to the ANSI C63.19 2011 section 7.3.2, test middle channel of each frequency band for HAC testing for each orientation to determine worst HAC T-Coil rating.

| Band | Mode | Data Rate | Channel | Probe Orientation | ABM1 (dB A/m) | ABM2 (dB A/m) | SNR (dB) |
|-----------|----------------|-----------|---------|-------------------|---------------|---------------|--------------|
| WLAN 2.4G | 802.11b | 1Mbps | 6 | Axial (Z) | 5.66 | -47.06 | 52.72 |
| WLAN 2.4G | 802.11b | 11Mbps | 6 | Axial (Z) | 4.86 | -49.51 | 54.37 |
| WLAN 2.4G | 802.11g | 6Mbps | 6 | Axial (Z) | 4.56 | -50.32 | 54.88 |
| WLAN 2.4G | 802.11g | 54Mbps | 6 | Axial (Z) | 4.69 | -50.29 | 54.98 |
| WLAN 2.4G | 802.11n HT20 | MCS0 | 6 | Axial (Z) | 5.03 | -49.86 | 54.89 |
| WLAN 2.4G | 802.11n HT20 | MCS7 | 6 | Axial (Z) | 5.13 | -49.84 | 54.97 |
| WLAN 2.4G | 802.11n HT40 | MCS0 | 6 | Axial (Z) | 5.13 | -49.68 | 54.81 |
| WLAN 2.4G | 802.11n HT40 | MCS7 | 6 | Axial (Z) | 4.89 | -49.19 | 54.08 |
| WLAN 5G | 802.11a | 6Mbps | 40 | Axial (Z) | 4.73 | -50.12 | 54.85 |
| WLAN 5G | 802.11a | 54Mbps | 40 | Axial (Z) | 4.82 | -49.92 | 54.74 |
| WLAN 5G | 802.11n HT20 | MCS0 | 40 | Axial (Z) | 4.93 | -49.12 | 54.05 |
| WLAN 5G | 802.11n HT20 | MCS7 | 40 | Axial (Z) | 4.87 | -49.87 | 54.74 |
| WLAN 5G | 802.11n HT40 | MCS0 | 38 | Axial (Z) | 5.47 | -49.91 | 55.38 |
| WLAN 5G | 802.11n HT40 | MCS7 | 38 | Axial (Z) | 5.04 | -49.62 | 54.66 |
| WLAN 5G | 802.11ac-VHT20 | MCS0 | 40 | Axial (Z) | 5.12 | -49.46 | 54.58 |
| WLAN 5G | 802.11ac-VHT20 | MCS8 | 40 | Axial (Z) | 5.05 | -49.68 | 54.73 |
| WLAN 5G | 802.11ac-VHT40 | MCS0 | 38 | Axial (Z) | 5.02 | -49.29 | 54.31 |
| WLAN 5G | 802.11ac-VHT40 | MCS8 | 38 | Axial (Z) | 5.28 | -49.5 | 54.78 |
| WLAN 5G | 802.11ac-VHT80 | MCS0 | 50 | Axial (Z) | 5.00 | -49.58 | 54.58 |
| WLAN 5G | 802.11ac-VHT80 | MCS8 | 50 | Axial (Z) | 5.01 | -49.81 | 54.82 |



**BUREAU
VERITAS**

FCC HAC (T-Coil) Test Report



Certificate #6613.01

Codec Investigation

| Band | Mode | Data Rate | Channel | Codec Setting | Probe Orientation | ABM1 (dB A/m) | ABM2 (dB A/m) | Frequency Response | SNR (dB) |
|-----------|---------|-----------|---------|------------------|-------------------|---------------|---------------|--------------------|--------------|
| WLAN 2.4G | 802.11b | 1Mbps | 6 | AMR NB 4.75kbps | Axial (Z) | 5.23 | -48.7 | PASS | 53.93 |
| WLAN 2.4G | 802.11b | 1Mbps | 6 | AMR NB 12.2kbps | Axial (Z) | 5.45 | -48.45 | PASS | 53.9 |
| WLAN 2.4G | 802.11b | 1Mbps | 6 | AMR WB 6.6kbps | Axial (Z) | 5.66 | -47.06 | PASS | 52.72 |
| WLAN 2.4G | 802.11b | 1Mbps | 6 | AMR WB 23.85kbps | Axial (Z) | 5.65 | -48.68 | PASS | 54.33 |
| WLAN 2.4G | 802.11b | 1Mbps | 6 | EVS SWB 9.6kbps | Axial (Z) | 5.75 | -48.57 | PASS | 54.32 |
| WLAN 2.4G | 802.11b | 1Mbps | 6 | EVS SWB 128kbps | Axial (Z) | 5.34 | -49.06 | PASS | 54.4 |
| WLAN 2.4G | 802.11b | 1Mbps | 6 | EVS WB 5.9kbps | Axial (Z) | 5.83 | -48.52 | PASS | 54.35 |
| WLAN 2.4G | 802.11b | 1Mbps | 6 | EVS WB 128kbps | Axial (Z) | 5.65 | -48.22 | PASS | 53.87 |
| WLAN 2.4G | 802.11b | 1Mbps | 6 | EVS NB 5.9kbps | Axial (Z) | 5.56 | -48.46 | PASS | 54.02 |
| WLAN 2.4G | 802.11b | 1Mbps | 6 | EVS NB 24.4kbps | Axial (Z) | 4.67 | -48.76 | PASS | 53.43 |

Test Summary

| Plot No. | Band | Mode | Data Rate | Channel | Sample | Codec Setting | Probe Orientation | ABM1 (dB A/m) | ABM2 (dB A/m) | Ambient Noise (dB A/m) | Frequency Response Margin (dB) | Frequency Response | SNR (dB) | T-Rating |
|----------|----------|--------------|-----------|---------|--------|----------------|-------------------|---------------|---------------|------------------------|--------------------------------|--------------------|--------------|----------|
| P12 | WLAN2.4G | 802.11b | 1Mbps | 6 | 1 | AMR WB 6.6kbps | Axial (Z) | 4.18 | -49.55 | -50.17 | 1.57 | PASS | 53.73 | T4 |
| | WLAN2.4G | 802.11b | 1Mbps | 6 | | AMR WB 6.6kbps | Radial (Y) | -3.94 | -47.42 | | | | 43.48 | T4 |
| P13 | WLAN5G | 802.11n HT20 | MCS0 | 40 | 1 | AMR WB 6.6kbps | Axial (Z) | 5.88 | -48.52 | -50.66 | 1.94 | PASS | 54.40 | T4 |
| | WLAN5G | 802.11n HT20 | MCS0 | 40 | | AMR WB 6.6kbps | Radial (Y) | -5.65 | -50.03 | | | | 44.38 | T4 |
| P14 | WLAN5G | 802.11n HT20 | MCS0 | 60 | 1 | AMR WB 6.6kbps | Axial (Z) | 5.88 | -49.03 | -50.42 | 1.83 | PASS | 54.91 | T4 |
| | WLAN5G | 802.11n HT20 | MCS0 | 60 | | AMR WB 6.6kbps | Radial (Y) | -5.47 | -49.43 | | | | 44.64 | T4 |
| P15 | WLAN5G | 802.11n HT20 | MCS0 | 124 | 1 | AMR WB 6.6kbps | Axial (Z) | 5.88 | -47.23 | -50.23 | 1.89 | PASS | 53.11 | T4 |
| | WLAN5G | 802.11n HT20 | MCS0 | 124 | | AMR WB 6.6kbps | Radial (Y) | -3.12 | -47.06 | | | | 43.96 | T4 |
| P16 | WLAN5G | 802.11n HT20 | MCS0 | 157 | 1 | AMR WB 6.6kbps | Axial (Z) | 5.79 | -47.93 | -50.39 | 1.93 | PASS | 53.72 | T4 |
| | WLAN5G | 802.11n HT20 | MCS0 | 157 | | AMR WB 6.6kbps | Radial (Y) | -5.72 | -50.22 | | | | 44.50 | T4 |
| | WLAN2.4G | 802.11b | 1Mbps | 6 | 2 | AMR WB 6.6kbps | Axial (Z) | 4.12 | -49.20 | -50.22 | 1.84 | PASS | 53.32 | T4 |
| | WLAN2.4G | 802.11b | 1Mbps | 6 | | AMR WB 6.6kbps | Radial (Y) | -3.25 | -51.06 | | | | 47.81 | T4 |

Test Engineer: Chang Gao and Zixiao Xia



5. Calibration of Test Equipment

| Equipment | Manufacturer | Model | SN | Cal. Date | Cal. Interval |
|--------------------------------------|--------------|--------|--------|-------------|---------------|
| Audio Band Magnetic Probe | SPEAG | AM1DV3 | 3144 | Feb.16,2023 | 1 Year |
| Data Acquisition Electronics | SPEAG | DAE | 1633 | Feb.08,2023 | 1 Year |
| Universal Radio Communication Tester | R&S | CMW500 | 169210 | Jun.27,2022 | 1 Year |
| Audio Measuring Instrument | SPEAG | AMMI | 1180 | N/A | N/A |
| Audio Magnetic Calibration Coil | SPEAG | AMCC | 1158 | N/A | N/A |
| Test Arch Phantom | SPEAG | Arch | N/A | N/A | N/A |



6. Measurement Uncertainty

| HAC Uncertainty Budget for T-Coil 2011 version According to ANSI C63.19 | | | | | | | |
|--|------------------------|-------------|---------|-----------|-----------|----------------------------------|----------------------------------|
| Error Description | Uncertainty Value (±%) | Probability | Divisor | (Ci) ABM1 | (Ci) ABM2 | Standard Uncertainty (ABM1) (±%) | Standard Uncertainty (ABM2) (±%) |
| Probe Sensitivity | | | | | | | |
| Reference Level | 3.0 | N | 1 | 1 | 1 | 3.0 | 3.0 |
| AMCC Geometry | 0.4 | R | 1.732 | 1 | 1 | 0.2 | 0.2 |
| AMCC Current | 1.0 | R | 1.732 | 1 | 1 | 0.6 | 0.6 |
| Probe Positioning during Calibr. | 0.1 | R | 1.732 | 1 | 1 | 0.1 | 0.1 |
| Noise Contribution | 0.7 | R | 1.732 | 0.014 | 1 | 0.0 | 0.4 |
| Frequency Slope | 5.9 | R | 1.732 | 0.1 | 1 | 0.3 | 3.4 |
| Probe System | | | | | | | |
| Repeatability / Drift | 1.0 | R | 1.732 | 1 | 1 | 0.6 | 0.6 |
| Linearity / Dynamic Range | 0.6 | R | 1.732 | 1 | 1 | 0.3 | 0.3 |
| Acoustic Noise | 1.0 | R | 1.732 | 0.1 | 1 | 0.1 | 0.6 |
| Probe Angle | 2.3 | R | 1.732 | 1 | 1 | 1.3 | 1.3 |
| Spectral Processing | 0.9 | R | 1.732 | 1 | 1 | 0.5 | 0.5 |
| Integration Time | 0.6 | N | 1 | 1 | 5 | 0.6 | 3.0 |
| Field Distribution | 0.2 | R | 1.732 | 1 | 1 | 0.1 | 0.1 |
| Test Signal | | | | | | | |
| Ref. Signal Spectral Response | 0.6 | R | 1.732 | 0 | 1 | 0.0 | 0.3 |
| Positioning | | | | | | | |
| Probe Positioning | 1.9 | R | 1.732 | 1 | 1 | 1.1 | 1.1 |
| Phantom Thickness | 0.9 | R | 1.732 | 1 | 1 | 0.5 | 0.5 |
| DUT Positioning | 1.9 | R | 1.732 | 1 | 1 | 1.1 | 1.1 |
| External Contributions | | | | | | | |
| RF Interference | 0.0 | R | 1.732 | 1 | 0.3 | 0.0 | 0.0 |
| Test Signal Variation | 2.0 | R | 1.732 | 1 | 1 | 1.2 | 1.2 |
| Combined Std. Uncertainty | | | | | | 4.0% | 6.1% |
| Coverage Factor for 95 % | | | | | | K=2 | |
| Expanded STD Uncertainty | | | | | | 8.1% | 12.2% |

Uncertainty Budget for HAC T-Coil

7. Information of the Testing Laboratories

We, Huarui 7layers High Technology (Suzhou) Co., Ltd., were founded in 2020 to provide our best service in EMC, Radio, Telecom and Safety consultation.

If you have any comments, please feel free to contact us at the following:

Add: Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province

Tel: [+86 \(0557\) 368 1008](tel:+86(0557)3681008)

The road map of all our labs can be found in our web site also

Web: <http://www.7Layers.com>

---END---



BUREAU
VERITAS



Appendix A. Plots of HAC T-Coil Measurement

The plots for HAC measurement are shown as follows.

P01 T-Coil_GSM850_Voice_Ch189_FR V1_Axial (Z)

Communication System: GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid:

dx=10mm, dy=10mm

ABM1/ABM2 = 33.08 dB

ABM1 comp = 7.06 dBA/m

Location: 4.2, 8.3, 3.7 mm

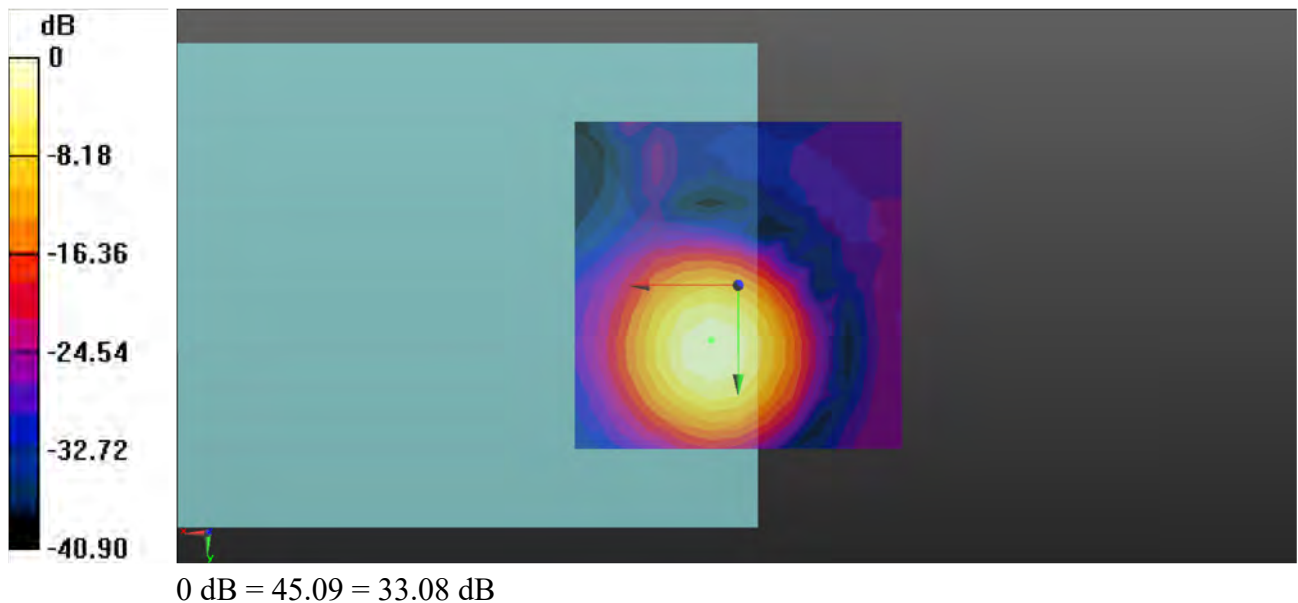

P01 T-Coil_GSM850_Voice_Ch189_FR V1_Transversal (Y)

Communication System: GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm

ABM1/ABM2 = 38.94 dB

ABM1 comp = -10.07 dBA/m

Location: -4.2, -8.3, 3.7 mm

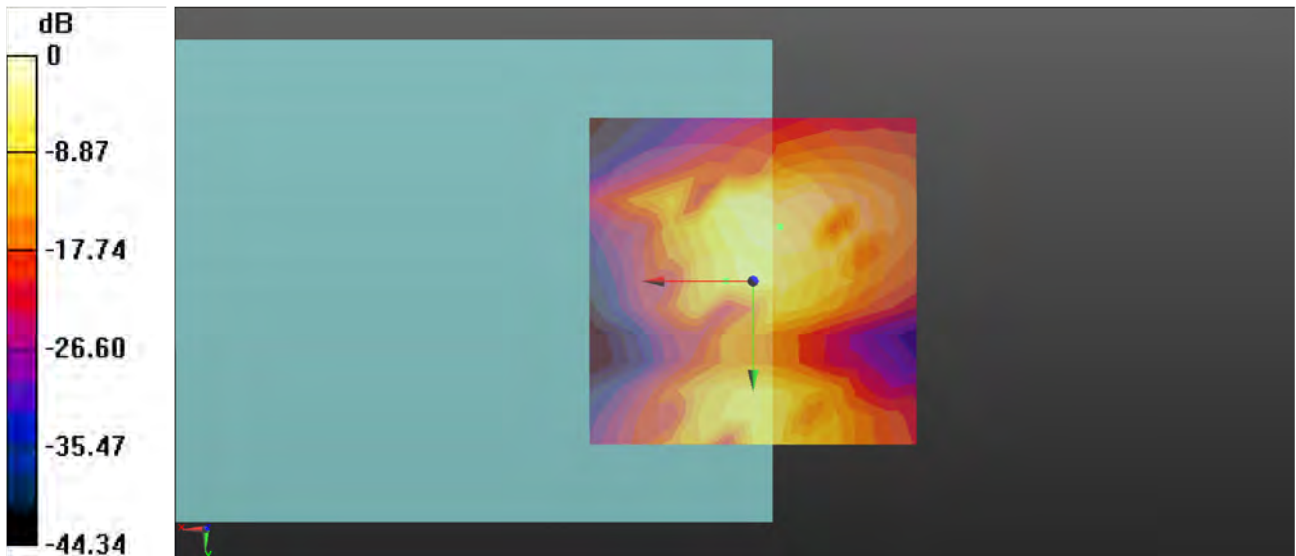

0 dB = 88.51 = 38.94 dB

P01 T-Coil_GSM850_Voice_Ch189_FR V1_Freq Resp

Communication System: GSM; Frequency: 836.4 MHz;Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³


Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

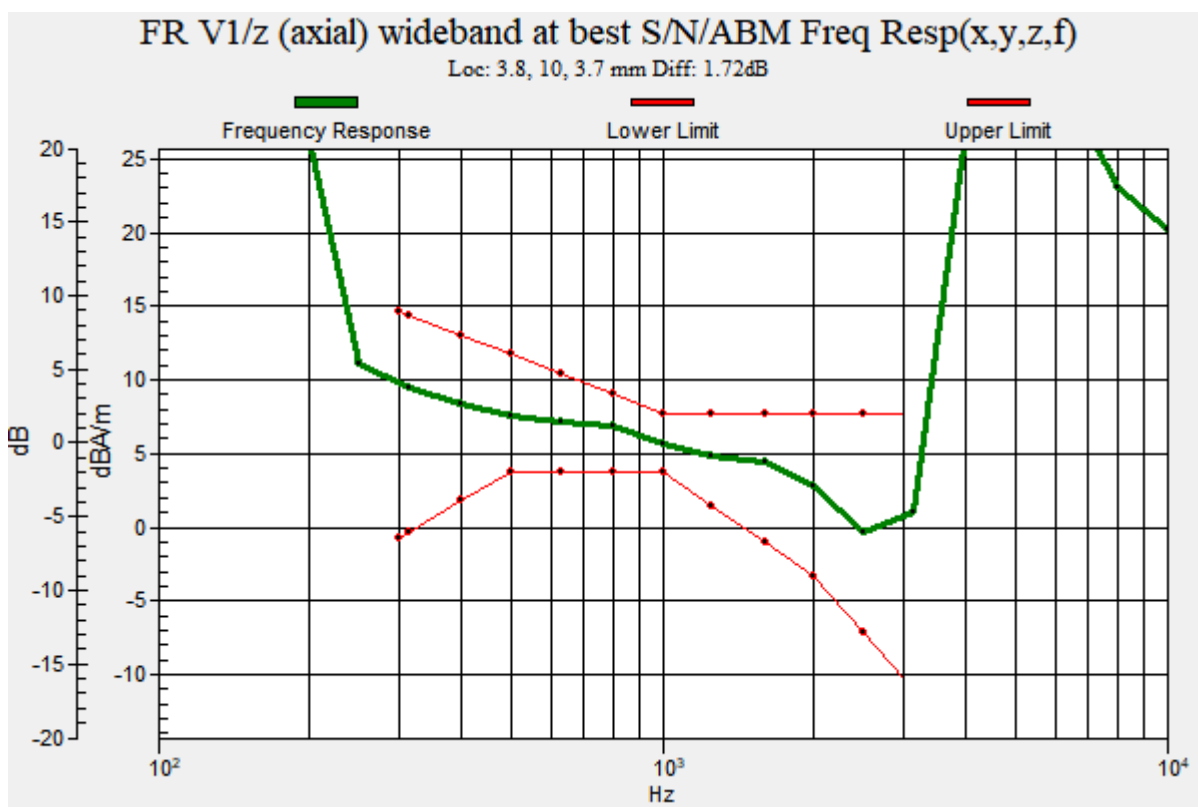

P02 T-Coil_GSM1900_Voice_Ch661_FR V1_Axial (Z)

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid:

dx=10mm, dy=10mm

ABM1/ABM2 = 35.94 dB

ABM1 comp = 5.37 dBA/m

Location: 4.2, 8.3, 3.7 mm

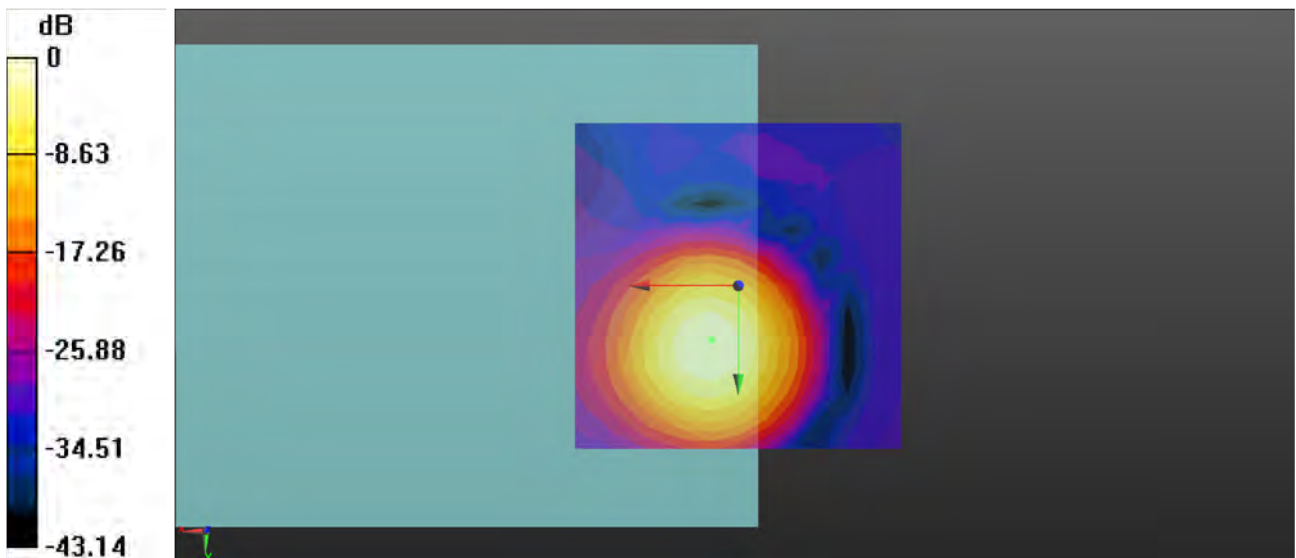

0 dB = 73.72 = 35.94 dB

P02 T-Coil_GSM1900_Voice_Ch661_FR V1_Transversal (Y)

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm

ABM1/ABM2 = 40.76 dB

ABM1 comp = -9.90 dBA/m

Location: -4.2, -8.3, 3.7 mm

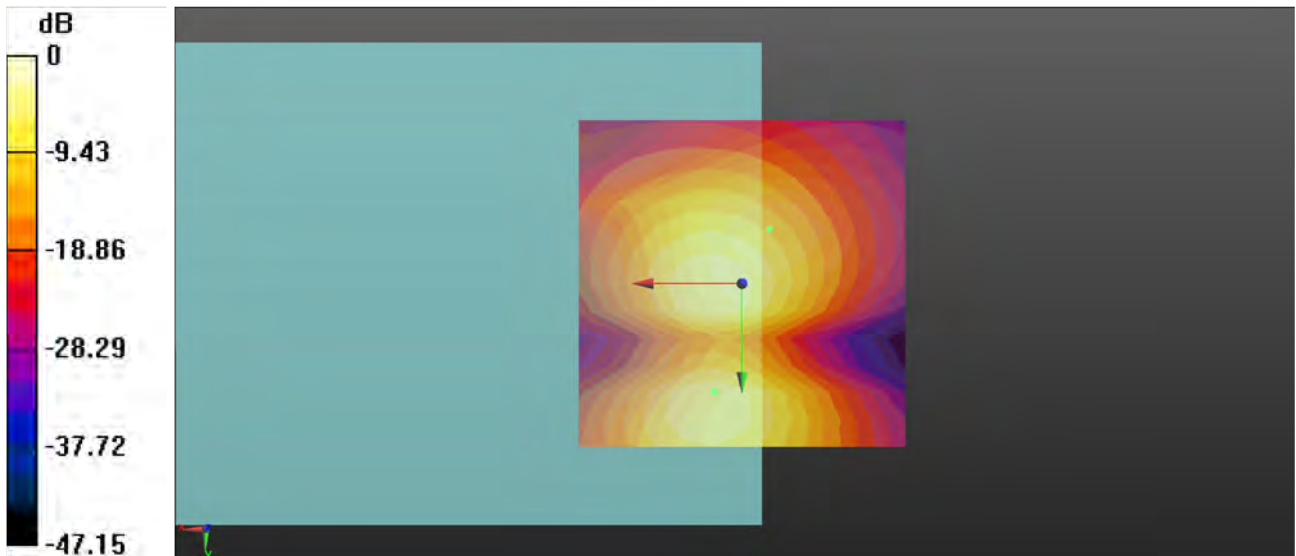

0 dB = 109.1 = 40.76 dB

P02 T-Coil_GSM1900_Voice_Ch661_FR V1_Freq Resp

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³


Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Genral Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

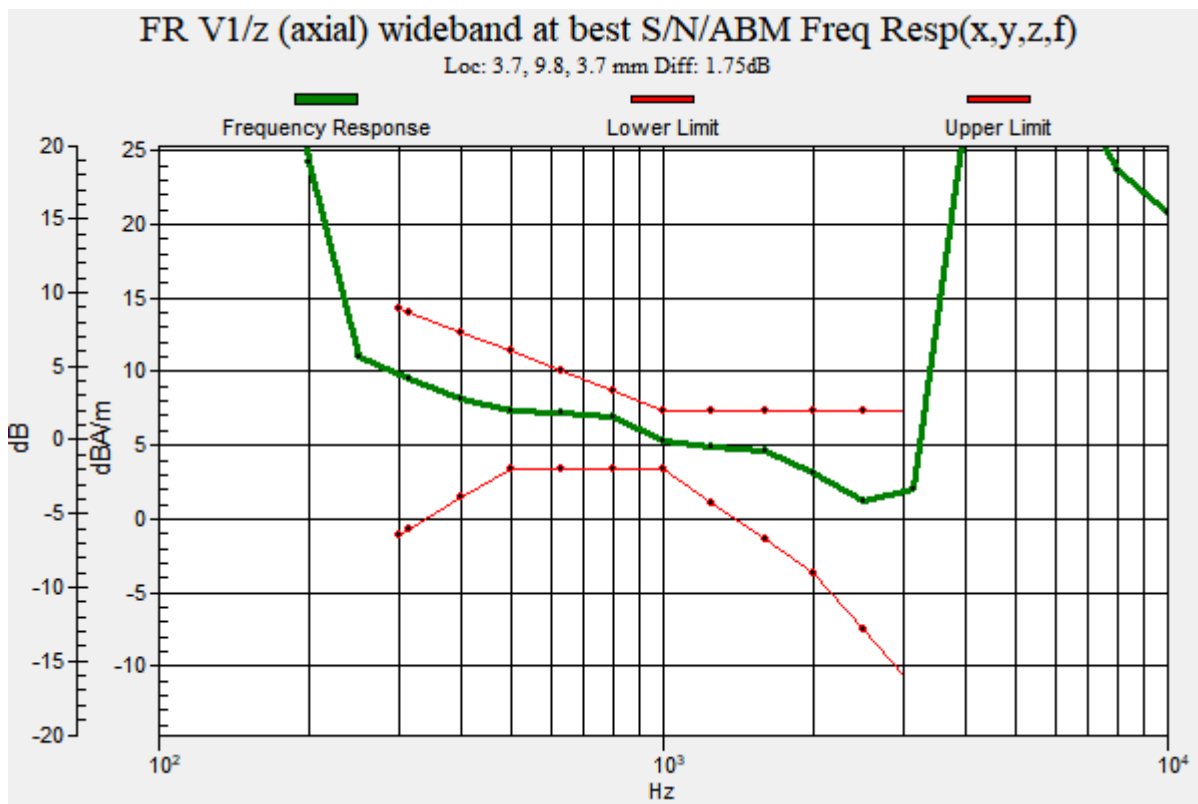

P03 T-Coil_WCDMA II_Voice_Ch9400_AMR 7.95Kbps_Axial (Z)

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid:

dx=10mm, dy=10mm

ABM1/ABM2 = 54.84 dB

ABM1 comp = 5.01 dBA/m

Location: 0, 12.5, 3.7 mm

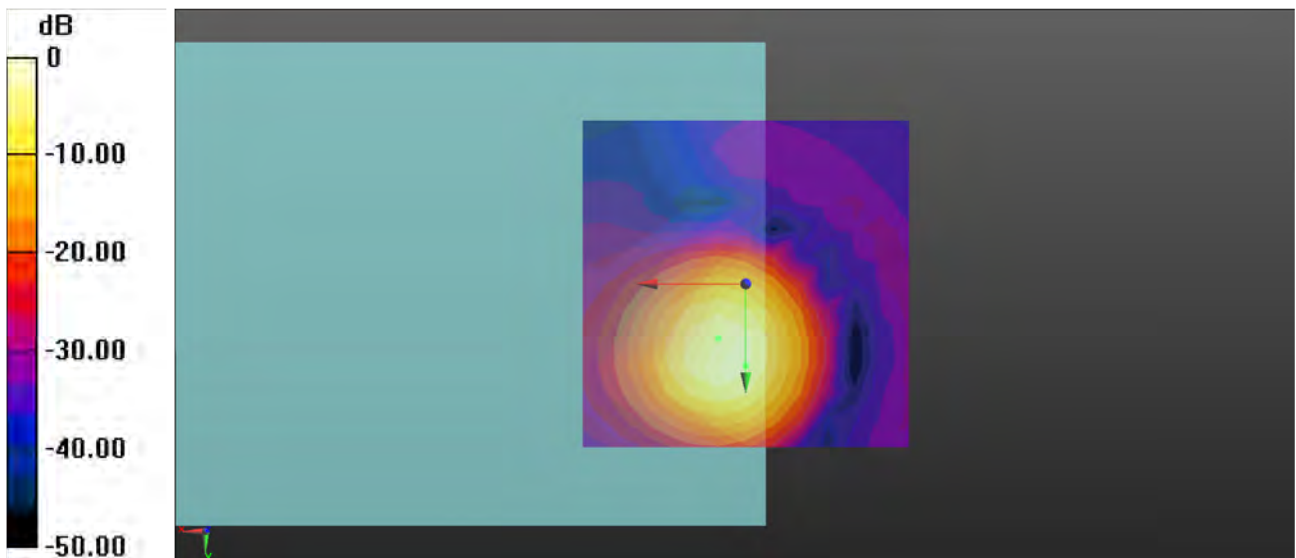

0 dB = 552.2 = 54.84 dB

P03 T-Coil_WCDMA II_Voice_Ch9400_AMR 7.95Kbps_Transversal (Y)

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm

ABM1/ABM2 = 46.28 dB

ABM1 comp = -2.97 dBA/m

Location: 0, 0, 3.7 mm

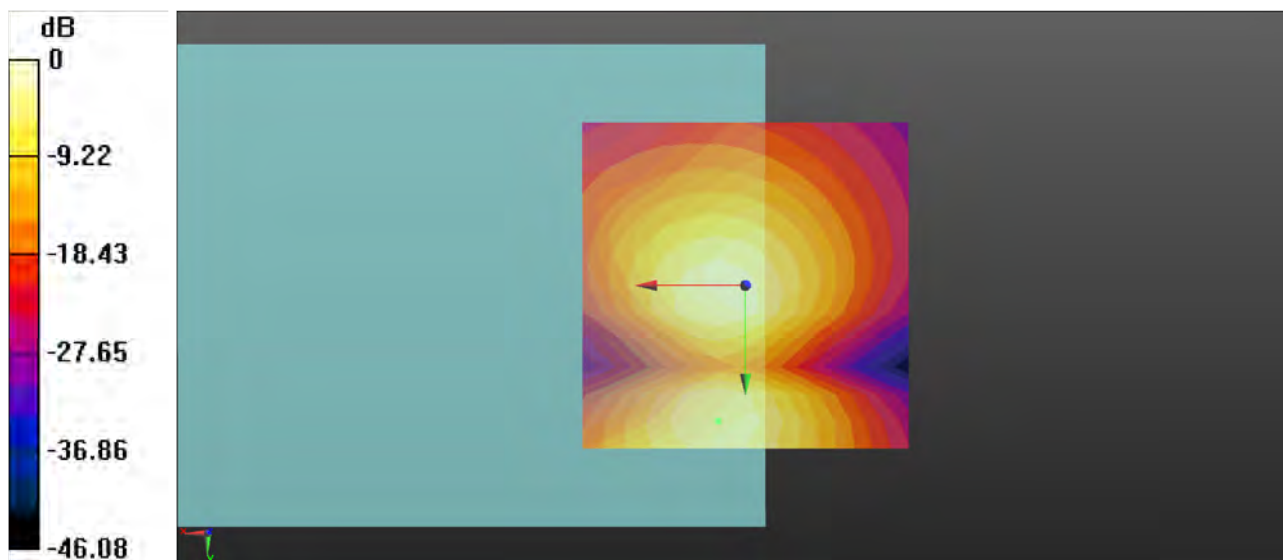

0 dB = 206.0 = 46.28 dB

P03 T-Coil_WCDMA II_Voice_Ch9400_AMR 7.95Kbps_Freq Resp

Communication System: WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³


Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

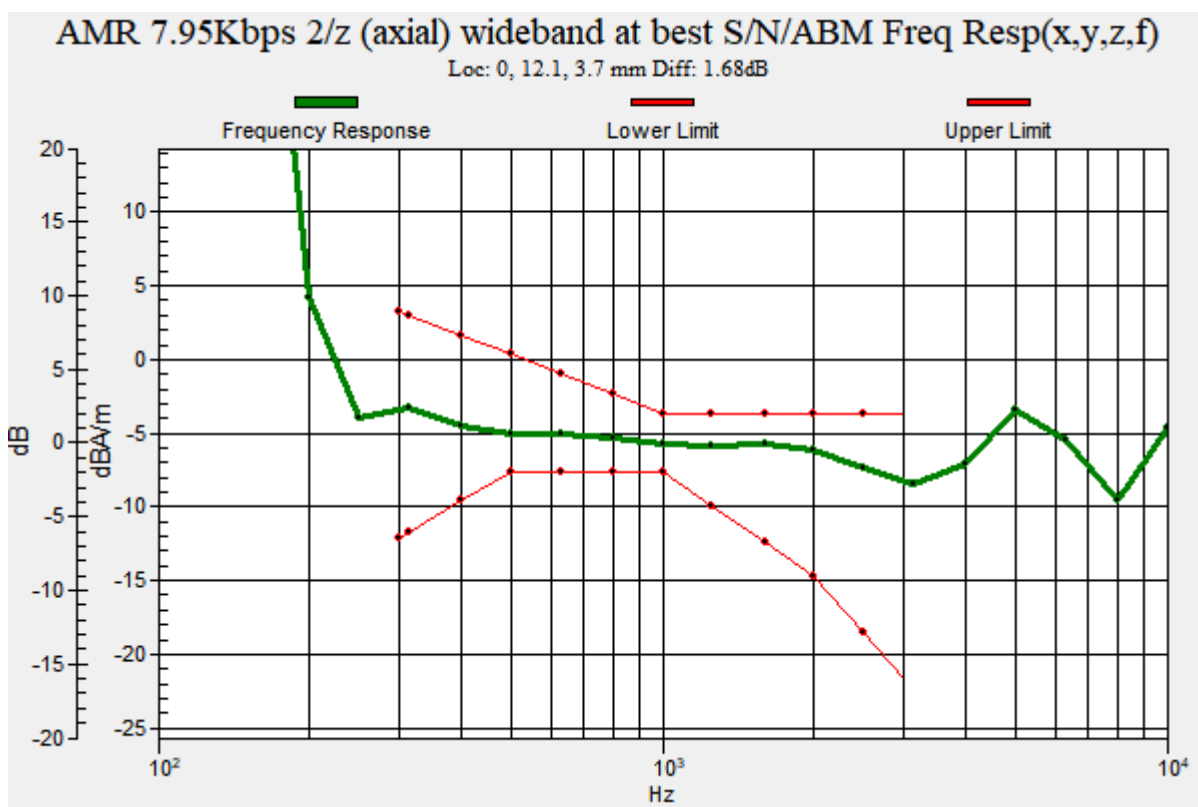

P04 T-Coil_WCDMA IV_Voice_Ch1413_AMR 7.95Kbps_Axial (Z)

Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid:

dx=10mm, dy=10mm

ABM1/ABM2 = 54.32 dB

ABM1 comp = 5.08 dBA/m

Location: 0, 12.5, 3.7 mm

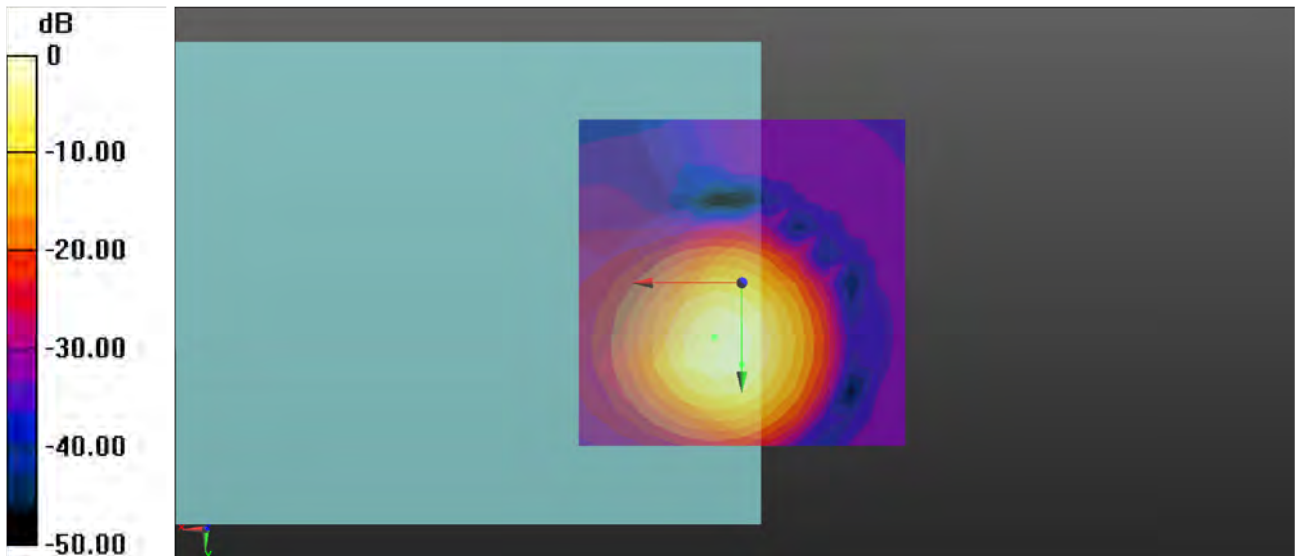

0 dB = 520.3 = 54.32 dB

P04 T-Coil_WCDMA IV_Voice_Ch1413_AMR 7.95Kbps_Transversal (Y)

Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm

ABM1/ABM2 = 46.67 dB

ABM1 comp = -3.93 dBA/m

Location: 0, -4.2, 3.7 mm

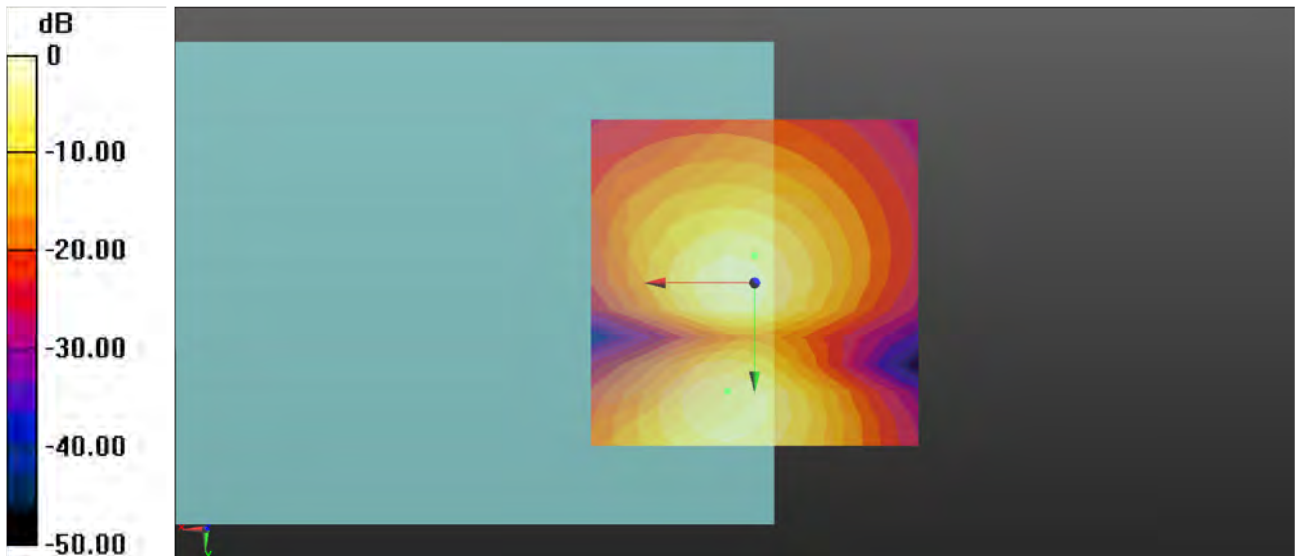

0 dB = 215.5 = 46.67 dB

P04 T-Coil_WCDMA IV_Voice_Ch1413_AMR 7.95Kbps_Freq Resp

Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$


Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

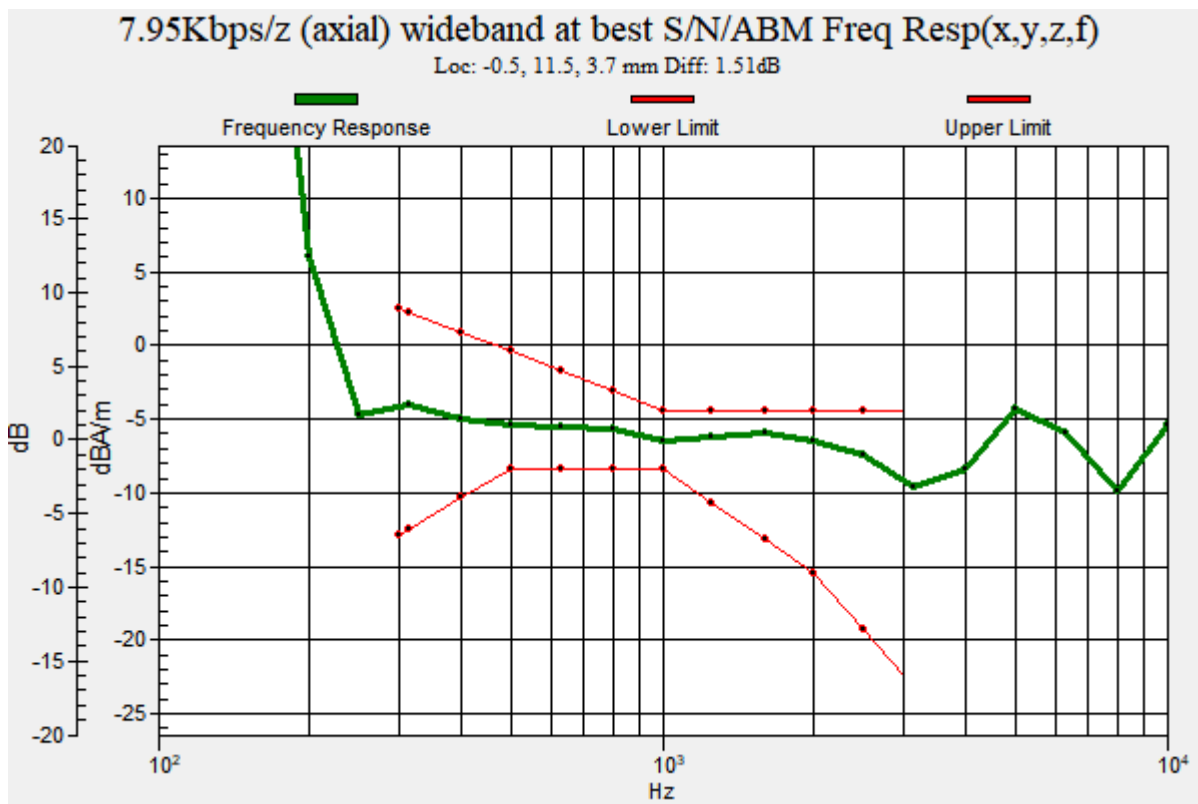

P05 T-Coil_WCDMA V_Voice_Ch4182_AMR 7.95Kbps_Axial (Z)

Communication System: WCDMA (0); Frequency: 836.4 MHz;Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid:

dx=10mm, dy=10mm

ABM1/ABM2 = 54.85 dB

ABM1 comp = 5.17 dBA/m

Location: 0, 12.5, 3.7 mm

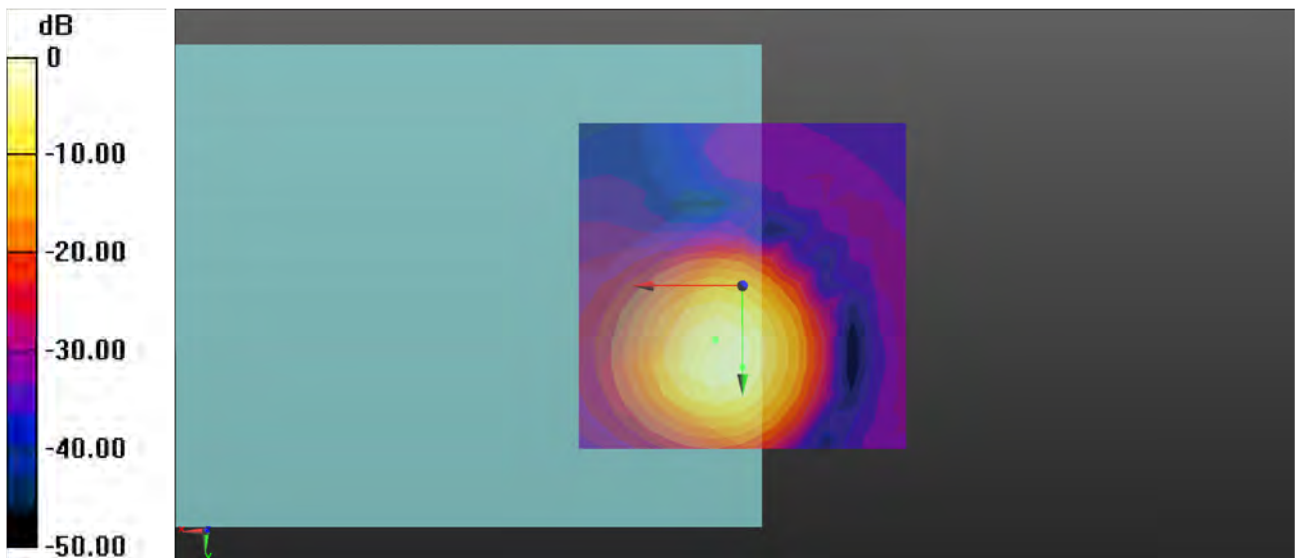

0 dB = 552.8 = 54.85 dB

P05 T-Coil_WCDMA V_Voice_Ch4182_AMR 7.95Kbps_Transversal (Y)

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm

ABM1/ABM2 = 45.84 dB

ABM1 comp = -5.15 dBA/m

Location: 0, -4.2, 3.7 mm

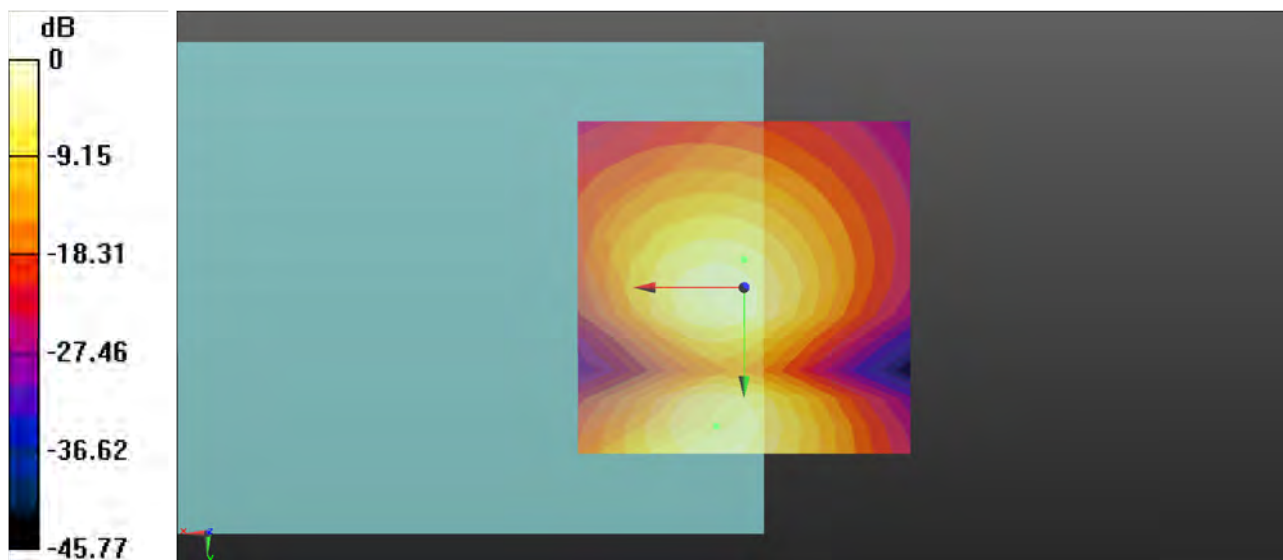

0 dB = 195.8 = 45.84 dB

P05 T-Coil_WCDMA V_Voice_Ch4182_AMR 7.95Kbps_Freq Resp

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$


Ambient Temperature : 23.3°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

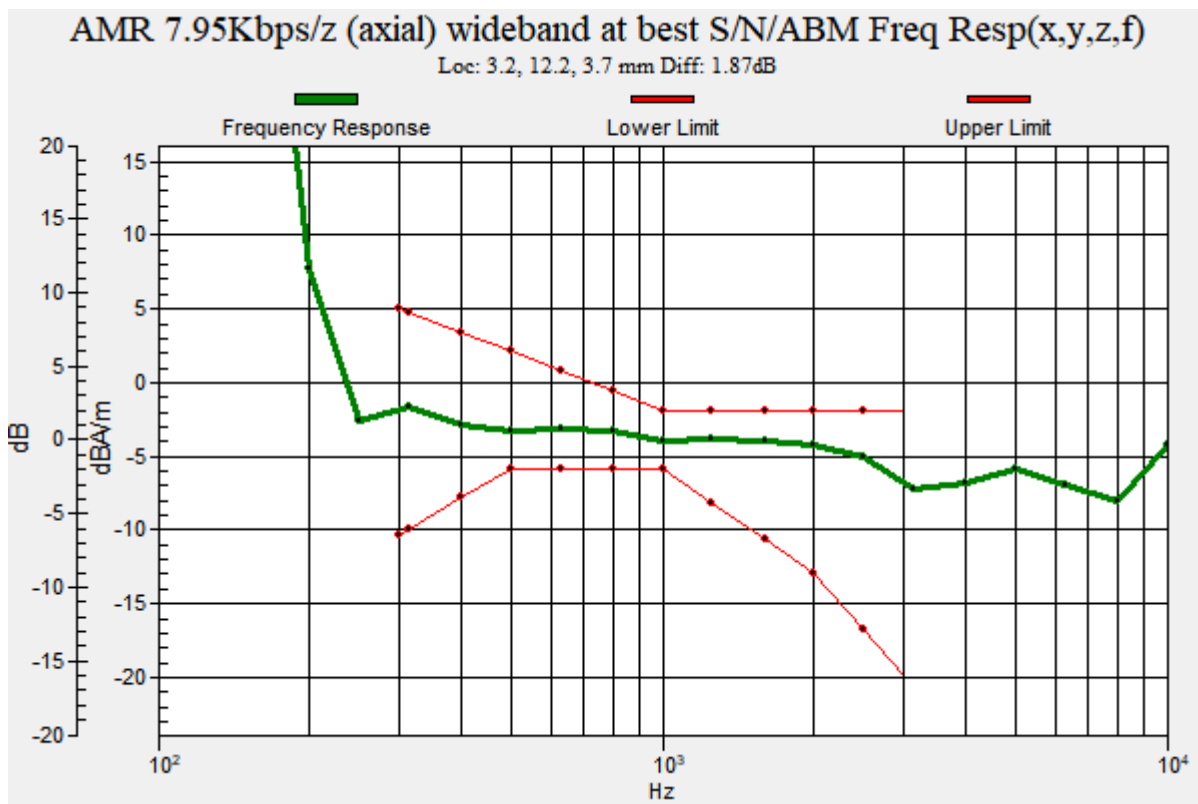

P06 LTE 12_QPSK10M_Ch23095_1RB_OS0_EVS WB 5.9Kbps_Axial (Z)

Communication System: LTE_FDD; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid:

dx=10mm, dy=10mm

ABM1/ABM2 = 49.20 dB

ABM1 comp = 0.33 dBA/m

Location: 0, 12.5, 3.7 mm

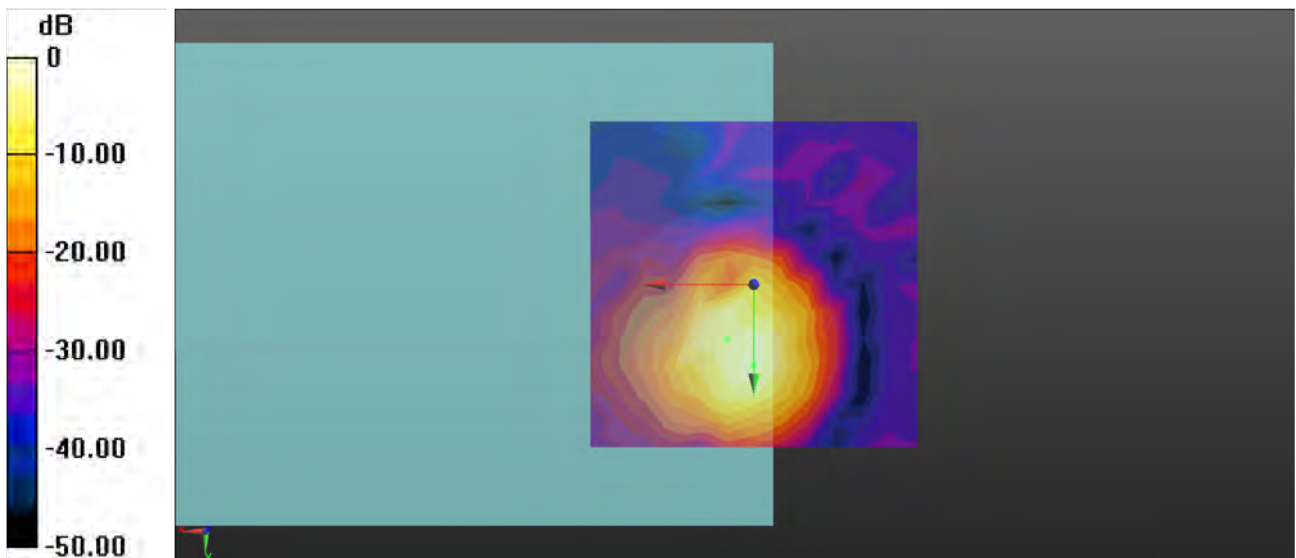

0 dB = 288.4 = 49.20 dB

P06 LTE 12_QPSK10M_Ch23095_1RB_OS0_EVS WB 5.9Kbps_Transversal (Y)

Communication System: LTE_FDD; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm

ABM1/ABM2 = 40.13 dB

ABM1 comp = -9.38 dBA/m

Location: 0, -4.2, 3.7 mm

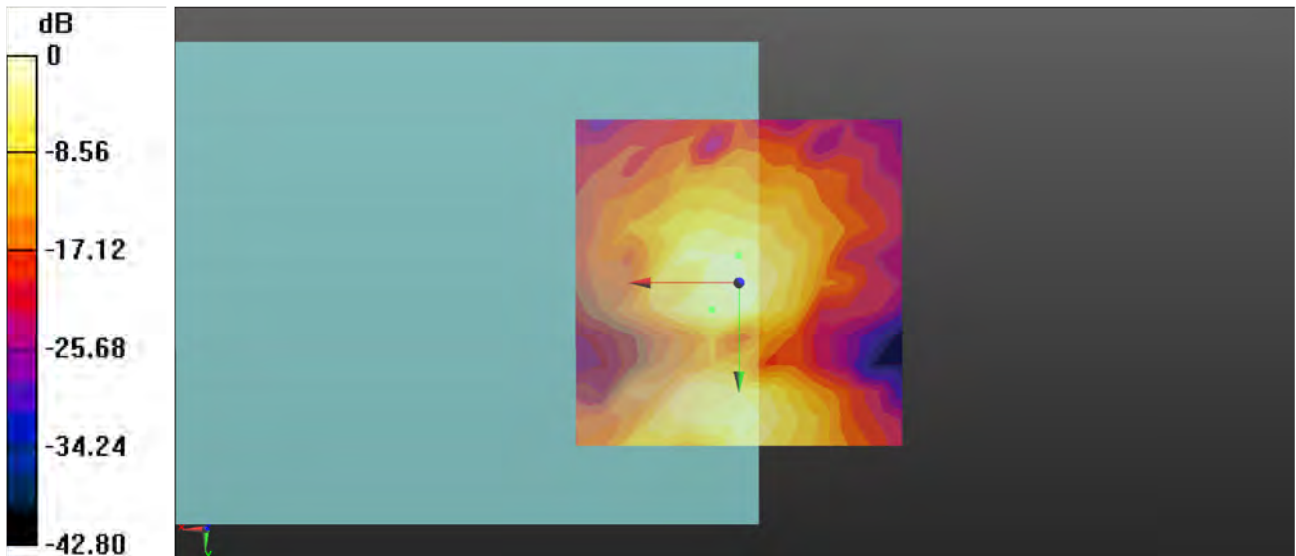

0 dB = 101.5 = 40.13 dB

P06 LTE 12_QPSK10M_Ch23095_1RB_OS0_EVS WB 5.9Kbps_Freq Resp

Communication System: LTE_FDD; Frequency: 707.5 MHz; Duty Cycle: 1:1


Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Configuration/AMR 7.95Kbps/z (axial) wideband at best S/N/ABM Freq Resp (x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

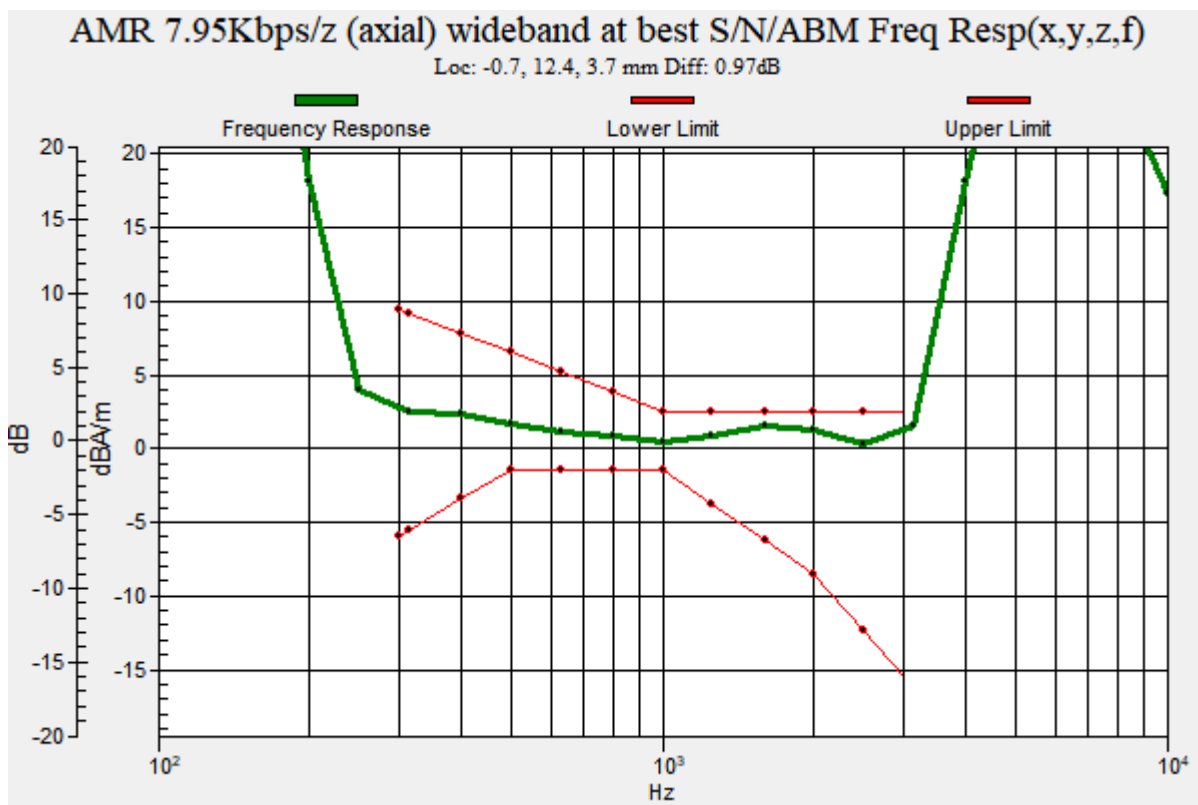

P07 LTE 25_QPSK20M_Ch26340_1RB_OS0_EVS WB 5.9Kbps_Axial (Z)

Communication System: LTE_FDD; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid:

dx=10mm, dy=10mm

ABM1/ABM2 = 50.73 dB

ABM1 comp = 3.23 dBA/m

Location: 0, 8.3, 3.7 mm

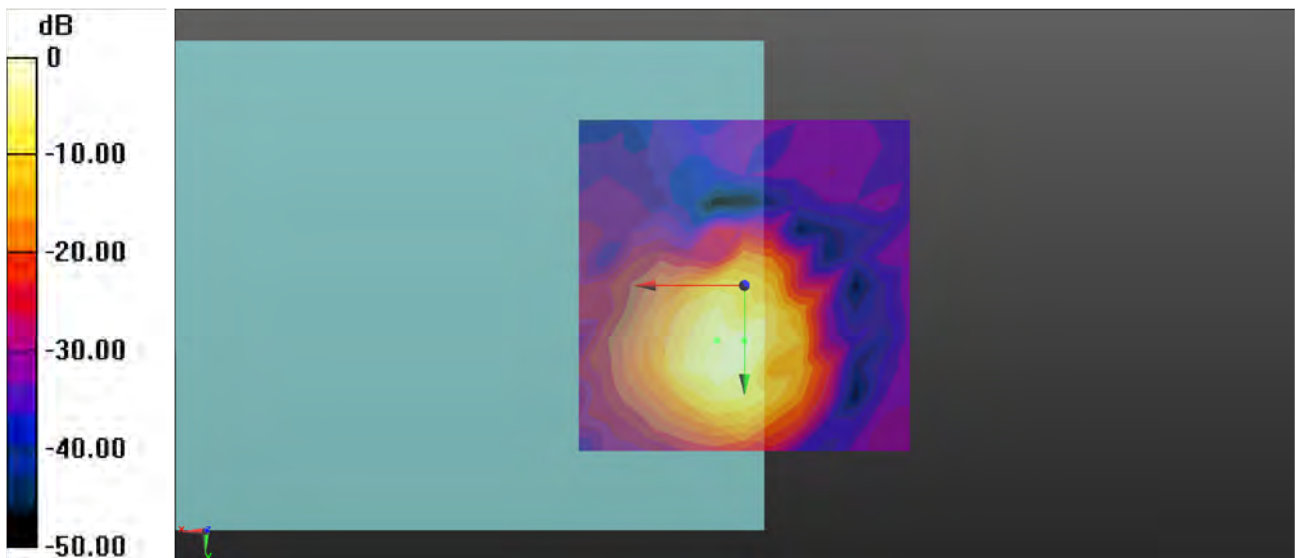

0 dB = 344.0 = 50.73 dB

P07 LTE 25_QPSK20M_Ch26340_1RB_OS0_EVS WB 5.9Kbps_Transversal (Y)

Communication System: LTE_FDD; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm

ABM1/ABM2 = 43.22 dB

ABM1 comp = -4.35 dBA/m

Location: 0, 0, 3.7 mm

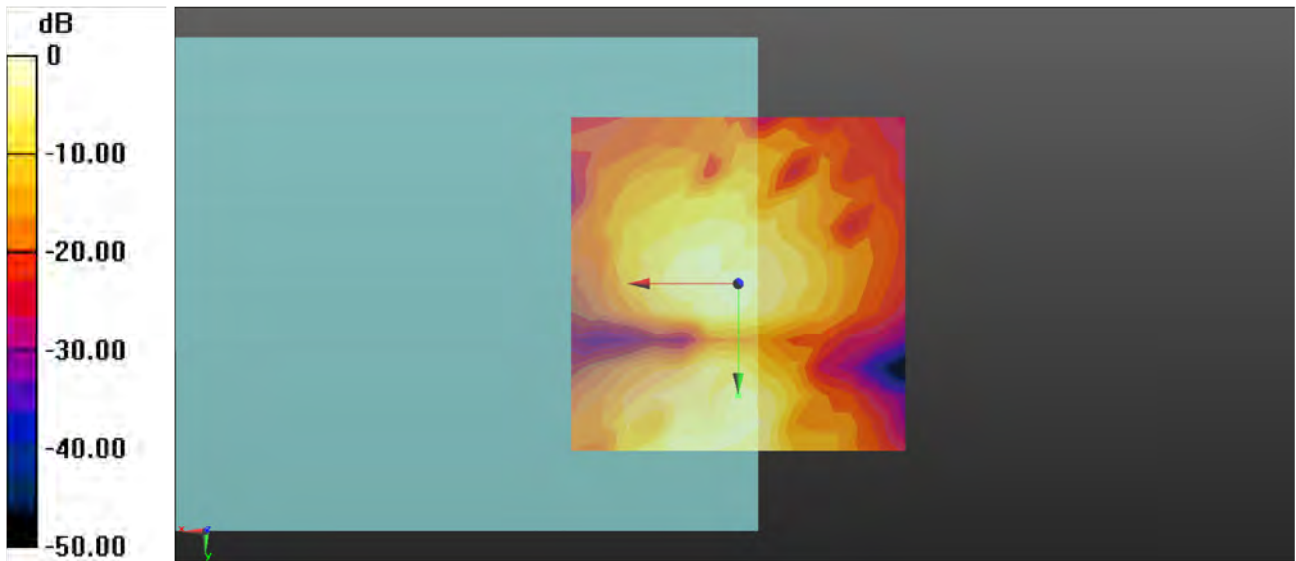

0 dB = 144.9 = 43.22 dB

P07 LTE 25_QPSK20M_Ch26340_1RB_OS0_EVS WB 5.9Kbps_Freq Resp

Communication System: LTE_FDD; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³


Ambient Temperature : 23.5°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

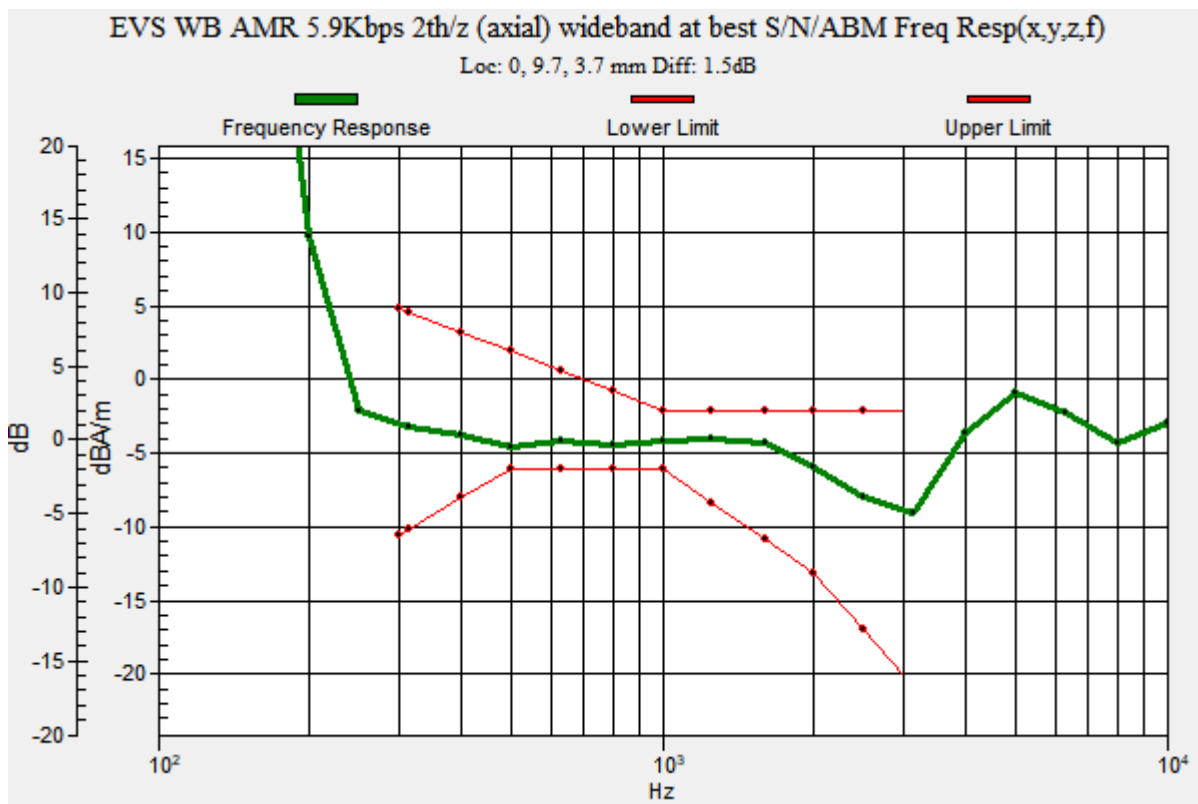

P08 LTE 26_QPSK15M_Ch26865_1RB_OS0_EVS WB 5.9Kbps_Axial (Z)

Communication System: LTE_FDD; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid:

dx=10mm, dy=10mm

ABM1/ABM2 = 47.51 dB

ABM1 comp = -1.33 dBA/m

Location: 0, 12.5, 3.7 mm

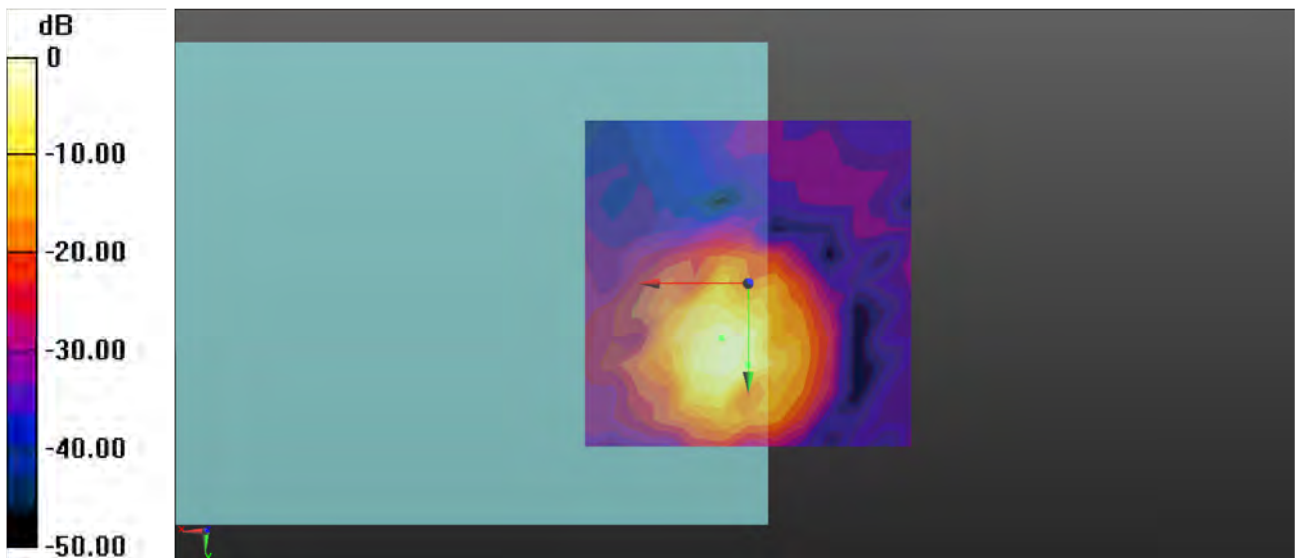

0 dB = 237.4 = 47.51 dB

P08 LTE 26_QPSK15M_Ch26865_1RB_OS0_EVS WB 5.9Kbps_Transversal (Y)

Communication System: LTE_FDD; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm

ABM1/ABM2 = 39.97 dB

ABM1 comp = -10.37 dBA/m

Location: 0, -4.2, 3.7 mm

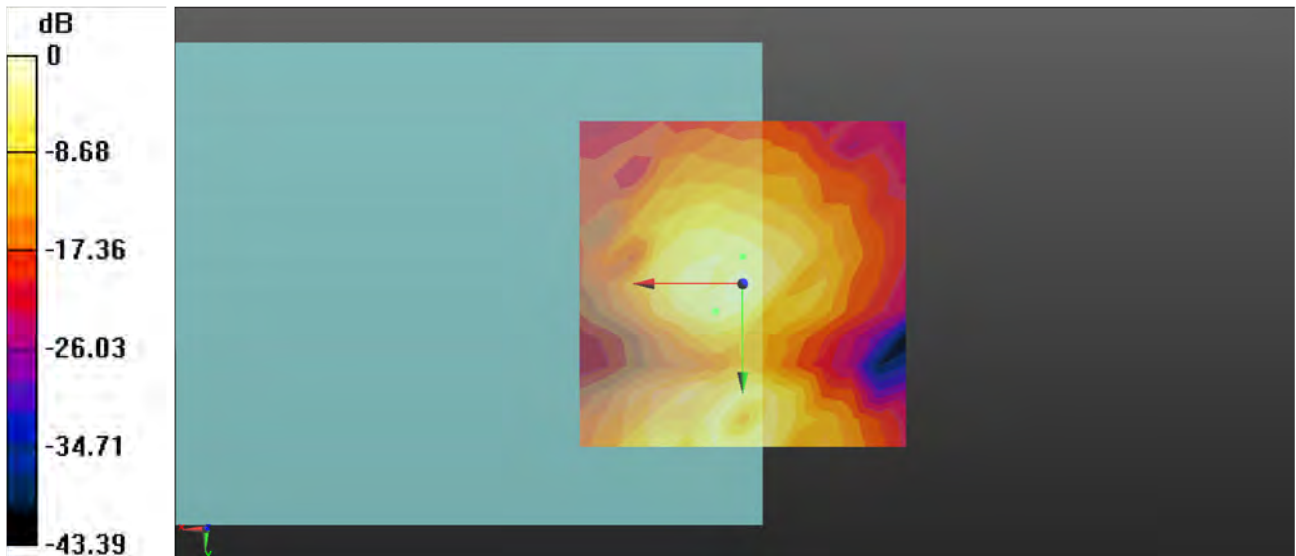

0 dB = 99.67 = 39.97 dB

P08 LTE 26_QPSK15M_Ch26865_1RB_OS0_EVS WB 5.9Kbps_Freq Resp

Communication System: LTE_FDD; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³


Ambient Temperature : 23.5°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

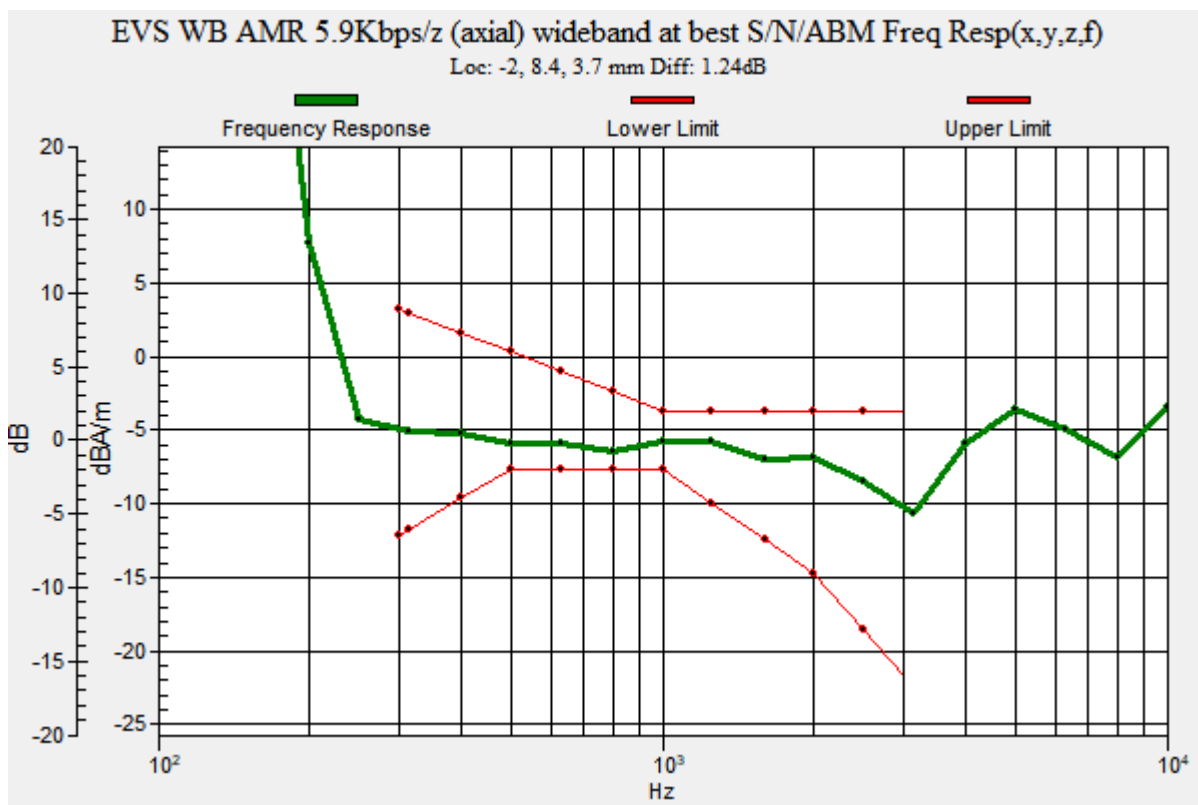

P09 LTE 41_QPSK20M_Ch40620_1RB_OS0_WB AMR 6.6Kbps_Axial (Z)

Communication System: LTE_TDD; Frequency: 2593 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid:

dx=10mm, dy=10mm

ABM1/ABM2 = 47.93 dB

ABM1 comp = 4.77 dBA/m

Location: 0, 8.3, 3.7 mm

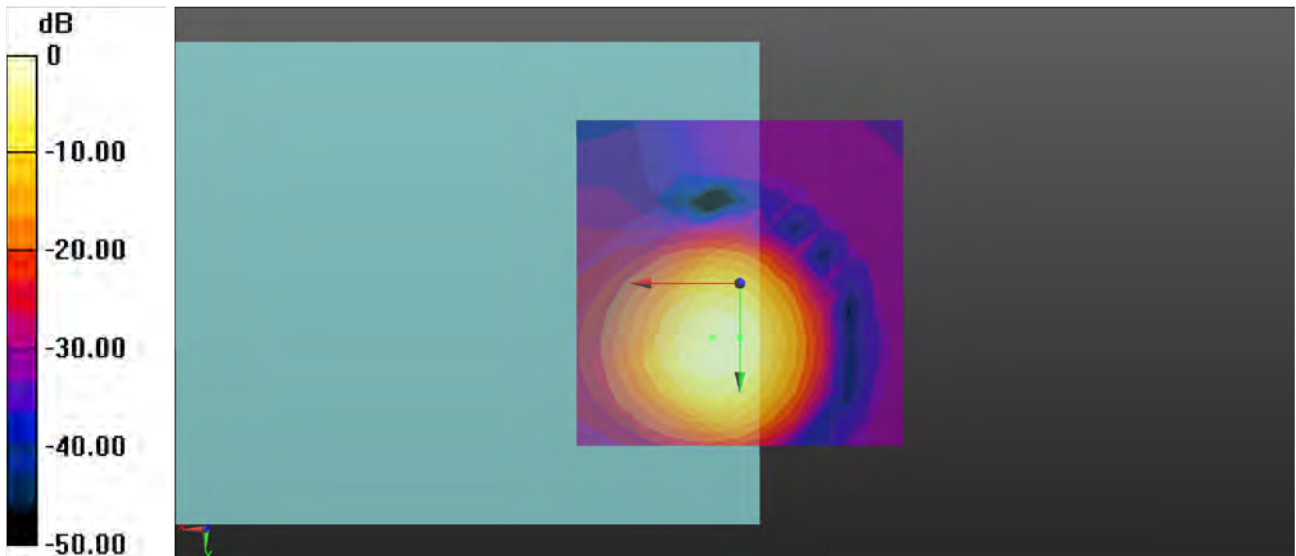

0 dB = 249.1 = 47.93 dB

P09 LTE 41_QPSK20M_Ch40620_1RB_OS0_WB AMR 6.6Kbps_Transversal (Y)

Communication System: LTE_TDD; Frequency: 2593 MHz; Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm

ABM1/ABM2 = 41.19 dB

ABM1 comp = -7.30 dBA/m

Location: -4.2, -4.2, 3.7 mm

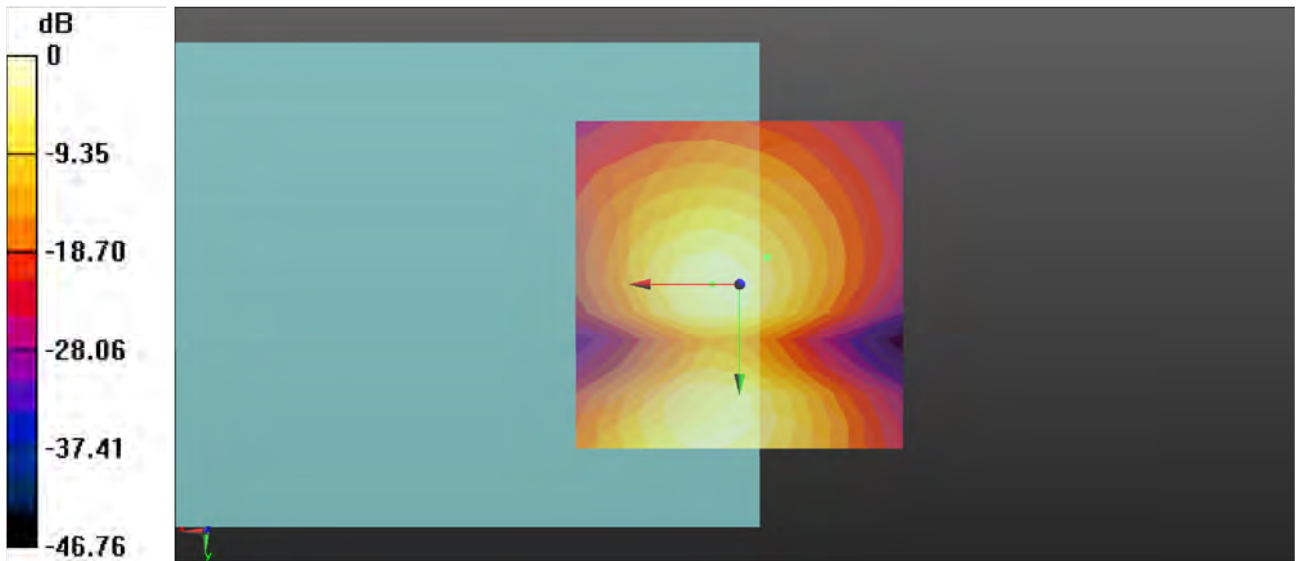

0 dB = 114.7 = 41.19 dB

P09 LTE 41_QPSK20M_Ch40620_1RB_OS0_WB AMR 6.6Kbps_Freq Resp

Communication System: LTE_TDD (0); Frequency: 2593 MHz;Duty Cycle: 1:1.59

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³


Ambient Temperature : 23.5°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

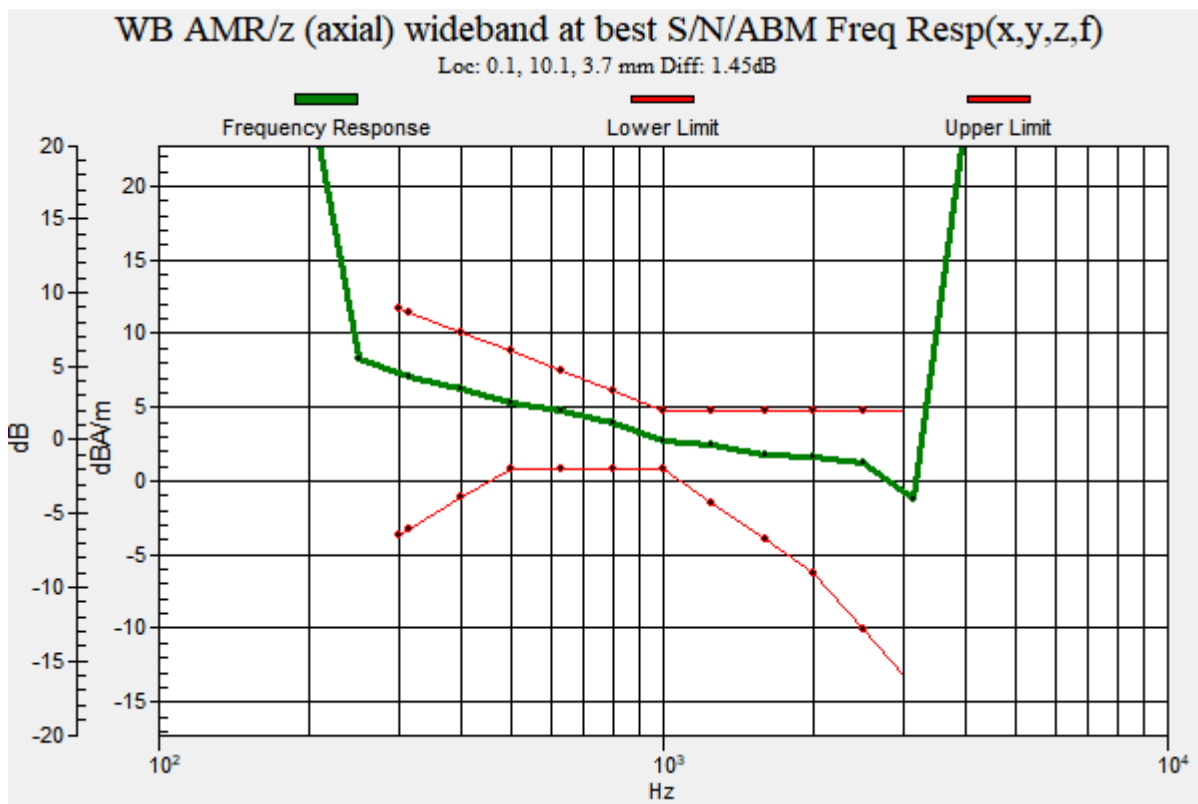

P10 LTE 66_QPSK20M_Ch132322_1RB_OS0_EVS WB 5.9Kbps_Axial (Z)

Communication System: LTE_FDD; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid:

dx=10mm, dy=10mm

ABM1/ABM2 = 54.52 dB

ABM1 comp = 2.25 dBA/m

Location: 0, 12.5, 3.7 mm

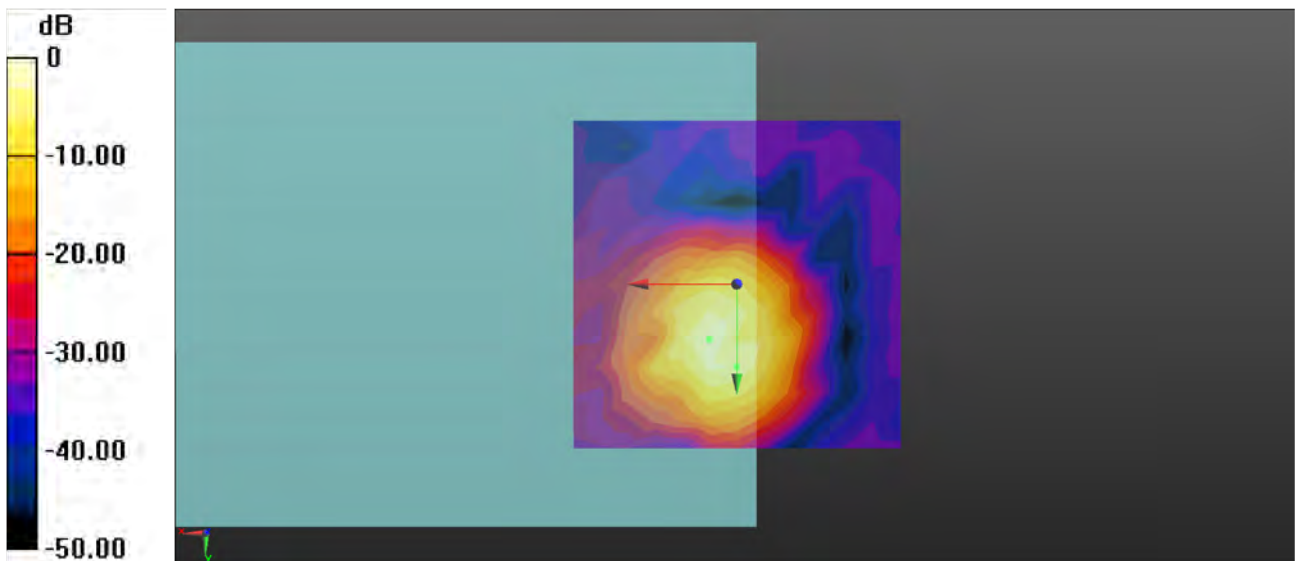

0 dB = 531.9 = 54.52 dB

P10 LTE 66_QPSK20M_Ch132322_1RB_OS0_EVS WB 5.9Kbps_Transversal (Y)

Communication System: LTE_FDD; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm

ABM1/ABM2 = 45.88 dB

ABM1 comp = -5.31 dBA/m

Location: 0, 0, 3.7 mm

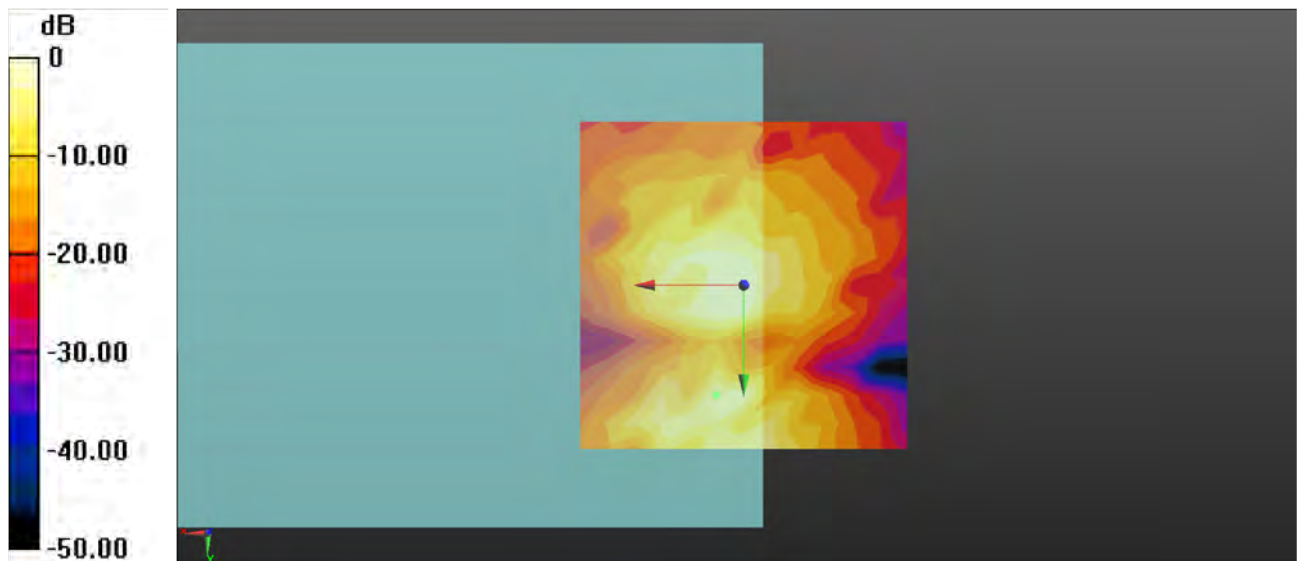

0 dB = 196.8 = 45.88 dB

P10 LTE 66_QPSK20M_Ch132322_1RB_OS0_EVS WB 5.9Kbps_Freq Resp

Communication System: LTE_FDD; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³


Ambient Temperature : 23.5°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

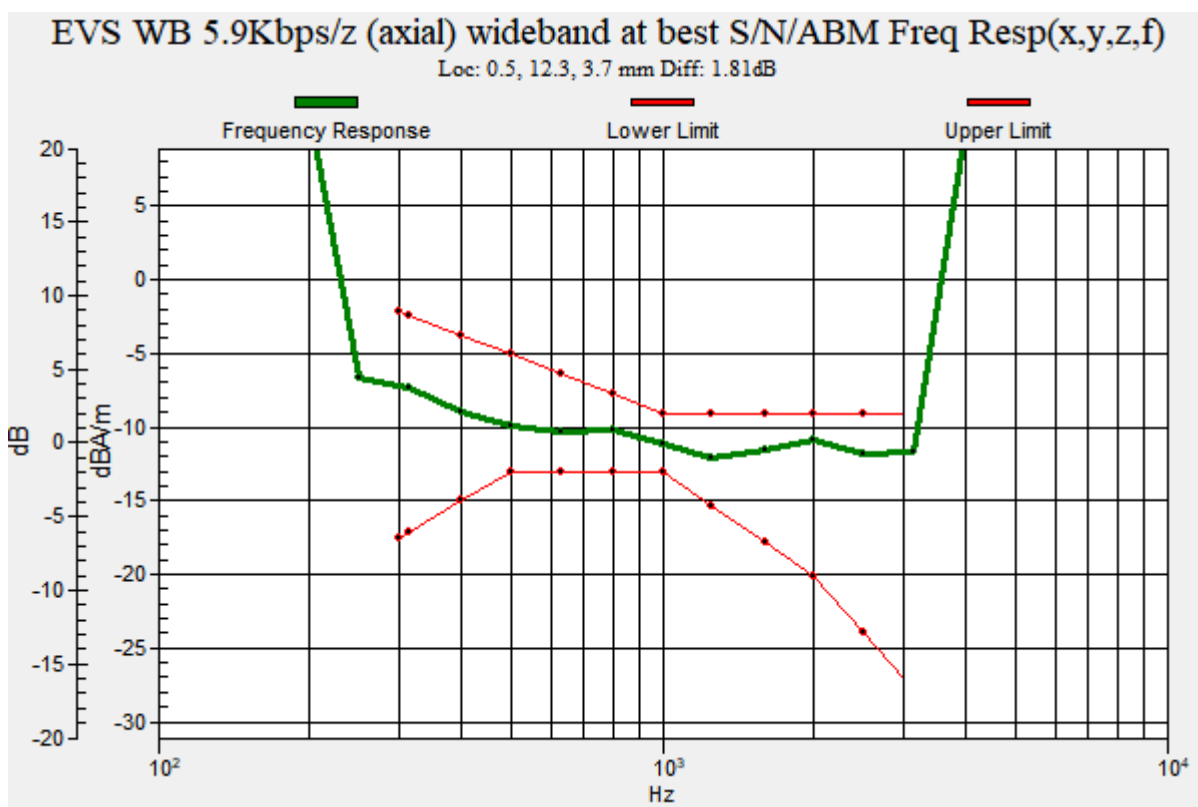

P11 LTE 71_QPSK20M_Ch133322_1RB_OS0_EVS WB 5.9Kbps_Axial (Z)

Communication System: LTE_FDD; Frequency: 683 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid:

dx=10mm, dy=10mm

ABM1/ABM2 = 47.19 dB

ABM1 comp = -3.59 dBA/m

Location: -4.2, 8.3, 3.7 mm

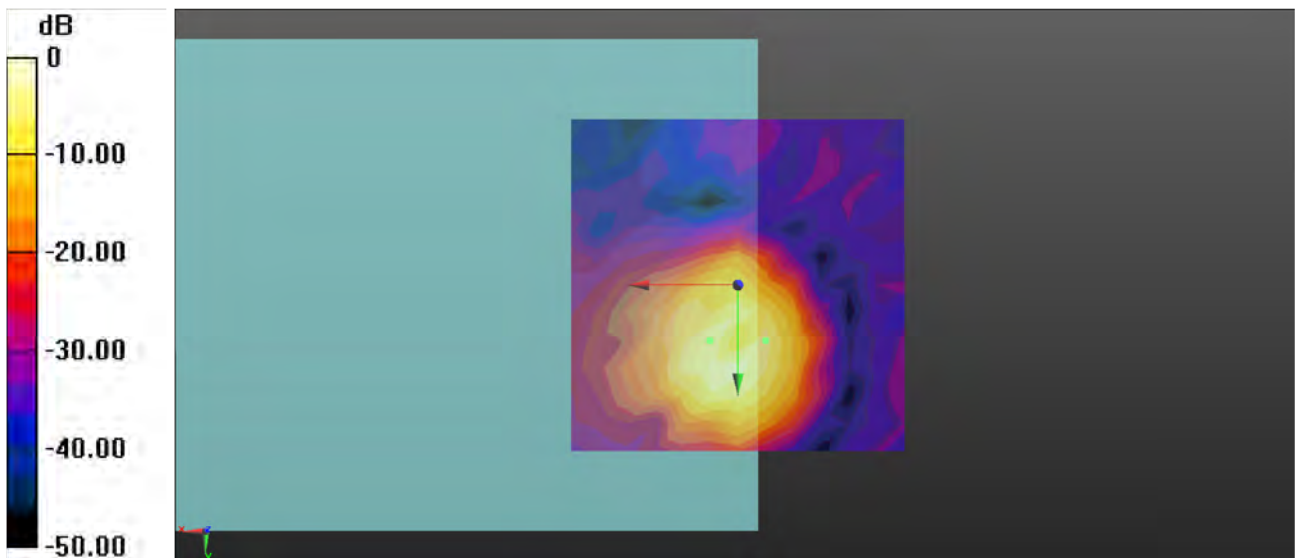

0 dB = 228.9 = 47.19 dB

P11 LTE 71_QPSK20M_Ch133322_1RB_OS0_EVS WB 5.9Kbps_Transversal (Y)

Communication System: LTE_FDD; Frequency: 683 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.5°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm

ABM1/ABM2 = 40.20 dB

ABM1 comp = -9.15 dBA/m

Location: 0, -4.2, 3.7 mm

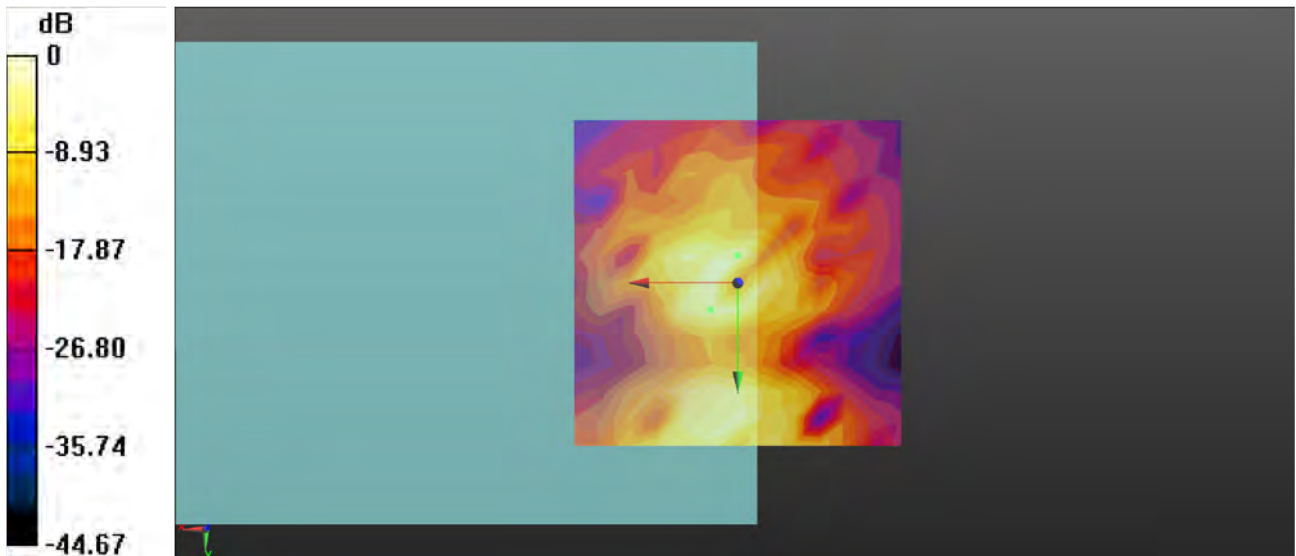

0 dB = 102.4 = 40.20 dB

P11 LTE 71_QPSK20M_Ch133322_1RB_OS0_EVS WB 5.9Kbps_Freq Resp

Communication System: LTE_FDD; Frequency: 683 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³


Ambient Temperature : 23.5°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

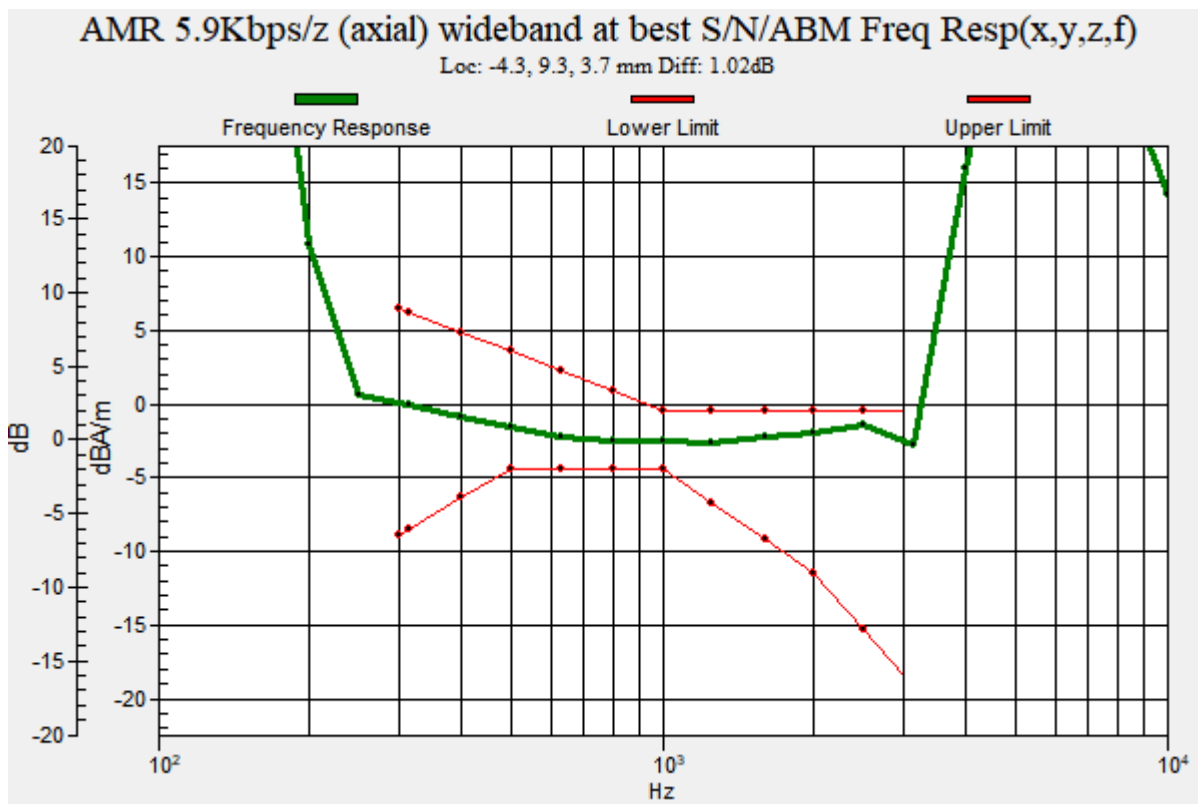

P12 WLAN2.4G_802.11b_Ch6_WB AMR 6.60Kbps_Axial (Z)

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.7°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid:

dx=10mm, dy=10mm

ABM1/ABM2 = 53.73 dB

ABM1 comp = 4.18 dBA/m

Location: 0, 12.5, 3.7 mm

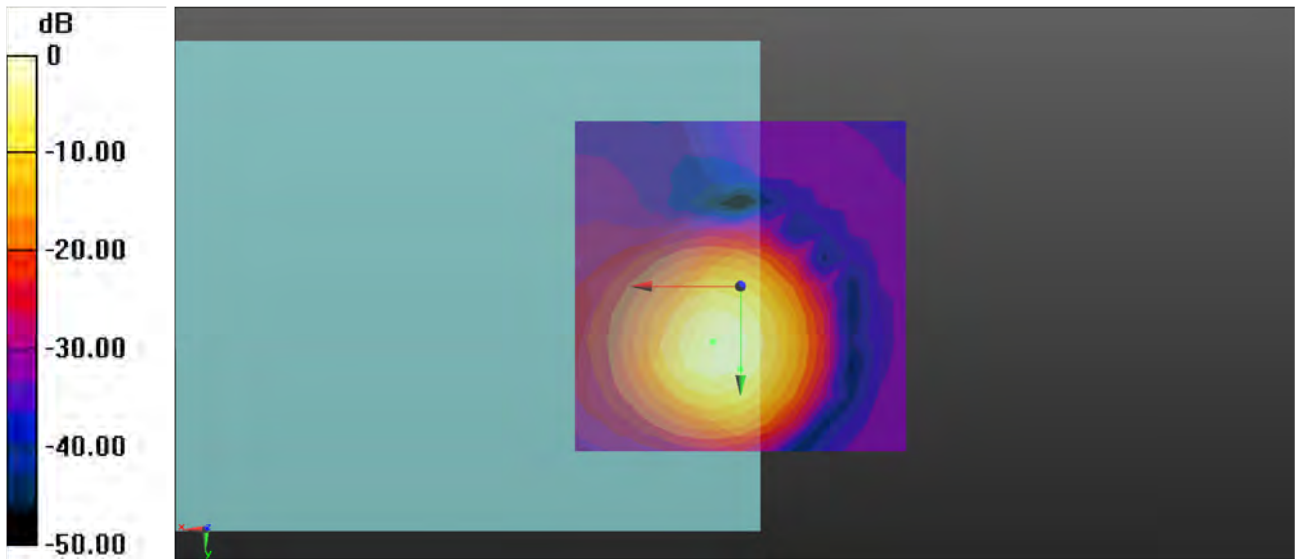

0 dB = 485.8 = 53.73 dB

P12 WLAN2.4G_802.11b_Ch6_WB AMR 6.60Kbps_Transversal (Y)

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.7°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm

ABM1/ABM2 = 43.48 dB

ABM1 comp = -3.94 dBA/m

Location: 4.2, 25, 3.7 mm

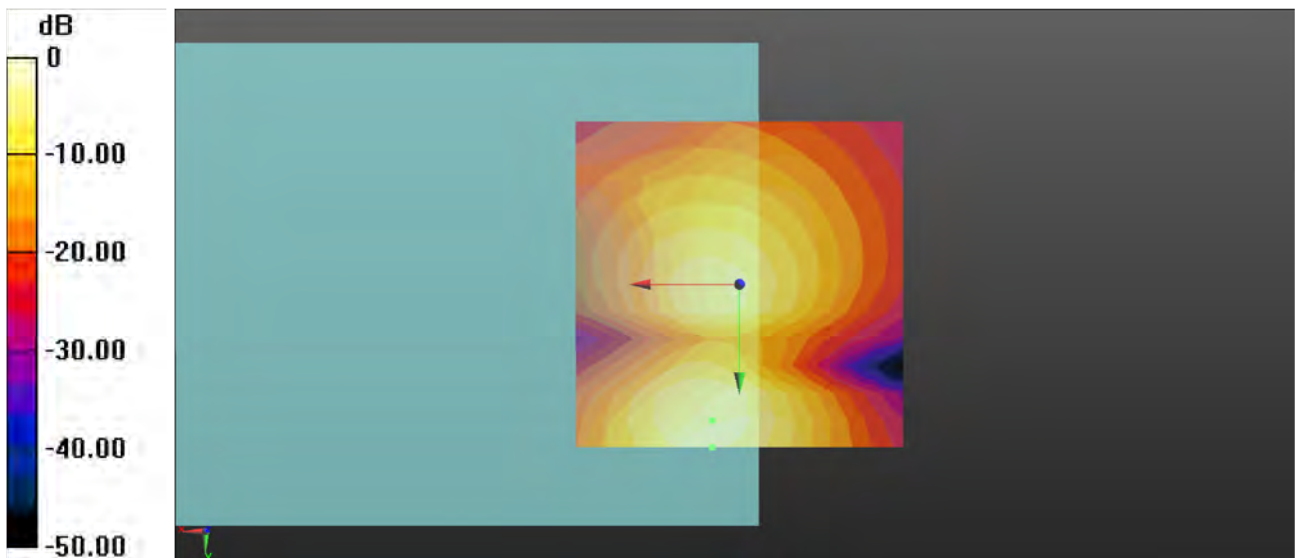

0 dB = 149.3 = 43.48 dB

P12 WLAN2.4G_802.11b_Ch6_WB AMR 6.60Kbps_Freq Resp

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³


Ambient Temperature : 23.7°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

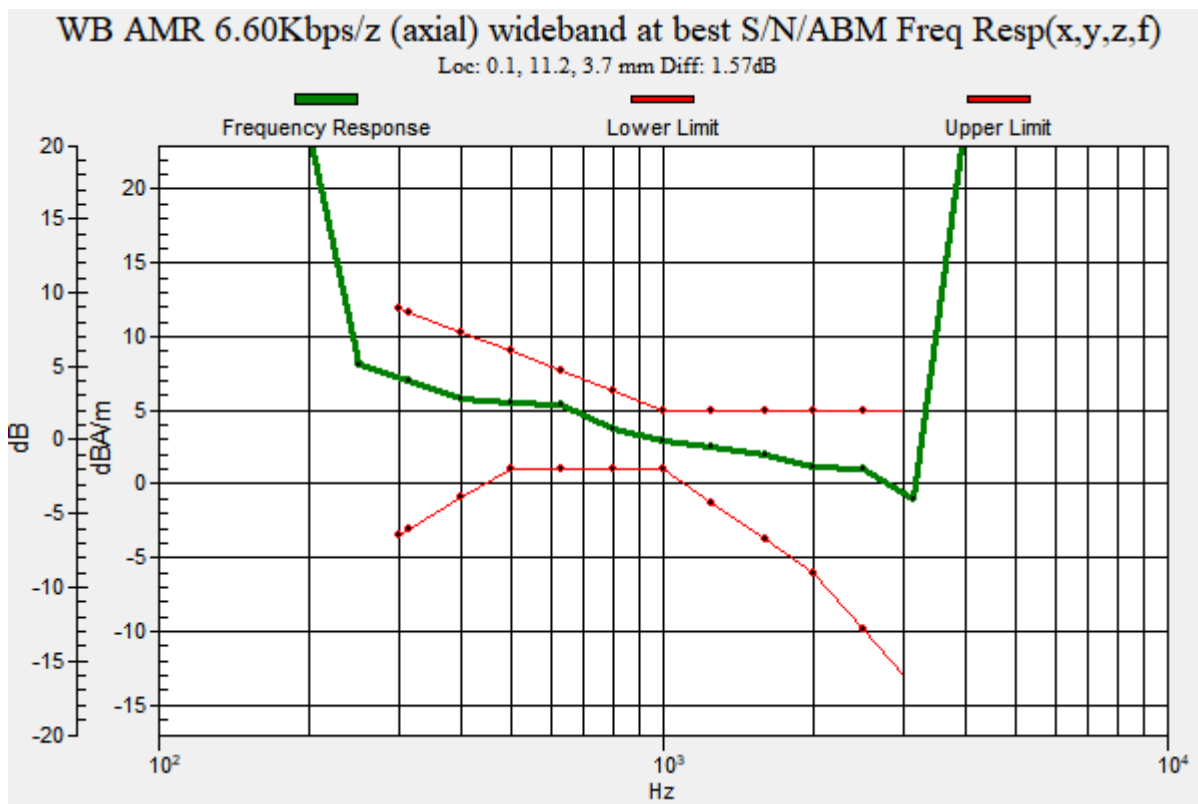

P13 WLAN5G_802.11an-HT20_MCS0_Ch40_WB AMR 6.60Kbps_Axial (Z)

Communication System: 802.11an-HT20; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.7°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid:

dx=10mm, dy=10mm

ABM1/ABM2 = 54.40 dB

ABM1 comp = 5.88 dBA/m

Location: 0, 12.5, 3.7 mm

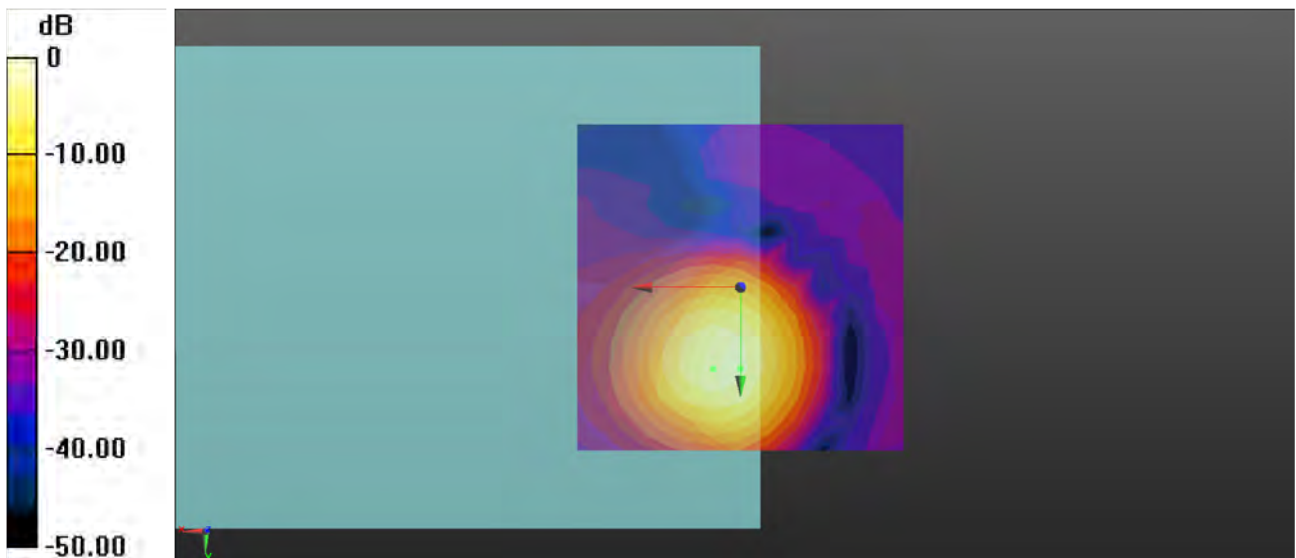

0 dB = 524.9 = 54.40 dB

P13 WLAN5G_802.11an-HT20_MCS0_Ch40_WB AMR 6.60Kbps_Transversal (Y)

Communication System: 802.11an-HT20; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.7°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm

ABM1/ABM2 = 44.38 dB

ABM1 comp = -5.65 dBA/m

Location: -4.2, 25, 3.7 mm

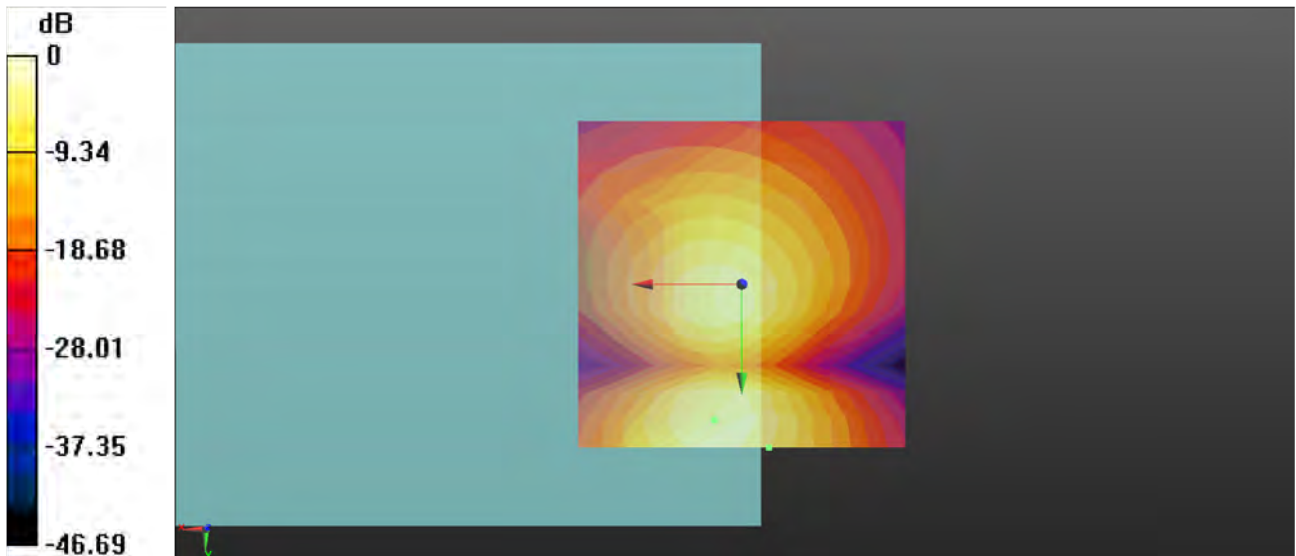

0 dB = 165.7 = 44.38 dB

P13 WLAN5G_802.11an-HT20_MCS0_Ch40_WB AMR 6.60Kbps_Freq Resp

Communication System: 802.11an-HT20; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$


Ambient Temperature : 23.7°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

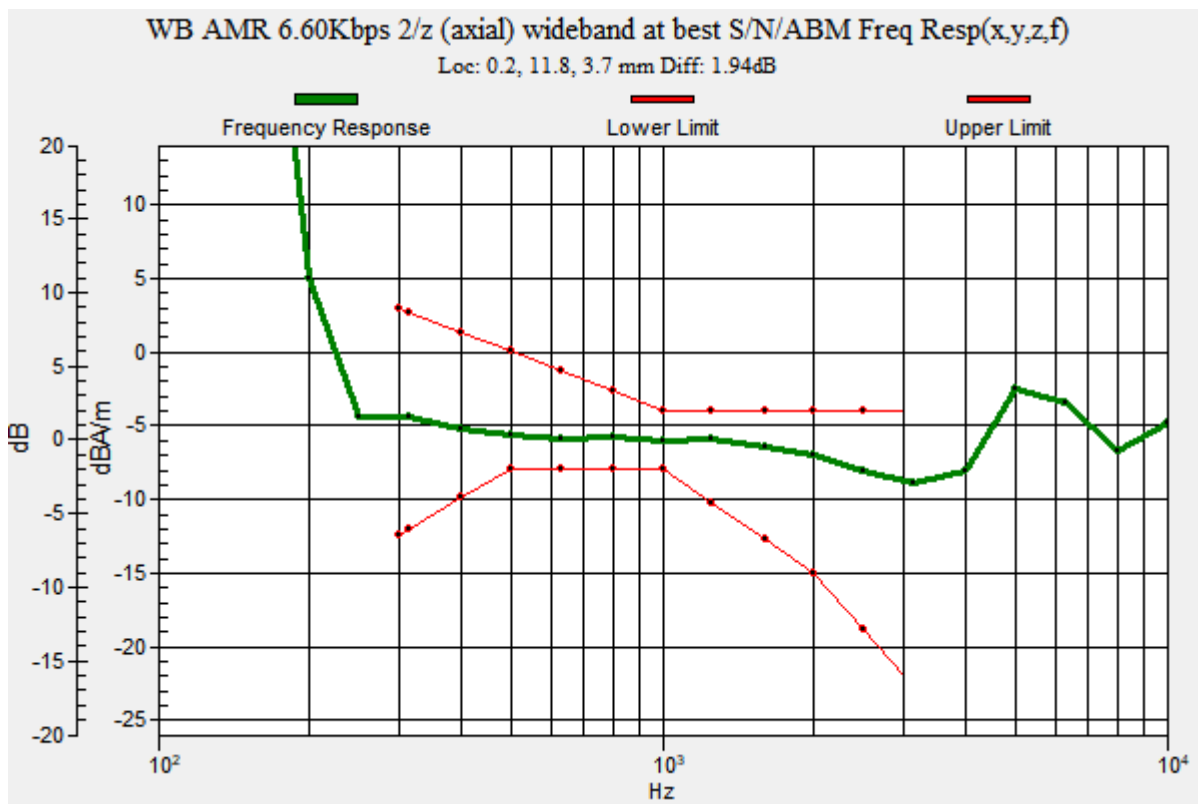

P14 WLAN5G_802.11an-HT20_MCS0_Ch60_WB AMR 6.60Kbps_Axial (Z)

Communication System: 802.11an-HT20; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.7°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid:

dx=10mm, dy=10mm

ABM1/ABM2 = 54.91 dB

ABM1 comp = 5.88 dBA/m

Location: 0, 12.5, 3.7 mm

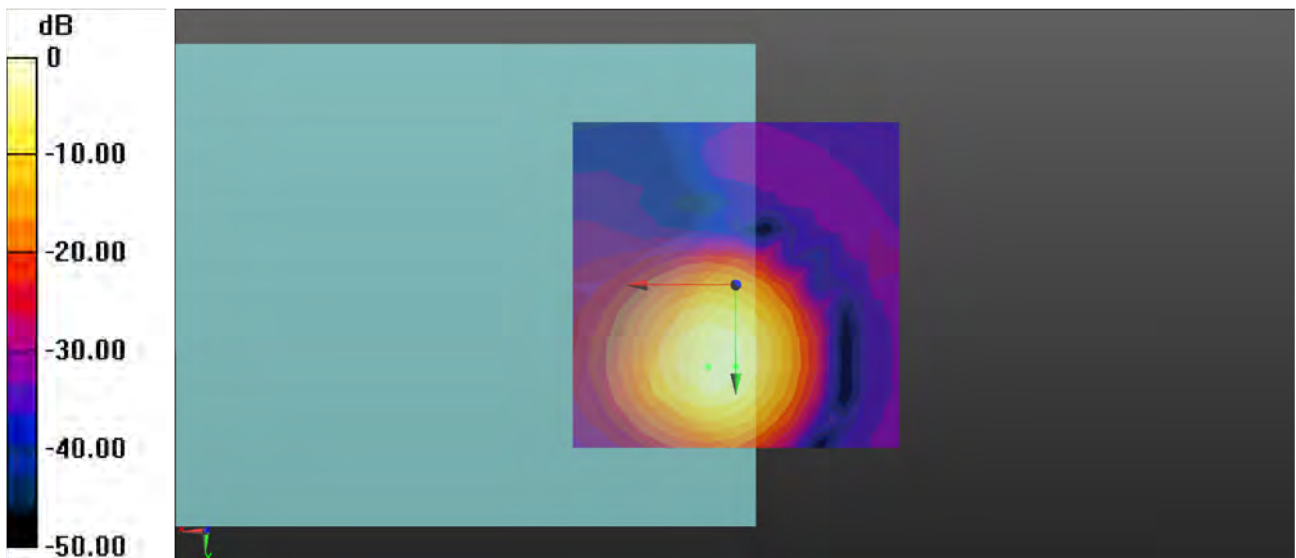

0 dB = 556.4 = 54.91 dB

P14 WLAN5G_802.11an-HT20_MCS0_Ch60_WB AMR 6.60Kbps_Transversal (Y)

Communication System: 802.11an-HT20; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.7°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm

ABM1/ABM2 = 44.64 dB

ABM1 comp = -5.61 dBA/m

Location: -4.2, 25, 3.7 mm

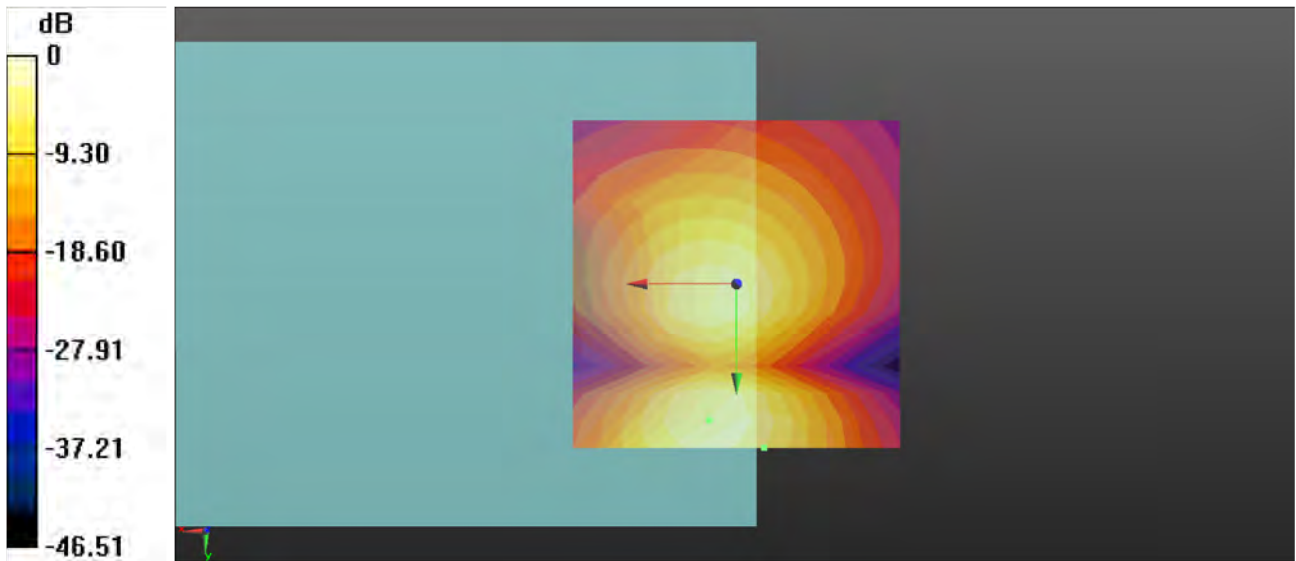

0 dB = 170.7 = 44.64 dB

P14 WLAN5G_802.11an-HT20_MCS0_Ch60_WB AMR 6.60Kbps_Freq Resp

Communication System: 802.11an-HT20; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 0 \text{ kg/m}^3$


Ambient Temperature : 23.7°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

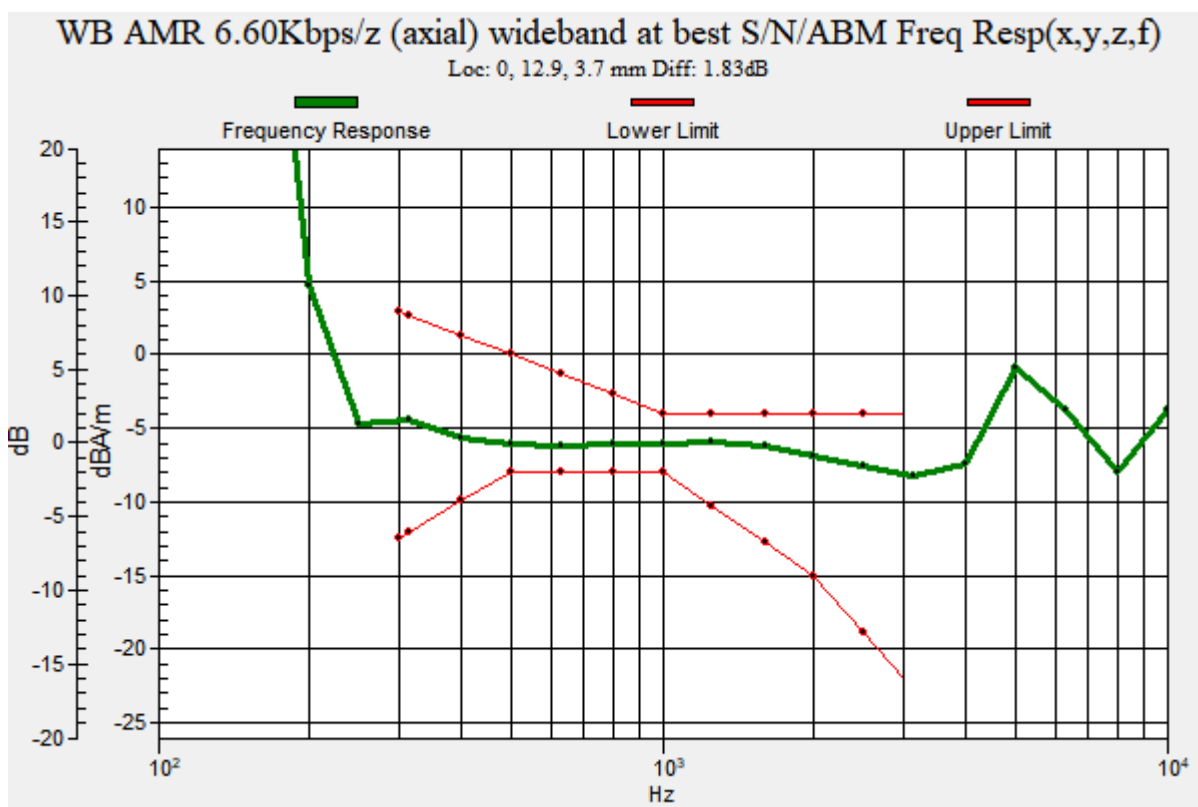

P15 WLAN5G_802.11an-HT20_MCS0_Ch124_WB AMR 6.60Kbps_Axial (Z)

Communication System: 802.11an-HT20; Frequency: 5620 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.7°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid:

dx=10mm, dy=10mm

ABM1/ABM2 = 53.11 dB

ABM1 comp = 5.88 dBA/m

Location: 0, 12.5, 3.7 mm

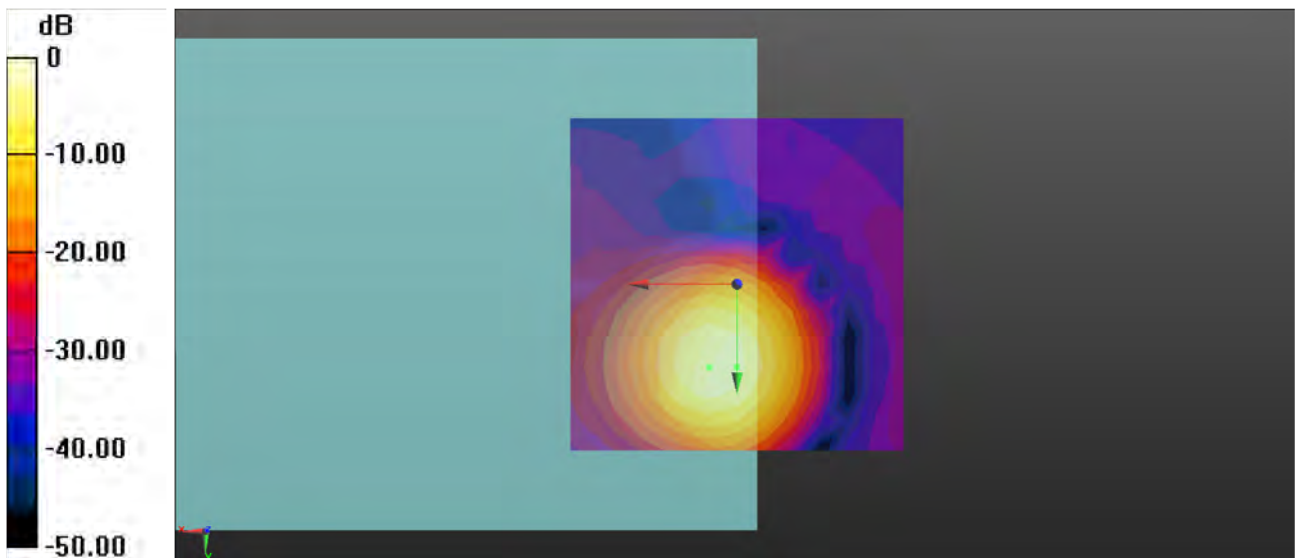

0 dB = 452.2 = 53.11 dB

P15 WLAN5G_802.11an-HT20_MCS0_Ch124_WB AMR 6.60Kbps_Transversal (Y)

Communication System: 802.11an-HT20; Frequency: 5620 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.7°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm

ABM1/ABM2 = 43.96 dB

ABM1 comp = -5.47 dBA/m

Location: -4.2, 25, 3.7 mm

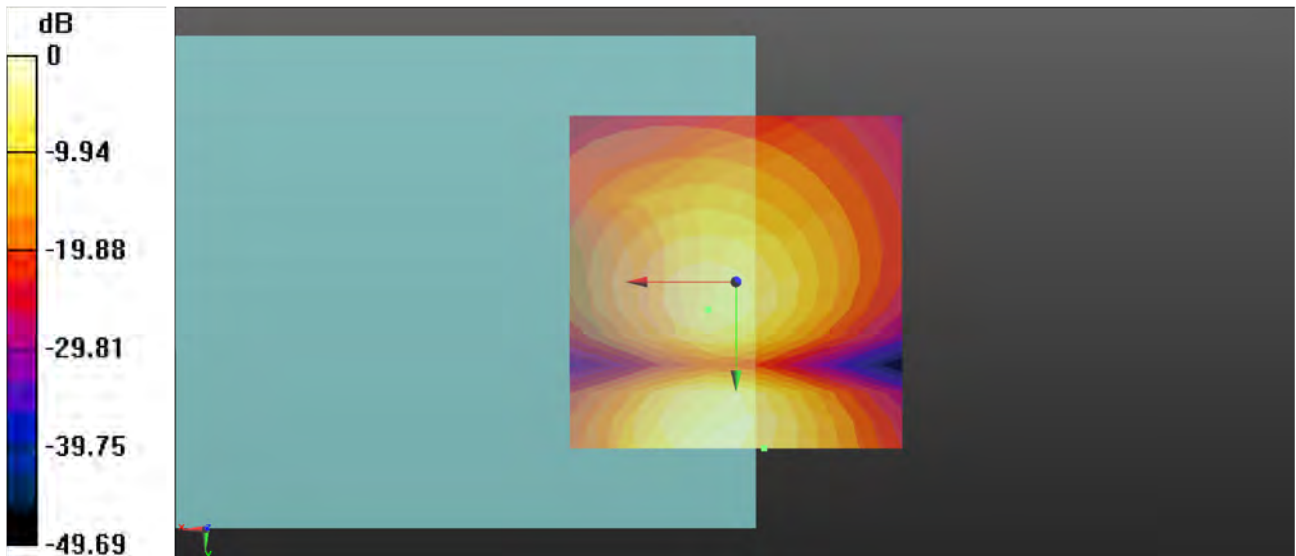

0 dB = 157.8 = 43.96 dB

P15 WLAN5G_802.11an-HT20_MCS0_Ch124_WB AMR 6.60Kbps_Freq Resp

Communication System: 802.11an-HT20; Frequency: 5620 MHz;Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³


Ambient Temperature : 23.7°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

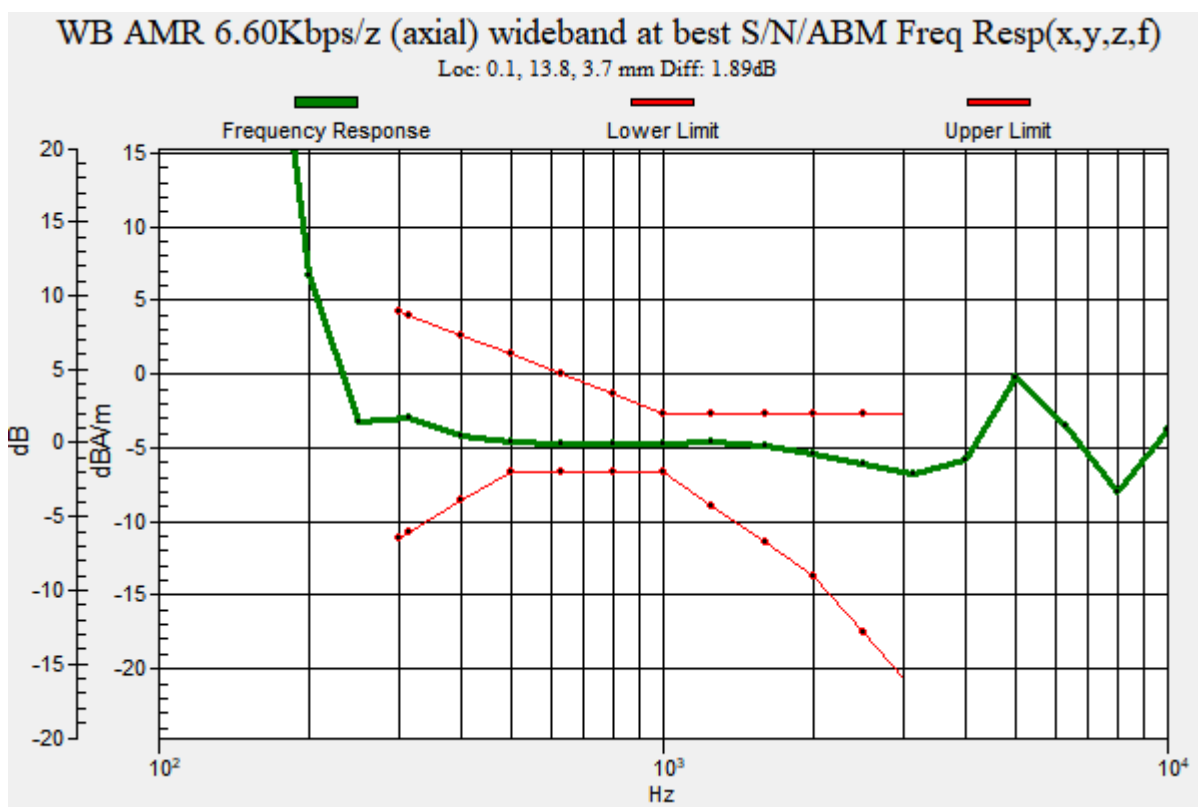

P16 WLAN5G_802.11an-HT20_MCS0_Ch157_WB AMR 6.60Kbps_Axial (Z)

Communication System: 802.11an-HT20 (0); Frequency: 5785 MHz;Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.7°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1): Measurement grid:

dx=10mm, dy=10mm

ABM1/ABM2 = 53.72 dB

ABM1 comp = 5.79 dBA/m

Location: 0, 12.5, 3.7 mm

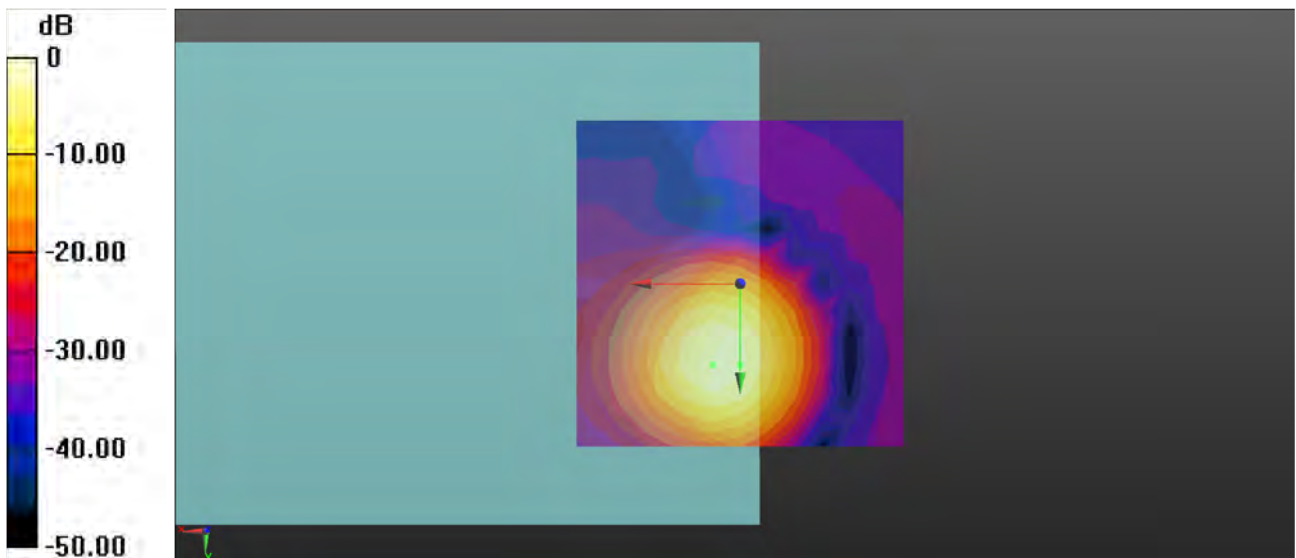

0 dB = 485.1 = 53.72 dB

P16 WLAN5G_802.11an-HT20_MCS0_Ch157_WB AMR 6.60Kbps_Transversal (Y)

Communication System: 802.11an-HT20; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.7°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

Measurement grid: dx=10mm, dy=10mm

ABM1/ABM2 = 44.50 dB

ABM1 comp = -5.72 dBA/m

Location: -4.2, 25, 3.7 mm

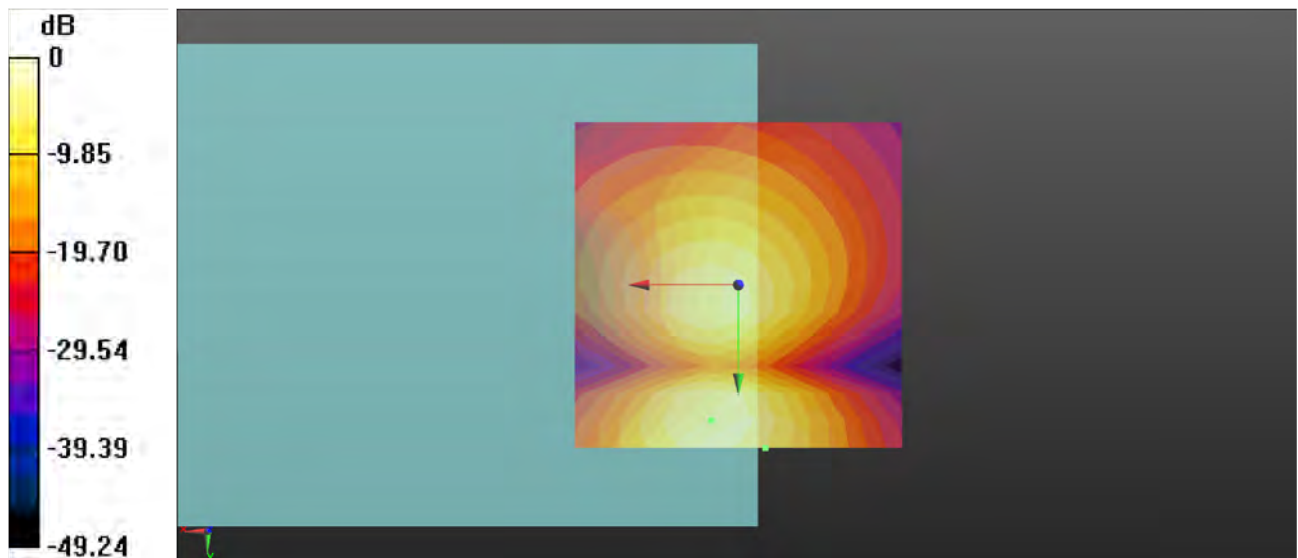

0 dB = 167.8 = 44.50 dB

P16 WLAN5G_802.11an-HT20_MCS0_Ch157_WB AMR 6.60Kbps_Freq Resp

Communication System: 802.11an-HT20; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³


Ambient Temperature : 23.7°C

DASY5 Configuration:

- Probe: AM1DV3 - 3144; ; Calibrated: 2023/02/16
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1633; Calibrated: 2023/02/08
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

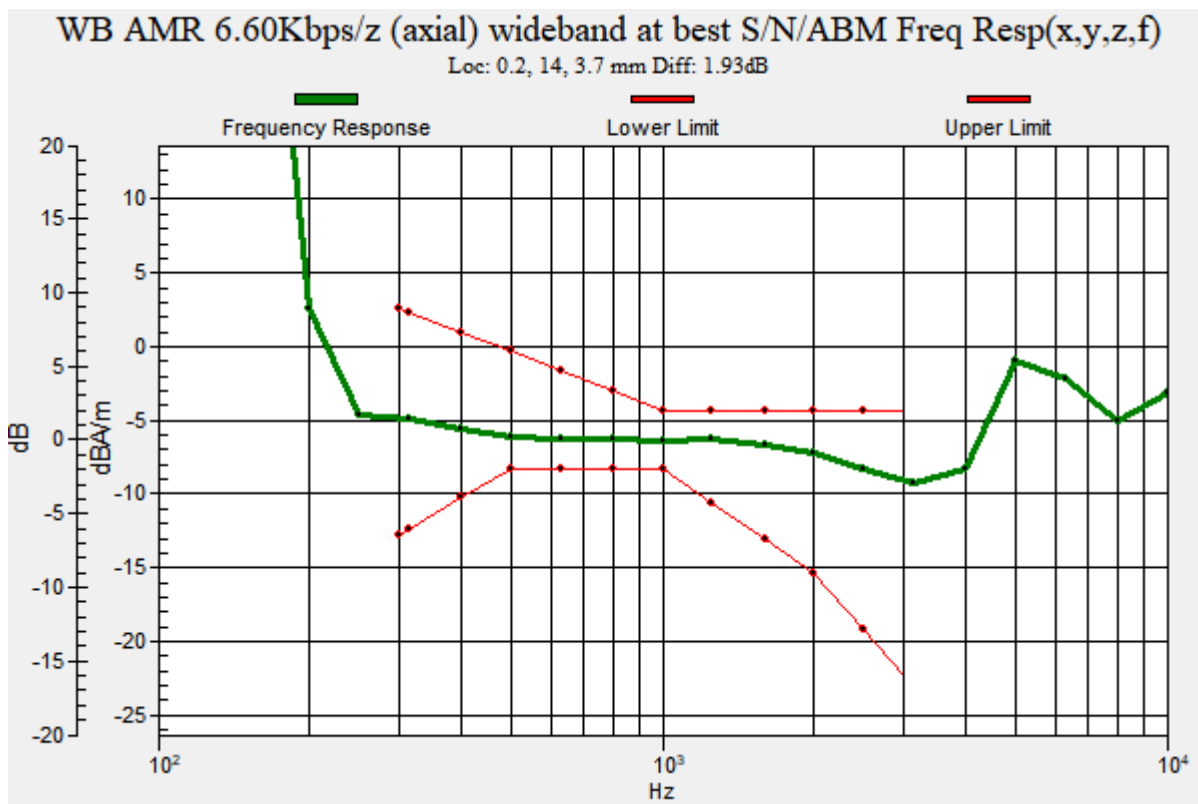



BUREAU
VERITAS



Appendix B. Calibration Certificate for Probe

The SPEAG calibration certificates are shown as follows.

Client : **7layers**

Certificate No: **Z23-60064**

CALIBRATION CERTIFICATE

Object: DAE4 - SN: 1633

Calibration Procedure(s): FF-Z11-002-01
Calibration Procedure for the Data Acquisition Electronics (DAEx)

Calibration date: February 08, 2023

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|------------------------|---------|--|-----------------------|
| Process Calibrator 753 | 1971018 | 14-Jun-22 (CTTL, No.J22X04180) | Jun-23 |

| | Name | Function | Signature |
|----------------|-------------|--------------------|---|
| Calibrated by: | Yu Zongying | SAR Test Engineer |  |
| Reviewed by: | Lin Hao | SAR Test Engineer |  |
| Approved by: | Qi Dianyuan | SAR Project Leader |  |

Issued: February 14, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2117

E-mail: emf@caict.ac.cn

<http://www.caict.ac.cn>

Glossary:

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters:

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2117
 E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1μV, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X | Y | Z |
|---------------------|-----------------------|-----------------------|-----------------------|
| High Range | 405.258 ± 0.15% (k=2) | 405.540 ± 0.15% (k=2) | 405.038 ± 0.15% (k=2) |
| Low Range | 4.00096 ± 0.7% (k=2) | 4.00014 ± 0.7% (k=2) | 4.01156 ± 0.7% (k=2) |

Connector Angle

| | |
|---|------------|
| Connector Angle to be used in DASY system | 318° ± 1 ° |
|---|------------|



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **7Layer**

Certificate No: **AM1DV3-3144_Feb23**

CALIBRATION CERTIFICATE

Object **AM1DV3 - SN: 3144**

Calibration procedure(s) **QA CAL-24.v4
Calibration procedure for AM1D magnetic field probes and TMFS in the
audio range**

Calibration date: **February 16, 2023**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-------------------------------|-------------|-----------------------------------|-----------------------|
| Keithley Multimeter Type 2001 | SN: 0810278 | 29-Aug-22 (No. 34389) | Aug-23 |
| Reference Probe AM1DV2 | SN: 1008 | 20-Dec-22 (No. AM1DV2-1008_Dec22) | Dec-23 |
| DAE4 | SN: 781 | 03-Jan-23 (No. DAE4-781_Jan23) | Jan-24 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---------------------------------|----------|-----------------------------------|-----------------|
| AMCC | SN: 1050 | 01-Oct-13 (in house check Oct-20) | Oct-23 |
| AMMI Audio Measuring Instrument | SN: 1062 | 26-Sep-12 (in house check Oct-20) | Oct-23 |

Calibrated by: **Name** Aidonia Georgiadou **Function** Laboratory Technician

Approved by: **Name** Niels Kuster **Function** Quality Manager

Signature

Issued: February 22, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

References

- [1] ANSI-C63.19-2007
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] ANSI-C63.19-2019 (ANSI-C63.19-2011)
American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [3] DASY System Handbook

Description of the AM1D probe

The AM1D Audio Magnetic Field Probe is a fully shielded magnetic field probe for the frequency range from 100 Hz to 20 kHz. The pickup coil is compliant with the dimensional requirements of [1+2]. The probe includes a symmetric low noise amplifier for the signal available at the shielded 3 pin connector at the side. Power is supplied via the same connector (phantom power supply) and monitored via the LED near the connector. The 7 pin connector at the end of the probe does not carry any signals, but determines the angle of the sensor when mounted on the DAE. The probe supports mechanical detection of the surface.

The single sensor in the probe is arranged in a tilt angle allowing measurement of 3 orthogonal field components when rotating the probe by 120° around its axis. It is aligned with the perpendicular component of the field, if the probe axis is tilted nominally 35.3° above the measurement plane, using the connector rotation and sensor angle stated below.

The probe is fully RF shielded when operated with the matching signal cable (shielded) and allows measurement of audio magnetic fields in the close vicinity of RF emitting wireless devices according to [1+2] without additional shielding.

Handling of the item

The probe is manufactured from stainless steel. In order to maintain the performance and calibration of the probe, it must not be opened. The probe is designed for operation in air and shall not be exposed to humidity or liquids. For proper operation of the surface detection and emergency stop functions in a DASY system, the probe must be operated with the special probe cup provided (larger diameter).

Methods Applied and Interpretation of Parameters

- *Coordinate System:* The AM1D probe is mounted in the DASY system for operation with a HAC Test Arch phantom with AMCC Helmholtz calibration coil according to [3], with the tip pointing to "southwest" orientation.
- *Functional Test:* The functional test preceding calibration includes test of Noise level RF immunity (1kHz AM modulated signal). The shield of the probe cable must be well connected. Frequency response verification from 100 Hz to 10 kHz.
- *Connector Rotation:* The connector at the end of the probe does not carry any signals and is used for fixation to the DAE only. The probe is operated in the center of the AMCC Helmholtz coil using a 1 kHz magnetic field signal. Its angle is determined from the two minima at nominally +120° and -120° rotation, so the sensor in the tip of the probe is aligned to the vertical plane in z-direction, corresponding to the field maximum in the AMCC Helmholtz calibration coil.
- *Sensor Angle:* The sensor tilting in the vertical plane from the ideal vertical direction is determined from the two minima at nominally +120° and -120°. DASY system uses this angle to align the sensor for radial measurements to the x and y axis in the horizontal plane.
- *Sensitivity:* With the probe sensor aligned to the z-field in the AMCC, the output of the probe is compared to the magnetic field in the AMCC at 1 kHz. The field in the AMCC Helmholtz coil is given by the geometry and the current through the coil, which is monitored on the precision shunt resistor of the coil.

AM1D probe identification and configuration data

| | |
|-----------|---|
| Item | AM1DV3 Audio Magnetic 1D Field Probe |
| Type No | SP AM1 001 BA |
| Serial No | 3144 |

| | |
|--------------------|------------------------------------|
| Overall length | 296 mm |
| Tip diameter | 6.0 mm (at the tip) |
| Sensor offset | 3.0 mm (centre of sensor from tip) |
| Internal Amplifier | 20 dB |

| | |
|-----------------------|--|
| Manufacturer / Origin | Schmid & Partner Engineering AG, Zurich, Switzerland |
|-----------------------|--|

Calibration data

| | | | |
|--------------------------|------------------|------------------------|-----------------|
| Connector rotation angle | (in DASY system) | 356.0 ° | +/- 3.6 ° (k=2) |
| Sensor angle | (in DASY system) | 0.61 ° | +/- 0.5 ° (k=2) |
| Sensitivity at 1 kHz | (in DASY system) | 0.00734 V/(A/m) | +/- 2.2 % (k=2) |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.