


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,459.500	38.90	54.00	15.10	13.28	V	4.9	1.00
9	5,460.000	38.92	54.00	15.08	13.28	V	4.9	1.00
9	5,573.000	78.13			13.38	V	355	2.00




- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5580MHz: Fundamental frequency.
- 3. #: Out of restricted band.

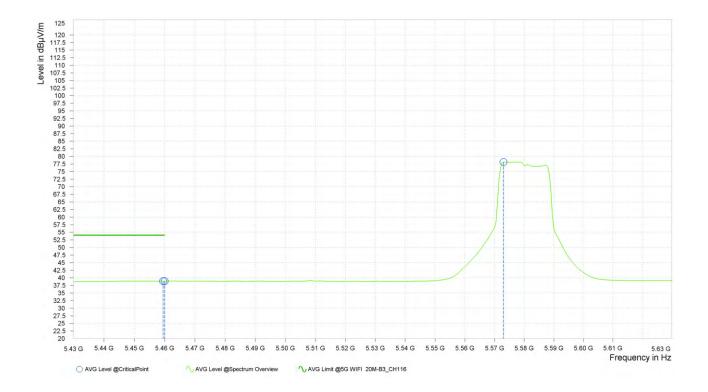


CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBµV/m]		PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,698.325	106.37			4.48	H	359	1.00
10	5,725.000	56.40	68.20	11.80	4.49	H	359	1.00
10	5,725.625	57.04	68.20	11.16	4.49	Н	359	1.00

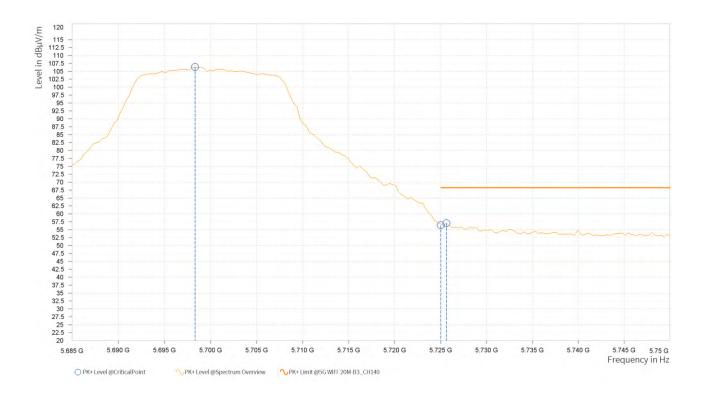



Rg	Frequency [MHz]		PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,698.000	97.17			4.48	V	359	2.00
10	5,725.000	52.79	68.20	15.41	4.49	V —	1.9	2.00
10	5,727.575	58.27	68.20	9.93	4.49	V	214.6	2.00

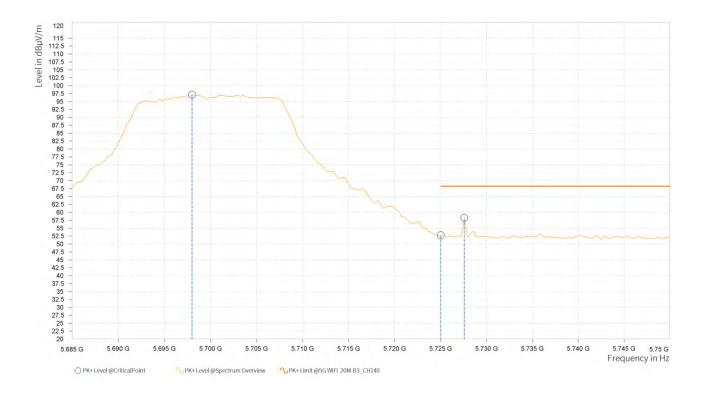


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5700MHz: Fundamental frequency.
- 3. #: Out of restricted band.




CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,718.000	106.08			4.49	Н	355.5	2.00
9	5,850.000	52.80	68.20	15.40	5.37	Н	355.5	2.00
9	5,871.500	53.94	68.20	14.26	5.42	Н	168.1	2.00

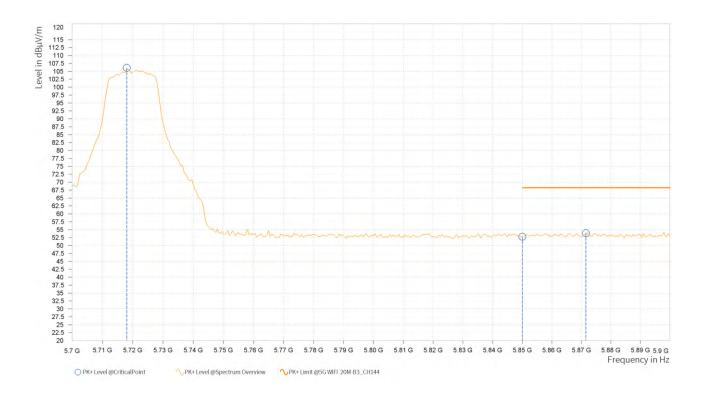



Rg	Frequency [MHz]		PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,718.000	102.53			4.49	- V	165.7	2.00
9	5,850.000	52.75	68.20	15.45	5.37	V	165.7	2.00
9	5,855.500	53.93	68.20	14.27	5.39	V	1	2.00

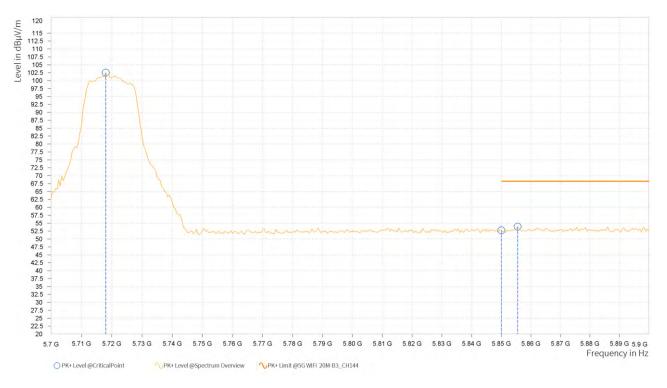

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5720MHz: Fundamental frequency.
- 3. #: Out of restricted band.




Test Report No.: PSU-NQN2311090109RF07

802.11n (20MHz)

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)	
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)	


Rg	Frequency [MHz]	PK+ Level [dBµV/m]		PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,459.250	54.63	74.00	19.37	3.76	H	300.9	1.00
7	5,460.000	54.16	74.00	19.84	3.76	Н	358.5	1.00
7	5,501.550	107.08			3.86	H	300.9	1.00

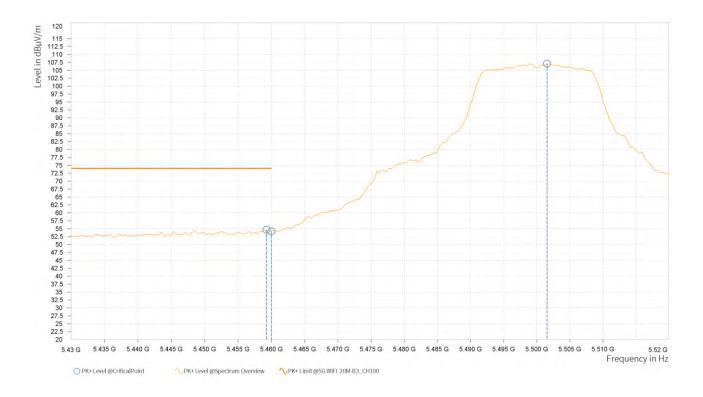




Test Report No.: PSU-NQN2311090109RF07

Rg	Frequency [MHz]	AVG Level [dBµV/m]		AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,458.800	40.23	54.00	13.77	3.76	H	1	1.00
7	5,460.000	40.34	54.00	13.66	3.76	Н	1	1.00
7	5,501.100	94.27			3.86	Н	359.1	1.00

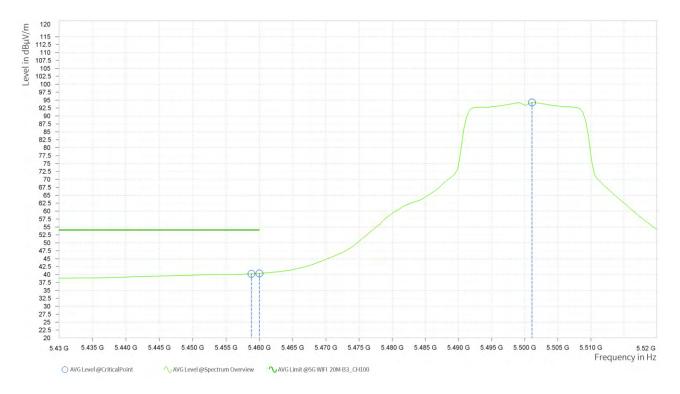




Rg	Frequency [MHz]	and the second s	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,432.700	52.74	74.00	21.26	3.70	V	359.1	1.00
7	5,460.000	52.15	74.00	21,85	3.76	V	111.9	2.00
7	5,502.000	93.88		1	3.86	V	5.2	1.00

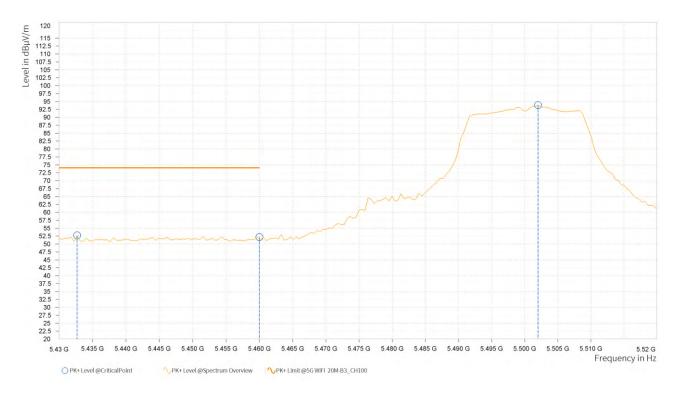



Rg	Frequency [MHz]	AVG Level [dBµV/m]	the second s	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,459.250	37.86	54.00	16.14	3.76	V	5.2	1.00
7	5,460.000	37.83	54.00	16.17	3.76	V	5.2	1.00
7	5,501.100	81.13			3.86	V	359	2.00

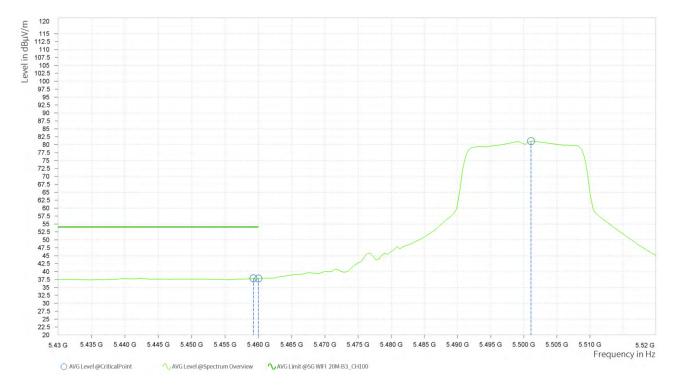


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5500MHz: Fundamental frequency.
- 3. #: Out of restricted band.




CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE			Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,431.500	54.66	74.00	19.34	13.28	Н	338.5	1.00
9	5,460.000	52.55	74.00	21.45	13.28	Н	132.4	2.00
9	5,581.500	107.51			13.39	Н	359.1	1.00

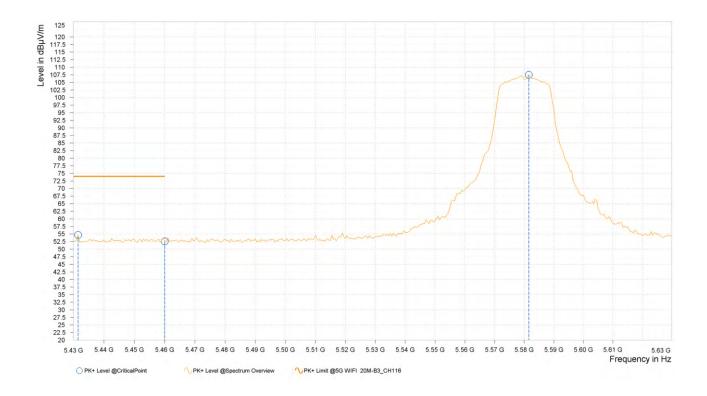




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,458.000	39.08	54.00	14.92	13.28	Н	359	1.00
9	5,460.000	39.08	54.00	14.92	13.28	Н	359	1.00
9	5,579.000	94.92			13.39	Н	359	1.00

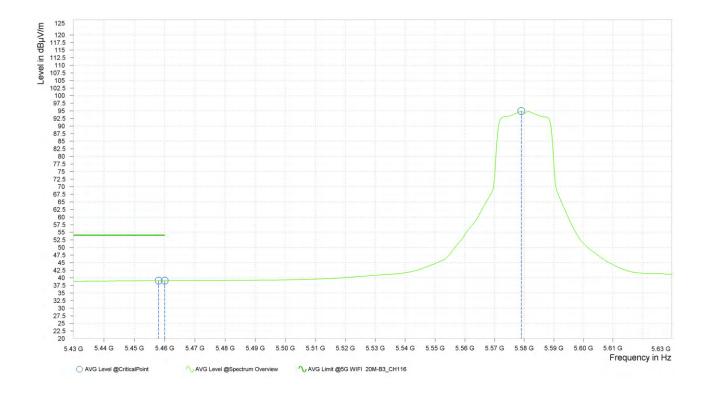




Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,455.000	53.57	74.00	20.43	13.28	V	354.3	2.00
9	5,460.000	52.52	74.00	21.48	13.28	V	10	2.00
9	5,579.000	99.57			13.39	V	190.9	2.00



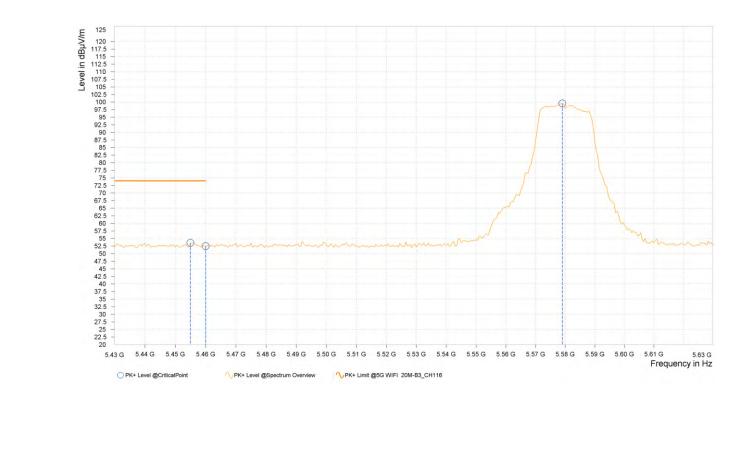



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,459.500	38.92	<mark>54.00</mark>	15.08	13.28	V	4.9	1.00
9	5,460.000	<mark>38.9</mark> 0	54.00	15.10	13.28	V	4.9	1.00
9	5,573.500	78.45			13.38	V	355	2.00

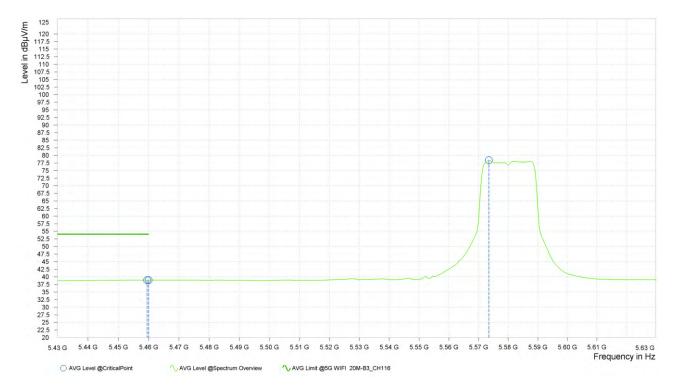


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5580MHz: Fundamental frequency.
- 3. #: Out of restricted band.




CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBµV/m]		PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,701.250	105.67			4.48	H	354.9	2.00
10	5,725.000	61.43	68.20	6.77	4.49	Н	242.2	1.00
10	5,725.950	58.04	68.20	10.16	4.49	Н	242.2	1.00

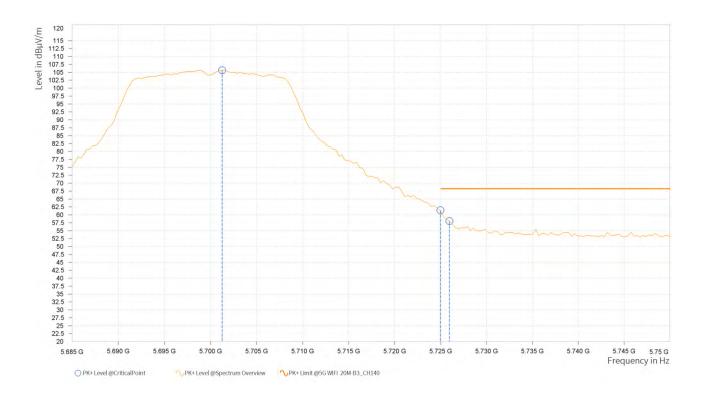



Rg	Frequency [MHz]	PK+ Level [dBµV/m]		PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,698.975	96.79			4.48	V	354.9	2.00
10	5,725.000	55.03	68.20	13.17	4.49	V	359	2.00
10	5,725.950	53.70	68.20	14.50	<mark>4.4</mark> 9	٧	359	2.00

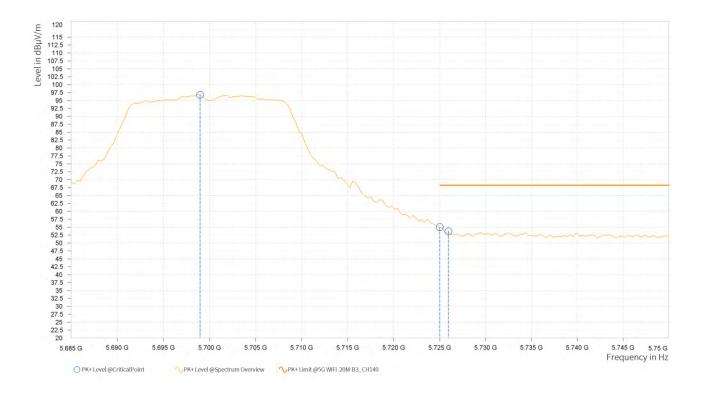


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5700MHz: Fundamental frequency.
- 3. #: Out of restricted band.




CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE			Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,719.000	106.10			4.49	H	354.8	2.00
9	5,850.000	52.80	68.20	15.40	5.37	H	115.4	2.00
9	5,855.500	54.74	68.20	13.46	5.39	Н	359	2.00

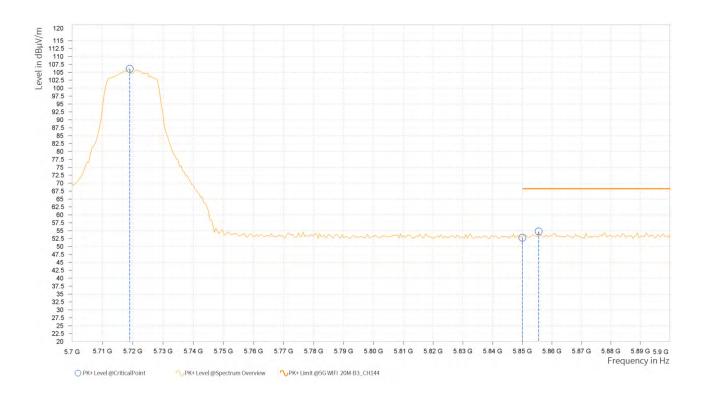



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	the second s	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,718.500	99.77			4.49	V	42.6	1.00
9	5,850.000	53.29	68.20	14,91	5.37	V	359.1	1.00
9	5,864.500	54.43	68.20	13.77	5.41	V	1	1.00

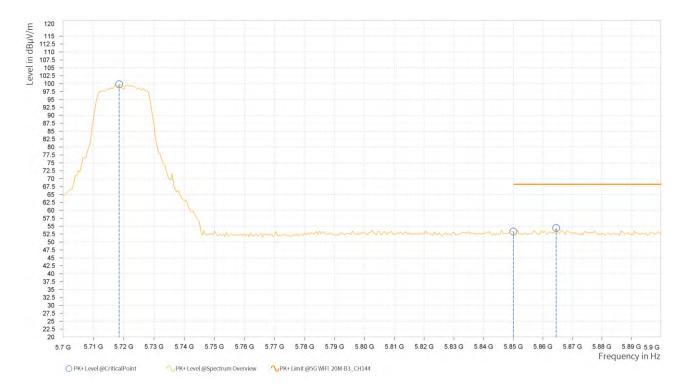

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5720MHz: Fundamental frequency.
- 3. #: Out of restricted band.




Test Report No.: PSU-NQN2311090109RF07

802.11n (40MHz)


CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE			Average (AV)

Rg	Frequency [MHz]	the second s	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,459.000	67.98	74.00	6.02	3.76	H	359.9	1.00
5	5,460.000	67.63	74.00	6.37	3.77	Н	359.9	1.00
5	5,512.500	103.18		1	3.89	Н	359.9	1.00

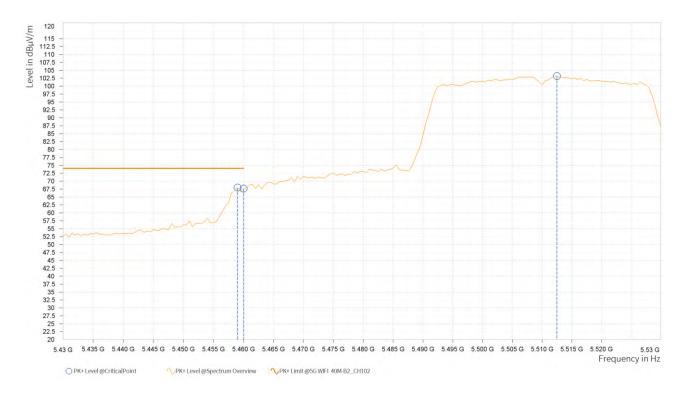




Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,459.500	46.53	54.00	7.47	3.76	Н	5.1	1.00
5	5,460.000	47.00	54.00	7.00	3.77	Η	5.1	1.00
5	5,507.500	89.95			3.88	Н	359.9	1.00

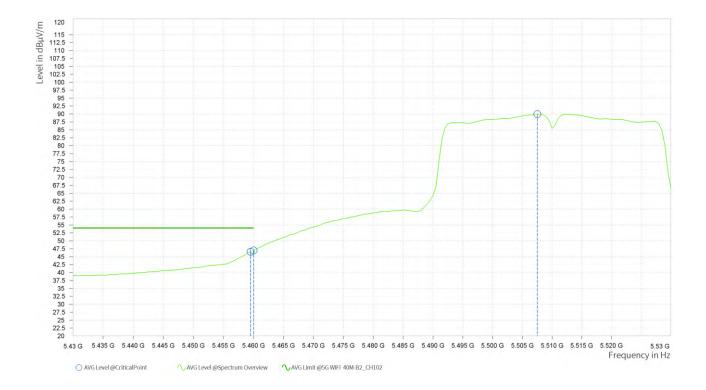




Rg	Frequency [MHz]	the second se	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,459.500	61.12	74.00	12.88	3.76	V	172	1.00
5	5,460.000	60.17	74.00	13.83	3.77	V	172	1.00
5	5,512.000	94.49			3.89	V	291.4	1.00

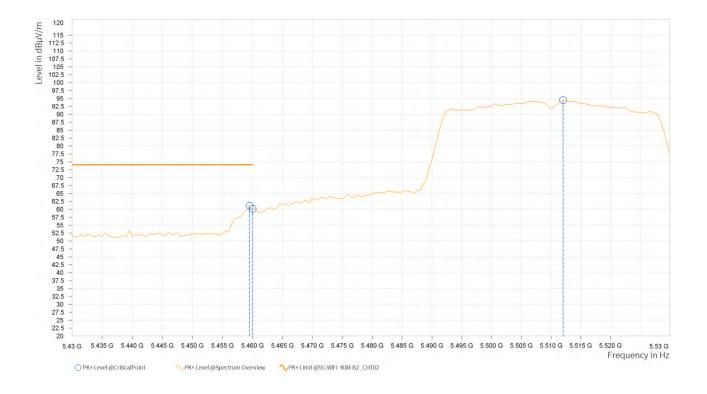



Rg	Frequency [MHz]	AVG Level [dBµV/m]		AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,459.500	39.53	54.00	14.47	3.76	V	312.4	1.00
5	5,460.000	39.73	54.00	14.27	3.77	V	312.4	1.00
5	5,507.500	81.38	- T T		3.88	V	193.5	1.00

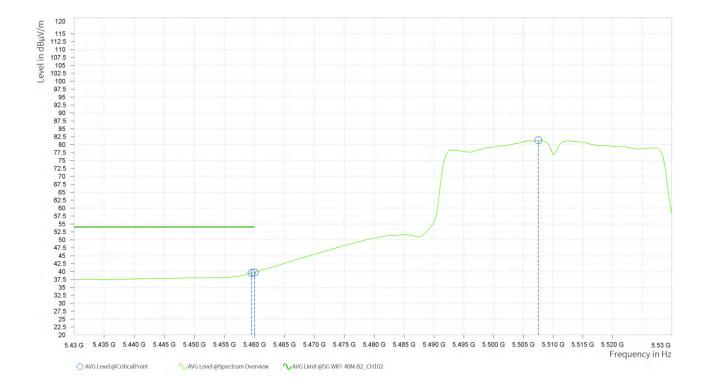


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5510MHz: Fundamental frequency.
- 3. #: Out of restricted band.




CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,455.375	53.29	74.00	20.71	3.75	H	331.8	2.00
6	5,460.000	52.03	74.00	21.97	3.76	Н	359.9	1.00
6	5,551.440	102.73			3.99	Н	359.9	1.00

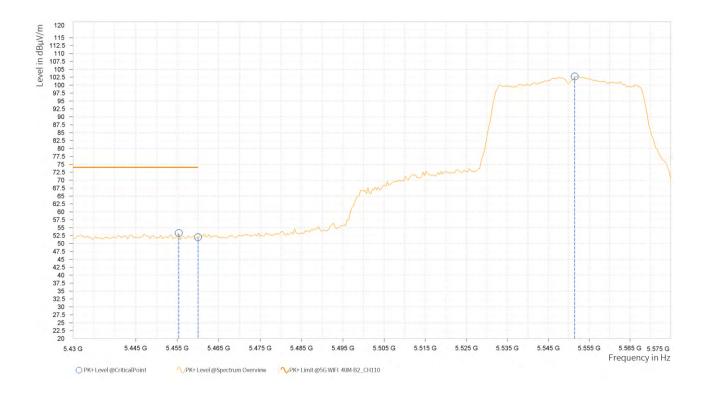




Rg	Frequency [MHz]	AVG Level [dBµV/m]		AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,453.563	38.47	54.00	15.53	3.75	Ŧ	4.2	1.00
6	5,460.000	38.46	54.00	15.54	3.76	Н	4.2	1.00
6	5,552.888	89.52	1		4.00	Н	332	1.00

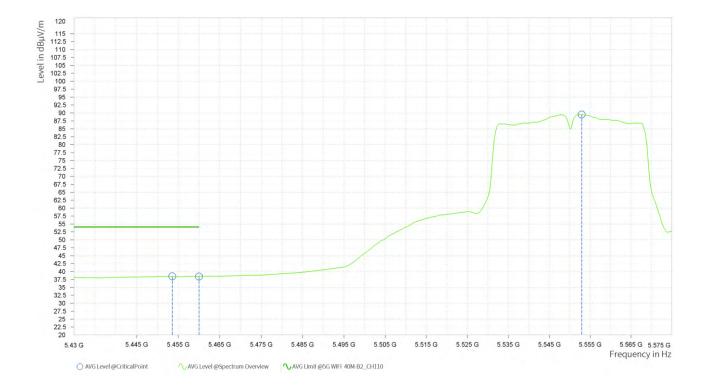




Rg	Frequency [MHz]		PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,439.788	52.44	74.00	21.56	3.72	V	136	2.00
6	5,460.000	52.00	74.00	22.00	3.76	V	334.2	2.00
6	5,562.313	93.77		1	4.04	V	185.6	2.00

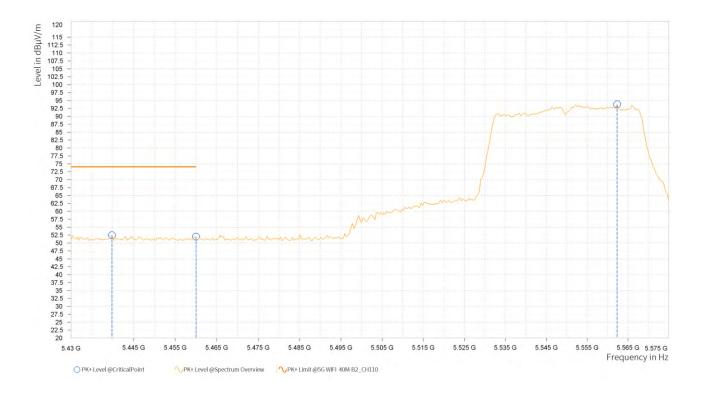



Rg	Frequency [MHz]	AVG Level [dBµV/m]		AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,449.575	37.58	54.00	16.42	3.74	٧	359.4	1.00
6	5,460.000	37.37	54.00	16.63	3.76	V	321.9	1.00
6	5,552.163	80.49	1.1	1	4.00	V	209	1.00

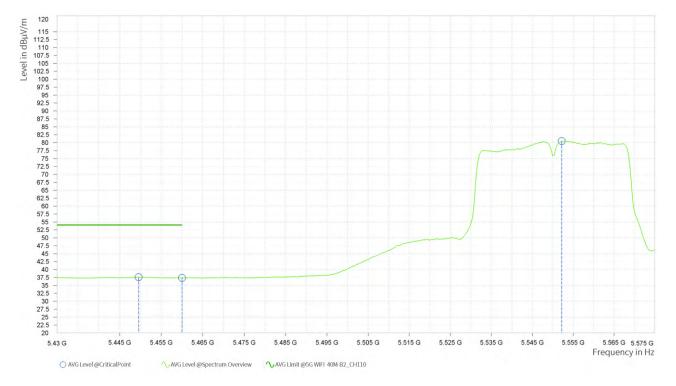


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5500MHz: Fundamental frequency.
- 3. #: Out of restricted band.




CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,667.000	100.79			4.41	Н	299.8	1.00
7	5,725.000	55.89	68.20	12.31	4.49	Н	299.8	1.00
7	5,728.000	57.52	68.20	10.68	4.49	Н	200.1	1.00

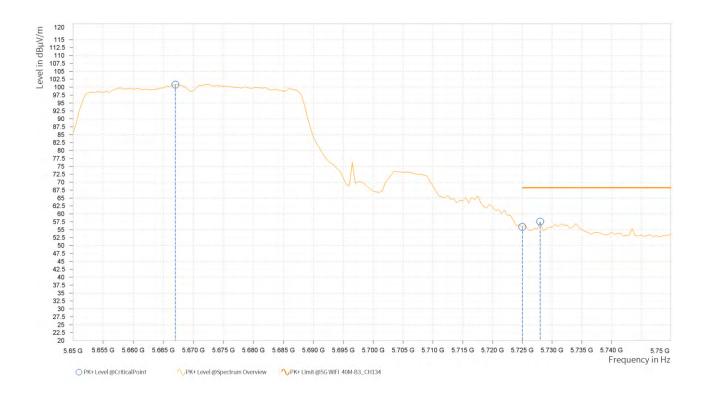



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,686.000	96.03			4.45	V	252.1	1.00
7	5,725.000	52.39	68.20	15.81	4.49	V	160.6	2.00
7	5,732.500	53.30	68.20	14.90	4.50	V	227	1.00

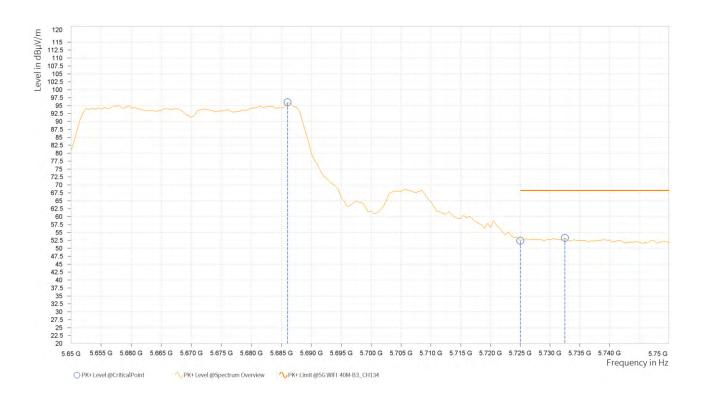


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5670MHz: Fundamental frequency.
- 3. #: Out of restricted band.




CHANNEL	TX Channel 142	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]	and the second	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,711.900	100.90			4.49	H	276.6	1.00
8	5,850.000	52.77	68.20	15.43	5.37	Н	235.3	2.00
8	5,876.900	54.43	68.20	13.77	5.43	H	0.7	2.00

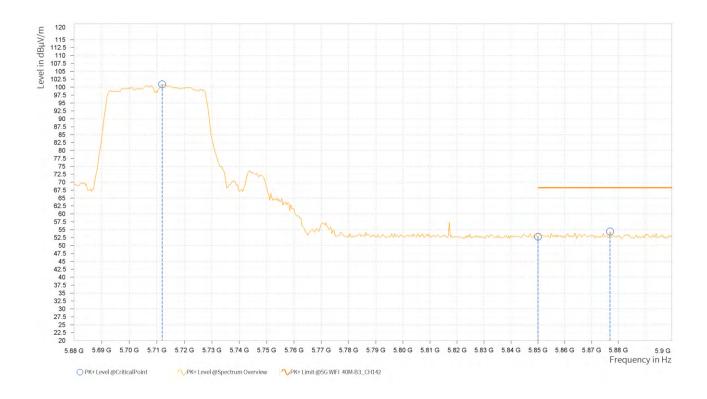



Rg	Frequency [MHz]	and the second	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,725.833	95.30			4.49	٧	212.1	1.00
8	5,850.000	52.95	68.20	15.25	5.37	V	339.2	1.00
8	5,884.233	53.47	68.20	14.73	5.45	V	235.8	2.00

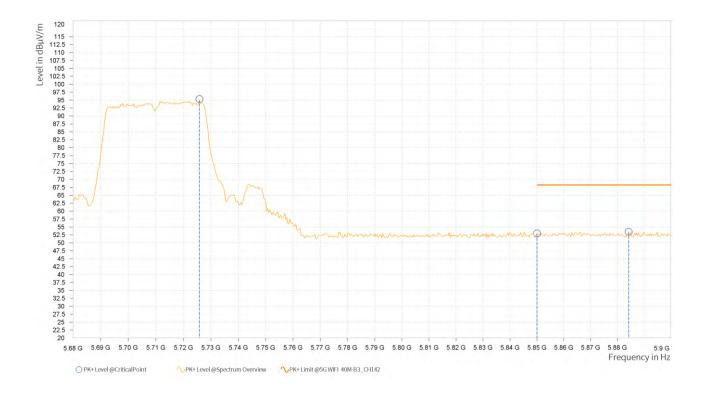

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5710MHz: Fundamental frequency.
- 3. #: Out of restricted band.




Test Report No.: PSU-NQN2311090109RF07

802.11ac (20MHz)


CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE			Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,458.350	54.97	74.00	19.03	3.76	H	1	1.00
7	5,460.000	54.97	74.00	19.03	3.76	Н	1	1.00
7	5,502.000	107.20			3.86	H	359	1.00

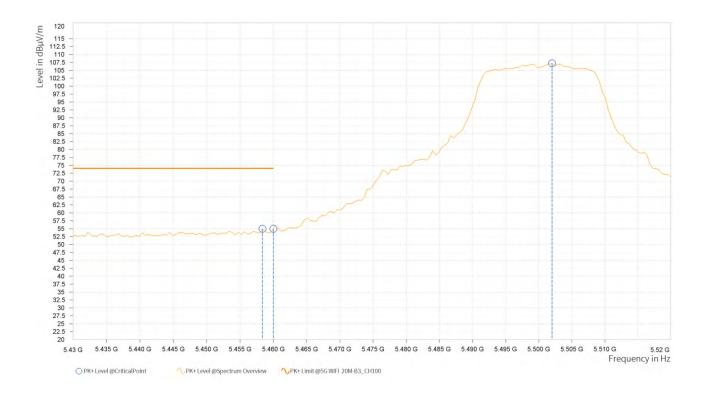




Rg	Frequency [MHz]	AVG Level [dBµV/m]		AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,459.250	40.74	54.00	13.26	3.76	Н	359	1.00
7	5,460.000	40.75	54.00	13.25	3.76	Н	359	1.00
7	5,501.100	94.59			3.86	Н	359	1.00

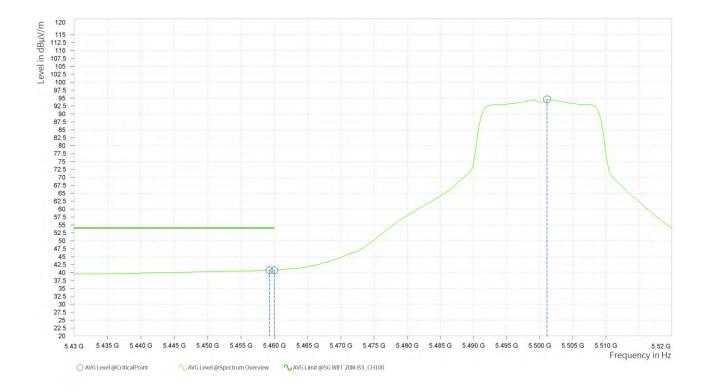




Rg		PK+ Level [dBµV/m]		PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,448.000	53.35	74.00	20.65	3.74	V	359	1.00
7	5,460.000	51.49	74.00	22.51	3.76	V	164.5	2.00
7	5,501.550	94.69			3.86	V	55.6	2.00

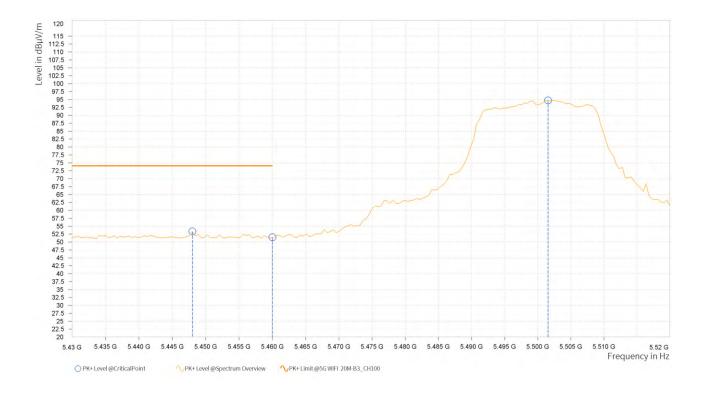



Rg	Frequency [MHz]	and the second	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,459.250	37.79	54.00	16.21	3.76	V	354.8	2.00
7	5,460.000	37.77	54.00	16.23	3.76	V	354.8	2.00
7	5,501.100	84.08	1		3.86	V	354.8	2.00

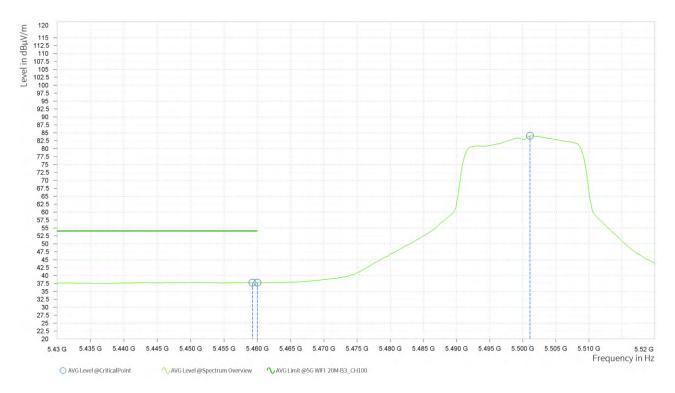


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5500MHz: Fundamental frequency.
- 3. #: Out of restricted band.




CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE			Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,443.500	54.48	74.00	19.52	13.28	Н	152.3	1.00
9	5,460.000	52.91	74.00	21.09	13.28	Н	359.1	1.00
9	5,579.000	107.81			13.39	Н	310.1	1.00

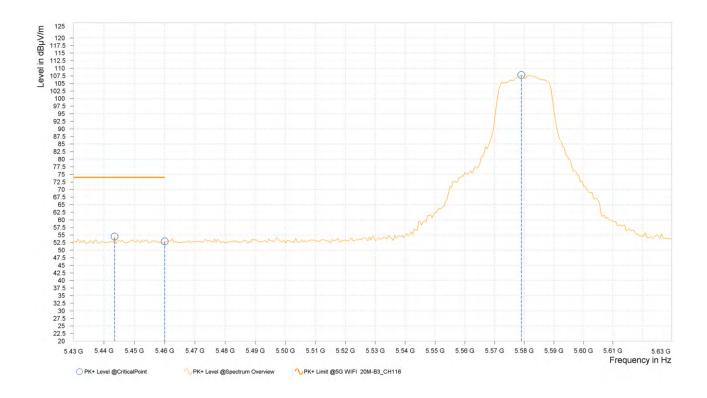




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,459.000	39.13	<mark>54.00</mark>	14.87	13.28	Н	353.4	1.00
9	5,460.000	39.08	54.00	14.92	13.28	Н	1	1.00
9	5,579.000	95.93			13.39	Н	312.5	1.00

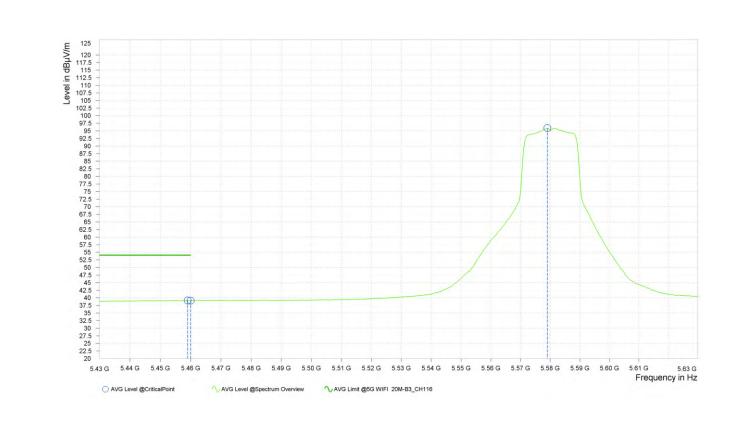




Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,438.000	<mark>54.95</mark>	74.00	19.05	13.28	V	100.9	1.00
9	5,460.000	53.07	74.00	20.93	13.28	V	0.9	2.00
9	5 <mark>,</mark> 579.000	101.35			13.39	V	48.3	1.00

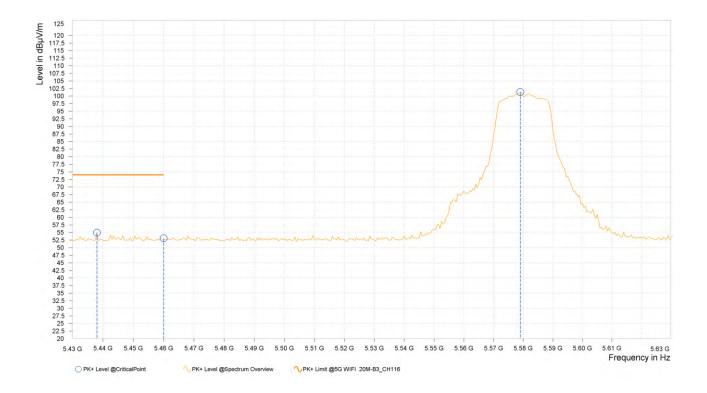



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,459.500	38.95	54.00	15.05	13.28	V	102.1	1.00
9	5,460.000	38.88	54.00	15.12	13.28	V	1	1.00
9	5,579.000	88.51			13.39	V	49.5	1.00

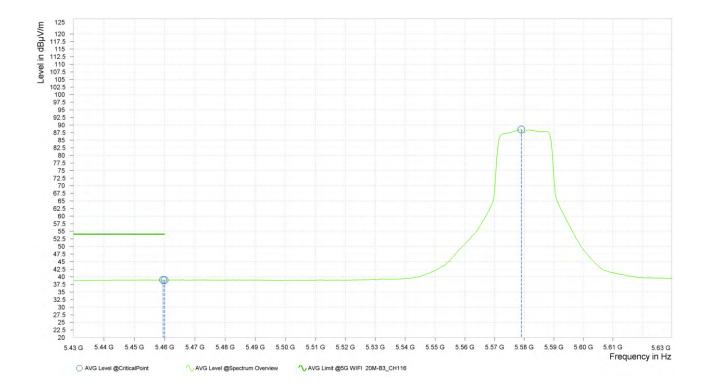


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5580MHz: Fundamental frequency.
- 3. #: Out of restricted band.



CHANNEL	TX Channel 140		Peak (PK)
FREQUENCY RANGE			Average (AV)


Rg	Frequency [MHz]	PK+ Level [dBµV/m]		PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,702.880	105.23			4.48	Н	355.4	2.00
10	5,725.000	60.01	68.20	8.19	4.49	Н	243.4	1.00
10	5,725.625	58.27	68.20	9.93	4.49	Н	291.2	1.00

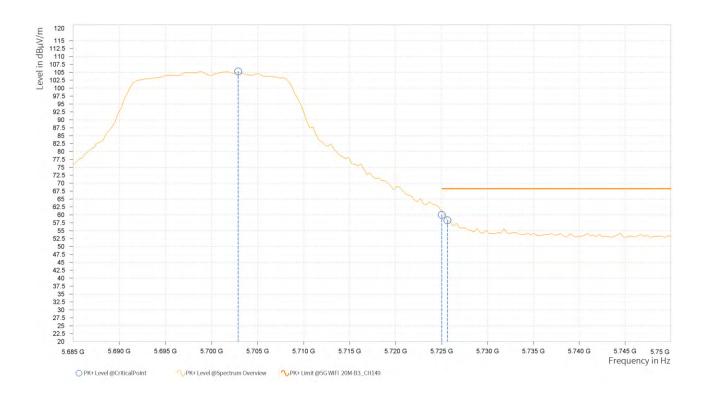



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	and the fight of the second	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,698.975	96.17			4.48	V	354.9	2.00
10	5,725.000	54,30	68.20	13,90	4.49	V	359	2.00
10	5,730.500	53.47	68.20	14.73	4.49	V	213.4	2.00

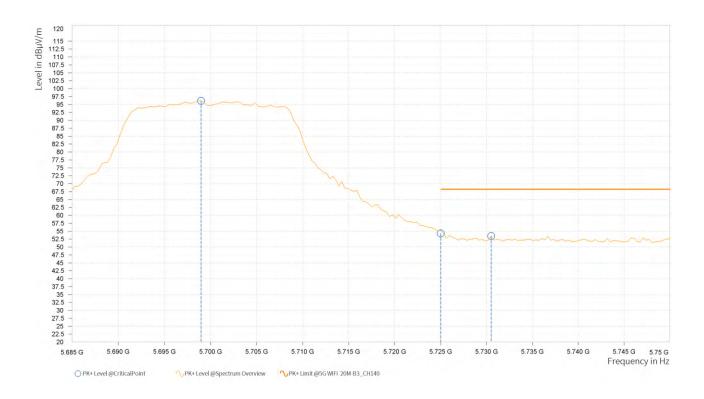


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5700MHz: Fundamental frequency.
- 3. #: Out of restricted band.




CHANNEL	TX Channel 144 DETECTOR FUNCTION	Peak (PK)	
FREQUENCY RANGE			Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBµV/m]		PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,718.500	105.70			4.49	Н	354.9	2.00
9	5,850.000	53.89	68.20	14.31	5.37	Н	18.6	2.00
9	5,860.000	55.19	68.20	13.01	5.40	Н	0.9	2.00

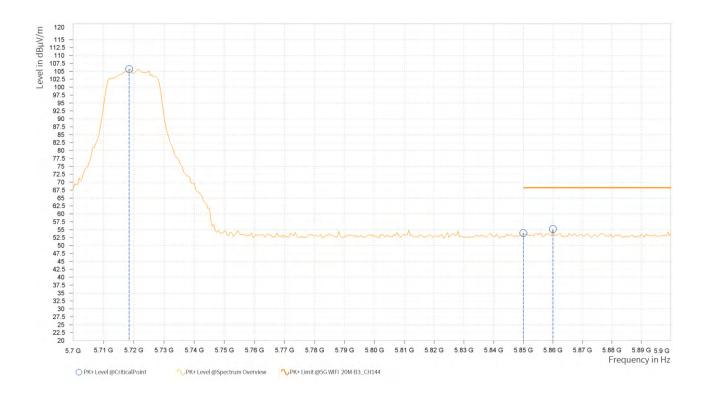



Rg	Frequency [MHz]	and the second se	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,722.000	100.85			4.49	٧	45	1.00
9	5,850.000	52.60	68.20	15.60	5.37	۷	45	1.00
9	5,851.000	53.96	68.20	14.24	5.38	V	281.6	1.00

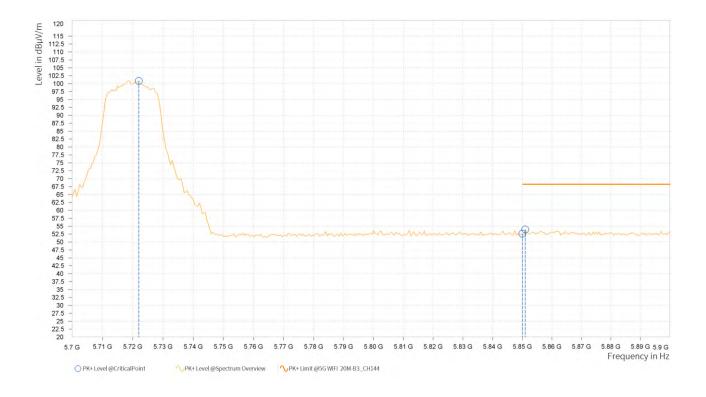

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5720MHz: Fundamental frequency.
- 3. #: Out of restricted band.




Test Report No.: PSU-NQN2311090109RF07

802.11ac (40MHz)

CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE			Average (AV)


Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,459.500	67.76	74.00	6.24	3.76	Ŧ	360	1.00
5	5,460.000	67.44	74.00	6.56	3.77	H	0.1	1.00
5	5,512.000	103.18			3.89	Н	360	1.00

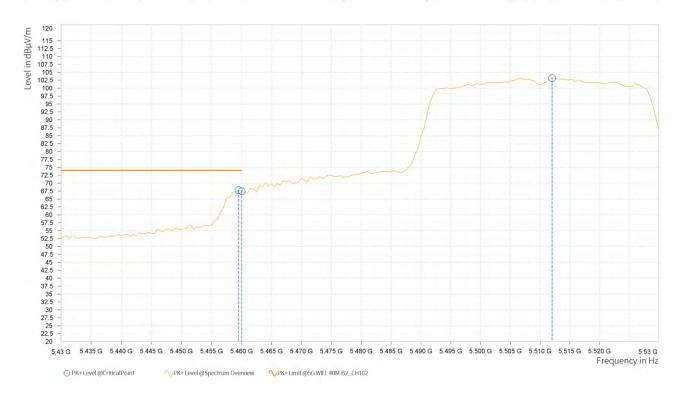




Test Report No.: PSU-NQN2311090109RF07

Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,459.500	45.71	54.00	8.29	3.76	H	4.2	1.00
5	5,460.000	46.15	54.00	7.85	3.77	Н	4.2	1.00
5	5,508.000	89.58			3.88	Н	320.2	1.00

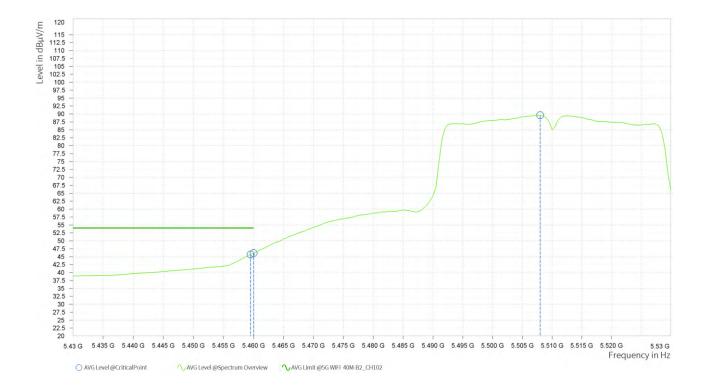




Rg	Frequency [MHz]	and the second	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,458.500	59.45	74.00	14.55	3.76	V	204.8	1.00
5	5,460.000	57.83	74.00	16.17	3.77	V	204.8	1.00
5	5,516.500	94.04			3.90	V	204.8	1.00

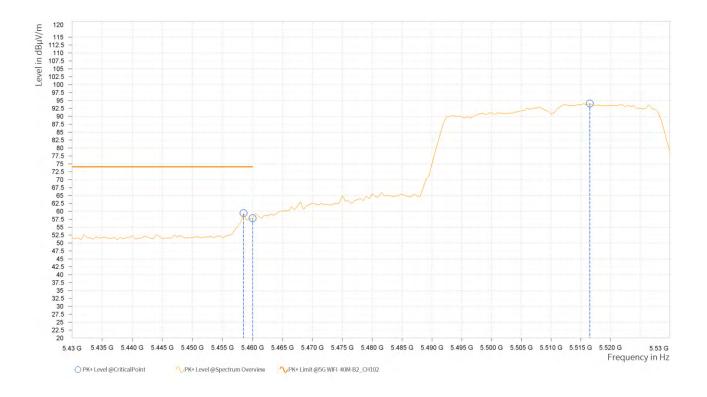



Rg	Frequency [MHz]	AVG Level [dBµV/m]		AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,459.500	40.38	54.00	13.62	3.76	٧	335.4	2.00
5	5,460.000	40.64	54.00	13.36	3.77	V	335.4	2.00
5	5,507.500	79.98			3.88	V	310.5	2.00

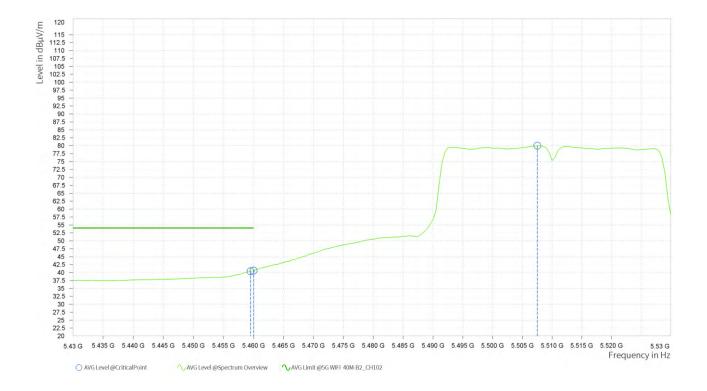


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5510MHz: Fundamental frequency.
- 3. #: Out of restricted band.




CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE			Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	and the second sec	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,442.688	51.41	74.00	22.59	3.73	H	360	1.00
6	5,460.000	50.90	74.00	23.10	3.76	Н	320.7	1.00
6	5,547.810	100.16			3.98	Н	320.7	1.00

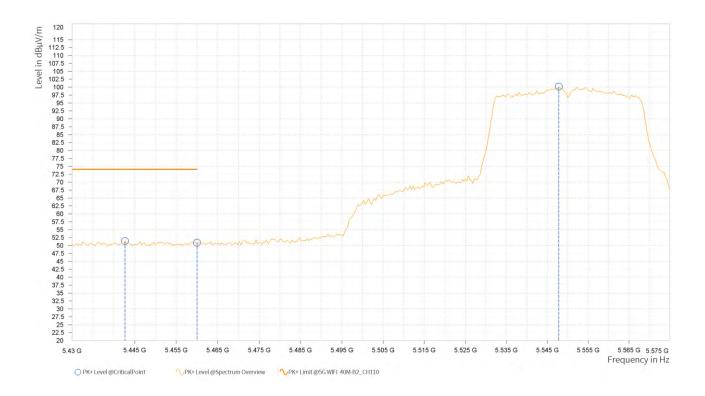




Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,449.575	38.38	54.00	15.62	3.74	H	4.2	1.00
6	5,460.000	38.35	54.00	15.65	3.76	Н	338.6	1.00
6	5,548.175	88.81			3.98	Н	360	1.00

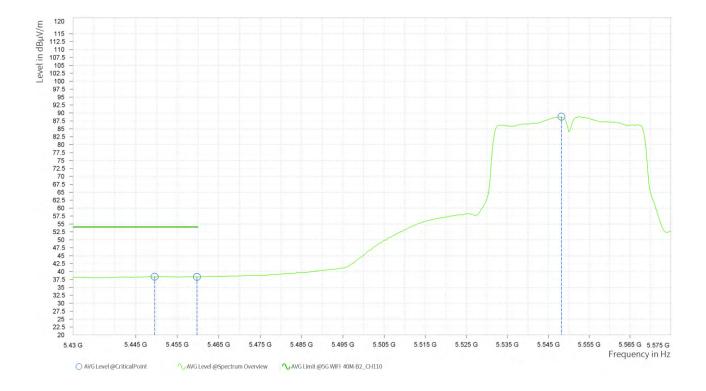




Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,712.267	97.73			4.49	V	190.6	1.00
8	5,850.000	53.10	68.20	15.10	5.37	V	228	2.00
8	5,863.700	54.52	68.20	13.68	5.40	V	0.1	2.00

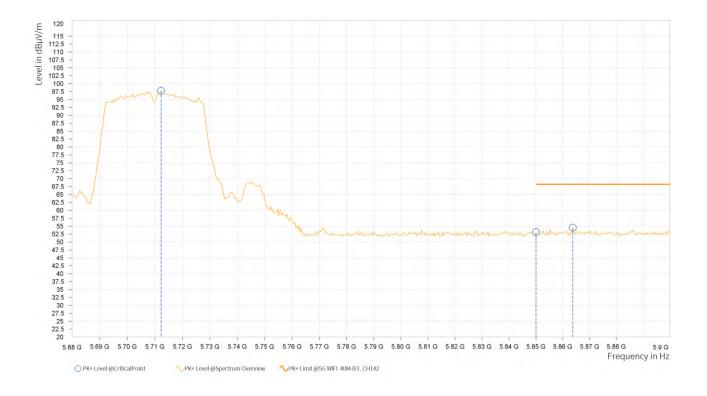



Rg	Frequency [MHz]	AVG Level [dBµV/m]	the second s	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,444.500	37.57	54.00	16.43	3.73	V	334.2	2.00
6	5,460.000	37.52	54.00	16.48	3.76	V	285.5	1.00
6	5,547.813	81.39			3.98	V	185.6	2.00

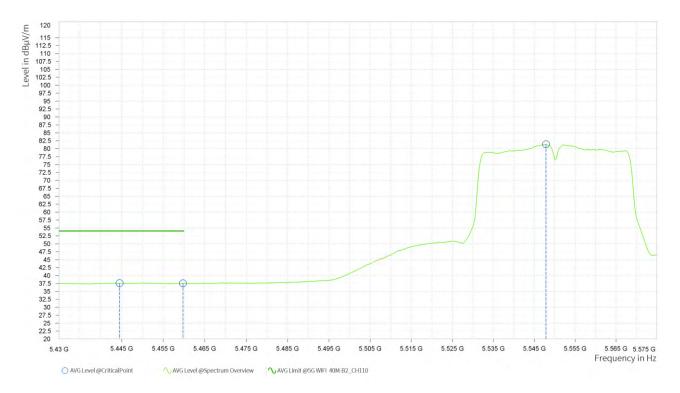


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5500MHz: Fundamental frequency.
- 3. #: Out of restricted band.




CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBµV/m]		PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,671.500	99.76			4.42	Н	4.2	1.00
7	5,725.000	55.21	68.20	12.99	4.49	Н	0.1	1.00
7	5,731.000	56.70	68.20	11.50	4.49	Н	0.1	1.00

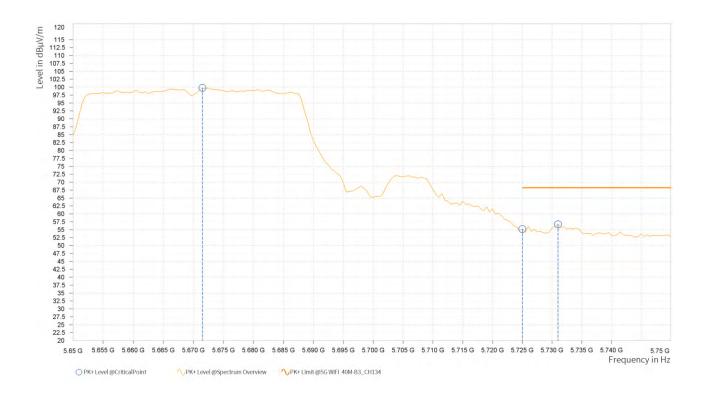



Rg	Frequency [MHz]		PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,681.500	92.92			4.44	V	191.1	1.00
7	5,725.000	52.76	68.20	15.44	4.49	V	75.1	2.00
7	5,726.000	53.16	68.20	15.04	4.49	V	351.6	2.00

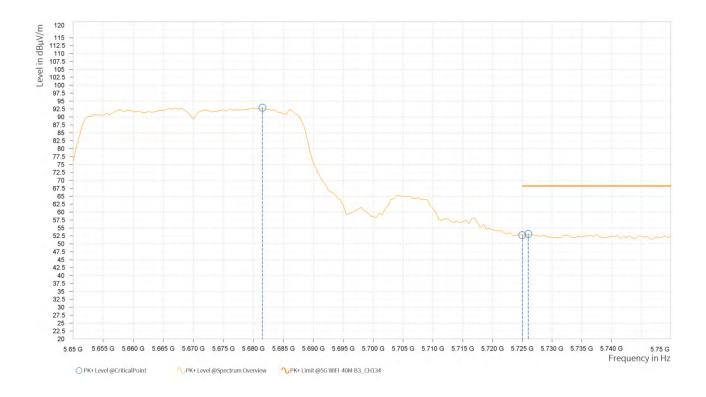


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5670MHz: Fundamental frequency.
- 3. #: Out of restricted band.




CHANNEL	TX Channel 142	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE			Average (AV)

Rg	Frequency [MHz]	the second second second second second	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,707.870	100.68			4.49	H	0.1	1.00
8	5,850.133	52.52	68.20	15.68	5.37	Н	359.9	2.00
8	5,881.667	54.08	68.20	14.12	5.44	Н	135.4	2.00

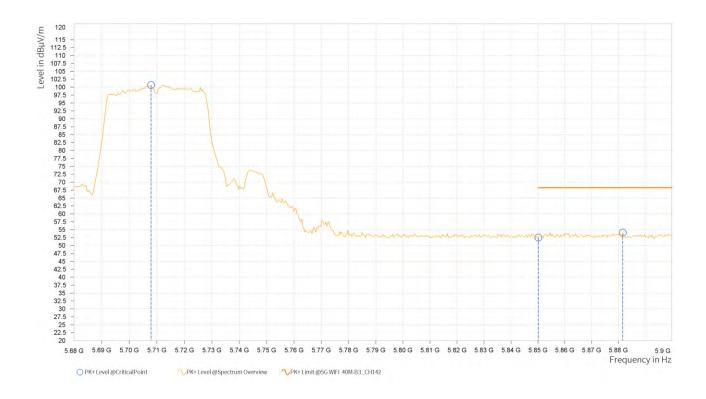



Rg	Frequency [MHz]	PK+ Level [dBµV/m]		PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,712.633	94.53			4.49	V	188.7	1.00
8	5,850.000	51.95	68.20	16.25	5.37	V	121	2.00
8	5,864.433	54.17	68.20	14.03	5.41	V	332	1.00

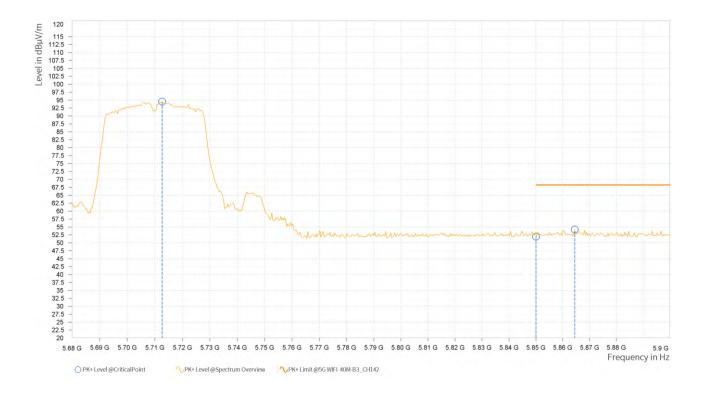

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5710MHz: Fundamental frequency.
- 3. #: Out of restricted band.




Test Report No.: PSU-NQN2311090109RF07

802.11ac (80MHz)


CHANNEL	TX Channel 106	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE			Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBμV/m]		PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,458.500	66.68	74.00	7.32	13.28	Н	359	1.00
3	5,460.000	66.13	74.00	7.87	13.28	Н	305.4	1.00
3	5,522.000	97.06			13.34	Н	1	1.00

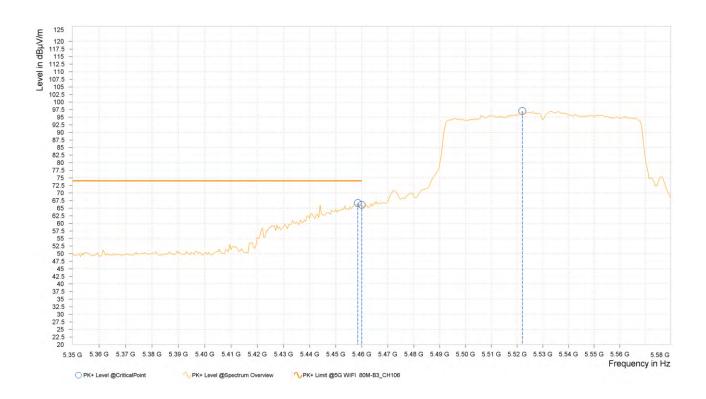




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,459.000	50.46	54.00	3.54	13.28	Н	359.1	1.00
3	5,460.000	50.26	54.00	3.74	13.28	Н	357.7	1.00
3	5,523.500	82.99			13.34	Н	357.7	1.00

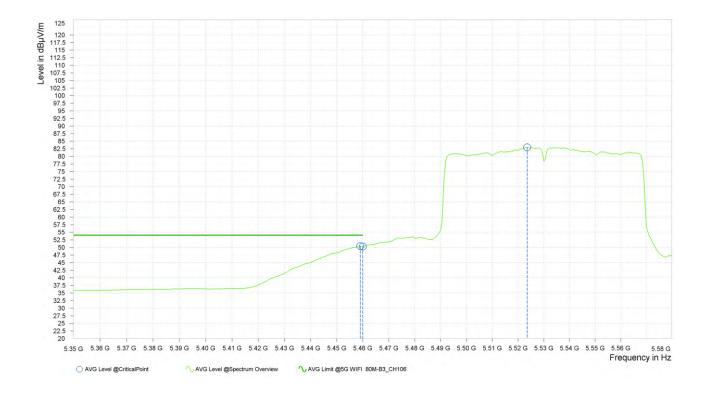




Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,443.000	<mark>61.72</mark>	74.00	12.28	13.28	V	215.7	1.00
3	5,460.000	59.28	74.00	14.72	13.28	V	56.7	1.00
3	5,536.000	92.12			13.36	V	215.7	1.00

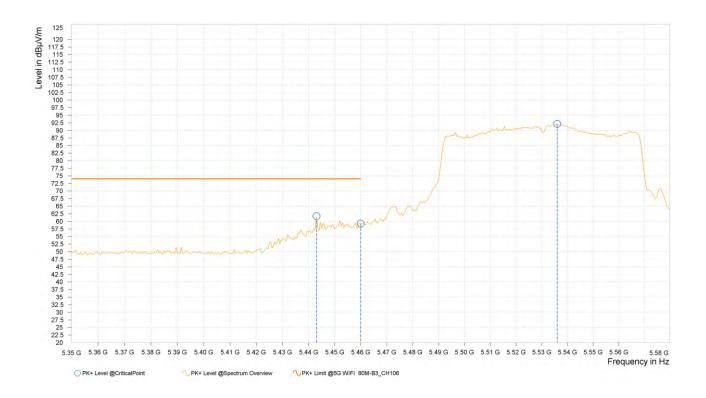



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,459.500	44.99	54.00	9.01	13.28	V	202.6	1.00
3	5,460.000	45.03	54.00	8.97	13.28	V	202.6	1.00
3	5,536.500	77.56			13.36	V	202.6	1.00

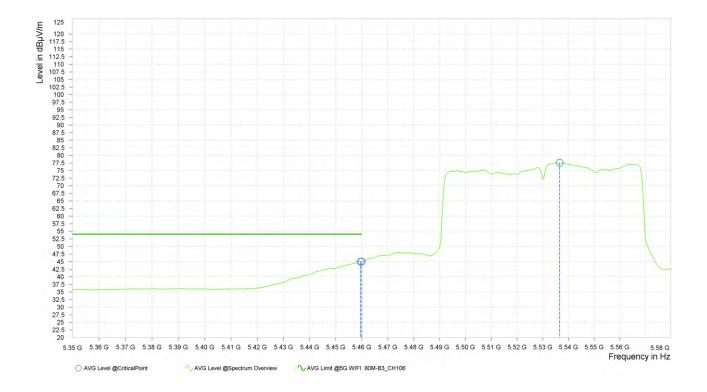


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5530MHz: Fundamental frequency.
- 3. #: Out of restricted band.




CHANNEL	TX Channel 122	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE			Average (AV)

Rg	Frequency [MHz]		PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,602.000	100.52			13.47	Н	359.1	1.00
4	5,725.000	55.54	68.20	12.66	14.01	Н	356.4	1.00
4	5,726.000	56.03	68.20	12.17	14.01	Н	356.4	1.00

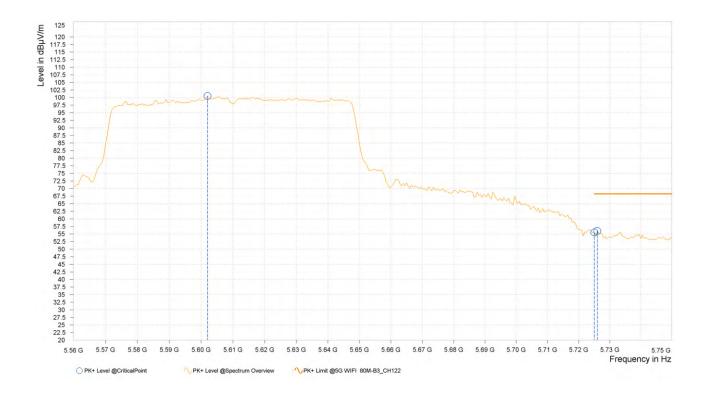



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,630.000	93.36			13.62	V	102.1	1.00
4	5,725.000	53.33	68.20	14.87	14.01	V	157.1	1.00
4	5,749.000	54.26	68.20	13.94	14.03	V	157.1	1.00

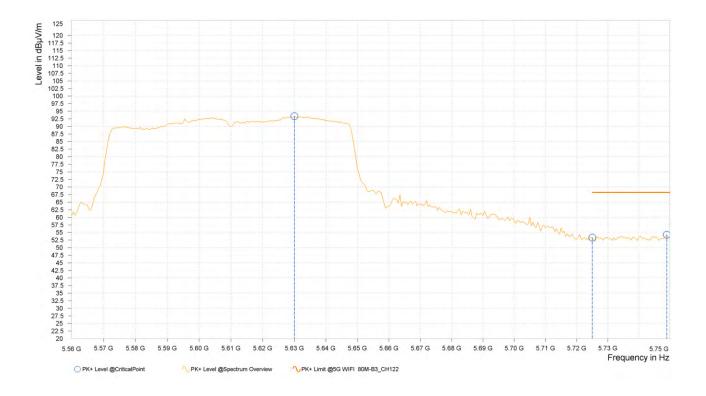

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5610MHz: Fundamental frequency.
- 3. #: Out of restricted band.



CHANNEL	TX Channel 138	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,681.500	101.14			13.89	Н	359	1.00
5	5,850.000	53.15	68.20	15.05	14.28	Н	263.5	1.00
5	5,852.000	55.67	68.20	12.53	14.29	Н	4.7	2.00

