



Test Report No.: PSU-NQN2311090109RF04



Certificate #6613.01

FCC TEST REPORT (PART 27)

Applicant:	HMD Global Oy
Address:	Bertel Jungin aukio 9 Espoo 02600 Finland

Manufacturer or Supplier:	HMD Global Oy
Address:	Bertel Jungin aukio 9 Espoo 02600 Finland
Product:	Smart Phone
Brand Name:	HMD
Model Name:	N159V
FCC ID:	2AJOTTA-1590
Date of tests:	Jan. 02, 2024 ~ Jan. 30, 2024

The tests have been carried out according to the requirements of the following standard:

- FCC Part 27 ANSI/TIA/EIA-603-D
- FCC Part 2 ANSI/TIA/EIA-603-E ANSI C63.26-2015

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
 Date: Jan. 30, 2024	 Date: Jan. 30, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	6
1.2 TEST SITE AND INSTRUMENTS	7
2 GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 CONFIGURATION OF SYSTEM UNDER TEST	13
2.3 DESCRIPTION OF SUPPORT UNITS	14
2.4 TEST ITEM AND TEST CONFIGURATION	14
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	18
3 TEST TYPES AND RESULTS	19
3.1 OUTPUT POWER MEASUREMENT	19
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	19
3.1.2 TEST PROCEDURES	19
3.1.3 TEST SETUP	20
3.1.4 TEST RESULTS	21
3.2 FREQUENCY STABILITY MEASUREMENT	42
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	42
3.2.2 TEST PROCEDURE	42
3.2.3 TEST SETUP	42
3.2.4 TEST RESULTS	43
3.3 OCCUPIED BANDWIDTH MEASUREMENT	44
3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	44
3.3.2 TEST SETUP	44
3.3.3 TEST PROCEDURES	44
3.3.4 TEST RESULTS	45
3.4 BAND EDGE MEASUREMENT	46
3.4.1 LIMITS OF BAND EDGE MEASUREMENT	46
3.4.2 TEST SETUP	46
3.4.3 TEST PROCEDURES	47
3.4.4 TEST RESULTS	48
3.5 CONDUCTED SPURIOUS EMISSIONS	49
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	49
3.5.2 TEST PROCEDURE	49
3.5.3 TEST SETUP	49
3.5.4 TEST RESULTS	50
3.6 RADIATED EMISSION MEASUREMENT	51
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	51
3.6.2 TEST PROCEDURES	51
3.6.3 DEVIATION FROM TEST STANDARD	51
3.6.4 TEST SETUP	52
3.6.5 TEST RESULTS	54
3.7 PEAK TO AVERAGE RATIO	72
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	72
3.7.2 TEST SETUP	72
3.7.3 TEST PROCEDURES	72
3.7.4 TEST RESULTS	73
4 INFORMATION ON THE TESTING LABORATORIES	74
5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB...	75



BUREAU
VERITAS

Test Report No.: PSU-NQN2311090109RF04

6 APPENDIX 76

LTE BAND66(INCLUDE LTE B4) 76

PEAK-TO-AVERAGE RATIO(CCDF) 76

 TEST RESULT 76

 TEST GRAPHS 77

26DB BANDWIDTH AND OCCUPIED BANDWIDTH 86

 TEST RESULT 86

BAND EDGE 142

 TEST RESULT 142

 TEST GRAPHS 143

CONDUCTED SPURIOUS EMISSION 180

 TEST RESULT 180

 TEST GRAPHS 182

FREQUENCY STABILITY 210

 TEST RESULT 210



Test Report No.: PSU-NQN2311090109RF04

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
PSU-NQN2311090109RF04	Original release	Jan. 30, 2024



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 27 & PART 2			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	TEST LAB*
§2.1046	Conducted Output Power	Compliance	A
§27.50(d)(4) §27.50(h)(2)	Equivalent Isotropically Radiated Power (Band 4) (Band 66)	Compliance	A
§2.1055 §27.54	Frequency Stability	Compliance	A
§2.1049	Occupied Bandwidth	Compliance	A
§2.1051 §27.53(h) §27.53(m)(4)(6)	Conducted Band Edge Measurements (Band 4) (Band 66)	Compliance	A
§2.1051 §27.53(h) §27.53(m)(4)(6)	Conducted Spurious Emissions (Band 4) (Band 66)	Compliance	A
§2.1053 §27.53(h) §27.53(m)(4)(6)	Radiated Spurious Emissions (Band 4) (Band 66)	Compliance	A
§27.50(k)(4)	Peak to average ratio	Compliance	A

***Test Lab Information Reference**

Lab A:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zhuyi Road, High-tech District, Suzhou City, Anhui Province

Accredited Test Lab Cert 6613.01

The FCC Site Registration No. is 434559; The Designation No. is CN1325.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	±76.97Hz
Radiated emissions (9KHz~30MHz)	±2.68dB
Radiated emissions & Radiated Power (30MHz~1GHz)	±4.98dB
Radiated emissions & Radiated Power (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Band Edge Measurements	±4.70dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2311090109RF04

1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,22	Aug.29,24
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Vector Signal Generator	R&S	SMBV100B	102176	Feb.16,22	Feb.15,24
Signal Generator	R&S	SMB100A	182185	Feb.16,22	Feb.15,24
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-E MC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-E MC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESR26	101734	Feb.25,22	Feb.24,24
EMI TEST Receiver	R&S	ESW44	101973	Feb.25,22	Feb.24,24
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.28,22	Feb.27,24
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,22	Aug.21,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.23,22	Feb.22,24
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.22,22	Aug.21,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,22	Feb.22,24
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.27,22	Jun.26,24
Test Software	EMC32	EMC32	N/A	N/A	N/A
6DB attenuator	Tonscend Technology Co., Ltd	N/A	23062787	N/A	N/A
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	Oct.01,22	Sep.30,24
DC Source	HYELEC	HY3010B	551016	Aug.31,22	Aug.30,24
Hygrothermograph	DELI	20210528	SZ014	Sep.06,22	Sep.05,24
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Oct.27,23	Apr.26,24
CABLE	R&S	W12.14	N/A	Oct.27,23	Apr.26,24
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Oct.27,23	Apr.26,24
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Oct.27,23	Apr.26,24



Test Report No.: PSU-NQN2311090109RF04

NOTE:

1. The calibration interval of the above test instruments is 12 months or 24 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GREGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 434559; The Designation No. is CN1325.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT*	Smartphone		
BRAND NAME*	HMD		
MODEL NAME*	N159V		
NOMINAL VOLTAGE*	5.0Vdc (adapter) 3.87Vdc (battery)		
MODULATION TECHNOLOGY*	LTE	QPSK, 16QAM, 64QAM	
FREQUENCY RANGE	LTE Band 4 Channel Bandwidth: 1.4MHz	1710.7MHz ~ 1754.3MHz	
	LTE Band 4 Channel Bandwidth: 3MHz	1711.5MHz ~ 1753.5MHz	
	LTE Band 4 Channel Bandwidth: 5MHz	1712.5MHz ~ 1752.5MHz	
	LTE Band 4 Channel Bandwidth: 10MHz	1715MHz ~ 1750MHz	
	LTE Band 4 Channel Bandwidth: 15MHz	1717.5MHz ~ 1747.5 MHz	
	LTE Band 4 Channel Bandwidth: 20MHz	1720MHz ~ 1745MHz	
	LTE Band 66 Channel Bandwidth: 1.4MHz	1710.7MHz ~ 1779.3MHz	
	LTE Band 66 Channel Bandwidth: 3MHz	1711.5MHz ~ 1778.5MHz	
	LTE Band 66 Channel Bandwidth: 5MHz	1712.5MHz ~ 1777.5MHz	
	LTE Band 66 Channel Bandwidth: 10MHz	1715MHz ~ 1775MHz	
	LTE Band 66 Channel Bandwidth: 15MHz	1717.5MHz ~ 1772.5MHz	
	LTE Band 66 Channel Bandwidth: 20MHz	1720MHz ~ 1770MHz	
	MAX. EIRP POWER	LTE Band 4 Channel Bandwidth: 1.4MHz	107.89mW
		LTE Band 4 Channel Bandwidth: 3MHz	109.14mW
LTE Band 4 Channel Bandwidth: 5MHz		108.64mW	
LTE Band 4 Channel Bandwidth: 10MHz		108.89mW	
LTE Band 4 Channel Bandwidth: 15MHz		107.15mW	



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2311090109RF04

	LTE Band 4 Channel Bandwidth: 20MHz	110.66mW	
	LTE Band 66 Channel Bandwidth: 1.4MHz	110.92mW	
	LTE Band 66 Channel Bandwidth: 3MHz	111.17mW	
	LTE Band 66 Channel Bandwidth: 5MHz	109.65mW	
	LTE Band 66 Channel Bandwidth: 10MHz	111.94mW	
	LTE Band 66 Channel Bandwidth: 15MHz	110.92mW	
	LTE Band 66 Channel Bandwidth: 20MHz	113.5mW	
EMISSION DESIGNATOR	LTE Band 66 Channel Bandwidth: 1.4MHz	QPSK: 1M09G7D	
		16QAM: 1M09W7D	
		64QAM: 1M10W7D	
	LTE Band 66 Channel Bandwidth: 3MHz	QPSK: 2M70G7D	
		16QAM: 2M69W7D	
		64QAM: 2M69W7D	
	LTE Band 66 Channel Bandwidth: 5MHz	QPSK: 4M49G7D	
		16QAM: 4M49W7D	
		64QAM: 4M49W7D	
	LTE Band 66 Channel Bandwidth: 10MHz	QPSK: 8M96G7D	
		16QAM: 8M95W7D	
		64QAM: 8M95W7D	
	LTE Band 66 Channel Bandwidth: 15MHz	QPSK: 13M5G7D	
		16QAM: 13M5W7D	
		64QAM: 13M5W7D	
	LTE Band 66 Channel Bandwidth: 20MHz	QPSK: 17M9G7D	
		16QAM: 17M9W7D	
		64QAM: 17M9W7D	
	ANTENNA TYPE*	PIFA Antenna with -2.9dBi gain for LTE B4/ LTE B66	
	HW VERSION*	V 1.0	
	SW VERSION*	02US_0_101	
	I/O PORTS*	Refer to user's manual	



BUREAU
VERITAS

Test Report No.: PSU-NQN2311090109RF04

CABLE SUPPLIED*	USB cable1: non-shielded cable, with w/o ferrite core, 1.0 meter USB cable2: non-shielded cable, with w/o ferrite core, 1.0 meter
EXTREME TEMPERATURE*	-20-60 °C
EXTREME VOLTAGE*	3.6V - 4.45V

NOTE:

- *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
LTE	1TX/1RX

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
- For the product of N159V(FCC ID 2AJOTTA-1590), the following components are different between the first and second supply, other parameters are the same.

Component	First supply		Second supply		
	Supplier	specificatons	Supplier	specificatons	
PCBA	3GB LPDDR	Longsys	3GB	biwin	3GB
	64GB EMMC	Longsys	64GB	biwin	64GB
	Charger IC	SGMICRO	3.78A Single Cell Switching Battery Charger IC	Unisemi	3.78A Single Cell Switching Battery Charger IC
LCM	LCD	TCL	LCD a-Si TFT;720*1612	icetron	LCD a-Si TFT;720*1612
Front camera	Camera	Union Image	5M;FF	Imaging	5M;FF
CAM	Camera	Union Image	13 AF	Sunwin	13 AF
	Camera	SEGA	2M	Imaging	2M
Acoustic	Vibrator	KunWang	0830	HONGZHIFA	0830
	FPC	XINYE	Speaker FPC: 32.1*11.46*0.15	Lat	Speaker FPC: 32.1*11.46*0.15
LED		Runlite	White LED;500mA;1500mA	latticepower	White LED;500mA;1500mA
Battery		gaoyuan	4000mAh;3.87V;4.45V	highpower	4000mAh;3.87V;4.45V
antenna		Haitong	Omni-directional, Linear, antenna shrapnel	Kexinhuacheng	Omni-directional, Linear, antenna shrapnel
MIC		Gettop	L2.75xW1.85xH0.9 mm	goertek	L2.75xW1.85xH0.9 mm
Data cable		Saibao	5V2A	TorchWay	5V2A







**BUREAU
VERITAS**

Test Report No.: PSU-NQN2311090109RF04

List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
Battery 1	Gaoyuan	N/A	CH426385	Power Rating: 15.48Wh
Battery 2	Highpower	N/A	CH426385	Power Rating: 15.48Wh
AC Adapter	BaiJunDa	BaiJunDa	HAD-010U	I/P: 100-240Vac, O/P: 4.8~5.4Vdc, 2.0A
USB Cable 1	Saibao	N/A	SZN-A036A	Signal Line, 1.0meter 5V 2A
USB Cable 2	TorchWay	N/A	JWUB1651-ZN01H	Signal Line, 1.0meter 5V 2A

2.2 CONFIGURATION OF SYSTEM UNDER TEST FOR RADIATION EMISSION TEST

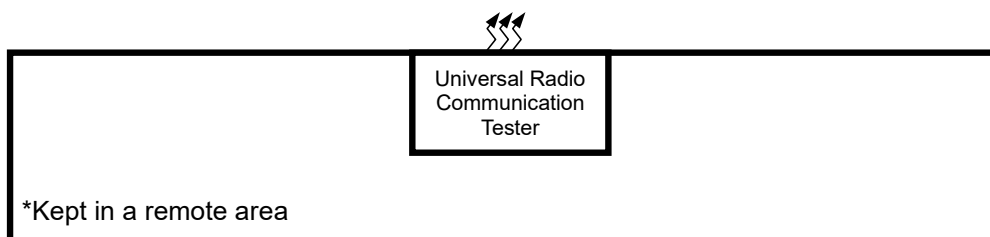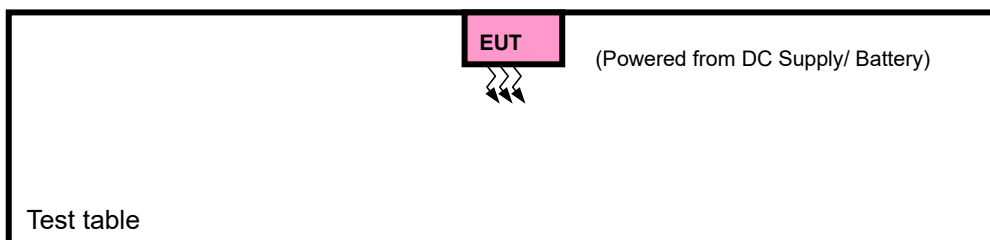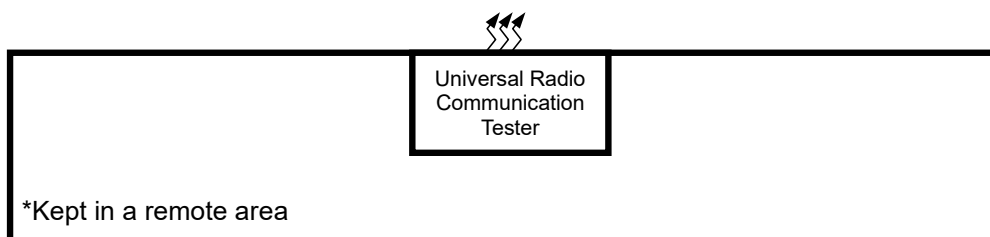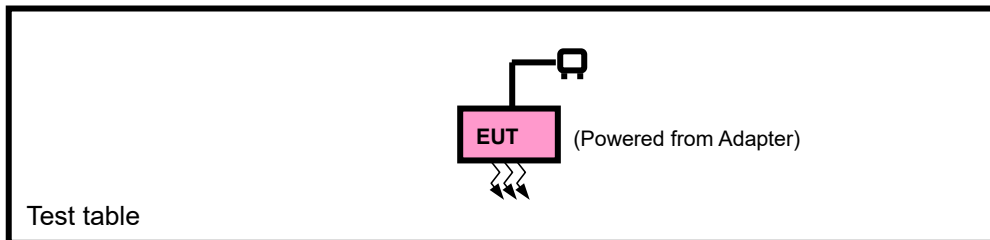

2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC Source	HYELEC	HY3010B	551016	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + USB Cable with LTE link
B	EUT + DC Supply with LTE link

LTE BAND 4 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset

Note: 1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

2. LTE Band 4 are covered by LTE Band 66, Because it is a subset of LTE Band 66 with the same output power and supported bandwidths, So the conducted test data and RSE test data please refer to LTE Band 66.



Test Report No.: PSU-NQN2311090109RF04

LTE BAND 66 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	131979 to 132665	131979,132322,132665	1.4MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		131987 to 132657	131987,132322,132657	3MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		131997 to 132647	131997,132322,132647	5MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		132022 to 132622	132022,132322,132622	10MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		132047 to 132597	132047,132322,132597	15MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		132072 to 132572	132072,132322,132572	20MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	131979 to 132665	131979,132322,132665	1.4MHz	QPSK,16QAM,64QAM	6 RB / 0 RB Offset
		131987 to 132657	131987,132322,132657	3MHz	QPSK,16QAM,64QAM	15 RB / 0 RB Offset
		131997 to 132647	131997,132322,132647	5MHz	QPSK,16QAM,64QAM	25 RB / 0 RB Offset
		132022 to 132622	132022,132322,132622	10MHz	QPSK,16QAM,64QAM	50 RB / 0 RB Offset
		132047 to 132597	132047,132322,132597	15MHz	QPSK,16QAM,64QAM	75 RB / 0 RB Offset
		132072 to 132572	132072,132322,132572	20MHz	QPSK,16QAM,64QAM	100 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	131979 to 132665	131979,132322,132665	1.4MHz	QPSK,16QAM,64QAM	6 RB / 0 RB Offset
		131987 to 132657	131987,132322,132657	3MHz	QPSK,16QAM,64QAM	15 RB / 0 RB Offset
		131997 to 132647	131997,132322,132647	5MHz	QPSK,16QAM,64QAM	25 RB / 0 RB Offset
		132022 to 132622	132022,132322,132622	10MHz	QPSK,16QAM,64QAM	50 RB / 0 RB Offset
		132047 to 132597	132047,132322,132597	15MHz	QPSK,16QAM,64QAM	75 RB / 0 RB Offset
		132072 to 132572	132072,132322,132572	20MHz	QPSK,16QAM,64QAM	100 RB / 0 RB Offset
A	BAND EDGE	131979 to 132322	131979	1.4MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 6 RB / 0 RB Offset
			132322	1.4MHz	QPSK,16QAM, 64QAM	1 RB / 5 RB Offset 6 RB / 0 RB Offset
		131987 to 132657	131987	3MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 15 RB / 0 RB Offset
			132657	3MHz	QPSK,16QAM, 64QAM	1 RB / 14 RB Offset 15 RB / 0 RB Offset
		131997 to 132647	131997	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			132647	5MHz	QPSK,16QAM, 64QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		132022 to 132622	132022	10MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
			132622	10MHz	QPSK,16QAM, 64QAM	1 RB / 49 RB Offset 50 RB / 0 RB Offset
		132047 to 132597	132047	15MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 75 RB / 0 RB Offset
			132597	15MHz	QPSK,16QAM, 64QAM	1 RB / 74 RB Offset 75 RB / 0 RB Offset
		132072 to 132572	132072	20MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 100 RB / 0 RB Offset
			132572	20MHz	QPSK,16QAM, 64QAM	1 RB / 99 RB Offset 100 RB / 0 RB Offset



Test Report No.: PSU-NQN2311090109RF04

A	CONDCUDED EMISSION	131979 to 132665	131979,132322,132665	1.4MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		131987 to 132657	131987,132322,132657	3MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		131997 to 132647	131997,132322,132647	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		132022 to 132622	132022,132322,132622	10MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		132047 to 132597	132047,132322,132597	15MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		132072 to 132572	132072,132322,132572	20MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	131979 to 132665	132322	1.4MHz	QPSK	1 RB / 0 RB Offset
		131987 to 132657	132322	3MHz	QPSK	1 RB / 0 RB Offset
		131997 to 132647	132322	5MHz	QPSK	1 RB / 0 RB Offset
		132022 to 132622	132022,132322,132622	10MHz	QPSK	1 RB / 0 RB Offset
		132047 to 132597	132322	15MHz	QPSK	1 RB / 0 RB Offset
		132072 to 132572	132322	20MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



Test Report No.: PSU-NQN2311090109RF04

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP&EIRP	23deg. C, 70%RH	DC 5V By Adapter	Hanwen Xu
FREQUENCY STABILITY	23deg. C, 70%RH	DC 3.85V By DC Supply	Hanwen Xu
OCCUPIED BANDWIDTH	23deg. C, 70%RH	DC5V By Adapter	Hanwen Xu
BAND EDGE	23deg. C, 70%RH	DC 5V By Adapter	Hanwen Xu
CONDCUDED EMISSION	23deg. C, 70%RH	DC5V By Adapter	Hanwen Xu
RADIATED EMISSION	23deg. C, 70%RH	DC5V By Adapter	Hanwen Xu
PEAK TO AVERAGE RATIO	23deg. C, 70%RH	DC5V By Adapter	Hanwen Xu



Test Report No.: PSU-NQN2311090109RF04

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “User stations are limited to 2 watts” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP

According to the specific rule Part 27.50 (k)(3) Mobile devices are limited to 1Watt (30 dBm) EIRP, Mobile devices operating inl these bands must employ a means for limiting power to the minimum necessary for successful communications

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_{T} = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_{C} = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

CONDUCTED POWER MEASUREMENT:


- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



Test Report No.: PSU-NQN2311090109RF04

3.1.3 TEST SETUP

CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.4 TEST RESULTS

AVERAGE CONDUCTED OUTPUT POWER (dBm)

LTE Band 4

Band/BW	Modulation	RB Size	RB Offset	Low CH 19957	Mid CH 20175	High CH 20393
				Frequency 1710.7 MHz	Frequency 1732.5 MHz	Frequency 1754.3 MHz
4/ 1.4	QPSK	1	0	23.05	23.06	23.03
		1	2	23.12	23.04	23.23
		1	5	23.08	23.18	23.22
		3	0	23.09	23.05	23.01
		3	1	23.02	23.20	23.08
		3	3	23.05	23.17	23.22
		6	0	22.20	22.16	22.22
	16QAM	1	0	22.41	22.26	22.45
		1	2	22.42	22.54	22.70
		1	5	22.38	22.36	22.73
		3	0	22.07	22.58	22.05
		3	1	22.23	22.09	22.10
		3	3	22.10	22.04	22.25
		6	0	21.32	21.27	21.25
	64QAM	1	0	21.32	21.32	21.08
		1	2	21.41	21.43	21.15
		1	5	21.46	21.46	21.34
		3	0	21.03	21.03	21.04
		3	1	21.10	21.12	21.01
		3	3	21.17	21.09	21.26
		6	0	20.23	20.22	20.31

Band/BW	Modulation	RB Size	RB Offset	Low CH 19965	Mid CH 20175	High CH 20385
				Frequency 1711.5 MHz	Frequency 1732.5 MHz	Frequency 1753.5 MHz
4/3	QPSK	1	0	23.04	23.07	23.04
		1	7	23.08	23.10	23.24
		1	14	23.18	23.22	23.28
		8	0	22.11	22.06	22.16
		8	3	22.13	22.28	22.23
		8	7	22.25	22.23	22.27
		15	0	22.22	22.17	22.25
	16QAM	1	0	22.41	22.17	22.45
		1	7	22.43	22.52	22.68
		1	14	22.39	22.47	22.79
		8	0	21.25	21.80	21.22
		8	3	21.26	21.25	21.25
		8	7	21.28	21.24	21.30
		15	0	21.30	21.15	21.29
	64QAM	1	0	21.45	21.34	21.14
		1	7	21.47	21.43	21.09
		1	14	21.43	21.50	21.32
		8	0	20.24	20.10	20.20
		8	3	20.31	20.14	20.18
		8	7	20.28	20.29	20.41
		15	0	20.28	20.10	20.34



Test Report No.: PSU-NQN2311090109RF04

Band/BW	Modulation	RB Size	RB Offset	Low CH 19975	Mid CH 20175	High CH 20375
				Frequency 1712.5 MHz	Frequency 1732.5 MHz	Frequency 1752.5 MHz
4/ 5	QPSK	1	0	23.14	23.01	23.06
		1	12	23.11	23.08	23.18
		1	24	23.18	23.18	23.26
		12	0	22.13	22.16	22.17
		12	6	22.16	22.22	22.20
		12	13	22.19	22.33	22.39
		25	0	22.22	22.21	22.19
	16QAM	1	0	22.40	22.15	22.34
		1	12	22.50	22.46	22.62
		1	24	22.41	22.42	22.75
		12	0	21.28	21.78	21.14
		12	6	21.24	21.27	21.21
		12	13	21.29	21.18	21.26
		25	0	21.21	21.14	21.22
	64QAM	1	0	21.34	21.43	21.09
		1	12	21.49	21.52	21.19
		1	24	21.43	21.48	21.32
		12	0	20.13	20.16	20.15
		12	6	20.29	20.27	20.11
		12	13	20.26	20.27	20.27
		25	0	20.23	20.19	20.22

Band/BW	Modulation	RB Size	RB Offset	Low CH 20000	Mid CH 20175	High CH 20350
				Frequency 1715 MHz	Frequency 1732.5 MHz	Frequency 1750 MHz
4/ 10	QPSK	1	0	23.03	23.07	23.04
		1	24	23.10	23.11	23.12
		1	49	23.14	23.13	23.27
		25	0	22.13	22.15	22.07
		25	12	22.12	22.30	22.22
		25	25	22.19	22.31	22.34
		50	0	22.17	22.15	22.20
	16QAM	1	0	22.43	22.21	22.37
		1	24	22.37	22.43	22.69
		1	49	22.32	22.45	22.80
		25	0	21.16	21.75	21.22
		25	12	21.24	21.26	21.11
		25	25	21.21	21.29	21.25
		50	0	21.27	21.27	21.18
	64QAM	1	0	21.36	21.33	21.13
		1	24	21.52	21.46	21.12
		1	49	21.46	21.56	21.33
		25	0	20.17	20.08	20.21
		25	12	20.31	20.22	20.21
		25	25	20.33	20.33	20.41
		50	0	20.24	20.16	20.20

Band/BW	Modulation	RB Size	RB Offset	Low CH 20025	Mid CH 20175	High CH 20325
				Frequency 1717.5 MHz	Frequency 1732.5 MHz	Frequency 1747.5 MHz
4/ 15	QPSK	1	0	23.07	23.09	23.03
		1	37	23.07	23.15	23.19
		1	74	23.09	23.18	23.20
		36	0	22.15	22.12	22.08
		36	19	22.16	22.30	22.23
		36	39	22.19	22.31	22.38
		75	0	22.09	22.17	22.22
	16QAM	1	0	22.43	22.18	22.46
		1	37	22.47	22.44	22.67
		1	74	22.40	22.37	22.82
		36	0	21.22	21.79	21.09
		36	19	21.31	21.22	21.21
		36	39	21.30	21.18	21.31
		75	0	21.31	21.24	21.25
	64QAM	1	0	21.38	21.36	21.07
		1	37	21.41	21.48	21.11
		1	74	21.42	21.45	21.31
		36	0	20.16	20.15	20.09
		36	19	20.27	20.15	20.15
		36	39	20.31	20.24	20.34
		75	0	20.23	20.23	20.33

Band/BW	Modulation	RB Size	RB Offset	Low CH 20050	Mid CH 20175	High CH 20300
				Frequency 1720 MHz	Frequency 1732.5 MHz	Frequency 1745 MHz
4/ 20	QPSK	1	0	23.10	23.08	23.07
		1	50	23.17	23.19	23.26
		1	99	23.21	23.23	23.34
		50	0	22.24	22.21	22.20
		50	25	22.27	22.34	22.26
		50	50	22.30	22.35	22.40
		100	0	22.23	22.25	22.27
	16QAM	1	0	22.46	22.28	22.48
		1	50	22.52	22.57	22.75
		1	99	22.47	22.48	22.83
		50	0	21.31	21.82	21.24
		50	25	21.37	21.28	21.26
		50	50	21.32	21.32	21.39
		100	0	21.34	21.28	21.32
	64QAM	1	0	21.46	21.45	21.16
		1	50	21.56	21.55	21.24
		1	99	21.57	21.57	21.43
		50	0	20.27	20.22	20.22
		50	25	20.34	20.28	20.26
		50	50	20.38	20.34	20.42
		100	0	20.30	20.24	20.35

LTE Band 66

Band/BW	Modulation	RB Size	RB Offset	Low CH 131979	Mid CH 132322	High CH 132665
				Frequency 1710.7MHz	Frequency 1745MHz	Frequency 1779.3MHz
66/ 1.4	QPSK	1	0	23.09	23.04	23.16
		1	2	23.14	23.23	23.12
		1	5	23.29	23.35	23.30
		3	0	23.10	23.06	23.08
		3	1	23.21	23.26	23.20
		3	3	23.33	23.33	23.18
		6	0	22.19	22.18	22.06
	16QAM	1	0	22.10	22.27	22.16
		1	2	22.36	22.60	22.43
		1	5	22.60	22.63	22.65
		3	0	22.02	22.12	22.13
		3	1	22.22	22.23	22.27
		3	3	22.09	22.19	22.10
		6	0	21.13	21.22	21.03
	64QAM	1	0	21.08	21.08	20.95
		1	2	21.44	21.36	21.31
		1	5	21.64	21.56	21.55
		3	0	21.17	21.00	21.12
		3	1	21.12	21.19	21.19
		3	3	21.18	21.21	21.16
		6	0	20.09	20.17	20.03

Band/BW	Modulation	RB Size	RB Offset	Low CH 131987	Mid CH 132322	High CH 132657
				Frequency 1711.5MHz	Frequency 1745MHz	Frequency 1778.5MHz
66/ 3	QPSK	1	0	23.13	23.07	23.04
		1	7	23.18	23.20	23.13
		1	14	23.24	23.36	23.25
		8	0	22.08	22.05	22.02
		8	3	22.27	22.12	22.13
		8	7	22.29	22.30	22.14
		15	0	22.17	22.13	22.08
	16QAM	1	0	22.10	22.22	22.11
		1	7	22.33	22.53	22.46
		1	14	22.54	22.76	22.71
		8	0	21.10	21.16	21.03
		8	3	21.18	21.32	21.28
		8	7	21.12	21.29	21.12
		15	0	21.11	21.13	21.11
	64QAM	1	0	21.14	21.05	21.05
		1	7	21.40	21.22	21.30
		1	14	21.64	21.62	21.49
		8	0	20.08	20.07	20.01
		8	3	20.22	20.17	20.24
		8	7	20.15	20.27	20.18
		15	0	20.07	20.24	20.09

Band/BW	Modulation	RB Size	RB Offset	Low CH 131997	Mid CH 132322	High CH 132647
				Frequency 1712.5MHz	Frequency 1745MHz	Frequency 1777.5MHz
66/ 5	QPSK	1	0	23.11	23.07	23.10
		1	12	23.07	23.23	23.10
		1	24	23.30	23.30	23.24
		12	0	22.14	22.08	22.07
		12	6	22.21	22.12	22.10
		12	13	22.28	22.27	22.19
		25	0	22.16	22.21	22.10
	16QAM	1	0	22.09	22.21	22.15
		1	12	22.37	22.54	22.50
		1	24	22.53	22.74	22.61
		12	0	21.06	21.17	21.12
		12	6	21.17	21.23	21.30
		12	13	21.15	21.29	21.10
		25	0	21.05	21.13	21.05
	64QAM	1	0	21.11	21.08	21.04
		1	12	21.33	21.25	21.25
		1	24	21.56	21.56	21.47
		12	0	20.14	20.06	20.07
		12	6	20.19	20.16	20.17
		12	13	20.21	20.27	20.22
		25	0	20.13	20.13	20.07

Band/BW	Modulation	RB Size	RB Offset	Low CH 132022	Mid CH 132322	High CH 132622
				Frequency 1715MHz	Frequency 1745MHz	Frequency 1775MHz
66/ 10	QPSK	1	0	23.02	23.03	22.98
		1	24	23.17	23.18	23.15
		1	49	23.33	23.39	23.34
		25	0	22.06	22.06	22.07
		25	12	22.24	22.26	22.09
		25	25	22.20	22.36	22.20
		50	0	22.13	22.15	22.03
	16QAM	1	0	22.22	22.14	22.17
		1	24	22.43	22.58	22.43
		1	49	22.55	22.69	22.60
		25	0	21.10	21.03	21.03
		25	12	21.13	21.26	21.30
		25	25	21.22	21.27	21.22
		50	0	21.11	21.11	21.00
	64QAM	1	0	21.05	21.05	20.93
		1	24	21.41	21.34	21.18
		1	49	21.58	21.51	21.41
		25	0	20.17	20.05	20.12
		25	12	20.10	20.24	20.16
		25	25	20.12	20.31	20.12
		50	0	20.13	20.12	20.09

Band/BW	Modulation	RB Size	RB Offset	Low CH 132047	Mid CH 132322	High CH 132597
				Frequency 1717.5 MHz	Frequency 1745MHz	Frequency 1772.5 MHz
66/ 15	QPSK	1	0	23.05	23.09	23.06
		1	37	23.15	23.13	23.06
		1	74	23.24	23.35	23.22
		36	0	22.08	22.09	22.03
		36	19	22.18	22.17	22.21
		36	39	22.33	22.22	22.18
		75	0	22.09	22.13	22.13
	16QAM	1	0	22.21	22.26	22.23
		1	37	22.37	22.58	22.49
		1	74	22.50	22.65	22.61
		36	0	21.08	21.15	21.11
		36	19	21.16	21.31	21.28
		36	39	21.16	21.30	21.08
		75	0	21.10	21.22	21.10
	64QAM	1	0	21.05	21.00	21.02
		1	37	21.45	21.25	21.30
		1	74	21.64	21.58	21.41
		36	0	20.15	20.10	20.05
		36	19	20.20	20.15	20.24
		36	39	20.16	20.18	20.22
		75	0	20.09	20.23	20.06

Band/BW	Modulation	RB Size	RB Offset	Low CH 132072	Mid CH 132322	High CH 132572
				Frequency 1720MHz	Frequency 1745MHz	Frequency 1770MHz
66/ 20	QPSK	1	0	23.13	23.09	23.12
		1	50	23.21	23.26	23.18
		1	99	23.39	23.45	23.36
		50	0	22.21	22.20	22.15
		50	25	22.32	22.27	22.24
		50	50	22.35	22.37	22.28
		100	0	22.23	22.26	22.18
	16QAM	1	0	22.24	22.29	22.26
		1	50	22.47	22.68	22.57
		1	99	22.64	22.77	22.75
		50	0	21.12	21.18	21.17
		50	25	21.25	21.36	21.32
		50	50	21.24	21.32	21.23
		100	0	21.16	21.23	21.14
	64QAM	1	0	21.18	21.13	21.06
		1	50	21.47	21.37	21.32
		1	99	21.67	21.65	21.56
		50	0	20.18	20.14	20.13
		50	25	20.24	20.27	20.26
		50	50	20.22	20.32	20.27
		100	0	20.15	20.25	20.16



BUREAU
VERITAS

Test Report No.: PSU-NQN2311090109RF04

EIRP

LTE BAND 4

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19957	1710.7	23.12	-2.9	20.22	105.2	1
20175	1732.5	23.2	-2.9	20.3	107.15	1
20393	1754.3	23.23	-2.9	20.33	107.89	1

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19957	1710.7	22.42	-2.9	19.52	89.54	1
20175	1732.5	22.58	-2.9	19.68	92.9	1
20393	1754.3	22.73	-2.9	19.83	96.16	1

CHANNEL BANDWIDTH: 1.4MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19957	1710.7	21.46	-2.9	18.56	71.78	1
20175	1732.5	21.46	-2.9	18.56	71.78	1
20393	1754.3	21.34	-2.9	18.44	69.82	1

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19965	1711.5	23.18	-2.9	20.28	106.66	1
20175	1732.5	23.22	-2.9	20.32	107.65	1
20385	1753.5	23.28	-2.9	20.38	109.14	1

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19965	1711.5	22.43	-2.9	19.53	89.74	1
20175	1732.5	22.52	-2.9	19.62	91.62	1
20385	1753.5	21.22	-2.9	18.32	67.92	1

CHANNEL BANDWIDTH: 3MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19965	1711.5	21.47	-2.9	18.57	71.94	1
20175	1732.5	21.5	-2.9	18.6	72.44	1
20385	1753.5	21.32	-2.9	18.42	69.5	1

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19975	1712.5	23.18	-2.9	20.28	106.66	1
20175	1732.5	23.18	-2.9	20.28	106.66	1
20375	1752.5	23.26	-2.9	20.36	108.64	1

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19975	1712.5	22.5	-2.9	19.6	91.2	1
20175	1732.5	22.46	-2.9	19.56	90.36	1
20375	1752.5	22.75	-2.9	19.85	96.61	1

CHANNEL BANDWIDTH: 5MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19975	1712.5	21.49	-2.9	18.59	72.28	1
20175	1732.5	21.52	-2.9	18.62	72.78	1
20375	1752.5	21.32	-2.9	18.42	69.5	1

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20000	1715	23.14	-2.9	20.24	105.68	1
20175	1732.5	23.13	-2.9	20.23	105.44	1
20350	1750	23.27	-2.9	20.37	108.89	1

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20000	1715	22.43	-2.9	19.53	89.74	1
20175	1732.5	22.45	-2.9	19.55	90.16	1
20350	1750	22.8	-2.9	19.9	97.72	1

CHANNEL BANDWIDTH: 10MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20000	1715	21.52	-2.9	18.62	72.78	1
20175	1732.5	21.56	-2.9	18.66	73.45	1
20350	1750	21.33	-2.9	18.43	69.66	1

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20025	1717.5	23.09	-2.9	20.19	104.47	1
20175	1732.5	23.18	-2.9	20.28	106.66	1
20325	1747.5	23.2	-2.9	20.3	107.15	1

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20025	1717.5	22.47	-2.9	19.57	90.57	1
20175	1732.5	22.44	-2.9	19.54	89.95	1
20325	1747.5	22.82	-2.9	19.92	98.17	1

CHANNEL BANDWIDTH: 15MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20025	1717.5	21.42	-2.9	18.52	71.12	1
20175	1732.5	21.48	-2.9	18.58	72.11	1
20325	1747.5	21.31	-2.9	18.41	69.34	1

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20050	1720	23.21	-2.9	20.31	107.4	1
20175	1732.5	23.23	-2.9	20.33	107.89	1
20300	1745	23.34	-2.9	20.44	110.66	1

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20050	1720	22.52	-2.9	19.62	91.62	1
20175	1732.5	22.57	-2.9	19.67	92.68	1
20300	1745	22.83	-2.9	19.93	98.4	1

CHANNEL BANDWIDTH: 20MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20050	1720	21.57	-2.9	18.67	73.62	1
20175	1732.5	21.57	-2.9	18.67	73.62	1
20300	1745	21.43	-2.9	18.53	71.29	1

LTE BAND 66

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131979	1710.7	23.33	-2.9	20.43	110.41	1
132322	1745	23.35	-2.9	20.45	110.92	1
132665	1779.3	23.3	-2.9	20.4	109.65	1

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131979	1710.7	22.6	-2.9	19.7	93.33	1
132322	1745	22.63	-2.9	19.73	93.97	1
132665	1779.3	22.65	-2.9	19.75	94.41	1

CHANNEL BANDWIDTH: 1.4MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131979	1710.7	21.64	-2.9	18.74	74.82	1
132322	1745	21.56	-2.9	18.66	73.45	1
132665	1779.3	21.55	-2.9	18.65	73.28	1

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131987	1711.5	23.24	-2.9	20.34	108.14	1
132322	1745	23.36	-2.9	20.46	111.17	1
132657	1778.5	23.25	-2.9	20.35	108.39	1

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131987	1711.5	22.54	-2.9	19.64	92.04	1
132322	1745	22.76	-2.9	19.86	96.83	1
132657	1778.5	22.71	-2.9	19.81	95.72	1

CHANNEL BANDWIDTH: 3MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131987	1711.5	21.64	-2.9	18.74	74.82	1
132322	1745	21.62	-2.9	18.72	74.47	1
132657	1778.5	21.49	-2.9	18.59	72.28	1

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131997	1712.5	23.3	-2.9	20.4	109.65	1
132322	1745	23.3	-2.9	20.4	109.65	1
132647	1777.5	23.24	-2.9	20.34	108.14	1

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131997	1712.5	22.53	-2.9	19.63	91.83	1
132322	1745	22.74	-2.9	19.84	96.38	1
132647	1777.5	22.61	-2.9	19.71	93.54	1

CHANNEL BANDWIDTH: 5MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131997	1712.5	21.56	-2.9	18.66	73.45	1
132322	1745	21.56	-2.9	18.66	73.45	1
132647	1777.5	21.47	-2.9	18.57	71.94	1

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132022	1715	23.33	-2.9	20.43	110.41	1
132322	1745	23.39	-2.9	20.49	111.94	1
132622	1775	23.34	-2.9	20.44	110.66	1

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132022	1715	22.55	-2.9	19.65	92.26	1
132322	1745	22.69	-2.9	19.79	95.28	1
132622	1775	22.6	-2.9	19.7	93.33	1

CHANNEL BANDWIDTH: 10MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132022	1715	21.58	-2.9	18.68	73.79	1
132322	1745	21.51	-2.9	18.61	72.61	1
132622	1775	21.41	-2.9	18.51	70.96	1



Test Report No.: PSU-NQN2311090109RF04

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132047	1717.5	23.24	-2.9	20.34	108.14	1
132322	1745	23.35	-2.9	20.45	110.92	1
132597	1772.5	23.22	-2.9	20.32	107.65	1

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132047	1717.5	22.5	-2.9	19.6	91.2	1
132322	1745	22.65	-2.9	19.75	94.41	1
132597	1772.5	22.61	-2.9	19.71	93.54	1

CHANNEL BANDWIDTH: 15MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132047	1717.5	21.64	-2.9	18.74	74.82	1
132322	1745	21.58	-2.9	18.68	73.79	1
132597	1772.5	21.41	-2.9	18.51	70.96	1

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132072	1720	23.39	-2.9	20.49	111.94	1
132322	1745	23.45	-2.9	20.55	113.5	1
132572	1770	23.36	-2.9	20.46	111.17	1

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132072	1720	22.64	-2.9	19.74	94.19	1
132322	1745	22.77	-2.9	19.87	97.05	1
132572	1770	22.75	-2.9	19.85	96.61	1

CHANNEL BANDWIDTH: 20MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132072	1720	21.67	-2.9	18.77	75.34	1
132322	1745	21.65	-2.9	18.75	74.99	1
132572	1770	21.56	-2.9	18.66	73.45	1

REMARKS: EIRP Output Power (dBm) = EIRP (dBm) -2.15(dB).

3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.2.2 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

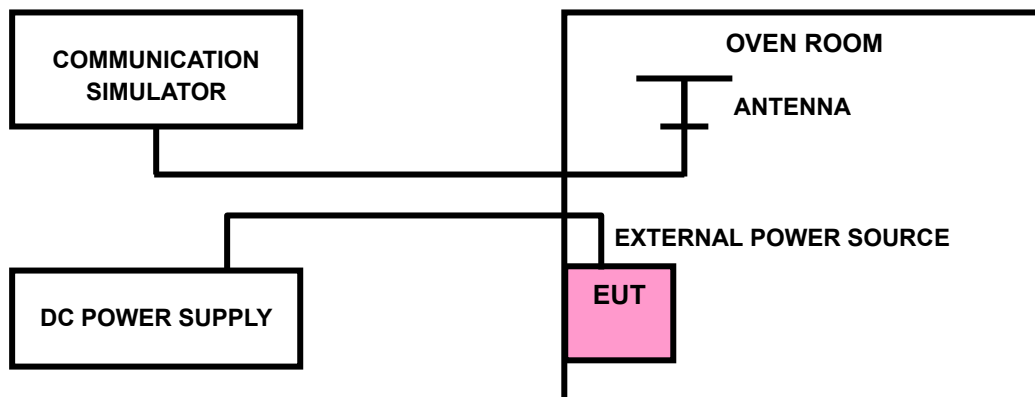



Test Report No.: PSU-NQN2311090109RF04

3.2.4 TEST RESULTS

Please Refer to Appendix Of this test report.


Note: VL = Low voltage(3.4V); VN/NV = Normal voltage(3.85V); VH = High voltage(4.45V);
NT = Normal temperature (25°C)

3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

3.3.2 TEST SETUP

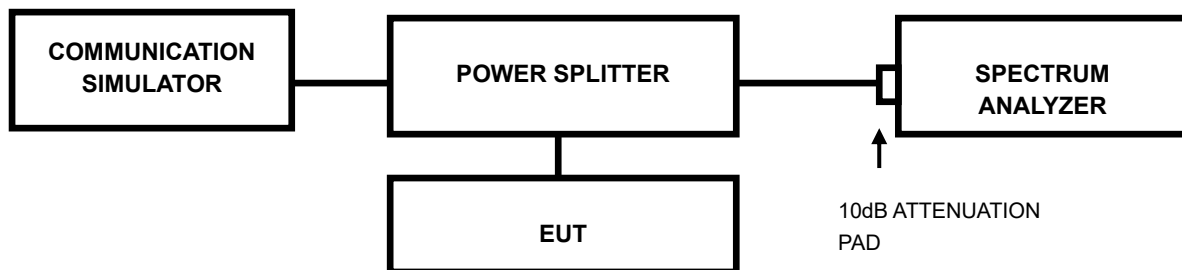

3.3.3 TEST PROCEDURES

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.



Test Report No.: PSU-NQN2311090109RF04

3.3.4 TEST RESULTS


Please Refer to Appendix Of this test report.

3.4 BAND EDGE MEASUREMENT

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

According to FCC Part 27.53(h) specified that For operations in the 1710-1755 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.4.2 TEST SETUP

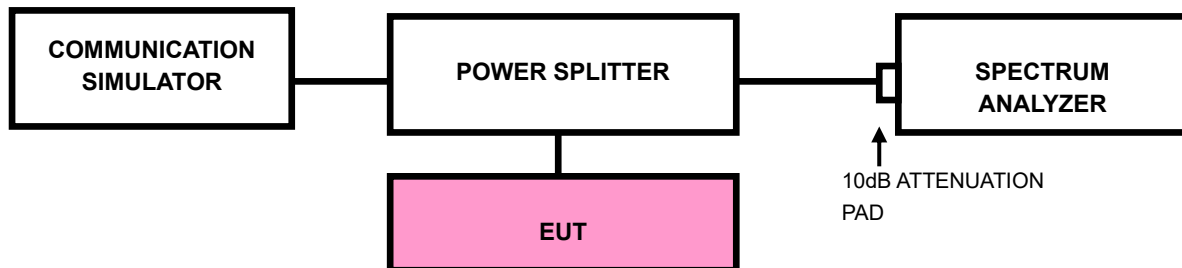



3.4.3 TEST PROCEDURES

- a) Connect the transmitter to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
- b) Tune the analyzer to the nominal center frequency of the emission bandwidth (EBW).
- c) Set the resolution bandwidth (RBW) $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
- d) Beyond the 1MHz band from the band edge, RBW=1MHz was used.
- e) Set the video bandwidth (VBW) to $\geq 3 \times$ RBW.
- f) Select the average power (RMS) display detector.
- g) Set the number of measurement points to ≥ 1001 .
- h) Use auto-coupled sweep time.
- i) Perform the measurement over an interval of time when the transmission is continuous and at its maximum power level.
- j) The RF fundamental frequency should be excluded against the limit line in the operating frequency band and use RBW is 10KHz or 100KHz.
- k) Record the max trace plot into the test report.



Test Report No.: PSU-NQN2311090109RF04

3.4.4 TEST RESULTS

Please Refer to Appendix Of this test report.

3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9kHz up to a frequency including its 10th harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

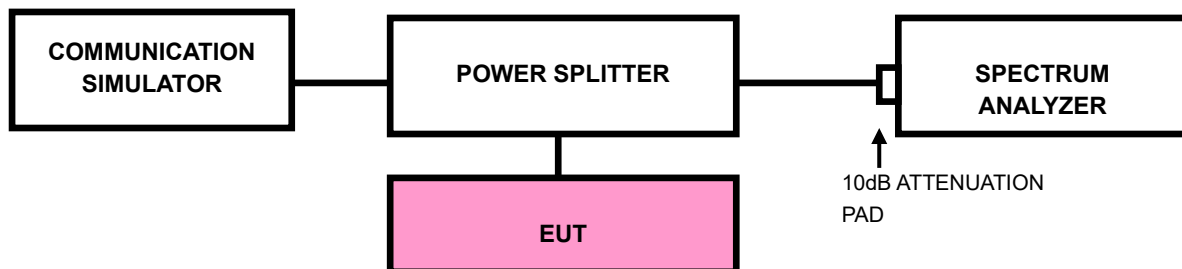



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2311090109RF04

3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Appendix Of this test report.



3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G.
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}$.


NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

3.6.3 DEVIATION FROM TEST STANDARD


No deviation

3.6.4 TEST SETUP


< Frequency Range below 30MHz >

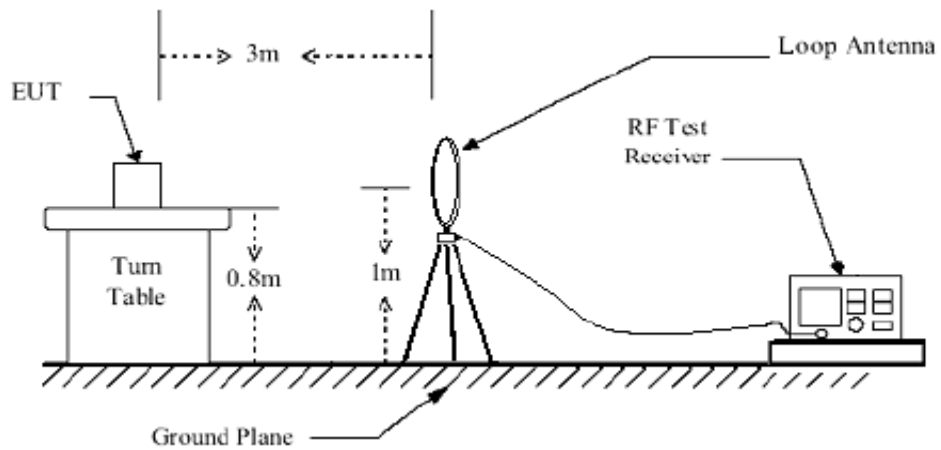

< Frequency Range 30MHz~1GHz >

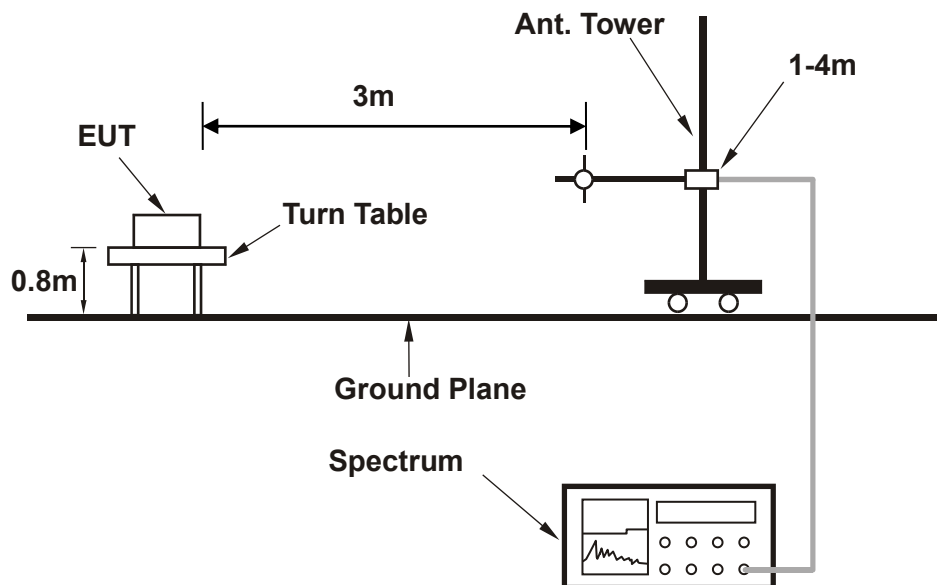

<Frequency Range above 1GHz>

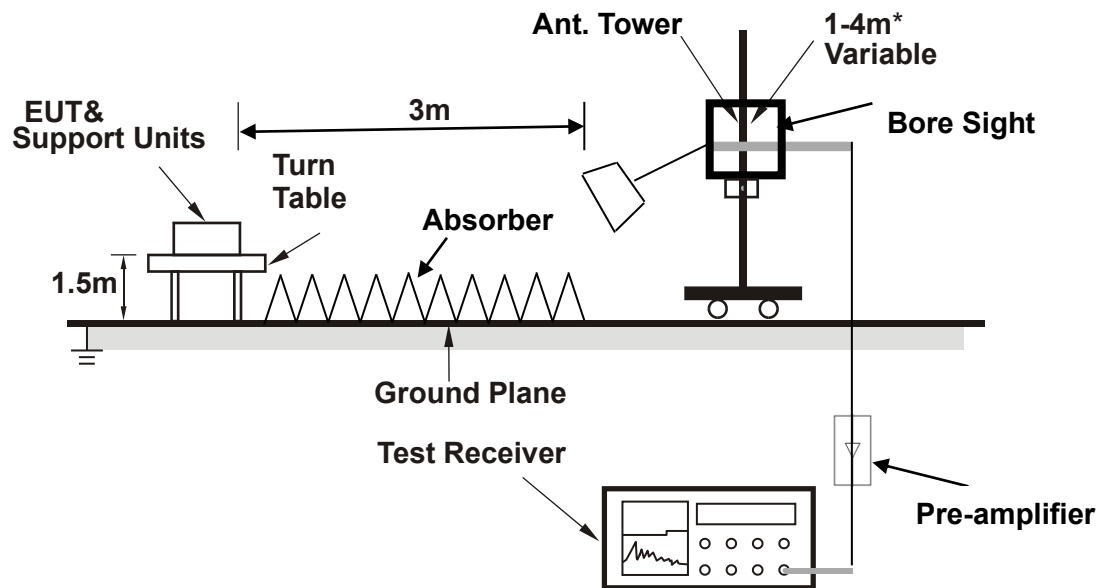

Note: Above 1G is a directional antenna depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

LTE Band 66

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 132322	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	37.950	-63.19	-13.00	50.19	6.55	H	141.6	1.00
1	59.300	-61.89	-13.00	48.89	2.51	H	1.8	2.00
1	116.550	-76.55	-13.00	63.55	-6.05	H	114.4	2.00
1	232.500	-59.69	-13.00	46.69	8.09	H	355.7	2.00
2	468.471	-70.07	-13.00	57.07	6.32	H	145.5	2.00
2	867.221	-65.56	-13.00	52.56	11.16	H	352.6	1.00

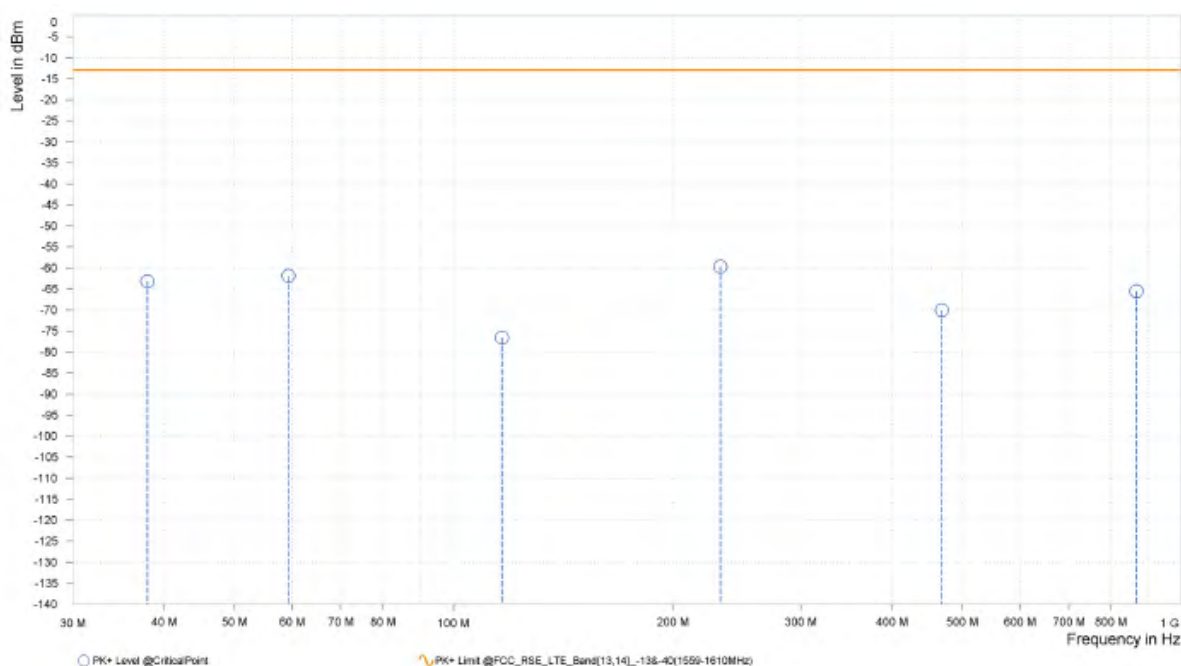




Test Report No.: PSU-NQN2311090109RF04

MODE	TX channel 132322	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	32.700	-67.12	-13.00	54.12	-0.53	V	358.9	1.00
1	58.350	-59.85	-13.00	46.85	3.09	V	350.1	1.00
1	99.700	-60.29	-13.00	47.29	11.52	V	350.1	1.00
1	192.650	-72.28	-13.00	59.28	-1.18	V	146.3	1.00
1	332.650	-67.50	-13.00	54.50	5.63	V	262.6	2.00
2	862.042	-66.23	-13.00	53.23	11.67	V	0.9	2.00

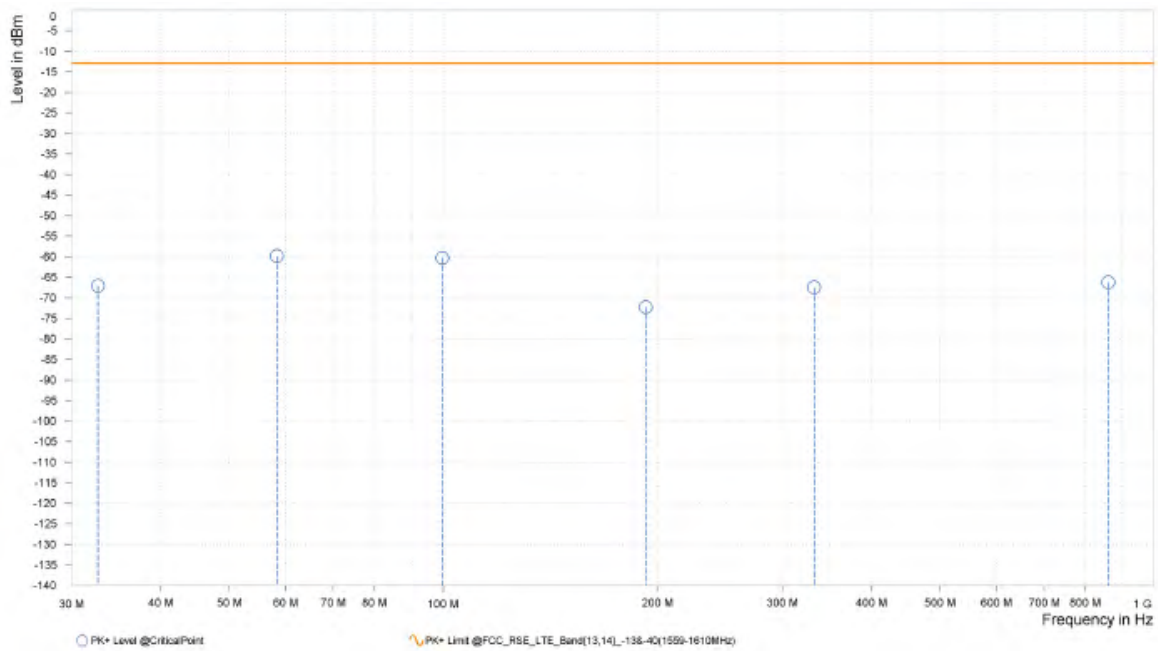



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2311090109RF04

ABOVE 1GHz


Note: For higher frequency, the emission is too low to be detected.

LTE B66

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,489.000	-50.76	-13.00	37.76	21.83	H	359	2.00
4	5,233.000	-49.50	-13.00	36.50	25.60	H	359.1	1.00

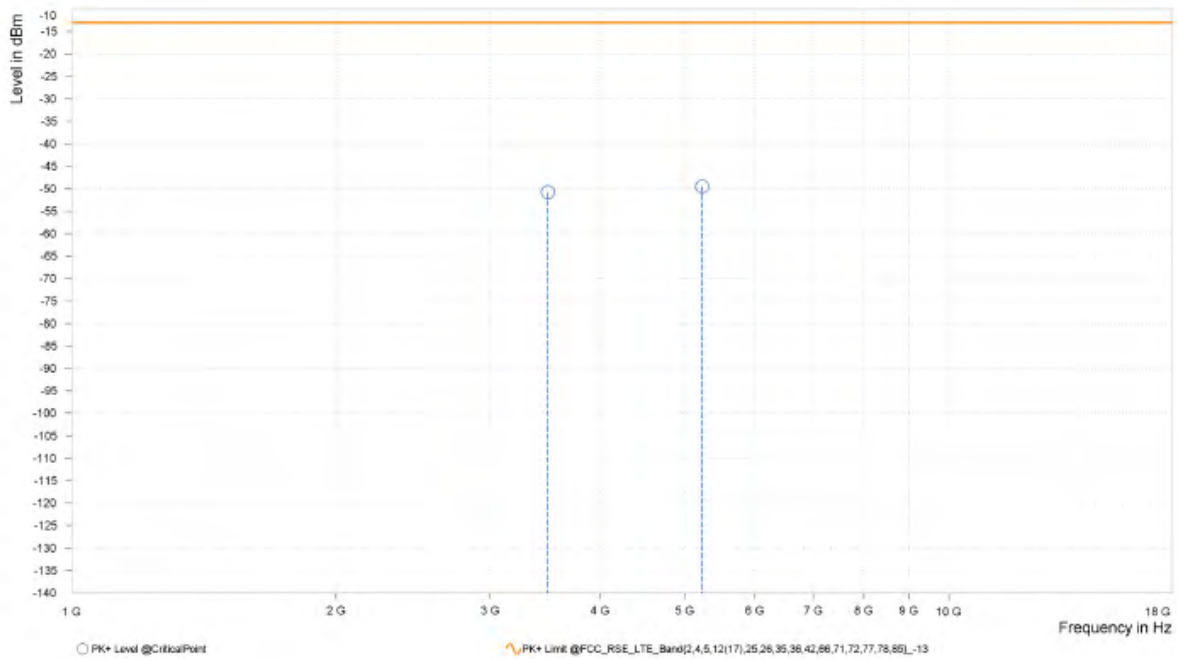




Test Report No.: PSU-NQN2311090109RF04

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,489.000	-49.21	-13.00	36.21	22.62	V	359	2.00
4	5,233.000	-45.81	-13.00	32.81	26.12	V	359.1	1.00

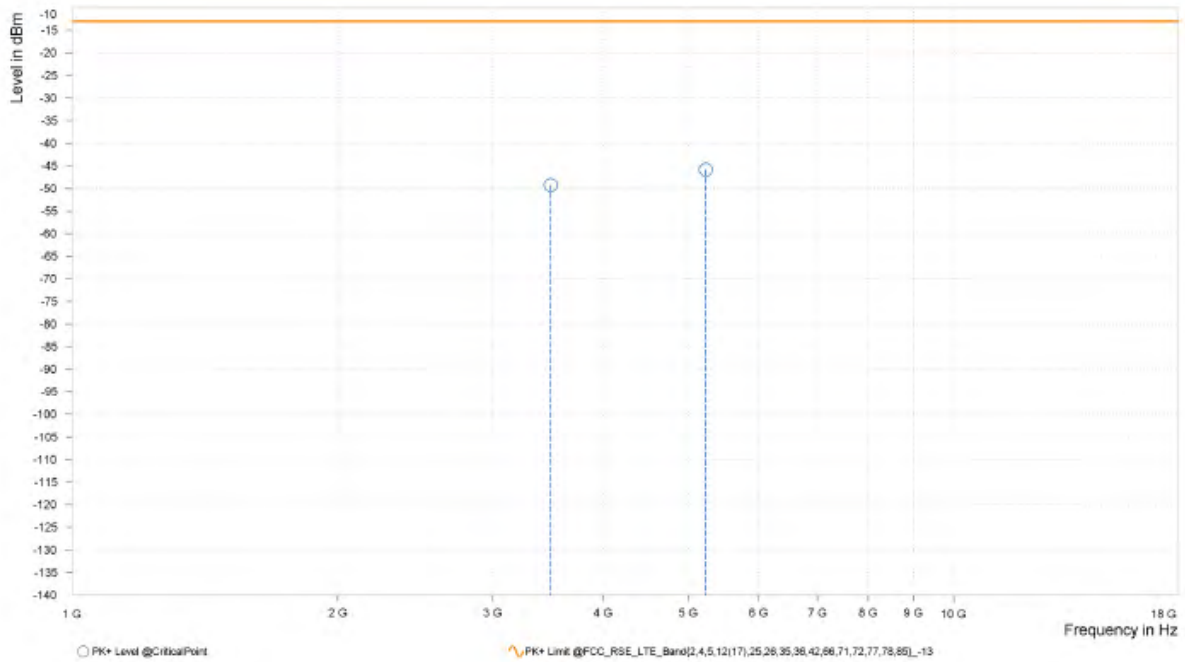




Test Report No.: PSU-NQN2311090109RF04

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,487.000	-50.84	-13.00	37.84	21.80	H	359	2.00
4	5,231.000	-48.81	-13.00	35.81	25.58	H	359	1.00

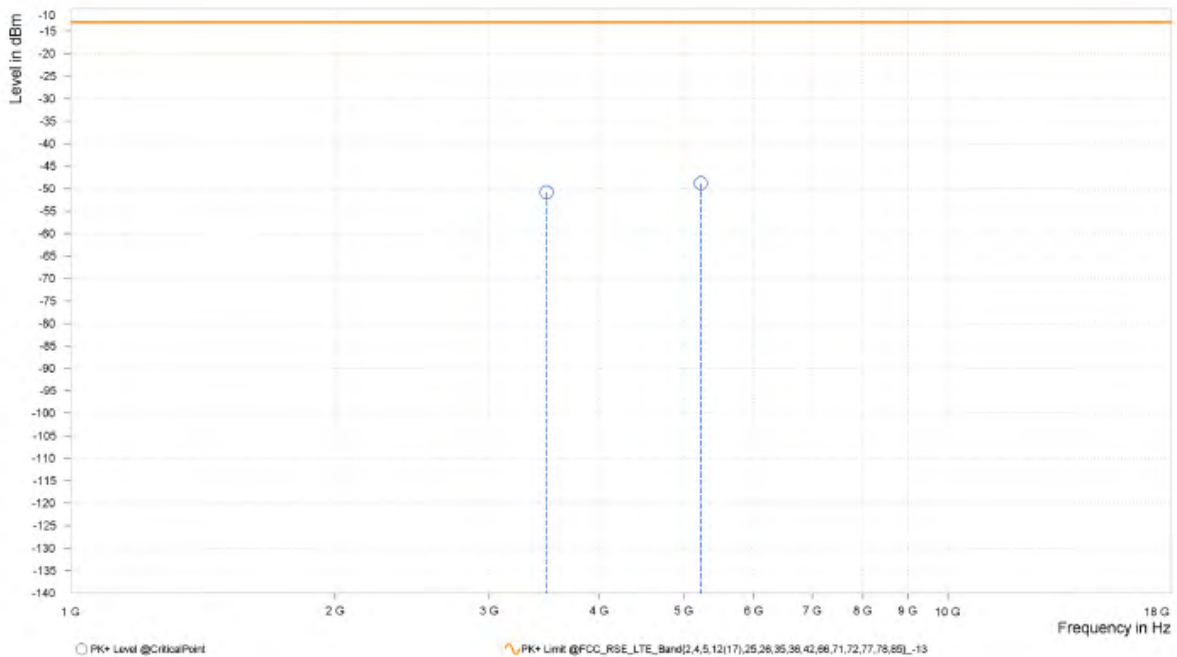




Test Report No.: PSU-NQN2311090109RF04

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,487.000	-48.42	-13.00	35.42	22.59	V	0.9	2.00
4	5,231.000	-46.77	-13.00	33.77	26.12	V	234.8	1.00

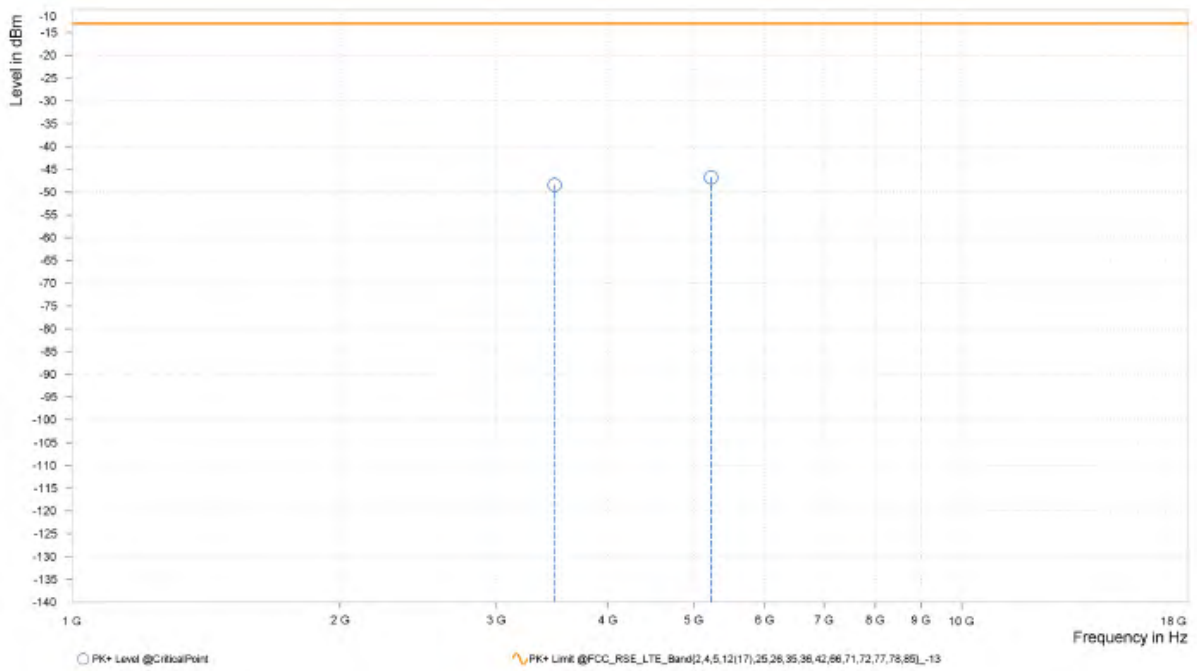




Test Report No.: PSU-NQN2311090109RF04

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,485.500	-49.60	-13.00	36.60	21.78	H	247.9	1.00
4	5,228.000	-50.02	-13.00	37.02	25.57	H	0.9	2.00

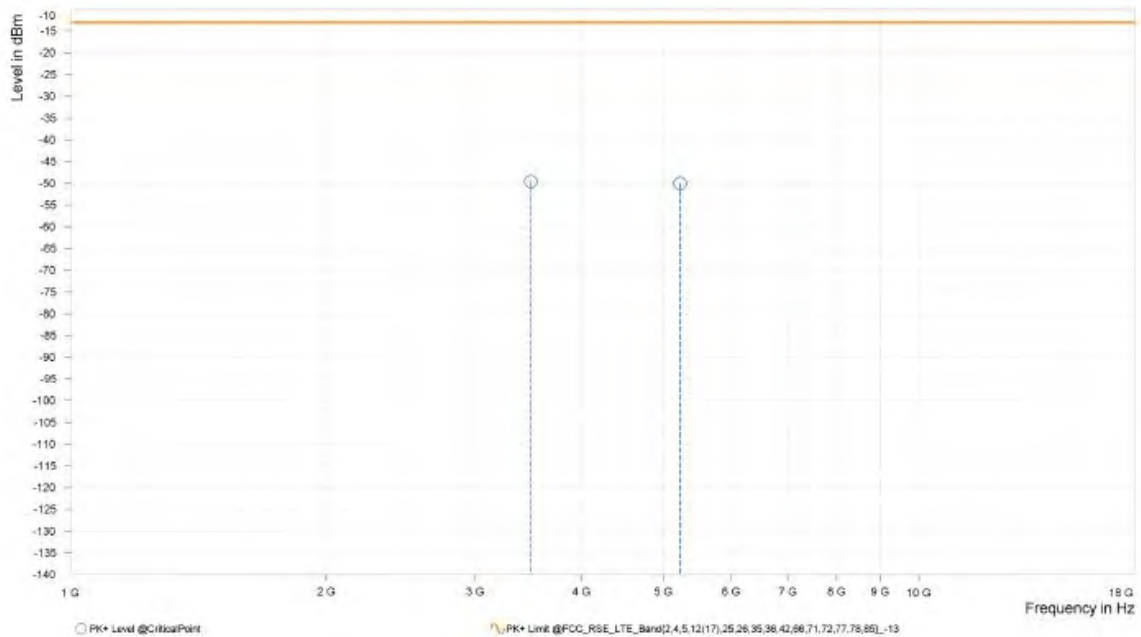




Test Report No.: PSU-NQN2311090109RF04

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,485.500	-48.17	-13.00	35.17	22.56	V	0.9	2.00
4	5,228.000	-46.04	-13.00	33.04	26.12	V	0.9	2.00

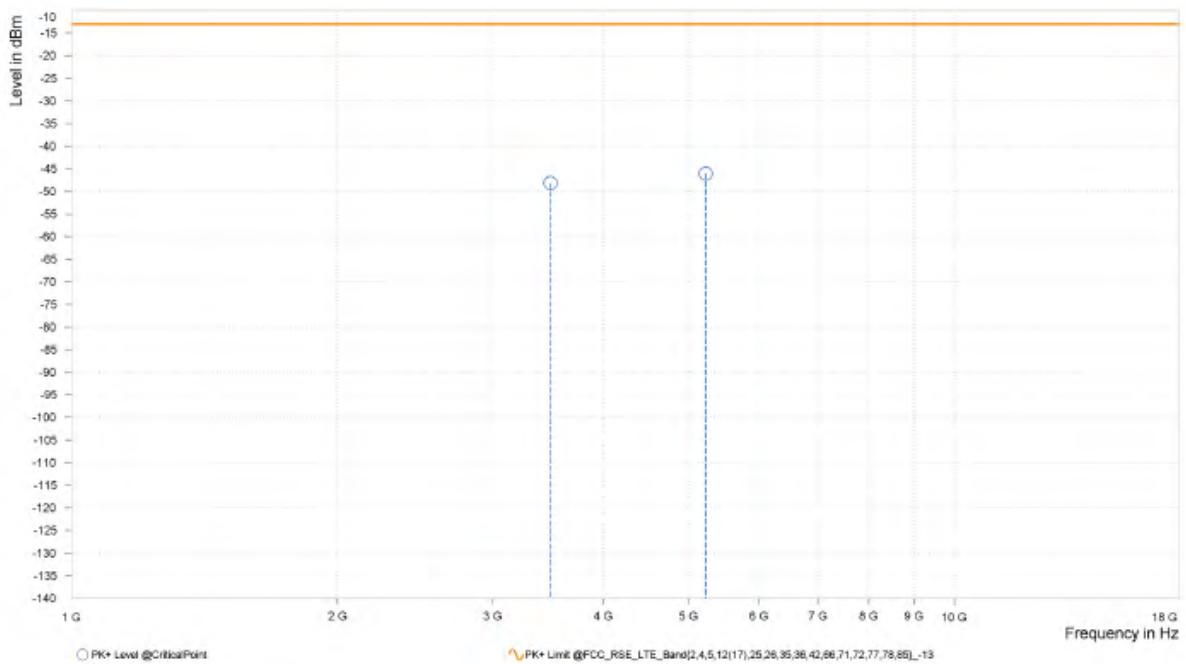




Test Report No.: PSU-NQN2311090109RF04

CHANNEL BANDWIDTH: 10MHz / QPSK

CH132022

MODE	TX channel 132022	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,421.000	-50.71	-13.00	37.71	21.93	H	202.9	2.00
4	5,131.500	-48.81	-13.00	35.81	25.12	H	359	1.00

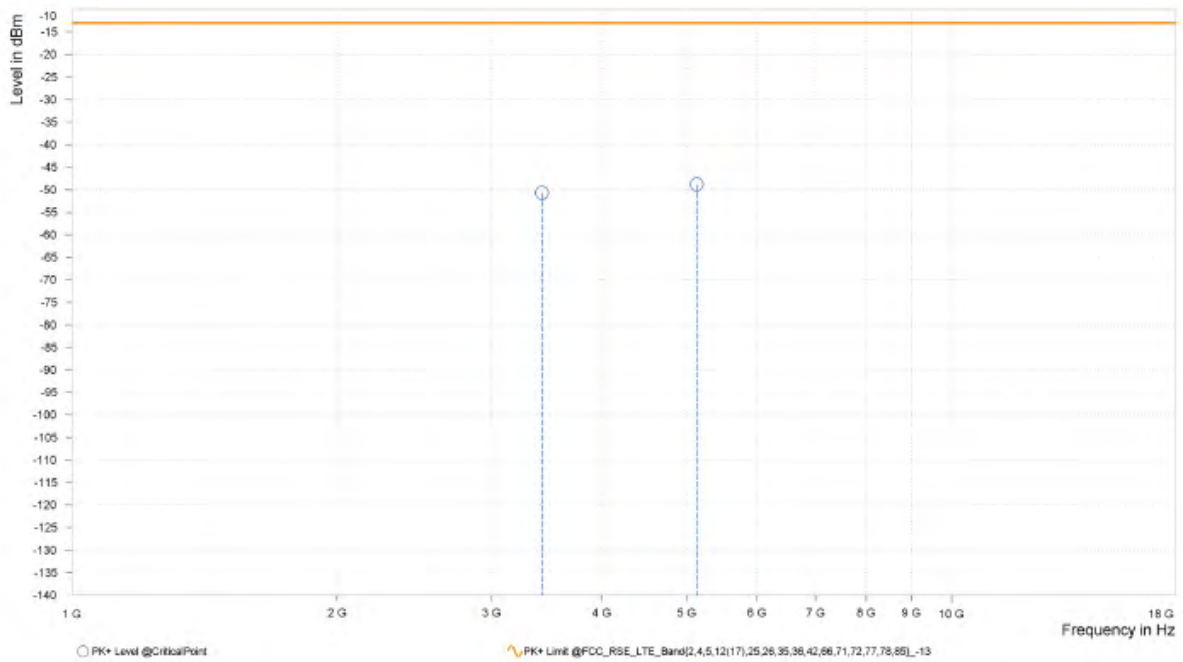




Test Report No.: PSU-NQN2311090109RF04

MODE	TX channel 132022	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,421.000	-48.81	-13.00	35.81	22.27	V	359.1	1.00
4	5,131.500	-47.30	-13.00	34.30	25.44	V	0.9	2.00

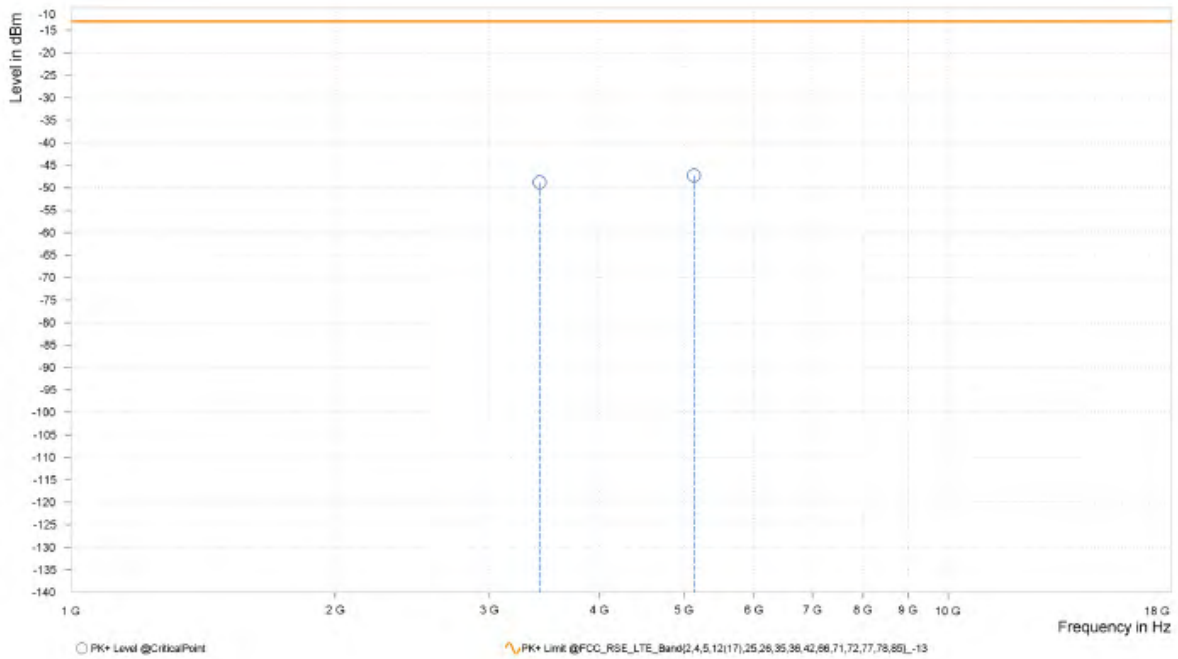




Test Report No.: PSU-NQN2311090109RF04

CH132322

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,481.000	-50.56	-13.00	37.56	21.72	H	1.8	2.00
4	5,221.500	-48.08	-13.00	35.08	25.57	H	149.1	2.00

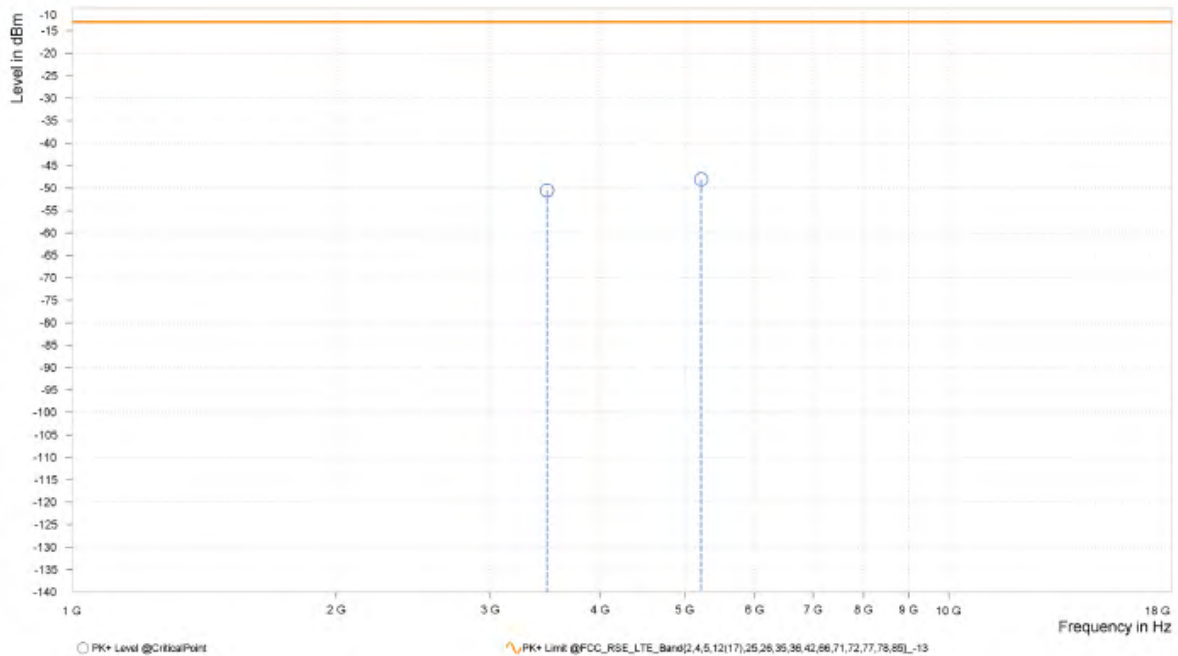




Test Report No.: PSU-NQN2311090109RF04

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,481.000	-48.29	-13.00	35.29	22.47	V	359	2.00
4	5,221.500	-45.34	-13.00	32.34	26.13	V	359.1	1.00

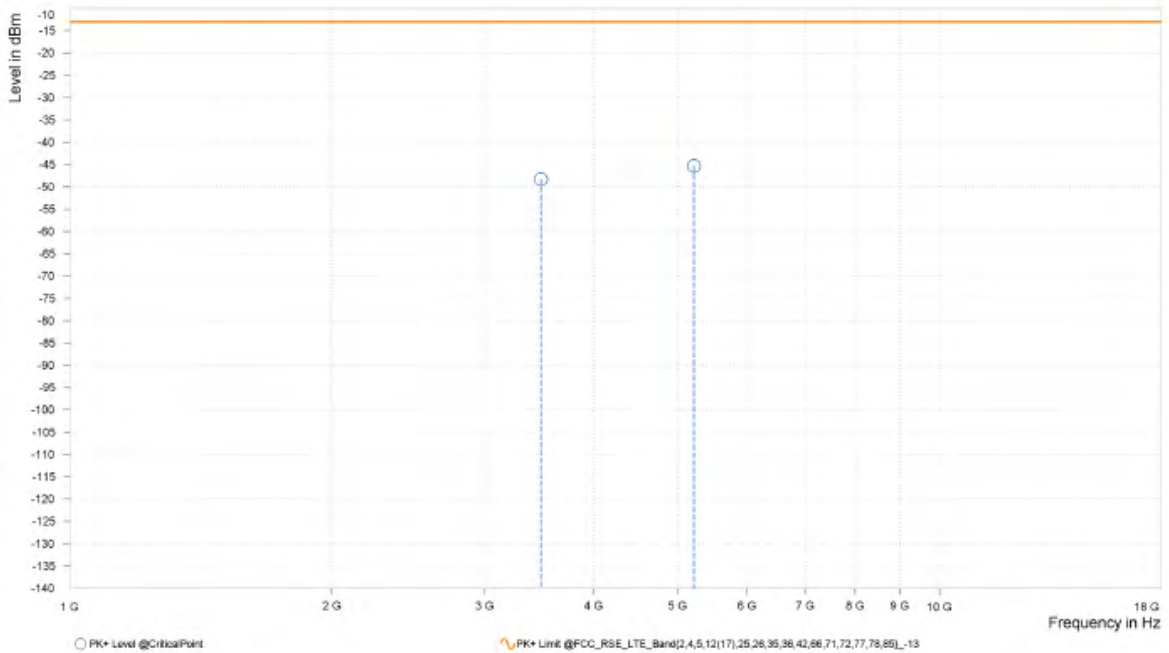




Test Report No.: PSU-NQN2311090109RF04

CH132622

MODE	TX channel 132622	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,541.000	-50.75	-13.00	37.75	22.08	H	1	1.00
4	5,311.500	-46.98	-13.00	33.98	25.61	H	1	1.00

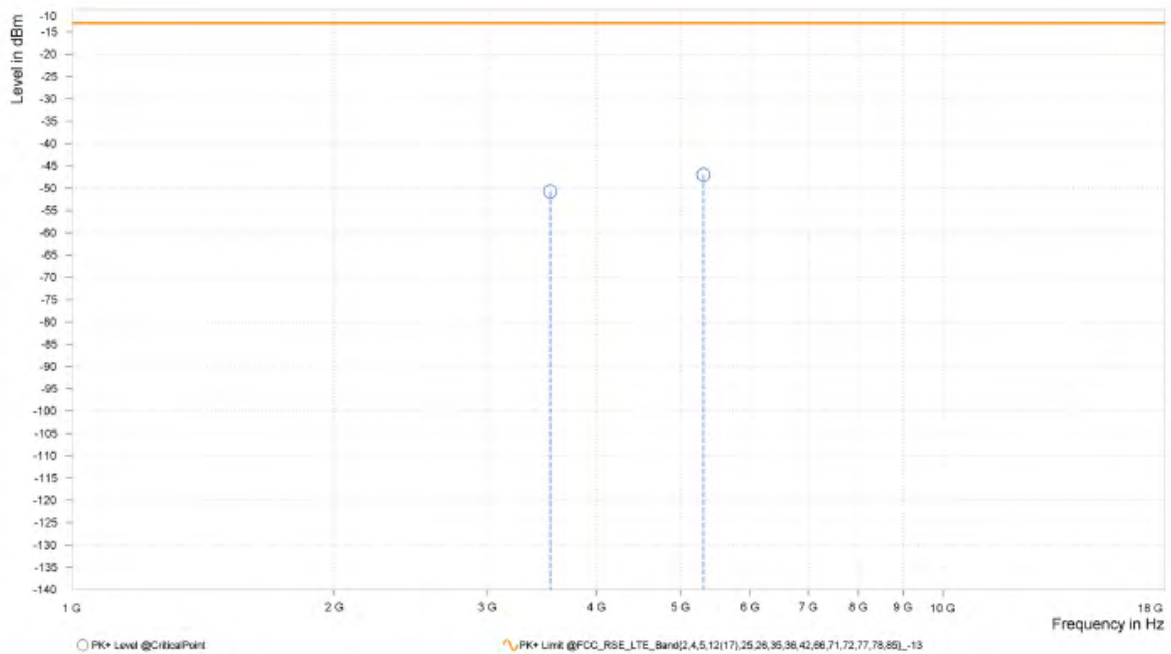




Test Report No.: PSU-NQN2311090109RF04

MODE	TX channel 132622	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,541.000	-48.16	-13.00	35.16	22.60	V	1	1.00
4	5,311.500	-46.55	-13.00	33.55	26.13	V	1	1.00

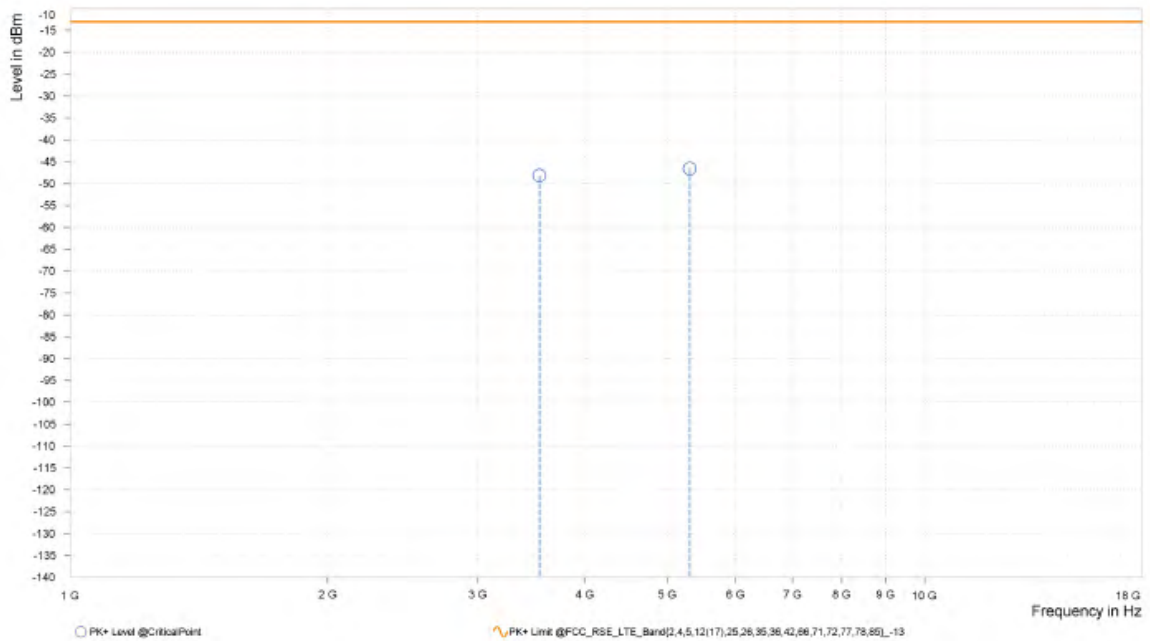




Test Report No.: PSU-NQN2311090109RF04

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,476.500	-49.44	-13.00	36.44	21.70	H	322.1	1.00
4	5,215.000	-49.33	-13.00	36.33	25.50	H	322.1	1.00

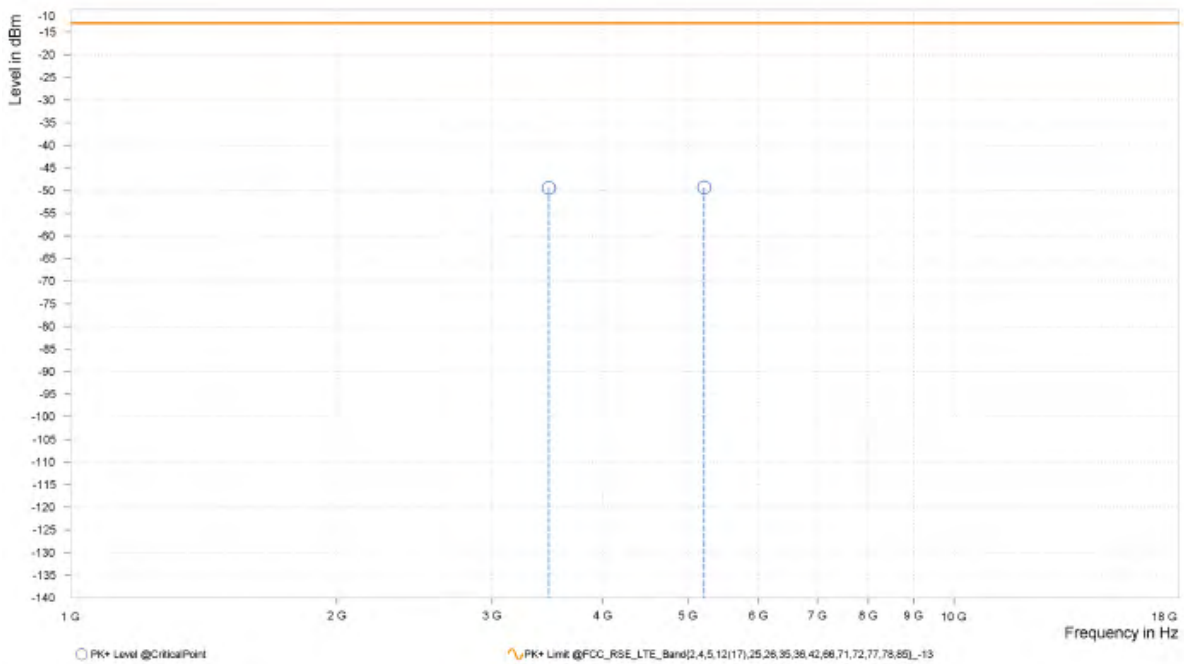




Test Report No.: PSU-NQN2311090109RF04

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,476.500	-48.18	-13.00	35.18	22.44	V	359.1	1.00
4	5,215.000	-45.74	-13.00	32.74	26.08	V	359	2.00

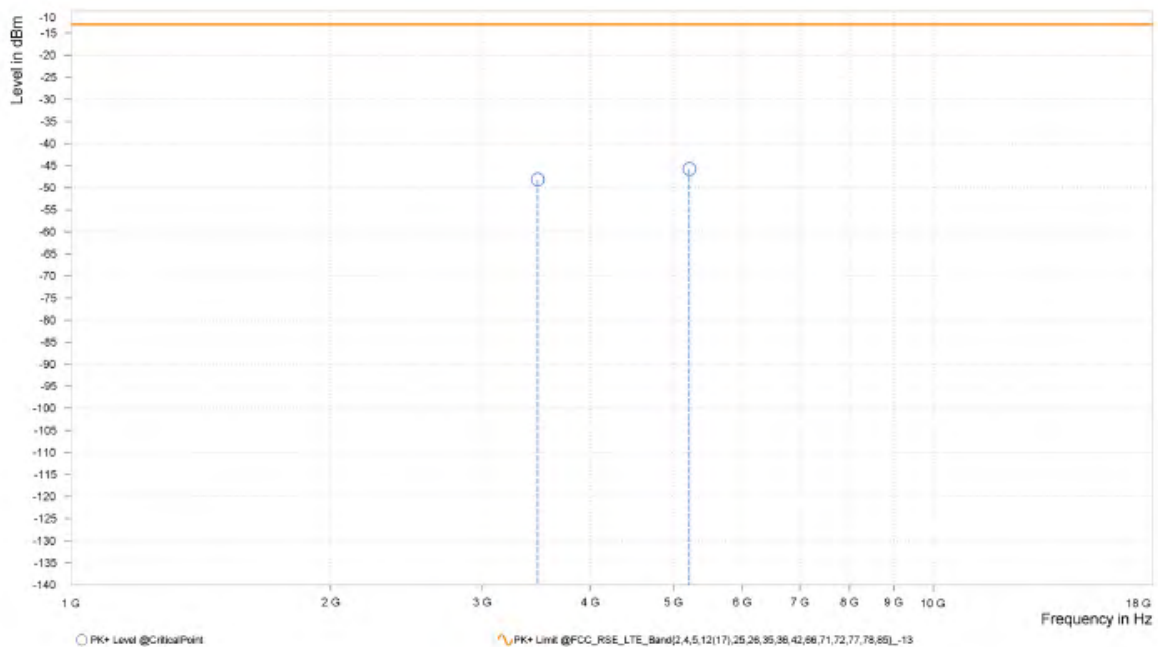




Test Report No.: PSU-NQN2311090109RF04

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,472.000	-50.83	-13.00	37.83	21.70	H	0.9	2.00
4	5,208.000	-47.10	-13.00	34.10	25.46	H	45.1	2.00

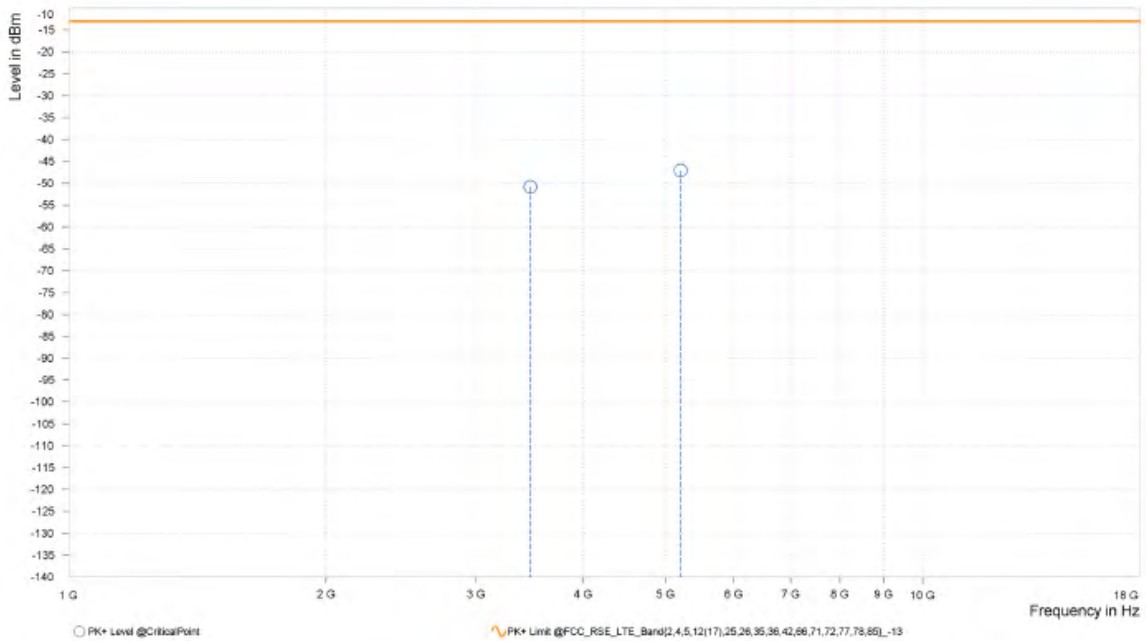




Test Report No.: PSU-NQN2311090109RF04

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,472.000	-48.31	-13.00	35.31	22.42	V	359.1	1.00
4	5,208.000	-46.43	-13.00	33.43	26.05	V	120.5	2.00

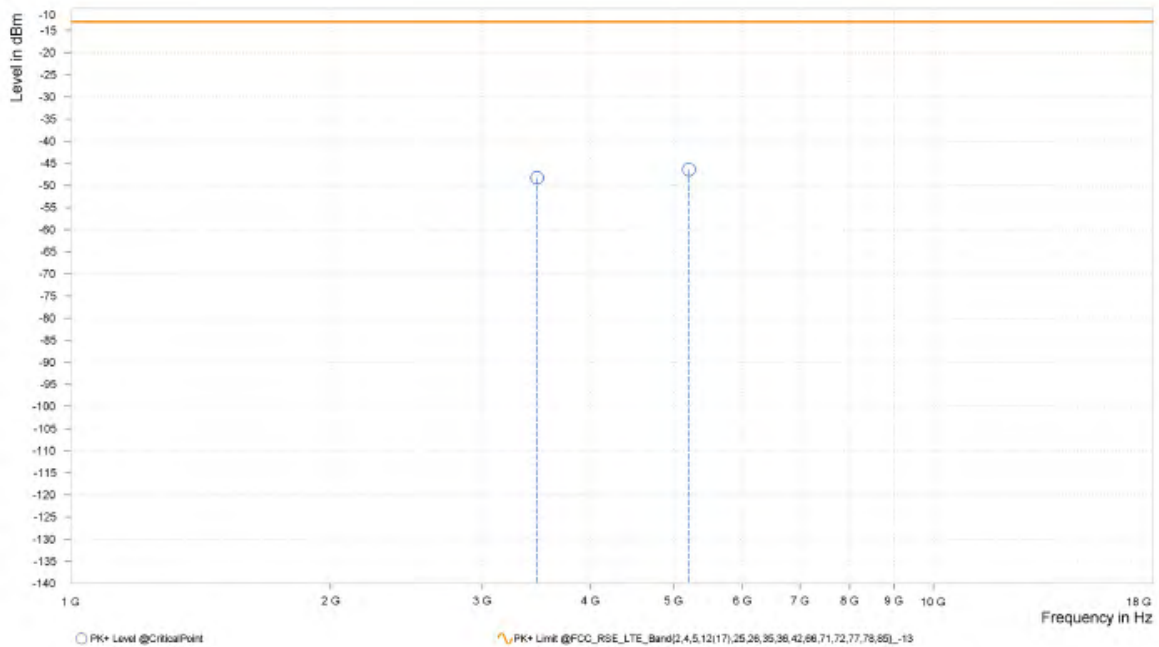


3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

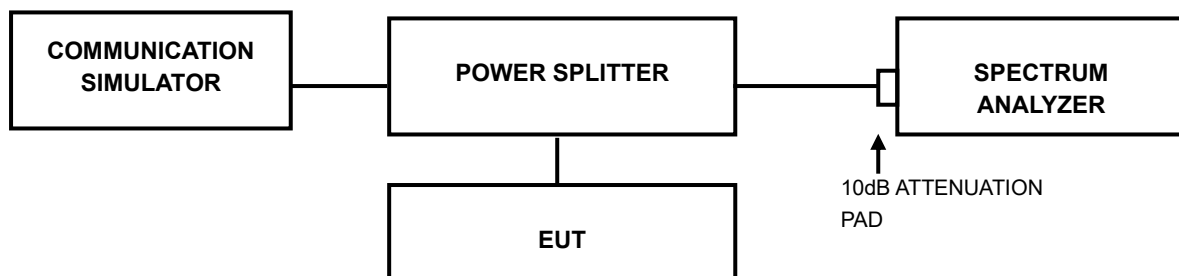

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.



Test Report No.: PSU-NQN2311090109RF04

3.7.4 TEST RESULTS

Please Refer to Appendix Of this test report.



Test Report No.: PSU-NQN2311090109RF04

4 INFORMATION ON THE TESTING LABORATORIES

We, Huarui 7layers High Technology (Suzhou) Co., Ltd. , were founded in 2020 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Suzhou EMC/RF Lab:

Tel: +86 (0557) 368 1008



Test Report No.: PSU-NQN2311090109RF04

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



6 APPENDIX

LTE BAND66(INCLUDE LTE B4)

PEAK-TO-AVERAGE RATIO(CCDF)



Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dB)	Limit(dB)	Verdict
Band66	20MHz	QPSK	132072	1RB#0	5.14	13	PASS
Band66	20MHz	QPSK	132072	100RB#0	5.18	13	PASS
Band66	20MHz	16QAM	132072	1RB#0	5.30	13	PASS
Band66	20MHz	16QAM	132072	100RB#0	6.10	13	PASS
Band66	20MHz	64QAM	132072	1RB#0	6.18	13	PASS
Band66	20MHz	64QAM	132072	100RB#0	6.72	13	PASS
Band66	20MHz	QPSK	132322	1RB#0	5.14	13	PASS
Band66	20MHz	QPSK	132322	100RB#0	5.48	13	PASS
Band66	20MHz	16QAM	132322	1RB#0	6.22	13	PASS
Band66	20MHz	16QAM	132322	100RB#0	6.44	13	PASS
Band66	20MHz	64QAM	132322	1RB#0	6.38	13	PASS
Band66	20MHz	64QAM	132322	100RB#0	6.94	13	PASS
Band66	20MHz	QPSK	132572	1RB#0	5.08	13	PASS
Band66	20MHz	QPSK	132572	100RB#0	5.44	13	PASS
Band66	20MHz	16QAM	132572	1RB#0	5.34	13	PASS
Band66	20MHz	16QAM	132572	100RB#0	6.30	13	PASS
Band66	20MHz	64QAM	132572	1RB#0	6.28	13	PASS
Band66	20MHz	64QAM	132572	100RB#0	6.74	13	PASS



Test Report No.: PSU-NQN2311090109RF04

Test Graphs

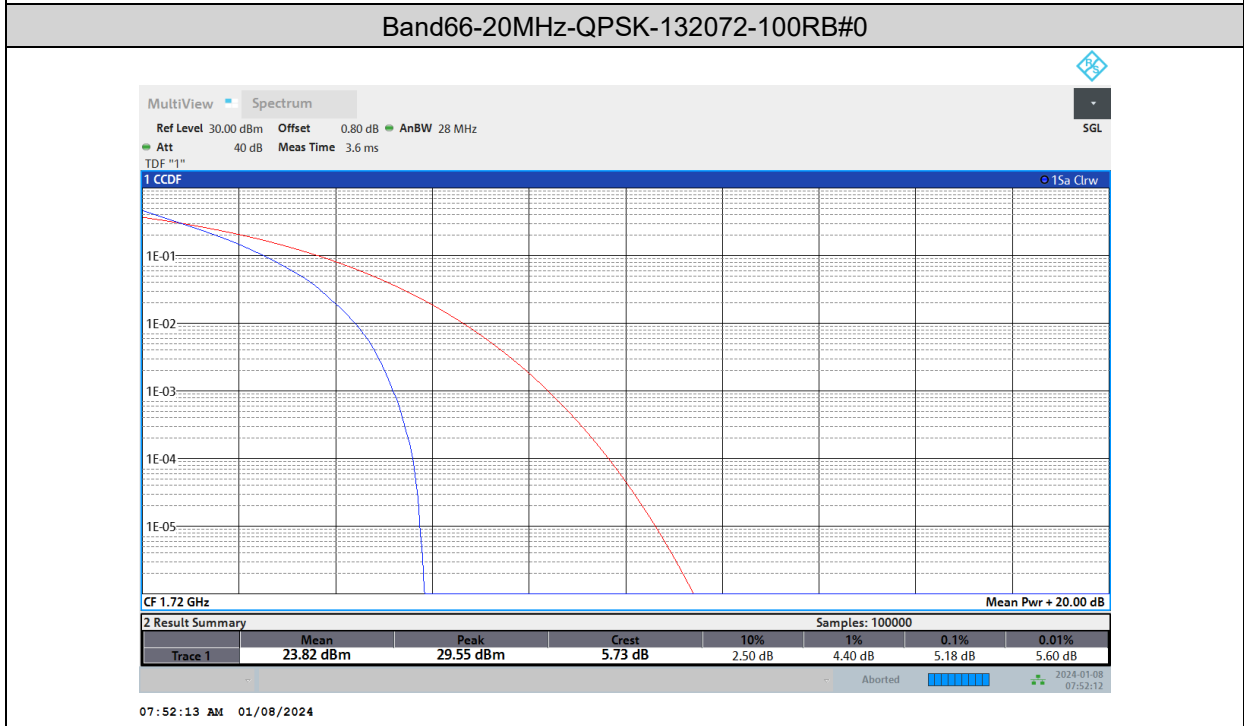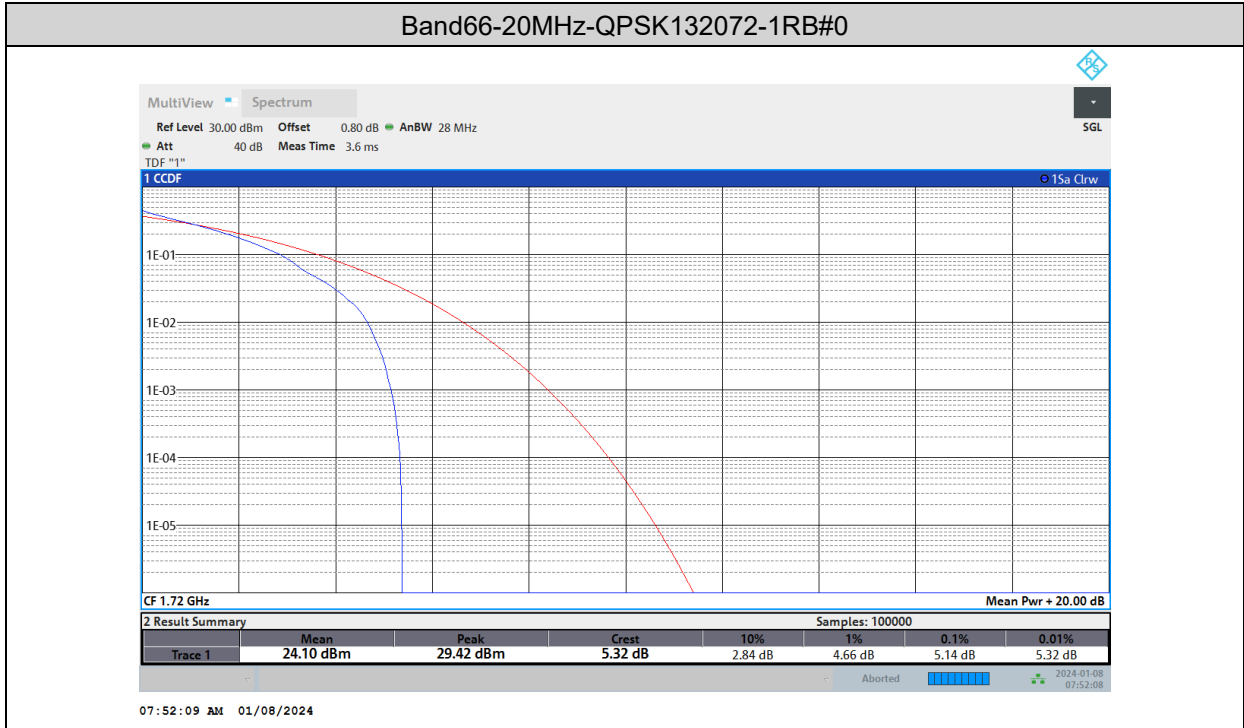


Band66-20MHz-16QAM-132072-1RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

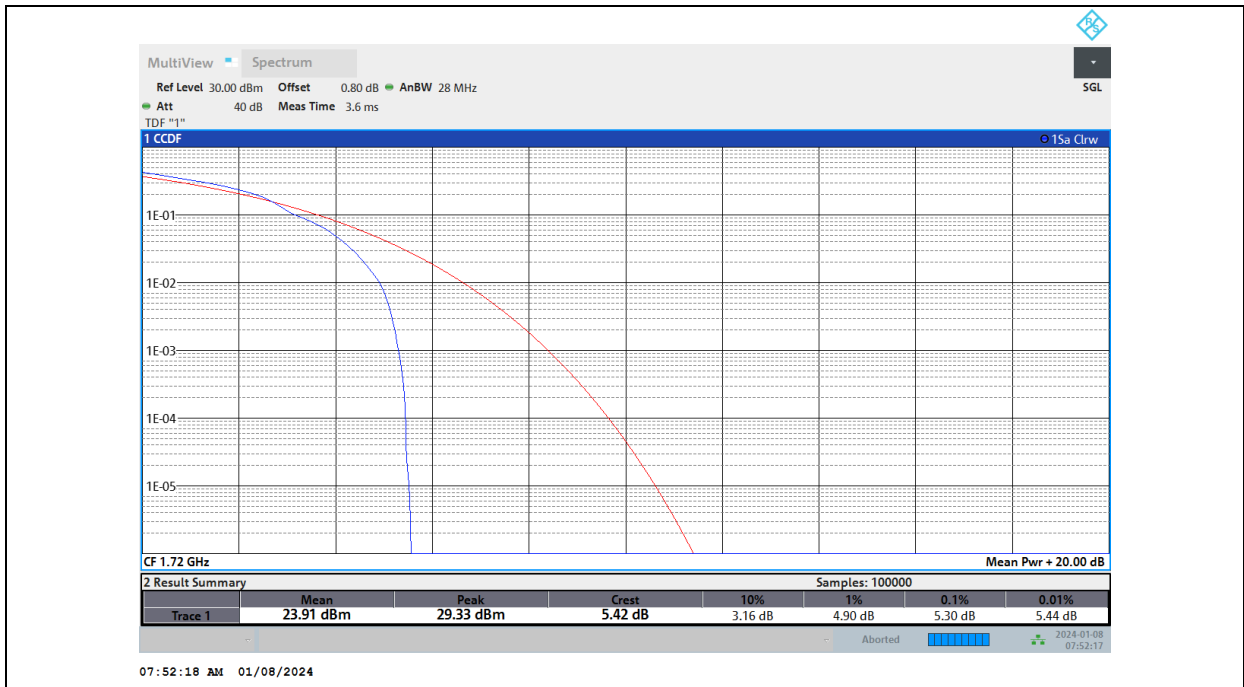

Band66-20MHz-16QAM-132072-100RB#0

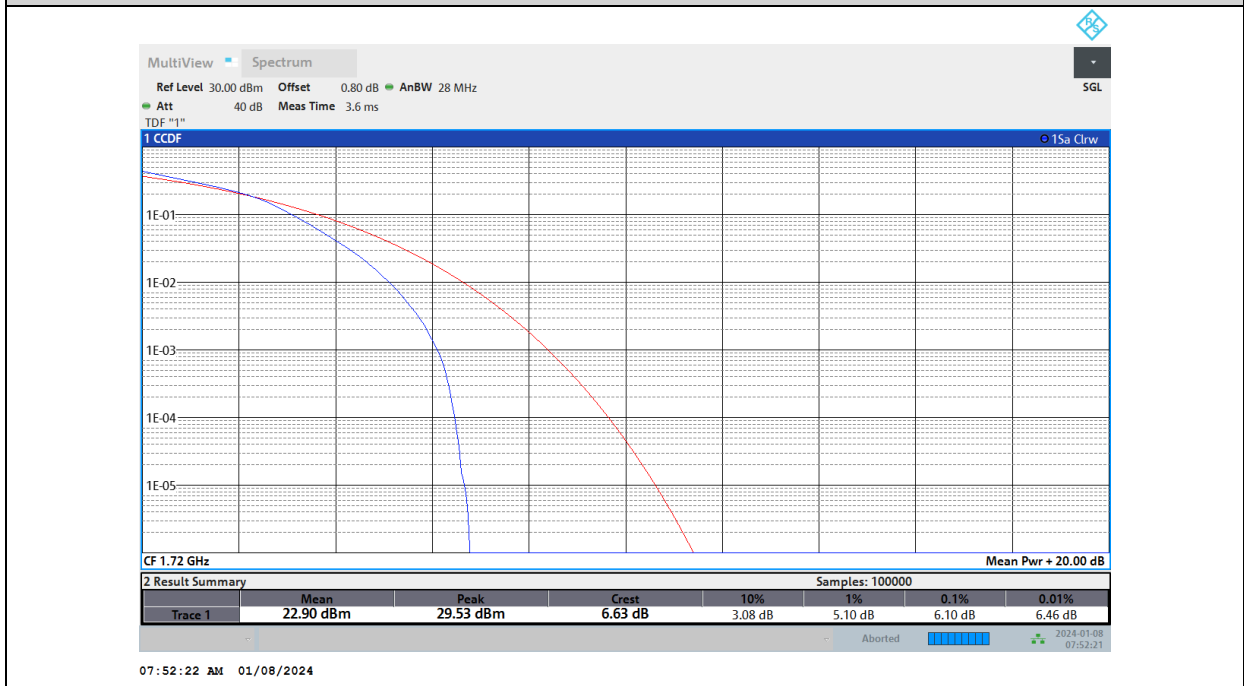


Band66-20MHz-64QAM-132072-1RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

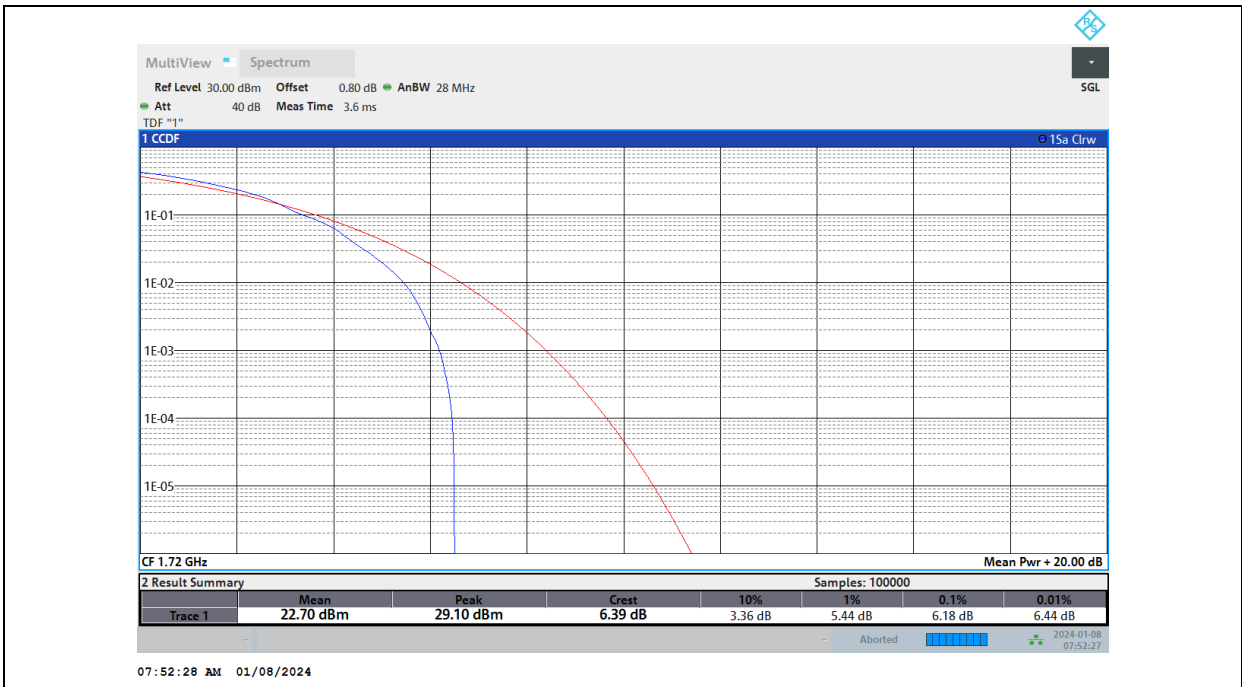

Band66-20MHz-64QAM-132072-100RB#0

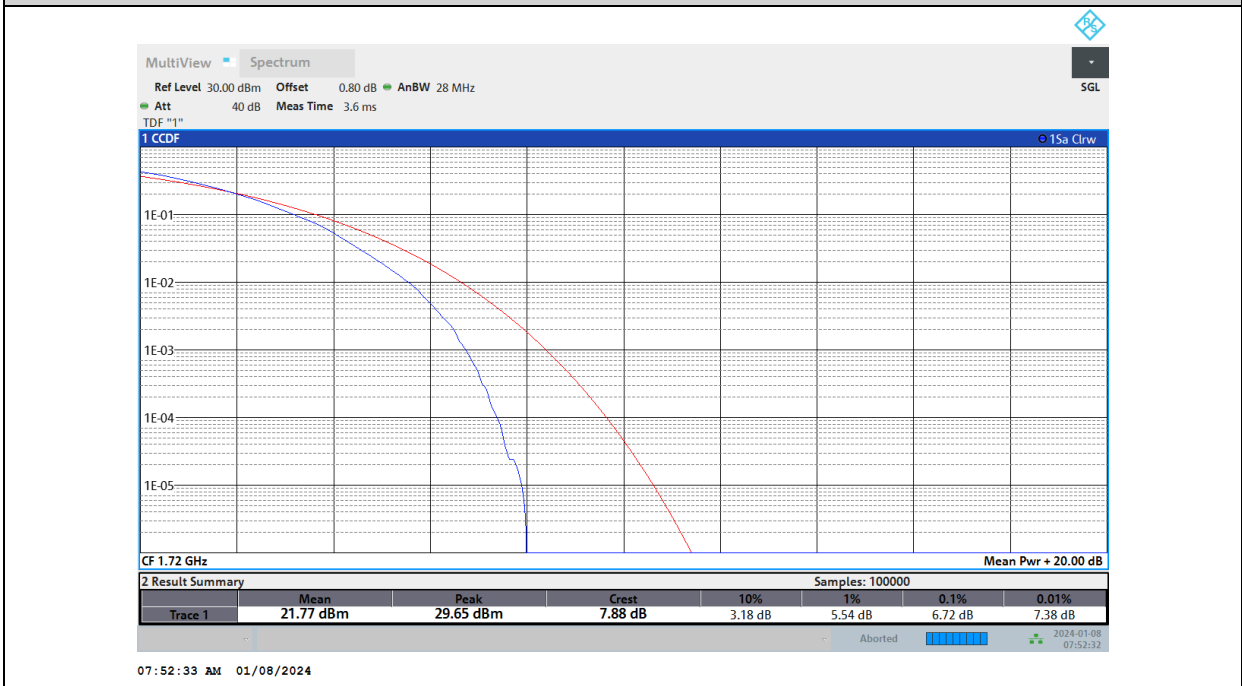


Band66-20MHz-QPSK132322-1RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

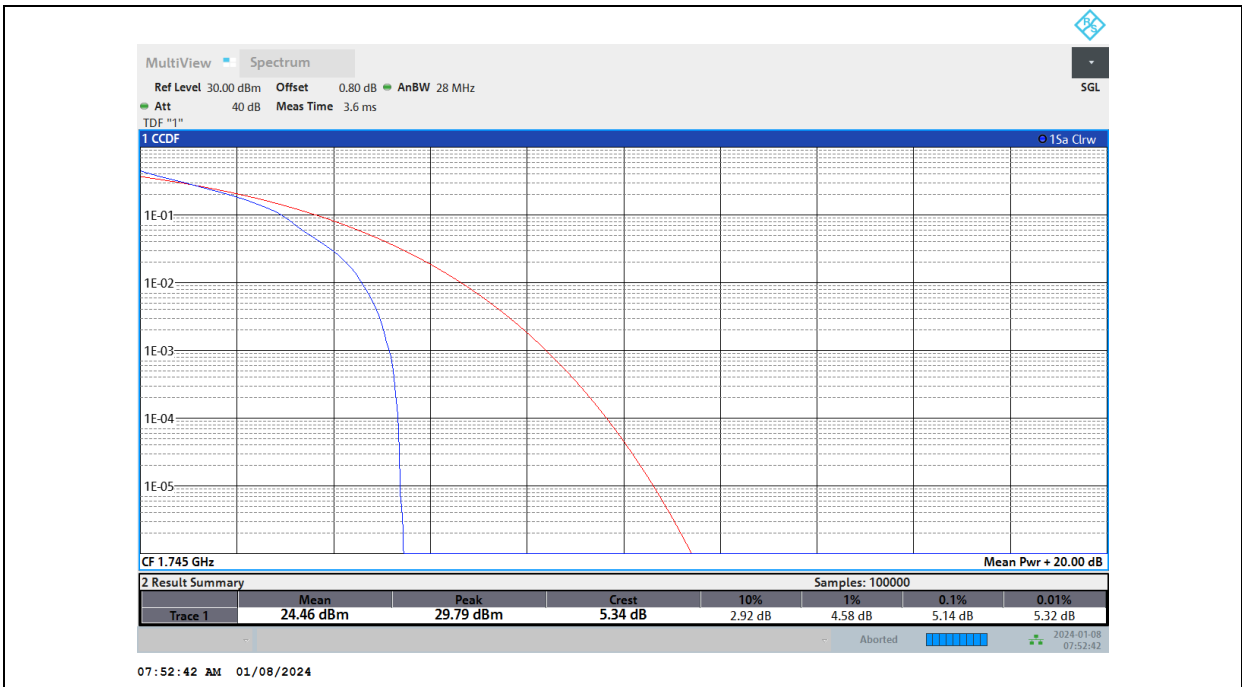

Band66-20MHz-QPSK-132322-100RB#0

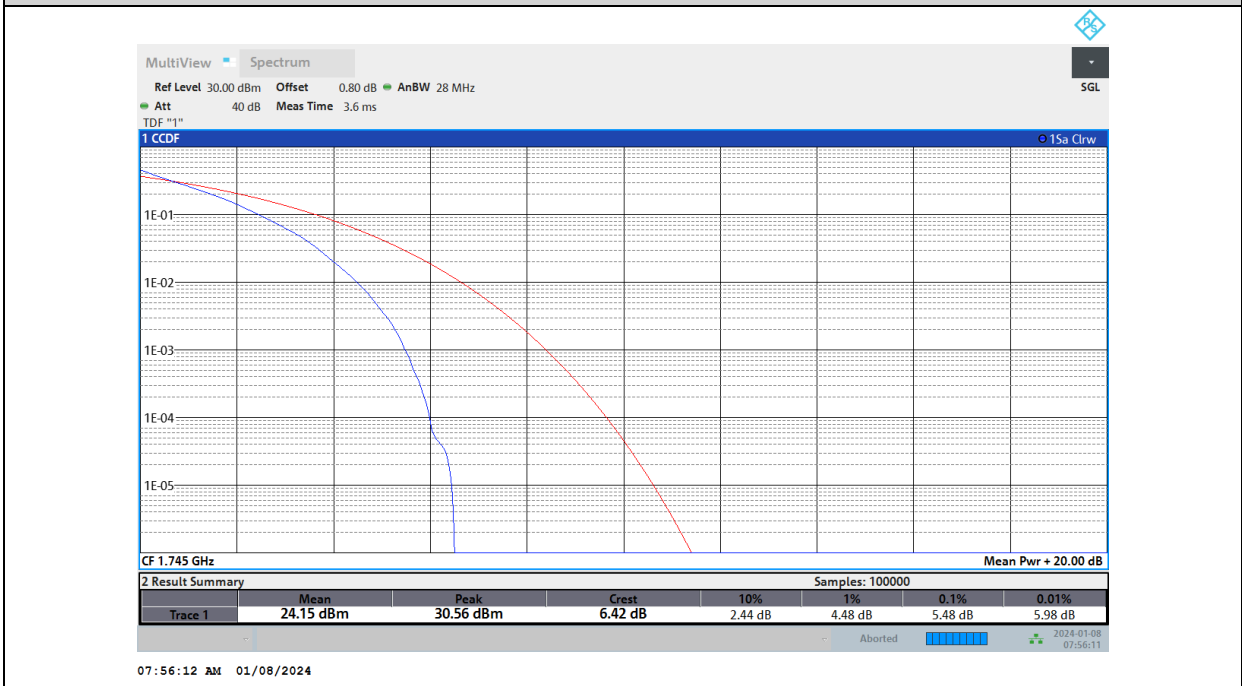


Band66-20MHz-16QAM-132322-1RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

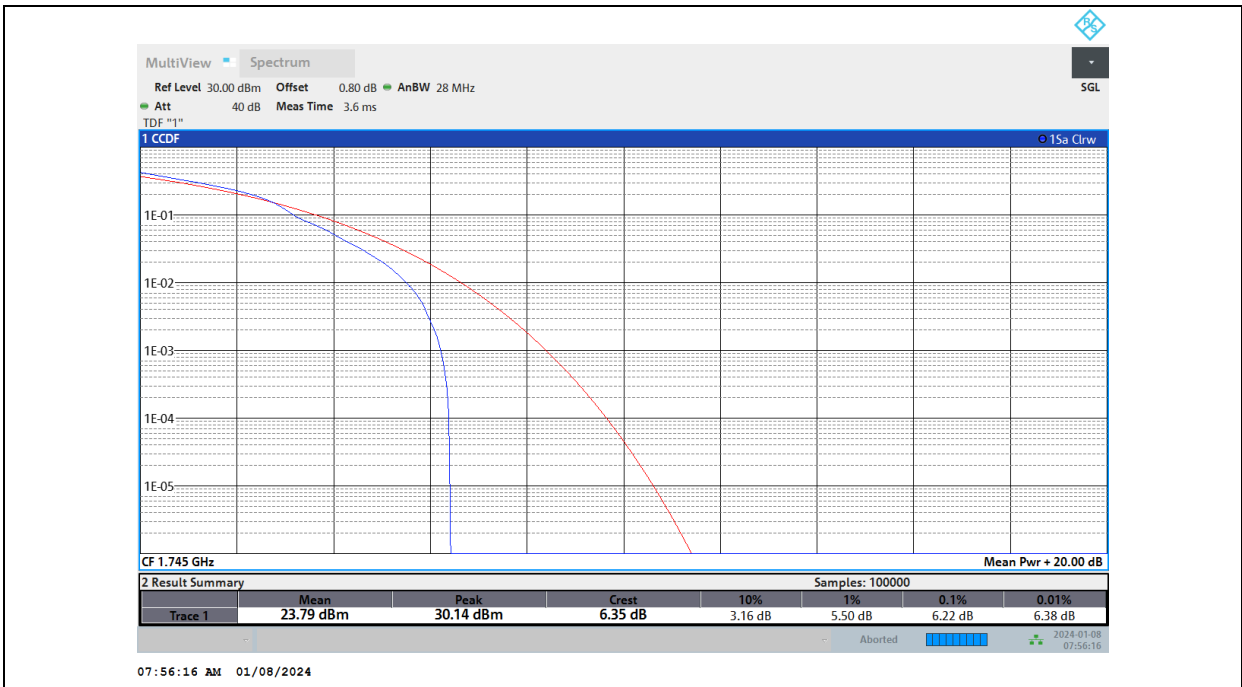

Band66-20MHz-16QAM-132322-100RB#0

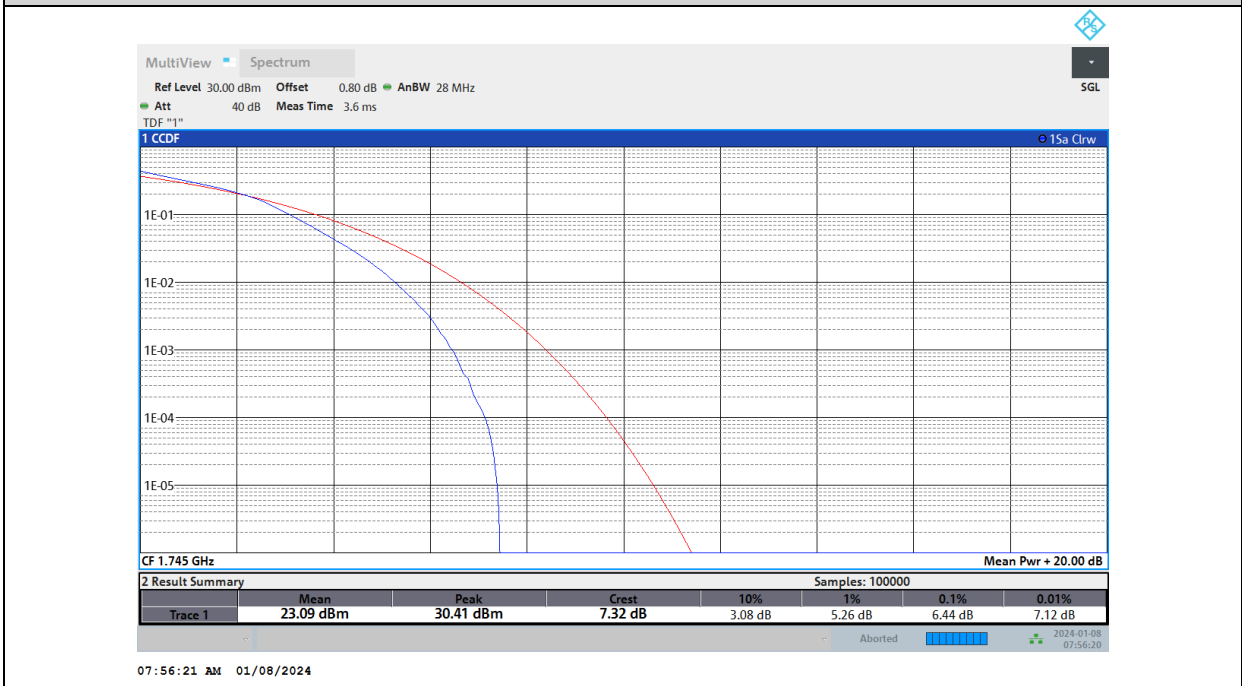


Band66-20MHz-64QAM-132322-1RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

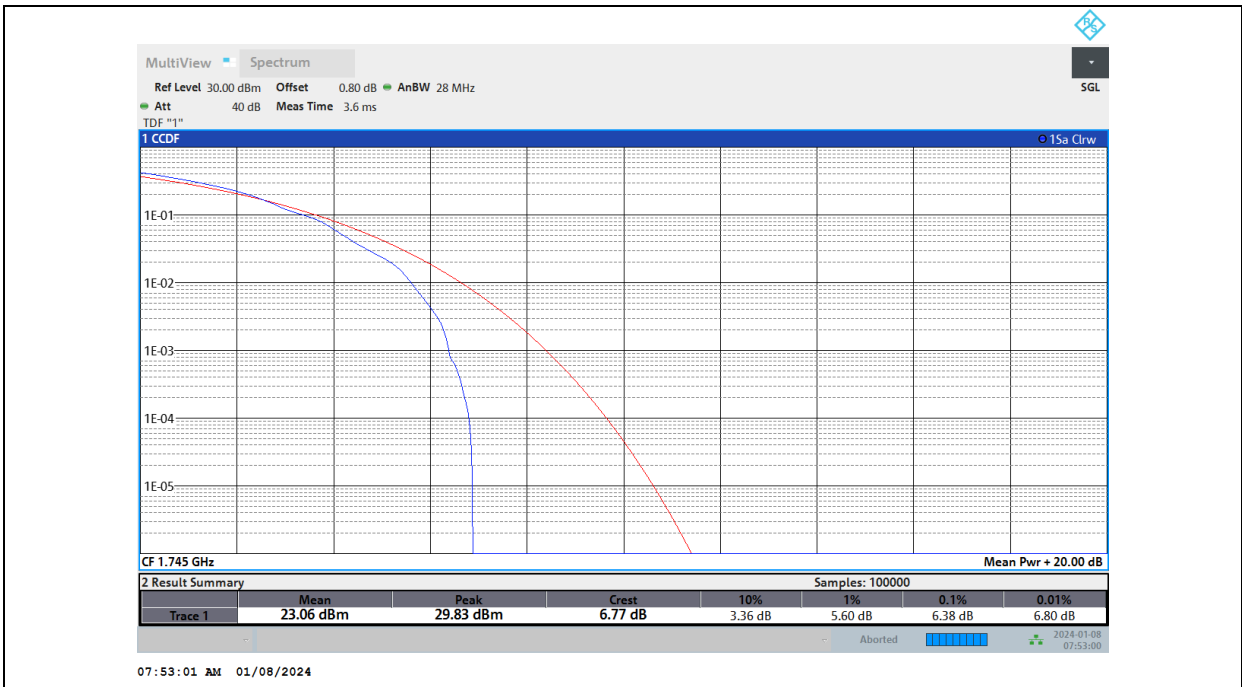

Band66-20MHz-64QAM-132322-100RB#0

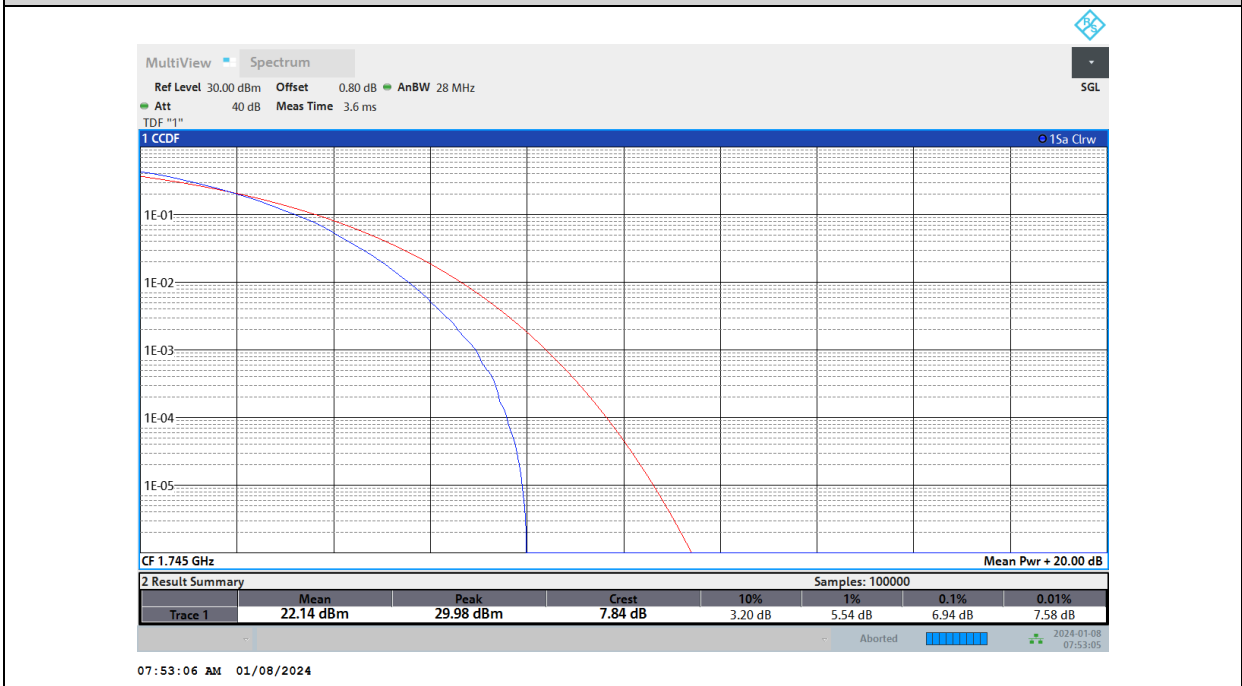


Band66-20MHz-QPSK-132572-1RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

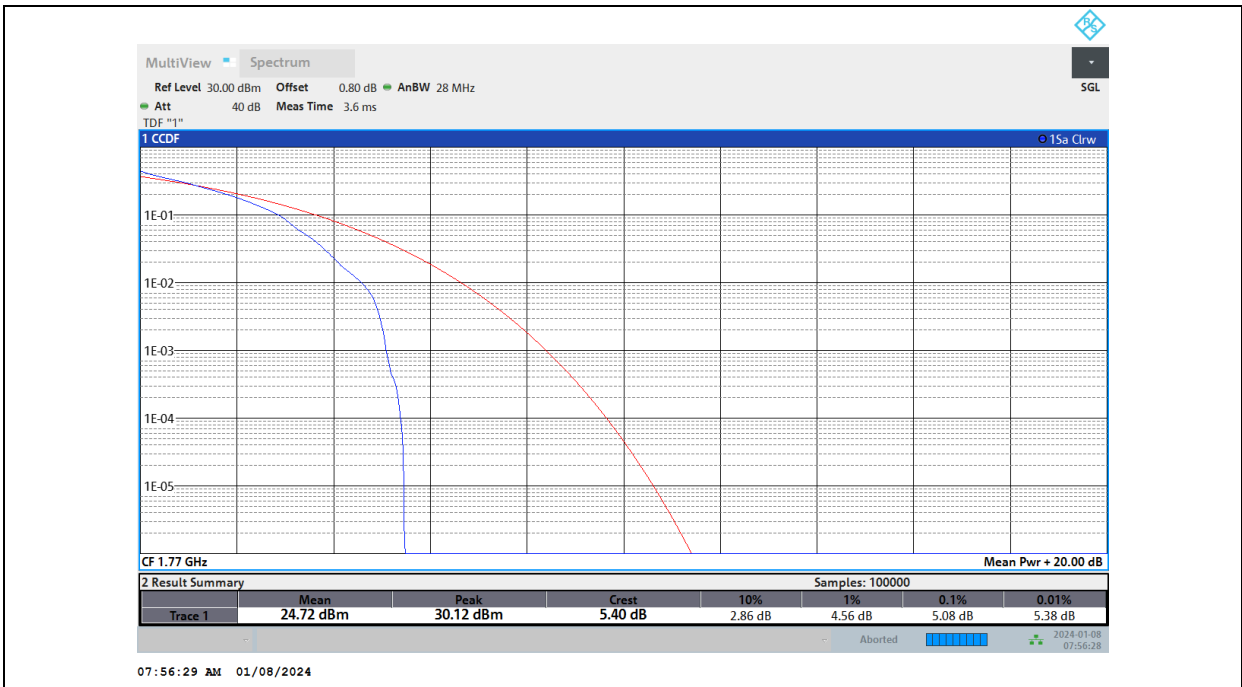

Band66-20MHz-QPSK-132572-100RB#0

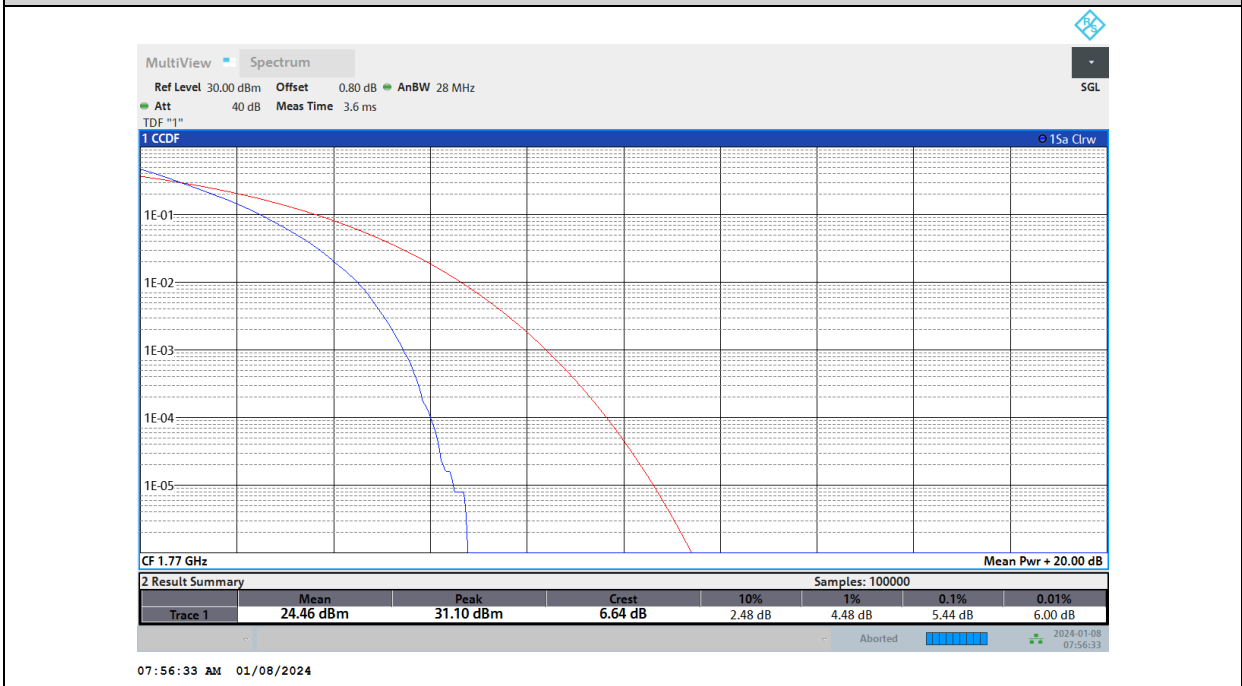


Band66-20MHz-16QAM-132572-1RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

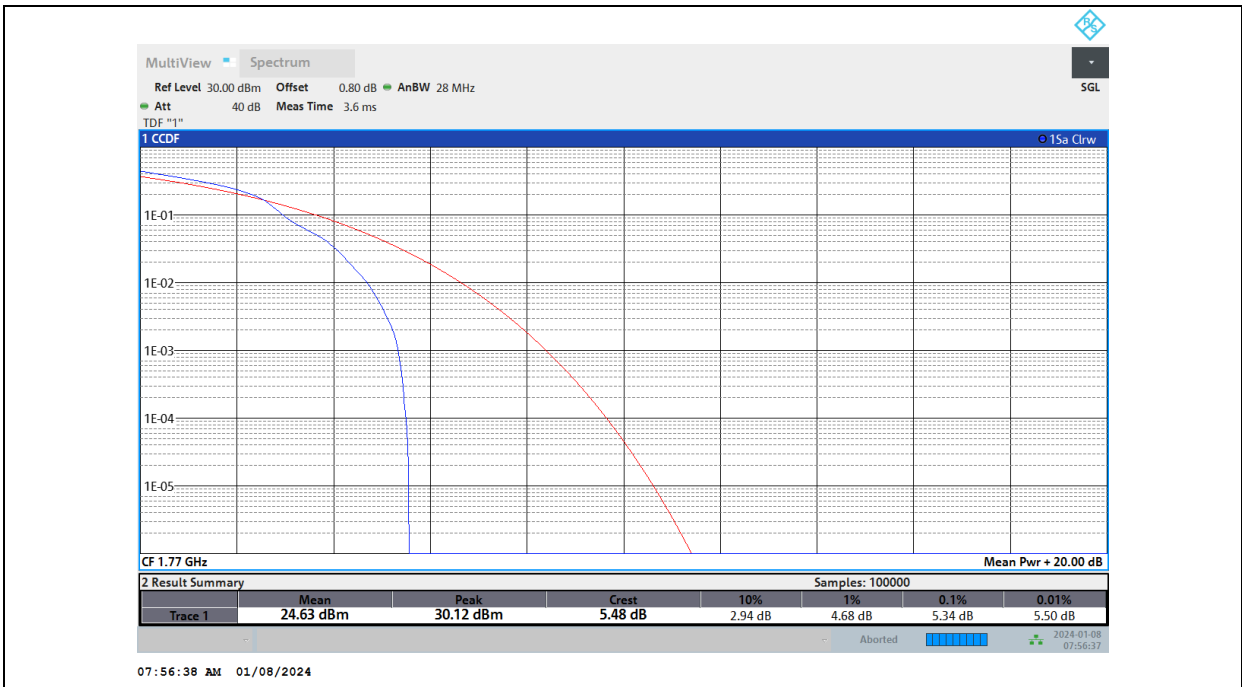

Band66-20MHz-16QAM-132572-100RB#0

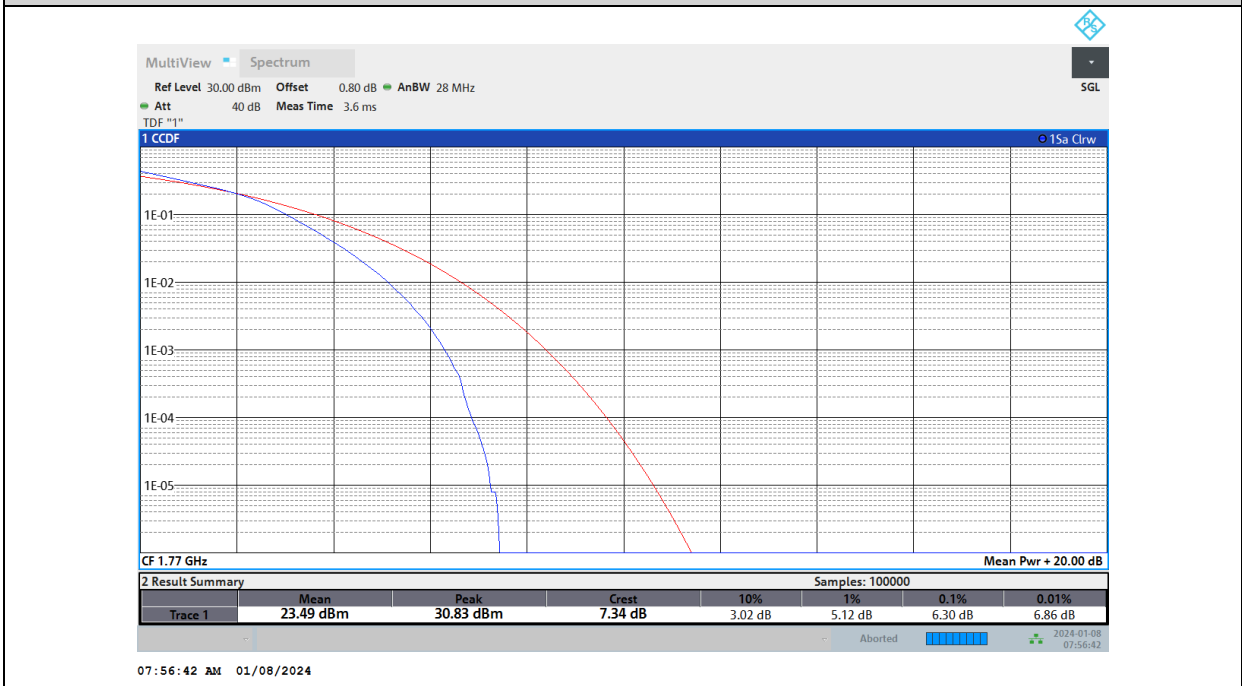


Band66-20MHz-64QAM-132572-1RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

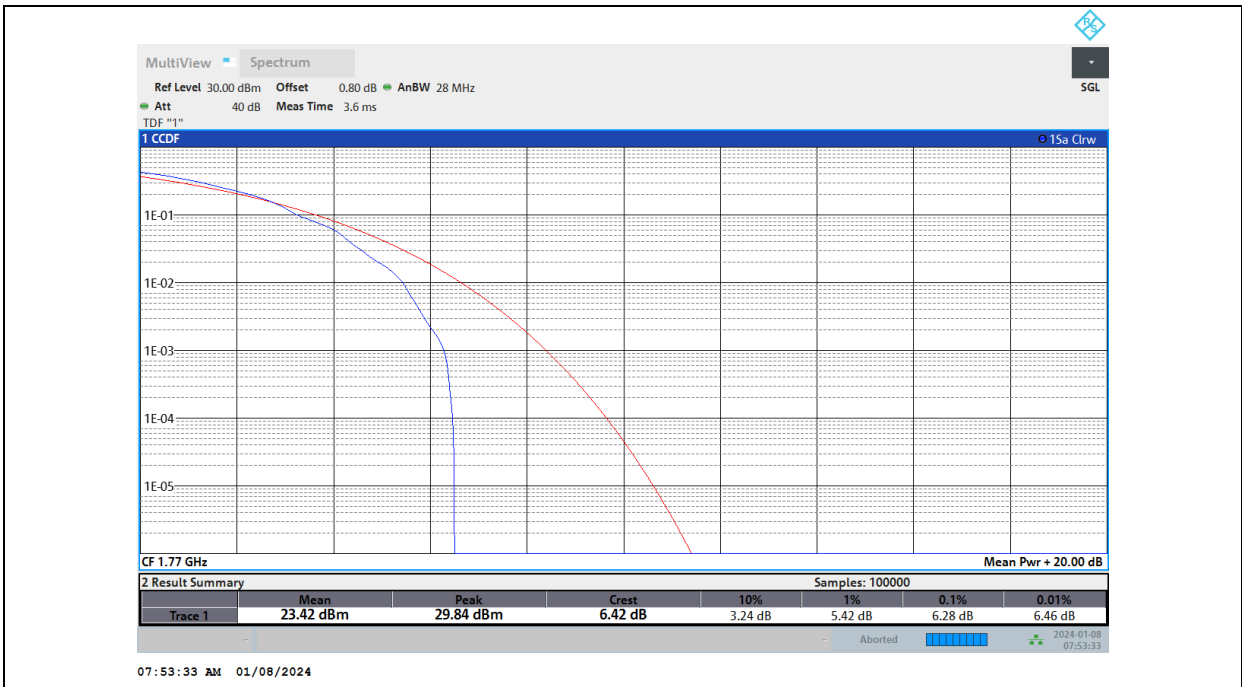

Band66-20MHz-64QAM-132572-100RB#0

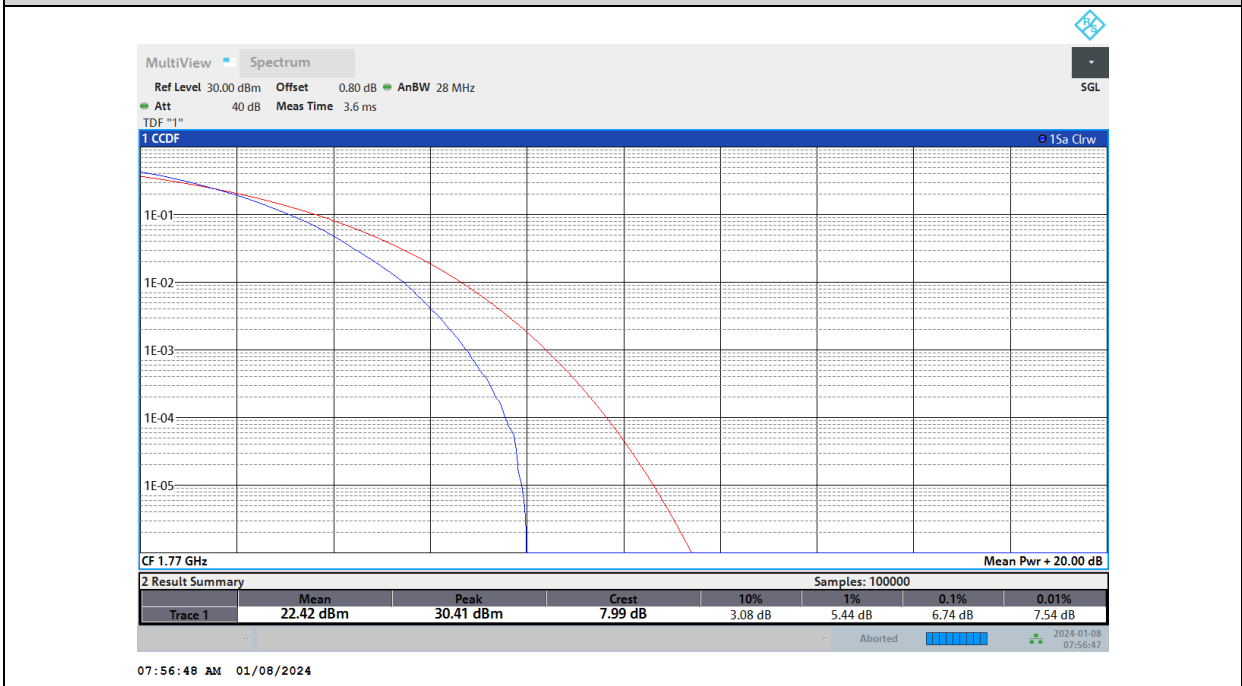



Test Report No.: PSU-NQN2311090109RF04

26DB BANDWIDTH AND OCCUPIED BANDWIDTH

Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
Band66	1.4MHz	QPSK	131979	6RB#0	1.091	1.27	PASS
Band66	1.4MHz	16QAM	131979	6RB#0	1.088	1.29	PASS
Band66	1.4MHz	64QAM	131979	6RB#0	1.096	1.28	PASS
Band66	1.4MHz	QPSK	132322	6RB#0	1.094	1.27	PASS
Band66	1.4MHz	16QAM	132322	6RB#0	1.089	1.29	PASS
Band66	1.4MHz	64QAM	132322	6RB#0	1.086	1.28	PASS
Band66	1.4MHz	QPSK	132665	6RB#0	1.085	1.27	PASS
Band66	1.4MHz	16QAM	132665	6RB#0	1.092	1.30	PASS
Band66	1.4MHz	64QAM	132665	6RB#0	1.084	1.30	PASS
Band66	3MHz	QPSK	131987	15RB#0	2.694	2.93	PASS
Band66	3MHz	16QAM	131987	15RB#0	2.691	2.96	PASS
Band66	3MHz	64QAM	131987	15RB#0	2.693	2.93	PASS
Band66	3MHz	QPSK	132322	15RB#0	2.694	2.93	PASS
Band66	3MHz	16QAM	132322	15RB#0	2.688	2.96	PASS
Band66	3MHz	64QAM	132322	15RB#0	2.687	2.94	PASS
Band66	3MHz	QPSK	132657	15RB#0	2.688	2.94	PASS
Band66	3MHz	16QAM	132657	15RB#0	2.685	2.95	PASS
Band66	3MHz	64QAM	132657	15RB#0	2.690	2.94	PASS
Band66	5MHz	QPSK	131997	25RB#0	4.494	4.95	PASS
Band66	5MHz	16QAM	131997	25RB#0	4.484	4.87	PASS
Band66	5MHz	64QAM	131997	25RB#0	4.480	4.92	PASS
Band66	5MHz	QPSK	132322	25RB#0	4.487	4.95	PASS
Band66	5MHz	16QAM	132322	25RB#0	4.490	4.87	PASS
Band66	5MHz	64QAM	132322	25RB#0	4.488	4.95	PASS
Band66	5MHz	QPSK	132647	25RB#0	4.474	4.88	PASS
Band66	5MHz	16QAM	132647	25RB#0	4.482	4.96	PASS
Band66	5MHz	64QAM	132647	25RB#0	4.477	4.88	PASS
Band66	10MHz	QPSK	132022	50RB#0	8.957	9.80	PASS
Band66	10MHz	16QAM	132022	50RB#0	8.944	9.62	PASS
Band66	10MHz	64QAM	132022	50RB#0	8.941	9.74	PASS
Band66	10MHz	QPSK	132322	50RB#0	8.940	9.77	PASS
Band66	10MHz	16QAM	132322	50RB#0	8.948	9.68	PASS
Band66	10MHz	64QAM	132322	50RB#0	8.947	9.71	PASS
Band66	10MHz	QPSK	132622	50RB#0	8.941	9.80	PASS
Band66	10MHz	16QAM	132622	50RB#0	8.941	9.62	PASS
Band66	10MHz	64QAM	132622	50RB#0	8.943	9.68	PASS
Band66	15MHz	QPSK	132047	75RB#0	13.468	14.70	PASS
Band66	15MHz	16QAM	132047	75RB#0	13.444	14.52	PASS
Band66	15MHz	64QAM	132047	75RB#0	13.407	14.56	PASS
Band66	15MHz	QPSK	132322	75RB#0	13.396	14.65	PASS
Band66	15MHz	16QAM	132322	75RB#0	13.442	14.56	PASS




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2311090109RF04

Band66	15MHz	64QAM	132322	75RB#0	13.447	14.56	PASS
Band66	15MHz	QPSK	132597	75RB#0	13.449	14.65	PASS
Band66	15MHz	16QAM	132597	75RB#0	13.464	14.65	PASS
Band66	15MHz	64QAM	132597	75RB#0	13.483	14.61	PASS
Band66	20MHz	QPSK	132072	100RB#0	17.891	19.06	PASS
Band66	20MHz	16QAM	132072	100RB#0	17.915	19.24	PASS
Band66	20MHz	64QAM	132072	100RB#0	17.879	19.24	PASS
Band66	20MHz	QPSK	132322	100RB#0	17.869	19.06	PASS
Band66	20MHz	16QAM	132322	100RB#0	17.891	19.24	PASS
Band66	20MHz	64QAM	132322	100RB#0	17.896	19.12	PASS
Band66	20MHz	QPSK	132572	100RB#0	17.932	19.42	PASS
Band66	20MHz	16QAM	132572	100RB#0	17.891	19.18	PASS
Band66	20MHz	64QAM	132572	100RB#0	17.893	19.24	PASS

Test Graphs


Occupied Bandwidth

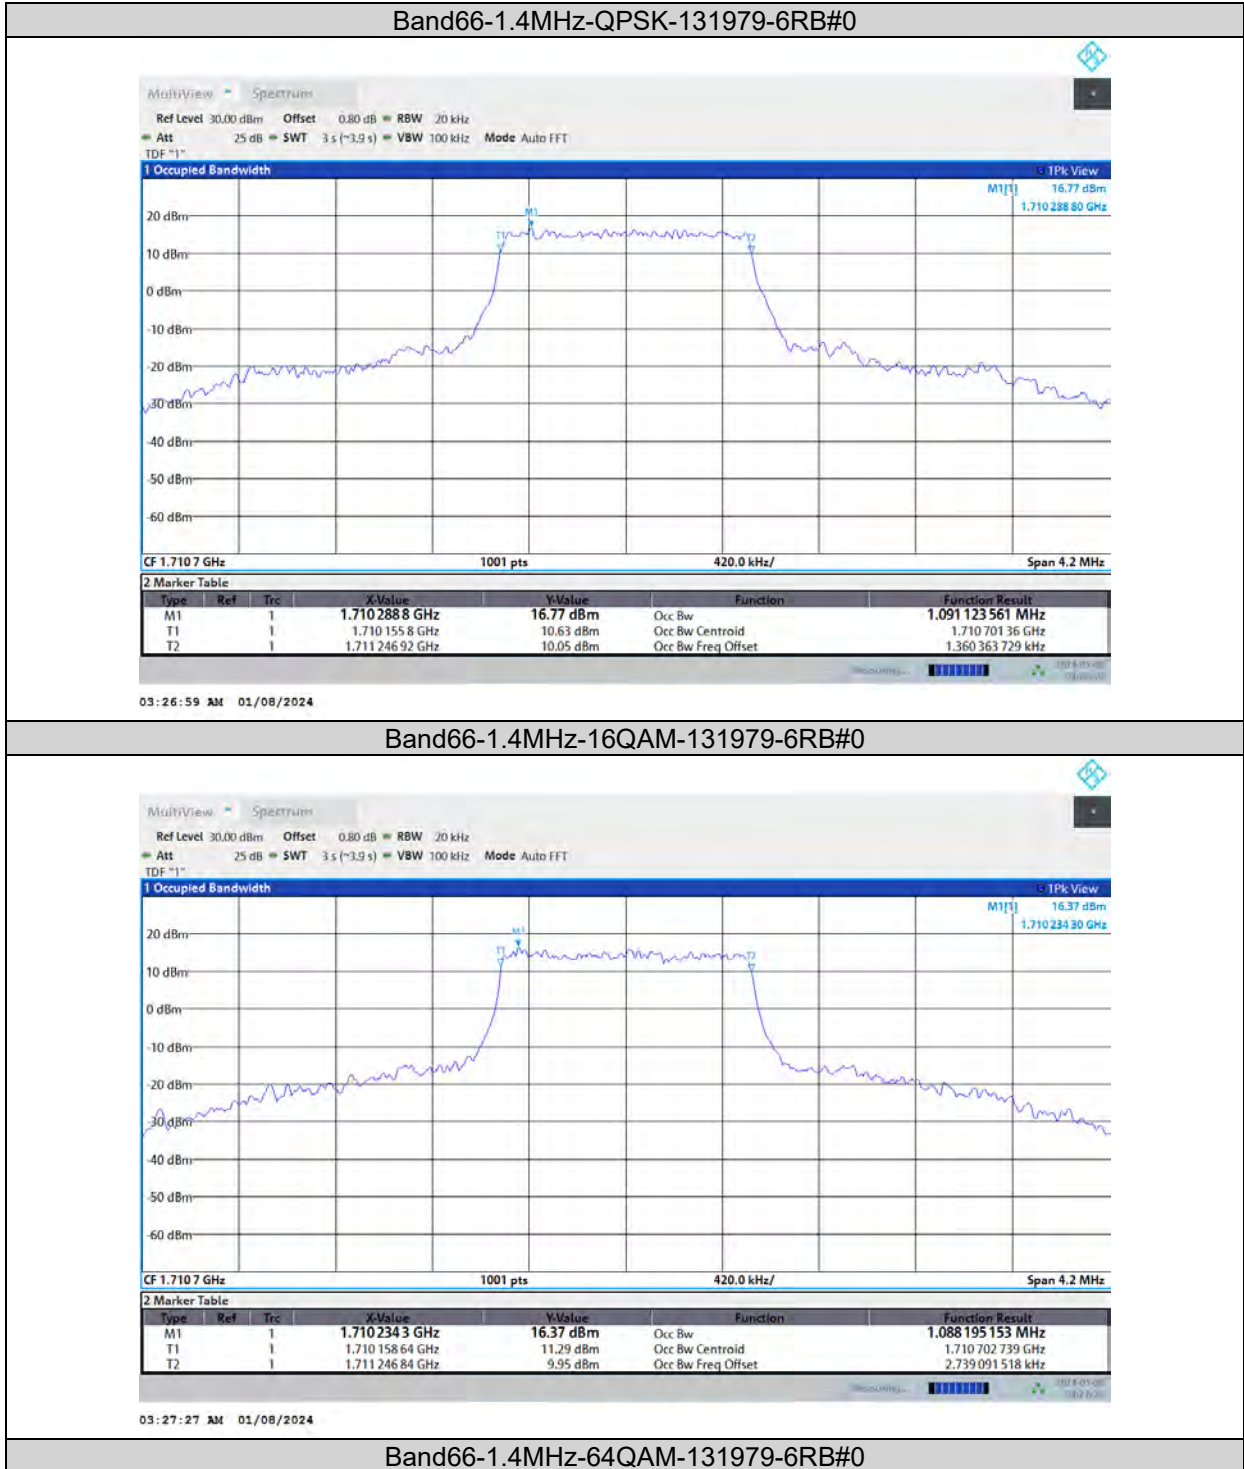



BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

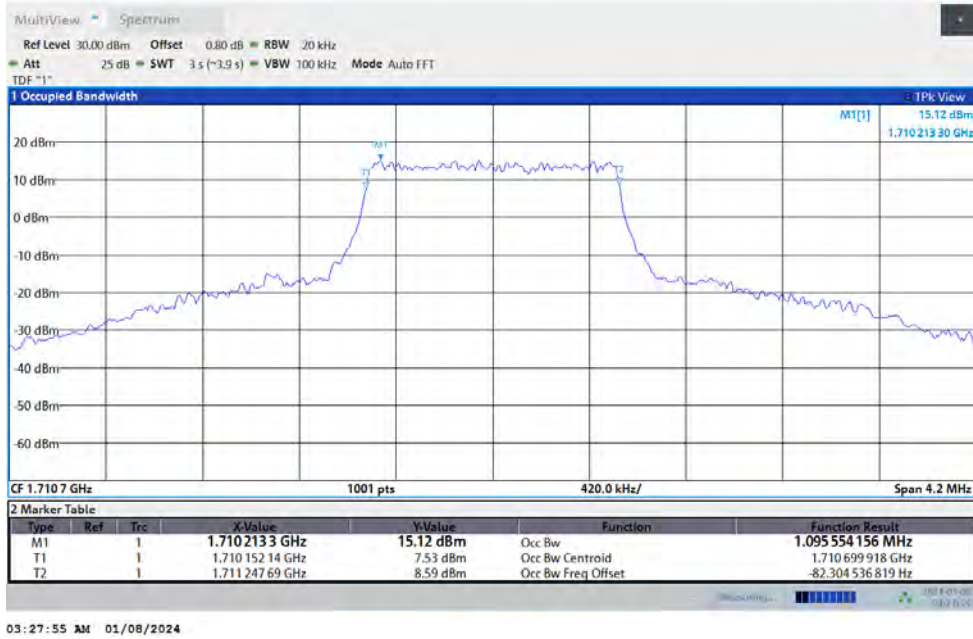

03:27:55 AM 01/08/2024

Band66-1.4MHz-QPSK-132322-6RB#0




03:28:23 AM 01/08/2024

Band66-1.4MHz-16QAM-132322-6RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

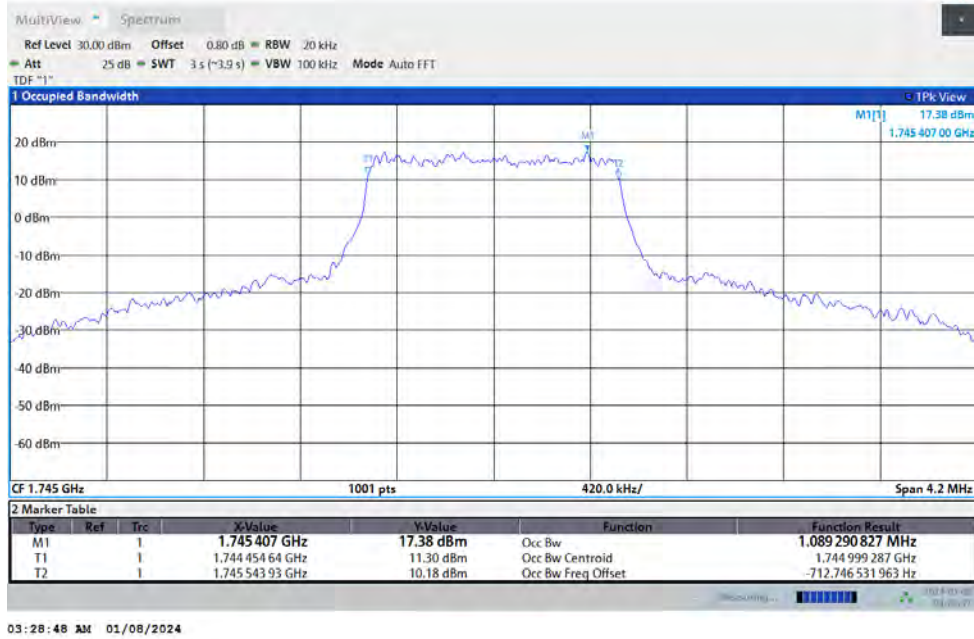

03:28:48 AM 01/08/2024

Band66-1.4MHz-64QAM-132322-6RB#0

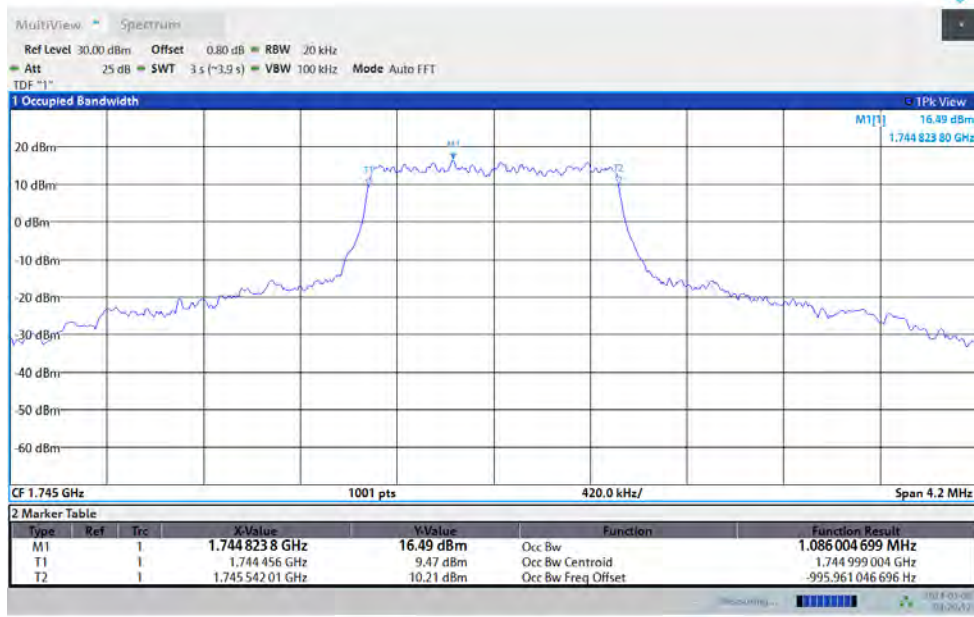


03:29:13 AM 01/08/2024

Band66-1.4MHz-QPSK-132665-6RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

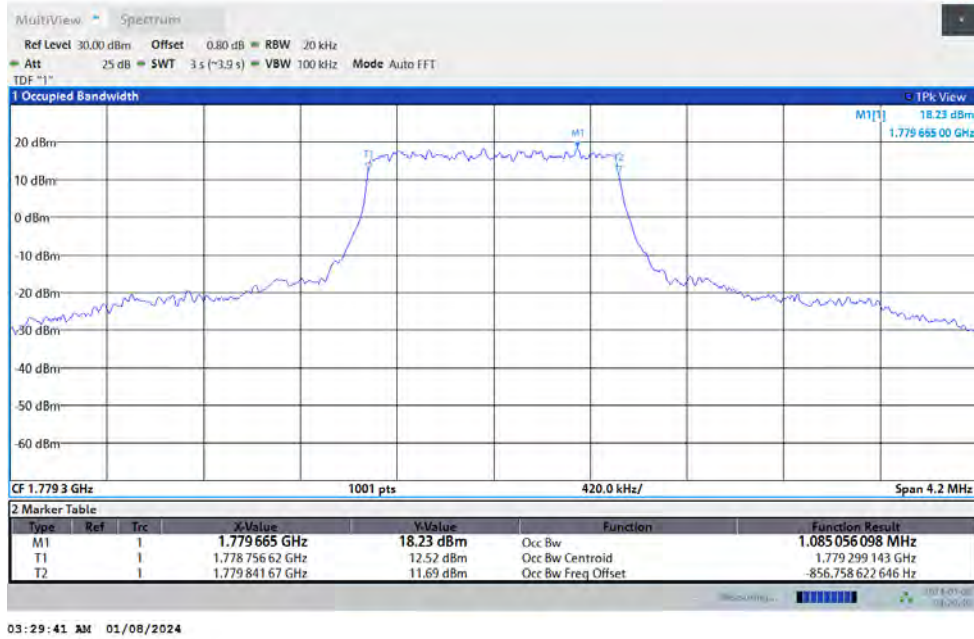

Band66-1.4MHz-16QAM-132665-6RB#0

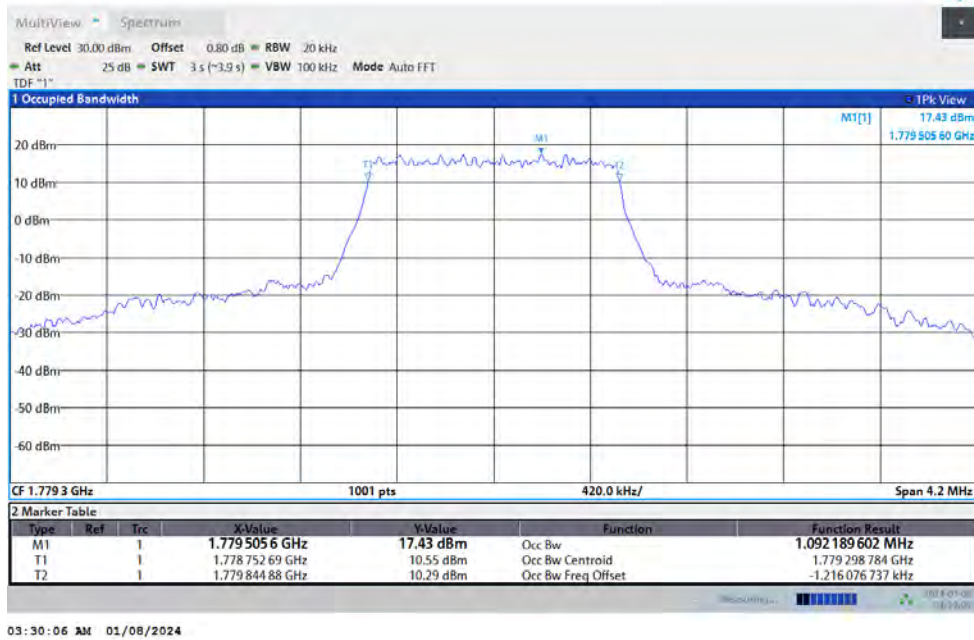


Band66-1.4MHz-64QAM-132665-6RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

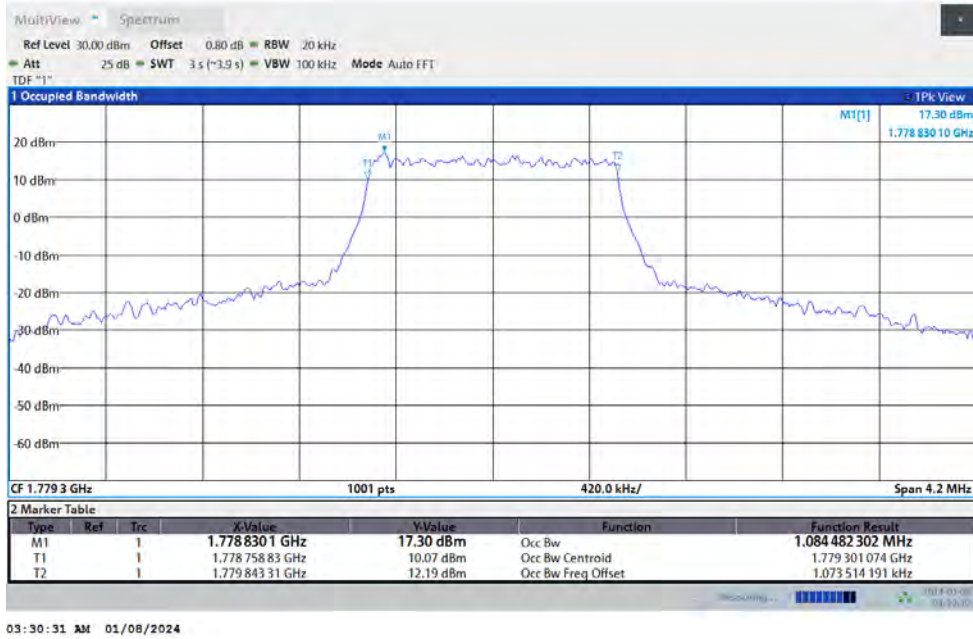

Band66-3MHz-QPSK-131987-15RB#0

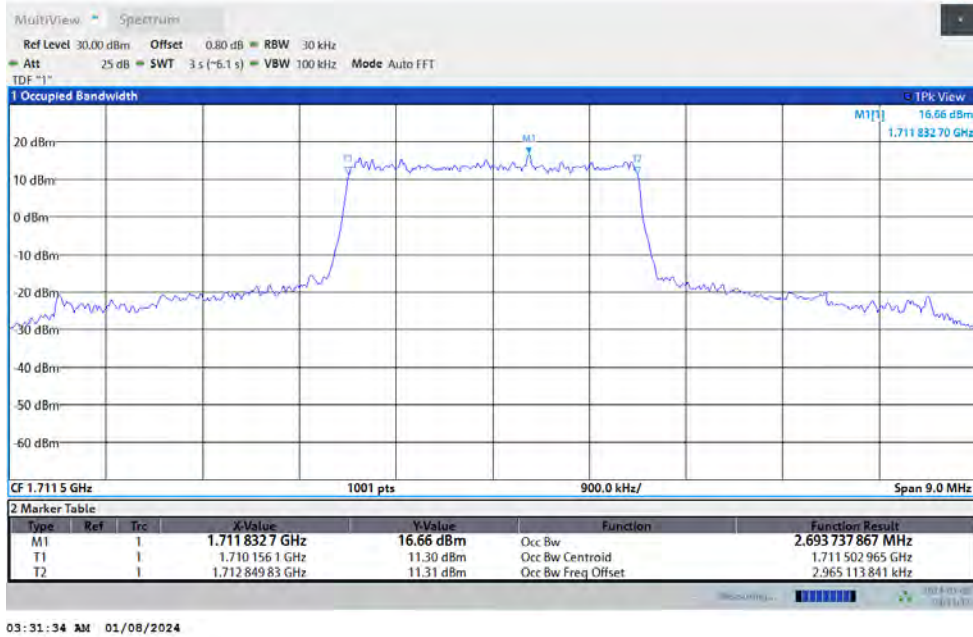


Band66-3MHz-16QAM-131987-15RB#0




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2311090109RF04

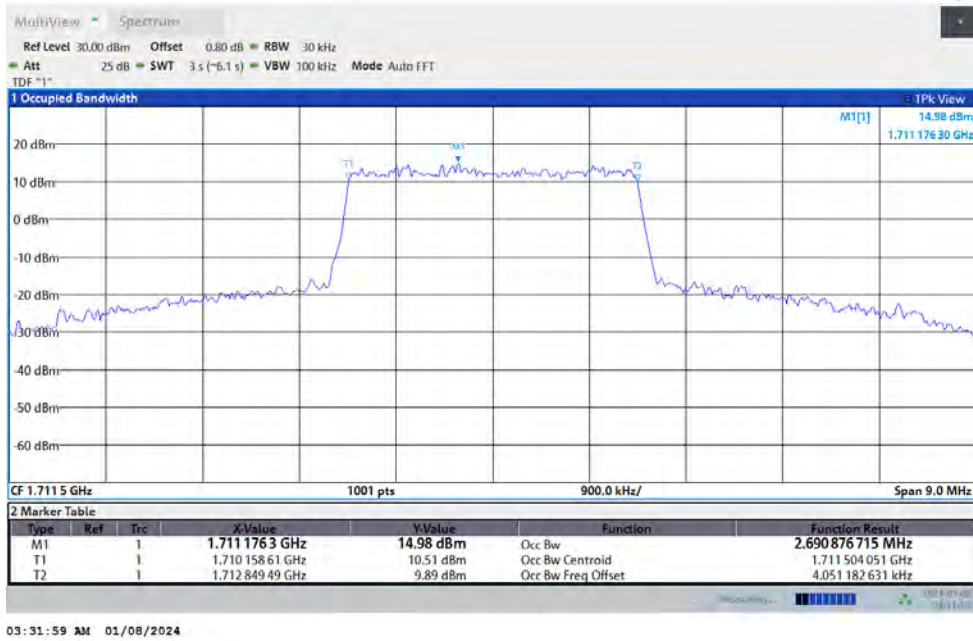

03:31:59 AM 01/08/2024

Band66-3MHz-64QAM-131987-15RB#0

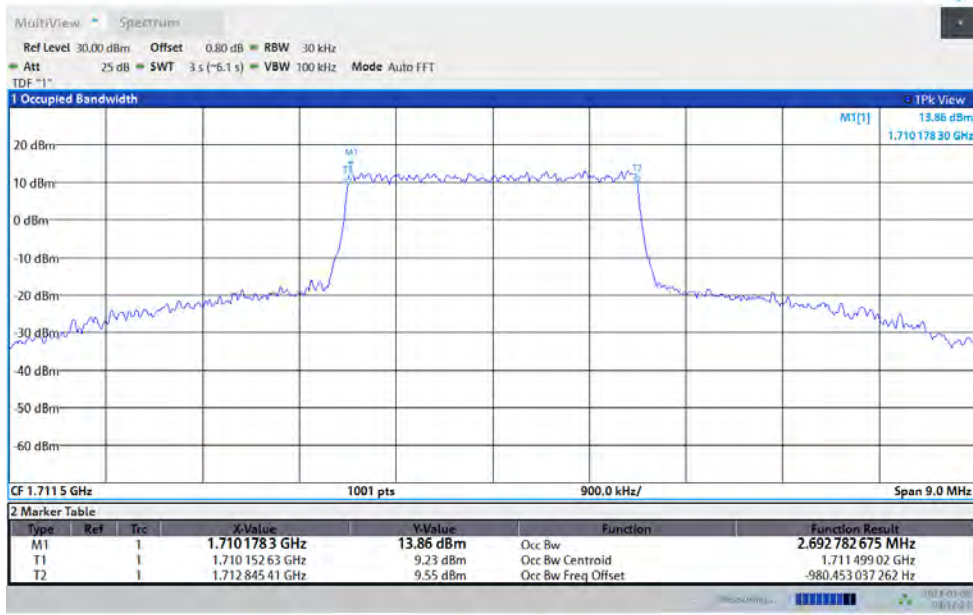

03:32:24 AM 01/08/2024

Band66-3MHz-QPSK-132322-6RB#0



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2311090109RF04



03:32:52 AM 01/08/2024

Band66-3MHz-16QAM-132322-6RB#0




03:33:17 AM 01/08/2024

Band66-3MHz-64QAM-132322-6RB#0



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2311090109RF04

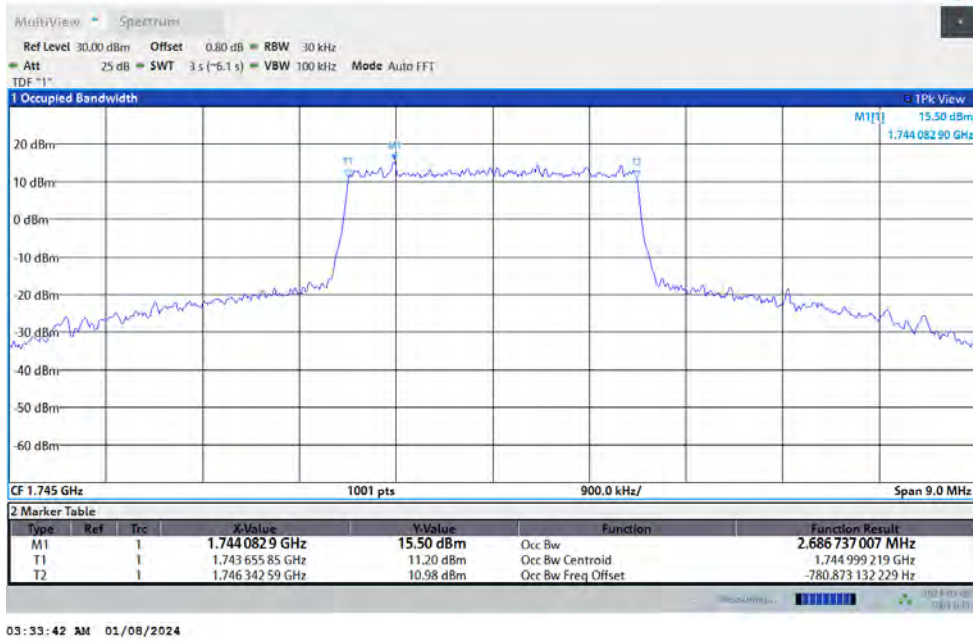

03:33:42 AM 01/08/2024

Band66-3MHz-QPSK-132657-15RB#0




03:34:10 AM 01/08/2024

Band66-3MHz-16QAM-132657-15RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

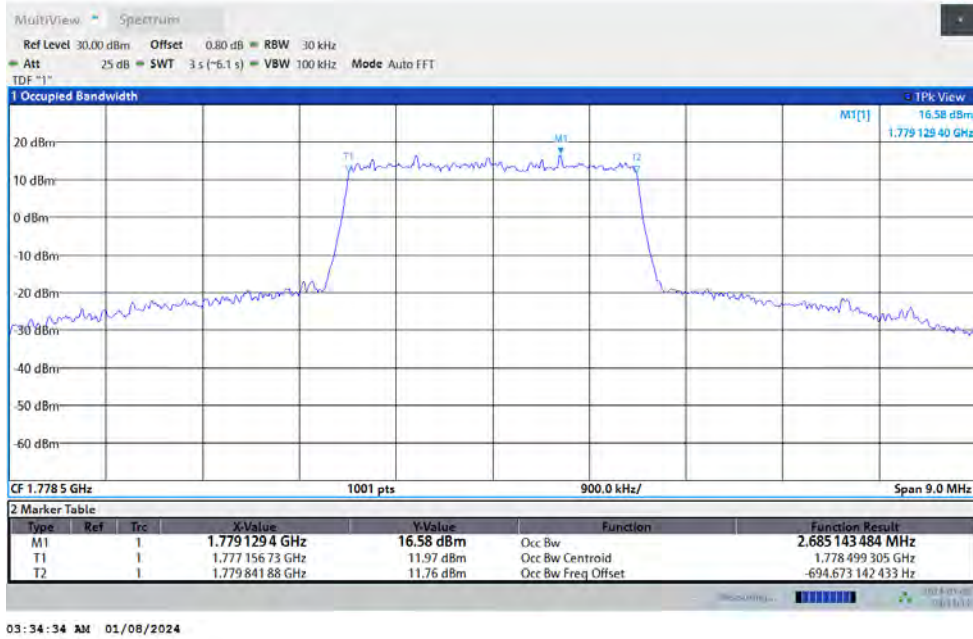

03:34:34 AM 01/08/2024

Band66-3MHz-64QAM-132657-15RB#0

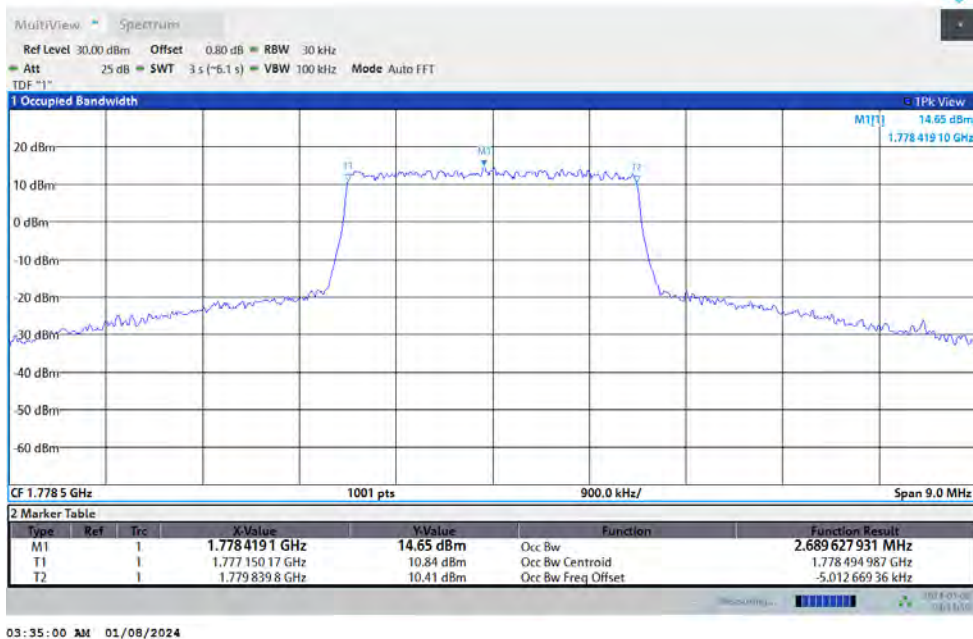


03:35:00 AM 01/08/2024

Band66-5MHz-QPSK-131997-25RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

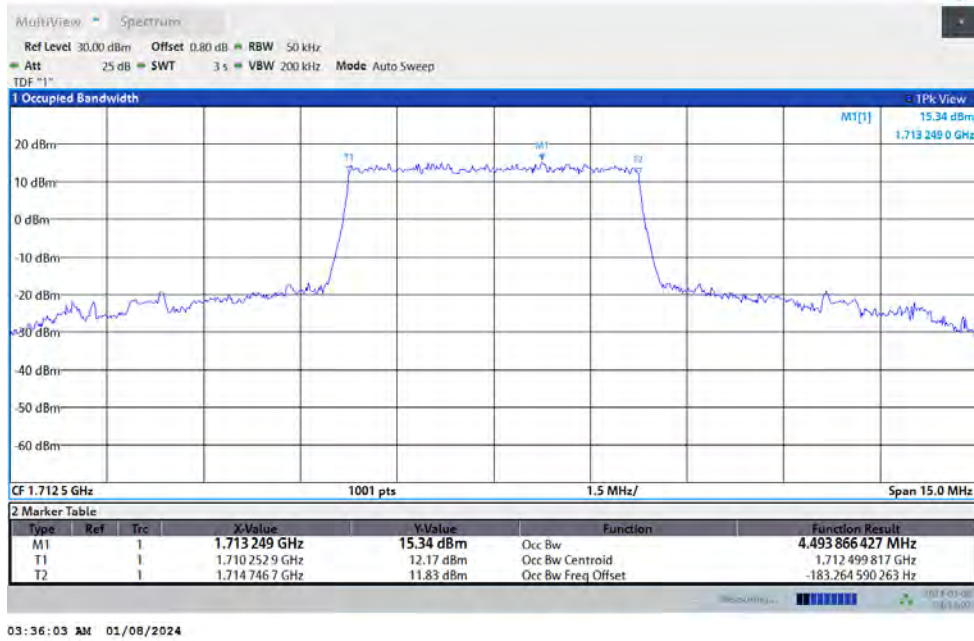

03:36:03 AM 01/08/2024

Band66-5MHz-16QAM-131997-25RB#0

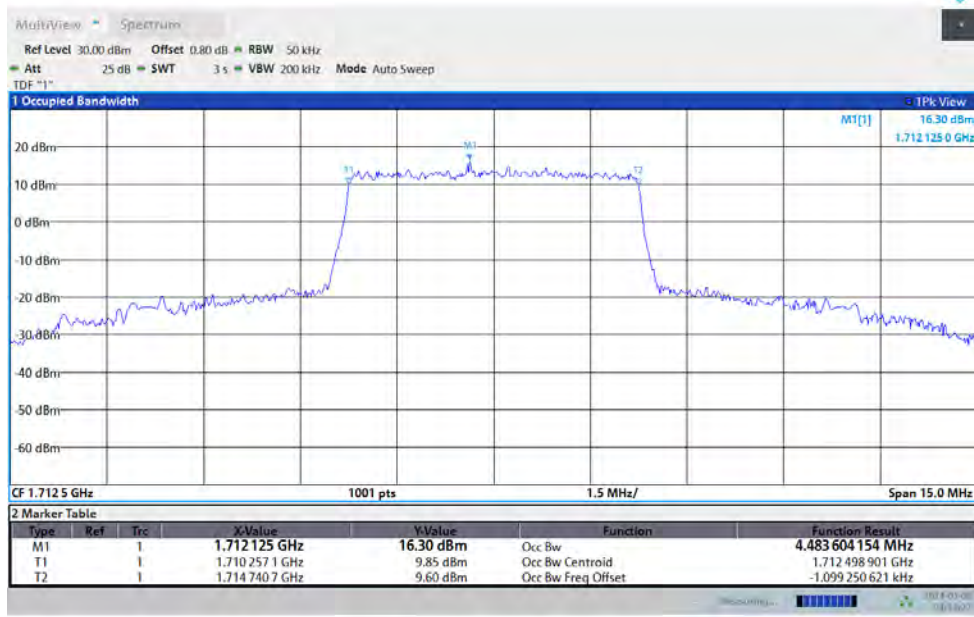

03:36:27 AM 01/08/2024

Band66-5MHz-64QAM-131997-25RB#0



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2311090109RF04



03:36:53 AM 01/08/2024

Band66-5MHz-QPSK-132322-25RB#0



03:37:21 AM 01/08/2024

Band66-5MHz-16QAM-132322-6RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04



03:37:45 AM 01/08/2024

Band66-5MHz-64QAM-132322-6RB#0

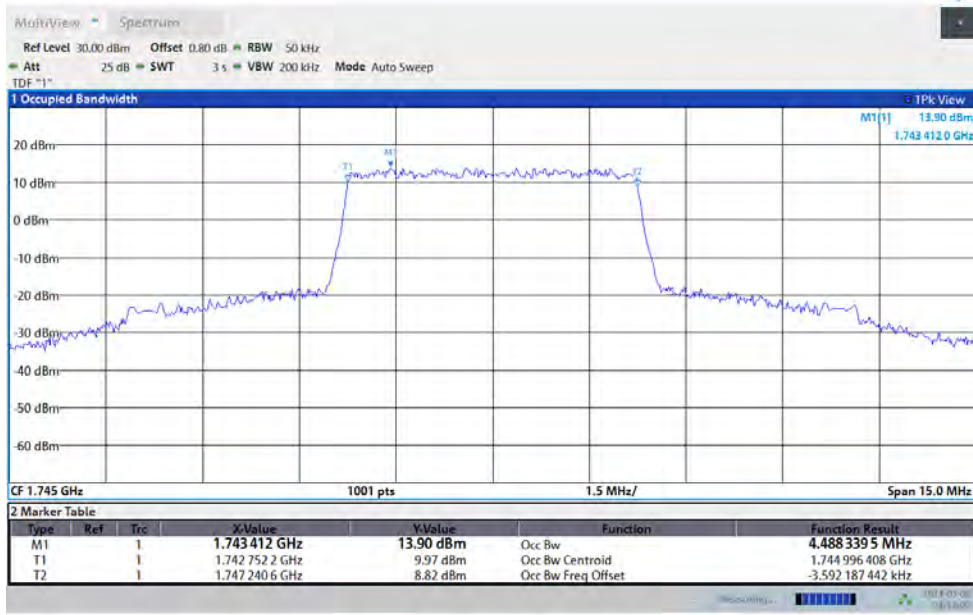


03:38:10 AM 01/08/2024

Band66-5MHz-QPSK-132647-25RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

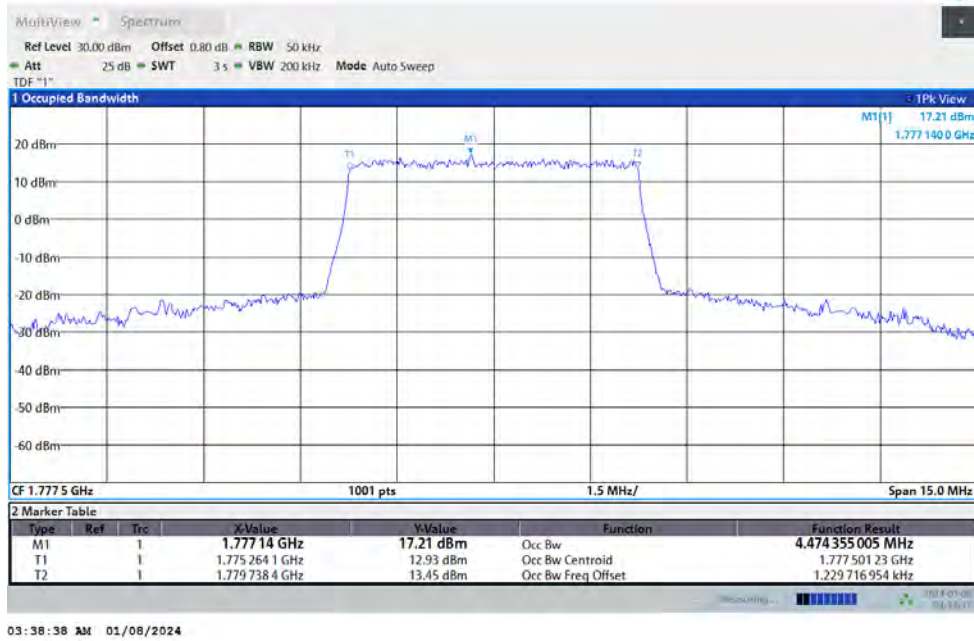

03:38:38 AM 01/08/2024

Band66-5MHz-16QAM-132647-25RB#0

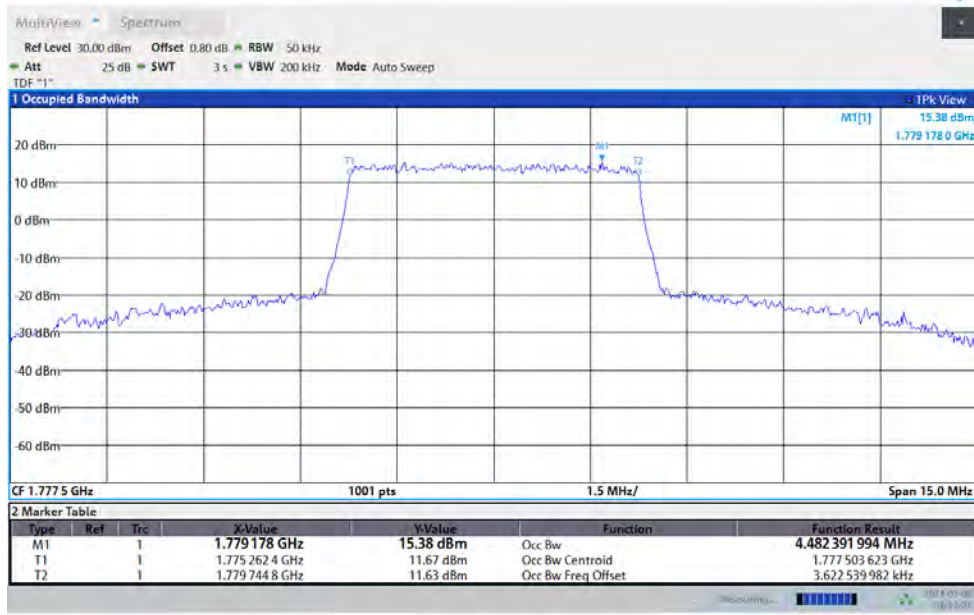


03:39:03 AM 01/08/2024

Band66-5MHz-64QAM-132647-25RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

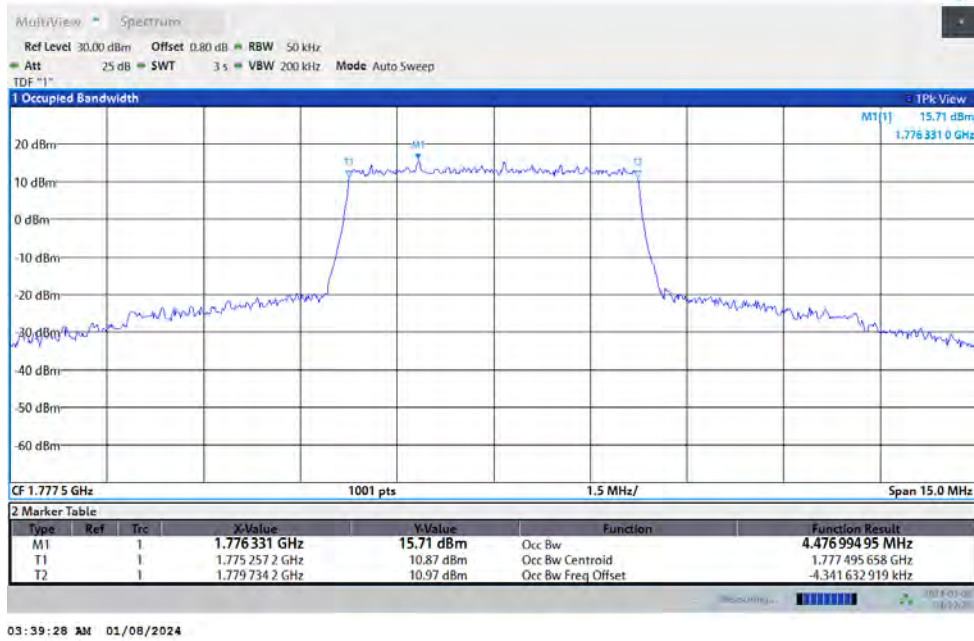

03:39:28 AM 01/08/2024

Band66-10MHz-QPSK-132022-50RB#0

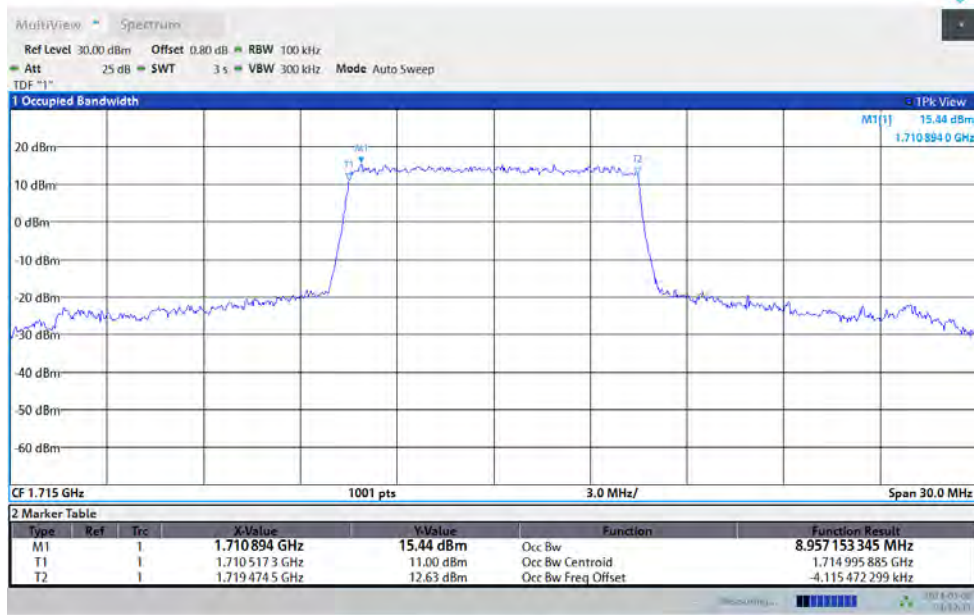


03:40:32 AM 01/08/2024

Band66-10MHz-16QAM-132022-50RB#0




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2311090109RF04

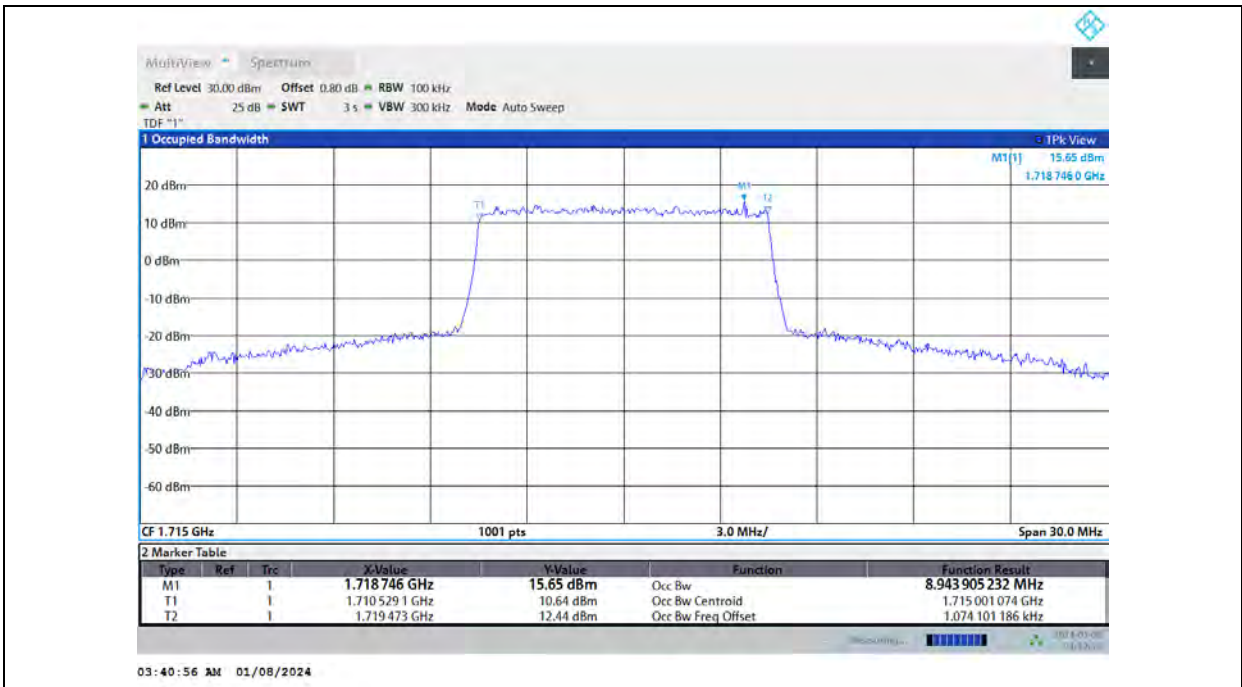

Band66-10MHz-64QAM-132022-50RB#0

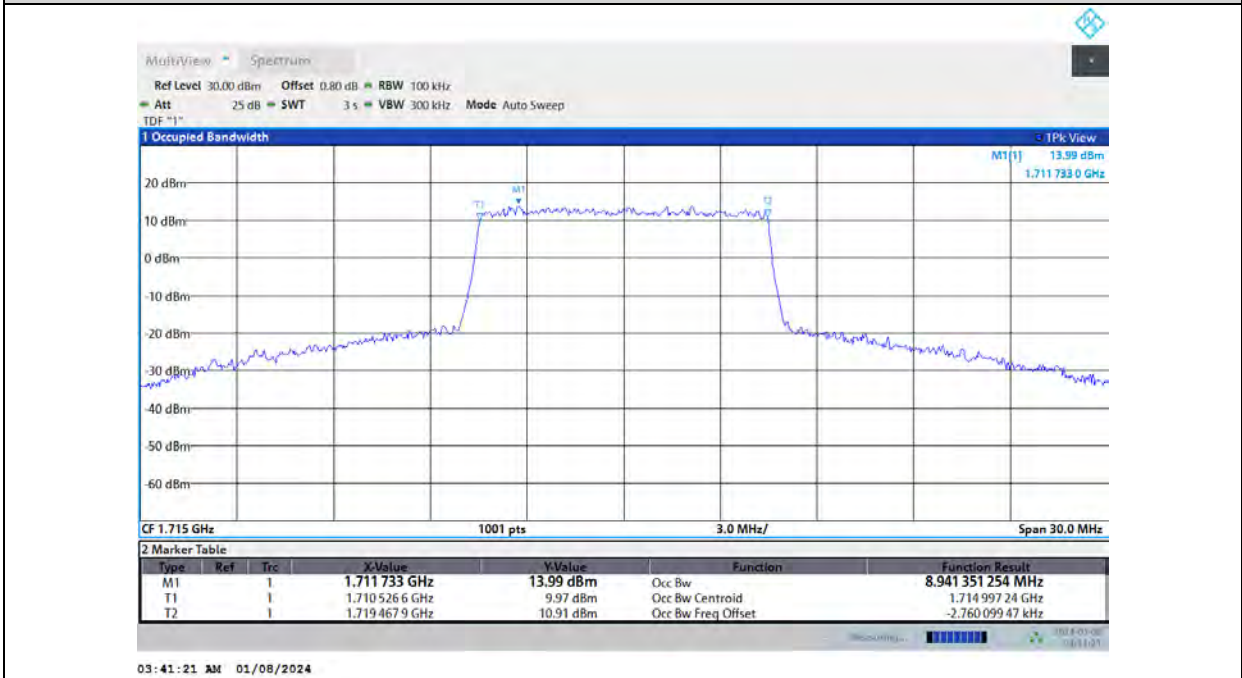

Band66-10MHz-QPSK-132322-50RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04



03:41:49 AM 01/08/2024

Band66-10MHz-16QAM-132322-50RB#0

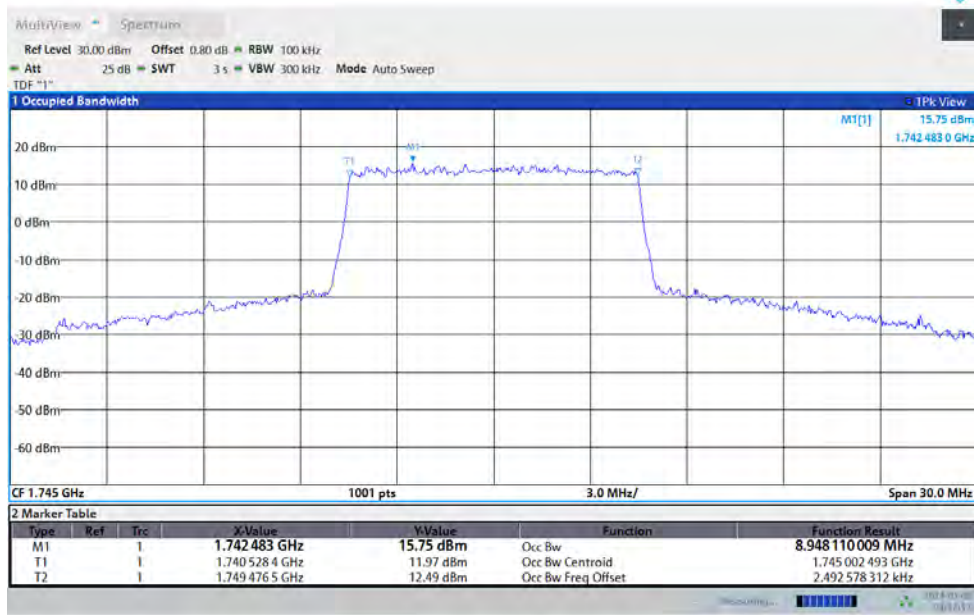


03:42:13 AM 01/08/2024

Band66-10MHz-64QAM-132322-50RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

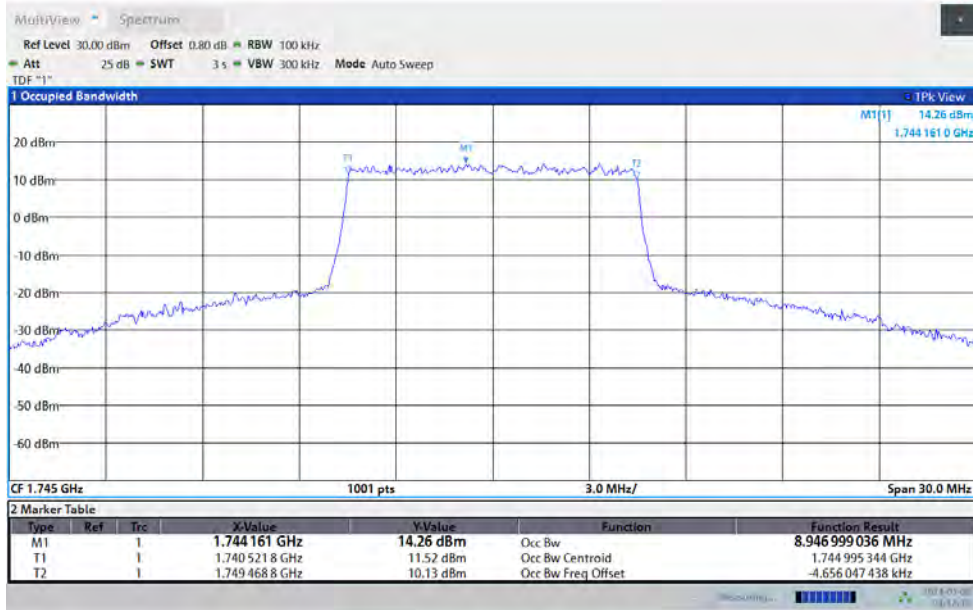

03:42:39 AM 01/08/2024

Band66-10MHz-QPSK-132622-50RB#0

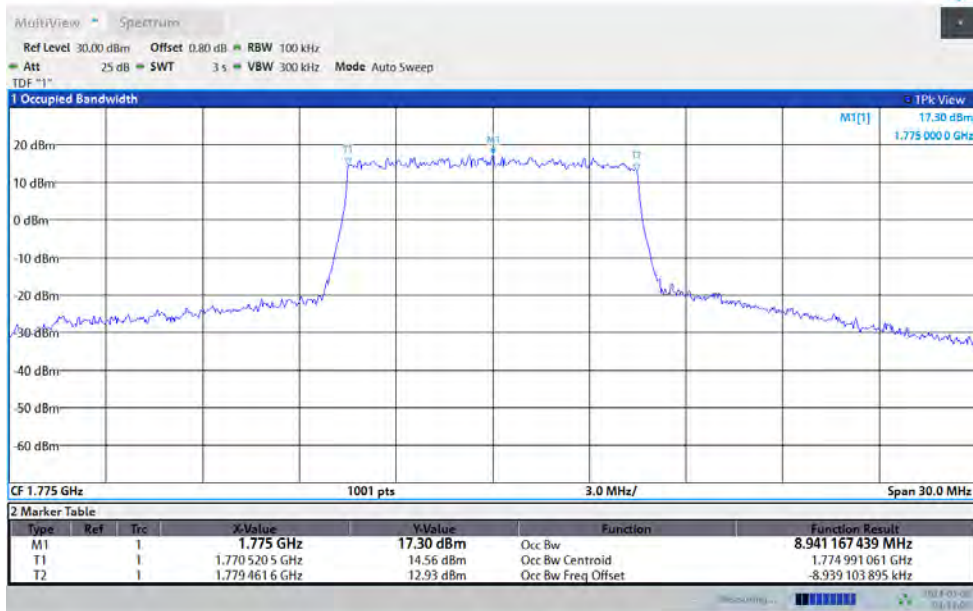


03:43:07 AM 01/08/2024

Band66-10MHz-16QAM-132622-50RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

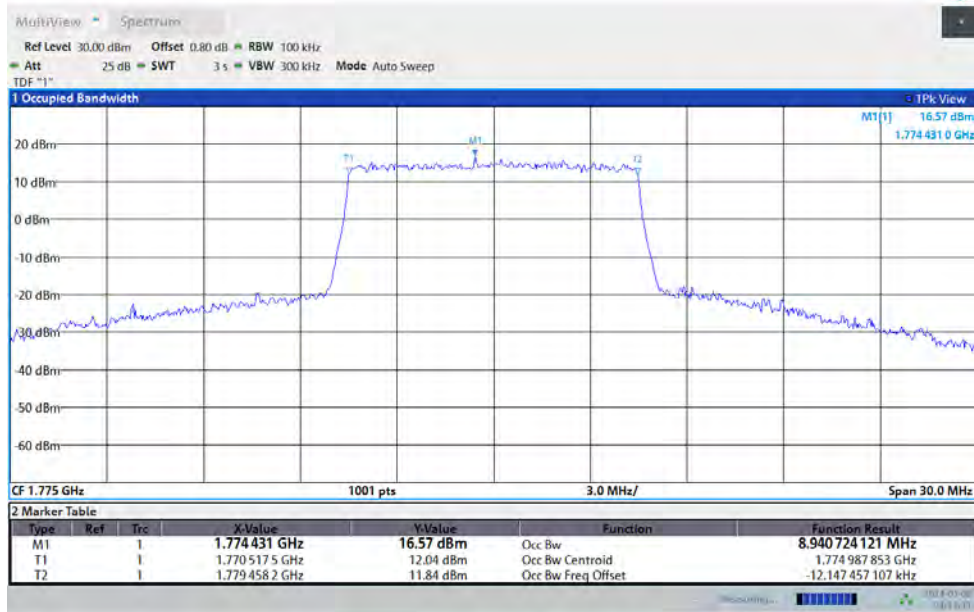

03:43:31 AM 01/08/2024

Band66-10MHz-64QAM-132622-50RB#0

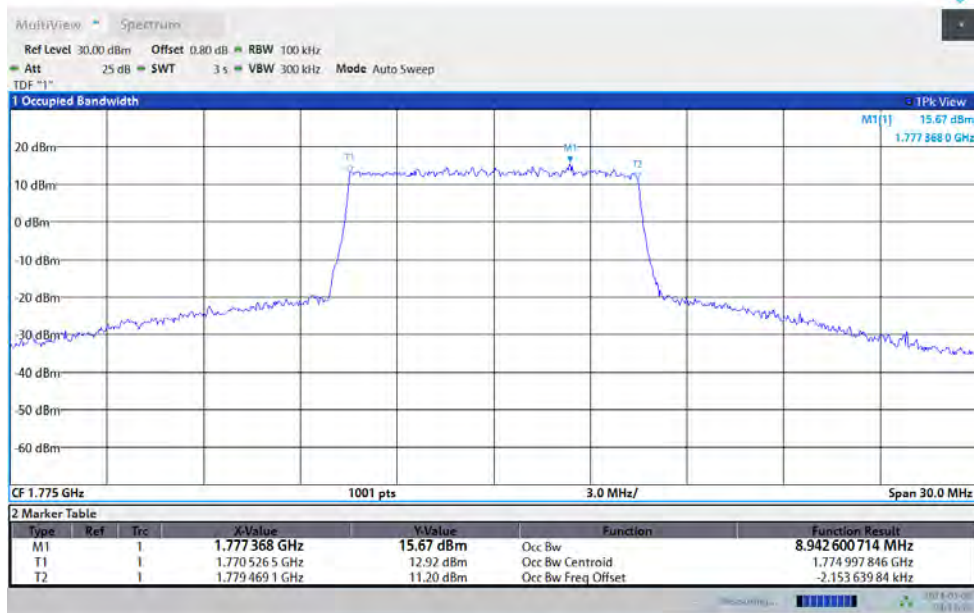


03:43:56 AM 01/08/2024

Band66-15MHz-QPSK-132047-50RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

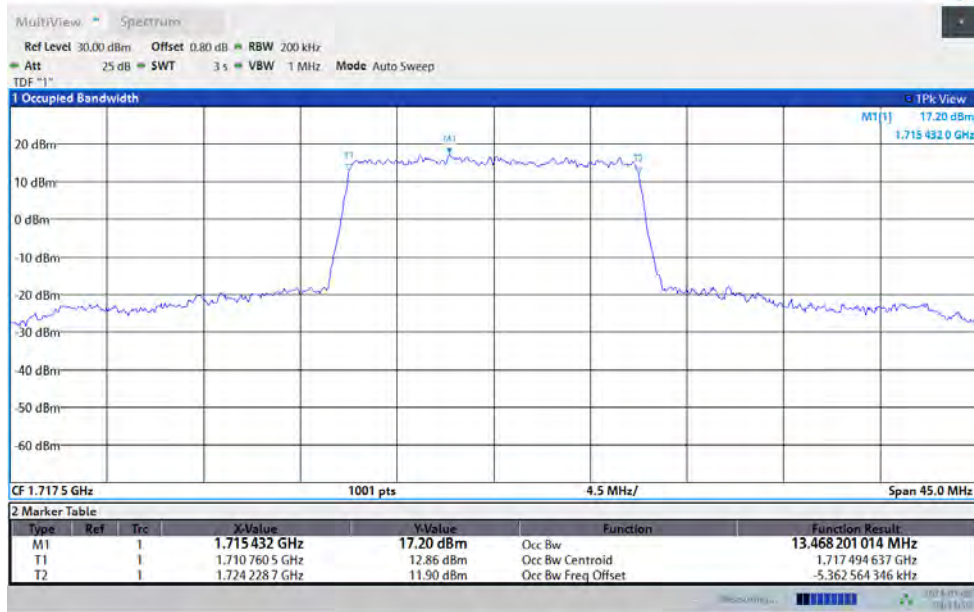

03:45:00 AM 01/08/2024

Band66-15MHz-16QAM-132047-50RB#0

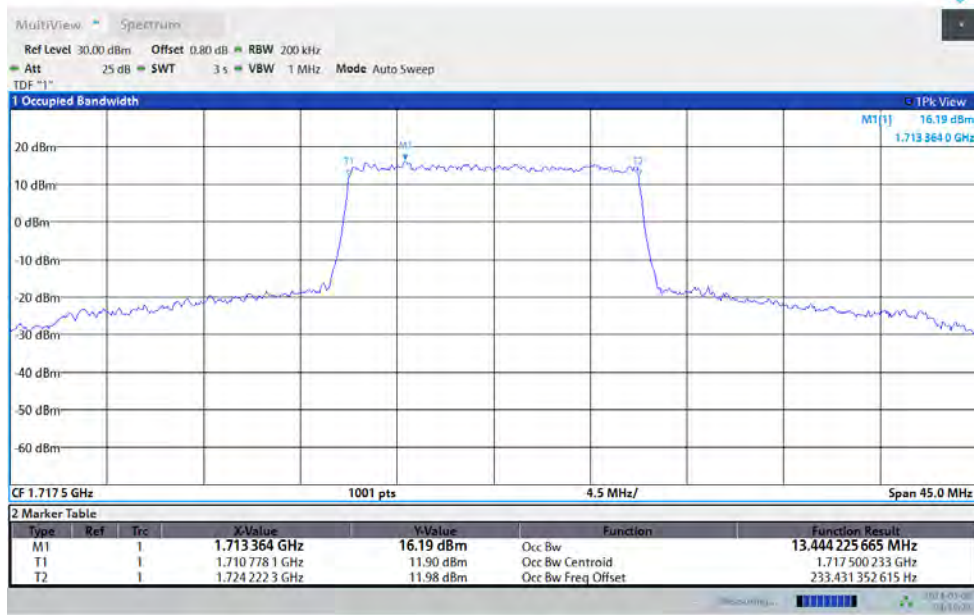


03:45:24 AM 01/08/2024

Band66-15MHz-64QAM-132047-50RB#0




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2311090109RF04

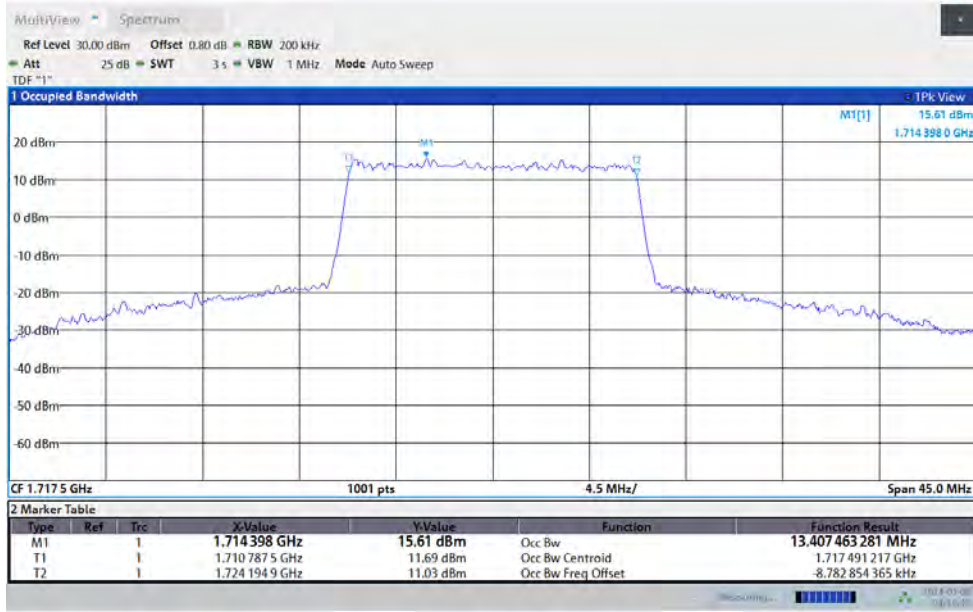

03:45:49 AM 01/08/2024

Band66-15MHz-QPSK-132322-50RB#0

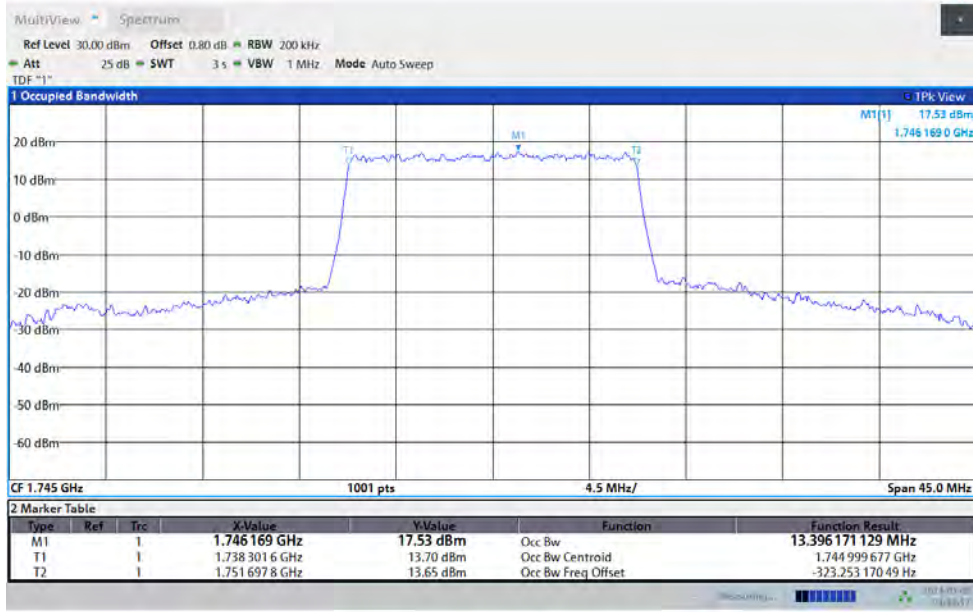


03:46:17 AM 01/08/2024

Band66-15MHz-16QAM-132322-50RB#0



BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

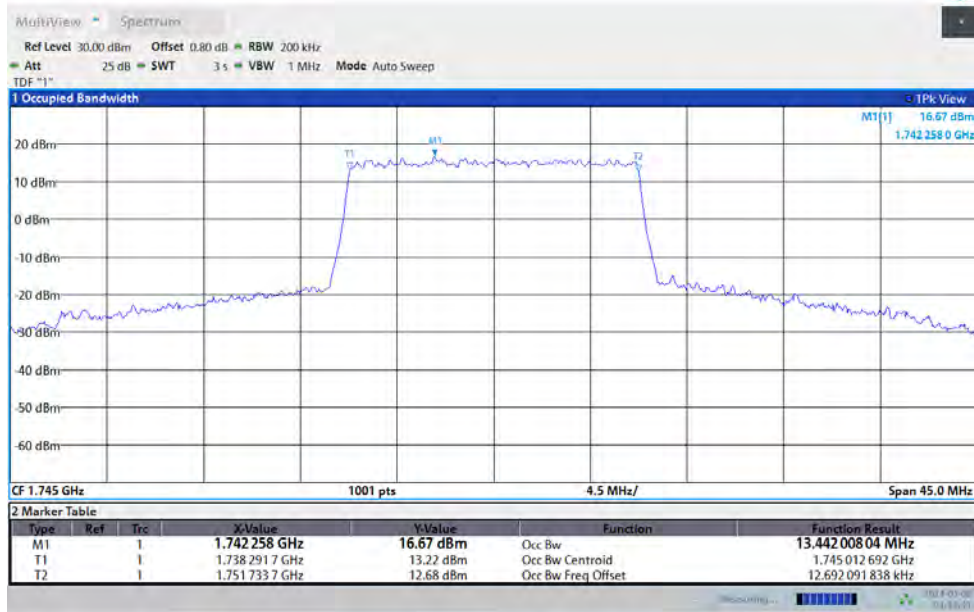

03:46:42 AM 01/08/2024

Band66-15MHz-64QAM-132322-50RB#0




03:47:07 AM 01/08/2024

Band66-15MHz-QPSK-132597-50RB#0




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2311090109RF04

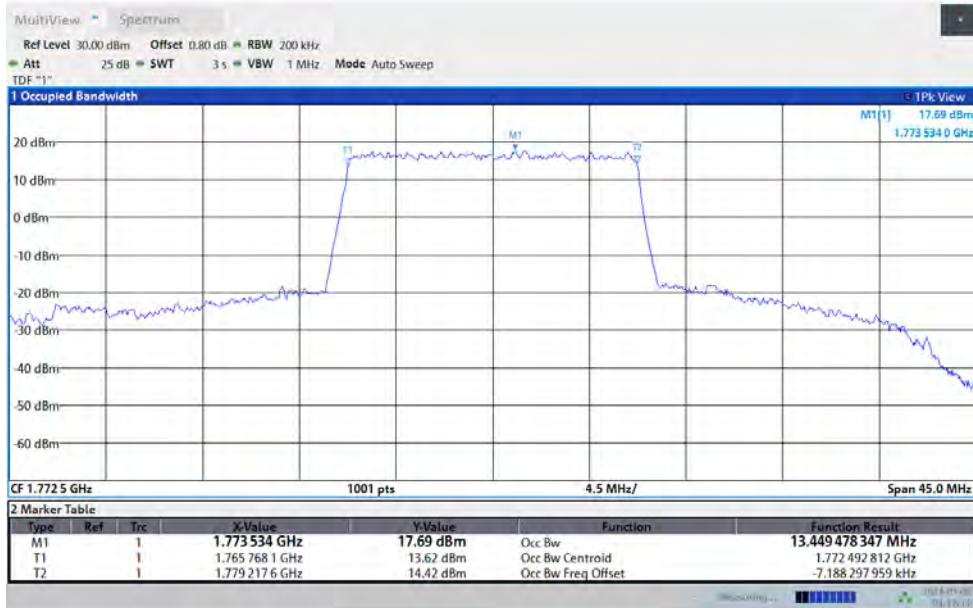

03:47:35 AM 01/08/2024

Band66-15MHz-16QAM-132597-50RB#0

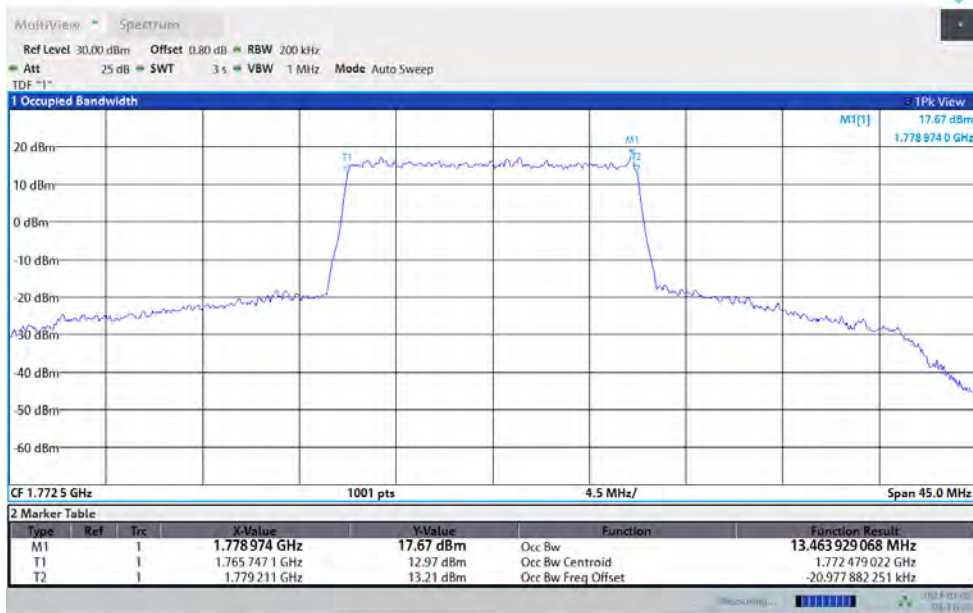

03:47:59 AM 01/08/2024

Band66-15MHz-64QAM-132597-50RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04



03:48:25 AM 01/08/2024

Band66-20MHz-QPSK-132072-50RB#0

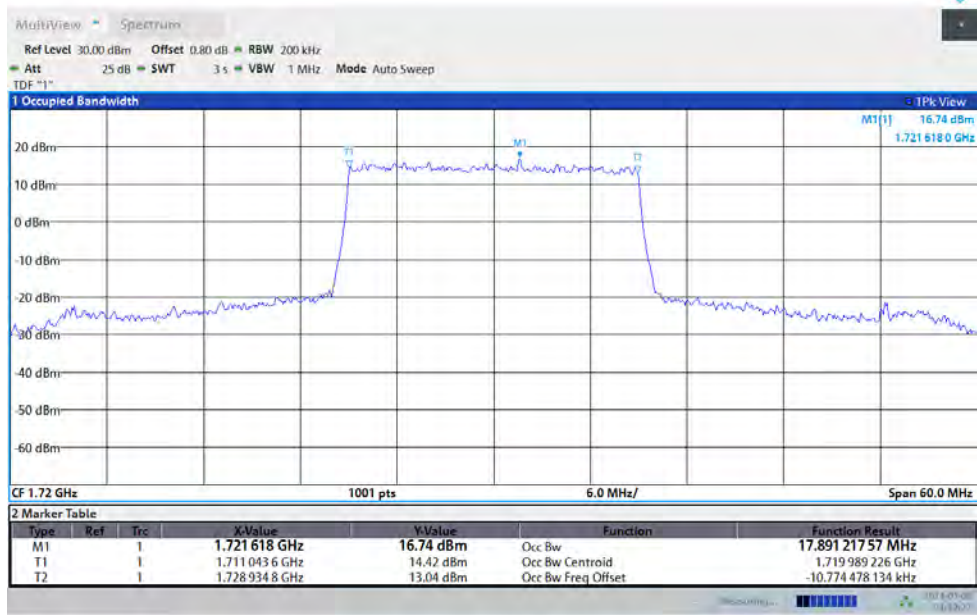


03:49:28 AM 01/08/2024

Band66-20MHz-16QAM-132072-50RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

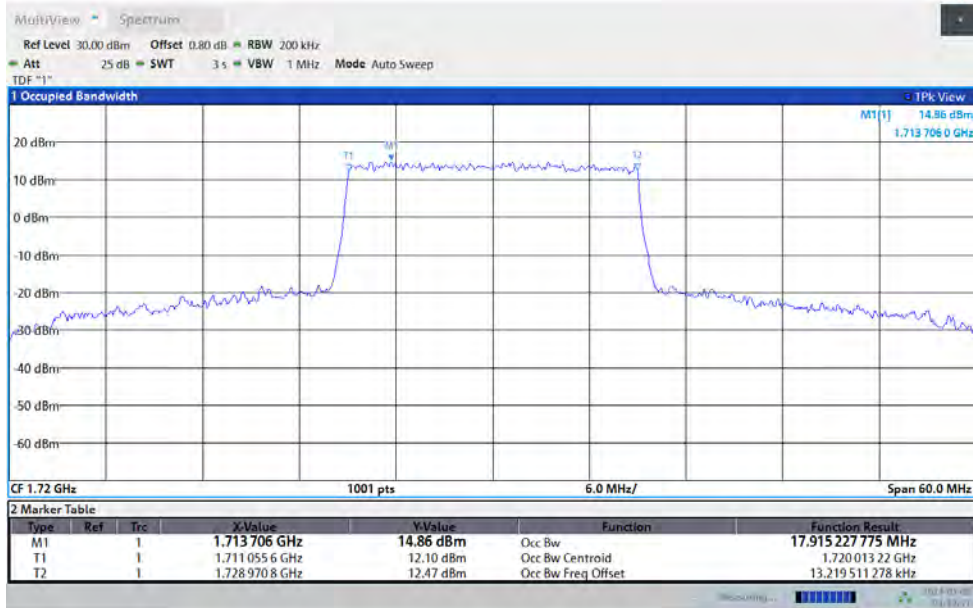

Band66-20MHz-64QAM-132072-50RB#0

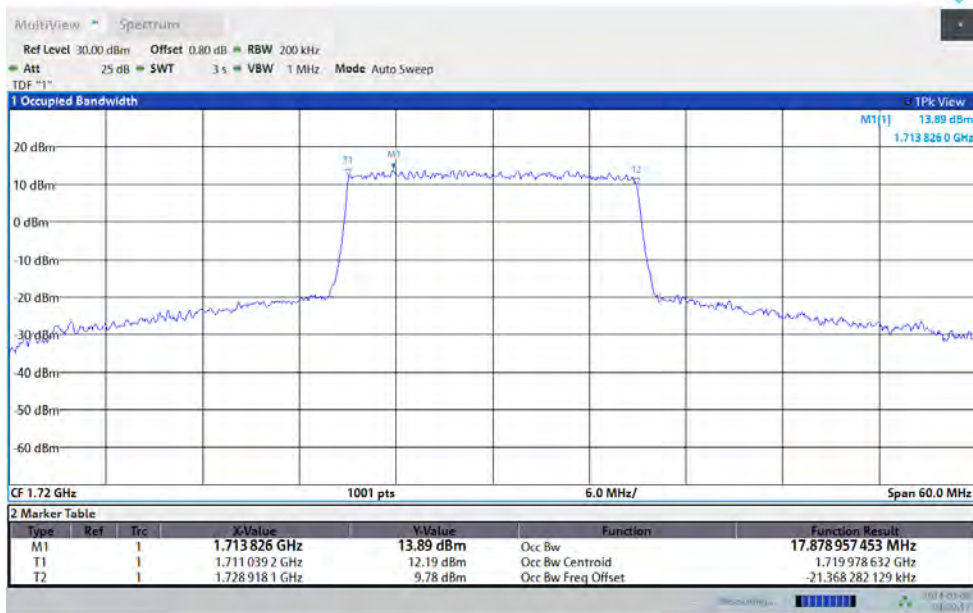


Band66-20MHz-QPSK-132322-50RB#0



BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

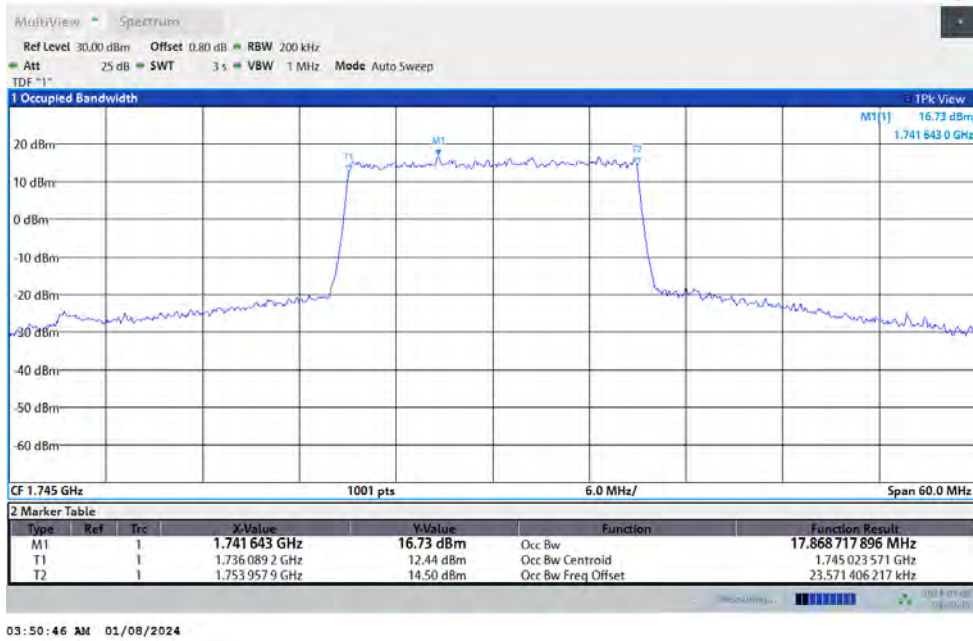

03:50:46 AM 01/08/2024

Band66-20MHz-16QAM-132322-50RB#0



03:51:10 AM 01/08/2024

Band66-20MHz-64QAM-132322-50RB#0




BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04



03:51:35 AM 01/08/2024

Band66-20MHz-QPSK-132572-50RB#0

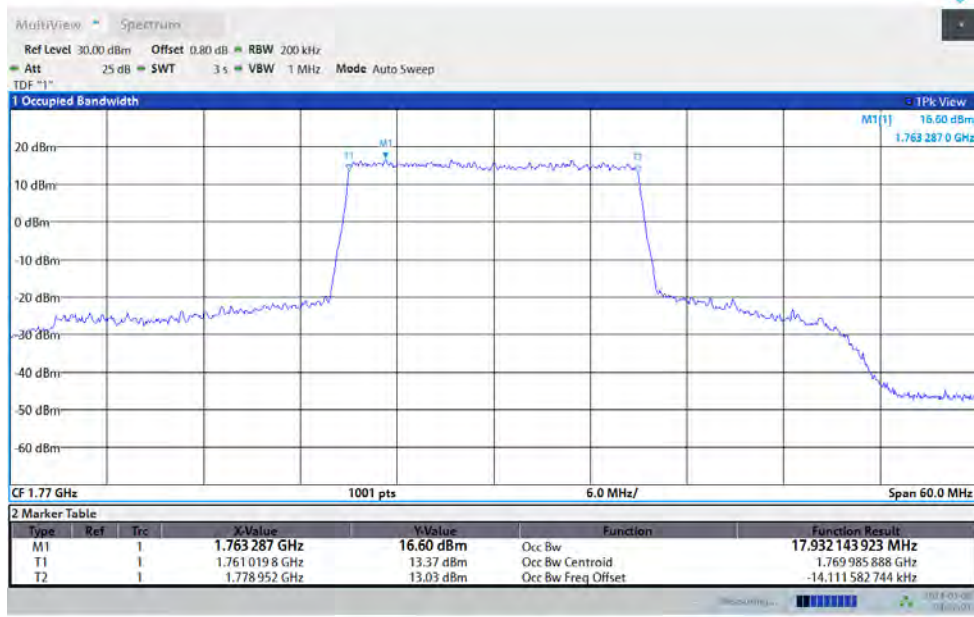


03:52:03 AM 01/08/2024

Band66-20MHz-16QAM-132572-50RB#0



BUREAU VERITAS

Test Report No.: PSU-NQN2311090109RF04

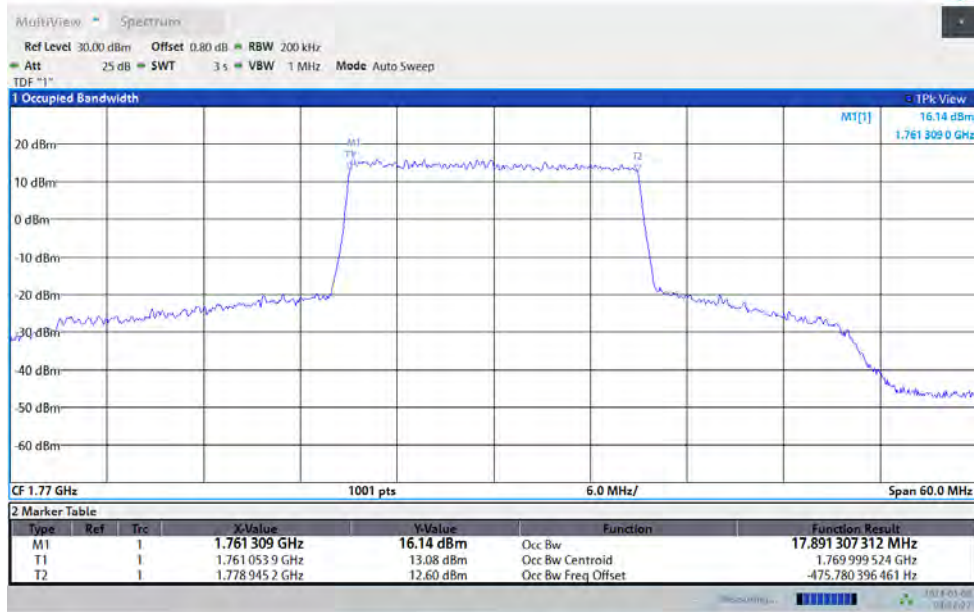

Band66-20MHz-64QAM-132572-50RB#0

