

## **Measurement Protocol**

Measurement Object	WIFI 5.3G_802.11a 6M_EVS NB 24.4kbps_CH60
Description	HMD_2322#N159V

Project	TIA-5050 (2018-01)
Report Generation Date	2024/3/7 9:01
Responsible Person	audio

**Status Overview**

SMD	Status	Single Value Description	Single Value	Object
Overall Receive Delay NB	Done	Delay (Cross) [ms]	214.4	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.1a Receive Volume Control Performance 8N NB	Ok	Corrected Speech Level [dB[SPL]]	16.74	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.1b Receive Volume Control Performance 2N NB	Ok	Corrected Speech Level [dB[SPL]]	12.70	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.2 RCV Distortion and Noise - 400 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	29.86	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.2 RCV Distortion and Noise - 500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	29.81	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.2 RCV Distortion and Noise - 630 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	30.33	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.2 RCV Distortion and Noise - 800 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	29.27	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.2 RCV Distortion and Noise - 1000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	27.51	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.2 RCV Distortion and Noise - 1250 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	23.03	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.2 RCV Distortion and Noise - 1600 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	22.63	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.2 RCV Distortion and Noise - 2000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	21.90	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.2 RCV Distortion and Noise - 2500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	23.47	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.2 RCV Distortion and Noise - 3150 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	24.22	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 2000Hz)	21.90	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.2 RCV Distortion and Noise - 400 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	29.59	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.2 RCV Distortion and Noise - 500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	29.51	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.2 RCV Distortion and Noise - 630 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	28.85	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.2 RCV Distortion and Noise - 800 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	28.18	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.2 RCV Distortion and Noise - 1000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	26.70	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.2 RCV Distortion and Noise - 1250 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	24.17	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.2 RCV Distortion and Noise - 1600 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	22.19	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.2 RCV Distortion and Noise - 2000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	22.43	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.2 RCV Distortion and Noise - 2500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	28.90	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60


5.2 RCV Distortion and Noise - 3150 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	34.17	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 1600Hz)	22.19	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.3 Frequency Response 8N FF HANB	Ok	Min. dist. to tolerance scheme [dB], 1151.2 Hz	2.09	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.3 Frequency Response 8N DF HANB	Ok	Min. dist. to tolerance scheme [dB], 2571.8 Hz	1.22	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.3 Frequency Response 2N FF HANB	Ok	Min. dist. to tolerance scheme [dB], 305.9 Hz	1.37	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60
5.3 Frequency Response 2N DF HANB	Not Ok	Min. dist. to tolerance scheme [dB], 3882.4 Hz	-0.09	WIFI 5.3G_802.11a 6M EVS NB 24.4kbps_CH60

---

Overall Receive Delay NB	5
5.1a Receive Volume Control Performance 8N NB	6
5.1b Receive Volume Control Performance 2N NB	8
5.2 RCV Distortion and Noise - 400 Hz NB	10
5.2 RCV Distortion and Noise - 500 Hz NB	12
5.2 RCV Distortion and Noise - 630 Hz NB	14
5.2 RCV Distortion and Noise - 800 Hz NB	16
5.2 RCV Distortion and Noise - 1000 Hz NB	18
5.2 RCV Distortion and Noise - 1250 Hz NB	20
5.2 RCV Distortion and Noise - 1600 Hz NB	22
5.2 RCV Distortion and Noise - 2000 Hz NB	24
5.2 RCV Distortion and Noise - 2500 Hz NB	26
5.2 RCV Distortion and Noise - 3150 Hz NB	28
Report - Receive Distortion and Noise (Conversational Gain)	30
5.2 RCV Distortion and Noise - 400 Hz NB	31
5.2 RCV Distortion and Noise - 500 Hz NB	33
5.2 RCV Distortion and Noise - 630 Hz NB	35
5.2 RCV Distortion and Noise - 800 Hz NB	37
5.2 RCV Distortion and Noise - 1000 Hz NB	39
5.2 RCV Distortion and Noise - 1250 Hz NB	41
5.2 RCV Distortion and Noise - 1600 Hz NB	43
5.2 RCV Distortion and Noise - 2000 Hz NB	45
5.2 RCV Distortion and Noise - 2500 Hz NB	47
5.2 RCV Distortion and Noise - 3150 Hz NB	49
Report - Receive Distortion and Noise (Conversational Gain)	50
5.3 Frequency Response 8N FF HANB	51
5.3 Frequency Response 8N DF HANB	53
5.3 Frequency Response 2N FF HANB	56
5.3 Frequency Response 2N DF HANB	58

## Overall Receive Delay NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ Preparation - Delay measurement

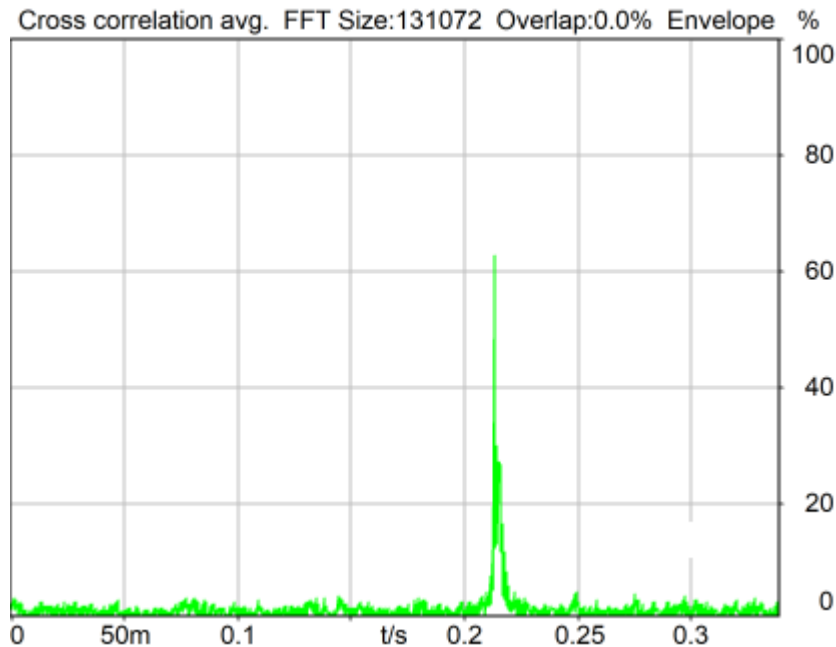

Delay (Cross): 214.4 ms

2024/3/6 16:33 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

### Source: cssnb1b\_r1s.dat

Level adj. Ch1 -90.0 dB

CSSnb1b\_R1s.dat - CS-signal with special 1s random noise

NARROWBAND Composite Source Signal RCV P.501 (1 burst) at Channel 2

Pause 0.5 s +

voiced signal + 4000 Hz band limited random noise 1.0 s +

Pause till end of file

Signal level (ch2): -14.7 dBm0 (corresponds to approx. -16.0 dBm0 for a 350 ms CSS considering 101 ms Pause) from 0.5s to 1.544s for 4-k FFT, Hanning window,

75 % overlap in frequency range of 100 to 4000 Hz

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.1: 0.00 dB

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Range start	550.00 ms	Range length	1950.00 ms
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	131072	Overlap	0 %
Window function.	Hanning	Smooth	Off
Delayed channel	None		
Valid range start	-1228.79 ms	Valid range end	1228.81 ms

**Special Features**

Show source signal	Source ch.2	Store to variable	D_RCV_NB
--------------------	-------------	-------------------	----------

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.1a Receive Volume Control Performance 8N NB

TIA-5050 (2018-01) \ Measurements \ Narrowband

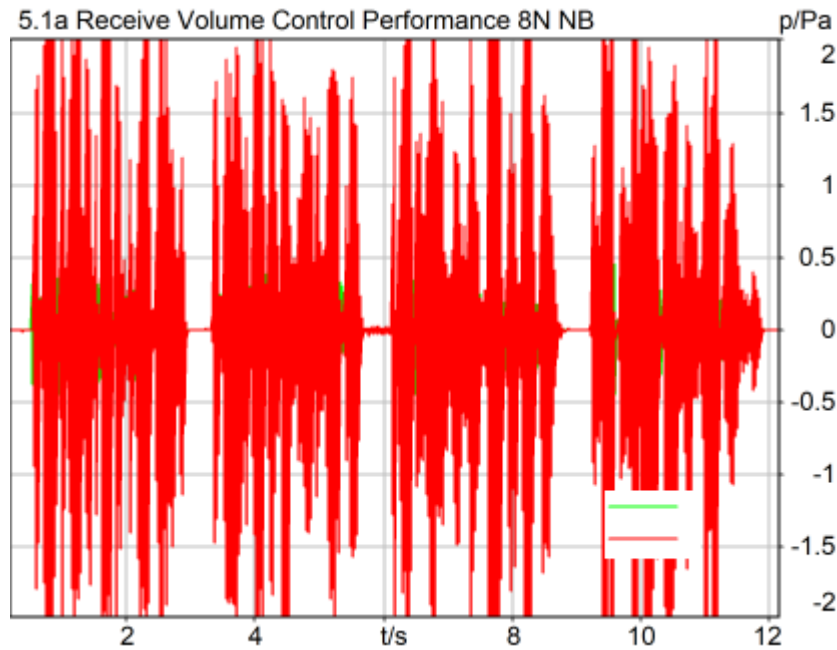

### Correction

X - 70

Speech Level RCV: 86.74 dB[SPL], Act.: 88.84%

Corrected Speech Level: 16.74 dB[SPL] Ok

### Ok

2024/3/6 16:33 ACQUA 5.1.200

### Limits

	lower
Run 1	6.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	12000.00 ms
Range start	200.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	Margin (15.9dB nom)	
Bandpass filter	Narrow Band		

**Special Features**

Show source signal Source ch.2  
Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power SupplyOff		Mic 2 Power SupplyOff	

**5.1b Receive Volume Control Performance 2N NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband





### Correction

X - 70

Speech Level RCV: 82.70 dB[SPL], Act.: 87.79%

Corrected Speech Level: 12.70 dB[SPL] Ok

### Ok

2024/3/6 16:39 ACQUA 5.1.200

### Limits

	lower
Run 1	6.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction	Out 2 -> In 2	Range length	12000.00 ms
Range start	200.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	Margin (15.9dB nom)	
Bandpass filter	Narrow Band		

15.90 dB

**Special Features**

Show source signal Source ch.2  
Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 400 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

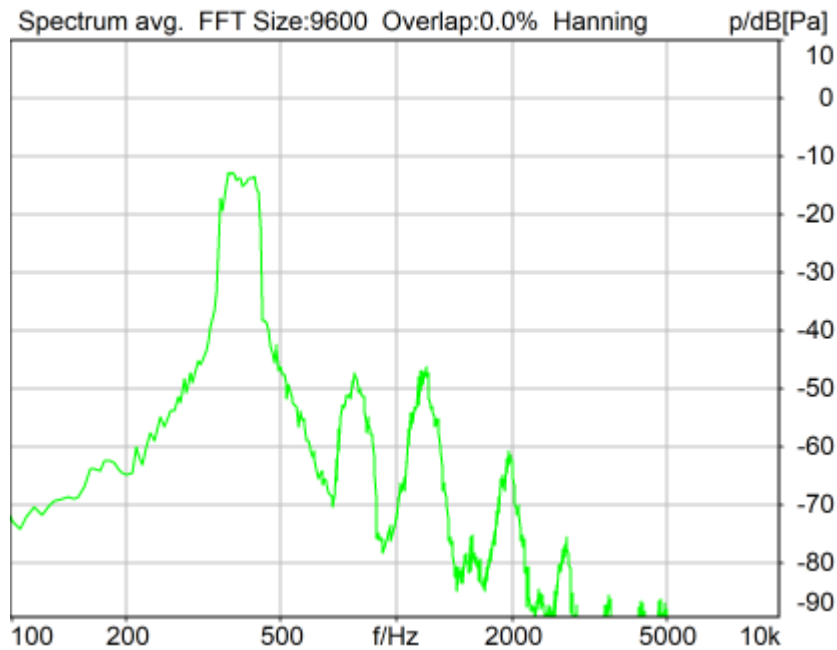

Distortion (Noise) RCV (packed): 29.86 dB (3.21%) Ok

**Ok**

2024/3/6 16:34 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_400hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	320.0 Hz	Stimulus max.	480.0 Hz
Analysis min.	20.0 Hz	Analysis max.	315.0 Hz
Analysis (2) min.	485.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_400Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 500 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

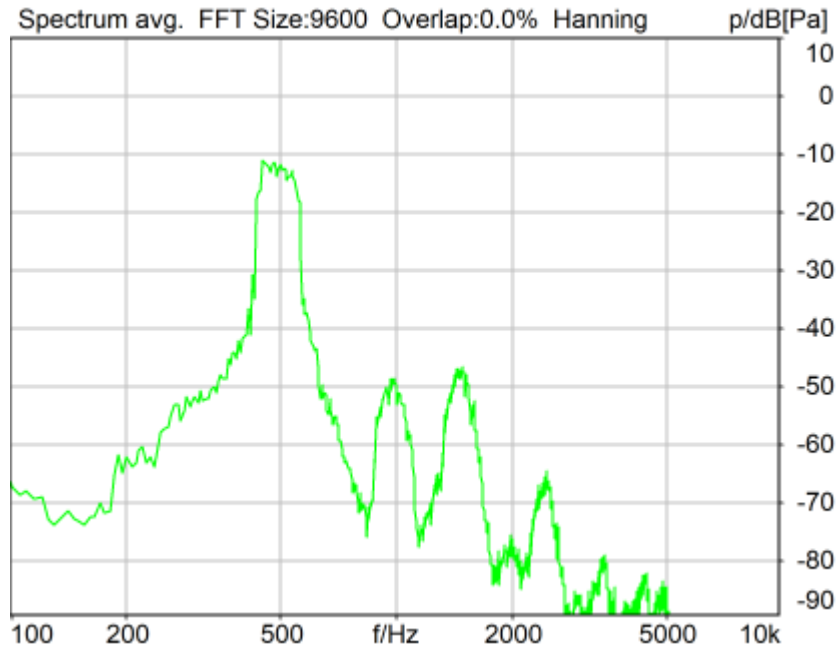

Distortion (Noise) RCV (packed): 29.81 dB (3.23%) Ok

**Ok**

2024/3/6 16:34 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_500hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	410.0 Hz	Stimulus max.	595.0 Hz
Analysis min.	20.0 Hz	Analysis max.	405.0 Hz
Analysis (2) min.	600.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 630 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

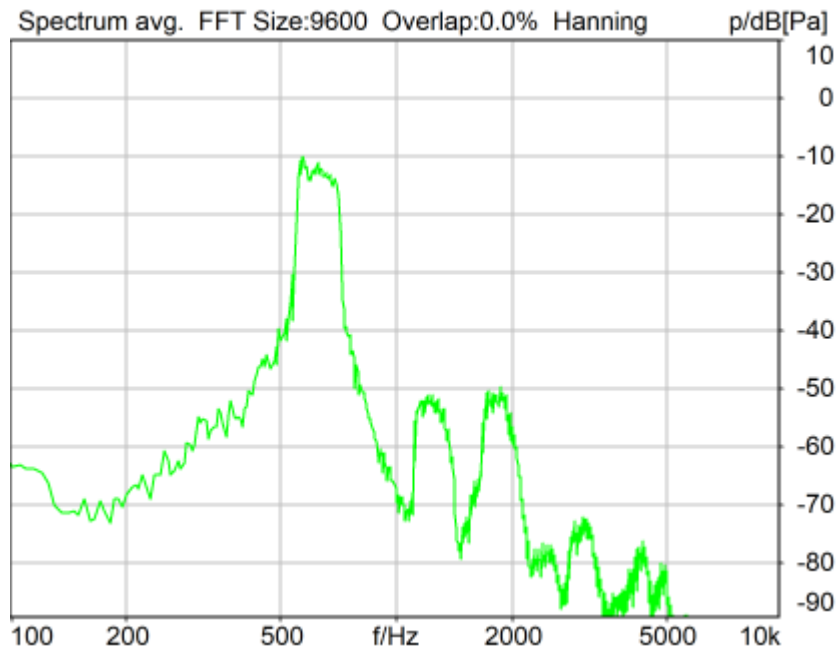

Distortion (Noise) RCV (packed): 30.33 dB (3.04%) Ok

**Ok**

2024/3/6 16:35 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_630hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	525.0 Hz	Stimulus max.	745.0 Hz
Analysis min.	20.0 Hz	Analysis max.	520.0 Hz
Analysis (2) min.	750.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_630Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

-----  
**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

-----  
**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 800 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N



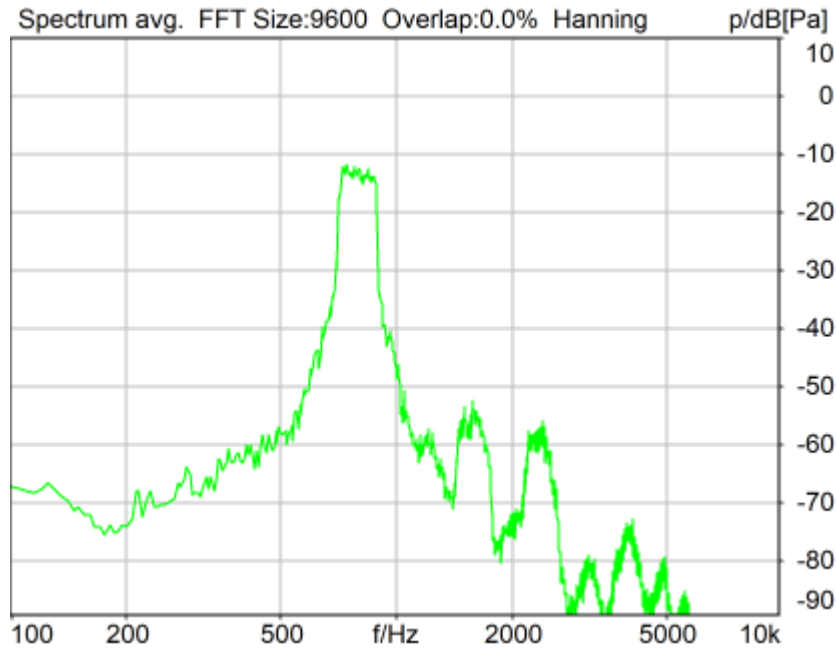

Distortion (Noise) RCV (packed): 29.27 dB (3.44%) Ok

Ok

2024/3/6 16:35 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_800hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	675.0 Hz	Stimulus max.	925.0 Hz
Analysis min.	20.0 Hz	Analysis max.	670.0 Hz
Analysis (2) min.	930.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_800Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
**Microphone Settings (Mic Amp. (Slot 6))**

**Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

-----  
**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

-----  
**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 1000 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

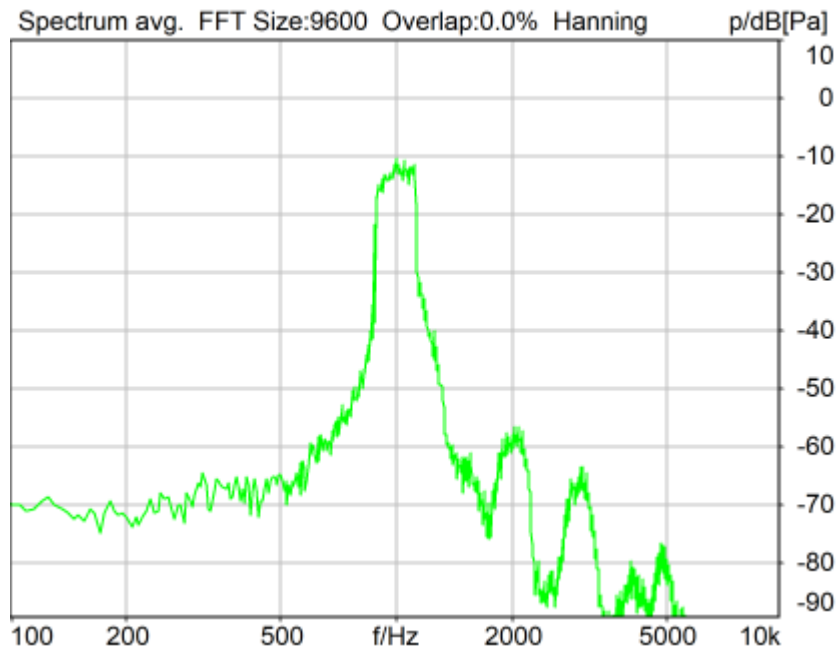

Distortion (Noise) RCV (packed): 27.51 dB (4.21%) Ok

Ok

2024/3/6 16:35 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	855.0 Hz	Stimulus max.	1155.0 Hz
Analysis min.	20.0 Hz	Analysis max.	850.0 Hz
Analysis (2) min.	1160.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_1000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1250 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

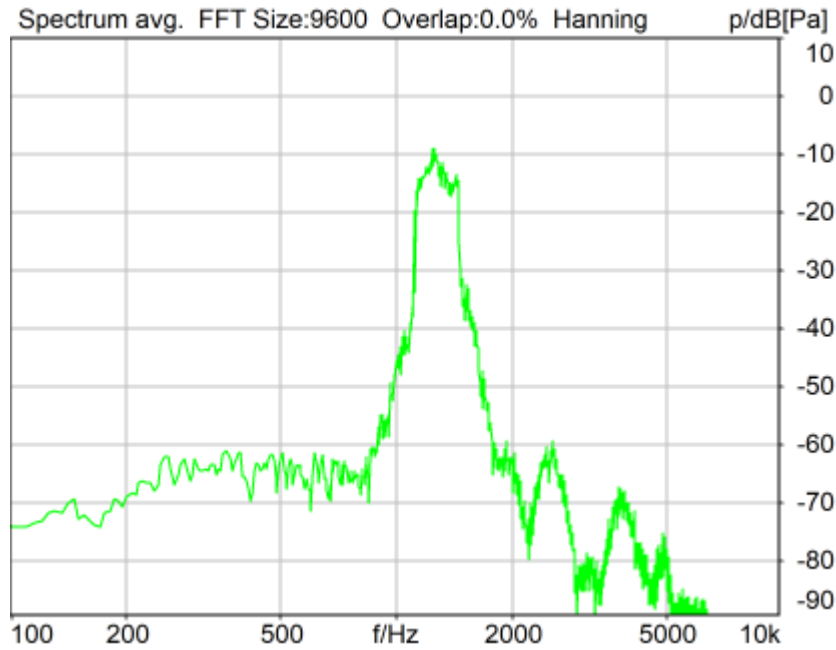

Distortion (Noise) RCV (packed): 23.03 dB (7.06%) Ok

**Ok**

2024/3/6 16:36 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1250hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1085.0 Hz	Stimulus max.	1450.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1080.0 Hz
Analysis (2) min.	1455.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_1250Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

-----  
**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

-----  
**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 1600 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

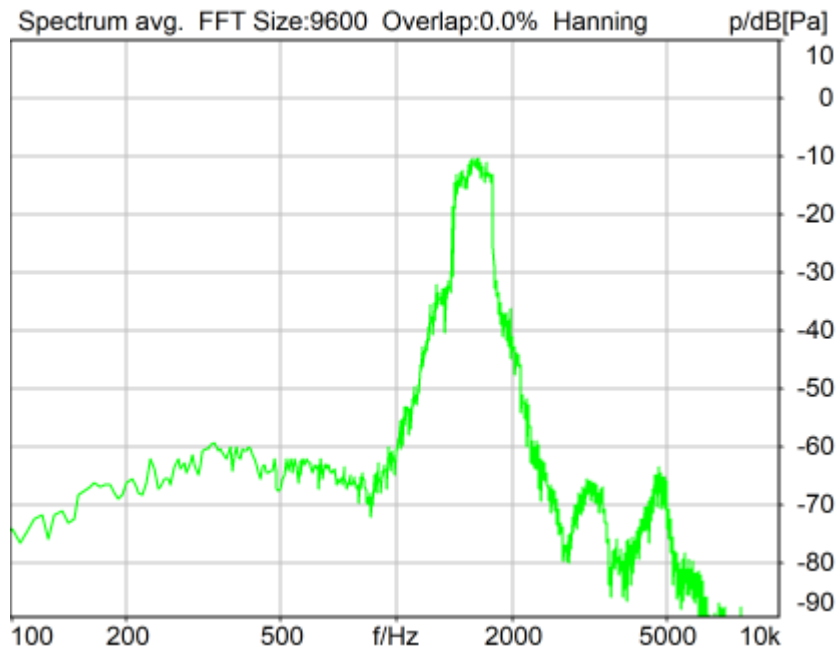

Distortion (Noise) RCV (packed): 22.63 dB (7.39%) Ok

**Ok**

2024/3/6 16:36 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1600hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1375.0 Hz	Stimulus max.	1815.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1370.0 Hz
Analysis (2) min.	1820.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_1600Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 2000 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N



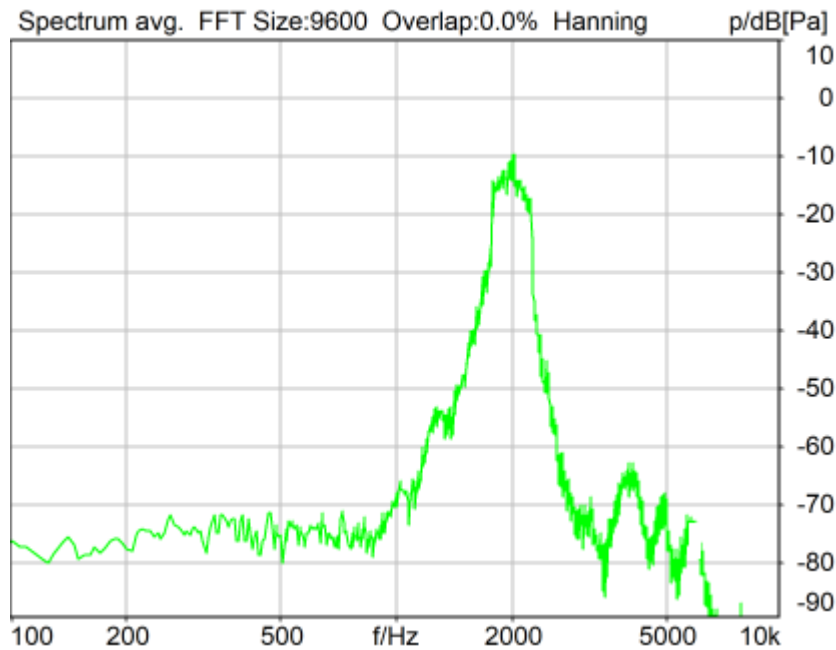

Distortion (Noise) RCV (packed): 21.90 dB (8.03%) Ok

Ok

2024/3/6 16:37 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1745.0 Hz	Stimulus max.	2275.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1740.0 Hz
Analysis (2) min.	2280.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_2000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 2500 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

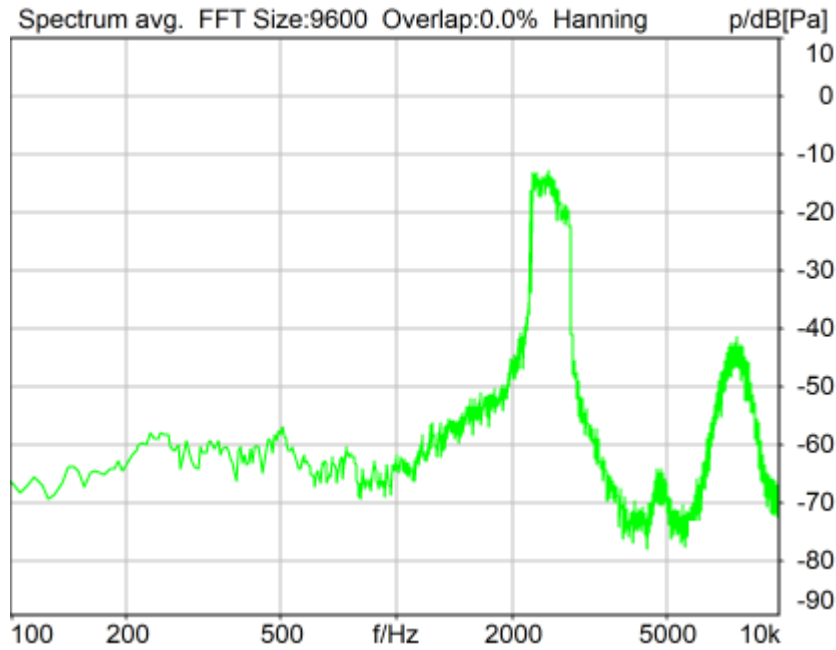

Distortion (Noise) RCV (packed): 23.47 dB (6.71%) Ok

**Ok**

2024/3/6 16:37 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2500hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2205.0 Hz	Stimulus max.	2855.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2200.0 Hz
Analysis (2) min.	2860.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_2500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 3150 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

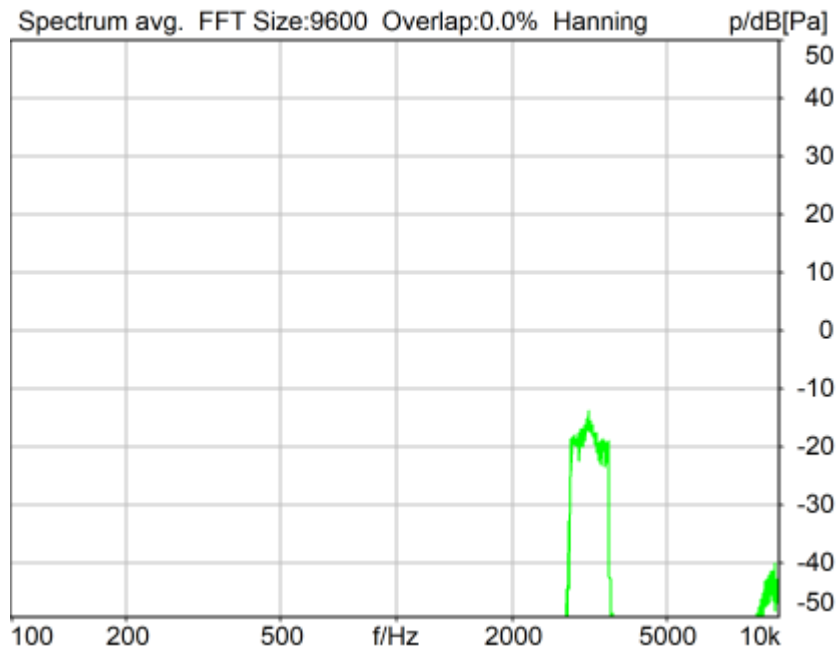

Distortion (Noise) RCV (packed): 24.22 dB (6.15%) Ok

**Ok**

2024/3/6 16:37 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_3150hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2785.0 Hz	Stimulus max.	3585.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2780.0 Hz
Analysis (2) min.	3590.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_3150Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**Report - Receive Distortion and Noise (Conversational Gain)**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

Region	Frequency	SDNR
1	400Hz	29.86 dB


2	500Hz	29.81 dB
3	630Hz	30.33 dB
4	800Hz	29.27 dB
5	1000Hz	27.51 dB
6	1250Hz	23.03 dB
7	1600Hz	22.63 dB
8	2000Hz	21.90 dB
9	2500Hz	23.47 dB
10	3150Hz	24.22 dB

All SDNRs were greater than 20.0 dB, requirement was met.  
Smallest SDNR was 21.90dB at 2000Hz.

2024/3/6 16:37 ACQUA

## 5.2 RCV Distortion and Noise - 400 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

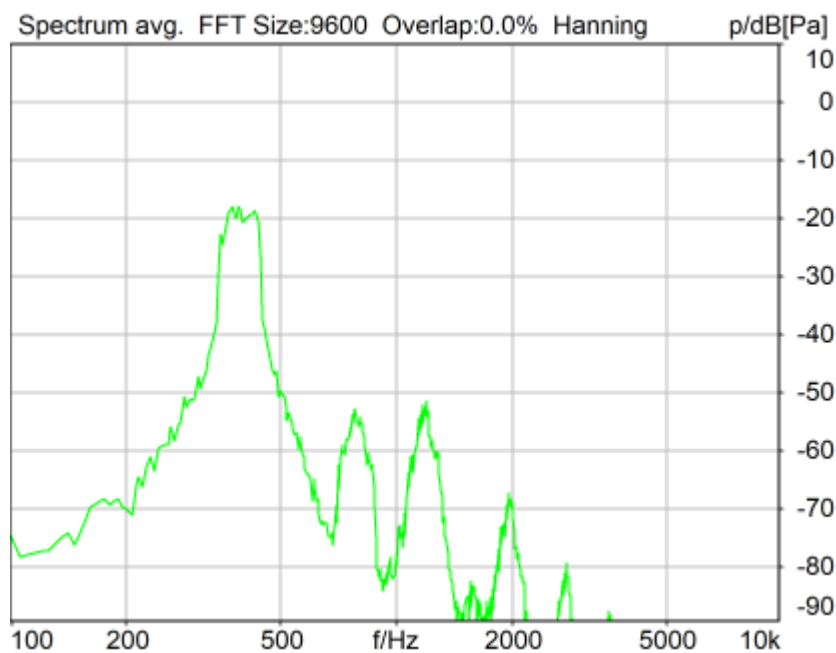

Distortion (Noise) RCV (packed): 29.59 dB (3.32%) Ok

**Ok**

2024/3/6 16:40 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_400hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	480.0 Hz
Stimulus min.	320.0 Hz	Analysis max.	315.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	485.0 Hz		

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_400Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V



-----  
VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 500 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

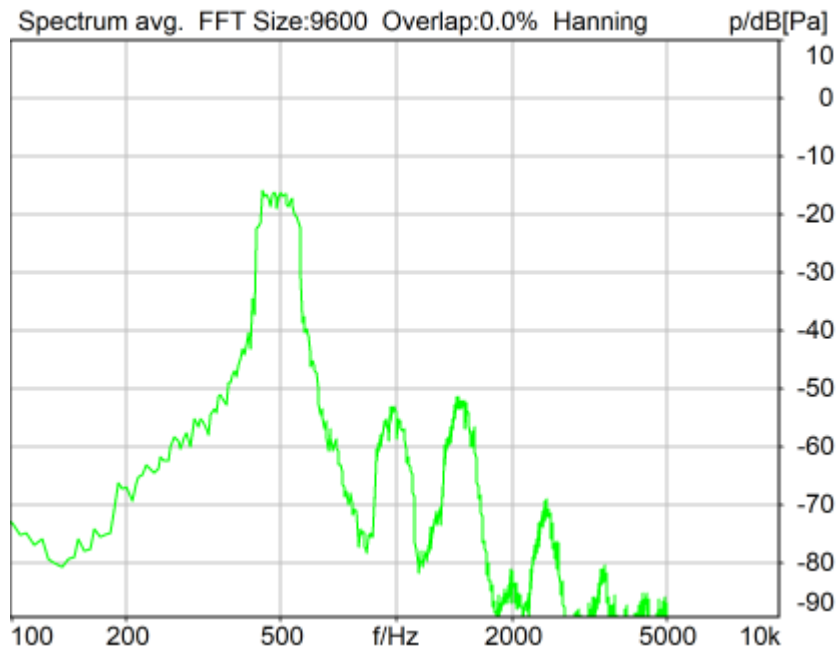

Distortion (Noise) RCV (packed): 29.51 dB (3.35%) Ok

**Ok**

2024/3/6 16:40 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_500hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	410.0 Hz	Stimulus max.	595.0 Hz
Analysis min.	20.0 Hz	Analysis max.	405.0 Hz
Analysis (2) min.	600.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
----------------	-----------	----------------	-------------

SIP Reg. State      Unregistered                      Jitterbuffer Length    140  
 Jitter Buffer Reset    On Playback                      Enabled Codec        EVS/16000/1  
 Packet Length        20                                      Encoder Parameter ;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0  
 FMTP Parameter     ;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0  
 Impairment Mode    Off                                      Impairment Type     Off


-----  
 BEQ Settings (BEQ Filter 1)  
 Block mode            Bypass  
 -----

Artificial Head Settings (HATS 1 (HMS II.3))  
 Ser. Nr.                12306613                      Pinna Type            Type 3.3

**HIB Settings**  
 HIB Name                60020095                      Serial                 60020095  
 HIB Mode                Mobile Measurement            Impedance            32 Ohm  
 Gain out 1               -40.00 dB                      Gain out 2            0.00 dB  
 Gain in 1                0.00 dB                         Gain in 2             0.00 dB  
 Mic 1 Power Supply Off                      Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 630 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

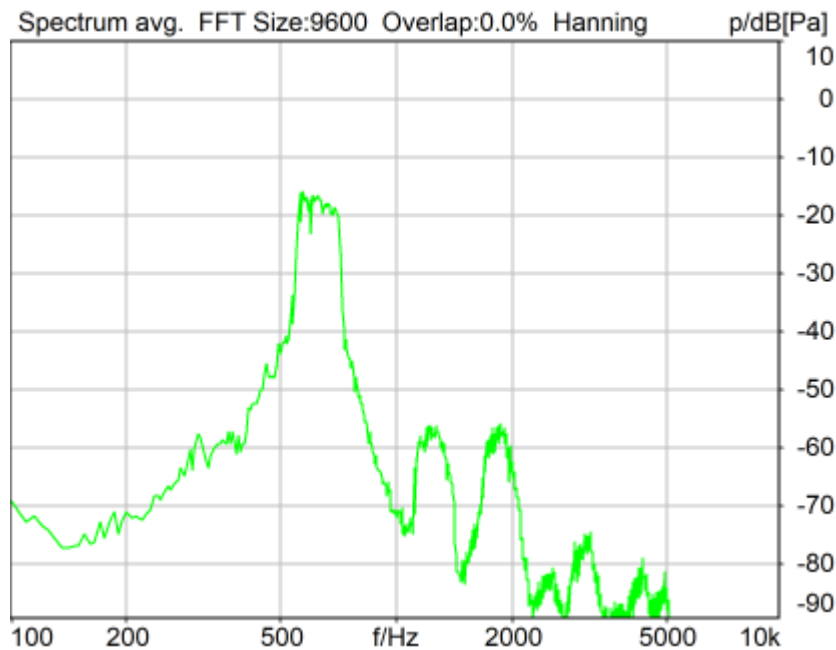

Distortion (Noise) RCV (packed): 28.85 dB (3.61%) Ok

**Ok**

2024/3/6 16:40 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
--	-------

Run 1	20.00 dB
-------	----------

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_630hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	525.0 Hz	Stimulus max.	745.0 Hz
Analysis min.	20.0 Hz	Analysis max.	520.0 Hz
Analysis (2) min.	750.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_630Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0

FMTF Parameter ;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0  
 Impairment Mode Off Impairment Type Off

-----  
 BEQ Settings (BEQ Filter 1)  
 Block mode Bypass


-----  
 Artificial Head Settings (HATS 1 (HMS II.3))  
 Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 800 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

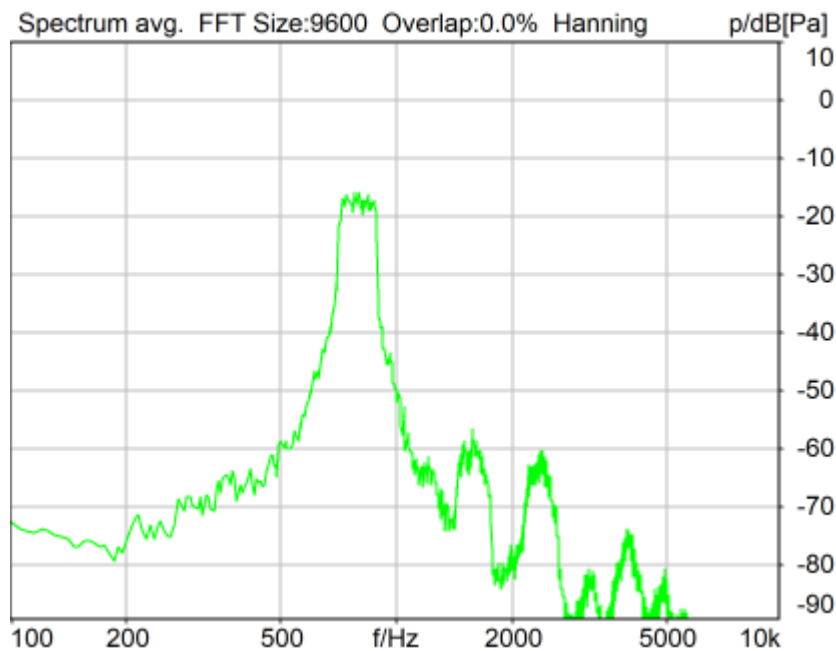

Distortion (Noise) RCV (packed): 28.18 dB (3.90%) Ok

**Ok**

2024/3/6 16:41 ACQUA 5.1.200  
 Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_800hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	675.0 Hz	Stimulus max.	925.0 Hz
Analysis min.	20.0 Hz	Analysis max.	670.0 Hz
Analysis (2) min.	930.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_800Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

**Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

HIB Settings

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

## 5.2 RCV Distortion and Noise - 1000 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

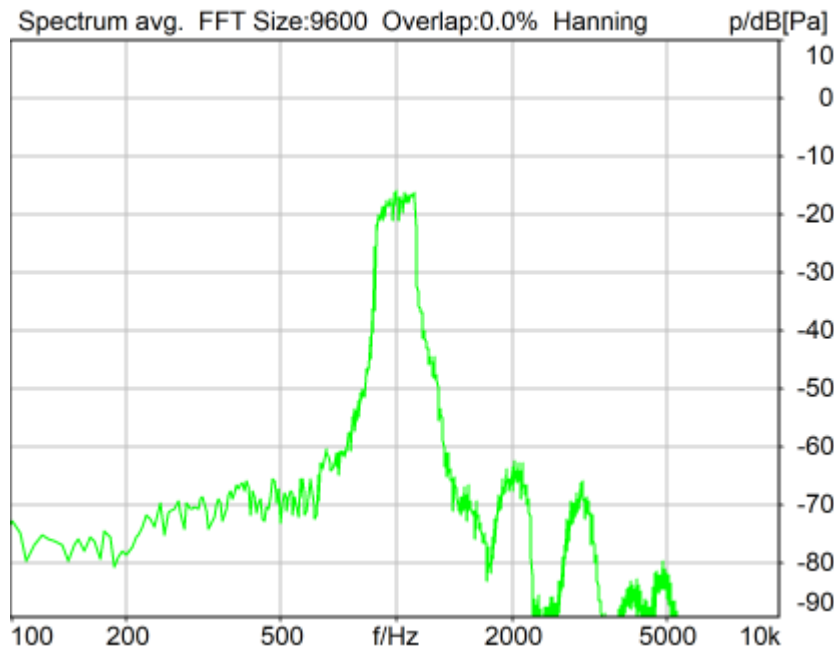

Distortion (Noise) RCV (packed): 26.70 dB (4.62%) Ok

**Ok**

2024/3/6 16:41 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	855.0 Hz	Stimulus max.	1155.0 Hz
Analysis min.	20.0 Hz	Analysis max.	850.0 Hz
Analysis (2) min.	1160.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))

Store to variable RCVNB10\_1000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**




Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

**5.2 RCV Distortion and Noise - 1250 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

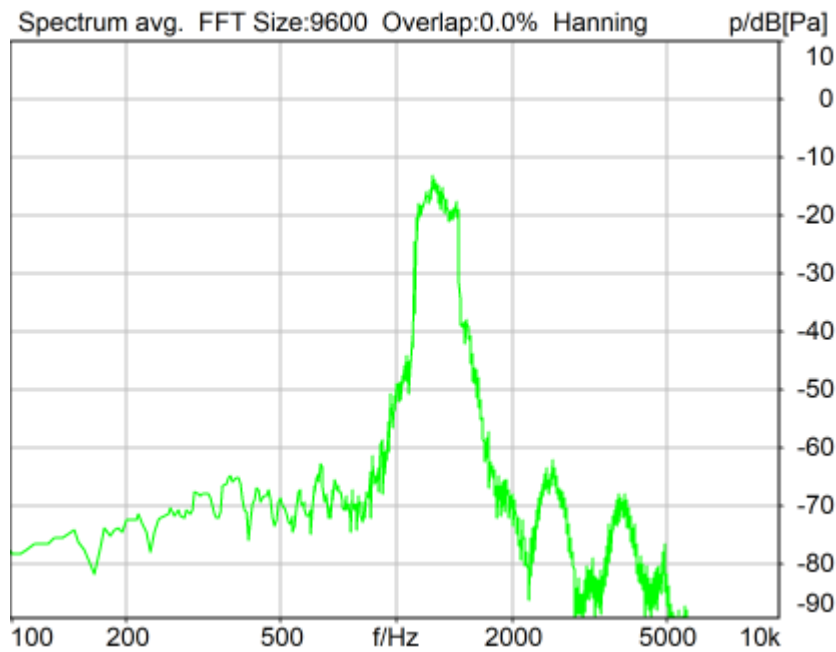

Distortion (Noise) RCV (packed): 24.17 dB (6.18%) Ok

**Ok**

2024/3/6 16:42 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_1250hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1085.0 Hz	Stimulus max.	1450.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1080.0 Hz
Analysis (2) min.	1455.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_1250Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1600 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

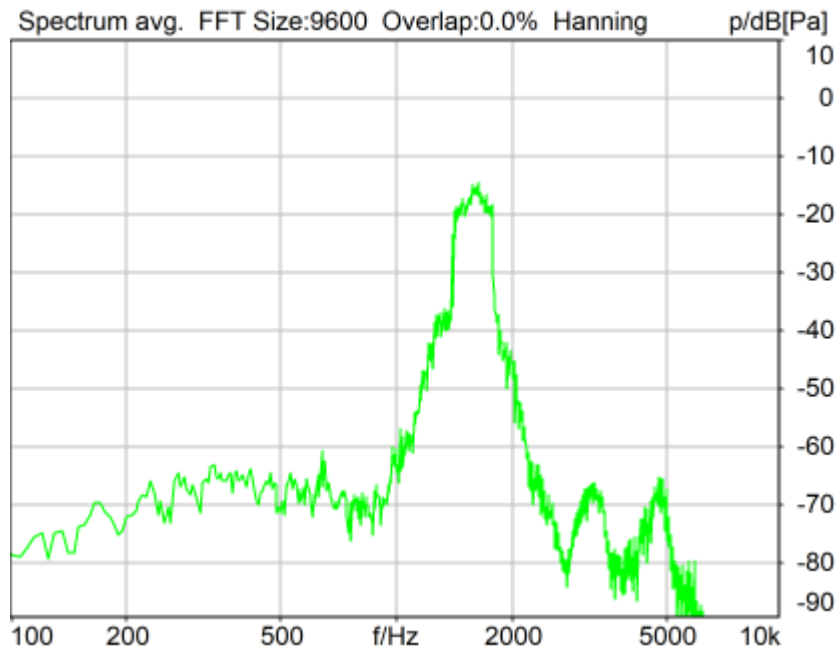

Distortion (Noise) RCV (packed): 22.19 dB (7.77%) Ok

**Ok**

2024/3/6 16:42 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_1600hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	1815.0 Hz
Stimulus min.	1375.0 Hz	Analysis max.	1370.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	1820.0 Hz		

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_1600Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**


HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB

Mic 1 Power Supply Off

Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 2000 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

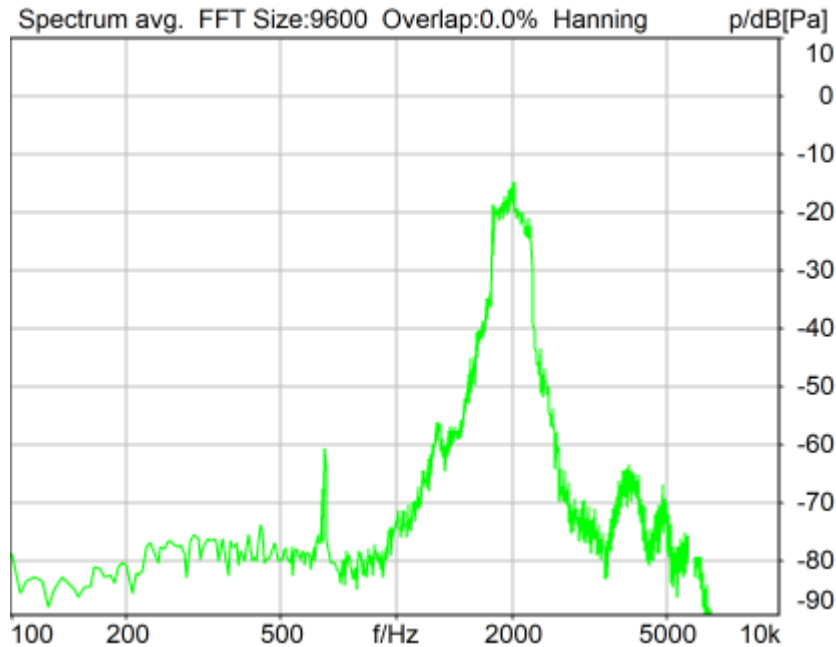

Distortion (Noise) RCV (packed): 22.43 dB (7.56%) Ok

Ok

2024/3/6 16:42 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_2000hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1745.0 Hz	Stimulus max.	2275.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1740.0 Hz
Analysis (2) min.	2280.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_2000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTF Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

-----  
**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

-----  
**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 2500 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

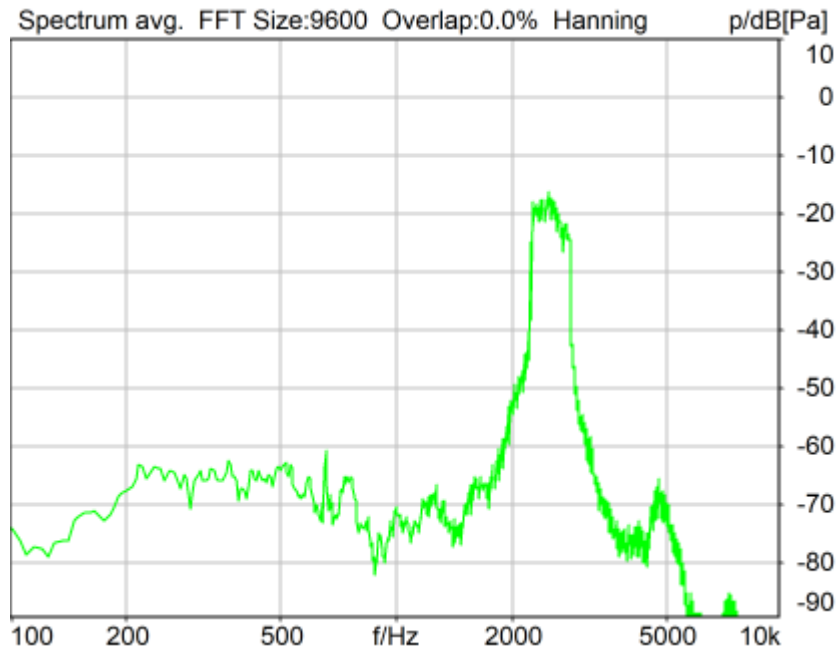

Distortion (Noise) RCV (packed): 28.90 dB (3.59%) Ok

**Ok**

2024/3/6 16:43 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_2500hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2205.0 Hz	Stimulus max.	2855.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2200.0 Hz
Analysis (2) min.	2860.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_2500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off



## 5.2 RCV Distortion and Noise - 3150 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

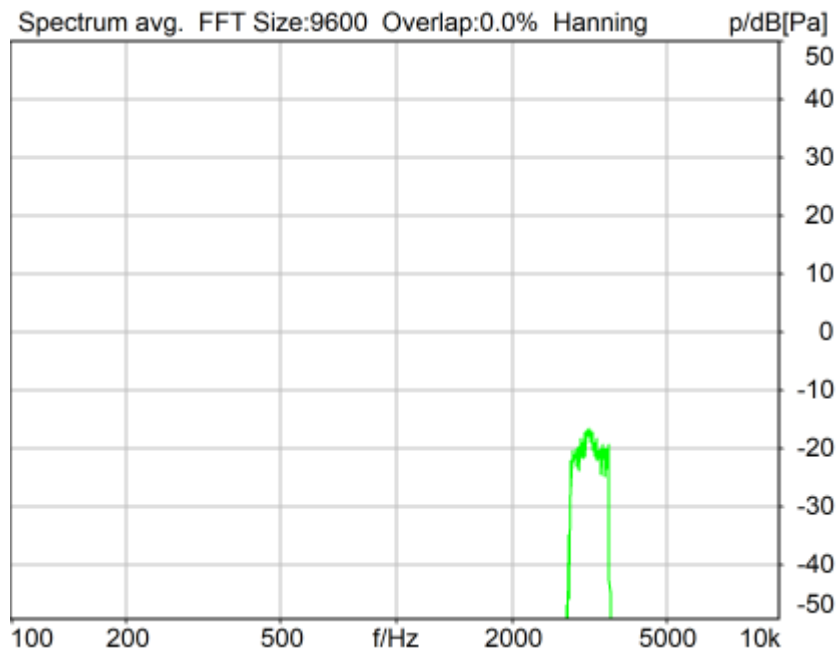

Distortion (Noise) RCV (packed): 34.17 dB (1.96%) Ok

**Ok**

2024/3/6 16:43 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_3150hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction Out 2 -> In 2

Range start 13550.00 ms Range length 200.00 ms

Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2785.0 Hz	Stimulus max.	3585.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2780.0 Hz
Analysis (2) min.	3590.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_3150Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**Report - Receive Distortion and Noise (Conversational Gain)**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N


Region	Frequency	SDNR
1	400Hz	29.59 dB
2	500Hz	29.51 dB
3	630Hz	28.85 dB
4	800Hz	28.18 dB
5	1000Hz	26.70 dB
6	1250Hz	24.17 dB
7	1600Hz	22.19 dB
8	2000Hz	22.43 dB
9	2500Hz	28.90 dB
10	3150Hz	34.17 dB

All SDNRs were greater than 20.0 dB, requirement was met.  
Smallest SDNR was 22.19dB at 1600Hz.

2024/3/6 16:43 ACQUA

### 5.3 Frequency Response 8N FF HANB

TIA-5050 (2018-01) \ Measurements \ Narrowband

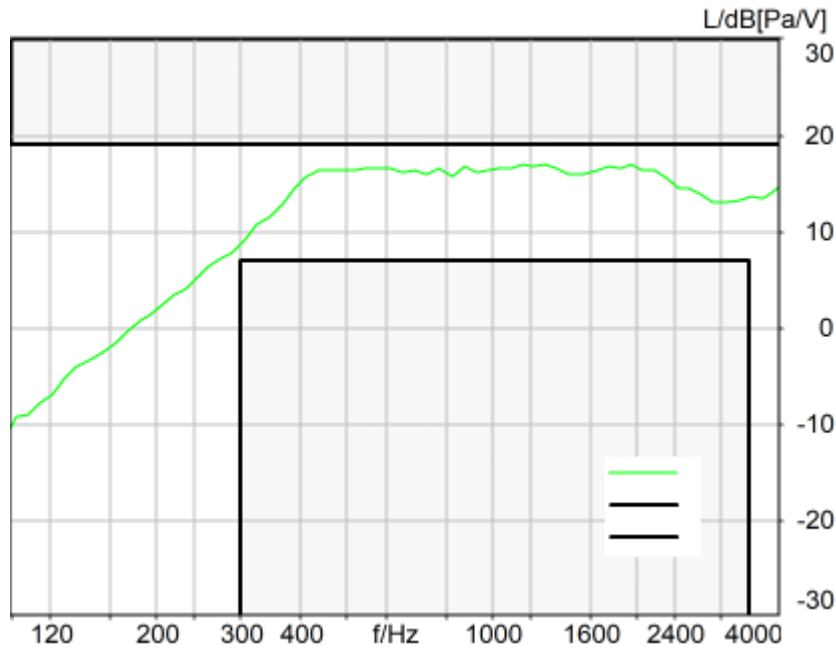

Absolute minimal distance  
2.09 dB at 1151.2 Hz Ok

**Ok**

2024/3/6 18:10 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_nb\_r16.dat**

Level adj. Ch1 -90.0 dB Level adj. Ch2 -4.0 dB

NARROWBAND IEEE-269-2010 Real Speech Signal at Channel 2

Pause 0.5 s +

Real Speech (english, male speaker) 11.5 s, Active Speech Level: -16 dBm0, margin 15.9 dB +

Pause till end of file

Signal level (ch1): -16 dBm0 Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the and of the file.

filtered with 4.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction Out 2 -> In 2

Range start 500.00 ms

Range length 11500.00 ms

Use FIR Filter Ch2

FIR filter drp2ff\_ieee1652

DRP/ERP Ch.1: Off

DRP/ERP Ch.2: Off

Frequency base 12th octave

DIN Row Row A

Method FFT

FFT size 4096

Overlap 75 %

Window function. Hanning

Reference file r521\_rcv\_frq\_spee269\_hanb.fft

Tol. scheme file 521\_rcv\_frq\_man\_hanb.tol Min. freq. for tol. 100.0 Hz

Auto adjust Centrate Max. freq. for tol. 4000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial 77000207

Nickname

Firmware 3.4.17

Sync Source Internal

Clock Pitch 0.00 ppm

-----

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V

Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

-----  
 VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

-----  
 BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.3 Frequency Response 8N DF HANB

TIA-5050 (2018-01) \ Measurements \ Narrowband

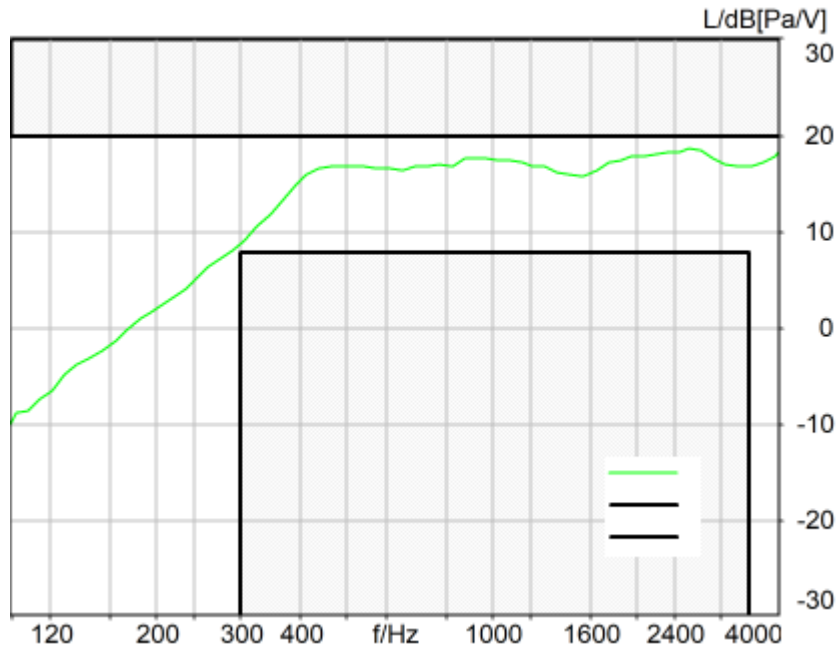

Absolute minimal distance  
1.22 dB at 2571.8 Hz Ok

**Ok**

2024/3/6 18:10 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_nb\_r16.dat**

Level adj. Ch1 -90.0 dB Level adj. Ch2 -4.0 dB

NARROWBAND IEEE-269-2010 Real Speech Signal at Channel 2

Pause 0.5 s +

Real Speech (english, male speaker) 11.5 s, Active Speech Level: -16 dBm0, margin 15.9 dB +

Pause till end of file

Signal level (ch1): -16 dBm0 Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the and of the file.

filtered with 4.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	500.00 ms	Range length	11500.00 ms
Use FIR Filter	Ch2	FIR filter	drp2df_ieeee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	12th octave	DIN Row	Row A
Method	FFT		
FFT size	4096	Overlap	75 %
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hanb.fft		
Tol. scheme file	521_rcv_frq_man_hanb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	4000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTF Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**


HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB

Mic 1 Power Supply Off

Mic 2 Power Supply Off

### 5.3 Frequency Response 2N FF HANB

TIA-5050 (2018-01) \ Measurements \ Narrowband

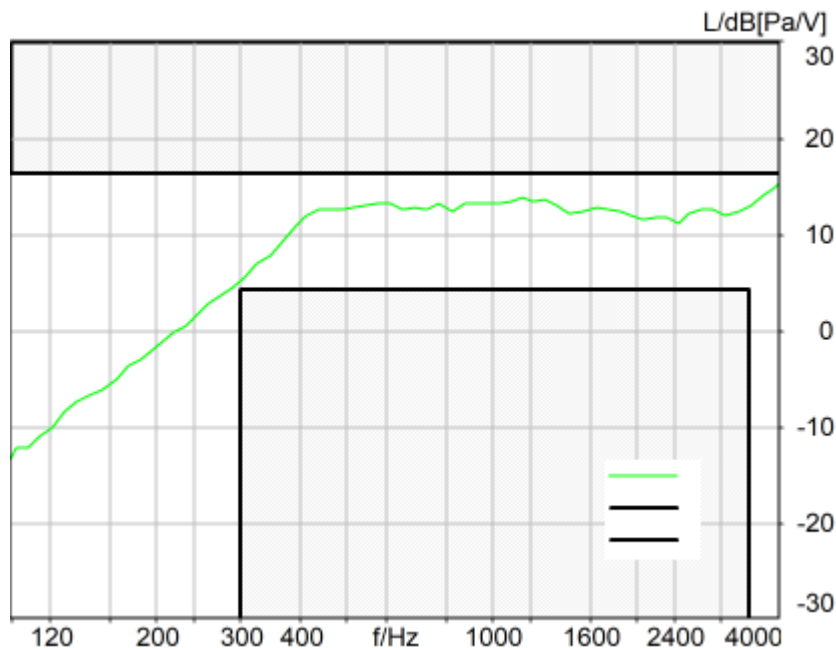

Absolute minimal distance  
1.37 dB at 305.9 Hz Ok

Ok

2024/3/6 18:34 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_nb\_r16.dat**

Level adj. Ch1 -90.0 dB Level adj. Ch2 -4.0 dB

NARROWBAND IEEE-269-2010 Real Speech Signal at Channel 2

Pause 0.5 s +

Real Speech (english, male speaker) 11.5 s, Active Speech Level: -16 dBm0, margin 15.9 dB +

Pause till end of file

Signal level (ch1): -16 dBm0 Active Speech Level, margin 15.9 dB



Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"  
 Alteration:  
 0.2 s Pause added at the beginning of the file.  
 0.8 s Pause added at the end of the file.  
 filtered with 4.0 kHz low-pass filter  
 signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
 Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	500.00 ms	Range length	11500.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	12th octave	DIN Row	Row A
Method	FFT		
FFT size	4096	Overlap	75 %
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hanb.fft		
Tol. scheme file	521_rcv_frq_man_hanb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	4000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr. 12306613


Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

**5.3 Frequency Response 2N DF HANB**

TIA-5050 (2018-01) \ Measurements \ Narrowband

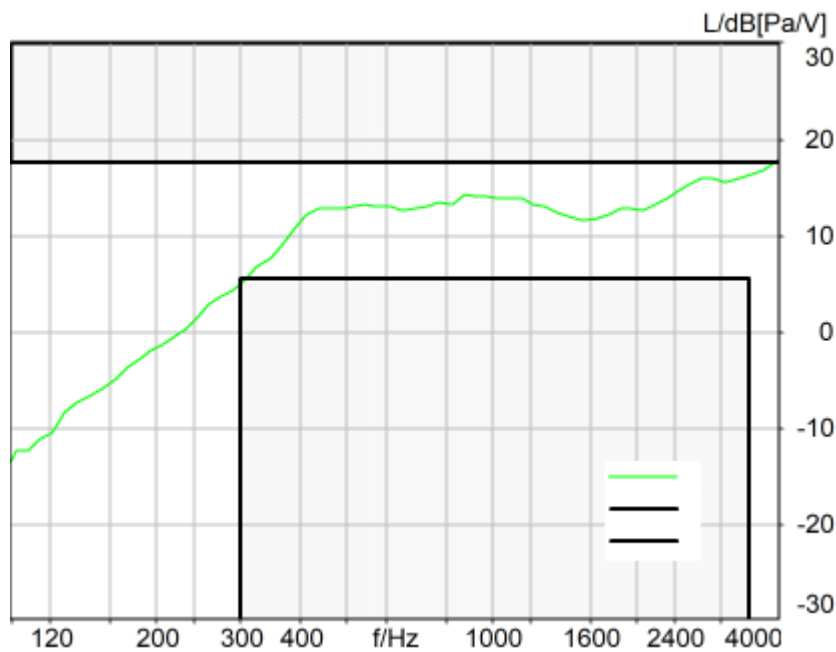

Absolute minimal distance  
-0.09 dB at 3882.4 Hz Not Ok

**Not Ok**

2024/3/6 18:34 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_nb\_r16.dat**

Level adj. Ch1 -90.0 dB Level adj. Ch2 -4.0 dB

NARROWBAND IEEE-269-2010 Real Speech Signal at Channel 2

Pause 0.5 s +

Real Speech (english, male speaker) 11.5 s, Active Speech Level: -16 dBm0, margin 15.9 dB +

Pause till end of file

Signal level (ch1): -16 dBm0 Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the and of the file.

filtered with 4.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	500.00 ms	Range length	11500.00 ms
Use FIR Filter	Ch2	FIR filter	drp2df_ieeee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	12th octave	DIN Row	Row A
Method	FFT		
FFT size	4096	Overlap	75 %
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hanb.fft		
Tol. scheme file	521_rcv_frq_man_hanb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	4000.0 Hz

**Special Features**

Compensate delay 214.4000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

VoIP Settings (VoIP)

---

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTF Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

-----  
**BEQ Settings (BEQ Filter 1)**

Block mode      Bypass

-----  
**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## Measurement Protocol

Measurement Object	WIFI 5.3G_802.11a 6M _EVS WB 128kbps_CH60
Description	HMD_2322#N159V

Project	TIA-5050 (2018-01)
Report Generation Date	2024/3/7 9:02
Responsible Person	audio

## Status Overview

SMD	Status	Single Value Description	Single Value	Object
Overall Receive Delay WB	Done	Delay (Cross) [ms]	152.3	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.1a Receive Volume Control Performance 8N WB	Ok	Corrected Speech Level [dB[SPL]]	16.69	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.1b Receive Volume Control Performance 2N WB	Ok	Corrected Speech Level [dB[SPL]]	12.66	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	30.98	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 315 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	30.55	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 400 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	29.77	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	30.08	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 630 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.56	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 800 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.71	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 1000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.39	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 1250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	24.20	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 1600 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	23.55	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 2000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	22.31	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 2500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	29.39	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 3150 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	30.25	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 4000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	29.59	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 5000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.77	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 2000Hz)	22.31	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	31.27	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 315 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	30.85	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 400 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	29.85	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	30.41	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 630 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.86	WIFI 5.3G_802.11a 6M EV S WB 128kbps_CH60

5.2 RCV Distortion and Noise - 800 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	33.50	WIFI 5.3G_802.11a 6M_EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 1000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.78	WIFI 5.3G_802.11a 6M_EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 1250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	24.48	WIFI 5.3G_802.11a 6M_EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 1600 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	23.50	WIFI 5.3G_802.11a 6M_EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 2000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	21.76	WIFI 5.3G_802.11a 6M_EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 2500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	28.68	WIFI 5.3G_802.11a 6M_EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 3150 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	28.44	WIFI 5.3G_802.11a 6M_EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 4000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	28.38	WIFI 5.3G_802.11a 6M_EV S WB 128kbps_CH60
5.2 RCV Distortion and Noise - 5000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	35.66	WIFI 5.3G_802.11a 6M_EV S WB 128kbps_CH60
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 2000Hz)	21.76	WIFI 5.3G_802.11a 6M_EV S WB 128kbps_CH60
5.3 Frequency Response 8N FF	Ok	Min. dist. to tolerance scheme [dB], 5767.3 Hz	1.73	WIFI 5.3G_802.11a 6M_EV S WB 128kbps_CH60
5.3 Frequency Response 8N DF	Ok	Min. dist. to tolerance scheme [dB], 649.1 Hz	1.24	WIFI 5.3G_802.11a 6M_EV S WB 128kbps_CH60
5.3 Frequency Response 2N FF	Ok	Min. dist. to tolerance scheme [dB], 823.9 Hz	1.23	WIFI 5.3G_802.11a 6M_EV S WB 128kbps_CH60
5.3 Frequency Response 2N DF	Ok	Min. dist. to tolerance scheme [dB], 4870.0 Hz	0.64	WIFI 5.3G_802.11a 6M_EV S WB 128kbps_CH60


---

Overall Receive Delay WB	5
5.1a Receive Volume Control Performance 8N WB	6
5.1b Receive Volume Control Performance 2N WB	8
5.2 RCV Distortion and Noise - 250 Hz WB	10
5.2 RCV Distortion and Noise - 315 Hz WB	12
5.2 RCV Distortion and Noise - 400 Hz WB	14
5.2 RCV Distortion and Noise - 500 Hz WB	16
5.2 RCV Distortion and Noise - 630 Hz WB	18
5.2 RCV Distortion and Noise - 800 Hz WB	20
5.2 RCV Distortion and Noise - 1000 Hz WB	22
5.2 RCV Distortion and Noise - 1250 Hz WB	24
5.2 RCV Distortion and Noise - 1600 Hz WB	26
5.2 RCV Distortion and Noise - 2000 Hz WB	28
5.2 RCV Distortion and Noise - 2500 Hz WB	30
5.2 RCV Distortion and Noise - 3150 Hz WB	32
5.2 RCV Distortion and Noise - 4000 Hz WB	34
5.2 RCV Distortion and Noise - 5000 Hz WB	36
Report - Receive Distortion and Noise (Conversational Gain)	38
5.2 RCV Distortion and Noise - 250 Hz WB	39
5.2 RCV Distortion and Noise - 315 Hz WB	41
5.2 RCV Distortion and Noise - 400 Hz WB	43
5.2 RCV Distortion and Noise - 500 Hz WB	45
5.2 RCV Distortion and Noise - 630 Hz WB	47
5.2 RCV Distortion and Noise - 800 Hz WB	49
5.2 RCV Distortion and Noise - 1000 Hz WB	51
5.2 RCV Distortion and Noise - 1250 Hz WB	53
5.2 RCV Distortion and Noise - 1600 Hz WB	55
5.2 RCV Distortion and Noise - 2000 Hz WB	57
5.2 RCV Distortion and Noise - 2500 Hz WB	59
5.2 RCV Distortion and Noise - 3150 Hz WB	61
5.2 RCV Distortion and Noise - 4000 Hz WB	62
5.2 RCV Distortion and Noise - 5000 Hz WB	64
Report - Receive Distortion and Noise (Conversational Gain)	66
5.3 Frequency Response 8N FF	67
5.3 Frequency Response 8N DF	69
5.3 Frequency Response 2N FF	72
5.3 Frequency Response 2N DF	74



## Overall Receive Delay WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ Preparation - Delay measurement

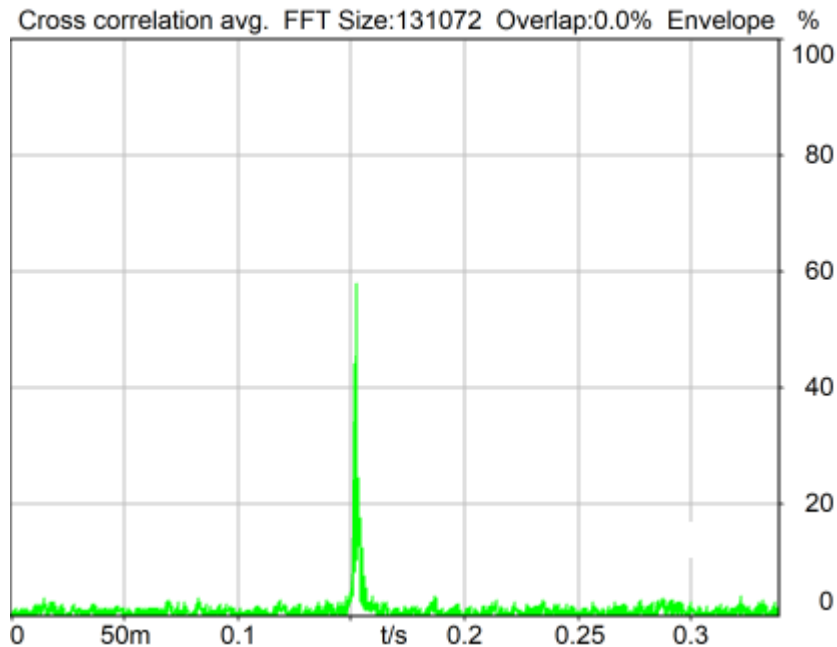

Delay (Cross): 152.3 ms

2024/3/6 16:45 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

### Source: csswb1b\_r1s.dat

WIDEBAND Composite Source Signal RCV P.501 (1 bursts) at Channel 2

Pause 0.5 s +

voiced signal + 8000 Hz band limited random noise 1.0 s +

Pause till end of file

Signal level (ch2): -14.7 dBm0 (corresponds to approx. -16.0 dBm0 for a 350 ms CSS considering 101 ms Pause) from 0.5s to 1.544s for 4-k FFT, Hanning window,

75 % overlap in frequency range of 100 to 8000 Hz

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.1: 0.00 dB

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Range start	550.00 ms	Range length	1950.00 ms
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation	Overlap	0 %
FFT size	131072	Smooth	Off
Window function.	Hanning		
Delayed channel	None		
Valid range start	-1228.79 ms	Valid range end	1228.81 ms

**Special Features**

Show source signal	Source ch.2	Store to variable	D_RCV_WB
--------------------	-------------	-------------------	----------

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTIP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

**BEQ Settings (BEQ Filter 1)**

Block mode	Bypass
------------	--------

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.1a Receive Volume Control Performance 8N WB

TIA-5050 (2018-01) \ Measurements \ Wideband

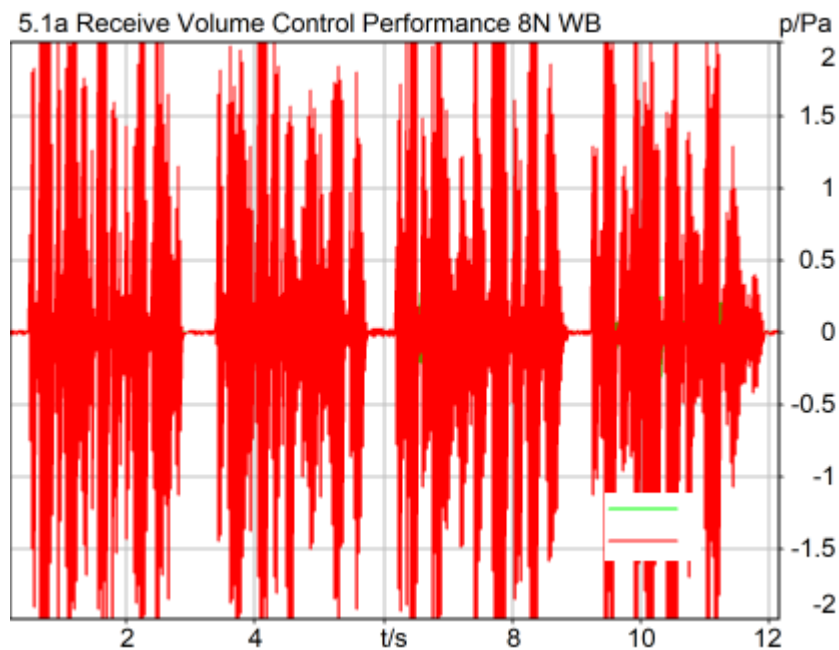

**Correction**

X - 70

Speech Level RCV: 86.69 dB[SPL], Act.: 88.75%

Corrected Speech Level: 16.69 dB[SPL] Ok

**Ok**

2024/3/6 16:46 ACQUA 5.1.200

**Limits**

	<b>lower</b>
Run 1	6.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	12000.00 ms
Range start	200.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	Margin (15.9dB nom)	
Bandpass filter	Super Wideband		

15.90 dB

**Special Features**

Show source signal Source ch.2

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTSP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

**BEQ Settings (BEQ Filter 1)**

Block mode	Bypass
------------	--------

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **5.1b Receive Volume Control Performance 2N WB**

TIA-5050 (2018-01) \ Measurements \ Wideband

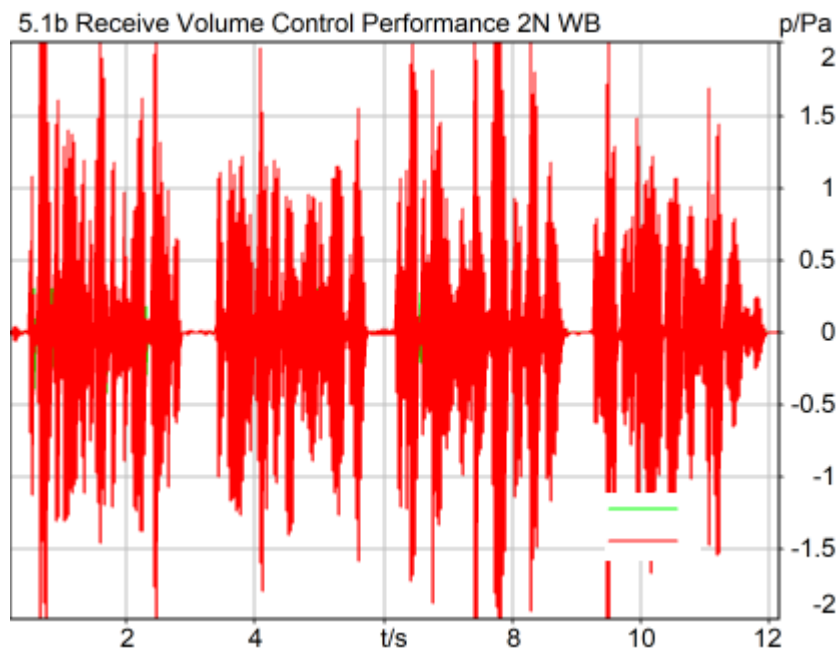

**Correction**

X - 70

Speech Level RCV: 82.66 dB[SPL], Act.: 88.69%

Corrected Speech Level: 12.66 dB[SPL] Ok

**Ok**

2024/3/6 16:47 ACQUA 5.1.200

**Limits**

	<b>lower</b>
Run 1	6.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	12000.00 ms
Range start	200.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	Margin (15.9dB nom)	
Bandpass filter	Super Wideband		

15.90 dB

**Special Features**

Show source signal Source ch.2

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTSP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **5.2 RCV Distortion and Noise - 250 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

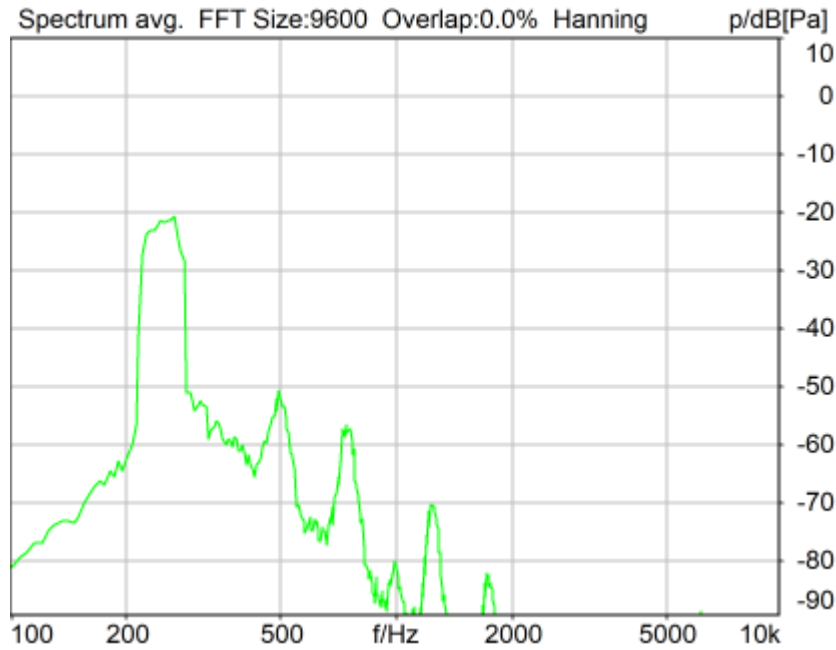

Distortion (Noise) RCV (packed): 30.98 dB (2.83%) Ok

**Ok**

2024/3/6 18:26 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_250hz\_sr20dbm0\_v02.dat.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %

---

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	190.0 Hz	Stimulus max.	315.0 Hz
Analysis min.	20.0 Hz	Analysis max.	185.0 Hz
Analysis (2) min.	320.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_250Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 315 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N



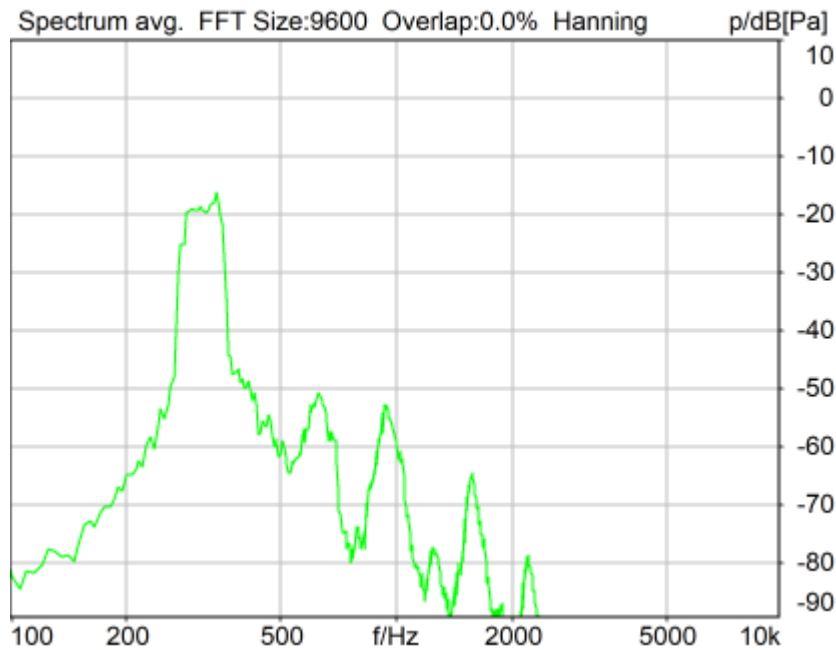

Distortion (Noise) RCV (packed): 30.55 dB (2.97%) Ok

**Ok**

2024/3/6 18:26 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_315hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	245.0 Hz	Stimulus max.	390.0 Hz
Analysis min.	20.0 Hz	Analysis max.	240.0 Hz
Analysis (2) min.	395.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_315Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 400 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

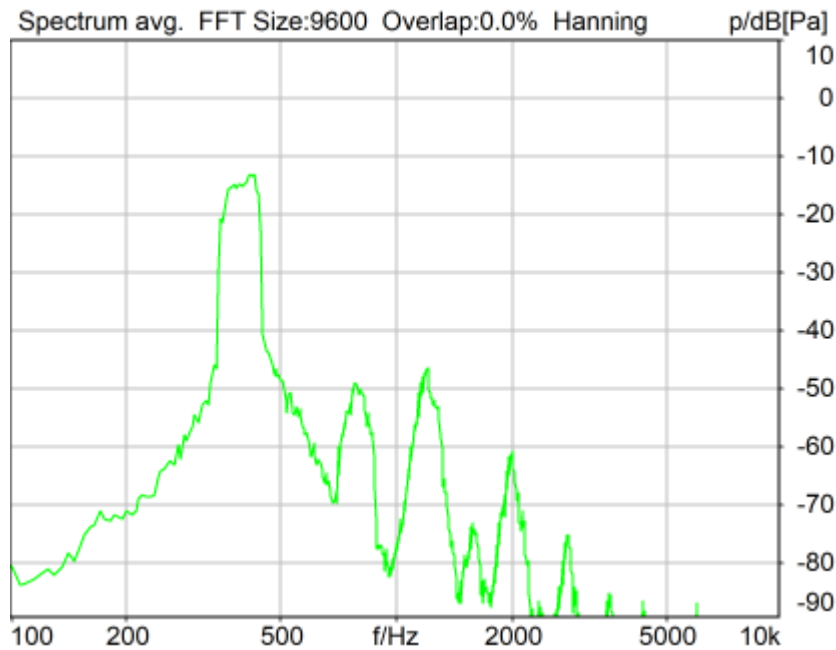

Distortion (Noise) RCV (packed): 29.77 dB (3.25%) Ok

**Ok**

2024/3/6 18:27 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_400hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	320.0 Hz	Stimulus max.	480.0 Hz
Analysis min.	20.0 Hz	Analysis max.	315.0 Hz
Analysis (2) min.	485.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_400Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 500 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

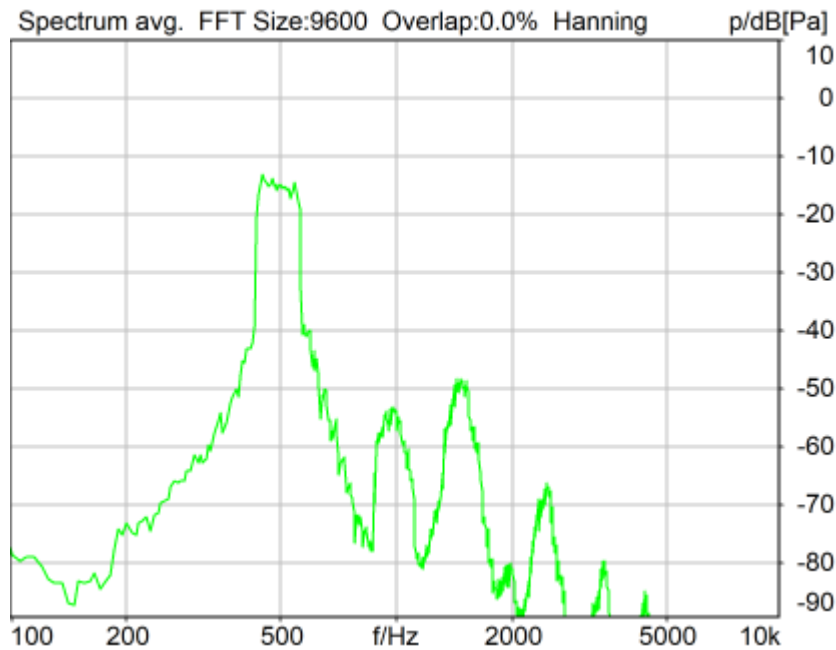

Distortion (Noise) RCV (packed): 30.08 dB (3.13%) Ok

**Ok**

2024/3/6 18:27 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_500hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	410.0 Hz	Stimulus max.	595.0 Hz
Analysis min.	20.0 Hz	Analysis max.	405.0 Hz
Analysis (2) min.	600.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 630 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

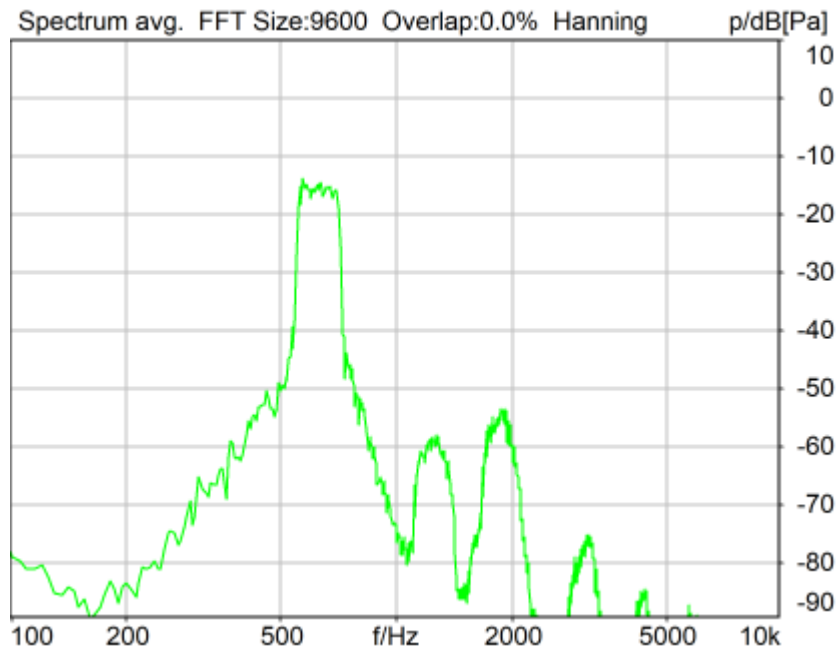

Distortion (Noise) RCV (packed): 32.56 dB (2.35%) Ok

**Ok**

2024/3/6 18:27 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_630hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	525.0 Hz	Stimulus max.	745.0 Hz
Analysis min.	20.0 Hz	Analysis max.	520.0 Hz
Analysis (2) min.	750.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_630Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 800 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N



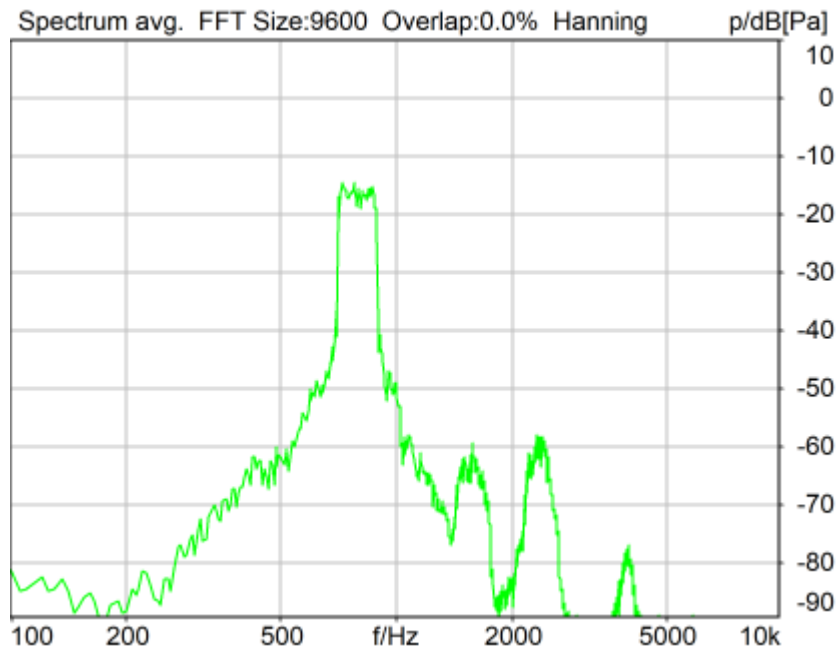

Distortion (Noise) RCV (packed): 32.71 dB (2.31%) Ok

Ok

2024/3/6 18:28 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_800hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	675.0 Hz	Stimulus max.	925.0 Hz
Analysis min.	20.0 Hz	Analysis max.	670.0 Hz
Analysis (2) min.	930.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_800Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

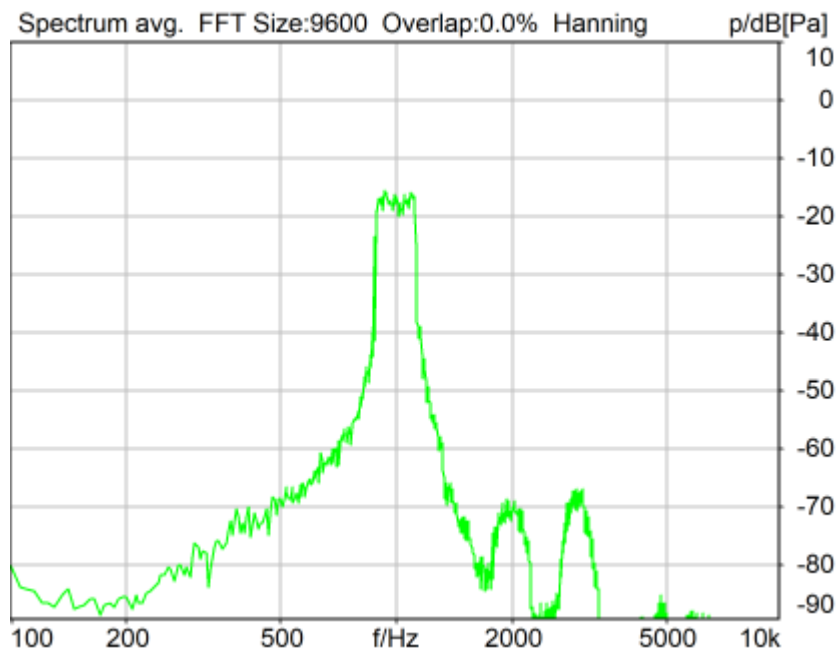

Distortion (Noise) RCV (packed): 32.39 dB (2.40%) Ok

Ok

2024/3/6 18:28 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	855.0 Hz	Stimulus max.	1155.0 Hz
Analysis min.	20.0 Hz	Analysis max.	850.0 Hz
Analysis (2) min.	1160.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1250 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

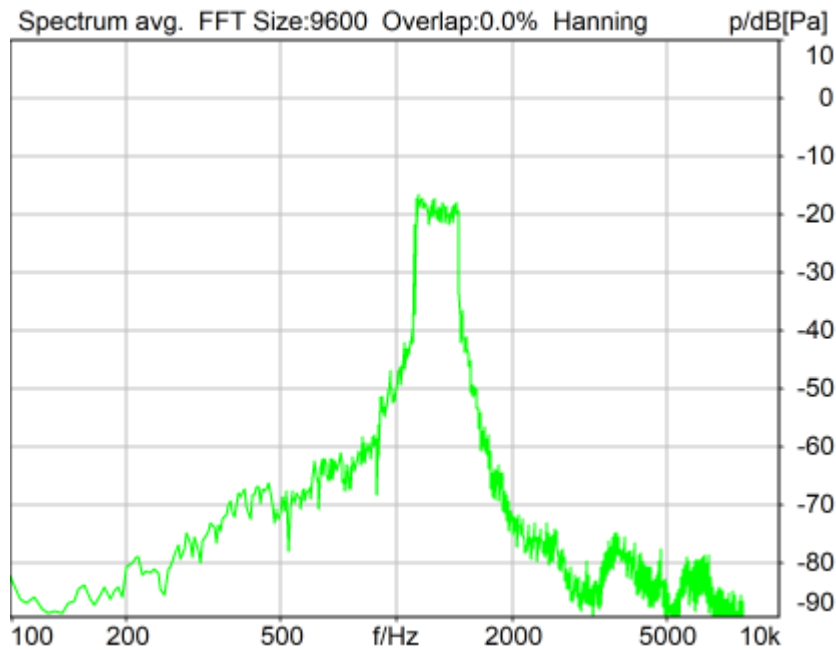

Distortion (Noise) RCV (packed): 24.20 dB (6.17%) Ok

**Ok**

2024/3/6 18:29 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1250hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1085.0 Hz	Stimulus max.	1450.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1080.0 Hz
Analysis (2) min.	1455.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1250Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1600 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

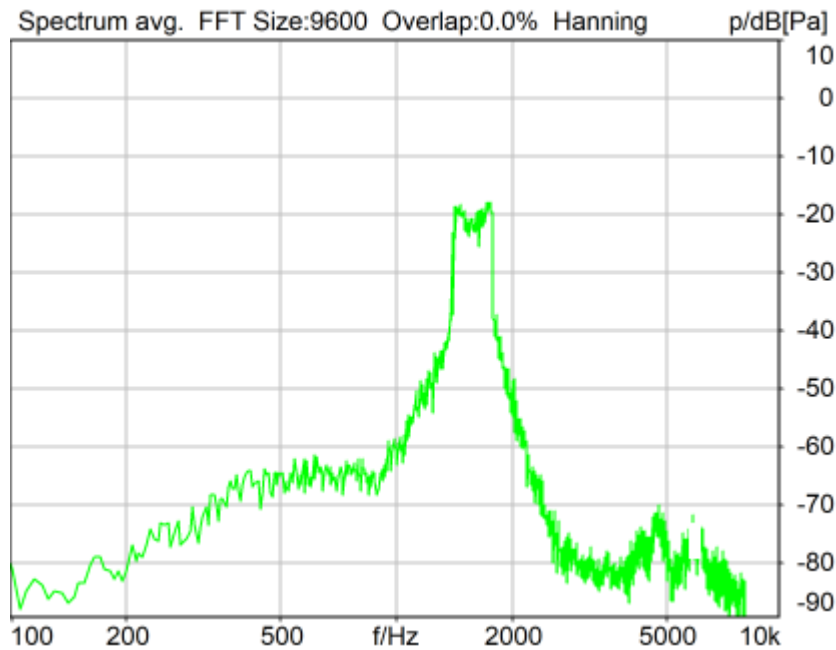

Distortion (Noise) RCV (packed): 23.55 dB (6.64%) Ok

**Ok**

2024/3/6 18:29 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1600hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1375.0 Hz	Stimulus max.	1815.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1370.0 Hz
Analysis (2) min.	1820.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1600Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 2000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N



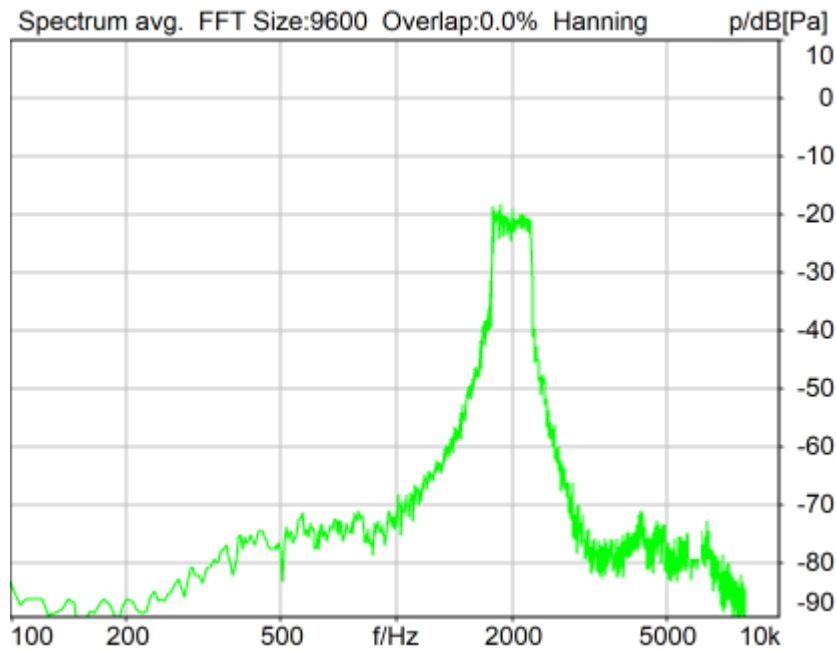

Distortion (Noise) RCV (packed): 22.31 dB (7.66%) Ok

**Ok**

2024/3/6 18:29 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1745.0 Hz	Stimulus max.	2275.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1740.0 Hz
Analysis (2) min.	2280.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_2000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 2500 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

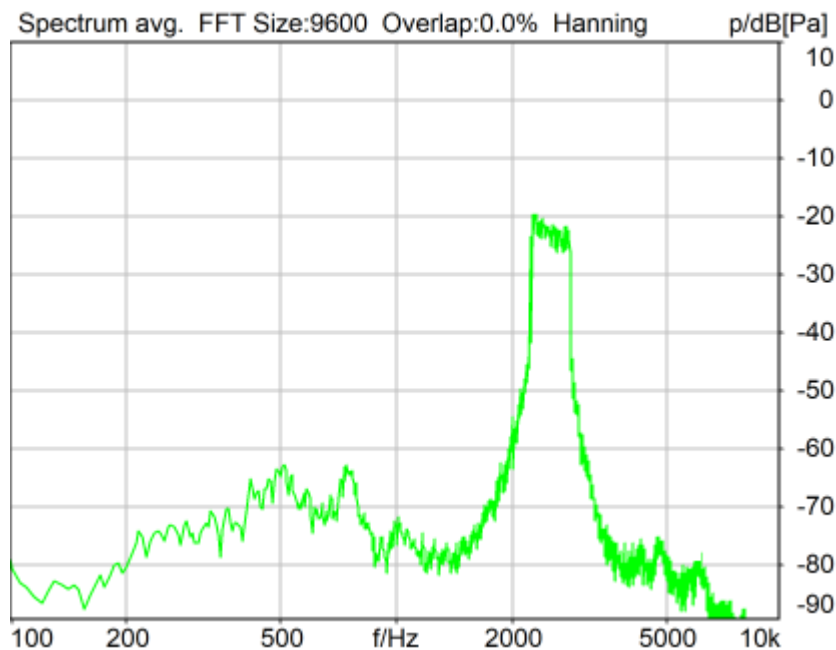

Distortion (Noise) RCV (packed): 29.39 dB (3.39%) Ok

**Ok**

2024/3/6 18:30 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2500hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2205.0 Hz	Stimulus max.	2855.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2200.0 Hz
Analysis (2) min.	2860.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_2500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 3150 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

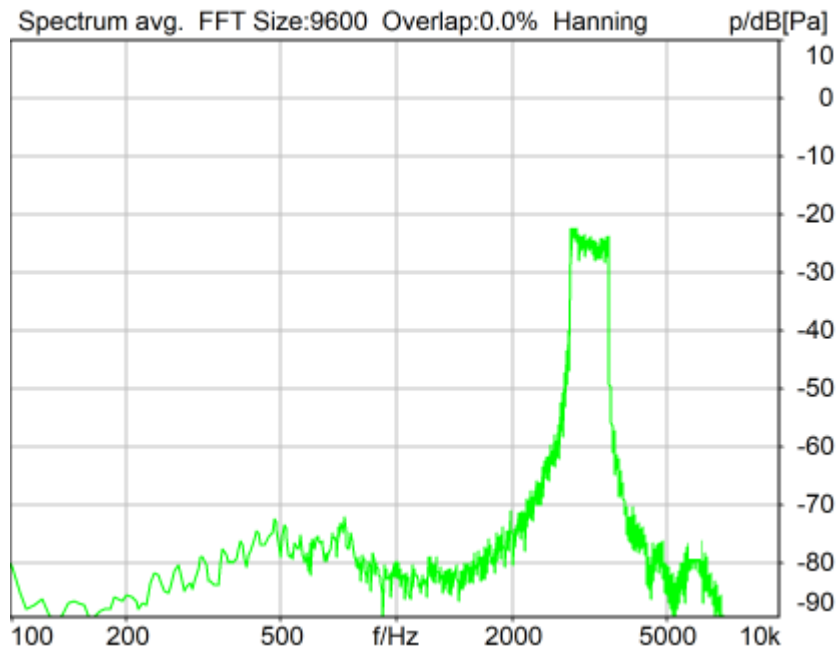

Distortion (Noise) RCV (packed): 30.25 dB (3.07%) Ok

**Ok**

2024/3/6 18:30 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_3150hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2785.0 Hz	Stimulus max.	3585.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2780.0 Hz
Analysis (2) min.	3590.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_3150Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 4000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

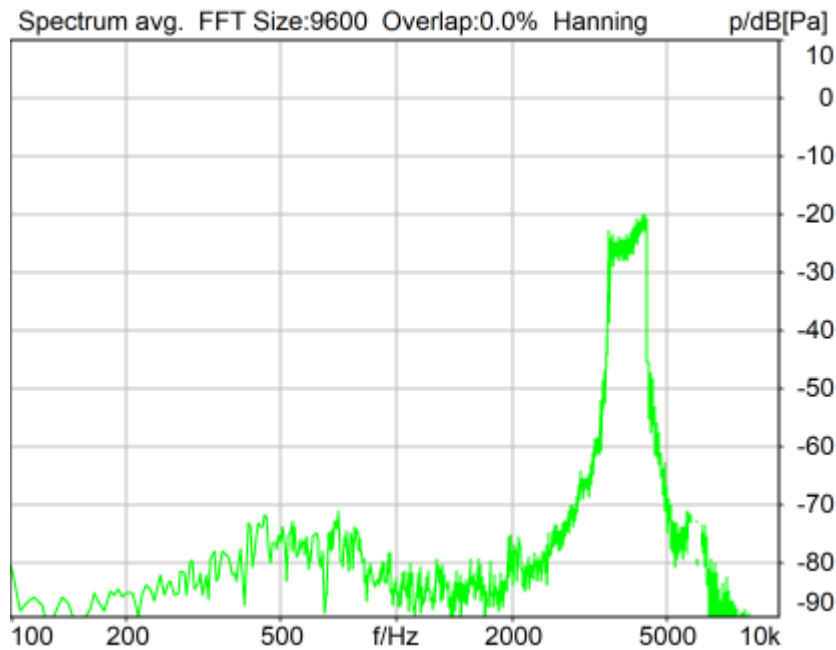

Distortion (Noise) RCV (packed): 29.59 dB (3.31%) Ok

**Ok**

2024/3/6 18:31 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_4000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	3515.0 Hz	Stimulus max.	4500.0 Hz
Analysis min.	20.0 Hz	Analysis max.	3510.0 Hz
Analysis (2) min.	4505.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_4000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 5000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N



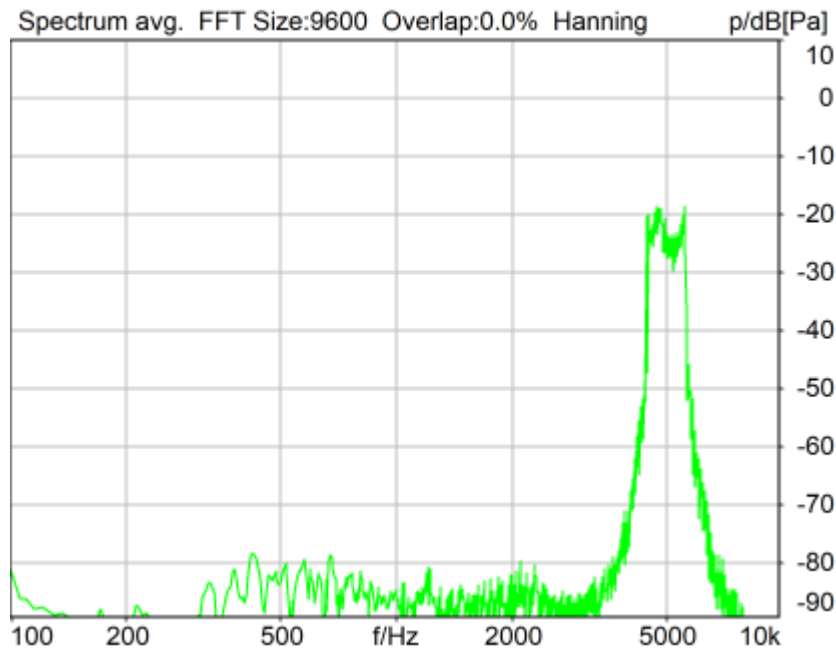

Distortion (Noise) RCV (packed): 32.77 dB (2.30%) Ok

**Ok**

2024/3/6 18:31 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_5000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	4430.0 Hz	Stimulus max.	5660.0 Hz
Analysis min.	20.0 Hz	Analysis max.	4425.0 Hz
Analysis (2) min.	5665.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_5000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**Report - Receive Distortion and Noise (Conversational Gain)**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

Region	Frequency	SDNR
1	250Hz	30.98 dB


2	315Hz	30.55 dB
3	400Hz	29.77 dB
4	500Hz	30.08 dB
5	630Hz	32.56 dB
6	800Hz	32.71 dB
7	1000Hz	32.39 dB
8	1250Hz	24.20 dB
9	1600Hz	23.55 dB
10	2000Hz	22.31 dB
11	2500Hz	29.39 dB
12	3150Hz	30.25 dB
13	4000Hz	29.59 dB
14	5000Hz	32.77 dB

All SDNRs were greater than 20.0 dB, requirement was met.  
Smallest SDNR was 22.31dB at 2000Hz.

2024/3/6 18:31 ACQUA

## 5.2 RCV Distortion and Noise - 250 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

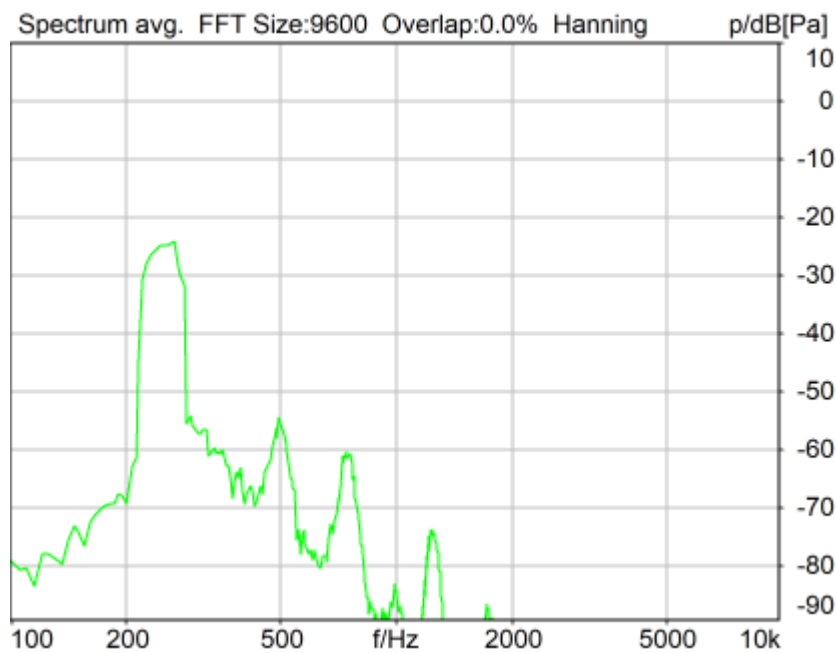

Distortion (Noise) RCV (packed): 31.27 dB (2.73%) Ok

**Ok**

2024/3/6 18:49 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_250hz\_sr20dbm0\_v02.dat.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	190.0 Hz	Stimulus max.	315.0 Hz
Analysis min.	20.0 Hz	Analysis max.	185.0 Hz
Analysis (2) min.	320.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_250Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right


**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz

Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
-----			
VoIP Settings (VoIP)			
RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTIP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off
-----			
BEQ Settings (BEQ Filter 1)			
Block mode	Bypass		
-----			
Artificial Head Settings (HATS 1 (HMS II.3))			
Ser. Nr.	12306613	Pinna Type	Type 3.3
<b>HIB Settings</b>			
HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 315 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

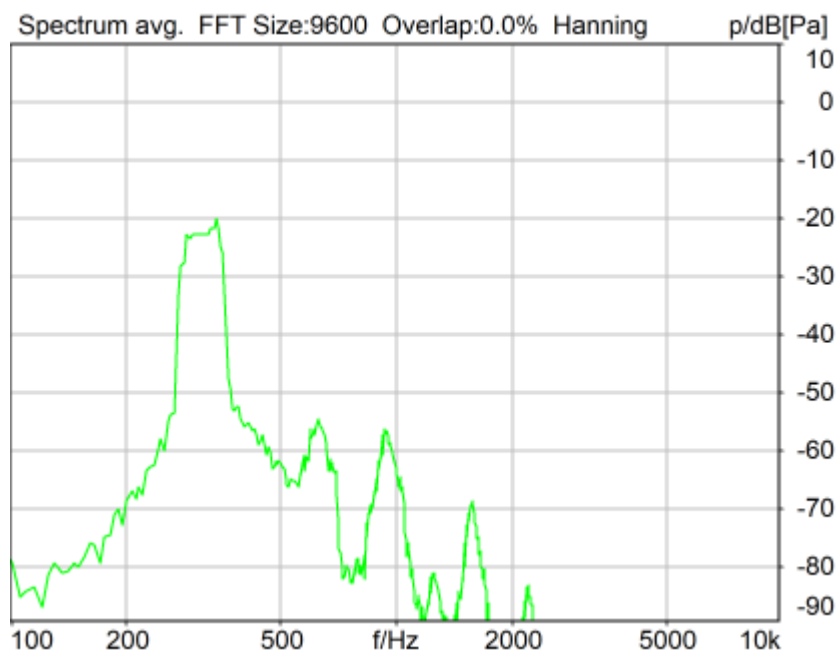

Distortion (Noise) RCV (packed): 30.85 dB (2.87%) Ok

**Ok**

2024/3/6 18:50 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_315hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	245.0 Hz	Stimulus max.	390.0 Hz
Analysis min.	20.0 Hz	Analysis max.	240.0 Hz
Analysis (2) min.	395.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))

Store to variable RCVWB10\_315Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

**Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 400 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

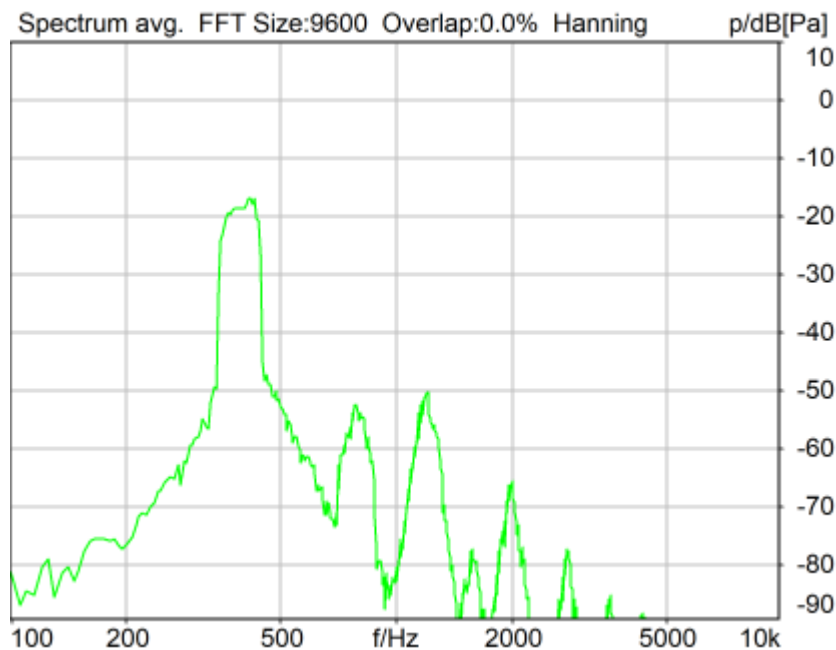

Distortion (Noise) RCV (packed): 29.85 dB (3.22%) Ok

**Ok**

2024/3/6 18:50 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_400hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	320.0 Hz	Stimulus max.	480.0 Hz
Analysis min.	20.0 Hz	Analysis max.	315.0 Hz
Analysis (2) min.	485.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_400Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			



Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 500 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

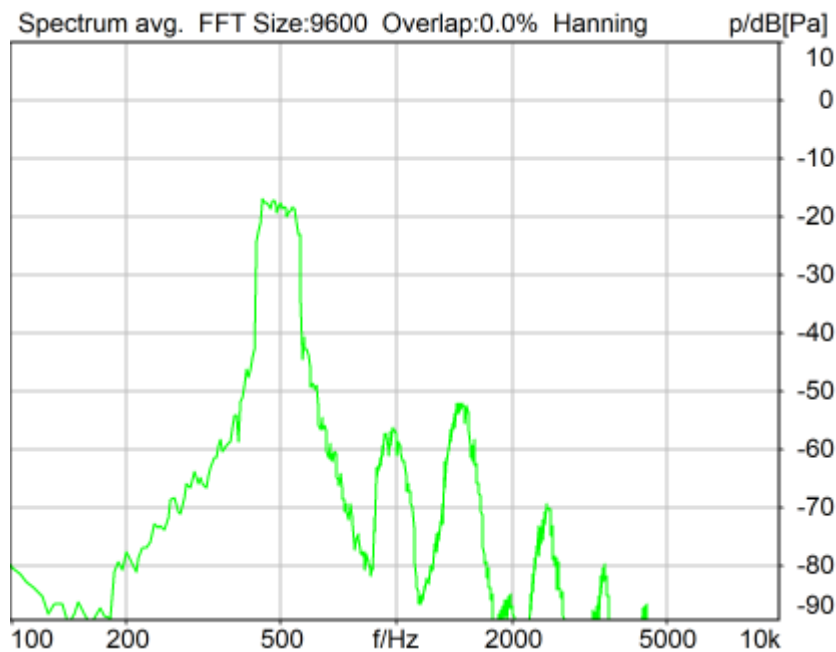

Distortion (Noise) RCV (packed): 30.41 dB (3.02%) Ok

**Ok**

2024/3/6 18:50 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_500hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	410.0 Hz
Stimulus min.	410.0 Hz	Stimulus max.	595.0 Hz
Analysis min.	20.0 Hz	Analysis max.	405.0 Hz
Analysis (2) min.	600.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMT Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

-----  
BEQ Settings (BEQ Filter 1)  
Block mode      Bypass  
-----

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 630 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

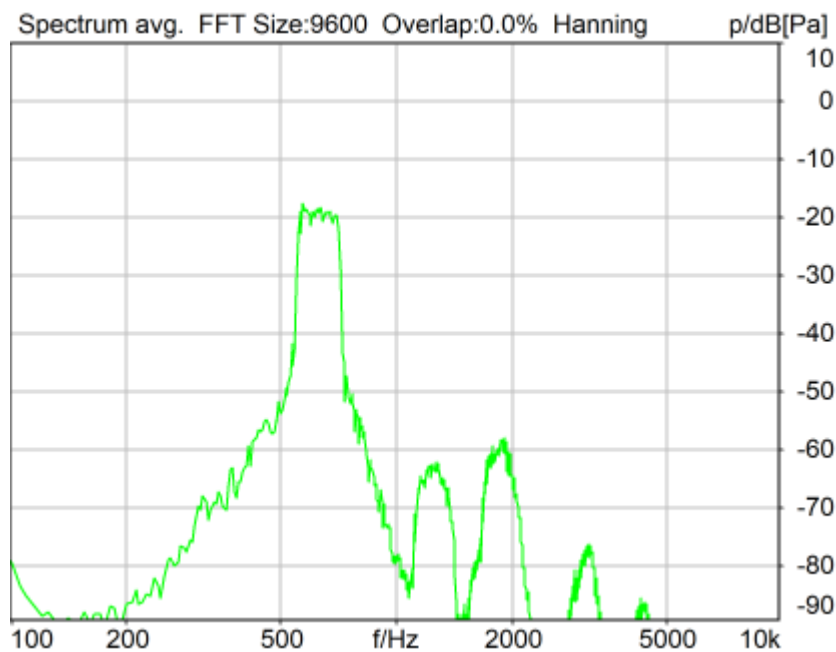

Distortion (Noise) RCV (packed): 32.86 dB (2.27%) Ok

**Ok**

2024/3/6 18:51 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
--	-------

Run 1	20.00 dB
-------	----------

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_630hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	525.0 Hz	Stimulus max.	745.0 Hz
Analysis min.	20.0 Hz	Analysis max.	520.0 Hz
Analysis (2) min.	750.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_630Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0

FMTF Parameter ;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0  
 Impairment Mode Off Impairment Type Off

-----  
 BEQ Settings (BEQ Filter 1)  
 Block mode Bypass


-----  
 Artificial Head Settings (HATS 1 (HMS II.3))  
 Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 800 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

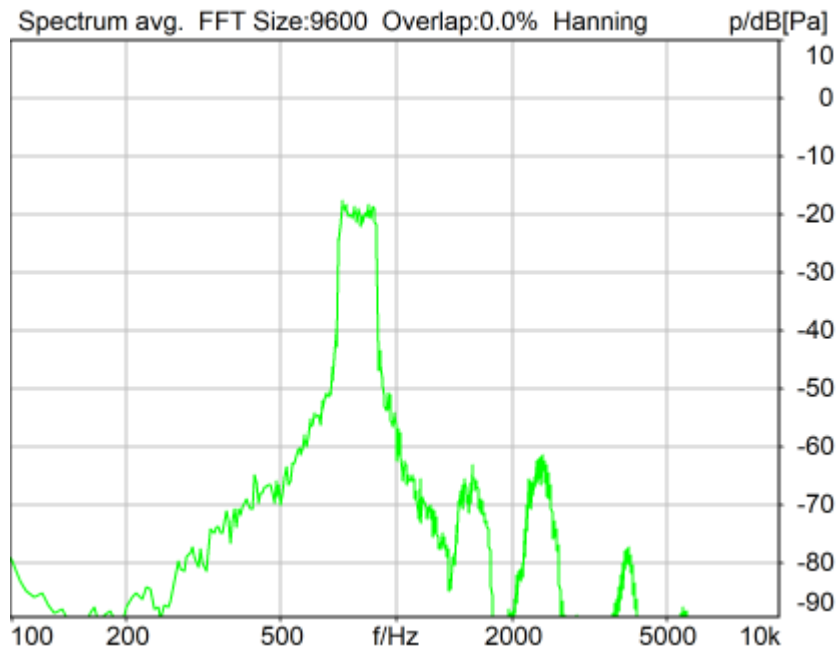

Distortion (Noise) RCV (packed): 33.50 dB (2.11%) Ok

**Ok**

2024/3/6 18:51 ACQUA 5.1.200  
 Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_800hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	675.0 Hz	Stimulus max.	925.0 Hz
Analysis min.	20.0 Hz	Analysis max.	670.0 Hz
Analysis (2) min.	930.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_800Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

HIB Settings

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

## 5.2 RCV Distortion and Noise - 1000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

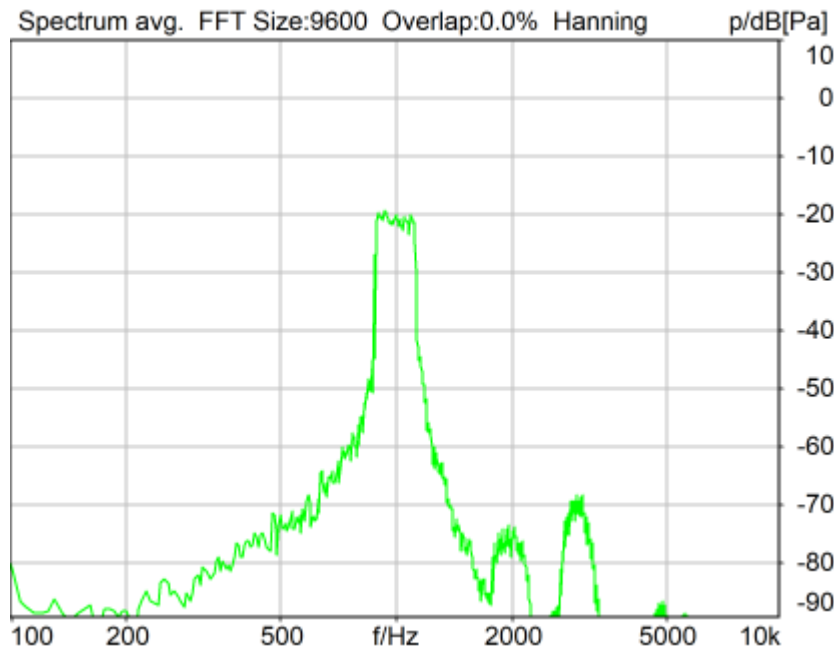

Distortion (Noise) RCV (packed): 32.78 dB (2.30%) Ok

Ok

2024/3/6 18:52 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	855.0 Hz	Stimulus max.	1155.0 Hz
Analysis min.	20.0 Hz	Analysis max.	850.0 Hz
Analysis (2) min.	1160.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))

Store to variable RCVWB10\_1000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EV5/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**




Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

**5.2 RCV Distortion and Noise - 1250 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

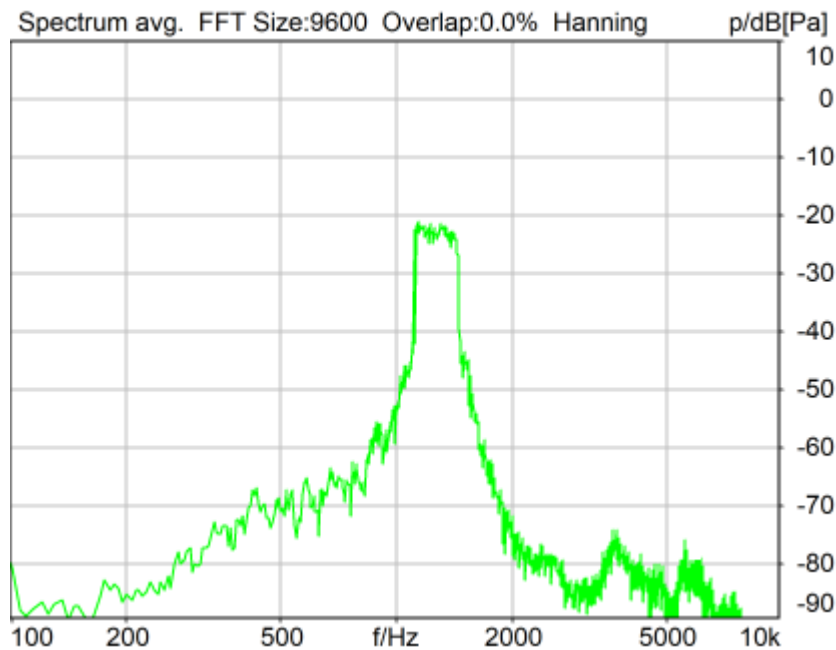

Distortion (Noise) RCV (packed): 24.48 dB (5.97%) Ok

**Ok**

2024/3/6 18:52 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_1250hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1085.0 Hz	Stimulus max.	1450.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1080.0 Hz
Analysis (2) min.	1455.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1250Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1600 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

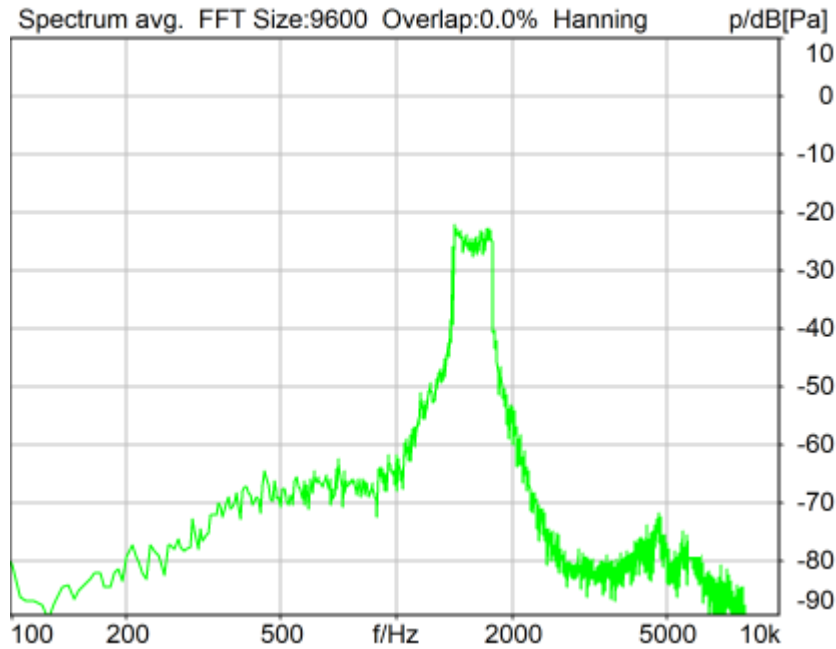

Distortion (Noise) RCV (packed): 23.50 dB (6.69%) Ok

**Ok**

2024/3/6 18:52 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_1600hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1375.0 Hz	Stimulus max.	1815.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1370.0 Hz
Analysis (2) min.	1820.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1600Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EV5/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**


HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB

Mic 1 Power Supply Off

Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 2000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

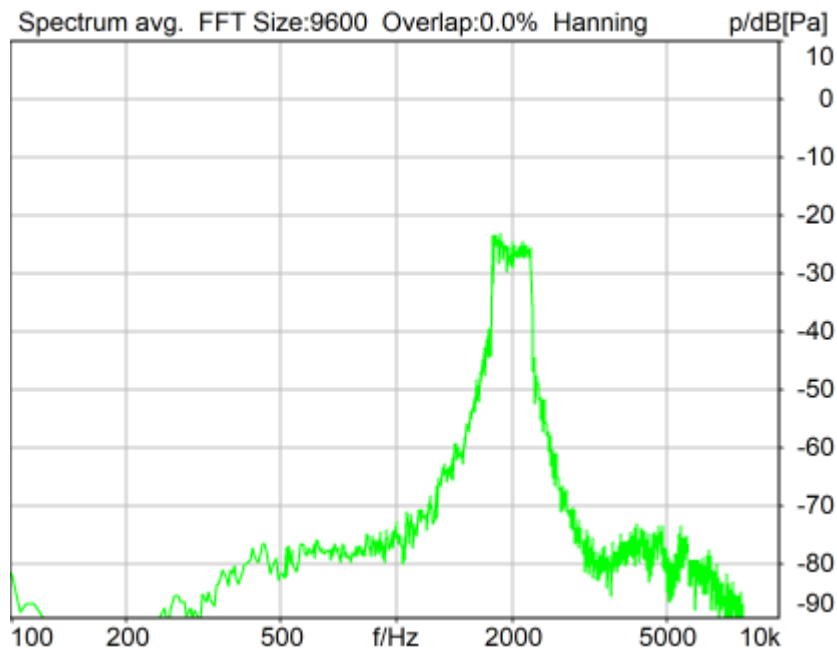

Distortion (Noise) RCV (packed): 21.76 dB (8.17%) Ok

Ok

2024/3/6 18:53 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_2000hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1745.0 Hz	Stimulus max.	2275.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1740.0 Hz
Analysis (2) min.	2280.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_2000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 2500 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

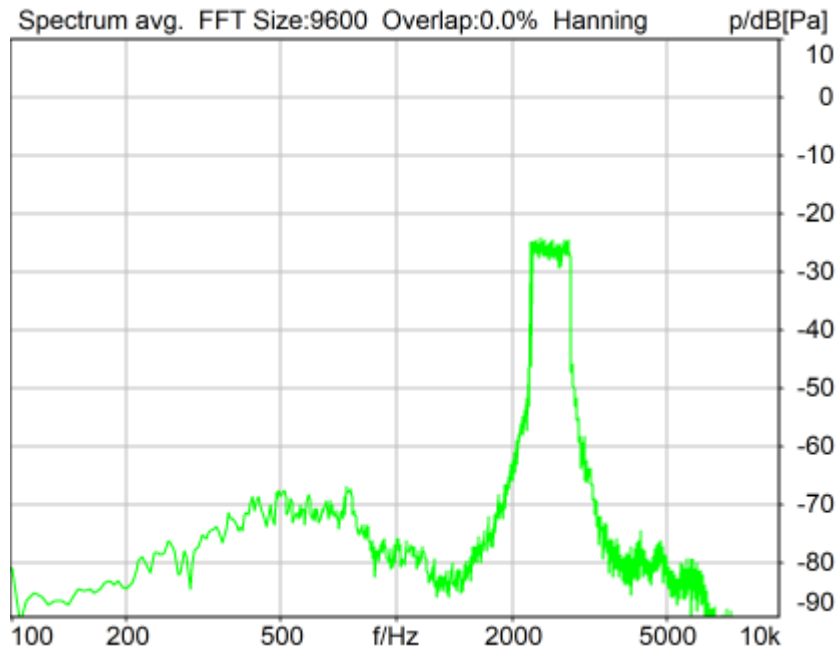

Distortion (Noise) RCV (packed): 28.68 dB (3.68%) Ok

**Ok**

2024/3/6 18:53 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_2500hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2205.0 Hz	Stimulus max.	2855.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2200.0 Hz
Analysis (2) min.	2860.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_2500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off



## 5.2 RCV Distortion and Noise - 3150 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

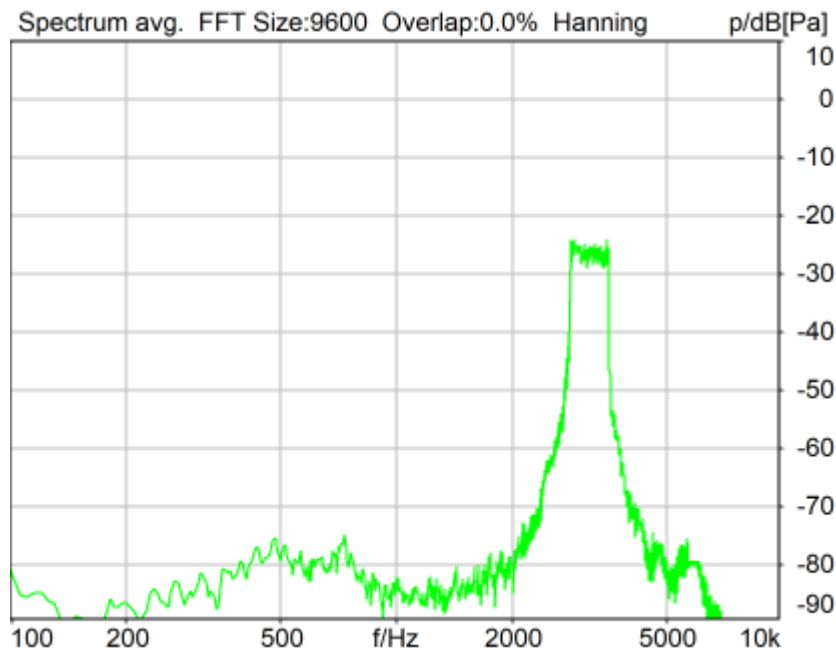

Distortion (Noise) RCV (packed): 28.44 dB (3.78%) Ok

**Ok**

2024/3/6 18:54 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_3150hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction Out 2 -> In 2

Range start 13550.00 ms Range length 200.00 ms

Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2785.0 Hz	Stimulus max.	3585.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2780.0 Hz
Analysis (2) min.	3590.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_3150Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 4000 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

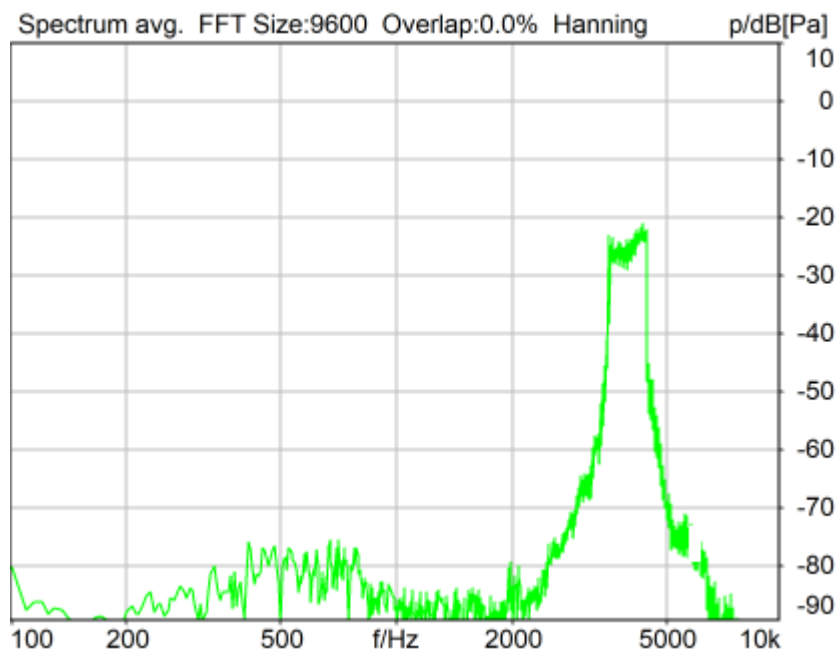

Distortion (Noise) RCV (packed): 28.38 dB (3.81%) Ok

**Ok**

2024/3/6 18:54 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_4000hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction Out 2 -> In 2

Range start 13550.00 ms

Number of seq. 10

Use FIR Filter Ch2

DRP/ERP Ch.1: Off

Frequency base Transformation

Range length 200.00 ms

Sequence length 400.00 ms

FIR filter drp2ff\_ieee1652

DRP/ERP Ch.2: Off

FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	3515.0 Hz	Stimulus max.	4500.0 Hz
Analysis min.	20.0 Hz	Analysis max.	3510.0 Hz
Analysis (2) min.	4505.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_4000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 5000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

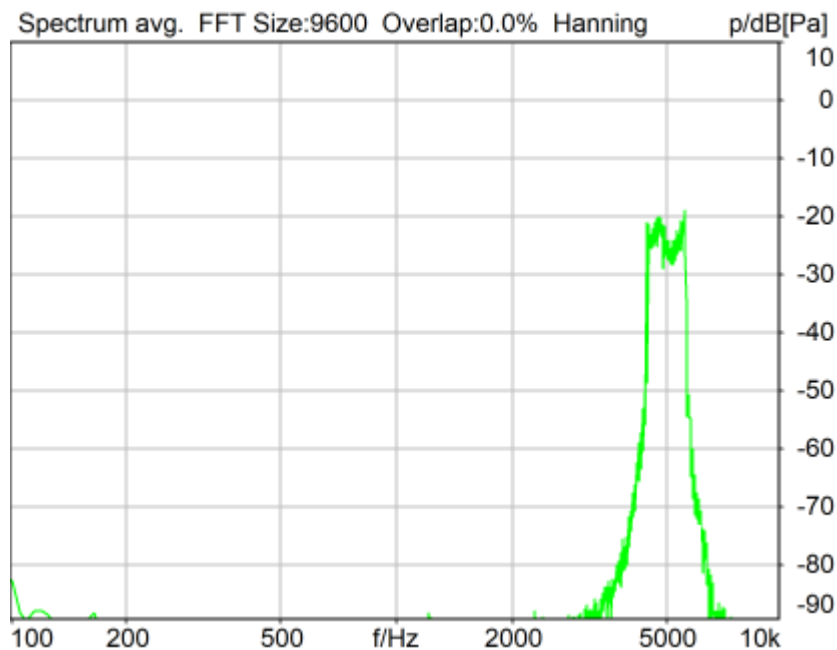

Distortion (Noise) RCV (packed): 35.66 dB (1.65%) Ok

**Ok**

2024/3/6 18:54 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_5000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	4430.0 Hz	Stimulus max.	5660.0 Hz
Analysis min.	20.0 Hz	Analysis max.	4425.0 Hz
Analysis (2) min.	5665.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_5000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

-----  
**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

-----  
**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**Report - Receive Distortion and Noise (Conversational Gain)**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

Region	Frequency	SDNR
1	250Hz	31.27 dB


2	315Hz	30.85 dB
3	400Hz	29.85 dB
4	500Hz	30.41 dB
5	630Hz	32.86 dB
6	800Hz	33.50 dB
7	1000Hz	32.78 dB
8	1250Hz	24.48 dB
9	1600Hz	23.50 dB
10	2000Hz	21.76 dB
11	2500Hz	28.68 dB
12	3150Hz	28.44 dB
13	4000Hz	28.38 dB
14	5000Hz	35.66 dB

All SDNRs were greater than 20.0 dB, requirement was met.  
Smallest SDNR was 21.76dB at 2000Hz.

2024/3/6 18:55 ACQUA

### 5.3 Frequency Response 8N FF

TIA-5050 (2018-01) \ Measurements \ Wideband

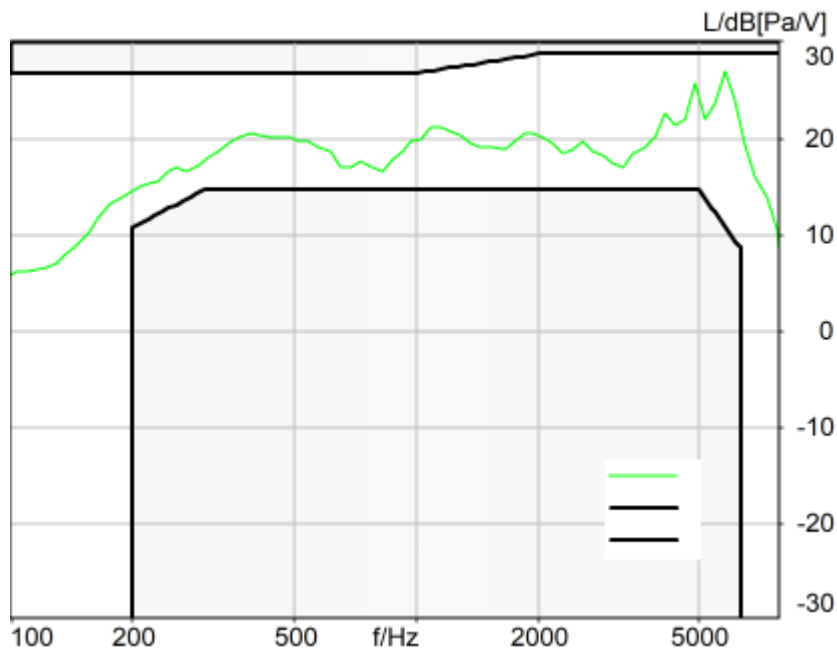

Absolute minimal distance

1.73 dB at 5767.3 Hz Ok

## Ok

2024/3/6 19:16 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

### Source: respmaleieeee269\_wb\_r20\_v01.dat

Level adj. Ch1 -90.0 dB

WIDEBAND IEEE-269-2010 Real Speech Signal at Channel 2

Pause 0.5 s +

Real Speech (english, male speaker) 11.5 s, Active Speech Level: -22,2 dBV, margin 15.9 dB +

Pause till end of file

Signal level (ch2): -22,2 dBV Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the and of the file.

filtered with 8.0 kHz low-pass filter

signal level changed

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction	Out 2 -> In 2		
Range start	500.00 ms	Range length	11500.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieeee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	12th octave	DIN Row	Row A
Method	FFT		
FFT size	4096	Overlap	75 %
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hawb.fft		
Tol. scheme file	521_rcv_frq_man_hawb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	8000.0 Hz

### Special Features

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))

### labCORE Settings

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		



## labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

## Microphone Settings (Mic Amp. (Slot 6))

## Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V

## Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V

## Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

## Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

## VoIP Settings (VoIP)

RTP Connection Streaming SIP Connection Unavailable  
SIP Reg. State Unregistered Jitterbuffer Length 140  
Jitter Buffer Reset On Playback Enabled Codec EVS/16000/1  
Packet Length 20 Encoder Parameter  
;evs-mode-switch=1;br=5.9-13.2;bw=nb-swb;ch-aw-recv=2  
FMTP Parameter ;evs-mode-switch=1;br=5.9-13.2;bw=nb-swb;ch-aw-recv=2  
Impairment Mode Off Impairment Type Off

## BEQ Settings (BEQ Filter 1)

Block mode Bypass

## Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

## HIB Settings

HIB Name 60020095 Serial 60020095  
HIB Mode Mobile Measurement Impedance 32 Ohm  
Gain out 1 -40.00 dB Gain out 2 0.00 dB  
Gain in 1 0.00 dB Gain in 2 0.00 dB  
Mic 1 Power Supply Off Mic 2 Power Supply Off

## 5.3 Frequency Response 8N DF

TIA-5050 (2018-01) \ Measurements \ Wideband

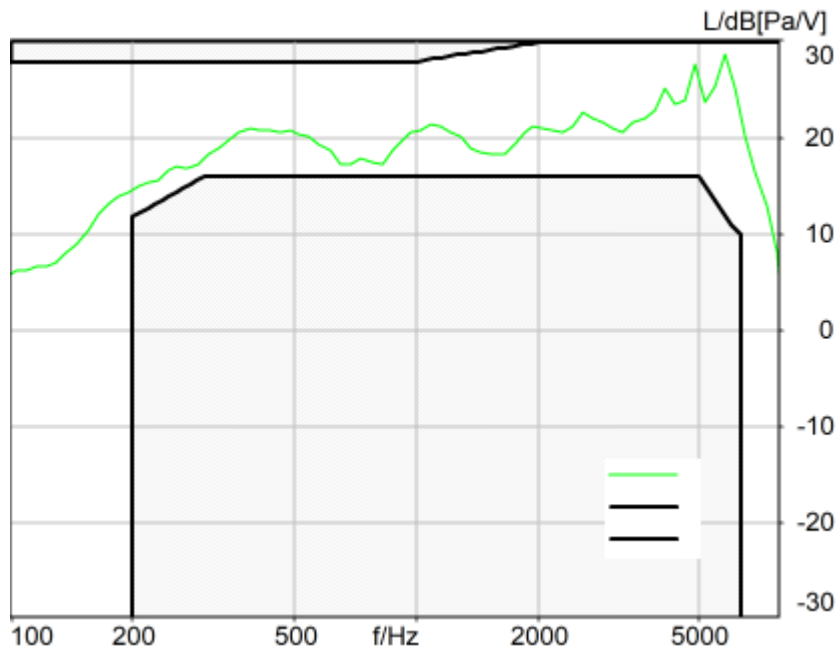

Absolute minimal distance  
1.24 dB at 649.1 Hz Ok

**Ok**

2024/3/6 19:16 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_wb\_r20\_v01.dat**

Level adj. Ch1 -90.0 dB  
WIDEBAND IEEE-269-2010 Real Speech Signal at Channel 2  
Pause 0.5 s +  
Real Speech (english, male speaker) 11.5 s, Active Speech Level: -22,2 dBV, margin 15.9 dB +  
Pause till end of file  
Signal level (ch2): -22,2 dBV Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the and of the file.

filtered with 8.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	500.00 ms	Range length	11500.00 ms
Use FIR Filter	Ch2	FIR filter	drp2df_ieeee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	12th octave	DIN Row	Row A
Method	FFT		
FFT size	4096	Overlap	75 %
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hawb.fft		
Tol. scheme file	521_rcv_frq_man_hawb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	8000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	
;evs-mode-switch=1;br=5.9-13.2;bw=nb-swb;ch-aw-recv=2			
FMTTP Parameter	;evs-mode-switch=1;br=5.9-13.2;bw=nb-swb;ch-aw-recv=2		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**


HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB

Gain in 1 0.00 dB  
Mic 1 Power Supply Off

Gain in 2 0.00 dB  
Mic 2 Power Supply Off

### 5.3 Frequency Response 2N FF

TIA-5050 (2018-01) \ Measurements \ Wideband

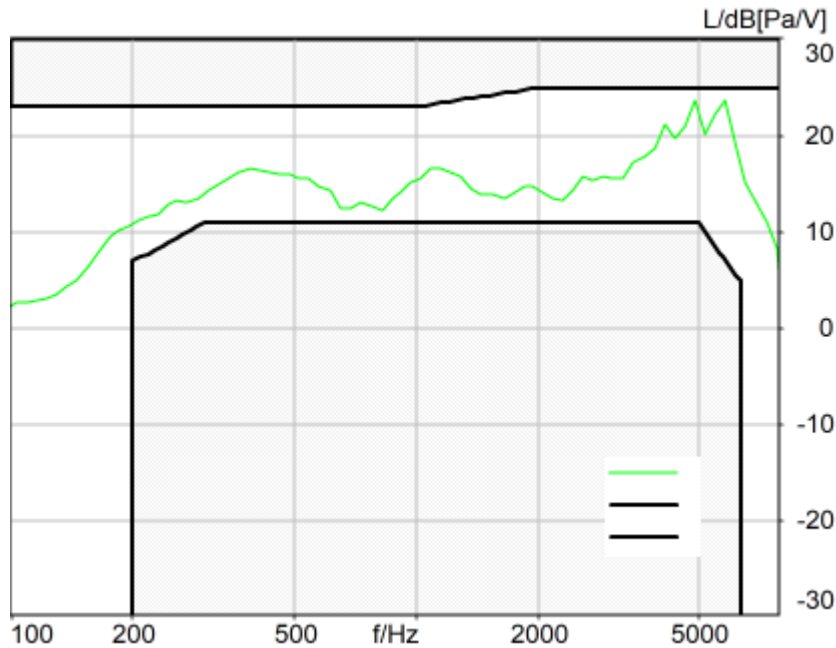

Absolute minimal distance  
1.23 dB at 823.9 Hz Ok

**Ok**

2024/3/6 19:20 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_wb\_r20\_v01.dat**

Level adj. Ch1 -90.0 dB  
WIDEBAND IEEE-269-2010 Real Speech Signal at Channel 2  
Pause 0.5 s +  
Real Speech (english, male speaker) 11.5 s, Active Speech Level: -22,2 dBV, margin 15.9 dB +  
Pause till end of file

Signal level (ch2): -22,2 dBV Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the end of the file.

filtered with 8.0 kHz low-pass filter

signal level changed

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction	Out 2 -> In 2		
Range start	500.00 ms	Range length	11500.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	12th octave	DIN Row	Row A
Method	FFT		
FFT size	4096	Overlap	75 %
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hawb.fft		
Tol. scheme file	521_rcv_frq_man_hawb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	8000.0 Hz

### Special Features

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))

### labCORE Settings

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

### labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

### Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

### VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	
;evs-mode-switch=1;br=5.9-13.2;bw=nb-swb;ch-aw-recv=2			
FMTTP Parameter	;evs-mode-switch=1;br=5.9-13.2;bw=nb-swb;ch-aw-recv=2		
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

HIB Settings

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

## 5.3 Frequency Response 2N DF

TIA-5050 (2018-01) \ Measurements \ Wideband

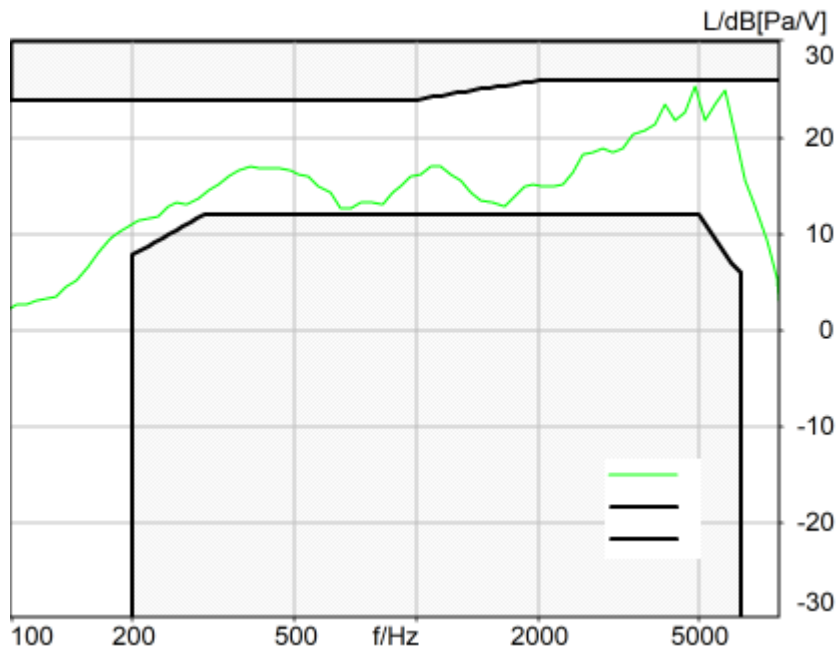

Absolute minimal distance  
0.64 dB at 4870.0 Hz Ok

**Ok**

2024/3/6 19:20 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_wb\_r20\_v01.dat**

Level adj. Ch1 -90.0 dB  
WIDEBAND IEEE-269-2010 Real Speech Signal at Channel 2  
Pause 0.5 s +  
Real Speech (english, male speaker) 11.5 s, Active Speech Level: -22,2 dBV, margin 15.9 dB +  
Pause till end of file  
Signal level (ch2): -22,2 dBV Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the end of the file.

filtered with 8.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	500.00 ms	Range length	11500.00 ms
Use FIR Filter	Ch2	FIR filter	drp2df_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	12th octave	DIN Row	Row A
Method	FFT		
FFT size	4096	Overlap	75 %
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hawb.fft		
Tol. scheme file	521_rcv_frq_man_hawb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	8000.0 Hz

**Special Features**

Compensate delay 152.3000 ms (D\_RCV\_WB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off

---

Polarisation Voltage 200V                                  Supply Voltage    ±60V  
-----

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	
;evs-mode-switch=1;br=5.9-13.2;bw=nb-swb;ch-aw-recv=2			
FMTP Parameter	;evs-mode-switch=1;br=5.9-13.2;bw=nb-swb;ch-aw-recv=2		
Impairment Mode	Off	Impairment Type	Off

-----

**BEQ Settings (BEQ Filter 1)**

Block mode	Bypass
------------	--------

-----

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off



## **Measurement Protocol**

Measurement Object	WIFI 5.5G_802.11a_6M_AMR_NB_12.2kbps_CH132
Project	HMD_2322#N159V

Project	TIA-5050 (2018-01)
Report Generation Date	2024/3/7 9:03
Responsible Person	audio


## Status Overview

SMD	Status	Single Value Description	Single Value	Object
Overall Receive Delay NB	Done	Delay (Cross) [ms]	173.8	WIFI 5.5G_802.11a 6M _AMR NB 12.2kbps_CH132
5.1a Receive Volume Control Performance 8N NB	Ok	Corrected Speech Level [dB[SPL]]	15.17	WIFI 5.5G_802.11a 6M _AMR NB 12.2kbps_CH132
5.1b Receive Volume Control Performance 2N NB	Ok	Corrected Speech Level [dB[SPL]]	12.45	WIFI 5.5G_802.11a 6M _AMR NB 12.2kbps_CH132



## Overall Receive Delay NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ Preparation - Delay measurement

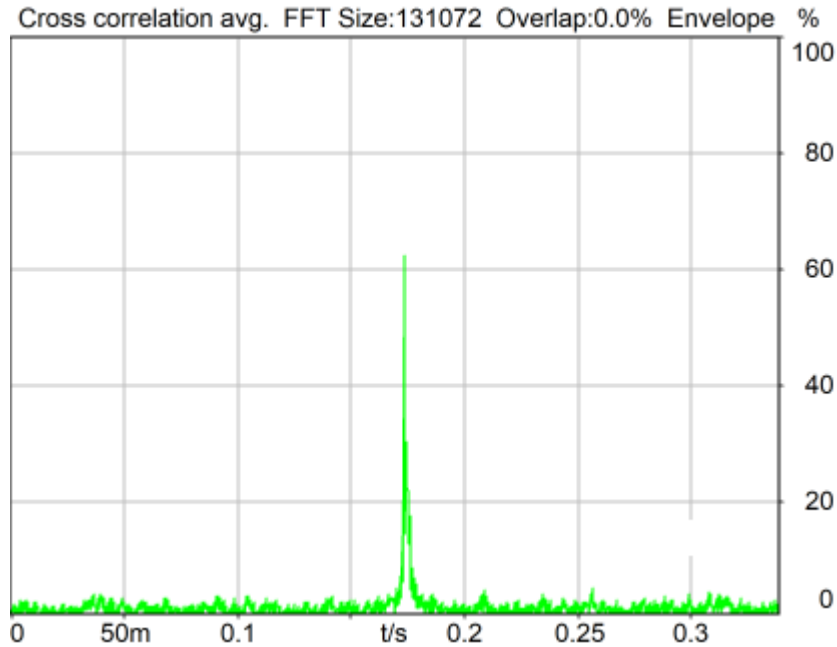

Delay (Cross): 173.8 ms

2024/3/6 17:36 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: cssnb1b\_r1s.dat**

Level adj. Ch1 -90.0 dB

CSSnb1b\_R1s.dat - CS-signal with special 1s random noise

NARROWBAND Composite Source Signal RCV P.501 (1 burst) at Channel 2

Pause 0.5 s +

voiced signal + 4000 Hz band limited random noise 1.0 s +

Pause till end of file

Signal level (ch2): -14.7 dBm0 (corresponds to approx. -16.0 dBm0 for a 350 ms CSS considering 101 ms Pause) from 0.5s to 1.544s for 4-k FFT, Hanning window,

75 % overlap in frequency range of 100 to 4000 Hz

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.1: 0.00 dB

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Range start	550.00 ms	Range length	1950.00 ms
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	131072	Overlap	0 %
Window function.	Hanning	Smooth	Off
Delayed channel	None		
Valid range start	-1228.79 ms	Valid range end	1228.81 ms

**Special Features**

Show source signal	Source ch.2	Store to variable	D_RCV_NB
--------------------	-------------	-------------------	----------

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.1a Receive Volume Control Performance 8N NB

TIA-5050 (2018-01) \ Measurements \ Narrowband

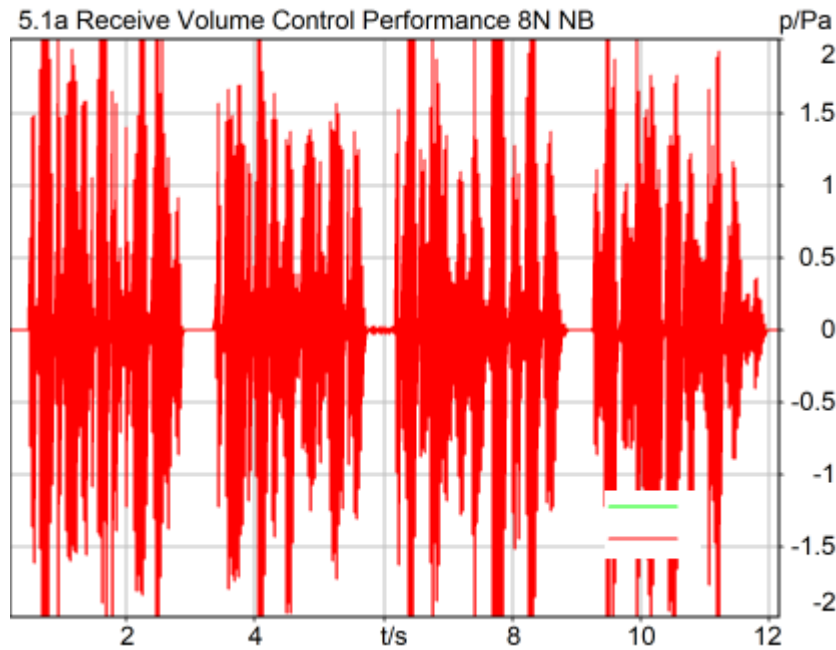

### Correction

X - 70

Speech Level RCV: 85.17 dB[SPL], Act.: 88.76%

Corrected Speech Level: 15.17 dB[SPL] Ok

### Ok

2024/3/6 17:36 ACQUA 5.1.200

### Limits

	lower
Run 1	6.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	12000.00 ms
Range start	200.00 ms	FIR filter	drp2ff_ieeee1652
Use FIR Filter	Ch2	Margin (15.9dB nom)	
Bandpass filter	Narrow Band		

**Special Features**

Show source signal Source ch.2  
 Compensate delay 173.8000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.1b Receive Volume Control Performance 2N NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband

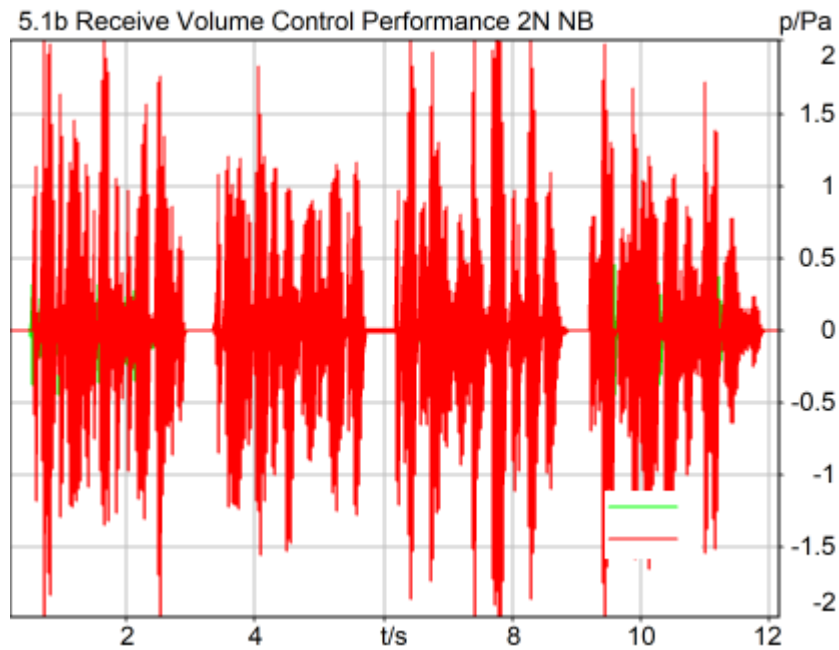

### Correction

X - 70

Speech Level RCV: 82.45 dB[SPL], Act.: 88.63%

Corrected Speech Level: 12.45 dB[SPL] Ok

### Ok

2024/3/6 17:49 ACQUA 5.1.200

### Limits

	lower
Run 1	6.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction Out 2 -> In 2

Range start 200.00 ms

Use FIR Filter Ch2

Bandpass filter Narrow Band

Range length 12000.00 ms

FIR filter drp2ff\_ieee1652

Margin (15.9dB nom)



15.90 dB

**Special Features**

Show source signal Source ch.2

Compensate delay 173.8000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 ->	Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker
Out Channel 2 ->	VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out
In Channel 1 <-	VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out
In Channel 2 <-	BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **Measurement Protocol**

Measurement Object	WIFI 5.5G_802.11a 6M _AMR WB23.85kbps_CH132
Project	HMD_2322#N159V

Project	TIA-5050 (2018-01)
Report Generation Date	2024/3/7 9:04
Responsible Person	audio

## **Status Overview**


SMD	Status	Single Value Description	Single Value	Object
Overall Receive Delay WB	Done	Delay (Cross) [ms]	213.9	WIFI 5.5G_802.11a 6M_AMR WB23.85kbps_CH132
5.1a Receive Volume Control Performance 8N WB	Ok	Corrected Speech Level [dB[SPL]]	15.33	WIFI 5.5G_802.11a 6M_AMR WB23.85kbps_CH132
5.1b Receive Volume Control Performance 2N WB	Ok	Corrected Speech Level [dB[SPL]]	12.43	WIFI 5.5G_802.11a 6M_AMR WB23.85kbps_CH132

---

Overall Receive Delay WB	4
5.1a Receive Volume Control Performance 8N WB	5
5.1b Receive Volume Control Performance 2N WB	7

## Overall Receive Delay WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ Preparation - Delay measurement

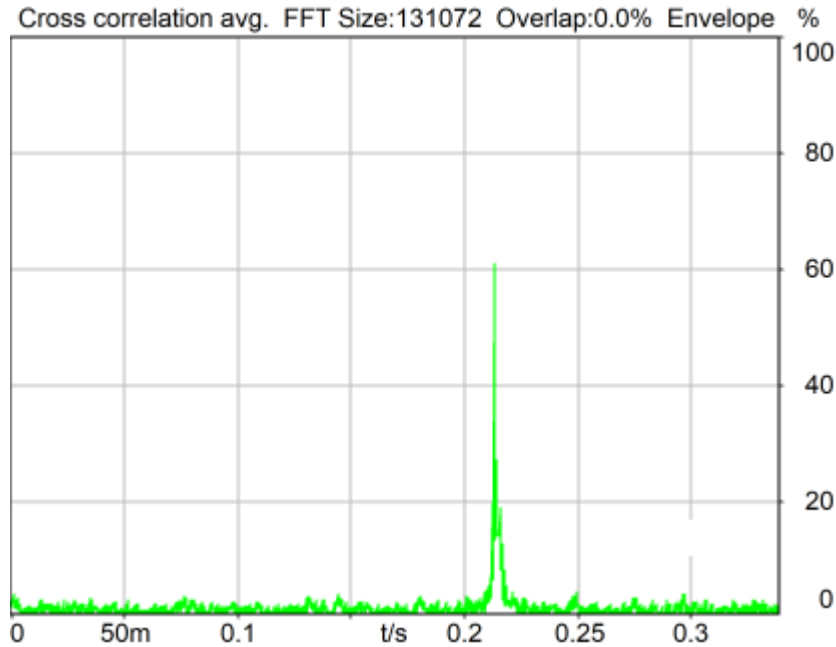

Delay (Cross): 213.9 ms

2024/3/6 17:35 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

### Source: csswb1b\_r1s.dat

WIDEBAND Composite Source Signal RCV P.501 (1 bursts) at Channel 2

Pause 0.5 s +

voiced signal + 8000 Hz band limited random noise 1.0 s +

Pause till end of file

Signal level (ch2): -14.7 dBm0 (corresponds to approx. -16.0 dBm0 for a 350 ms CSS considering 101 ms Pause) from 0.5s to 1.544s for 4-k FFT, Hanning window,

75 % overlap in frequency range of 100 to 8000 Hz

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.1: 0.00 dB

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Range start	550.00 ms	Range length	1950.00 ms
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation	Overlap	0 %
FFT size	131072	Smooth	Off
Window function.	Hanning		
Delayed channel	None		
Valid range start	-1228.79 ms	Valid range end	1228.81 ms

**Special Features**

Show source signal	Source ch.2	Store to variable	D_RCV_WB
--------------------	-------------	-------------------	----------

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

**BEQ Settings (BEQ Filter 1)**

Block mode	Bypass
------------	--------

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.1a Receive Volume Control Performance 8N WB

TIA-5050 (2018-01) \ Measurements \ Wideband

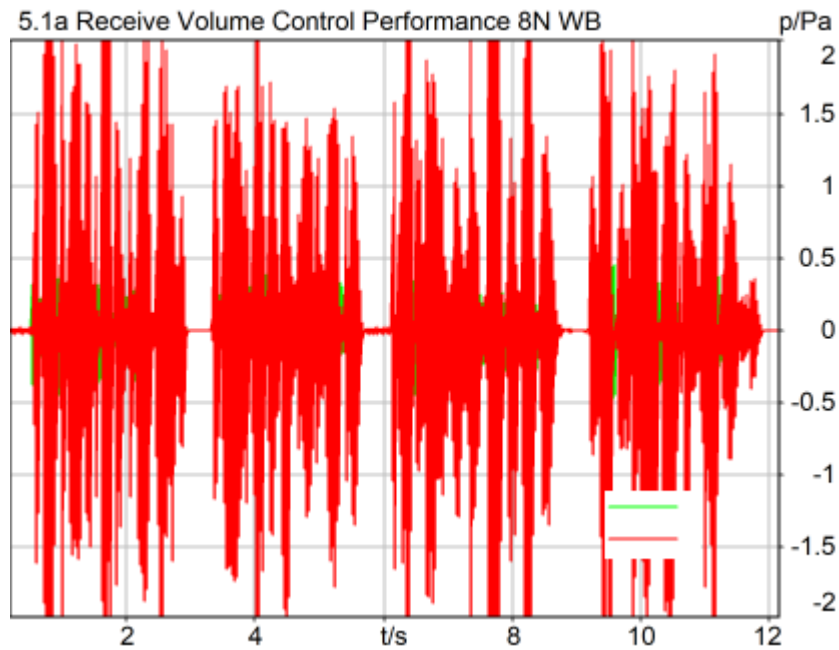

**Correction**

X - 70

Speech Level RCV: 85.33 dB[SPL], Act.: 88.74%  
Corrected Speech Level: 15.33 dB[SPL] Ok

**Ok**

2024/3/6 17:35 ACQUA 5.1.200

**Limits**

	<b>lower</b>
Run 1	6.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	12000.00 ms
Range start	200.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	Margin (15.9dB nom)	
Bandpass filter	Super Wideband		

15.90 dB

**Special Features**

Show source signal Source ch.2  
Compensate delay 213.9000 ms (D\_RCV\_WB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.1b Receive Volume Control Performance 2N WB**

TIA-5050 (2018-01) \ Measurements \ Wideband



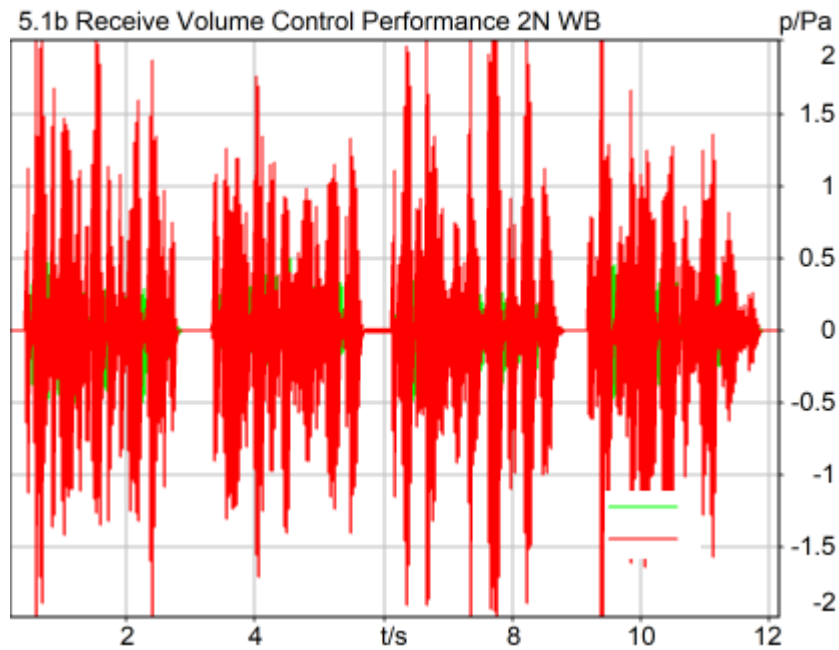

**Correction**

X - 70

Speech Level RCV: 82.43 dB[SPL], Act.: 87.70%  
Corrected Speech Level: 12.43 dB[SPL] Ok

**Ok**

2024/3/6 17:49 ACQUA 5.1.200

**Limits**

	<b>lower</b>
Run 1	6.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	12000.00 ms
Range start	200.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	Margin (15.9dB nom)	
Bandpass filter	Super Wideband		

15.90 dB

**Special Features**

Show source signal Source ch.2

Compensate delay 213.9000 ms (D\_RCV\_WB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **Measurement Protocol**

Measurement Object	WIFI 5.5G_802.11a 6M_EVS NB 24.4kbps_CH132
Description	HMD_2322#N159V

Project	TIA-5050 (2018-01)
Report Generation Date	2024/3/7 9:04
Responsible Person	audio

**Status Overview**

SMD	Status	Single Value Description	Single Value	Object
Overall Receive Delay NB	Done	Delay (Cross) [ms]	173.7	WIFI 5.5G_802.11a 6M_EVS NB 24.4kbps_CH132
5.1a Receive Volume Control Performance 8N NB	Ok	Corrected Speech Level [dB[SPL]]	15.23	WIFI 5.5G_802.11a 6M_EVS NB 24.4kbps_CH132
5.1b Receive Volume Control Performance 2N NB	Ok	Corrected Speech Level [dB[SPL]]	12.28	WIFI 5.5G_802.11a 6M_EVS NB 24.4kbps_CH132
5.2 RCV Distortion and Noise - 400 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	29.37	WIFI 5.5G_802.11a 6M_EVS NB 24.4kbps_CH132
5.2 RCV Distortion and Noise - 500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	29.50	WIFI 5.5G_802.11a 6M_EVS NB 24.4kbps_CH132
5.2 RCV Distortion and Noise - 630 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	30.66	WIFI 5.5G_802.11a 6M_EVS NB 24.4kbps_CH132
5.2 RCV Distortion and Noise - 800 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	30.52	WIFI 5.5G_802.11a 6M_EVS NB 24.4kbps_CH132
5.2 RCV Distortion and Noise - 1000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	26.88	WIFI 5.5G_802.11a 6M_EVS NB 24.4kbps_CH132
5.2 RCV Distortion and Noise - 1250 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	23.59	WIFI 5.5G_802.11a 6M_EVS NB 24.4kbps_CH132
5.2 RCV Distortion and Noise - 1600 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	22.79	WIFI 5.5G_802.11a 6M_EVS NB 24.4kbps_CH132
5.2 RCV Distortion and Noise - 2000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	22.52	WIFI 5.5G_802.11a 6M_EVS NB 24.4kbps_CH132
5.2 RCV Distortion and Noise - 2500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	28.30	WIFI 5.5G_802.11a 6M_EVS NB 24.4kbps_CH132
5.2 RCV Distortion and Noise - 3150 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	30.71	WIFI 5.5G_802.11a 6M_EVS NB 24.4kbps_CH132
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 2000Hz)	22.52	WIFI 5.5G_802.11a 6M_EVS NB 24.4kbps_CH132
5.2 RCV Distortion and Noise - 400 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	29.53	WIFI 5.5G_802.11a 6M_EVS NB 24.4kbps_CH132
5.2 RCV Distortion and Noise - 500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	29.49	WIFI 5.5G_802.11a 6M_EVS NB 24.4kbps_CH132
5.2 RCV Distortion and Noise -	Ok	Distortion (Noise) [dB],	30.76	WIFI 5.5G_802.11a 6M


630 Hz NB		0.0 dB		_EVS NB 24.4kbps_CH132
5.2 RCV Distortion and Noise - 800 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	30.89	WIFI 5.5G_802.11a 6M _EVS NB 24.4kbps_CH132
5.2 RCV Distortion and Noise - 1000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	27.41	WIFI 5.5G_802.11a 6M _EVS NB 24.4kbps_CH132
5.2 RCV Distortion and Noise - 1250 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	24.37	WIFI 5.5G_802.11a 6M _EVS NB 24.4kbps_CH132
5.2 RCV Distortion and Noise - 1600 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	22.81	WIFI 5.5G_802.11a 6M _EVS NB 24.4kbps_CH132
5.2 RCV Distortion and Noise - 2000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	21.96	WIFI 5.5G_802.11a 6M _EVS NB 24.4kbps_CH132
5.2 RCV Distortion and Noise - 2500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	28.42	WIFI 5.5G_802.11a 6M _EVS NB 24.4kbps_CH132
5.2 RCV Distortion and Noise - 3150 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	34.45	WIFI 5.5G_802.11a 6M _EVS NB 24.4kbps_CH132
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 2000Hz)	21.96	WIFI 5.5G_802.11a 6M _EVS NB 24.4kbps_CH132
5.3 Frequency Response 8N FF HANB	Ok	Min. dist. to tolerance scheme [dB], 1285.9 Hz	1.98	WIFI 5.5G_802.11a 6M _EVS NB 24.4kbps_CH132
5.3 Frequency Response 8N DF HANB	Ok	Min. dist. to tolerance scheme [dB], 2721.8 Hz	1.27	WIFI 5.5G_802.11a 6M _EVS NB 24.4kbps_CH132
5.3 Frequency Response 2N FF HANB	Ok	Min. dist. to tolerance scheme [dB], 305.9 Hz	1.64	WIFI 5.5G_802.11a 6M _EVS NB 24.4kbps_CH132
5.3 Frequency Response 2N DF HANB	Not Ok	Min. dist. to tolerance scheme [dB], 305.9 Hz	-0.03	WIFI 5.5G_802.11a 6M _EVS NB 24.4kbps_CH132

---

Overall Receive Delay NB	5
5.1a Receive Volume Control Performance 8N NB	6
5.1b Receive Volume Control Performance 2N NB	8
5.2 RCV Distortion and Noise - 400 Hz NB	10
5.2 RCV Distortion and Noise - 500 Hz NB	12
5.2 RCV Distortion and Noise - 630 Hz NB	14
5.2 RCV Distortion and Noise - 800 Hz NB	16
5.2 RCV Distortion and Noise - 1000 Hz NB	18
5.2 RCV Distortion and Noise - 1250 Hz NB	20
5.2 RCV Distortion and Noise - 1600 Hz NB	22
5.2 RCV Distortion and Noise - 2000 Hz NB	24
5.2 RCV Distortion and Noise - 2500 Hz NB	26
5.2 RCV Distortion and Noise - 3150 Hz NB	28
Report - Receive Distortion and Noise (Conversational Gain)	30
5.2 RCV Distortion and Noise - 400 Hz NB	31
5.2 RCV Distortion and Noise - 500 Hz NB	33
5.2 RCV Distortion and Noise - 630 Hz NB	35
5.2 RCV Distortion and Noise - 800 Hz NB	37
5.2 RCV Distortion and Noise - 1000 Hz NB	39
5.2 RCV Distortion and Noise - 1250 Hz NB	41
5.2 RCV Distortion and Noise - 1600 Hz NB	43
5.2 RCV Distortion and Noise - 2000 Hz NB	45
5.2 RCV Distortion and Noise - 2500 Hz NB	47
5.2 RCV Distortion and Noise - 3150 Hz NB	49
Report - Receive Distortion and Noise (Conversational Gain)	50
5.3 Frequency Response 8N FF HANB	51
5.3 Frequency Response 8N DF HANB	53
5.3 Frequency Response 2N FF HANB	56
5.3 Frequency Response 2N DF HANB	58

## Overall Receive Delay NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ Preparation - Delay measurement

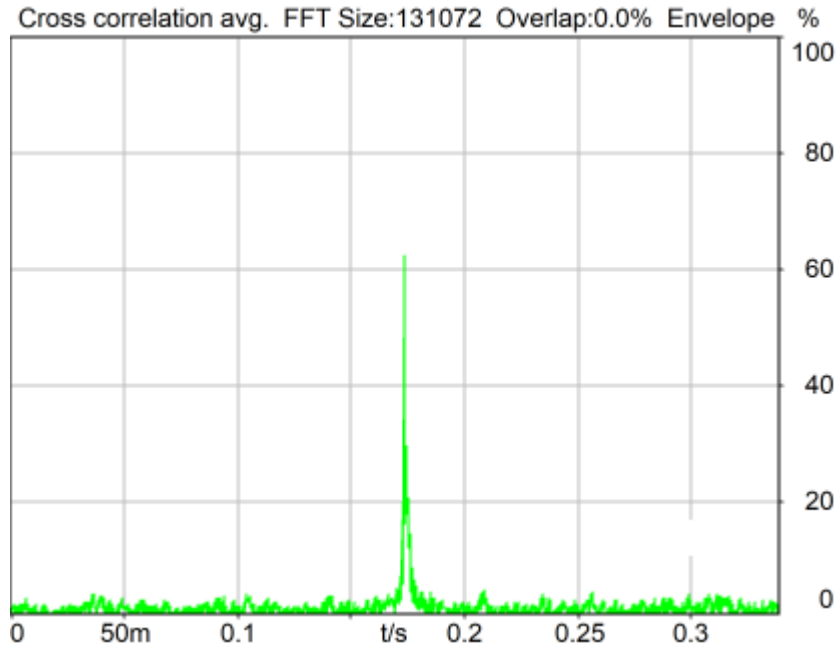

Delay (Cross): 173.7 ms

2024/3/6 17:37 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

### Source: cssnb1b\_r1s.dat

Level adj. Ch1 -90.0 dB

CSSnb1b\_R1s.dat - CS-signal with special 1s random noise

NARROWBAND Composite Source Signal RCV P.501 (1 burst) at Channel 2

Pause 0.5 s +

voiced signal + 4000 Hz band limited random noise 1.0 s +

Pause till end of file

Signal level (ch2): -14.7 dBm0 (corresponds to approx. -16.0 dBm0 for a 350 ms CSS considering 101 ms Pause) from 0.5s to 1.544s for 4-k FFT, Hanning window,

75 % overlap in frequency range of 100 to 4000 Hz

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.1: 0.00 dB

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Range start	550.00 ms	Range length	1950.00 ms
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	131072	Overlap	0 %
Window function.	Hanning	Smooth	Off
Delayed channel	None		
Valid range start	-1228.79 ms	Valid range end	1228.81 ms

**Special Features**

Show source signal	Source ch.2	Store to variable	D_RCV_NB
--------------------	-------------	-------------------	----------

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off



## 5.1a Receive Volume Control Performance 8N NB

TIA-5050 (2018-01) \ Measurements \ Narrowband

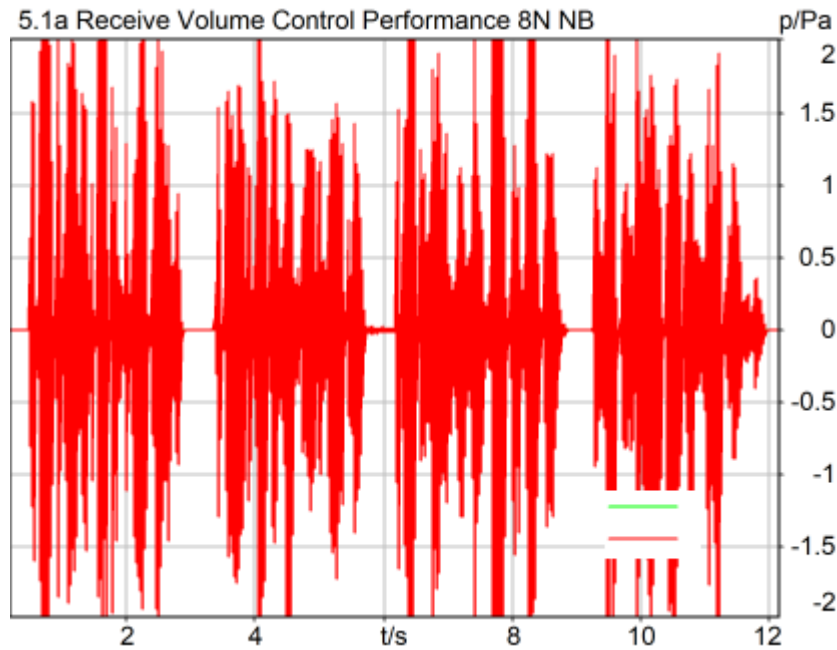

### Correction

X - 70

Speech Level RCV: 85.23 dB[SPL], Act.: 88.80%

Corrected Speech Level: 15.23 dB[SPL] Ok

### Ok

2024/3/6 17:37 ACQUA 5.1.200

### Limits

	lower
Run 1	6.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	12000.00 ms
Range start	200.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	Margin (15.9dB nom)	
Bandpass filter	Narrow Band		

**Special Features**

Show source signal Source ch.2  
Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power SupplyOff		Mic 2 Power SupplyOff	

**5.1b Receive Volume Control Performance 2N NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband

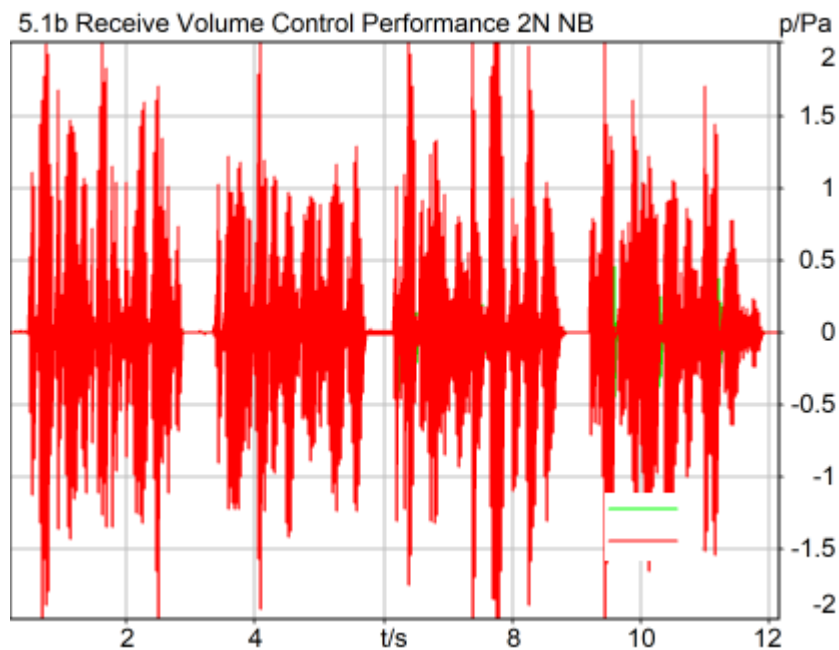

### Correction

X - 70

Speech Level RCV: 82.28 dB[SPL], Act.: 88.92%

Corrected Speech Level: 12.28 dB[SPL] Ok

### Ok

2024/3/6 17:44 ACQUA 5.1.200

### Limits

	lower
Run 1	6.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction Out 2 -> In 2

Range start 200.00 ms

Use FIR Filter Ch2

Bandpass filter Narrow Band

Range length 12000.00 ms

FIR filter drp2ff\_ieee1652

Margin (15.9dB nom)

15.90 dB

**Special Features**

Show source signal Source ch.2  
Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 400 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

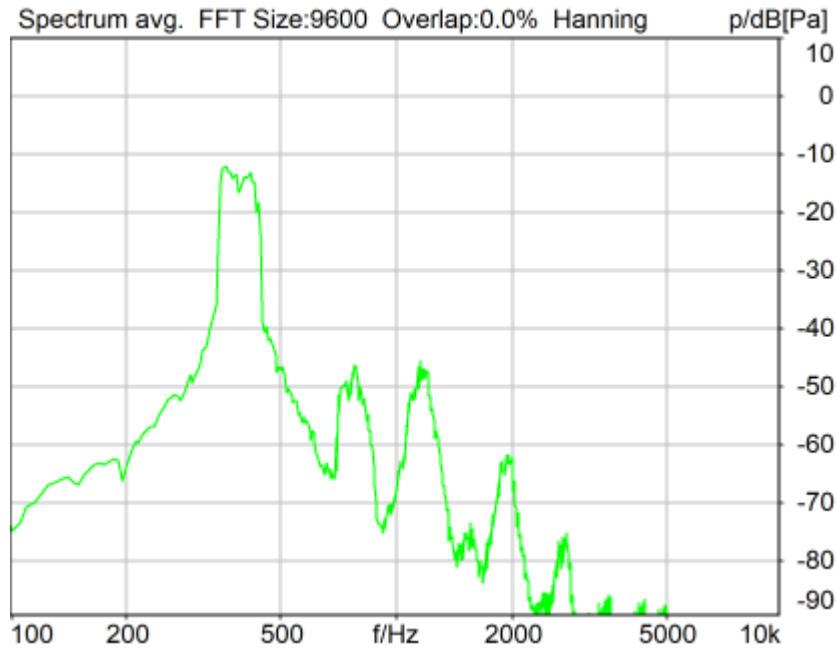

Distortion (Noise) RCV (packed): 29.37 dB (3.40%) Ok

Ok

2024/3/6 17:37 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_400hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	320.0 Hz	Stimulus max.	480.0 Hz
Analysis min.	20.0 Hz	Analysis max.	315.0 Hz
Analysis (2) min.	485.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_400Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 500 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

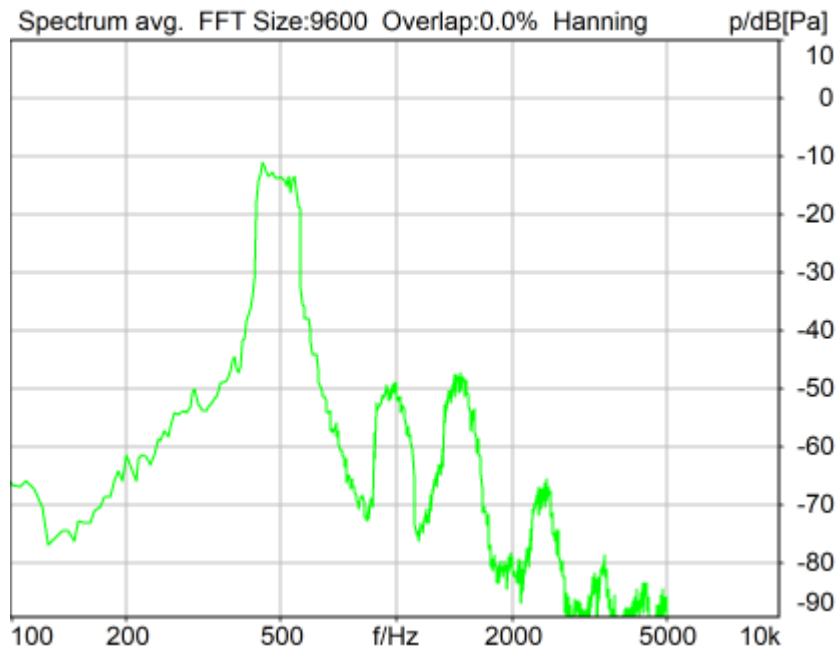

Distortion (Noise) RCV (packed): 29.50 dB (3.35%) Ok

**Ok**

2024/3/6 17:38 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_500hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	410.0 Hz	Stimulus max.	595.0 Hz
Analysis min.	20.0 Hz	Analysis max.	405.0 Hz
Analysis (2) min.	600.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 630 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N



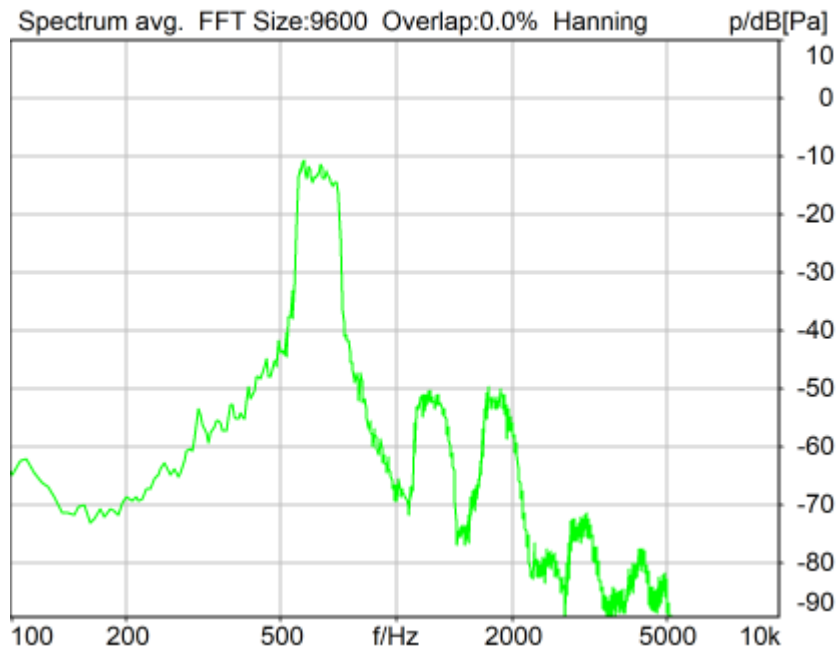

Distortion (Noise) RCV (packed): 30.66 dB (2.93%) Ok

**Ok**

2024/3/6 17:38 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_630hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	525.0 Hz	Stimulus max.	745.0 Hz
Analysis min.	20.0 Hz	Analysis max.	520.0 Hz
Analysis (2) min.	750.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_630Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

-----  
**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

-----  
**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 800 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

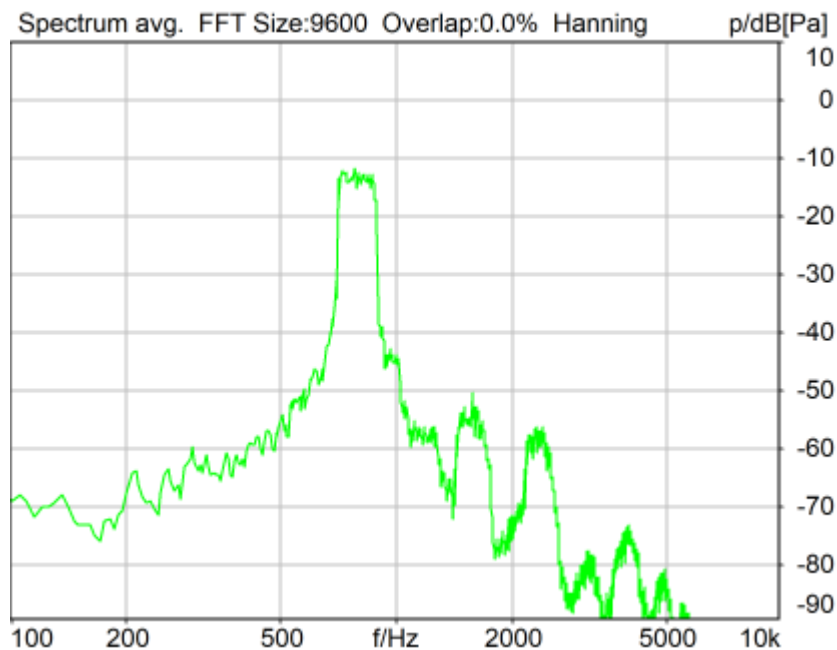

Distortion (Noise) RCV (packed): 30.52 dB (2.98%) Ok

**Ok**

2024/3/6 17:39 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_800hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	675.0 Hz	Stimulus max.	925.0 Hz
Analysis min.	20.0 Hz	Analysis max.	670.0 Hz
Analysis (2) min.	930.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_800Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

-----  
**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

-----  
**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 1000 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

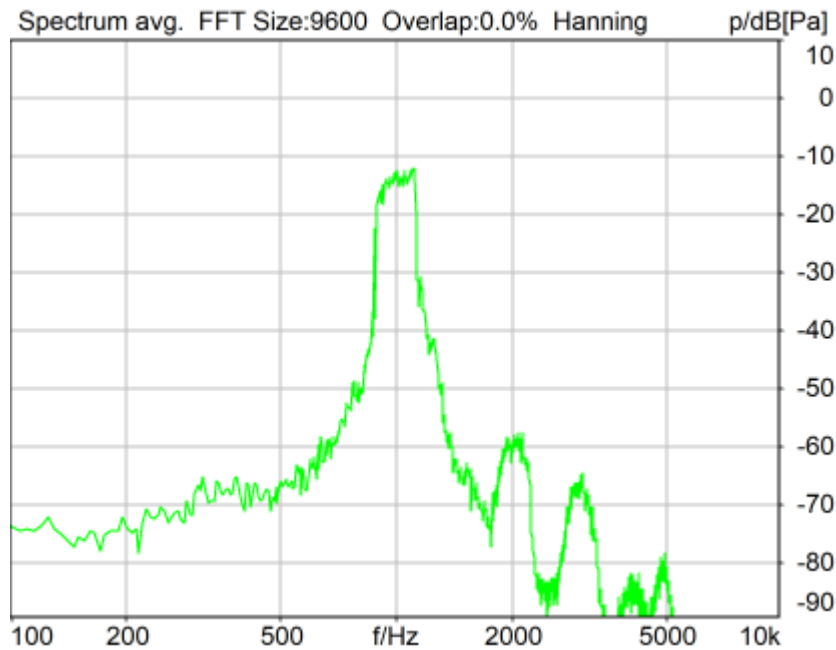

Distortion (Noise) RCV (packed): 26.88 dB (4.53%) Ok

Ok

2024/3/6 17:39 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	855.0 Hz	Stimulus max.	1155.0 Hz
Analysis min.	20.0 Hz	Analysis max.	850.0 Hz
Analysis (2) min.	1160.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_1000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 1250 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

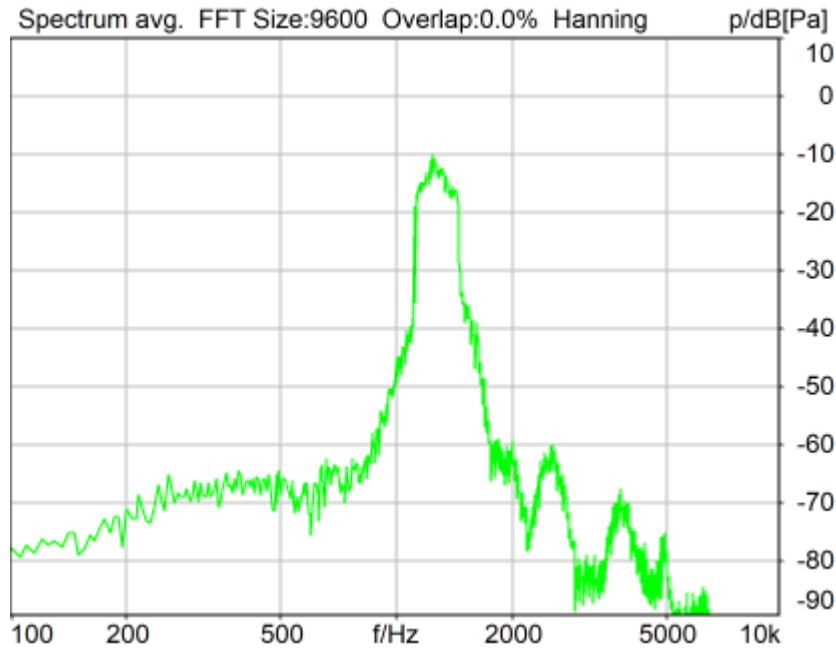

Distortion (Noise) RCV (packed): 23.59 dB (6.61%) Ok

**Ok**

2024/3/6 17:39 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1250hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1085.0 Hz	Stimulus max.	1450.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1080.0 Hz
Analysis (2) min.	1455.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_1250Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
**Microphone Settings (Mic Amp. (Slot 6))**

**Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

-----  
**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

-----  
**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 1600 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N



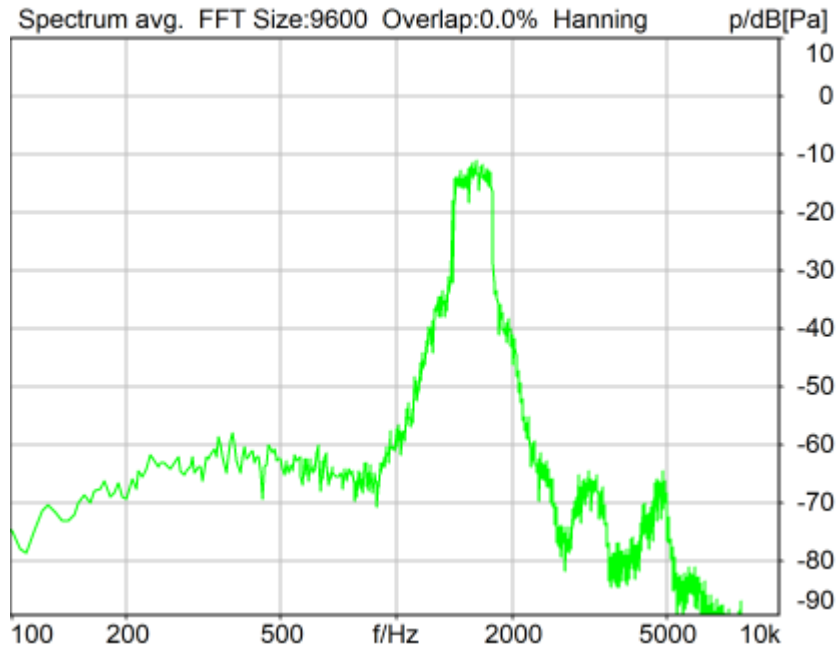

Distortion (Noise) RCV (packed): 22.79 dB (7.25%) Ok

Ok

2024/3/6 17:40 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1600hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1375.0 Hz	Stimulus max.	1815.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1370.0 Hz
Analysis (2) min.	1820.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_1600Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
**Microphone Settings (Mic Amp. (Slot 6))**

**Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

-----  
**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

-----  
**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 2000 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

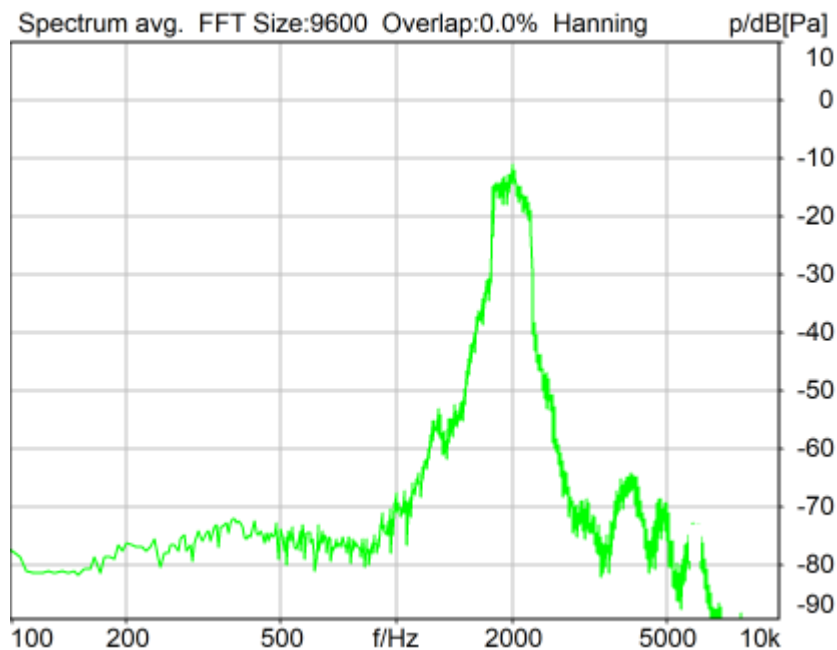

Distortion (Noise) RCV (packed): 22.52 dB (7.49%) Ok

**Ok**

2024/3/6 17:40 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1745.0 Hz	Stimulus max.	2275.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1740.0 Hz
Analysis (2) min.	2280.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_2000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 2500 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

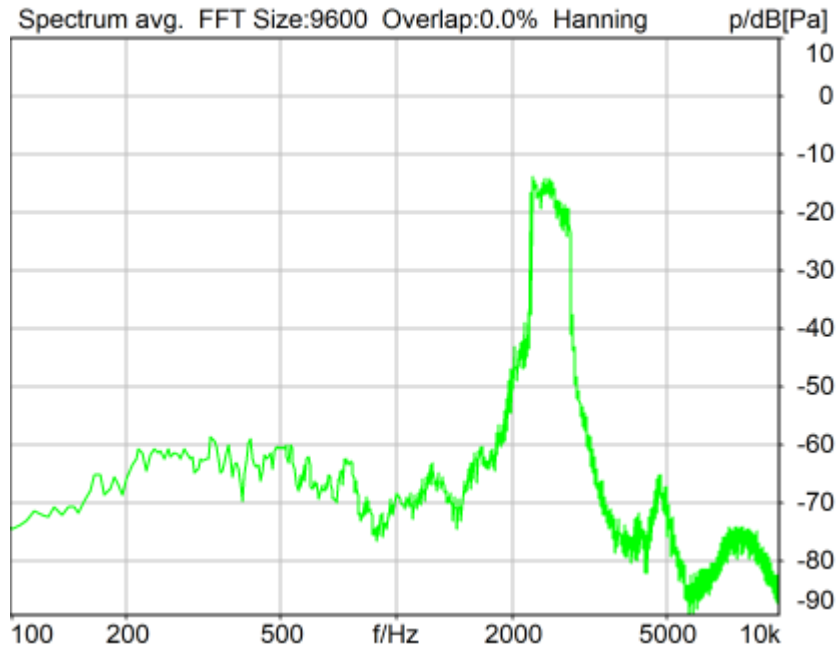

Distortion (Noise) RCV (packed): 28.30 dB (3.84%) Ok

**Ok**

2024/3/6 17:41 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2500hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2205.0 Hz	Stimulus max.	2855.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2200.0 Hz
Analysis (2) min.	2860.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_2500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
**Microphone Settings (Mic Amp. (Slot 6))**

**Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

-----  
**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

-----  
**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 3150 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

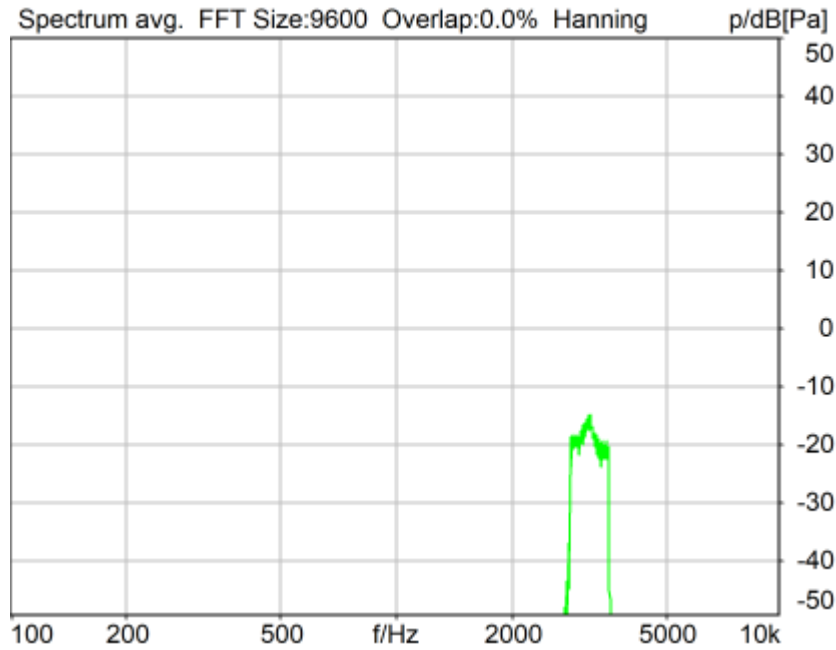

Distortion (Noise) RCV (packed): 30.71 dB (2.91%) Ok

**Ok**

2024/3/6 17:41 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_3150hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2785.0 Hz	Stimulus max.	3585.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2780.0 Hz
Analysis (2) min.	3590.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_3150Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

-----  
**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

-----  
**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**Report - Receive Distortion and Noise (Conversational Gain)**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

Region	Frequency	SDNR
1	400Hz	29.37 dB




2	500Hz	29.50 dB
3	630Hz	30.66 dB
4	800Hz	30.52 dB
5	1000Hz	26.88 dB
6	1250Hz	23.59 dB
7	1600Hz	22.79 dB
8	2000Hz	22.52 dB
9	2500Hz	28.30 dB
10	3150Hz	30.71 dB

All SDNRs were greater than 20.0 dB, requirement was met.  
Smallest SDNR was 22.52dB at 2000Hz.

2024/3/6 17:41 ACQUA

## **5.2 RCV Distortion and Noise - 400 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

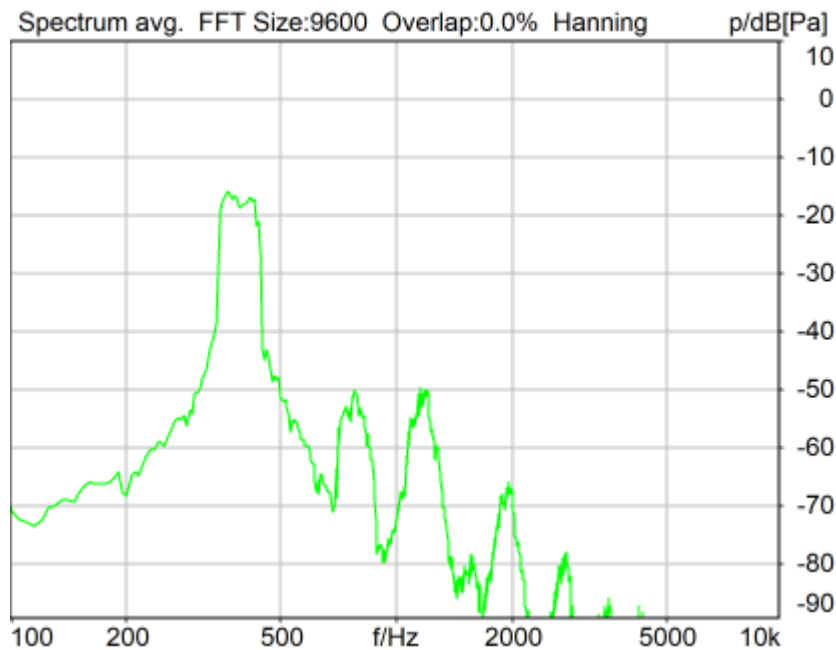

Distortion (Noise) RCV (packed): 29.53 dB (3.34%) Ok

**Ok**

2024/3/6 17:44 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_400hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	480.0 Hz
Stimulus min.	320.0 Hz	Analysis max.	315.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	485.0 Hz		

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_400Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage200V		Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage200V		Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage200V		Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage200V		Supply Voltage	±60V

-----  
VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 500 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

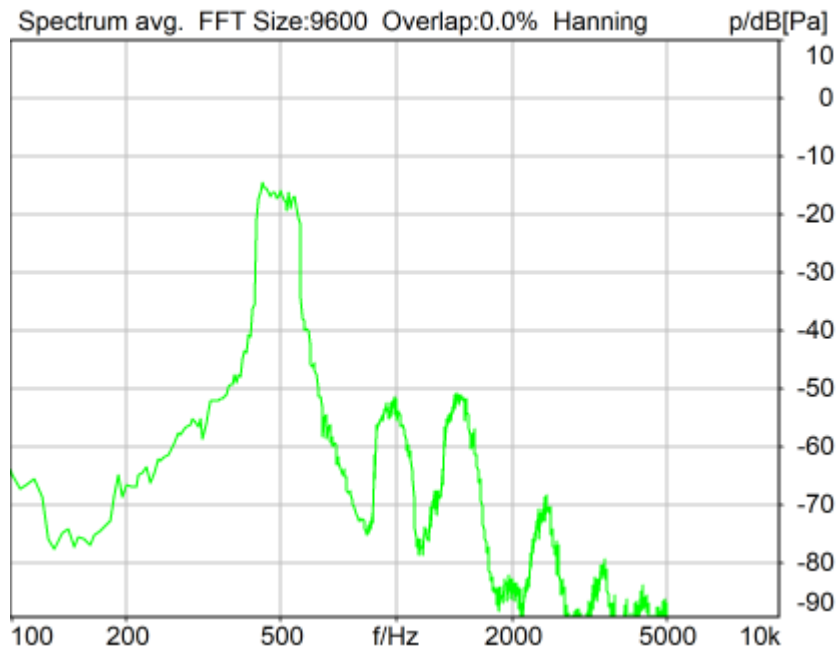

Distortion (Noise) RCV (packed): 29.49 dB (3.35%) Ok

**Ok**

2024/3/6 17:45 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_500hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	410.0 Hz	Stimulus max.	595.0 Hz
Analysis min.	20.0 Hz	Analysis max.	405.0 Hz
Analysis (2) min.	600.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
----------------	-----------	----------------	-------------

SIP Reg. State      Unregistered                      Jitterbuffer Length    140  
 Jitter Buffer Reset    On Playback                      Enabled Codec        EVS/16000/1  
 Packet Length        20                                      Encoder Parameter    ;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0  
 FMTP Parameter      ;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0  
 Impairment Mode    Off                                      Impairment Type     Off

-----  
 BEQ Settings (BEQ Filter 1)  
 Block mode            Bypass


-----  
 Artificial Head Settings (HATS 1 (HMS II.3))  
 Ser. Nr.                12306613                      Pinna Type            Type 3.3

**HIB Settings**

HIB Name                60020095                      Serial                    60020095  
 HIB Mode                Mobile Measurement            Impedance              32 Ohm  
 Gain out 1              -40.00 dB                      Gain out 2              0.00 dB  
 Gain in 1                0.00 dB                        Gain in 2                0.00 dB  
 Mic 1 Power Supply Off                      Mic 2 Power Supply Off

**5.2 RCV Distortion and Noise - 630 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

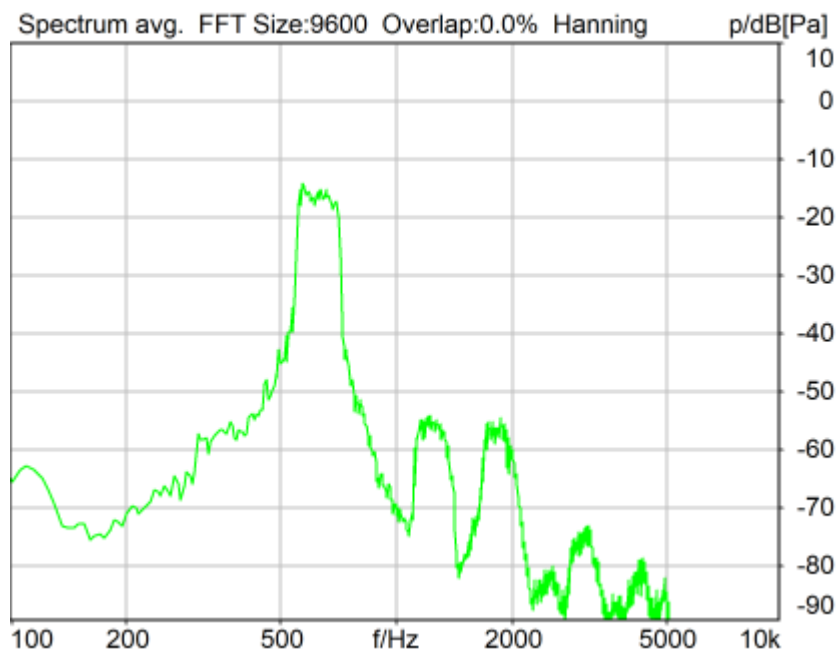

Distortion (Noise) RCV (packed): 30.76 dB (2.90%) Ok

**Ok**

2024/3/6 17:45 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
--	-------

Run 1	20.00 dB
-------	----------

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_630hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	525.0 Hz	Stimulus max.	745.0 Hz
Analysis min.	20.0 Hz	Analysis max.	520.0 Hz
Analysis (2) min.	750.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_630Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0

FMTMP Parameter ;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0  
 Impairment Mode Off Impairment Type Off

-----  
 BEQ Settings (BEQ Filter 1)  
 Block mode Bypass


-----  
 Artificial Head Settings (HATS 1 (HMS II.3))  
 Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 800 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

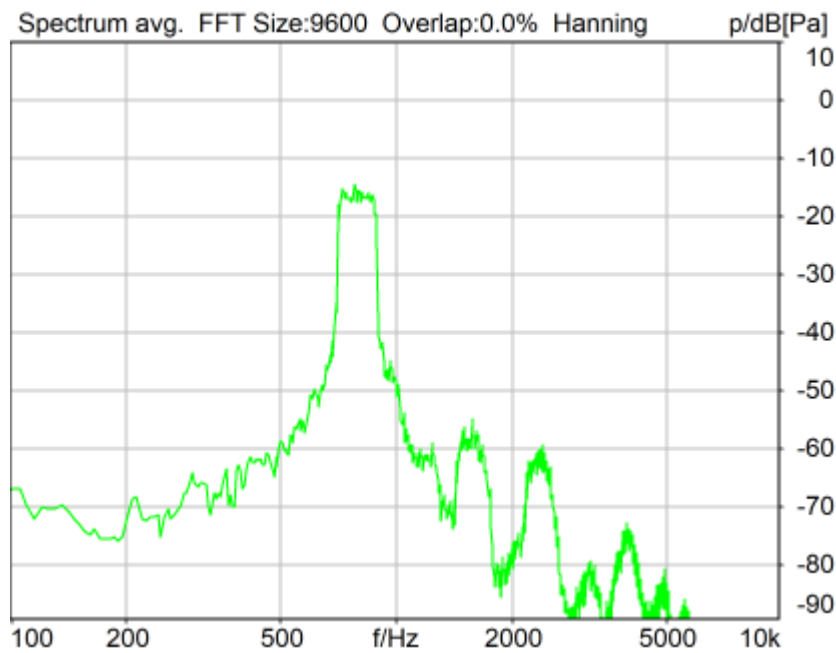

Distortion (Noise) RCV (packed): 30.89 dB (2.86%) Ok

**Ok**

2024/3/6 17:45 ACQUA 5.1.200  
 Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_800hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	675.0 Hz	Stimulus max.	925.0 Hz
Analysis min.	20.0 Hz	Analysis max.	670.0 Hz
Analysis (2) min.	930.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_800Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off



BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

HIB Settings

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

## 5.2 RCV Distortion and Noise - 1000 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

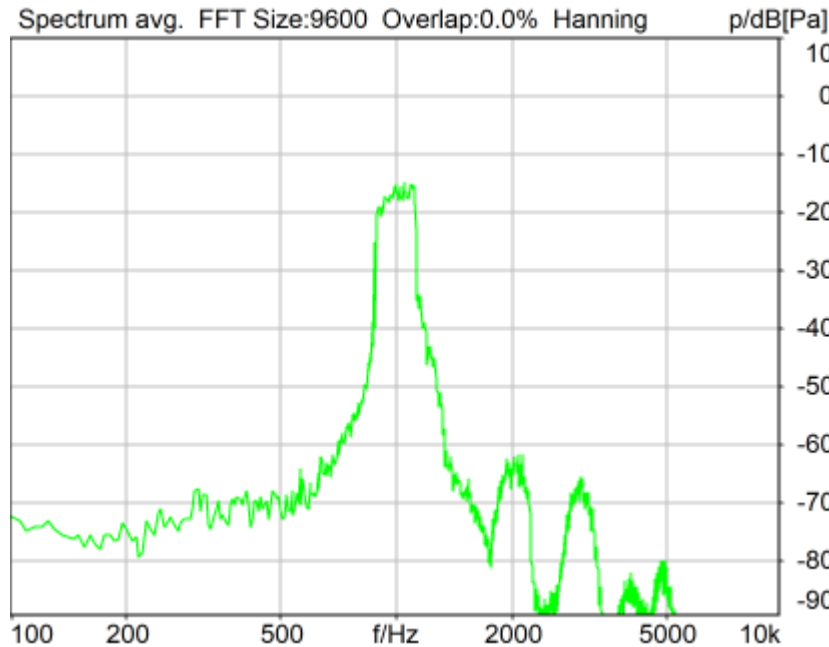

Distortion (Noise) RCV (packed): 27.41 dB (4.26%) Ok

Ok

2024/3/6 17:46 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	855.0 Hz	Stimulus max.	1155.0 Hz
Analysis min.	20.0 Hz	Analysis max.	850.0 Hz
Analysis (2) min.	1160.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))

Store to variable RCVNB10\_1000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

**5.2 RCV Distortion and Noise - 1250 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

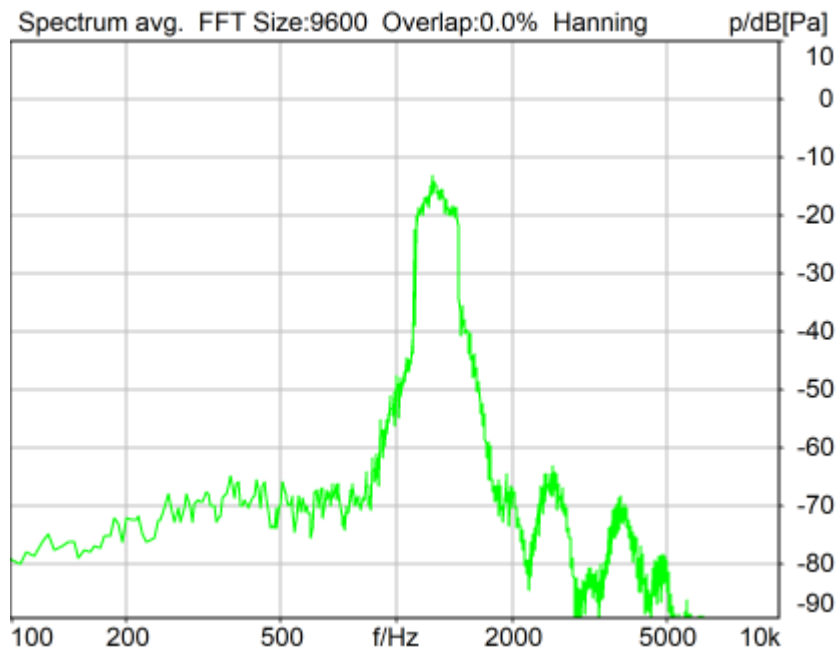

Distortion (Noise) RCV (packed): 24.37 dB (6.04%) Ok

**Ok**

2024/3/6 17:46 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_1250hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1085.0 Hz	Stimulus max.	1450.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1080.0 Hz
Analysis (2) min.	1455.0 Hz	Analysis (2) max.	20000.0 Hz

### Special Features

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_1250Hz

### labCORE Settings

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

### labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

### Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

### VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

### BEQ Settings (BEQ Filter 1)

Block mode Bypass

### Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

### HIB Settings

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1600 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

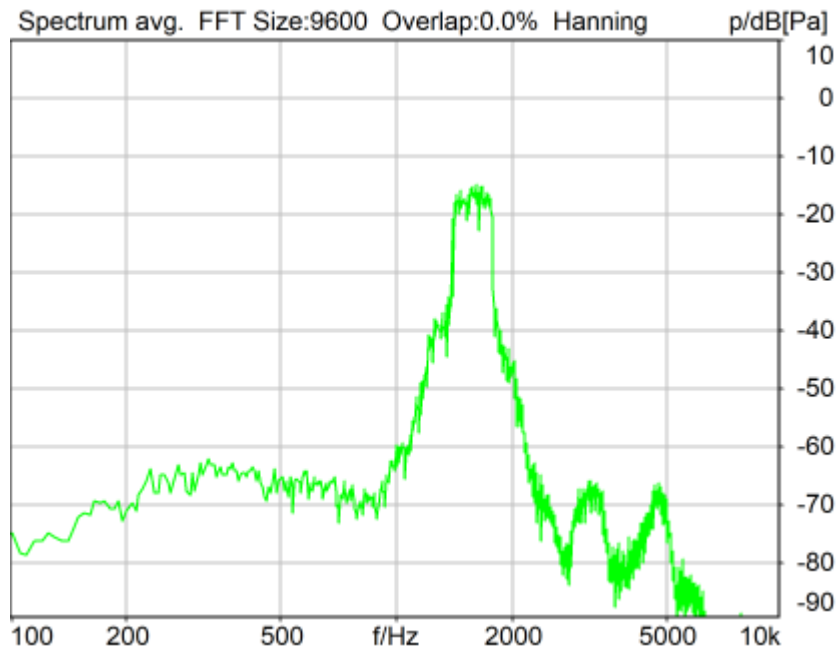

Distortion (Noise) RCV (packed): 22.81 dB (7.24%) Ok

**Ok**

2024/3/6 17:47 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_1600hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	1815.0 Hz
Stimulus min.	1375.0 Hz	Analysis max.	1370.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	1820.0 Hz		

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_1600Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**


HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB

Mic 1 Power Supply Off

Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 2000 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

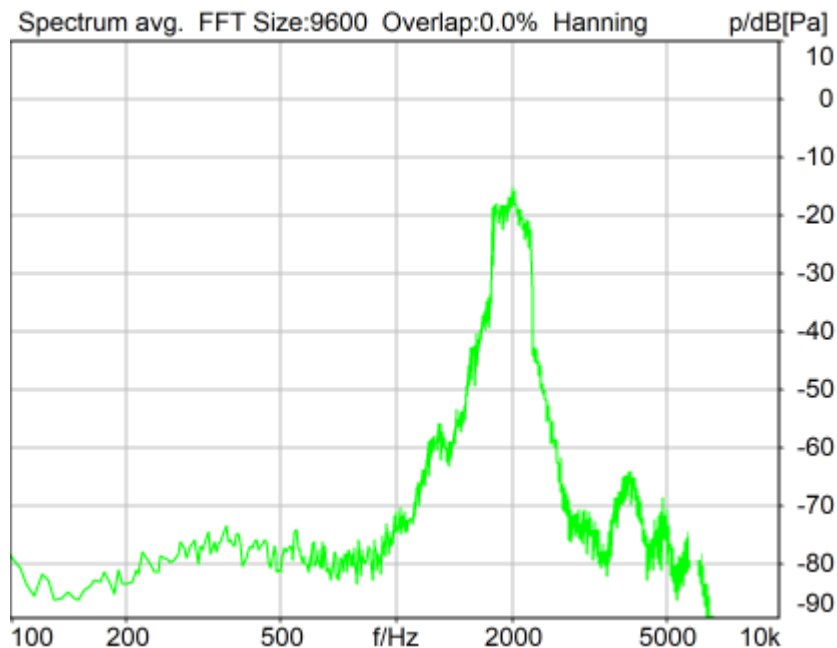

Distortion (Noise) RCV (packed): 21.96 dB (7.98%) Ok

Ok

2024/3/6 17:47 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_2000hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1745.0 Hz	Stimulus max.	2275.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1740.0 Hz
Analysis (2) min.	2280.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_2000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTF Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

-----  
**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

-----  
**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off



## 5.2 RCV Distortion and Noise - 2500 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

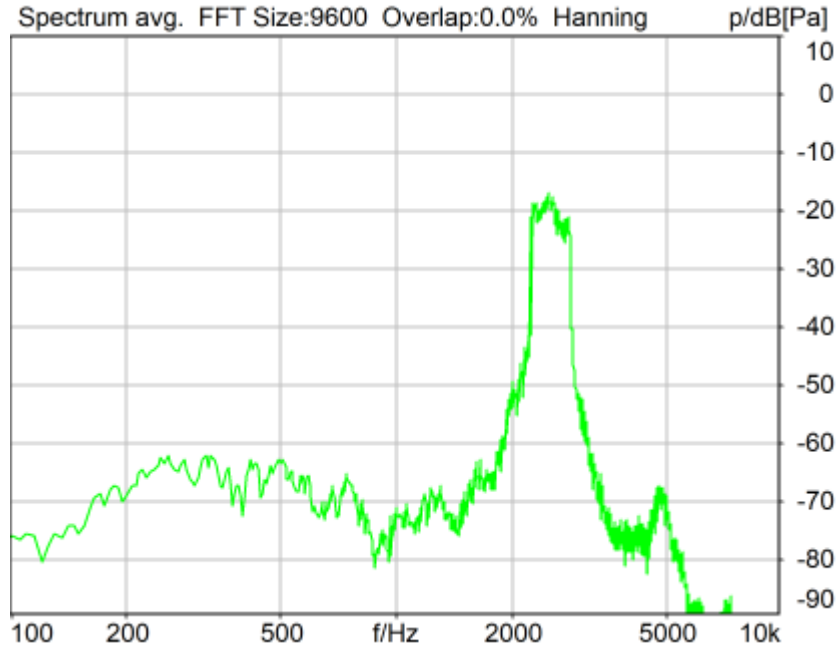

Distortion (Noise) RCV (packed): 28.42 dB (3.79%) Ok

**Ok**

2024/3/6 17:47 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_2500hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2205.0 Hz	Stimulus max.	2855.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2200.0 Hz
Analysis (2) min.	2860.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_2500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

-----  
**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

-----  
**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 3150 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

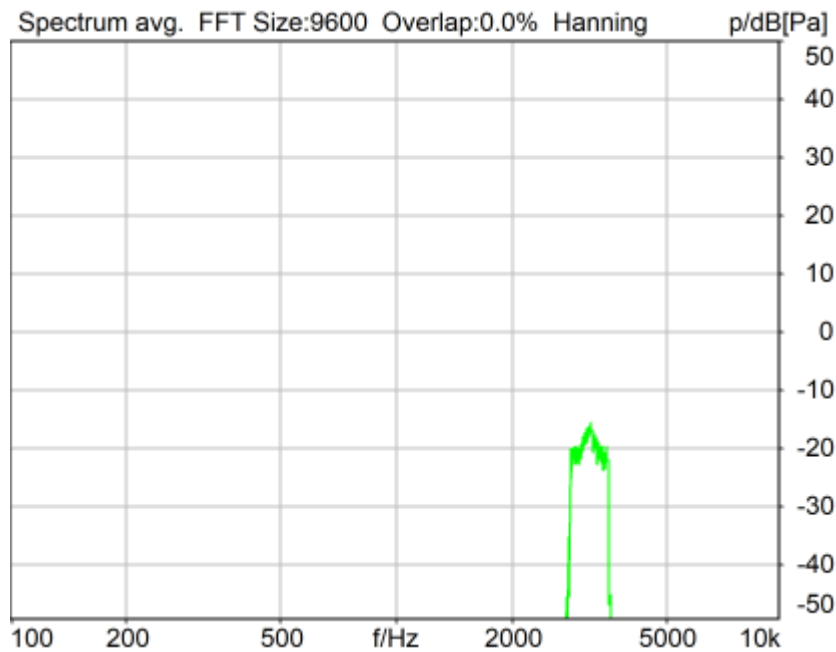

Distortion (Noise) RCV (packed): 34.45 dB (1.89%) Ok

**Ok**

2024/3/6 17:48 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_3150hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction Out 2 -> In 2

Range start 13550.00 ms Range length 200.00 ms

Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2785.0 Hz	Stimulus max.	3585.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2780.0 Hz
Analysis (2) min.	3590.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_3150Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

**Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**Report - Receive Distortion and Noise (Conversational Gain)**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N


Region	Frequency	SDNR
1	400Hz	29.53 dB
2	500Hz	29.49 dB
3	630Hz	30.76 dB
4	800Hz	30.89 dB
5	1000Hz	27.41 dB
6	1250Hz	24.37 dB
7	1600Hz	22.81 dB
8	2000Hz	21.96 dB
9	2500Hz	28.42 dB
10	3150Hz	34.45 dB

All SDNRs were greater than 20.0 dB, requirement was met.  
Smallest SDNR was 21.96dB at 2000Hz.

2024/3/6 17:48 ACQUA

### **5.3 Frequency Response 8N FF HANB**

TIA-5050 (2018-01) \ Measurements \ Narrowband

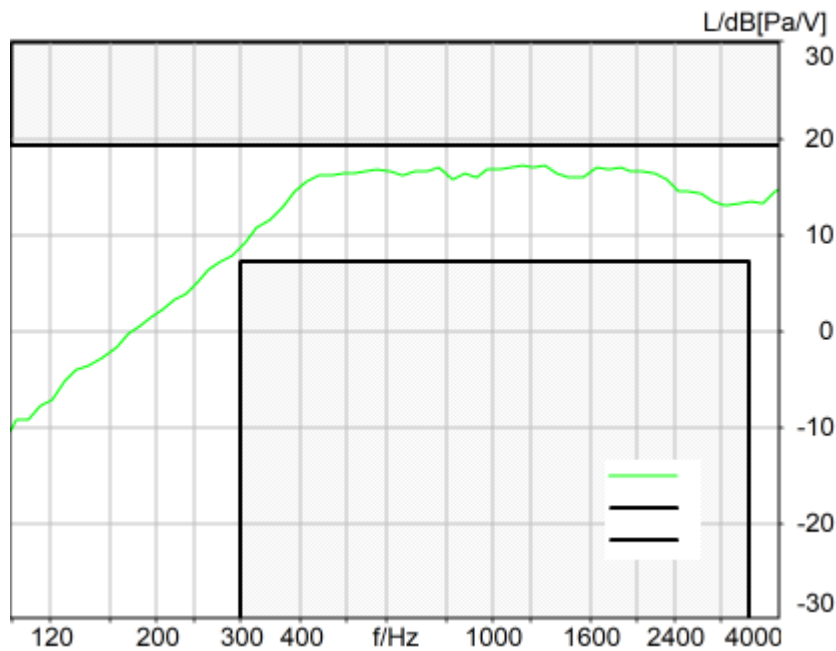

Absolute minimal distance  
1.98 dB at 1285.9 Hz Ok

**Ok**

2024/3/6 18:11 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_nb\_r16.dat**

Level adj. Ch1 -90.0 dB Level adj. Ch2 -4.0 dB

NARROWBAND IEEE-269-2010 Real Speech Signal at Channel 2

Pause 0.5 s +

Real Speech (english, male speaker) 11.5 s, Active Speech Level: -16 dBm0, margin 15.9 dB +

Pause till end of file

Signal level (ch1): -16 dBm0 Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the and of the file.

filtered with 4.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction Out 2 -> In 2

Range start 500.00 ms

Range length 11500.00 ms

Use FIR Filter Ch2

FIR filter drp2ff\_ieee1652

DRP/ERP Ch.1: Off

DRP/ERP Ch.2: Off

Frequency base 12th octave

DIN Row Row A

Method FFT

FFT size 4096

Overlap 75 %

Window function. Hanning

Reference file r521\_rcv\_frq\_spee269\_hanb.fft

Tol. scheme file 521\_rcv\_frq\_man\_hanb.tol Min. freq. for tol. 100.0 Hz

Auto adjust Centrate Max. freq. for tol. 4000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial 77000207

Nickname

Firmware 3.4.17

Sync Source Internal

Clock Pitch 0.00 ppm

-----

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.3 Frequency Response 8N DF HANB

TIA-5050 (2018-01) \ Measurements \ Narrowband

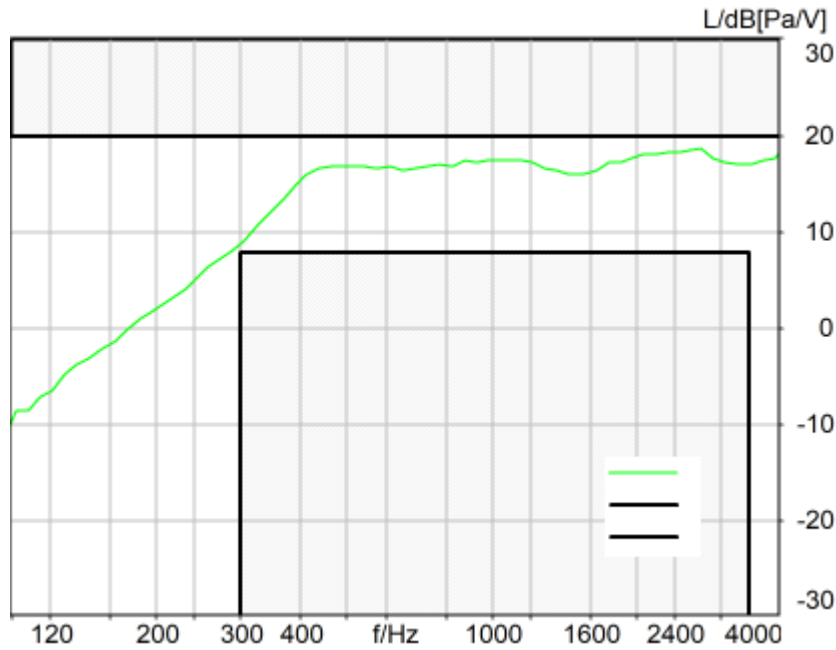

Absolute minimal distance  
1.27 dB at 2721.8 Hz Ok

**Ok**

2024/3/6 18:11 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_nb\_r16.dat**

Level adj. Ch1 -90.0 dB Level adj. Ch2 -4.0 dB

NARROWBAND IEEE-269-2010 Real Speech Signal at Channel 2

Pause 0.5 s +

Real Speech (english, male speaker) 11.5 s, Active Speech Level: -16 dBm0, margin 15.9 dB +

Pause till end of file

Signal level (ch1): -16 dBm0 Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the and of the file.

filtered with 4.0 kHz low-pass filter

signal level changed

**Calibration**



Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	500.00 ms	Range length	11500.00 ms
Use FIR Filter	Ch2	FIR filter	drp2df_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	12th octave	DIN Row	Row A
Method	FFT		
FFT size	4096	Overlap	75 %
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hanb.fft		
Tol. scheme file	521_rcv_frq_man_hanb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	4000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTF Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**


HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB

Mic 1 Power Supply Off

Mic 2 Power Supply Off

### 5.3 Frequency Response 2N FF HANB

TIA-5050 (2018-01) \ Measurements \ Narrowband

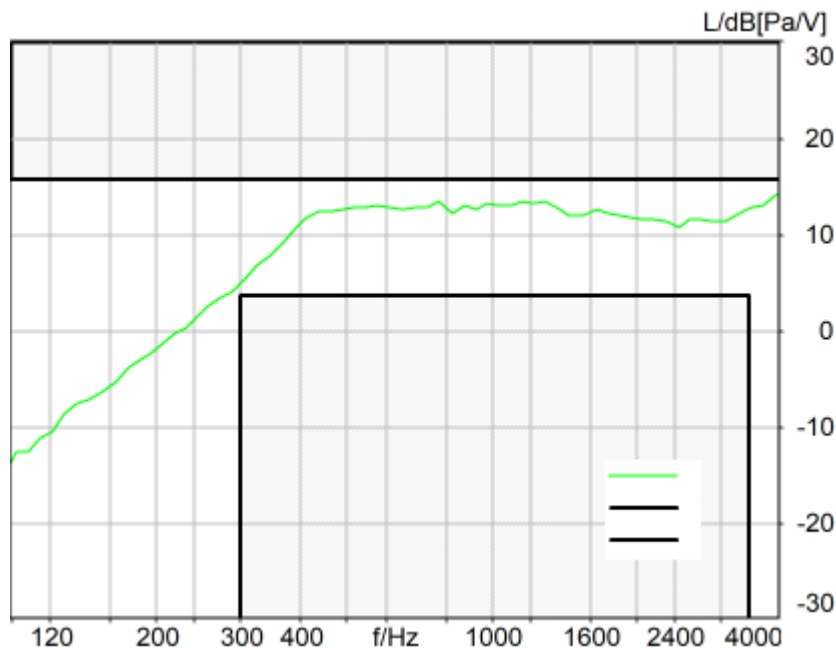

Absolute minimal distance  
1.64 dB at 305.9 Hz Ok

Ok

2024/3/6 18:35 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_nb\_r16.dat**

Level adj. Ch1 -90.0 dB Level adj. Ch2 -4.0 dB

NARROWBAND IEEE-269-2010 Real Speech Signal at Channel 2

Pause 0.5 s +

Real Speech (english, male speaker) 11.5 s, Active Speech Level: -16 dBm0, margin 15.9 dB +

Pause till end of file

Signal level (ch1): -16 dBm0 Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"  
 Alteration:  
 0.2 s Pause added at the beginning of the file.  
 0.8 s Pause added at the end of the file.  
 filtered with 4.0 kHz low-pass filter  
 signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
 Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	500.00 ms	Range length	11500.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	12th octave	DIN Row	Row A
Method	FFT		
FFT size	4096	Overlap	75 %
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hanb.fft		
Tol. scheme file	521_rcv_frq_man_hanb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	4000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr. 12306613


Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.3 Frequency Response 2N DF HANB**

TIA-5050 (2018-01) \ Measurements \ Narrowband

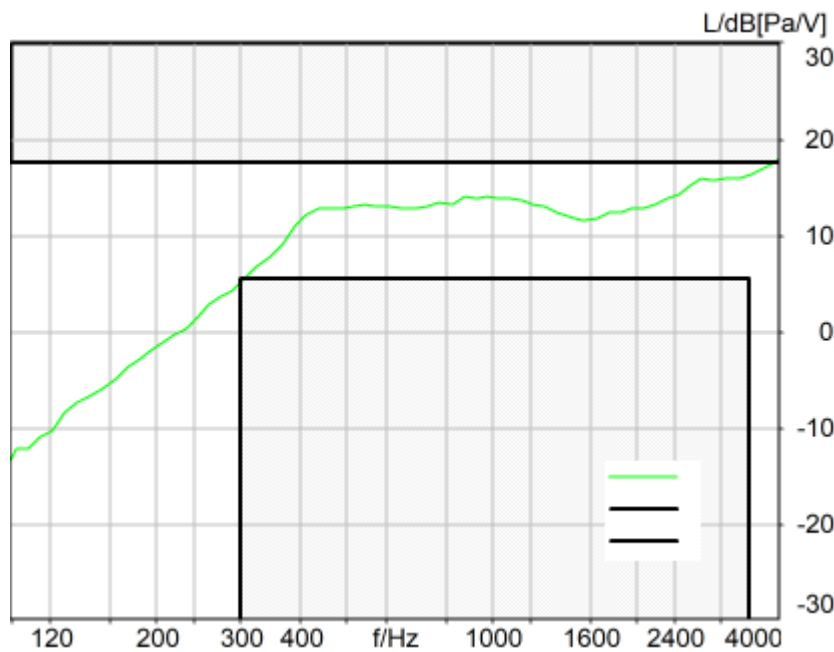

Absolute minimal distance  
-0.03 dB at 305.9 Hz Not Ok

**Not Ok**

2024/3/6 18:35 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_nb\_r16.dat**

Level adj. Ch1 -90.0 dB Level adj. Ch2 -4.0 dB

NARROWBAND IEEE-269-2010 Real Speech Signal at Channel 2

Pause 0.5 s +

Real Speech (english, male speaker) 11.5 s, Active Speech Level: -16 dBm0, margin 15.9 dB +

Pause till end of file

Signal level (ch1): -16 dBm0 Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the and of the file.

filtered with 4.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	500.00 ms	Range length	11500.00 ms
Use FIR Filter	Ch2	FIR filter	drp2df_ieeee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	12th octave	DIN Row	Row A
Method	FFT		
FFT size	4096	Overlap	75 %
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hanb.fft		
Tol. scheme file	521_rcv_frq_man_hanb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	4000.0 Hz

**Special Features**

Compensate delay 173.7000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

VoIP Settings (VoIP)

---

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTF Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

-----  
**BEQ Settings (BEQ Filter 1)**

Block mode      Bypass

-----  
**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **Measurement Protocol**

Measurement Object	WIFI 5.5G_802.11a 6M_EVS WB 128kbps_CH132
Description	HMD_2322#N159V

Project	TIA-5050 (2018-01)
Report Generation Date	2024/3/7 9:05
Responsible Person	audio

## Status Overview

SMD	Status	Single Value Description	Single Value	Object
Overall Receive Delay WB	Done	Delay (Cross) [ms]	152.9	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.1a Receive Volume Control Performance 8N WB	Ok	Corrected Speech Level [dB[SPL]]	15.34	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.1b Receive Volume Control Performance 2N WB	Ok	Corrected Speech Level [dB[SPL]]	12.50	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	31.32	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 315 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	30.81	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 400 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	29.71	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	30.17	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 630 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.71	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 800 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.85	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 1000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.92	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 1250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	24.49	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 1600 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	23.56	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 2000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	22.83	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 2500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	28.78	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 3150 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	29.99	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 4000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	28.62	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise -	Ok	Distortion (Noise) [dB],	32.84	WIFI 5.5G_802.11a 6M



5000 Hz WB		0.0 dB		_EVS WB 128kbps_CH132
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 2000Hz)	22.83	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	31.40	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 315 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	30.77	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 400 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	29.80	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	30.07	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 630 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	33.19	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 800 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	33.67	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 1000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	31.86	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 1250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	25.27	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 1600 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	23.60	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 2000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	21.67	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 2500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	28.78	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 3150 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	29.24	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 4000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	29.49	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.2 RCV Distortion and Noise - 5000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	34.82	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 2000Hz)	21.67	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.3 Frequency Response 8N FF	Ok	Min. dist. to tolerance scheme [dB], 5767.3 Hz	1.81	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.3 Frequency Response 8N	Ok	Min. dist. to tolerance	1.35	WIFI 5.5G_802.11a 6M


DF		scheme [dB], 5767.3 Hz		_EVS WB 128kbps_CH132
5.3 Frequency Response 2N FF	Ok	Min. dist. to tolerance scheme [dB], 4870.0 Hz	1.38	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132
5.3 Frequency Response 2N DF	Ok	Min. dist. to tolerance scheme [dB], 4870.0 Hz	0.57	WIFI 5.5G_802.11a 6M _EVS WB 128kbps_CH132

---

Overall Receive Delay WB	6
5.1a Receive Volume Control Performance 8N WB	7
5.1b Receive Volume Control Performance 2N WB	9
5.2 RCV Distortion and Noise - 250 Hz WB	11
5.2 RCV Distortion and Noise - 315 Hz WB	13
5.2 RCV Distortion and Noise - 400 Hz WB	15
5.2 RCV Distortion and Noise - 500 Hz WB	17
5.2 RCV Distortion and Noise - 630 Hz WB	19
5.2 RCV Distortion and Noise - 800 Hz WB	21
5.2 RCV Distortion and Noise - 1000 Hz WB	23
5.2 RCV Distortion and Noise - 1250 Hz WB	25
5.2 RCV Distortion and Noise - 1600 Hz WB	27
5.2 RCV Distortion and Noise - 2000 Hz WB	29
5.2 RCV Distortion and Noise - 2500 Hz WB	31
5.2 RCV Distortion and Noise - 3150 Hz WB	33
5.2 RCV Distortion and Noise - 4000 Hz WB	35
5.2 RCV Distortion and Noise - 5000 Hz WB	37
Report - Receive Distortion and Noise (Conversational Gain)	39
5.2 RCV Distortion and Noise - 250 Hz WB	40
5.2 RCV Distortion and Noise - 315 Hz WB	42
5.2 RCV Distortion and Noise - 400 Hz WB	44
5.2 RCV Distortion and Noise - 500 Hz WB	46
5.2 RCV Distortion and Noise - 630 Hz WB	48
5.2 RCV Distortion and Noise - 800 Hz WB	50
5.2 RCV Distortion and Noise - 1000 Hz WB	52
5.2 RCV Distortion and Noise - 1250 Hz WB	54
5.2 RCV Distortion and Noise - 1600 Hz WB	56
5.2 RCV Distortion and Noise - 2000 Hz WB	58
5.2 RCV Distortion and Noise - 2500 Hz WB	60
5.2 RCV Distortion and Noise - 3150 Hz WB	62
5.2 RCV Distortion and Noise - 4000 Hz WB	63
5.2 RCV Distortion and Noise - 5000 Hz WB	65
Report - Receive Distortion and Noise (Conversational Gain)	67
5.3 Frequency Response 8N FF	68
5.3 Frequency Response 8N DF	70
5.3 Frequency Response 2N FF	73
5.3 Frequency Response 2N DF	75

## Overall Receive Delay WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ Preparation - Delay measurement

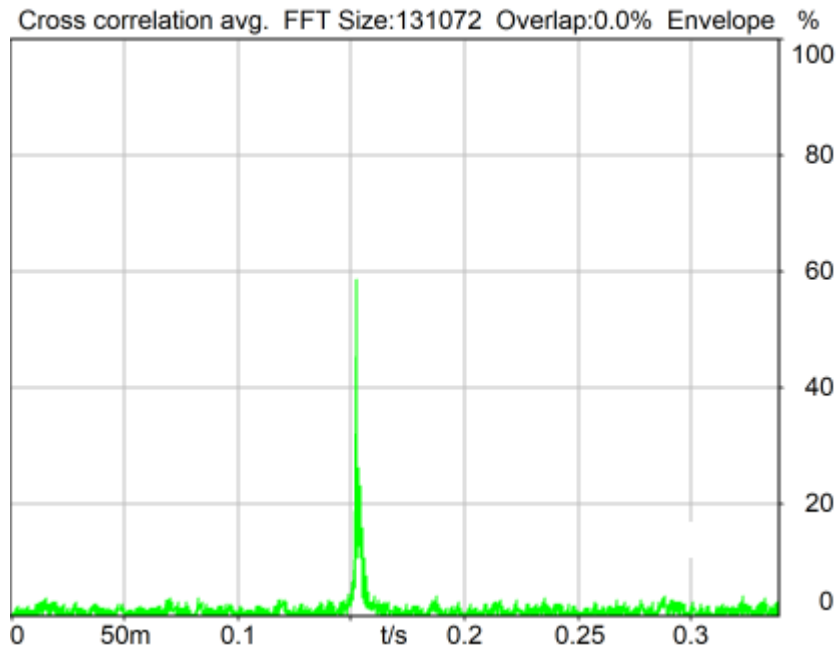

Delay (Cross): 152.9 ms

2024/3/6 17:42 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

### Source: csswb1b\_r1s.dat

WIDEBAND Composite Source Signal RCV P.501 (1 bursts) at Channel 2

Pause 0.5 s +

voiced signal + 8000 Hz band limited random noise 1.0 s +

Pause till end of file

Signal level (ch2): -14.7 dBm0 (corresponds to approx. -16.0 dBm0 for a 350 ms CSS considering 101 ms Pause) from 0.5s to 1.544s for 4-k FFT, Hanning window,

75 % overlap in frequency range of 100 to 8000 Hz

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.1: 0.00 dB

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Range start	550.00 ms	Range length	1950.00 ms
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation	Overlap	0 %
FFT size	131072	Smooth	Off
Window function.	Hanning		
Delayed channel	None		
Valid range start	-1228.79 ms	Valid range end	1228.81 ms

**Special Features**

Show source signal	Source ch.2	Store to variable	D_RCV_WB
--------------------	-------------	-------------------	----------

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTIP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

**BEQ Settings (BEQ Filter 1)**

Block mode	Bypass
------------	--------

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.1a Receive Volume Control Performance 8N WB

TIA-5050 (2018-01) \ Measurements \ Wideband

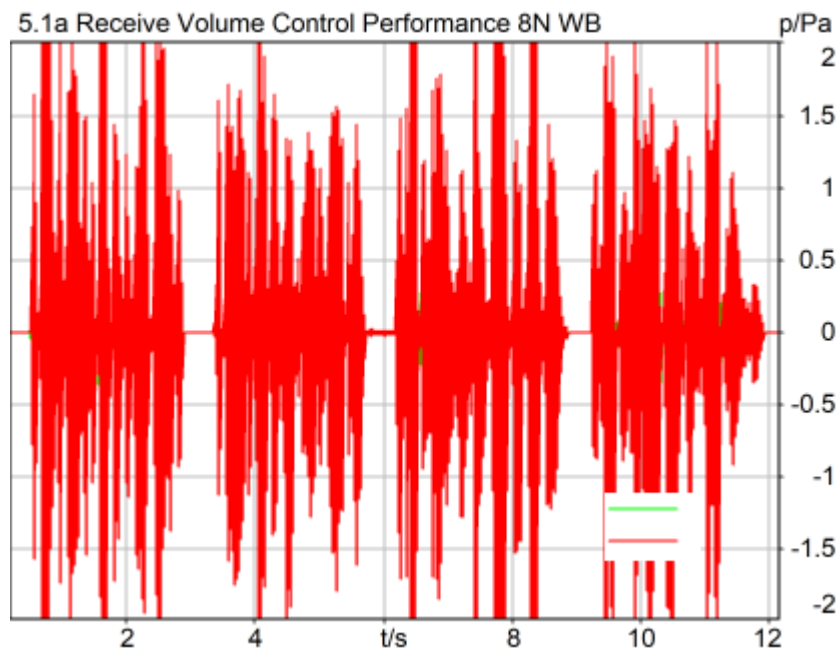

### Correction

X - 70

Speech Level RCV: 85.34 dB[SPL], Act.: 88.86%

Corrected Speech Level: 15.34 dB[SPL] Ok

### Ok

2024/3/6 17:42 ACQUA 5.1.200

### Limits

	lower
Run 1	6.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction	Out 2 -> In 2	Range length	12000.00 ms
Range start	200.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	Margin (15.9dB nom)	
Bandpass filter	Super Wideband		

15.90 dB

**Special Features**

Show source signal Source ch.2  
Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.1b Receive Volume Control Performance 2N WB**

TIA-5050 (2018-01) \ Measurements \ Wideband

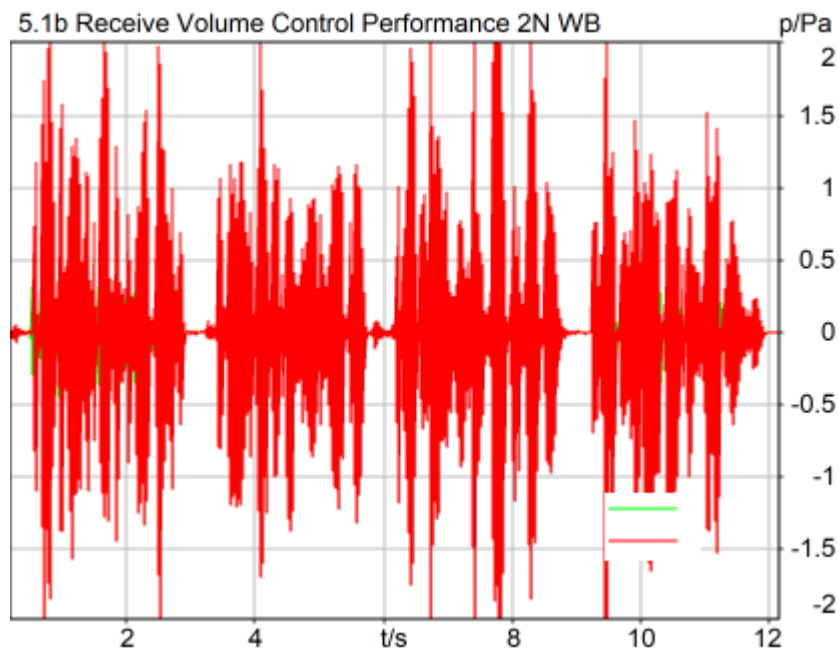

**Correction**

X - 70

Speech Level RCV: 82.50 dB[SPL], Act.: 87.76%

Corrected Speech Level: 12.50 dB[SPL] Ok

**Ok**

2024/3/6 17:43 ACQUA 5.1.200

**Limits**

	<b>lower</b>
Run 1	6.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	12000.00 ms
Range start	200.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	Margin (15.9dB nom)	
Bandpass filter	Super Wideband		



15.90 dB

**Special Features**

Show source signal Source ch.2

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-wb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **5.2 RCV Distortion and Noise - 250 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

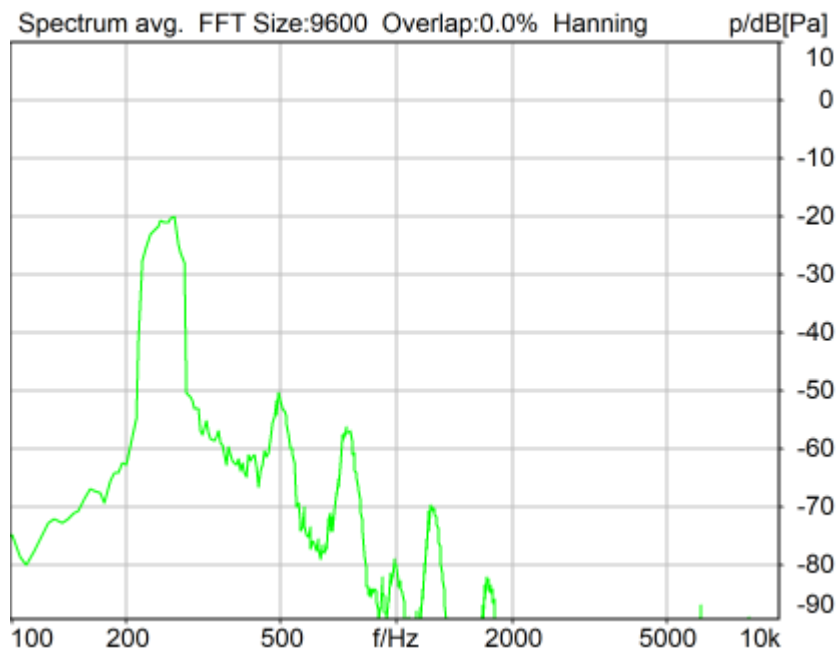

Distortion (Noise) RCV (packed): 31.32 dB (2.72%) Ok

**Ok**

2024/3/6 18:20 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_250hz\_sr20dbm0\_v02.dat.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	190.0 Hz	Stimulus max.	315.0 Hz
Analysis min.	20.0 Hz	Analysis max.	185.0 Hz
Analysis (2) min.	320.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_250Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 315 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

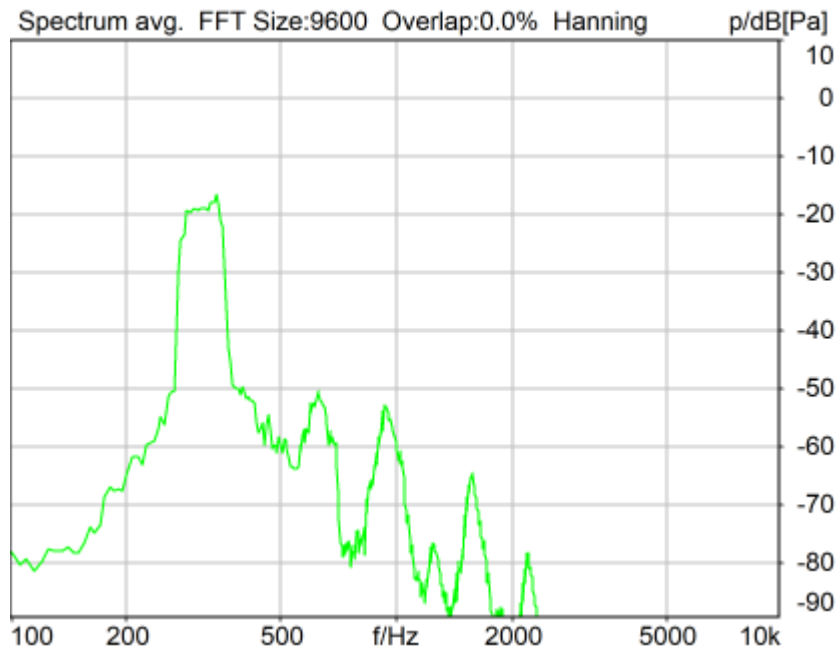

Distortion (Noise) RCV (packed): 30.81 dB (2.88%) Ok

**Ok**

2024/3/6 18:20 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_315hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	245.0 Hz	Stimulus max.	390.0 Hz
Analysis min.	20.0 Hz	Analysis max.	240.0 Hz
Analysis (2) min.	395.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_315Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 400 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

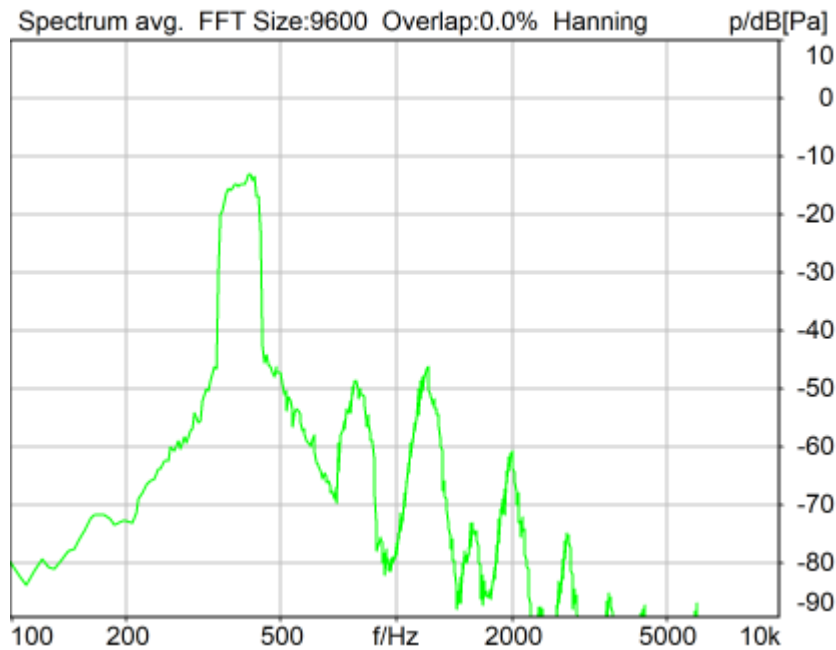

Distortion (Noise) RCV (packed): 29.71 dB (3.27%) Ok

**Ok**

2024/3/6 18:21 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_400hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	320.0 Hz	Stimulus max.	480.0 Hz
Analysis min.	20.0 Hz	Analysis max.	315.0 Hz
Analysis (2) min.	485.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_400Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 500 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

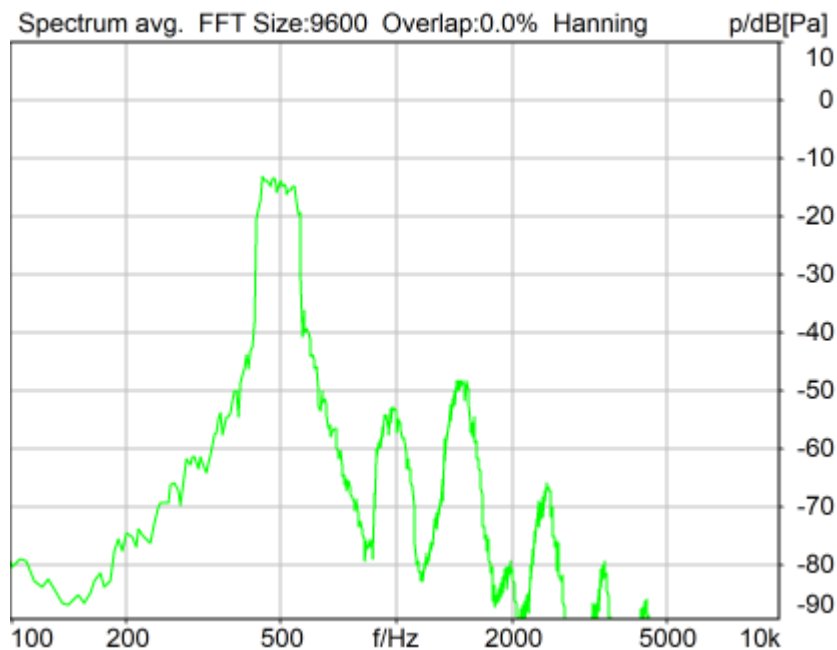

Distortion (Noise) RCV (packed): 30.17 dB (3.10%) Ok

**Ok**

2024/3/6 18:21 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_500hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %



Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	410.0 Hz	Stimulus max.	595.0 Hz
Analysis min.	20.0 Hz	Analysis max.	405.0 Hz
Analysis (2) min.	600.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTSP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 630 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

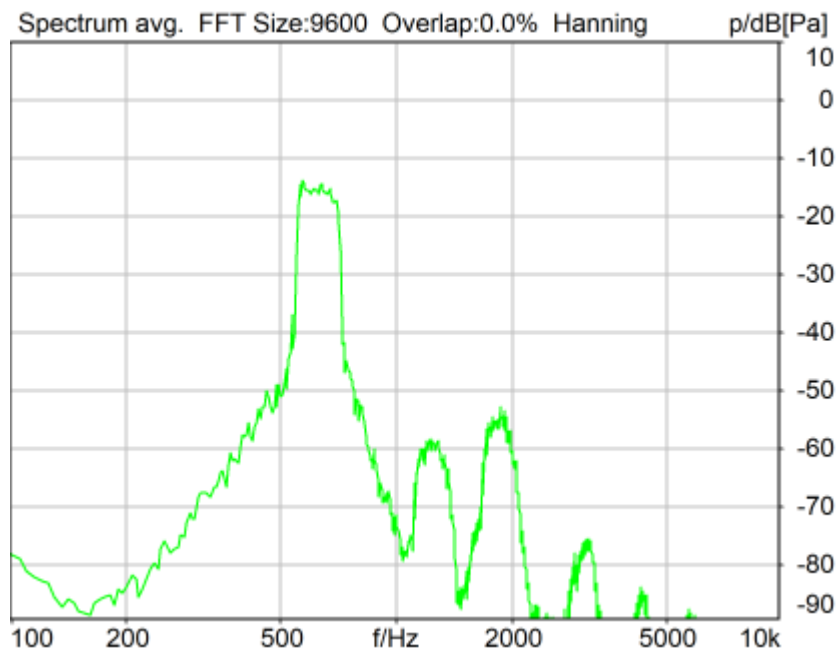

Distortion (Noise) RCV (packed): 32.71 dB (2.31%) Ok

Ok

2024/3/6 18:21 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_630hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	525.0 Hz	Stimulus max.	745.0 Hz
Analysis min.	20.0 Hz	Analysis max.	520.0 Hz
Analysis (2) min.	750.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_630Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTF Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 800 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

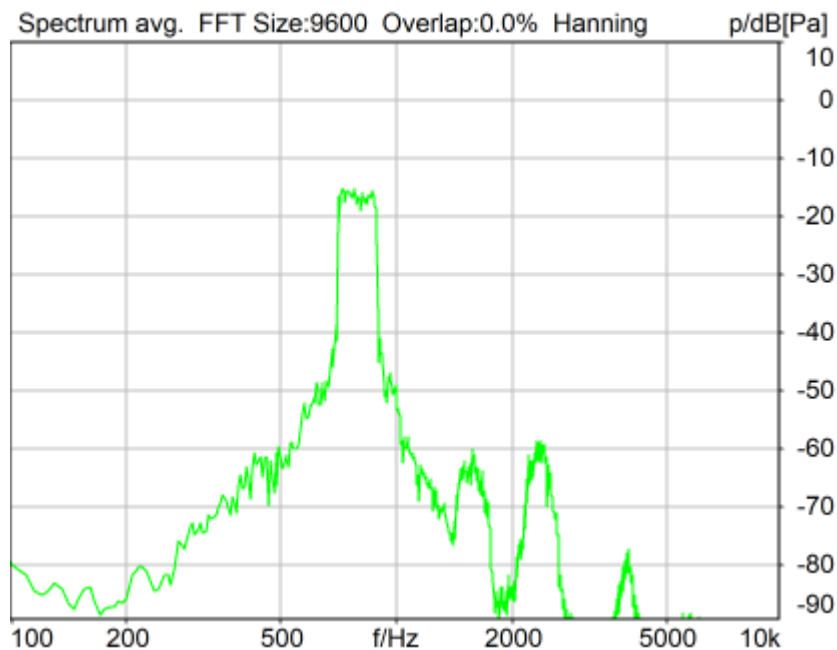

Distortion (Noise) RCV (packed): 32.85 dB (2.28%) Ok

Ok

2024/3/6 18:22 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_800hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	675.0 Hz	Stimulus max.	925.0 Hz
Analysis min.	20.0 Hz	Analysis max.	670.0 Hz
Analysis (2) min.	930.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_800Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

-----  
**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

-----  
**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 1000 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

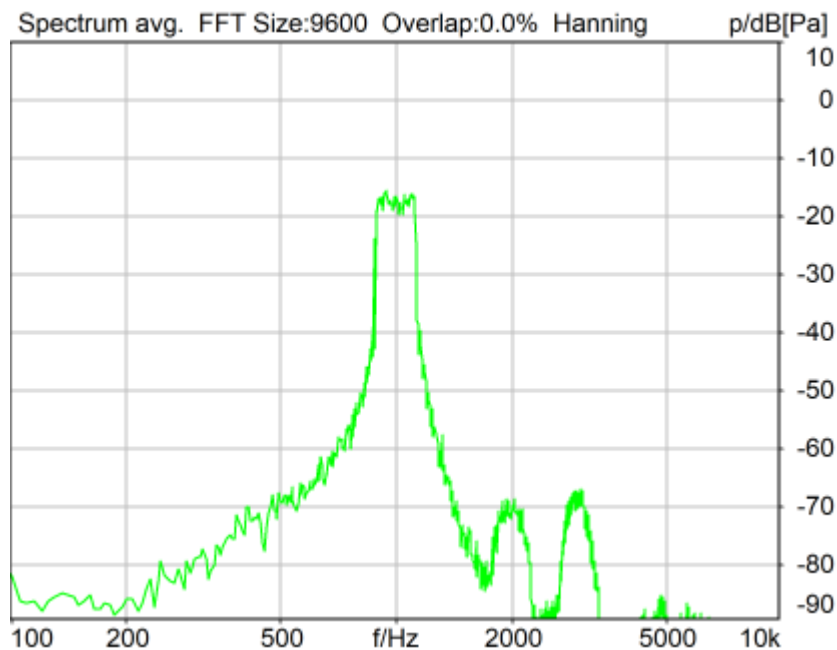

Distortion (Noise) RCV (packed): 32.92 dB (2.26%) Ok

Ok

2024/3/6 18:22 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	855.0 Hz	Stimulus max.	1155.0 Hz
Analysis min.	20.0 Hz	Analysis max.	850.0 Hz
Analysis (2) min.	1160.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTF Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1250 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

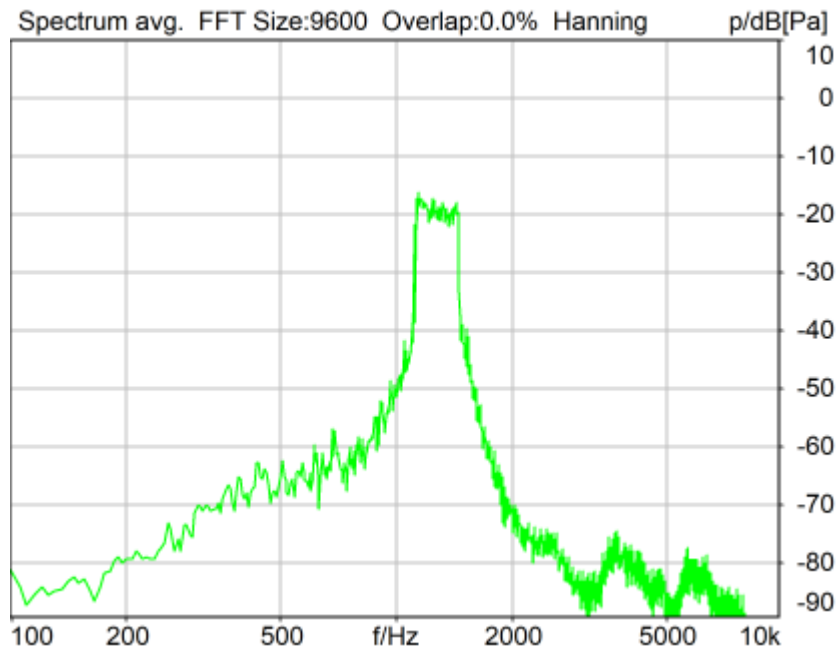

Distortion (Noise) RCV (packed): 24.49 dB (5.96%) Ok

**Ok**

2024/3/6 18:23 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1250hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %



Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1085.0 Hz	Stimulus max.	1450.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1080.0 Hz
Analysis (2) min.	1455.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1250Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1600 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

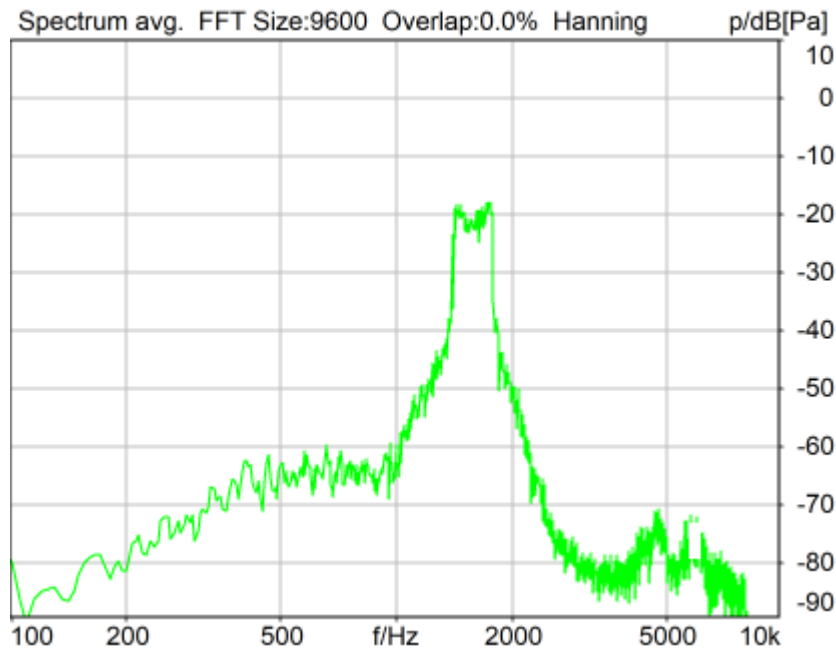

Distortion (Noise) RCV (packed): 23.56 dB (6.63%) Ok

**Ok**

2024/3/6 18:23 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1600hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1375.0 Hz	Stimulus max.	1815.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1370.0 Hz
Analysis (2) min.	1820.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1600Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTF Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 2000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

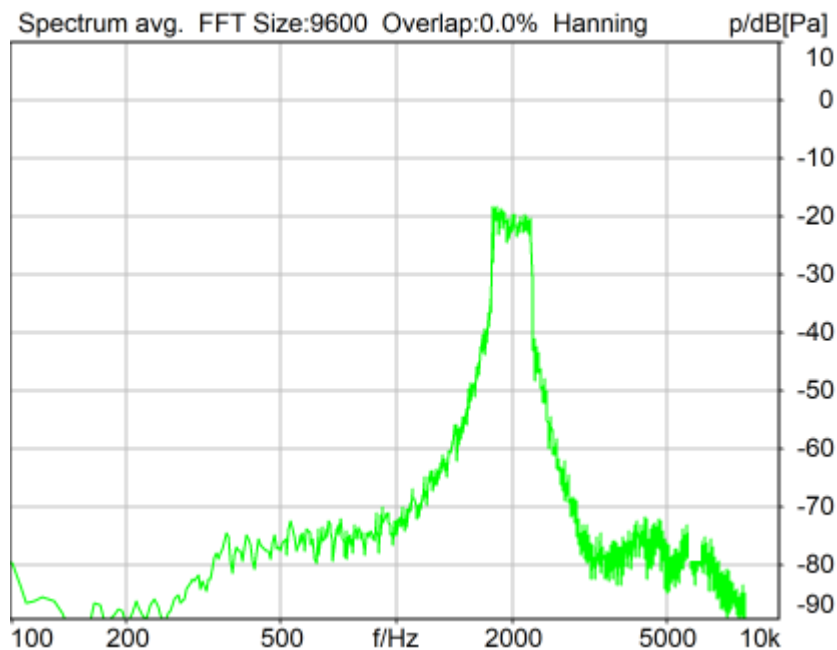

Distortion (Noise) RCV (packed): 22.83 dB (7.22%) Ok

**Ok**

2024/3/6 18:23 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1745.0 Hz	Stimulus max.	2275.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1740.0 Hz
Analysis (2) min.	2280.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_2000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 2500 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

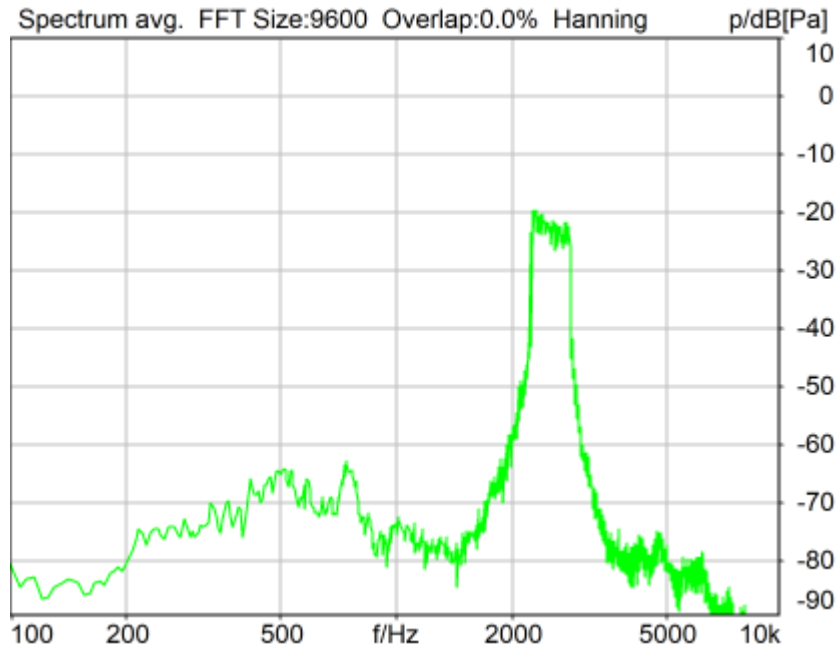

Distortion (Noise) RCV (packed): 28.78 dB (3.64%) Ok

**Ok**

2024/3/6 18:24 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2500hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2205.0 Hz	Stimulus max.	2855.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2200.0 Hz
Analysis (2) min.	2860.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_2500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 3150 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

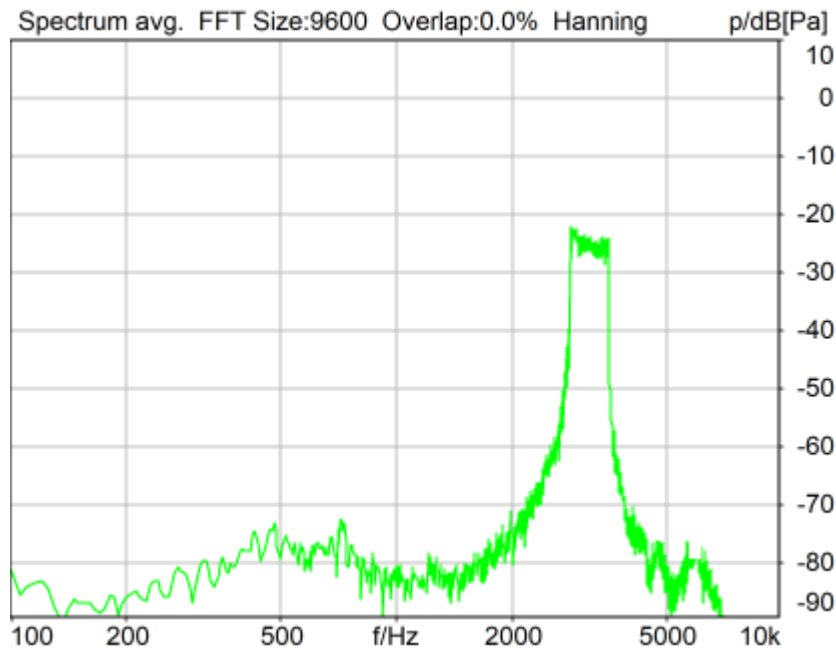

Distortion (Noise) RCV (packed): 29.99 dB (3.17%) Ok

**Ok**

2024/3/6 18:24 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_3150hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %



Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2785.0 Hz	Stimulus max.	3585.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2780.0 Hz
Analysis (2) min.	3590.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_3150Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 4000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

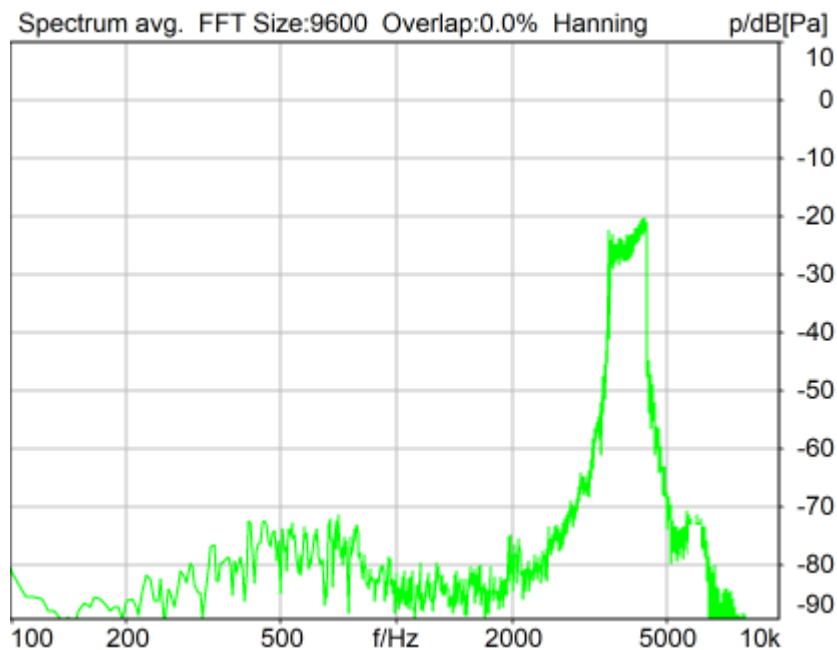

Distortion (Noise) RCV (packed): 28.62 dB (3.71%) Ok

**Ok**

2024/3/6 18:25 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_4000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	3515.0 Hz	Stimulus max.	4500.0 Hz
Analysis min.	20.0 Hz	Analysis max.	3510.0 Hz
Analysis (2) min.	4505.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_4000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 5000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

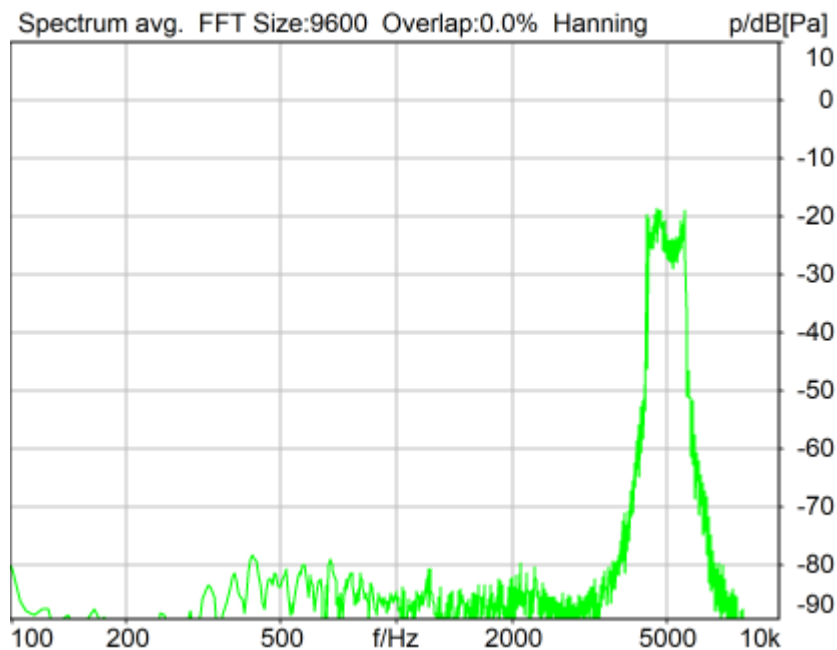

Distortion (Noise) RCV (packed): 32.84 dB (2.28%) Ok

**Ok**

2024/3/6 18:25 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_5000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %

Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	4430.0 Hz	Stimulus max.	5660.0 Hz
Analysis min.	20.0 Hz	Analysis max.	4425.0 Hz
Analysis (2) min.	5665.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_5000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**Report - Receive Distortion and Noise (Conversational Gain)**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

Region	Frequency	SDNR
1	250Hz	31.32 dB


2	315Hz	30.81 dB
3	400Hz	29.71 dB
4	500Hz	30.17 dB
5	630Hz	32.71 dB
6	800Hz	32.85 dB
7	1000Hz	32.92 dB
8	1250Hz	24.49 dB
9	1600Hz	23.56 dB
10	2000Hz	22.83 dB
11	2500Hz	28.78 dB
12	3150Hz	29.99 dB
13	4000Hz	28.62 dB
14	5000Hz	32.84 dB

All SDNRs were greater than 20.0 dB, requirement was met.  
Smallest SDNR was 22.83dB at 2000Hz.

2024/3/6 18:25 ACQUA

## 5.2 RCV Distortion and Noise - 250 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

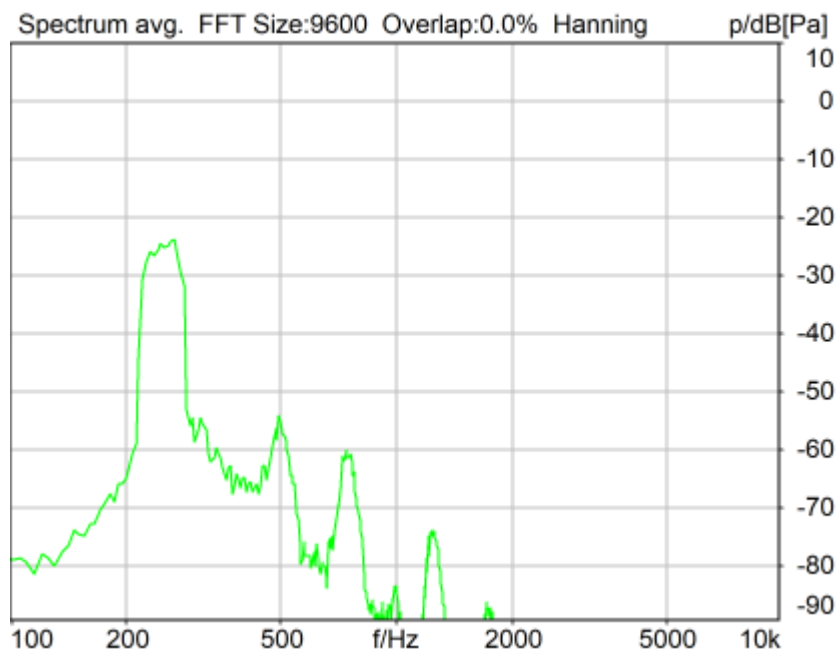

Distortion (Noise) RCV (packed): 31.40 dB (2.69%) Ok

**Ok**

2024/3/6 18:43 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_250hz\_sr20dbm0\_v02.dat.dat

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	190.0 Hz	Stimulus max.	315.0 Hz
Analysis min.	20.0 Hz	Analysis max.	185.0 Hz
Analysis (2) min.	320.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))

Store to variable RCVWB10\_250Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

**Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V


**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
-------	--------------------------	----------	------

Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
-----			
VoIP Settings (VoIP)			
RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTIP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off
-----			
BEQ Settings (BEQ Filter 1)			
Block mode	Bypass		
-----			
Artificial Head Settings (HATS 1 (HMS II.3))			
Ser. Nr.	12306613	Pinna Type	Type 3.3
<b>HIB Settings</b>			
HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 315 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

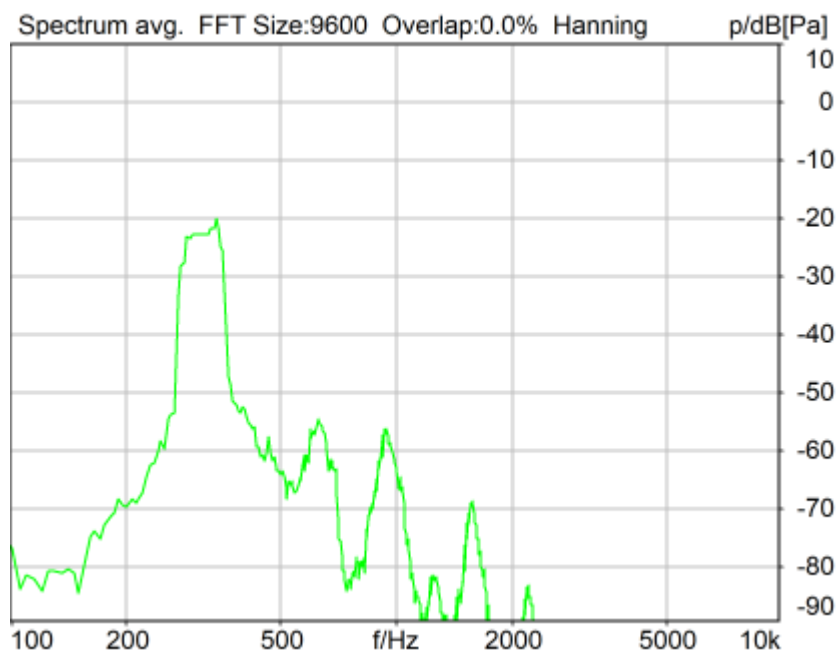

Distortion (Noise) RCV (packed): 30.77 dB (2.89%) Ok



**Ok**

2024/3/6 18:44 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_315hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	245.0 Hz	Stimulus max.	390.0 Hz
Analysis min.	20.0 Hz	Analysis max.	240.0 Hz
Analysis (2) min.	395.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))

Store to variable RCVWB10\_315Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

**Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 400 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

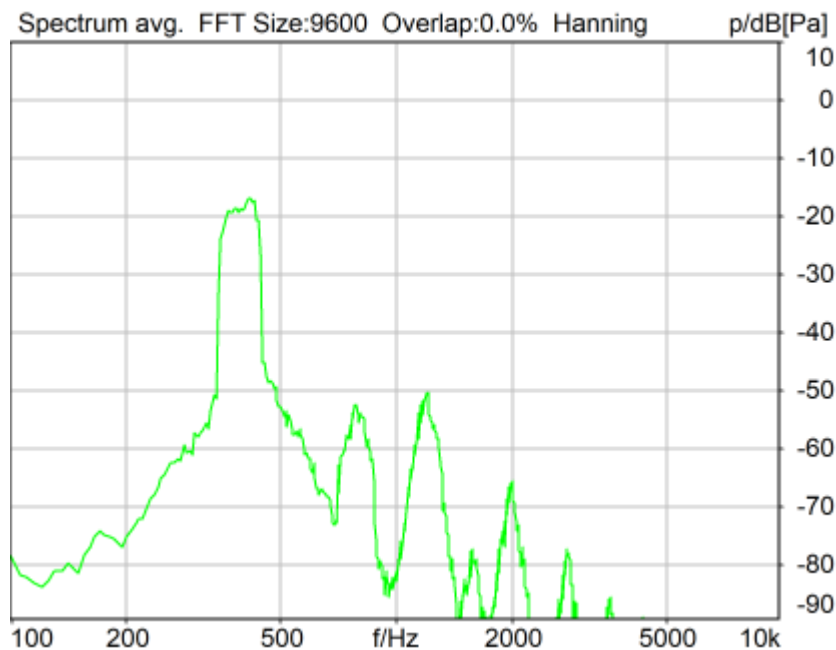

Distortion (Noise) RCV (packed): 29.80 dB (3.24%) Ok

**Ok**

2024/3/6 18:44 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_400hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	320.0 Hz	Stimulus max.	480.0 Hz
Analysis min.	20.0 Hz	Analysis max.	315.0 Hz
Analysis (2) min.	485.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_400Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 500 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

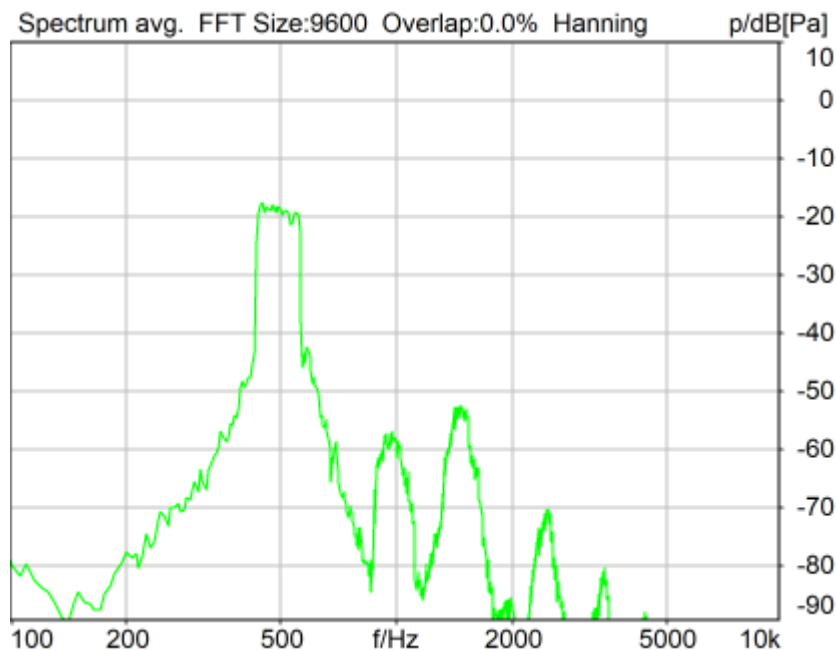

Distortion (Noise) RCV (packed): 30.07 dB (3.14%) Ok

**Ok**

2024/3/6 18:44 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_500hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	410.0 Hz
Stimulus min.	410.0 Hz	Stimulus max.	595.0 Hz
Analysis min.	20.0 Hz	Analysis max.	405.0 Hz
Analysis (2) min.	600.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMT Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

-----  
BEQ Settings (BEQ Filter 1)  
Block mode      Bypass  
-----

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 630 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

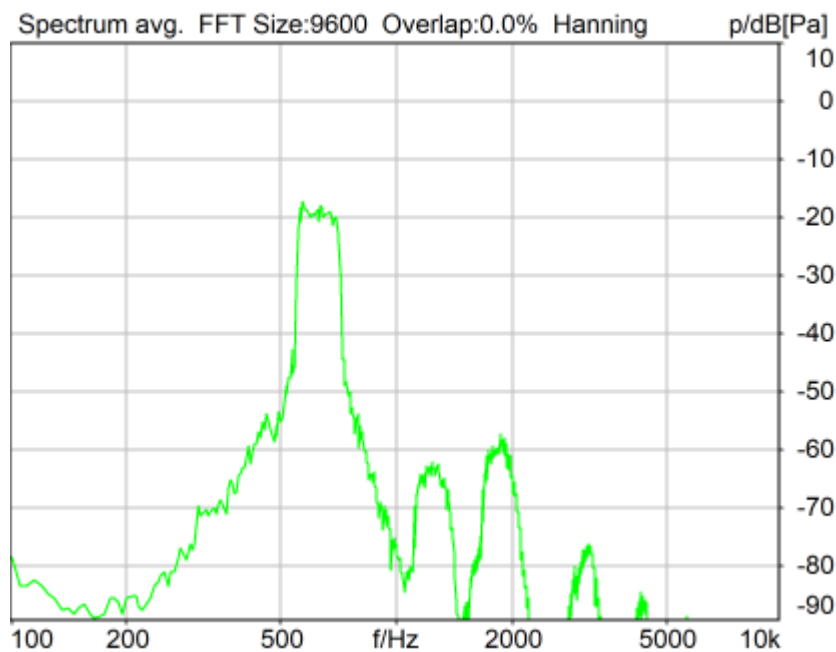

Distortion (Noise) RCV (packed): 33.19 dB (2.19%) Ok

**Ok**

2024/3/6 18:45 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
--	-------

Run 1	20.00 dB
-------	----------

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_630hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	525.0 Hz	Stimulus max.	745.0 Hz
Analysis min.	20.0 Hz	Analysis max.	520.0 Hz
Analysis (2) min.	750.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_630Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0

FMTMP Parameter ;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0  
 Impairment Mode Off Impairment Type Off

-----  
 BEQ Settings (BEQ Filter 1)  
 Block mode Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))  
 Ser. Nr. 12306613


Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 800 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

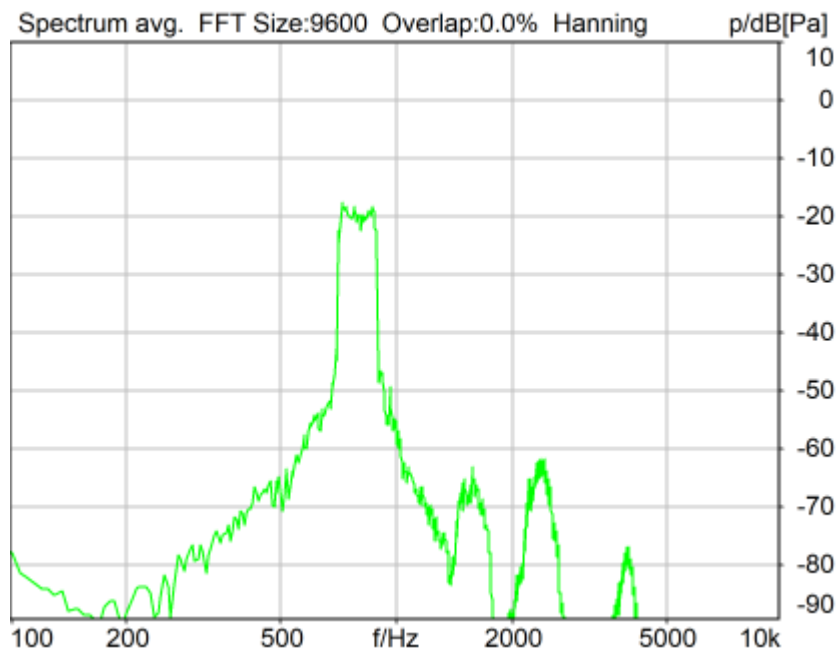

Distortion (Noise) RCV (packed): 33.67 dB (2.07%) Ok

**Ok**

2024/3/6 18:45 ACQUA 5.1.200  
 Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off



Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_800hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	675.0 Hz	Stimulus max.	925.0 Hz
Analysis min.	20.0 Hz	Analysis max.	670.0 Hz
Analysis (2) min.	930.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_800Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

HIB Settings

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

## 5.2 RCV Distortion and Noise - 1000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

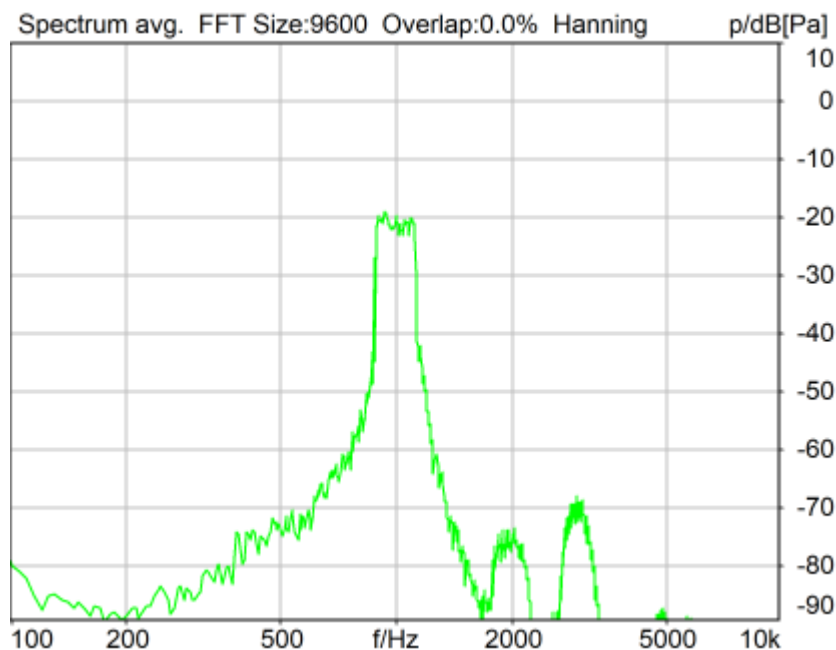

Distortion (Noise) RCV (packed): 31.86 dB (2.55%) Ok

Ok

2024/3/6 18:46 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	855.0 Hz	Stimulus max.	1155.0 Hz
Analysis min.	20.0 Hz	Analysis max.	850.0 Hz
Analysis (2) min.	1160.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))

Store to variable RCVWB10\_1000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

**5.2 RCV Distortion and Noise - 1250 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

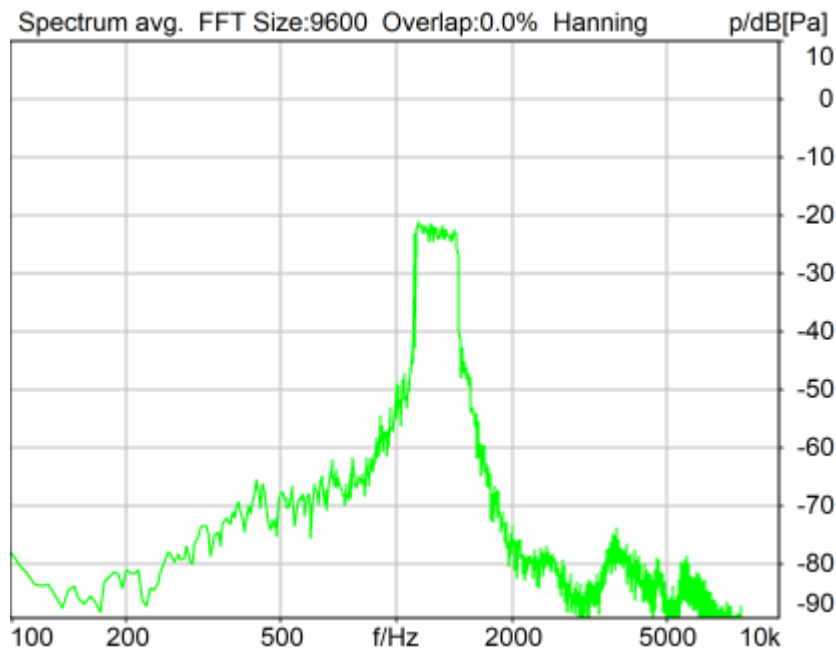

Distortion (Noise) RCV (packed): 25.27 dB (5.45%) Ok

**Ok**

2024/3/6 18:46 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_1250hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1085.0 Hz	Stimulus max.	1450.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1080.0 Hz
Analysis (2) min.	1455.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1250Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1600 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

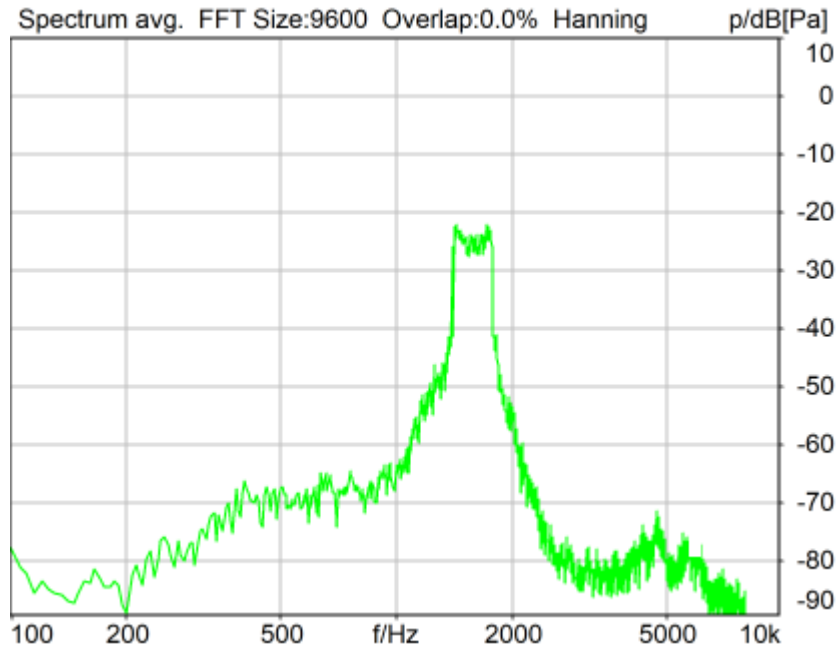

Distortion (Noise) RCV (packed): 23.60 dB (6.60%) Ok

**Ok**

2024/3/6 18:46 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_1600hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	1815.0 Hz
Stimulus min.	1375.0 Hz	Analysis max.	1370.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	1820.0 Hz		

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1600Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EV5/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**


HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB

Mic 1 Power Supply Off

Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 2000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

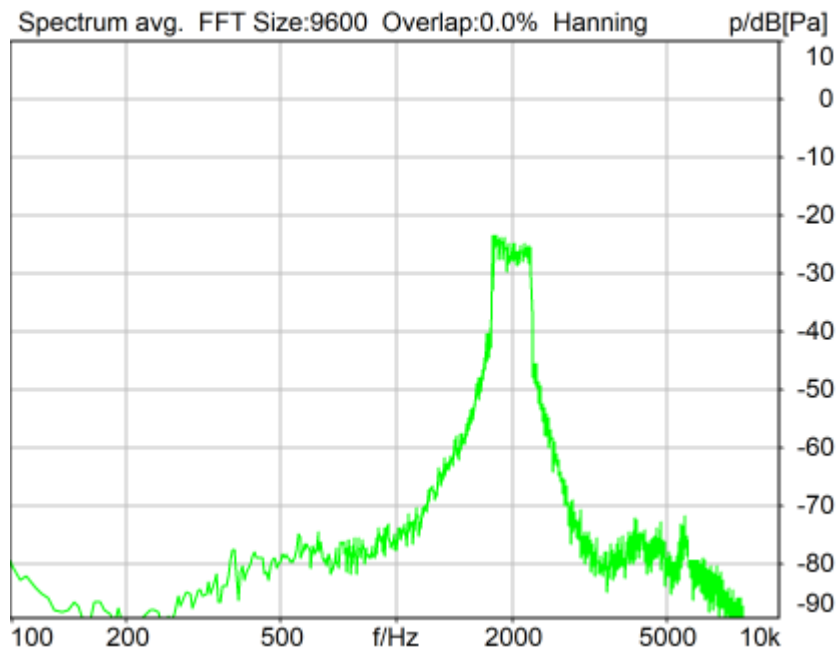

Distortion (Noise) RCV (packed): 21.67 dB (8.25%) Ok

Ok

2024/3/6 18:47 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_2000hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)



**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1745.0 Hz	Stimulus max.	2275.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1740.0 Hz
Analysis (2) min.	2280.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_2000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 2500 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

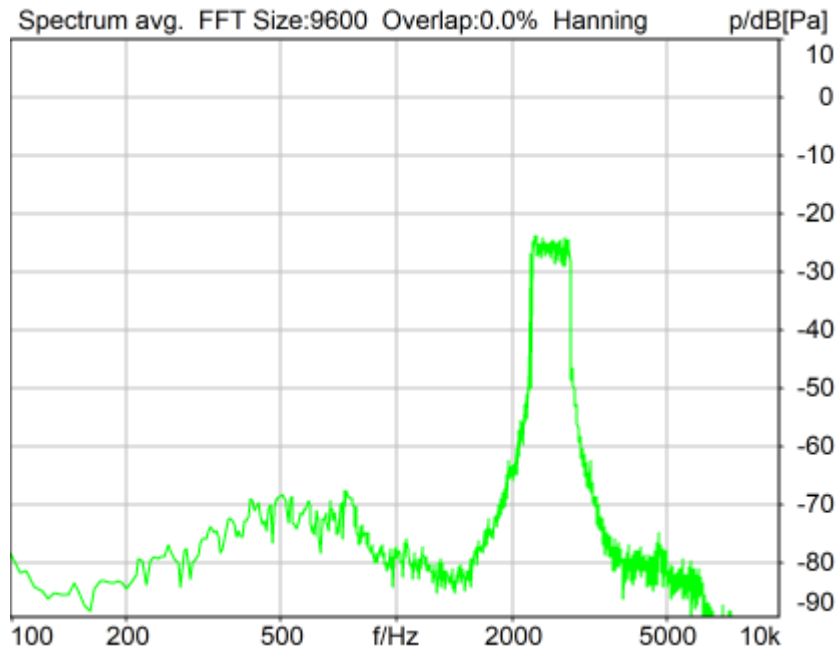

Distortion (Noise) RCV (packed): 28.78 dB (3.64%) Ok

**Ok**

2024/3/6 18:47 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_2500hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2205.0 Hz	Stimulus max.	2855.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2200.0 Hz
Analysis (2) min.	2860.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_2500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 3150 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

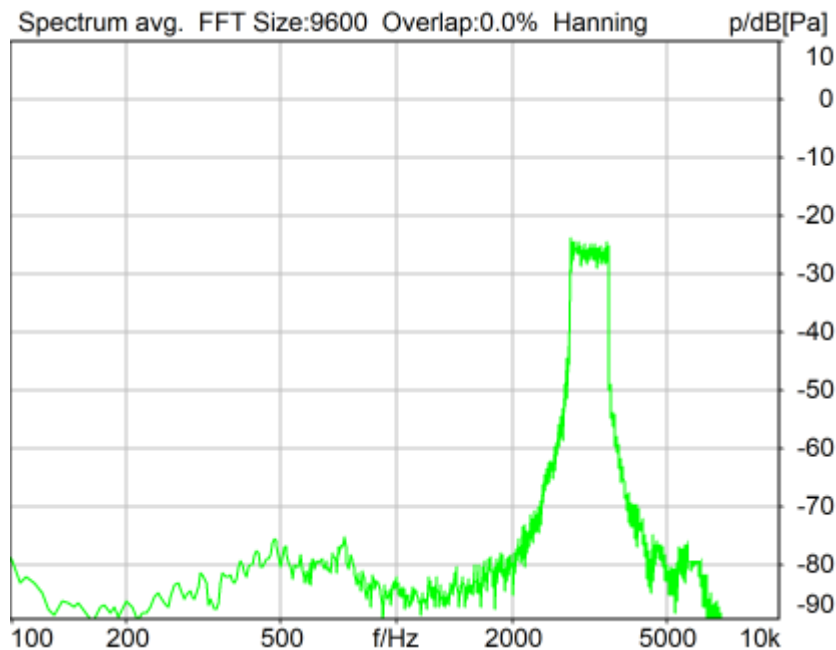

Distortion (Noise) RCV (packed): 29.24 dB (3.45%) Ok

**Ok**

2024/3/6 18:48 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_3150hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction Out 2 -> In 2

Range start 13550.00 ms Range length 200.00 ms

Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2785.0 Hz	Stimulus max.	3585.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2780.0 Hz
Analysis (2) min.	3590.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_3150Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **5.2 RCV Distortion and Noise - 4000 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

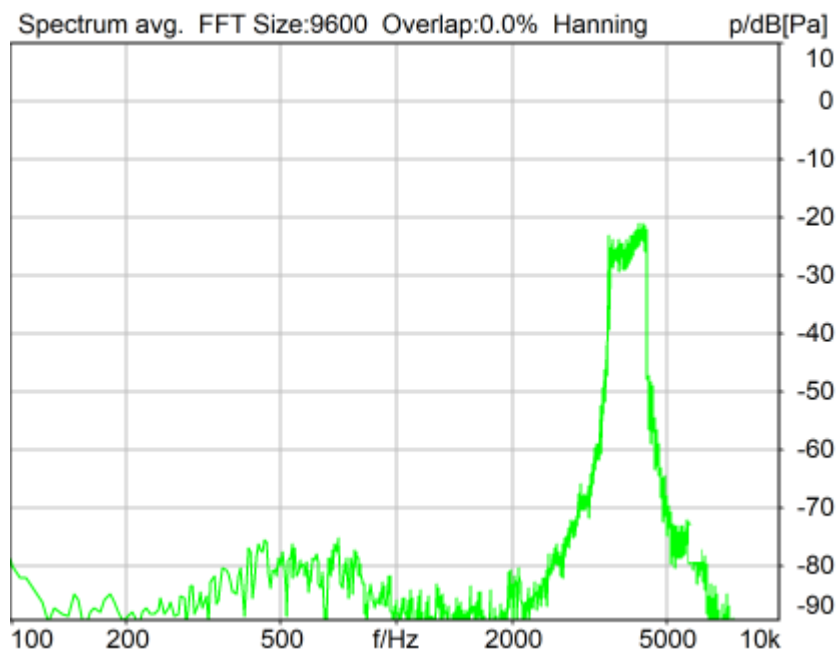

Distortion (Noise) RCV (packed): 29.49 dB (3.35%) Ok

**Ok**

2024/3/6 18:48 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_4000hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation

FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	3515.0 Hz	Stimulus max.	4500.0 Hz
Analysis min.	20.0 Hz	Analysis max.	3510.0 Hz
Analysis (2) min.	4505.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_4000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 5000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

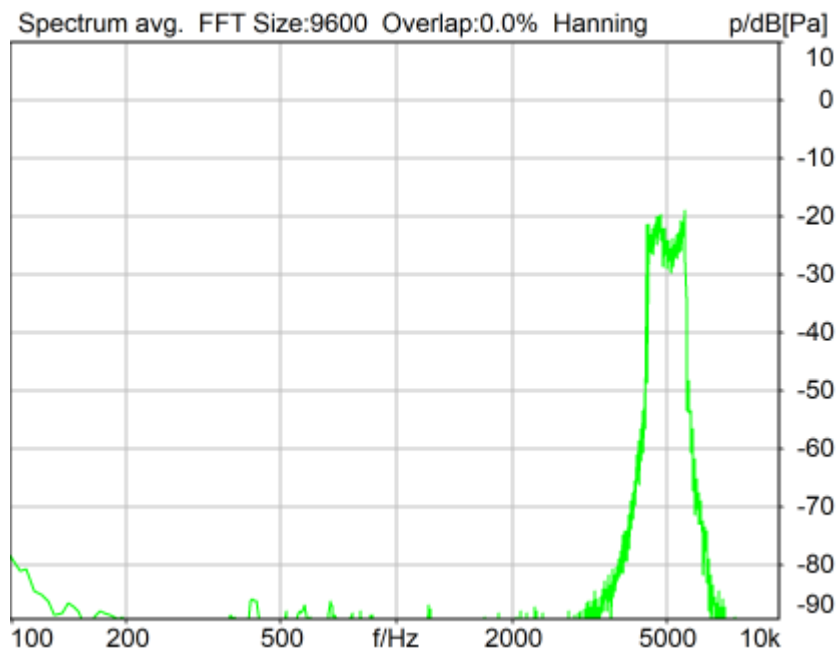

Distortion (Noise) RCV (packed): 34.82 dB (1.82%) Ok

**Ok**

2024/3/6 18:48 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_5000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %



Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	4430.0 Hz	Stimulus max.	5660.0 Hz
Analysis min.	20.0 Hz	Analysis max.	4425.0 Hz
Analysis (2) min.	5665.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_5000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**Report - Receive Distortion and Noise (Conversational Gain)**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

Region	Frequency	SDNR
1	250Hz	31.40 dB


2	315Hz	30.77 dB
3	400Hz	29.80 dB
4	500Hz	30.07 dB
5	630Hz	33.19 dB
6	800Hz	33.67 dB
7	1000Hz	31.86 dB
8	1250Hz	25.27 dB
9	1600Hz	23.60 dB
10	2000Hz	21.67 dB
11	2500Hz	28.78 dB
12	3150Hz	29.24 dB
13	4000Hz	29.49 dB
14	5000Hz	34.82 dB

All SDNRs were greater than 20.0 dB, requirement was met.  
Smallest SDNR was 21.67dB at 2000Hz.

2024/3/6 18:48 ACQUA

### 5.3 Frequency Response 8N FF

TIA-5050 (2018-01) \ Measurements \ Wideband

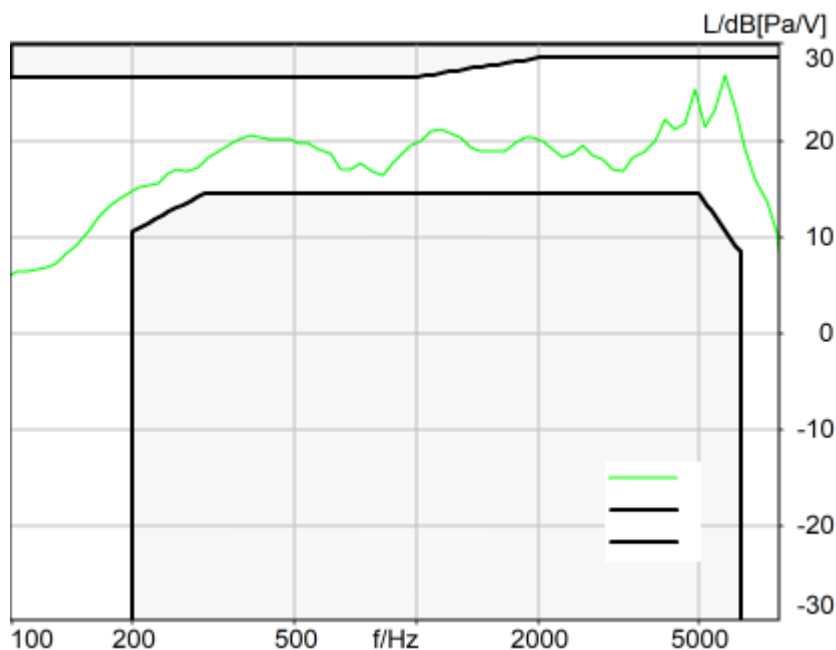

Absolute minimal distance

1.81 dB at 5767.3 Hz Ok

**Ok**

2024/3/6 19:16 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_wb\_r20\_v01.dat**

Level adj. Ch1 -90.0 dB  
WIDEBAND IEEE-269-2010 Real Speech Signal at Channel 2  
Pause 0.5 s +  
Real Speech (english, male speaker) 11.5 s, Active Speech Level: -22,2 dBV, margin 15.9 dB +  
Pause till end of file  
Signal level (ch2): -22,2 dBV Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"  
Alteration:  
0.2 s Pause added at the beginning of the file.  
0.8 s Pause added at the and of the file.  
filtered with 8.0 kHz low-pass filter  
signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	500.00 ms	Range length	11500.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieeee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	12th octave	DIN Row	Row A
Method	FFT		
FFT size	4096	Overlap	75 %
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hawb.fft		
Tol. scheme file	521_rcv_frq_man_hawb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	8000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

## labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

## Microphone Settings (Mic Amp. (Slot 6))

## Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V

## Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V

## Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

## Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

## VoIP Settings (VoIP)

RTP Connection Streaming SIP Connection Unavailable  
SIP Reg. State Unregistered Jitterbuffer Length 140  
Jitter Buffer Reset On Playback Enabled Codec EVS/16000/1  
Packet Length 20 Encoder Parameter  
;evs-mode-switch=1;br=5.9-13.2;bw=nb-swb;ch-aw-recv=2  
FMTP Parameter ;evs-mode-switch=1;br=5.9-13.2;bw=nb-swb;ch-aw-recv=2  
Impairment Mode Off Impairment Type Off

## BEQ Settings (BEQ Filter 1)

Block mode Bypass

## Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

## HIB Settings

HIB Name 60020095 Serial 60020095  
HIB Mode Mobile Measurement Impedance 32 Ohm  
Gain out 1 -40.00 dB Gain out 2 0.00 dB  
Gain in 1 0.00 dB Gain in 2 0.00 dB  
Mic 1 Power Supply Off Mic 2 Power Supply Off

## 5.3 Frequency Response 8N DF

TIA-5050 (2018-01) \ Measurements \ Wideband

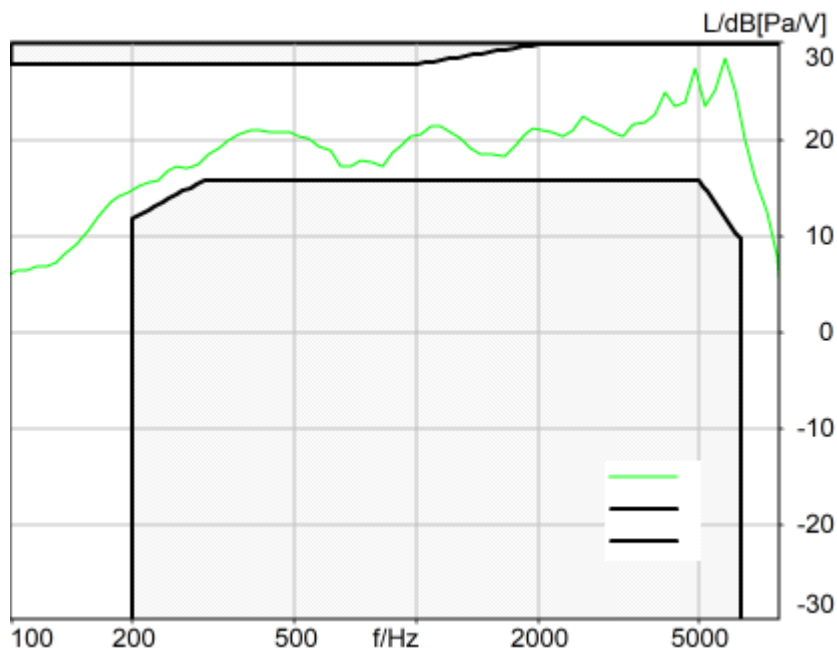

Absolute minimal distance  
1.35 dB at 5767.3 Hz Ok

**Ok**

2024/3/6 19:17 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_wb\_r20\_v01.dat**

Level adj. Ch1 -90.0 dB  
WIDEBAND IEEE-269-2010 Real Speech Signal at Channel 2  
Pause 0.5 s +  
Real Speech (english, male speaker) 11.5 s, Active Speech Level: -22,2 dBV, margin 15.9 dB +  
Pause till end of file  
Signal level (ch2): -22,2 dBV Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the and of the file.

filtered with 8.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	500.00 ms	Range length	11500.00 ms
Use FIR Filter	Ch2	FIR filter	drp2df_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	12th octave	DIN Row	Row A
Method	FFT		
FFT size	4096	Overlap	75 %
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hawb.fft		
Tol. scheme file	521_rcv_frq_man_hawb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	8000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	
;evs-mode-switch=1;br=5.9-13.2;bw=nb-swb;ch-aw-recv=2			
FMTTP Parameter	;evs-mode-switch=1;br=5.9-13.2;bw=nb-swb;ch-aw-recv=2		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**


HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB

Gain in 1 0.00 dB  
Mic 1 Power Supply Off

Gain in 2 0.00 dB  
Mic 2 Power Supply Off

### 5.3 Frequency Response 2N FF

TIA-5050 (2018-01) \ Measurements \ Wideband

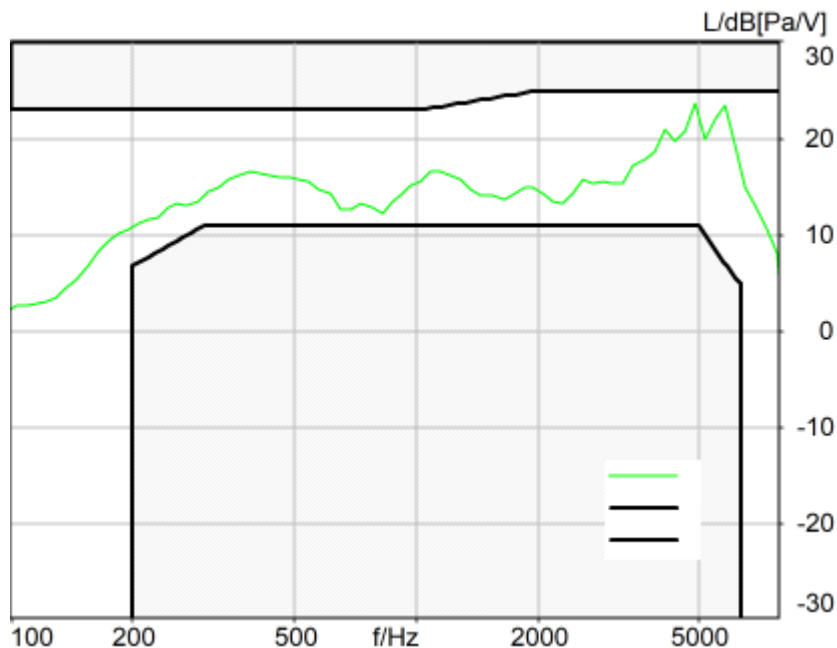

Absolute minimal distance  
1.38 dB at 4870.0 Hz Ok

**Ok**

2024/3/6 19:19 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_wb\_r20\_v01.dat**

Level adj. Ch1 -90.0 dB  
WIDEBAND IEEE-269-2010 Real Speech Signal at Channel 2  
Pause 0.5 s +  
Real Speech (english, male speaker) 11.5 s, Active Speech Level: -22,2 dBV, margin 15.9 dB +  
Pause till end of file

Signal level (ch2): -22,2 dBV Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the end of the file.

filtered with 8.0 kHz low-pass filter

signal level changed

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction	Out 2 -> In 2		
Range start	500.00 ms	Range length	11500.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	12th octave	DIN Row	Row A
Method	FFT		
FFT size	4096	Overlap	75 %
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hawb.fft		
Tol. scheme file	521_rcv_frq_man_hawb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	8000.0 Hz

### Special Features

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))

### labCORE Settings

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

### labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

### Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

### VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	
;evs-mode-switch=1;br=5.9-13.2;bw=nb-swb;ch-aw-recv=2			
FMTF Parameter	;evs-mode-switch=1;br=5.9-13.2;bw=nb-swb;ch-aw-recv=2		
Impairment Mode	Off	Impairment Type	Off



BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

HIB Settings

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

### 5.3 Frequency Response 2N DF

TIA-5050 (2018-01) \ Measurements \ Wideband

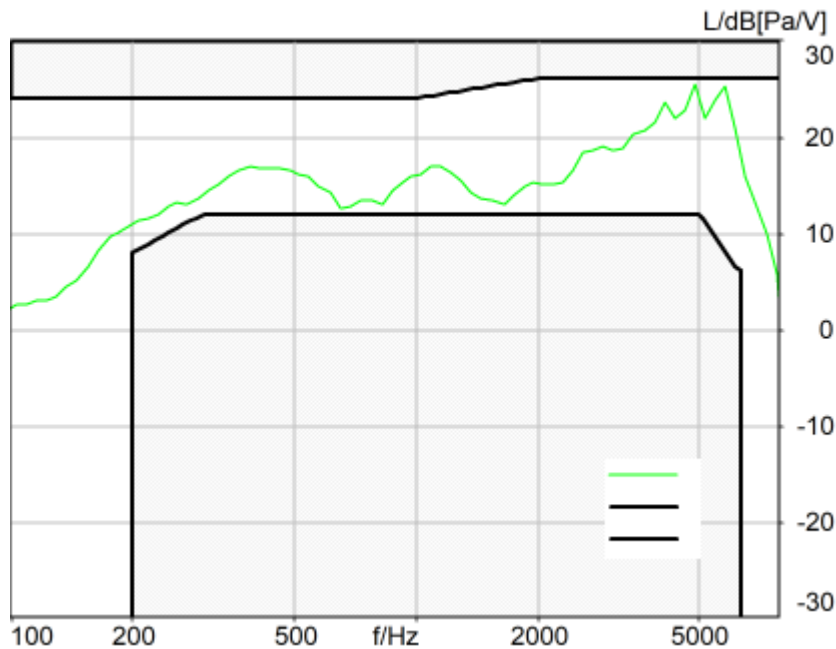

Absolute minimal distance  
0.57 dB at 4870.0 Hz Ok

**Ok**

2024/3/6 19:20 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_wb\_r20\_v01.dat**

Level adj. Ch1 -90.0 dB  
WIDEBAND IEEE-269-2010 Real Speech Signal at Channel 2  
Pause 0.5 s +  
Real Speech (english, male speaker) 11.5 s, Active Speech Level: -22,2 dBV, margin 15.9 dB +  
Pause till end of file  
Signal level (ch2): -22,2 dBV Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the end of the file.

filtered with 8.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	500.00 ms	Range length	11500.00 ms
Use FIR Filter	Ch2	FIR filter	drp2df_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	12th octave	DIN Row	Row A
Method	FFT		
FFT size	4096	Overlap	75 %
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hawb.fft		
Tol. scheme file	521_rcv_frq_man_hawb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	8000.0 Hz

**Special Features**

Compensate delay 152.9000 ms (D\_RCV\_WB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off

