



BUREAU VERITAS

Test Report No.: PSU-NQN2402040109RF06



Certificate #6613.01

VARIANT FCC TEST REPORT (Part 15, Subpart C)



Applicant:	HMD Global Oy
Address:	Bertel Jungin aukio 9 Espoo 02600 Finland

Manufacturer or Supplier:	HMD Global Oy
Address:	Bertel Jungin aukio 9 Espoo 02600 Finland
Product:	Smartphone
Brand Name:	HMD
Model Name:	TA-1590
FCC ID:	2AJOTTA-1590
Date of tests:	Jan. 02, 2024 ~ Feb. 19, 2024

The tests have been carried out according to the requirements of the following standard:

- FCC Part 15, Subpart C, Section 15.247**
- ANSI C63.10-2013**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
 Date: Feb. 19, 2024	 Date: Feb. 19, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	6
1 SUMMARY OF TEST RESULTS	7
1.1 MEASUREMENT UNCERTAINTY	8
2 GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 DESCRIPTION OF TEST MODES	12
2.2.1 CONFIGURATION OF SYSTEM UNDER TEST	13
2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	13
2.3 DUTY CYCLE OF TEST SIGNAL	16
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	17
2.5 DESCRIPTION OF SUPPORT UNITS	17
3 TEST TYPES AND RESULTS	18
3.1 CONDUCTED EMISSION MEASUREMENT	18
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	18
3.1.2 TEST INSTRUMENTS	18
3.1.3 TEST PROCEDURES	19
3.1.4 DEVIATION FROM TEST STANDARD	19
3.1.5 TEST SETUP	20
3.1.6 EUT OPERATING CONDITIONS	20
3.1.7 TEST RESULTS	21
3.2 RADIATED EMISSION MEASUREMENT	23
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	23
3.2.2 TEST INSTRUMENTS	24
3.2.3 TEST PROCEDURES	25
3.2.4 DEVIATION FROM TEST STANDARD	25
3.2.5 TEST SETUP	26
3.2.6 EUT OPERATING CONDITIONS	27
3.2.7 TEST RESULTS	28
3.3 6 DB BANDWIDTH MEASUREMENT	82
3.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	82
3.3.2 TEST INSTRUMENTS	82
3.3.3 TEST PROCEDURE	83
3.3.4 DEVIATION FROM TEST STANDARD	83



3.3.5	TEST SETUP	83
3.3.6	EUT OPERATING CONDITIONS	83
3.3.7	TEST RESULTS	84
3.4	CONDUCTED OUTPUT POWER	85
3.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	85
3.4.2	TEST SETUP	85
3.4.3	TEST INSTRUMENTS	85
3.4.4	TEST PROCEDURES	85
3.4.5	DEVIATION FROM TEST STANDARD	85
3.4.6	EUT OPERATING CONDITIONS	85
3.4.7	TEST RESULTS	86
3.4.7.1	MAXIMUM PEAK OUTPUT POWER	86
3.4.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE)	87
3.5	POWER SPECTRAL DENSITY MEASUREMENT	88
3.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	88
3.5.2	TEST SETUP	88
3.5.3	TEST INSTRUMENTS	88
3.5.4	TEST PROCEDURE	88
3.5.5	DEVIATION FROM TEST STANDARD	88
3.5.6	EUT OPERATING CONDITION	88
3.5.7	TEST RESULTS	89
3.6	OUT OF BAND EMISSION MEASUREMENT	90
3.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	90
3.6.2	TEST SETUP	90
3.6.3	TEST INSTRUMENTS	90
3.6.4	TEST PROCEDURE	90
3.6.5	DEVIATION FROM TEST STANDARD	91
3.6.6	EUT OPERATING CONDITION	91
3.6.7	TEST RESULTS	91
3.7	ANTENNA REQUIREMENTS	92
3.7.1	STANDARD APPLICABLE	92
3.7.2	ANTENNA CONNECTED CONSTRUCTION	92
3.7.3	ANTENNA GAIN	92
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	93
5	MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB94	
6	APPENDIX 1	95



WLAN 2.4G	95
DTS BANDWIDTH	95
TEST RESULT	95
TEST GRAPHS	96
MAXIMUM CONDUCTED OUTPUT POWER	102
TEST RESULT PEAK	102
TEST RESULT AVERAGE	102
MAXIMUM POWER SPECTRAL DENSITY	104
TEST RESULT	104
TEST GRAPHS	105
BAND EDGE MEASUREMENTS	111
TEST RESULT	111
TEST GRAPHS	112
CONDUCTED SPURIOUS EMISSION	116
TEST RESULT	116
TEST GRAPHS	117
DUTY CYCLE	123
TEST RESULT	123
TEST GRAPHS	124
7 APPENDIX 2 BLE	126
DTS BANDWIDTH	126
TEST RESULT	126
TEST GRAPHS	127
OCCUPIED CHANNEL BANDWIDTH	129
TEST RESULT	129
TEST GRAPHS	130
MAXIMUM CONDUCTED OUTPUT POWER	131
TEST RESULT PEAK	131
TEST RESULT AVERAGE	131
MAXIMUM POWER SPECTRAL DENSITY	132
TEST RESULT	132
TEST GRAPHS	133
BAND EDGE MEASUREMENTS	135
TEST RESULT	135
TEST GRAPHS	136
CONDUCTED SPURIOUS EMISSION	137



BUREAU
VERITAS

Test Report No.: PSU-NQN2402040109RF06

TEST RESULT	137
TEST GRAPHS	138
DUTY CYCLE	140
TEST RESULT	140
TEST GRAPHS	141



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
PSU-NQN2311090109RF06	Original release	Jan. 30, 2024
PSU-NQN2402040109RF06	For FCC ID 2AJOTTA-1590 that it is involved in two product models N159V and TA-1590, the difference of N159V and TA-1590 is only model name, memory and software customization applications. For HW, the TA-1590 product has only 6+128 memory, the memory of the N159V product is 3+64, hardware is the same except the memory, and there is no change of the hardware version number. For SW, on the basis of N159V, some customized applications of TA-1590 on the software are removed, and the software version number is changed. So this report data is copied from the report PSU-NQN2311090109RF06(model:N159V, FCC ID: 2AJOTTA-1590).	Feb. 19, 2024



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	TEST LAB
15.207	AC Power Conducted Emission	Compliance	A
15.205 15.209	Radiated Emissions	Compliance	A
15.247(d)	Out of band Emission Measurement	Compliance	A
15.247(a)(2)	6dB bandwidth	Compliance	A
15.247(b)	Conducted Output power	Compliance	A
15.247(e)	Power Spectral Density	Compliance	A
15.203	Antenna Requirement	Compliance	A

Note :

1. Except RSE, other data please refer to Appendix 1 (for WIFI-2.4G) and Appendix 2 (for BLE).
2. For FCC ID 2AJOTTA-1590 that it is involved in two product models N159V and TA-1590, the difference of N159V and TA-1590 is only model name, memory and software customization applications. For HW, the TA-1590 product has only 6+128 memory, the memory of the N159V product is 3+64, hardware is the same except the memory, and there is no change of the hardware version number. For SW, on the basis of N159V, some customized applications of TA-1590 on the software are removed, and the software version number is changed. So this report data is copied from the report PSU-NQN2311090109RF06(model:N159V, FCC ID: 2AJOTTA-1590).

***Test Lab Information Reference**

Lab A:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zhuyi Road, High-tech District, Suzhou City, Anhui Province

Accredited Test Lab Cert 6613.01

The FCC Site Registration No. is 434559; The Designation No. is CN1325.



1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	±2.70dB
Radiated emissions (9KHz~30MHz)	±2.68dB
Radiated emissions (30MHz~1GHz)	±4.98dB
Radiated emissions (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Power Spectral Density	±0.85 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT*	Smartphone
BRAND NAME*	HMD
MODEL NAME*	TA-1590
NOMINAL VOLTAGE*	5.0Vdc (adapter) 3.87Vdc (battery)
MODULATION *	DSSS, OFDM, GFSK
TRANSMISSION RATE	802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n20: up to 144.4 Mbps 802.11n40: up to 300 Mbps BT_LE: 1 Mbps
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20/40) 2402-2480MHz for BT-LE(GFSK)
MAX. OUTPUT POWER	WLAN: 215.28 mW (Maximum) BT-LE: 7.36 mW (Maximum)
ANTENNA TYPE*	PIFA Antenna with -0.08dBi gain for BT/WIFI
HW VERSION*	V 1.0
SW VERSION*	00US_0_100
I/O PORTS*	Refer to user's manual
CABLE SUPPLIED*	N/A



BUREAU VERITAS Test Report No.: PSU-NQN2402040109RF06

NOTE:

- *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information , Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT incorporates a MIMO function. Physically, the EUT provides one transmitter and one receiver.

MODULATION MODE	TX/RX FUNCTION
802.11b	1TX /1RX
802.11g	1TX /1RX
802.11n (20MHz)	1TX /1RX
802.11n (40MHz)	1TX /1RX
BT_LE(1MHz)	1TX /1RX

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
- For the product of TA-1590(FCC ID 2AJOTTA-1590), the following components are different between the first and second supply, other parameters are the same.

component		First supply		Second supply	
		Supplier	Spec	Supplier	Spec
PCBA	Charger IC	SGMICRO	3.78A Single Cell Switching Battery Charger IC	Unisemi	3.78A Single Cell Switching Battery Charger IC
LCM	LCD	TCL	LCD a-Si TFT;720*1612	cetron	LCD a-Si TFT;720*1612
Front camera	Camera	Union Image	5M;FF	Imaging	5M;FF
CAM	Camera	Union Image	13 AF	Sunwin	13 AF
	Camera	SEGA	2M	Imaging	2M
Acoustic	Vibrator	KunWang	0830	HONGZHIFA	0830
	FPC	XINYE	Speaker FPC: 32.1*11.46*0.15	Lat	Speaker FPC: 32.1*11.46*0.15
LED		Runlite	White LED;500mA;1500mA	latticepower	White LED;500mA;1500mA
Battery		gaoyuan	4000mAh;3.87V;4.45V	highpower	4000mAh;3.87V;4.45V
antenna		Haitong	Omni-directional,Linear,antenna shrapnel	Kexinhuache ng	Omni-directional,Linear,antenna shrapnel
MIC		Gettop	L2.75xW1.85xH0.9 mm	goertek	L2.75xW1.85xH0.9 mm
Data cable		Saibao	5V2A	TorchWay	5V2A



List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
Battery 1	Gaoyuan	N/A	CH426385	Power Rating: 15.48Wh
Battery 2	Highpower	N/A	CH426385	Power Rating: 15.48Wh
AC Adapter	BaiJunDa	BaiJunDa	HAD-010U	I/P: 100-240Vac, O/P: 4.8~5.4Vdc, 2.0A
USB Cable 1	Saibao	N/A	SZN-A036A	Signal Line, 1.0meter 5V 2A
USB Cable 2	TorchWay	N/A	JWUB1651-ZN01 H	Signal Line, 1.0meter 5V 2A



2.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422 MHz	7	2442 MHz
4	2427 MHz	8	2447 MHz
5	2432 MHz	9	2452 MHz
6	2437 MHz		

40 channels are provided for BT-LE (GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	6	OFDM	MCS0
BT-LE	0 to 39	19	GFSK	1.0



RADIATED EMISSION TEST (ABOVE 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
802.11n HT40	3 to 9	3,6,9	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	1.0

POWER LINE CONDUCTED EMISSION TEST

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11n 40	3 to 9	3	OFDM	MCS0



BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
802.11n HT40	3 to 9	3,6,9	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	1.0

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
802.11n HT40	3 to 9	3,6,9	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	1.0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	23deg. C, 70%RH	DC 5V By Adapter	Hanwen Xu
RE≥1G	23deg. C, 70%RH	DC 5V By Adapter	Hanwen Xu
PLC	25deg. C, 52%RH	DC 5V By Adapter	Hanwen Xu
APCM	25deg. C, 60%RH	DC 3.85V By Battery	Hanwen Xu



2.3 DUTY CYCLE OF TEST SIGNAL

Please Refer to Appendix1/2 Of this test report.

WORST-CASE DATA:

Measured Duty Cycle		
Mode		Duty Cycle [%]
		ANT1/2
WIFI 2.4GHz	11B	97.36
	11G	98.28
	11N20	98.15
	11N40	94.76
BT LE	BT4.0	86.97

Note:

Duty cycle of test signal is < 98%, duty factor shall be considered.



2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10-2013

Note :

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Laptop	Lenovo	ThinkPad E14	HRSW00024	N/A
2	Adapter	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A



3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	102749	Feb.25,22	Feb.24,24
ELEKTRA test software	Rohde&Schwarz	ELEKTRA	NA	N/A	N/A
LISN network	Rohde&Schwarz	ENV216	102640	Feb.17,22	Feb.16,24
LISN network	Rohde&Schwarz	ENV216	102640	Feb.16,24	Feb.15,26
CABLE	Rohde&Schwarz	W61.01	N/A	Apr.28,23	Apr.27,24
CABLE	Rohde&Schwarz	W601	N/A	Apr.28,23	Apr.27,24

- NOTE:**
1. The test was performed in CE shielded room.
 2. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



3.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation.



3.1.5 TEST SETUP

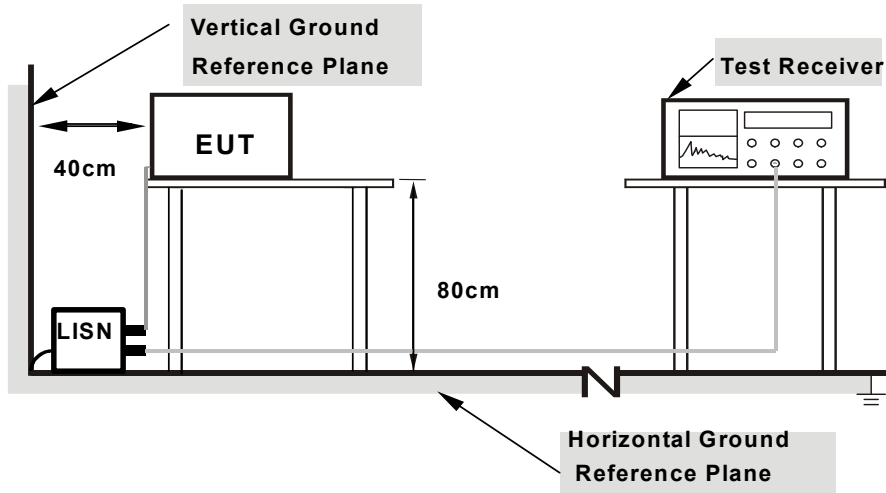

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.




3.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA:

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Hanwen Xu		

Rg	Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	CAV Level [dBμV]	CAV: AVG Limit [dBμV]	CAV Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]
1	0.168	52.90	65.06	12.15	35.30	55.06	19.76	12.36	L1	9.000
1	0.533	38.16	56.00	17.84	21.55	46.00	24.45	11.75	L1	9.000
1	1.284	35.31	56.00	20.69	24.87	46.00	21.13	11.75	L1	9.000
1	3.966	28.33	56.00	27.67	20.35	46.00	25.65	11.78	L1	9.000
1	11.670	33.11	60.00	26.89	22.83	50.00	27.17	11.83	L1	9.000
1	18.461	32.42	60.00	27.58	21.81	50.00	28.19	11.86	L1	9.000

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Limit value -Emission level
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

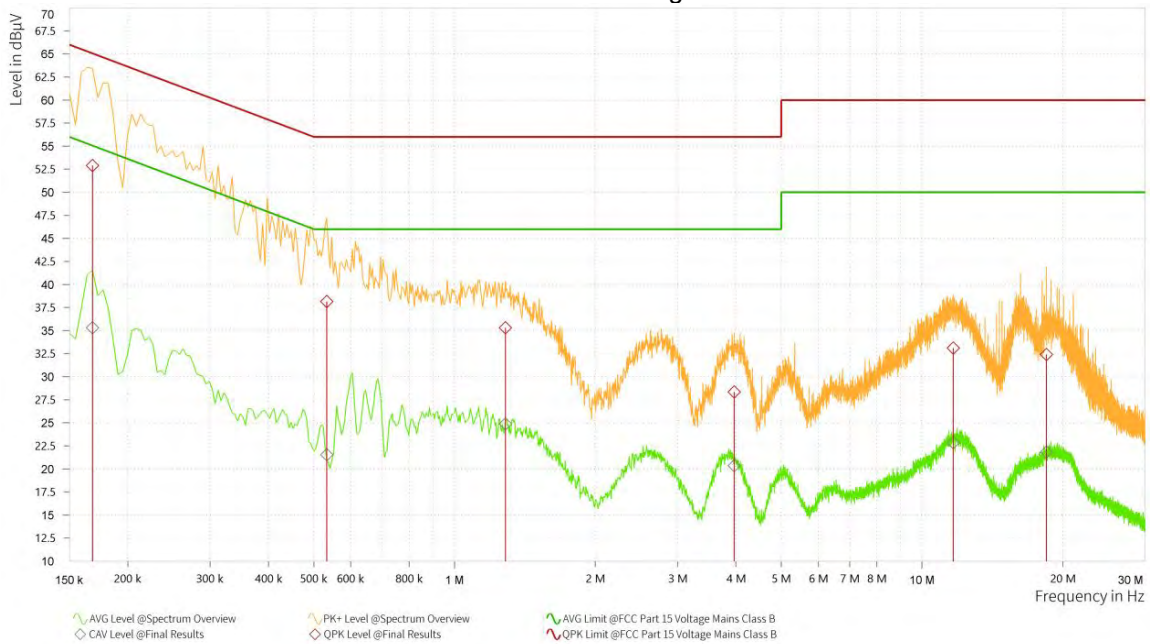




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Hanwen Xu		

Rg	Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	CAV Level [dBμV]	CAV: AVG Limit [dBμV]	CAV Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]
1	0.177	46.76	64.63	17.87	28.22	54.63	26.41	12.22	N	9.000
1	0.537	38.55	56.00	17.45	21.27	46.00	24.74	12.77	N	9.000
1	4.790	15.73	56.00	40.27	6.34	46.00	39.66	12.76	N	9.000
1	14.442	33.93	60.00	26.07	19.71	50.00	30.29	12.82	N	9.000
1	17.889	37.31	60.00	22.69	21.27	50.00	28.73	12.84	N	9.000
1	22.538	31.99	60.00	28.01	14.42	50.00	35.58	12.86	N	9.000

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Limit value -Emission level
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

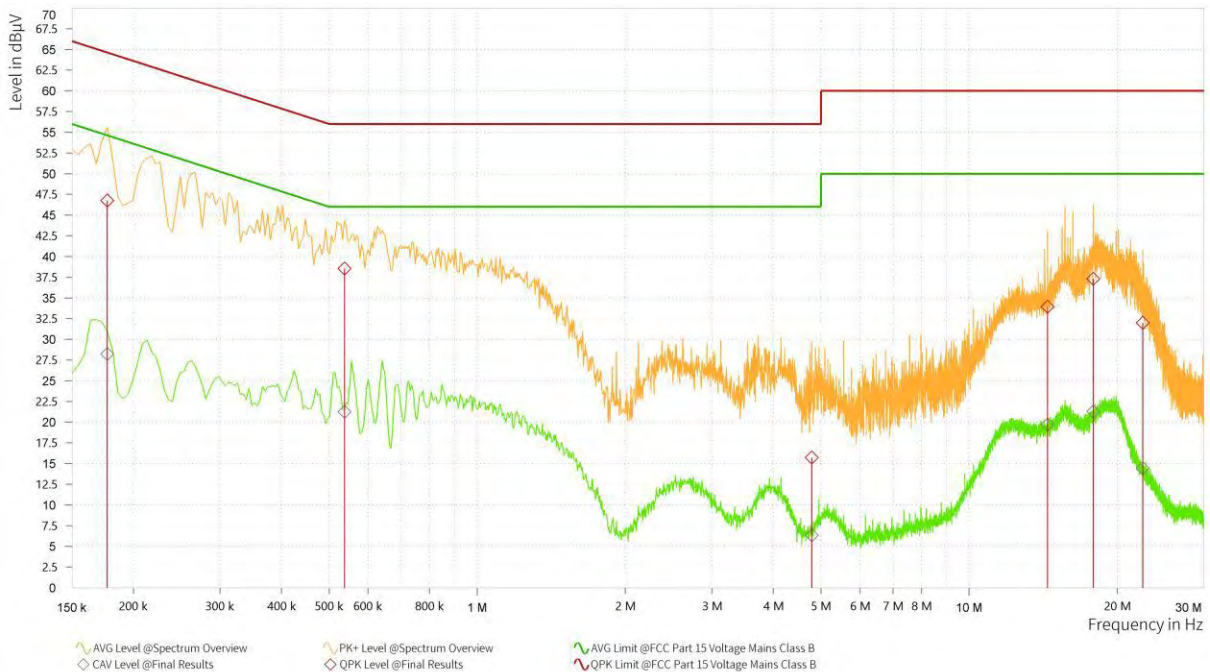



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,22	Aug.29,24
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Signal Generator	R&S	SMB100A	182185	Feb.16,22	Feb.15,24
Signal Generator	R&S	SMB100A	182185	Feb.15,24	Feb.14,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESW44	101973	Feb.25,22	Feb.24,24
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.28,22	Feb.27,24
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,22	Aug.21,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.23,22	Feb.22,24
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.22,22	Aug.21,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,22	Feb.22,24
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.27,22	Jun.26,24
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	N/A	N/A
DC Source	HYELEC	HY3010B	551016	Aug.31,22	Aug.30,24
Hygrothermograph	DELI	20210528	SZ014	Sep.06,22	Sep.05,24
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.28,23	Apr.27,24
CABLE	R&S	W12.14	N/A	Apr.28,23	Apr.27,24

NOTE:

1. The calibration interval of the above test instruments is 12 months or 24 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Chamber.
3. The FCC Site Registration No. is 434559; The Designation No. is CN1325.



3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.


3.2.4 DEVIATION FROM TEST STANDARD

No deviation




3.2.5 TEST SETUP

<Frequency Range 9KHz~30MHz >

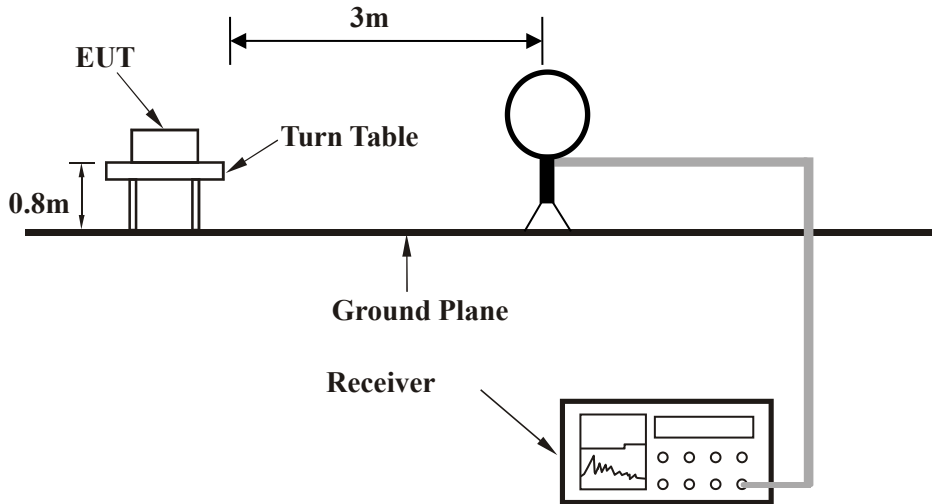


< Frequency Range 30MHz~1GHz >

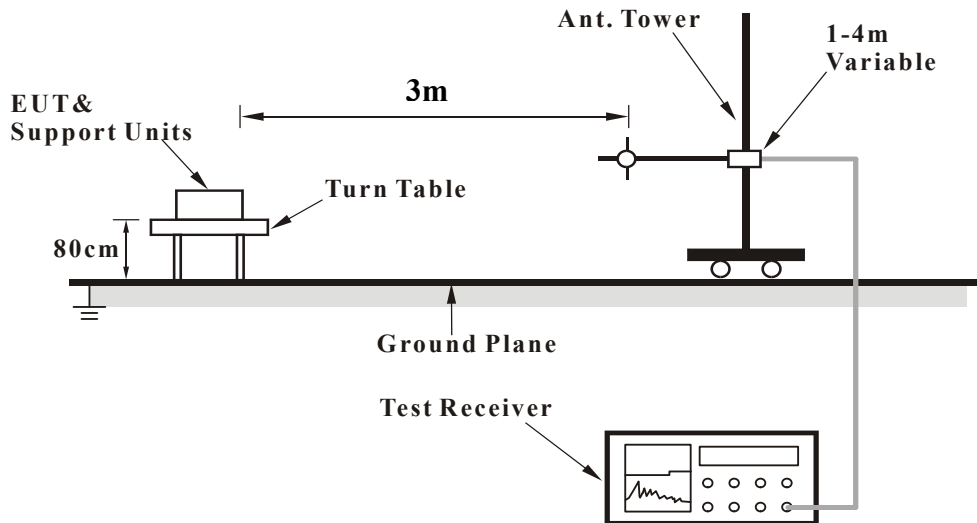



<Frequency Range above 1GHz>

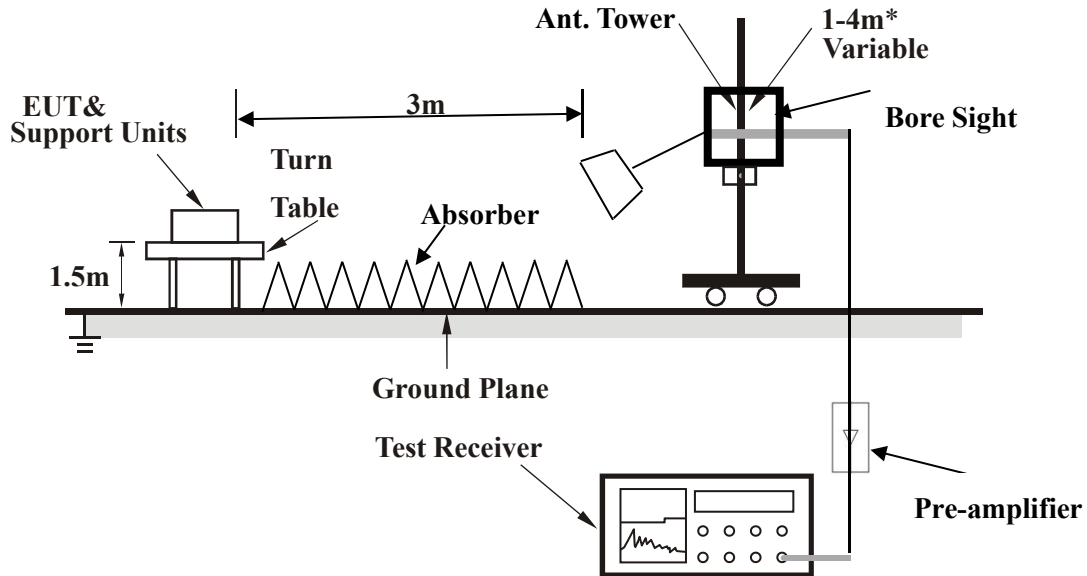

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

- a. Set the EUT under full load condition and placed them on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.



3.2.7 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:

802.11b:


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	49.206	25.25	40.00	14.75	-9.47	H	70.2	2.00	120.000
1	102.023	20.47	43.50	23.03	-11.76	H	355	2.00	120.000
1	174.627	27.62	43.50	15.88	-13.76	H	70.2	2.00	120.000
1	296.120	20.99	46.00	25.01	-6.80	H	4.2	1.00	120.000
1	445.500	21.77	46.00	24.23	-2.33	H	218.5	2.00	120.000
1	708.709	24.04	46.00	21.96	-1.26	H	359.1	1.00	120.000

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.

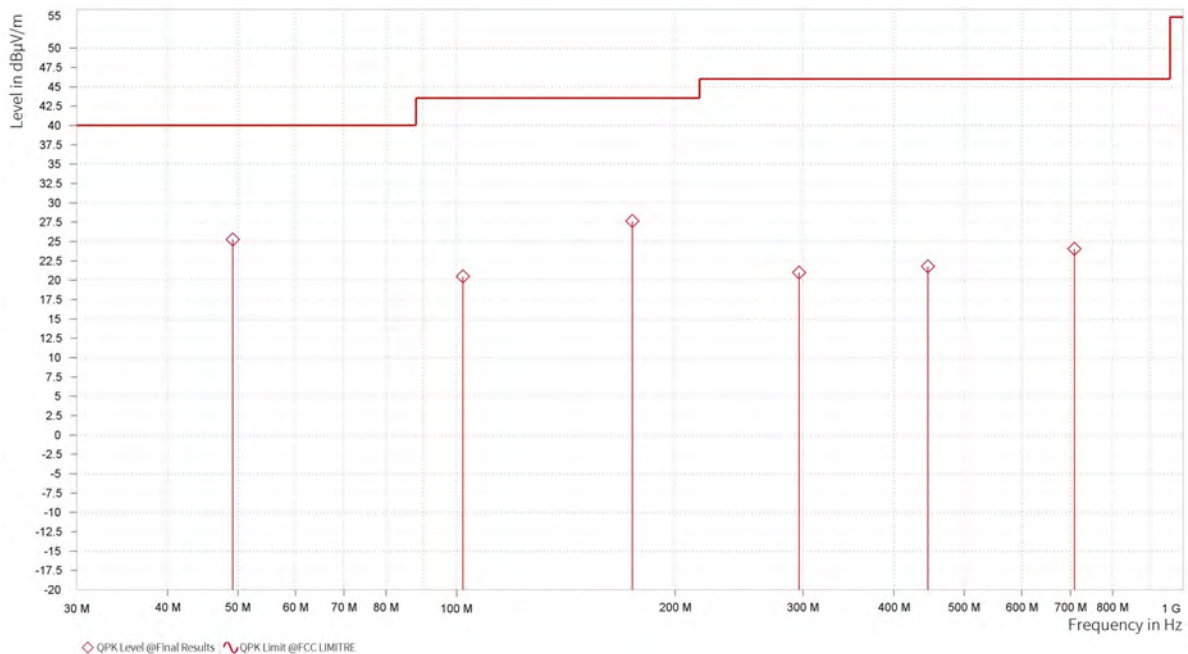



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	44.599	25.58	40.00	14.42	-10.87	V	359	1.00	120.000
1	102.459	20.41	43.50	23.09	-11.79	V	72.6	2.00	120.000
1	180.981	20.59	43.50	22.91	-12.83	V	359	2.00	120.000
1	282.540	17.64	46.00	28.36	-7.63	V	218.4	2.00	120.000
1	450.883	21.95	46.00	24.05	-2.58	V	5	1.00	120.000
1	565.440	24.37	46.00	21.63	-3.53	V	359	1.00	120.000

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.

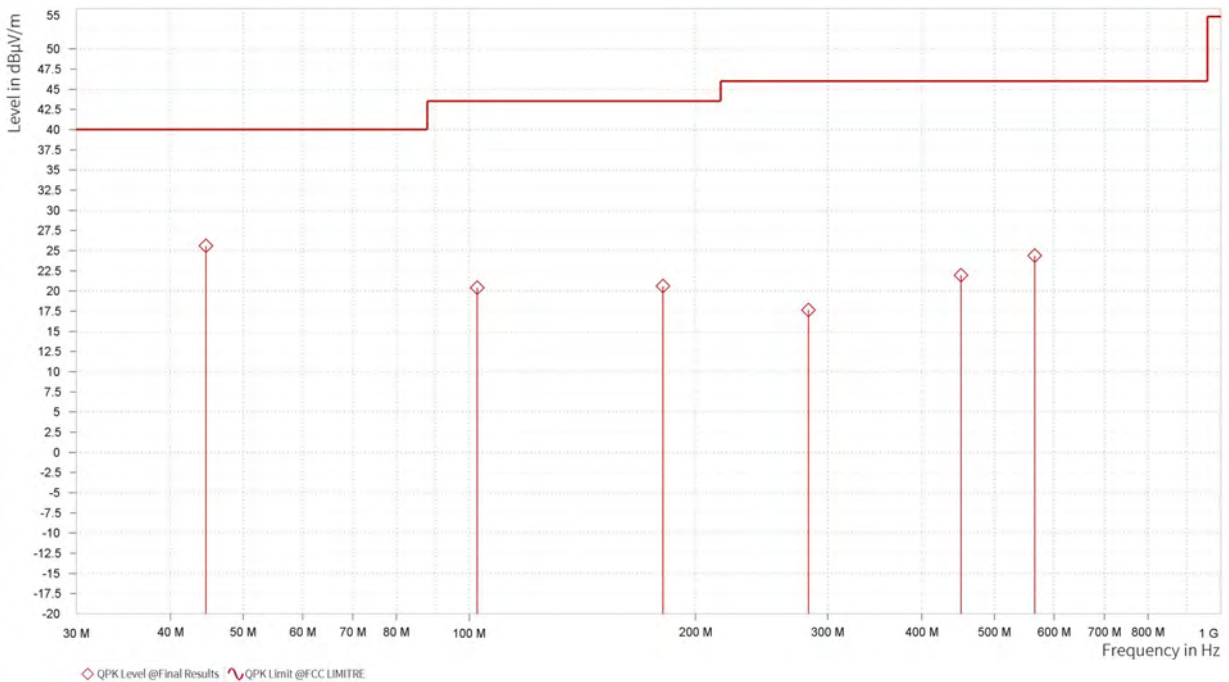



ABOVE 1GHz WORST-CASE DATA:

Note: 1. For radiated emissions testing · the full testing range of different modes have been scanned · only the worst case harmonic data is reported in the sheet.


2. All other emissions were greater than 20dB below the limit was not recorded

802.11b:

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,386.500	51.52	74.00	22.48	7.08	H	222.1	2.00
1	2,390.000	51.56	74.00	22.44	7.08	H	1	2.00
1	2,413.500	103.64			7.19	H	1	2.00

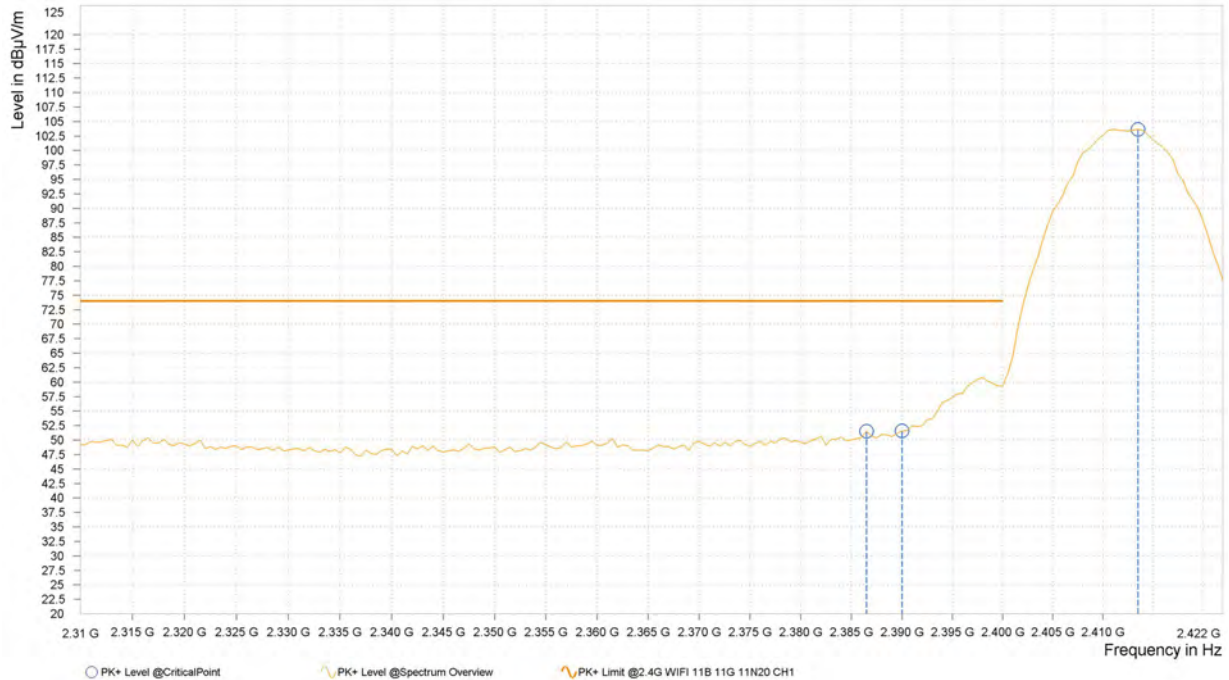



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,387.000	36.86	54.00	17.14	7.08	H	359	2.00
1	2,390.000	37.33	54.00	16.67	7.08	H	355	2.00
1	2,413.000	98.97			7.19	H	0.9	2.00






**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,357.500	49.46	74.00	24.54	7.10	V	5	1.00
1	2,390.000	48.41	74.00	25.59	7.08	V	1	2.00
1	2,413.500	102.95			7.19	V	265.9	1.00

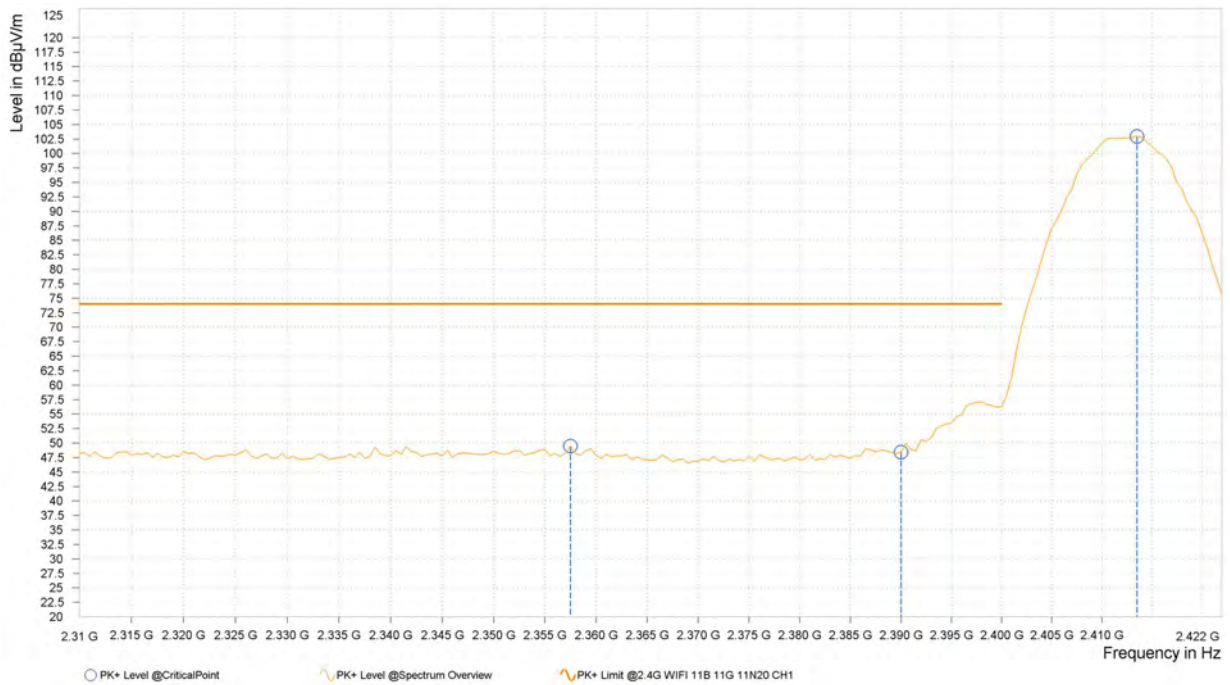



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,387.000	34.74	54.00	19.26	7.08	V	355	2.00
1	2,390.000	35.12	54.00	18.88	7.08	V	0.9	2.00
1	2,413.000	97.15			7.19	V	0.9	2.00

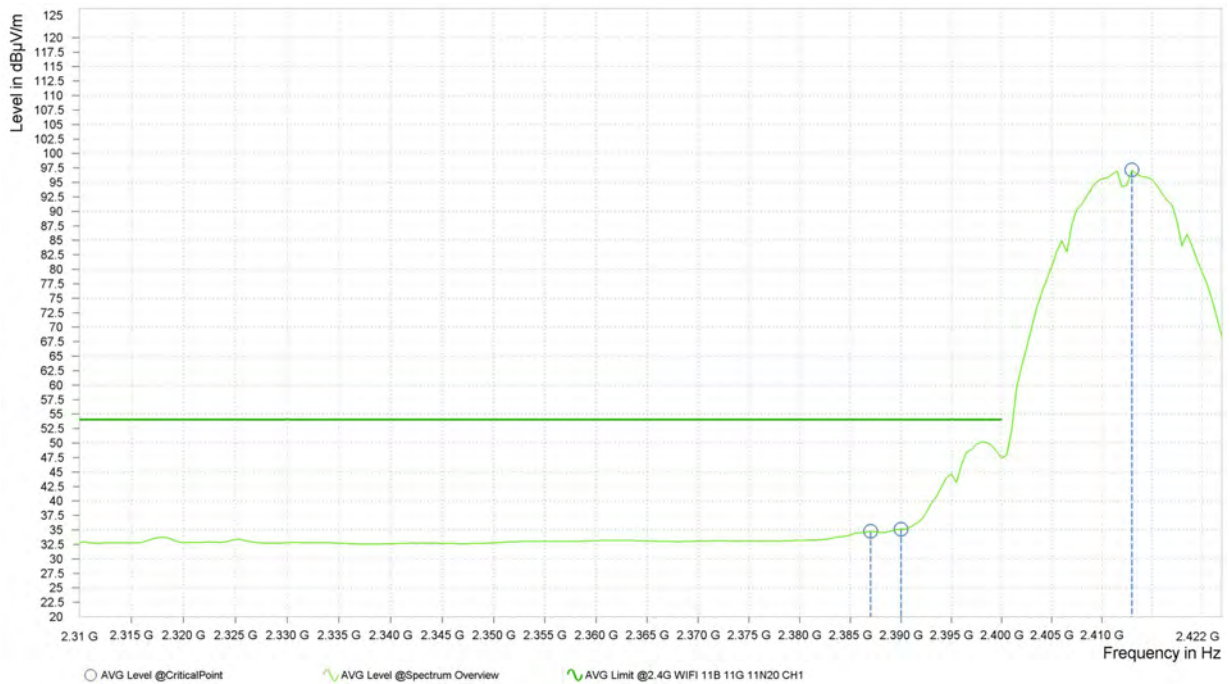

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
2. 2412MHz: Fundamental frequency.




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	50.91	74.00	23.09	39.72	54.00	14.28	15.25	H	90.1	2.00
2	7,311.000	57.34	74.00	16.66	45.83	54.00	8.17	21.10	H	359.1	2.00

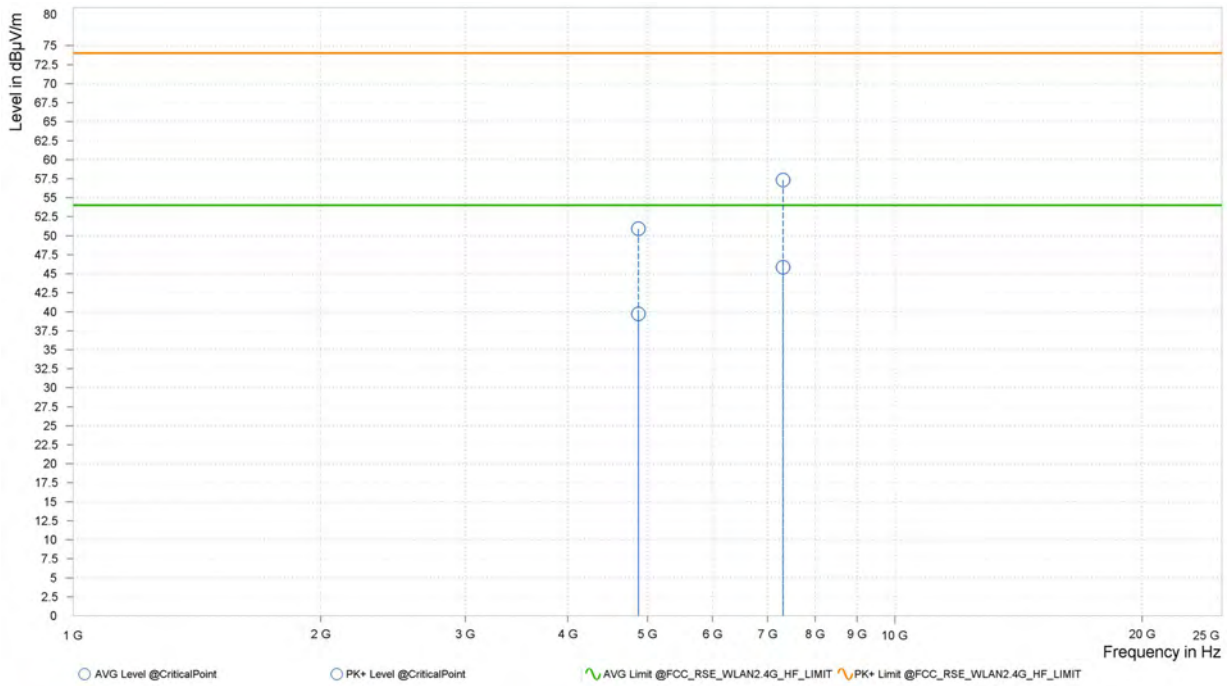



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	49.94	74.00	24.06	39.72	54.00	14.28	15.25	V	88.9	2.00
2	7,311.000	56.64	74.00	17.36	45.96	54.00	8.04	21.10	V	359	2.00

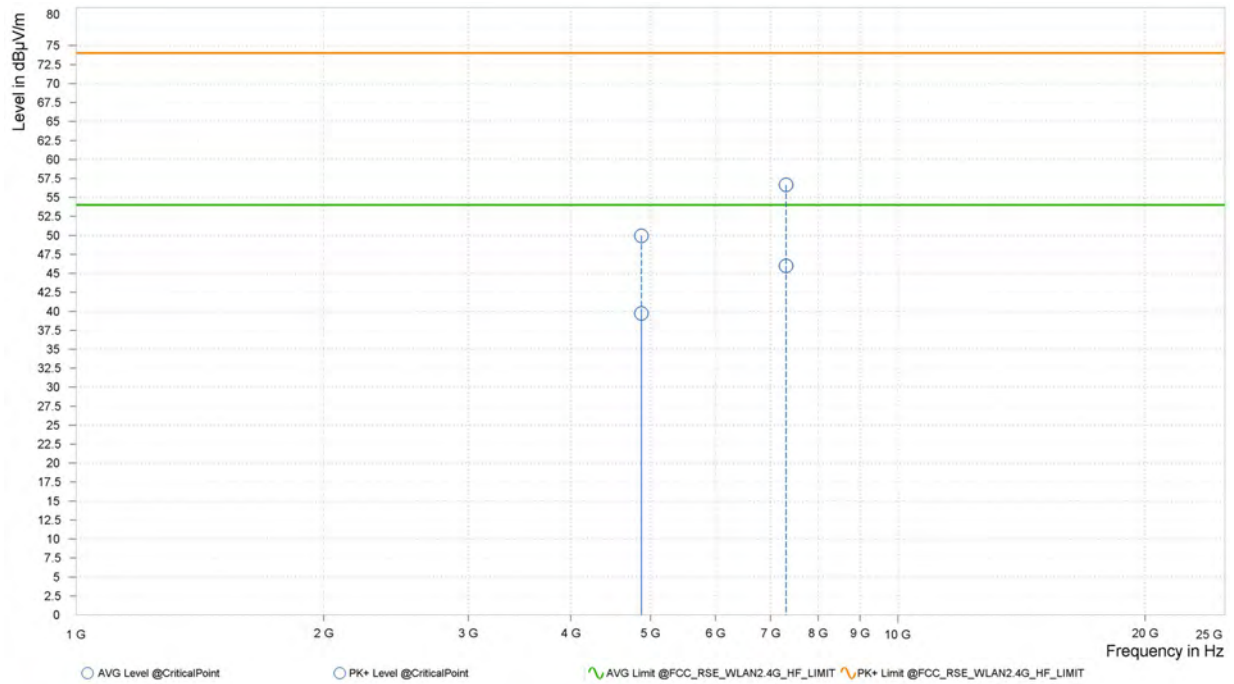

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
2. 2437MHz: Fundamental frequency.




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,460.500	104.79			7.40	H	77.4	2.00
2	2,483.500	54.28	74.00	19.72	7.36	H	4.3	1.00
2	2,493.500	55.88	74.00	18.12	7.37	H	4.3	1.00

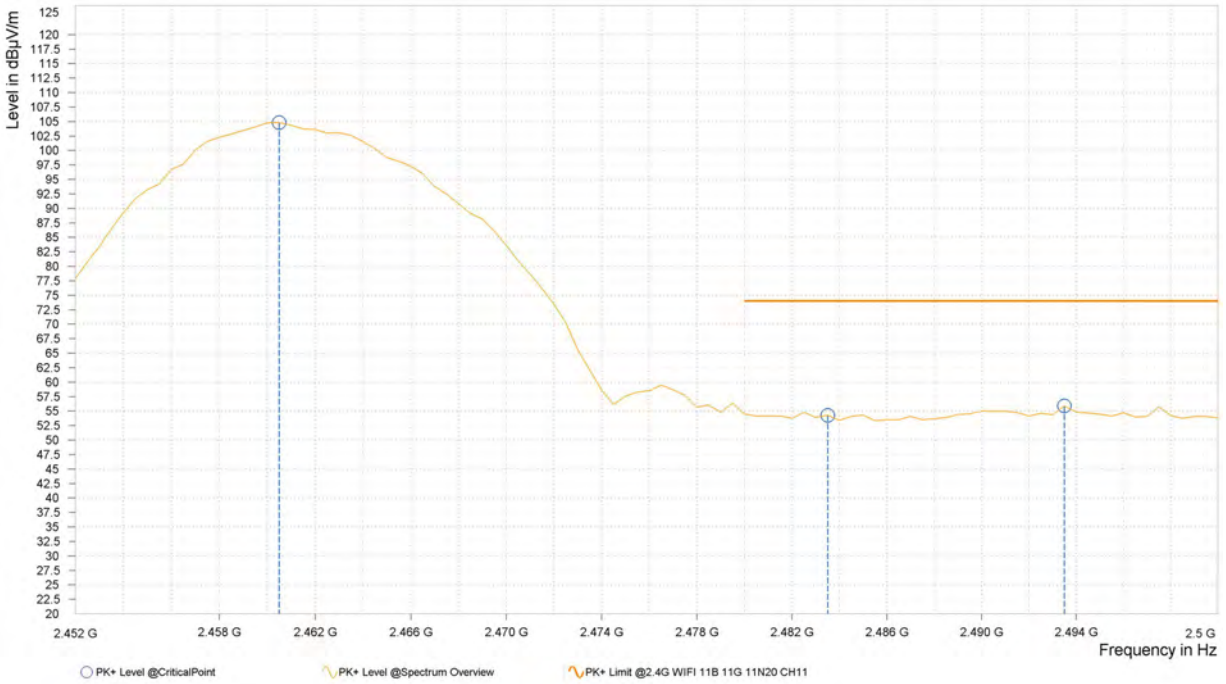




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,461.000	95.70			7.40	H	0.9	2.00
2	2,483.500	38.26	54.00	15.74	7.36	H	355	2.00
2	2,484.000	38.04	54.00	15.96	7.36	H	355	2.00

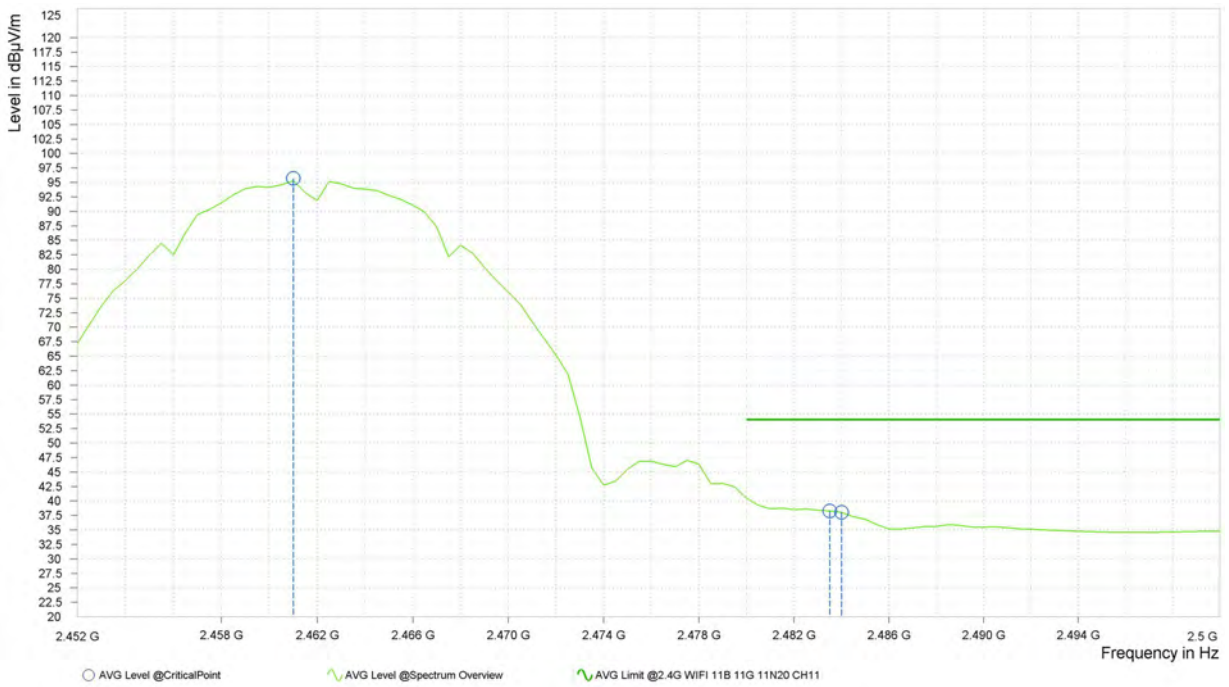




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,460.500	102.91			7.40	V	12.1	2.00
2	2,483.500	52.14	74.00	21.86	7.36	V	47.1	1.00
2	2,484.500	50.57	74.00	23.43	7.36	V	47.1	1.00

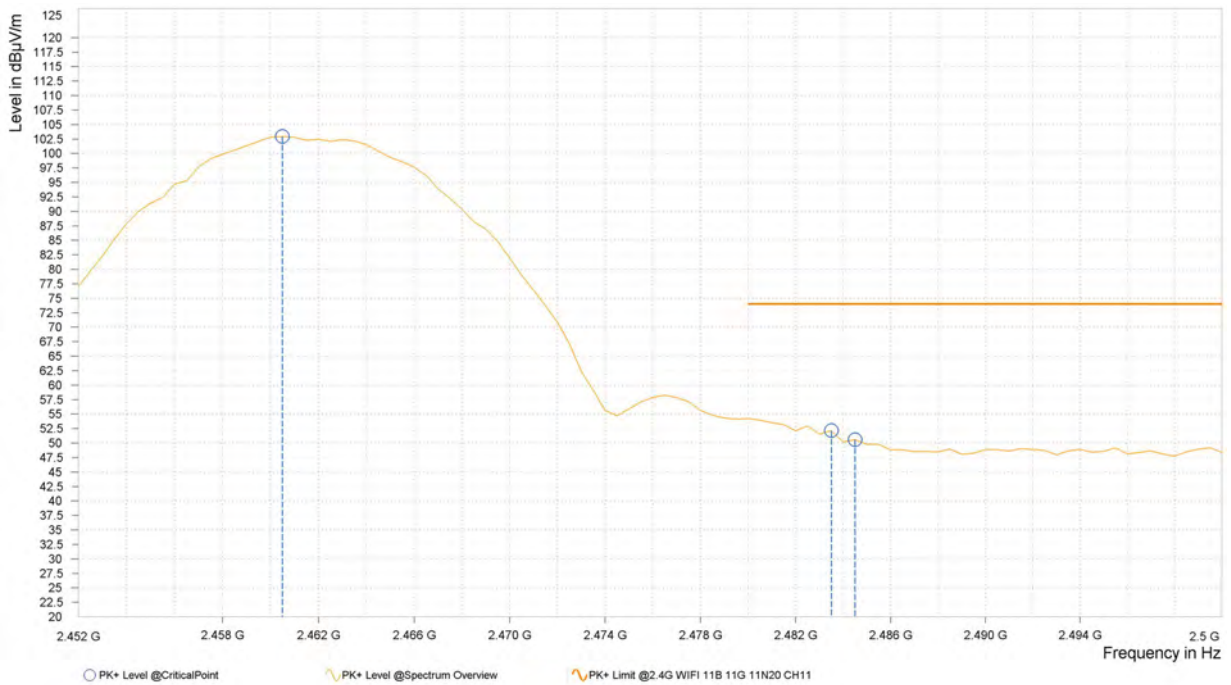



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,461.000	97.44			7.40	V	1	2.00
2	2,483.500	35.66	54.00	18.34	7.36	V	355.6	2.00
2	2,488.000	35.51	54.00	18.49	7.36	V	355.6	2.00

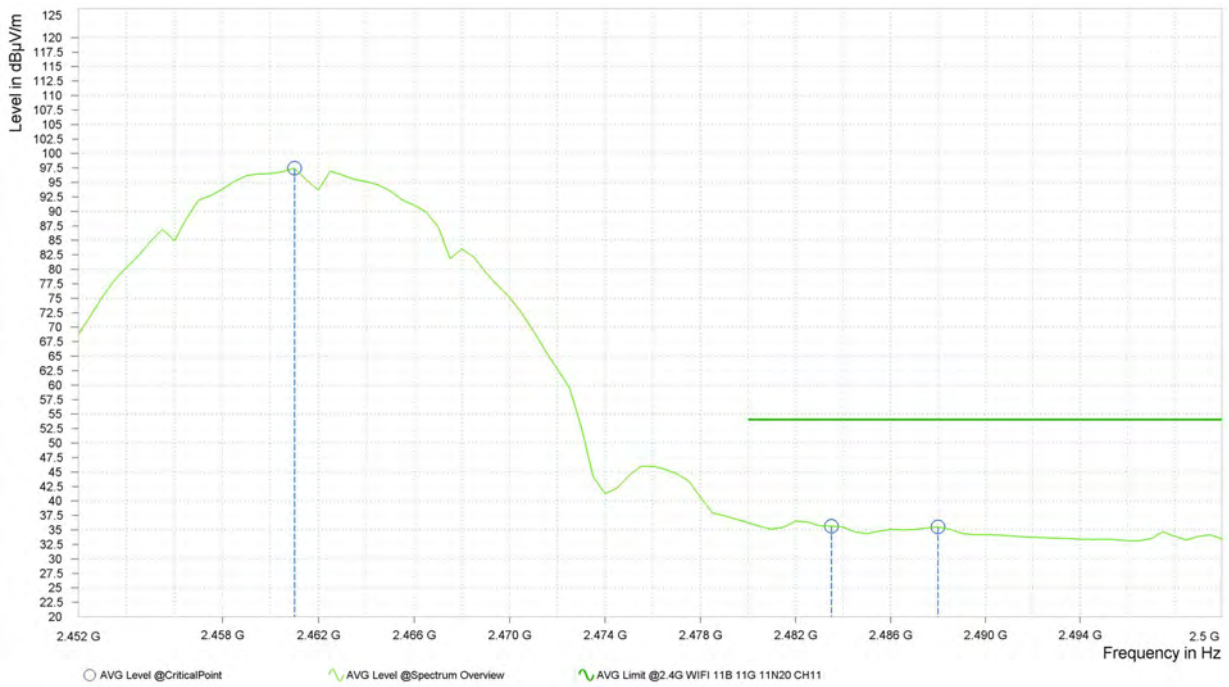

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
2. 2462MHz: Fundamental frequency.



**BUREAU
VERITAS**


Test Report No.: PSU-NQN2402040109RF06

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	60.04	74.00	13.96	7.08	H	76.2	2.00
1	2,390.000	59.45	74.00	14.55	7.08	H	76.2	2.00
1	2,410.500	107.27			7.16	H	359	2.00

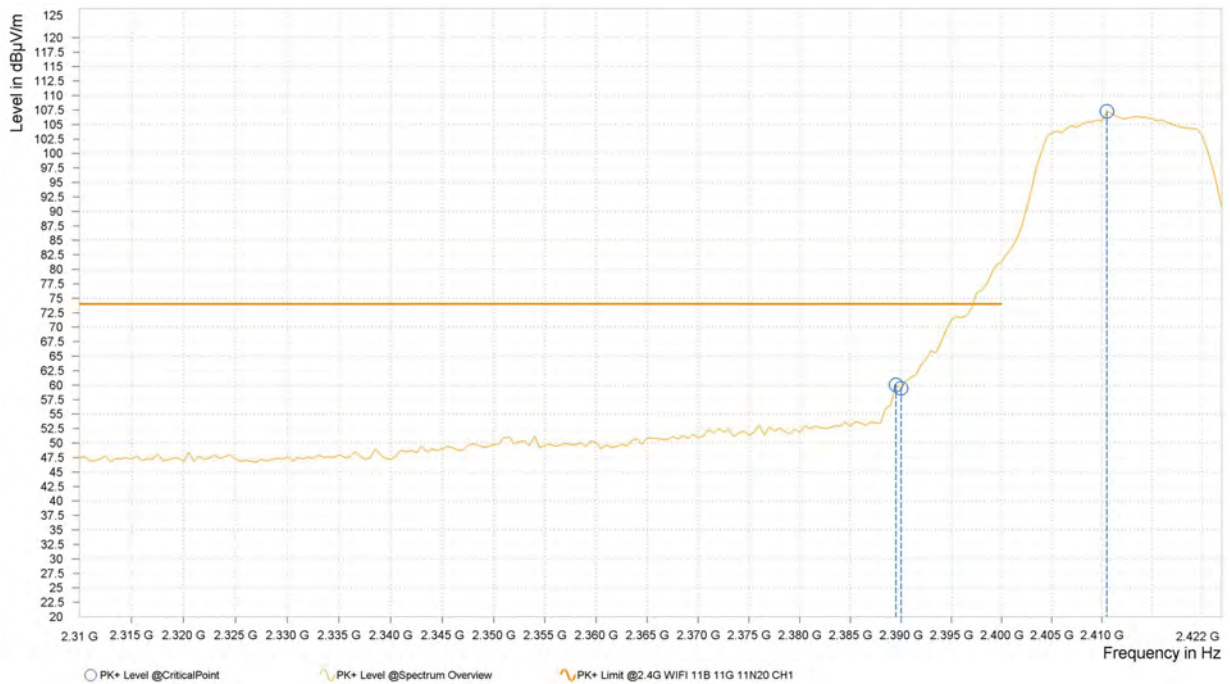




BUREAU VERITAS

Test Report No.: PSU-NQN2402040109RF06


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	39.72	54.00	14.28	7.08	H	359	2.00
1	2,390.000	40.38	54.00	13.62	7.08	H	1	1.00
1	2,411.000	94.15			7.17	H	359	2.00

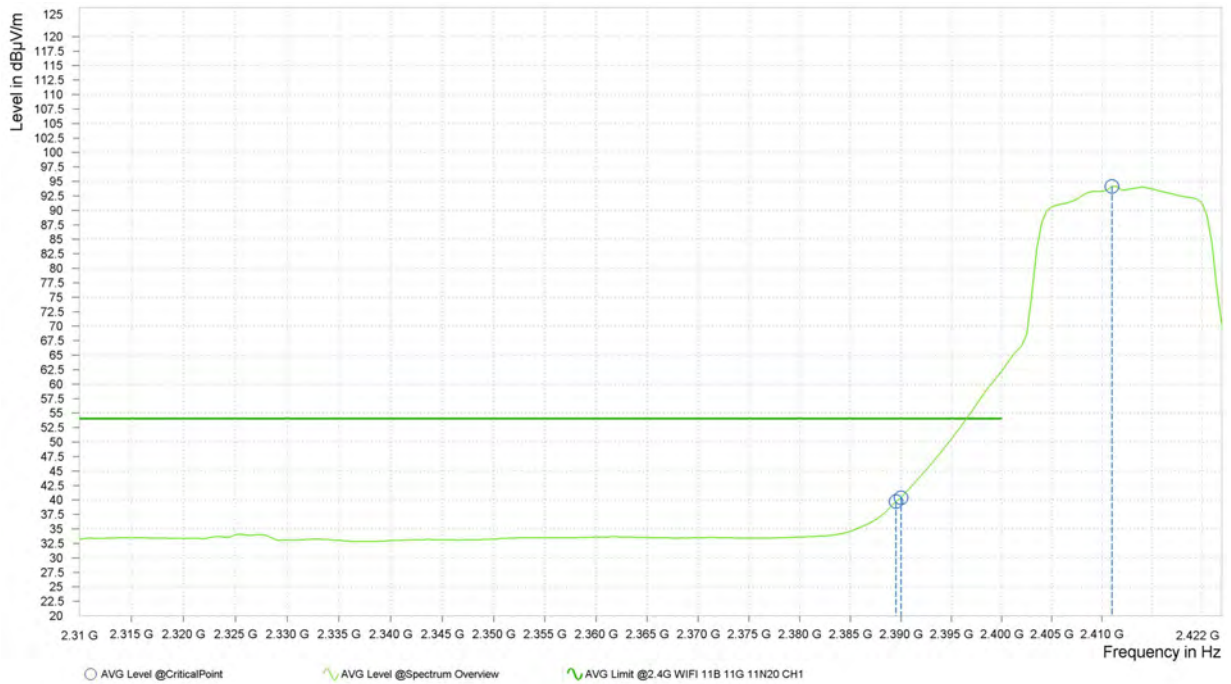




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	55.66	74.00	18.34	7.08	V	359	2.00
1	2,390.000	56.70	74.00	17.30	7.08	V	9.3	2.00
1	2,410.500	104.88			7.16	V	9.3	2.00

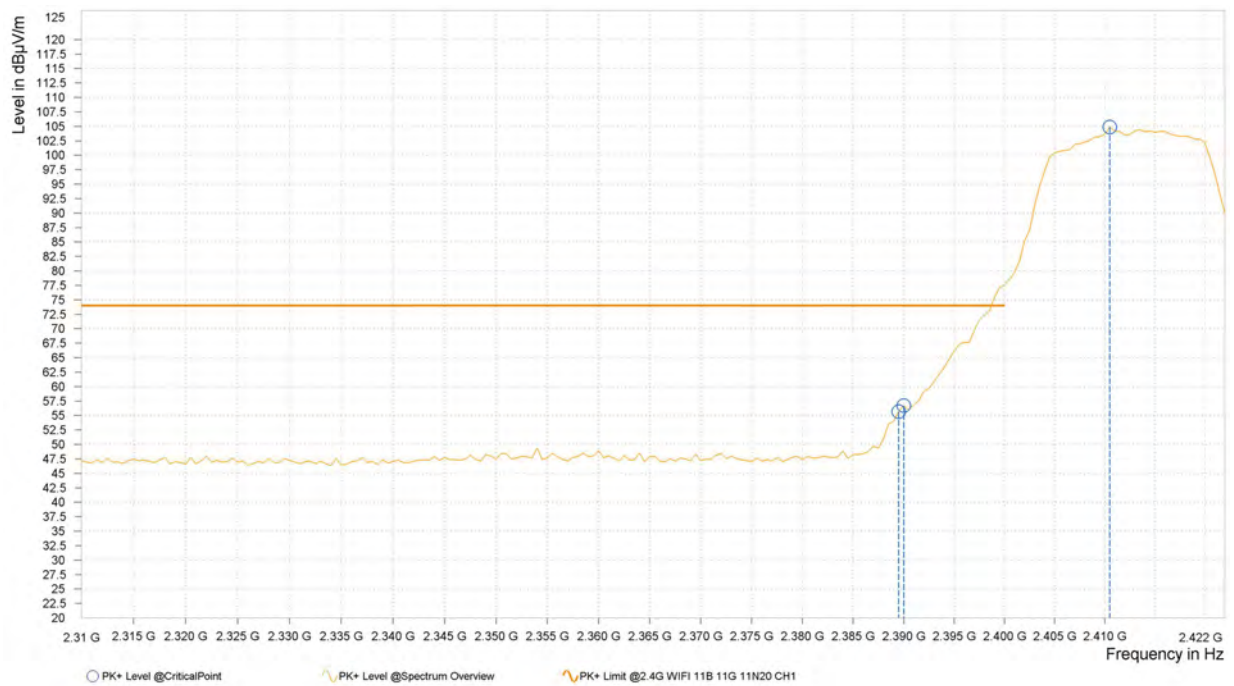



Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	37.58	54.00	16.42	7.08	V	1	2.00
1	2,390.000	38.33	54.00	15.67	7.08	V	1	2.00
1	2,413.500	91.97			7.19	V	1	2.00

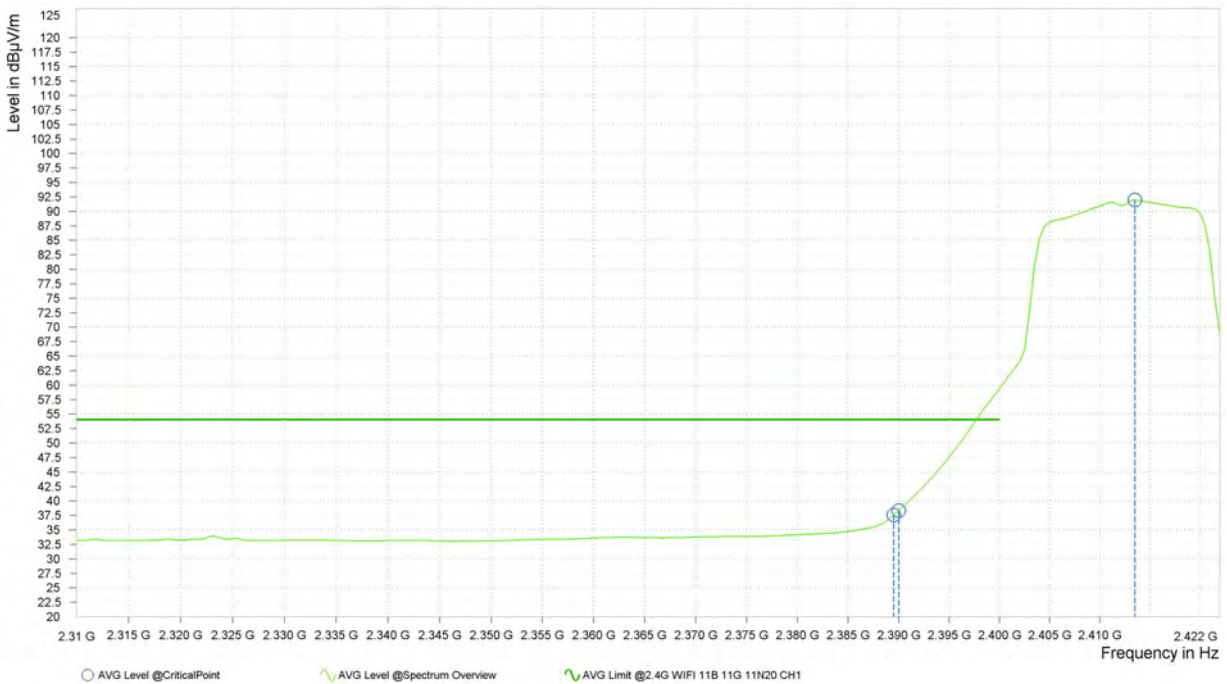

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
2. 2412MHz: Fundamental frequency.




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	50.76	74.00	23.24	39.74	54.00	14.26	15.25	H	90.2	2.00
2	7,311.000	57.54	74.00	16.46	45.83	54.00	8.17	21.10	H	332.9	2.00

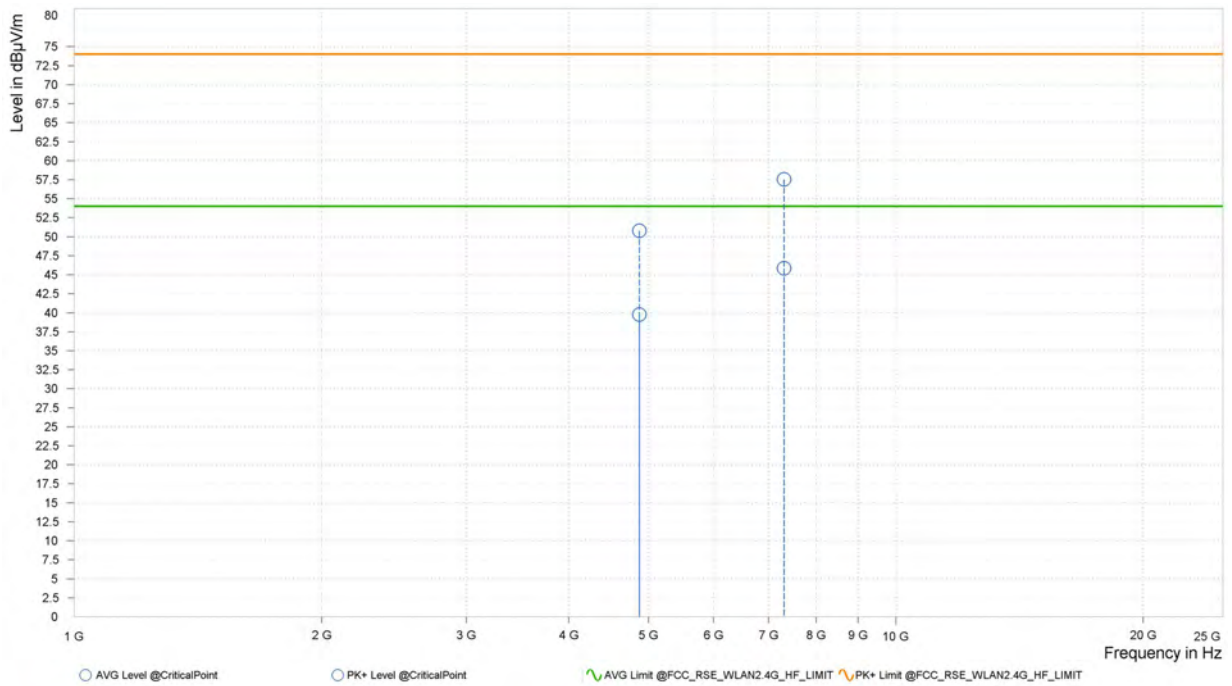



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	50.35	74.00	23.65	39.87	54.00	14.13	15.25	V	332.9	2.00
2	7,311.000	56.52	74.00	17.48	45.77	54.00	8.23	21.10	V	332.9	2.00

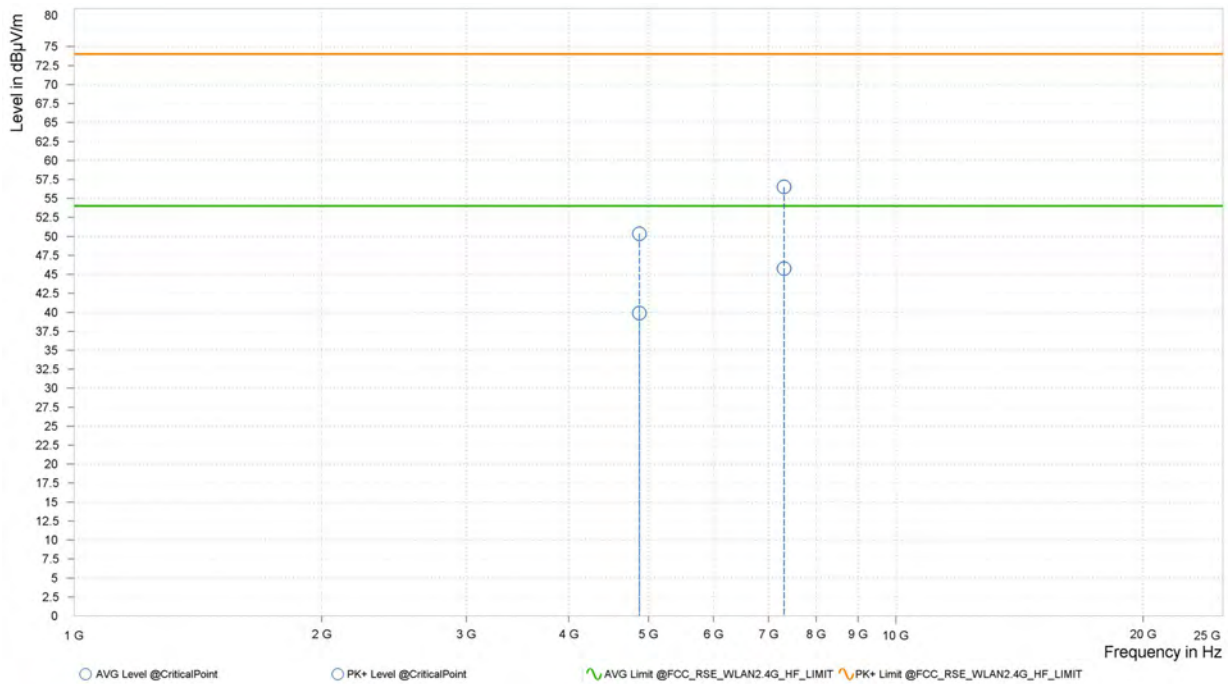

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
2. 2437MHz: Fundamental frequency.




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,454.500	104.47			7.43	H	75	2.00
2	2,483.500	55.47	74.00	18.53	7.36	H	219.6	2.00
2	2,484.000	56.14	74.00	17.86	7.36	H	219.6	2.00

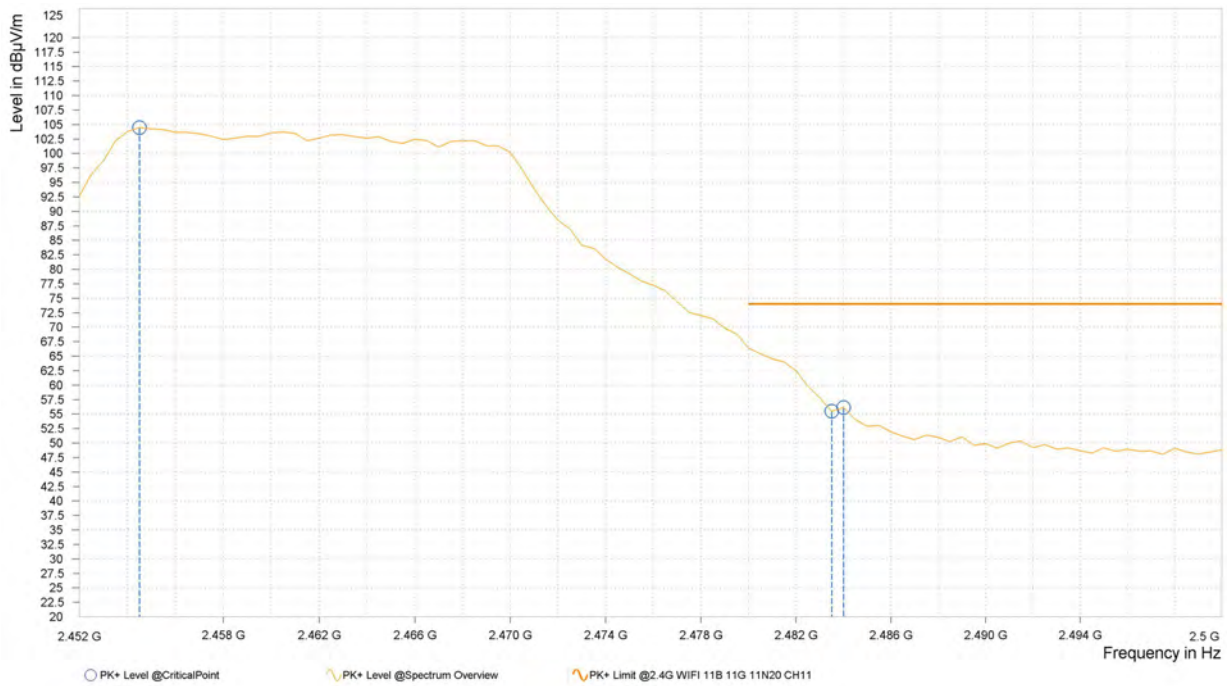




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,460.500	89.14			7.40	H	1	1.00
2	2,483.500	40.79	54.00	13.21	7.36	H	355	2.00
2	2,484.500	40.58	54.00	13.42	7.36	H	355	2.00

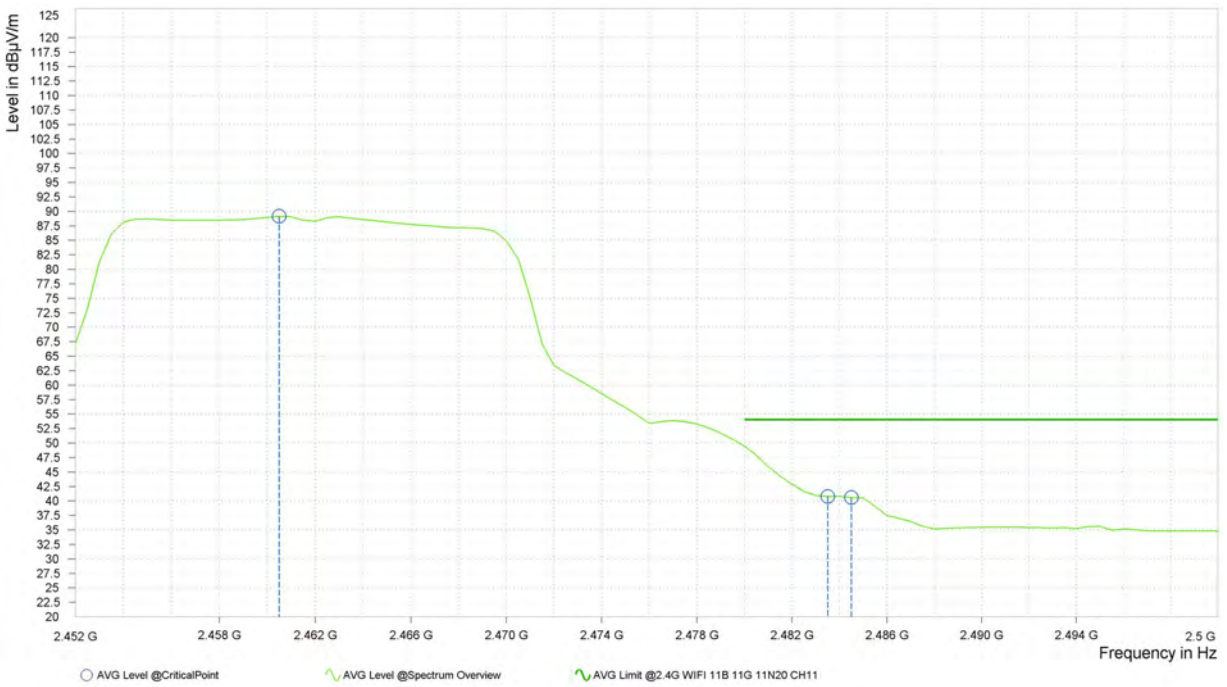




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,460.500	103.69			7.40	V	10.6	2.00
2	2,483.500	50.51	74.00	23.49	7.36	V	357.4	1.00
2	2,484.500	49.80	74.00	24.20	7.36	V	78.2	1.00

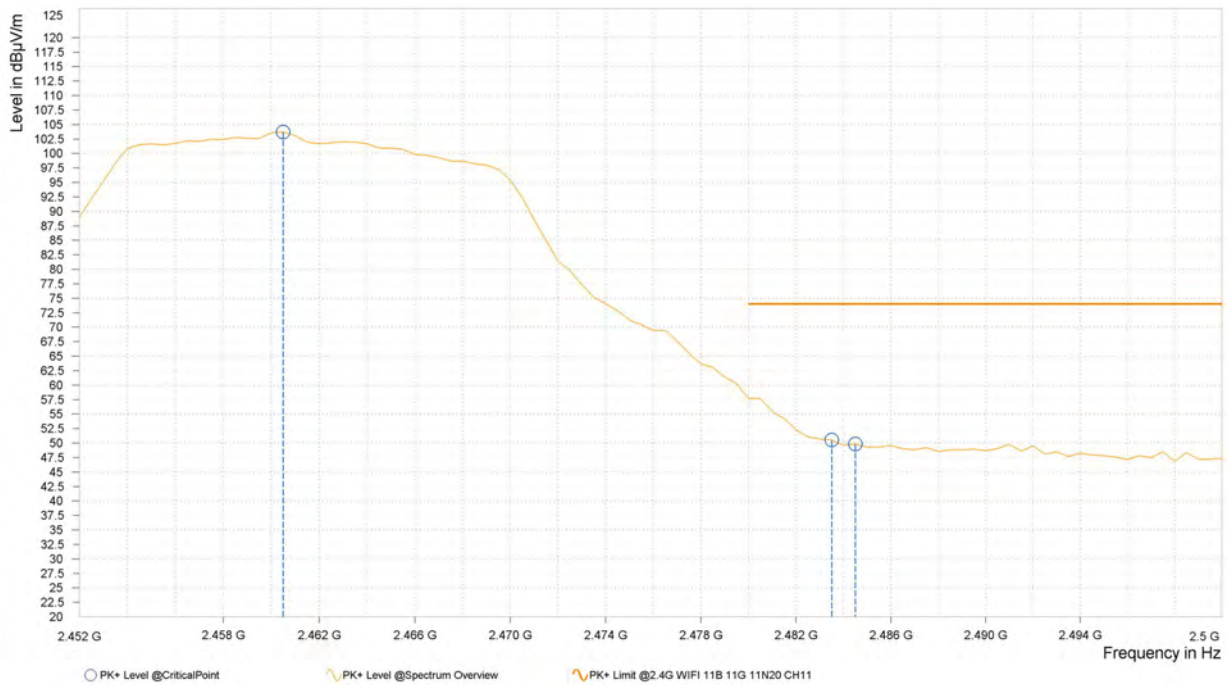



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,460.500	90.45			7.40	V	1	2.00
2	2,483.500	37.56	54.00	16.44	7.36	V	355	2.00
2	2,484.000	36.80	54.00	17.20	7.36	V	355	2.00

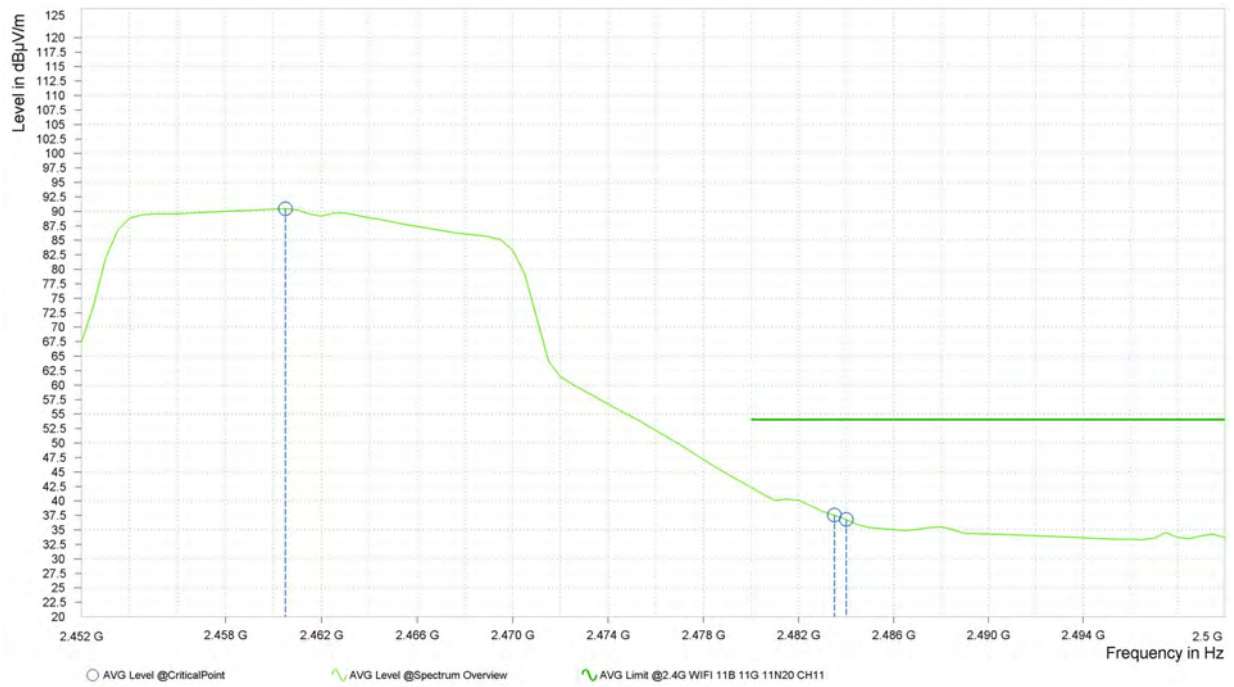

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
2. 2462MHz: Fundamental frequency.



**BUREAU
VERITAS**


Test Report No.: PSU-NQN2402040109RF06

802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	58.67	74.00	15.33	7.08	H	69	2.00
1	2,390.000	57.71	74.00	16.29	7.08	H	69	2.00
1	2,413.500	106.47			7.19	H	359	2.00

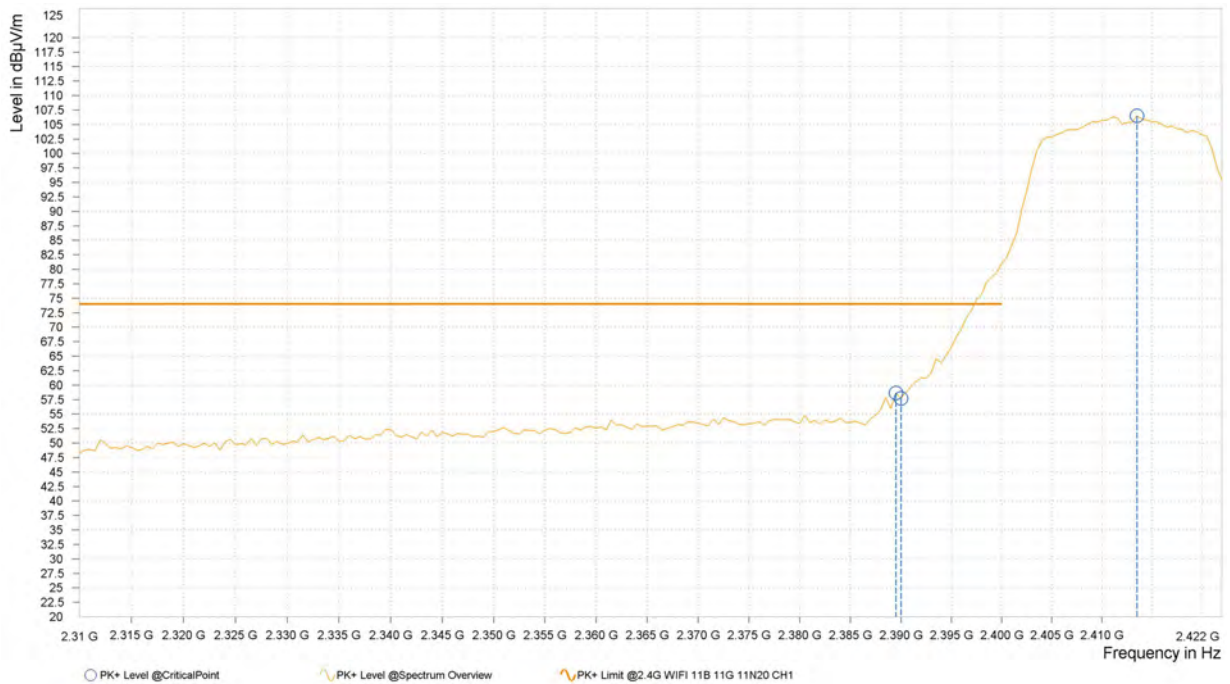




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	40.38	54.00	13.62	7.08	H	359	2.00
1	2,390.000	41.00	54.00	13.00	7.08	H	359	2.00
1	2,413.500	93.78			7.19	H	359	2.00

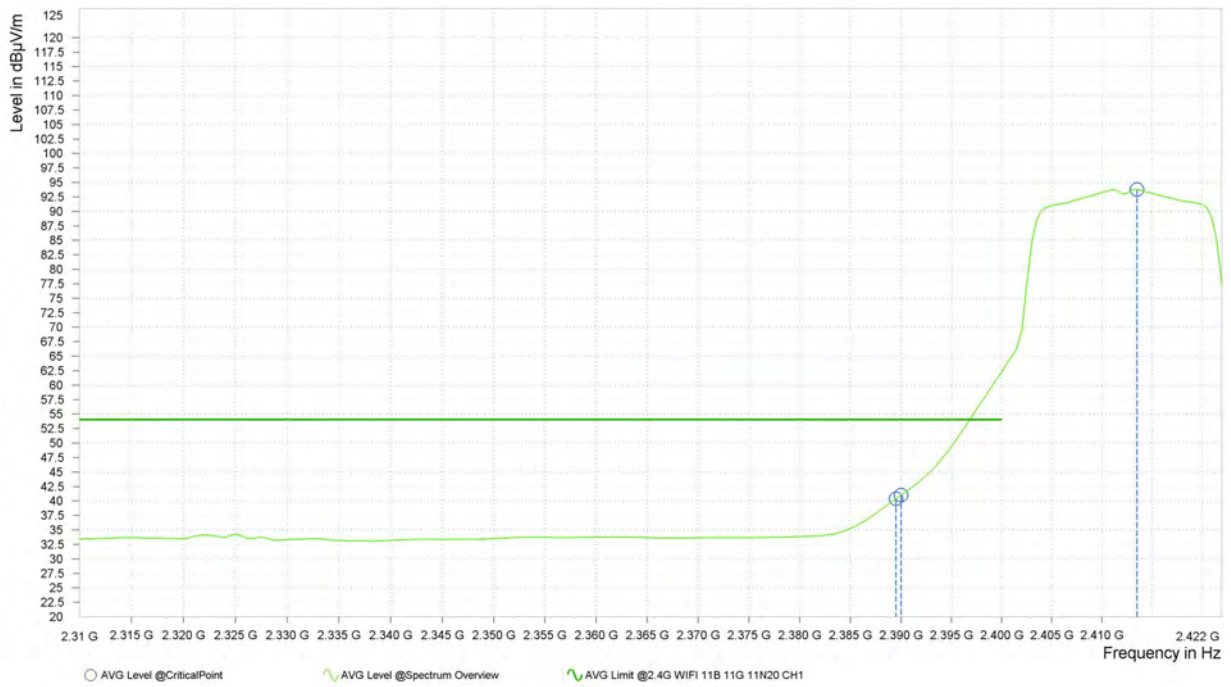




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	52.54	74.00	21.46	7.08	V	359	2.00
1	2,390.000	53.29	74.00	20.71	7.08	V	1	2.00
1	2,414.000	104.17			7.20	V	1	2.00

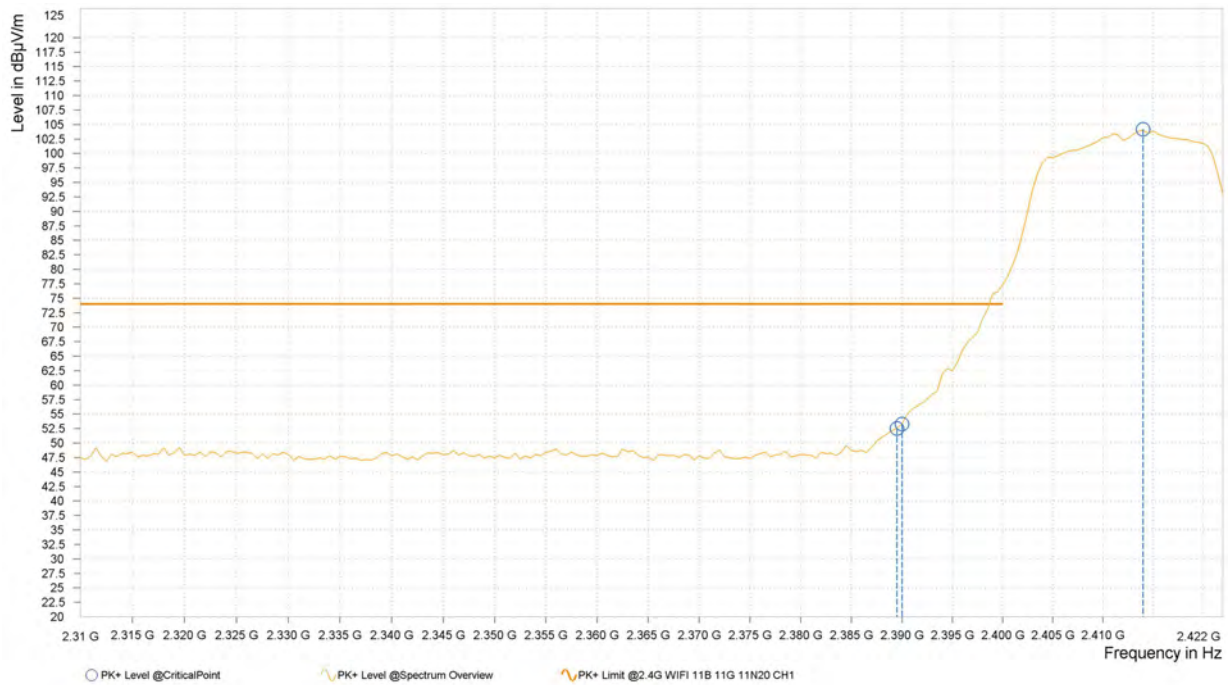



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	38.05	54.00	15.95	7.08	V	355.1	2.00
1	2,390.000	38.64	54.00	15.36	7.08	V	0.9	2.00
1	2,413.500	91.41			7.19	V	0.9	2.00

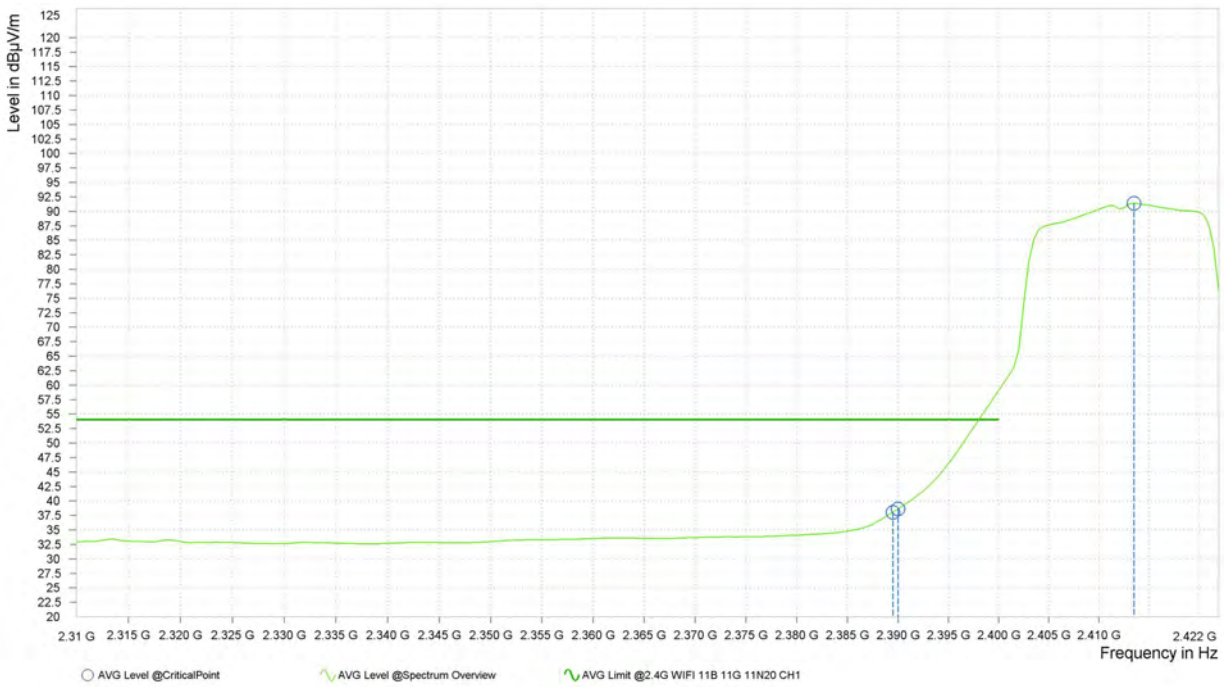

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
2. 2412MHz: Fundamental frequency.




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	51.43	74.00	22.57	39.57	54.00	14.43	15.25	H	27.2	2.00
2	7,311.000	57.19	74.00	16.81	45.98	54.00	8.02	21.10	H	27.2	2.00

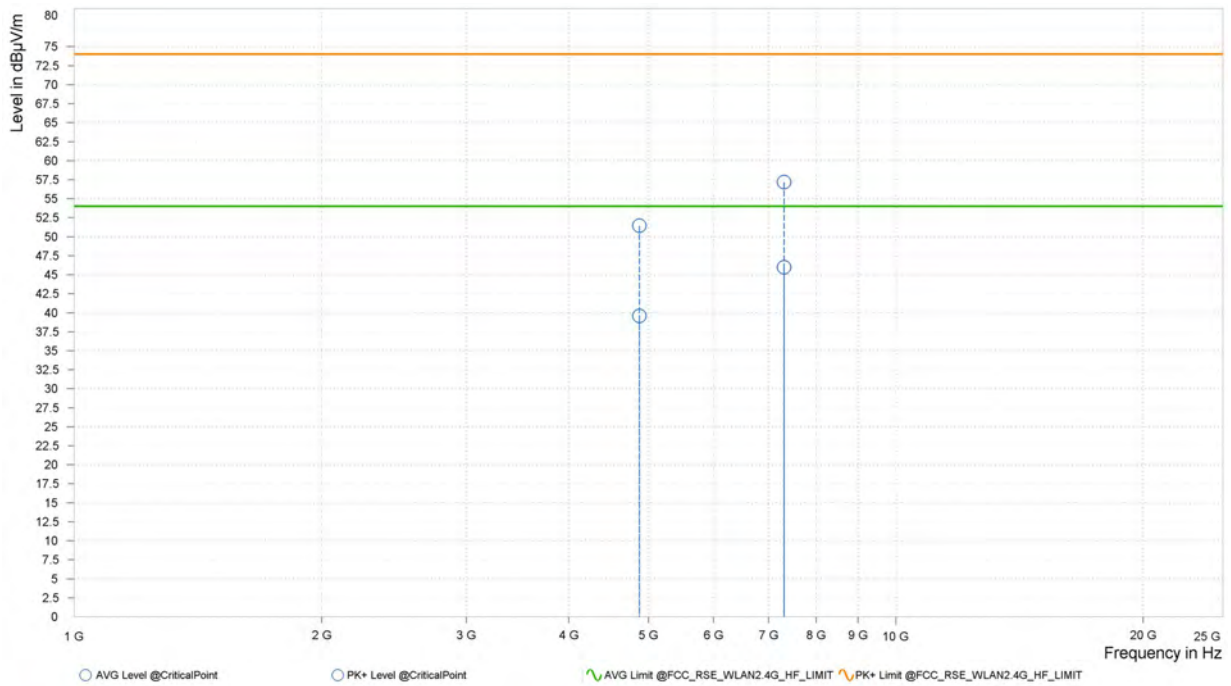



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	52.30	74.00	21.70	40.00	54.00	14.00	15.25	V	0.9	2.00
2	7,311.000	56.62	74.00	17.38	45.83	54.00	8.17	21.10	V	28.4	2.00

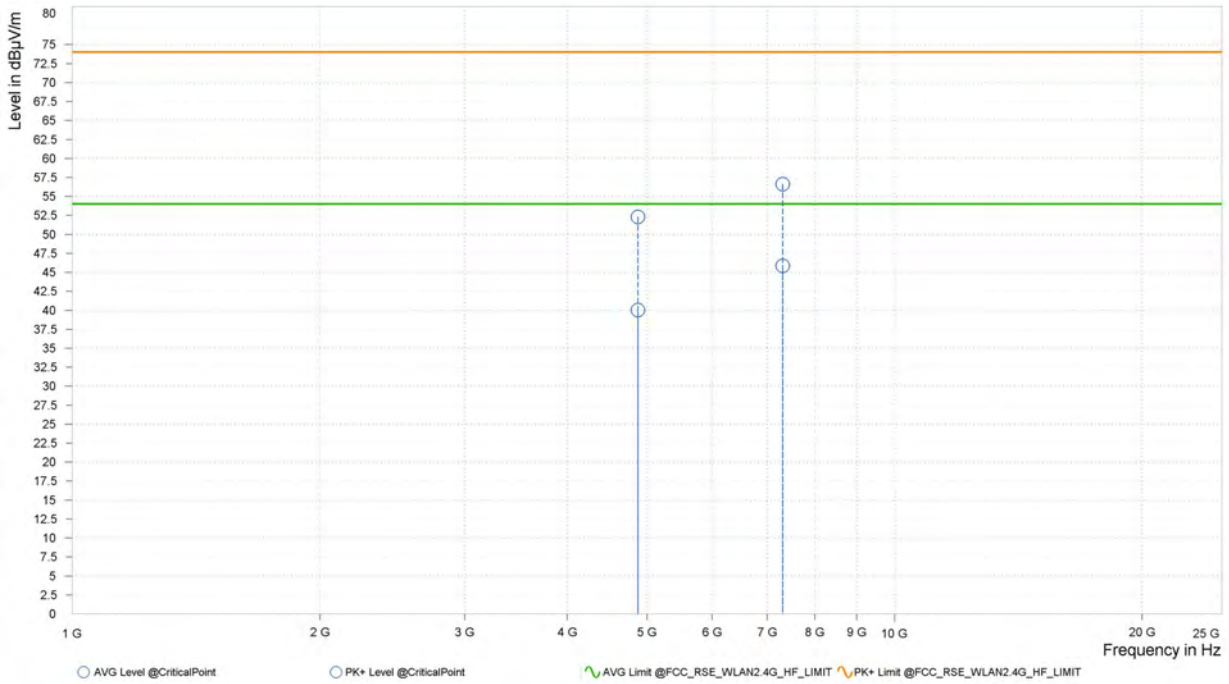

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2437MHz: Fundamental frequency.




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,464.000	103.20			7.39	H	4.3	1.00
2	2,483.500	53.65	74.00	20.35	7.36	H	4.3	1.00
2	2,485.500	53.24	74.00	20.76	7.36	H	4.3	1.00

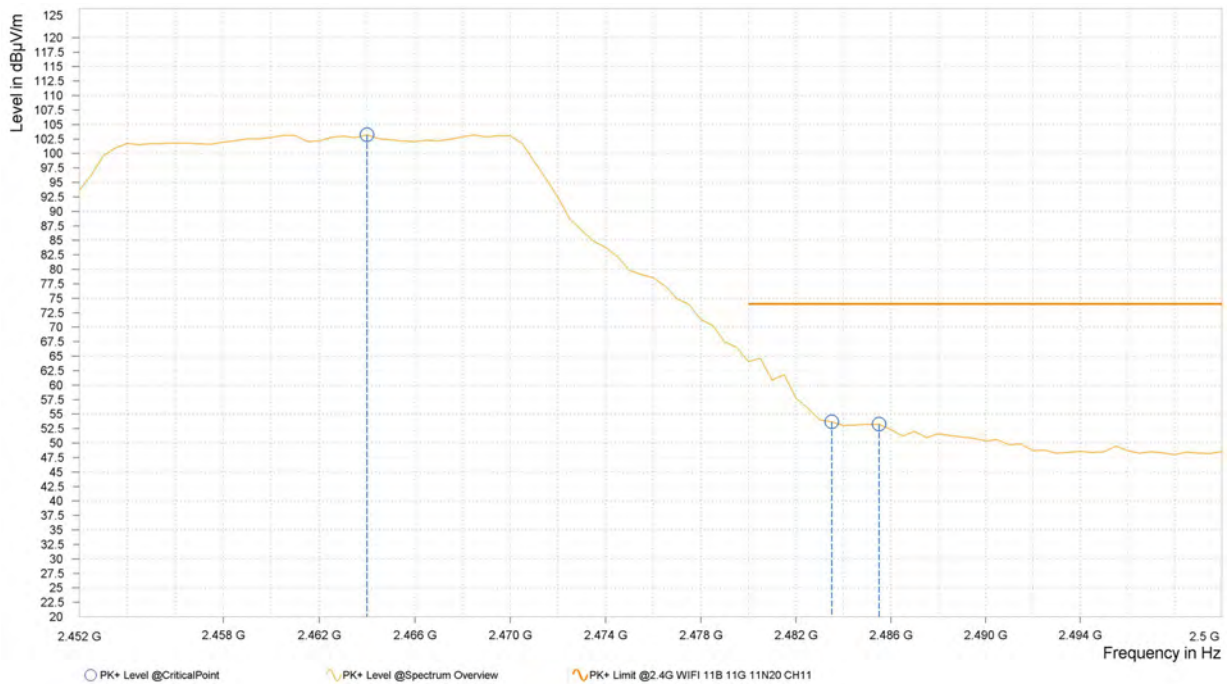




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,460.500	88.84			7.40	H	1	1.00
2	2,483.000	41.62	54.00	12.38	7.36	H	355.7	2.00
2	2,483.500	41.13	54.00	12.87	7.36	H	355.7	2.00

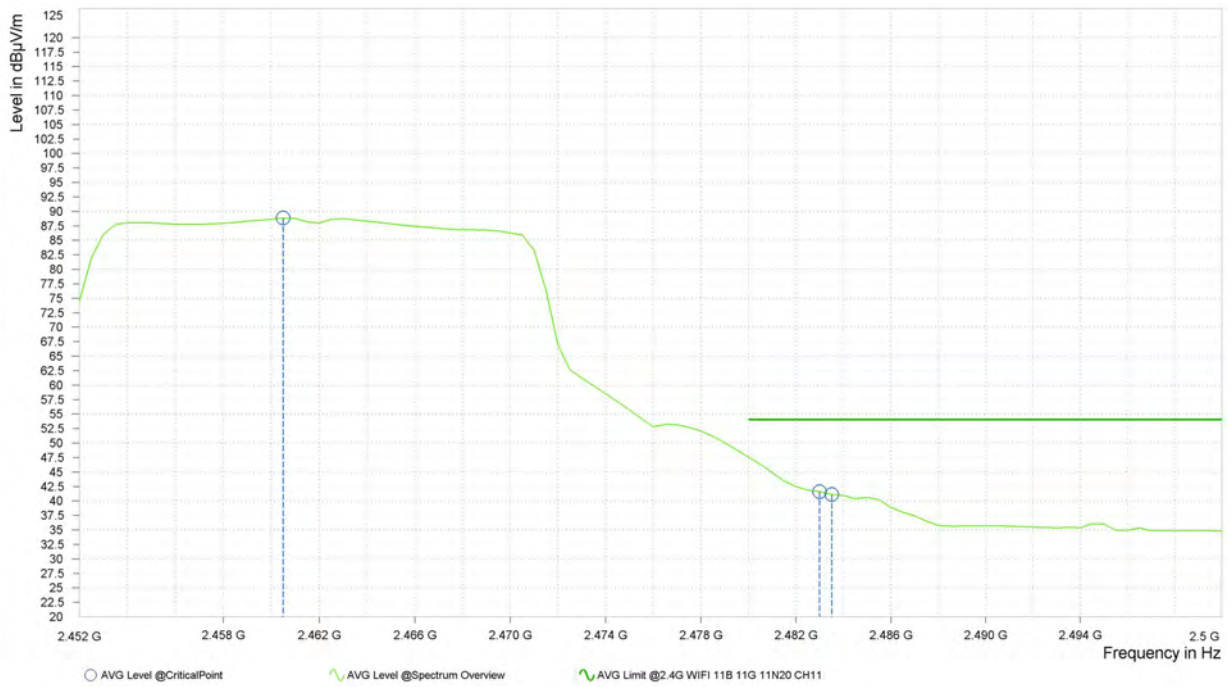




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,461.000	102.21			7.40	V	1	2.00
2	2,483.500	50.44	74.00	23.56	7.36	V	5.6	1.00
2	2,484.500	50.65	74.00	23.35	7.36	V	5.6	1.00

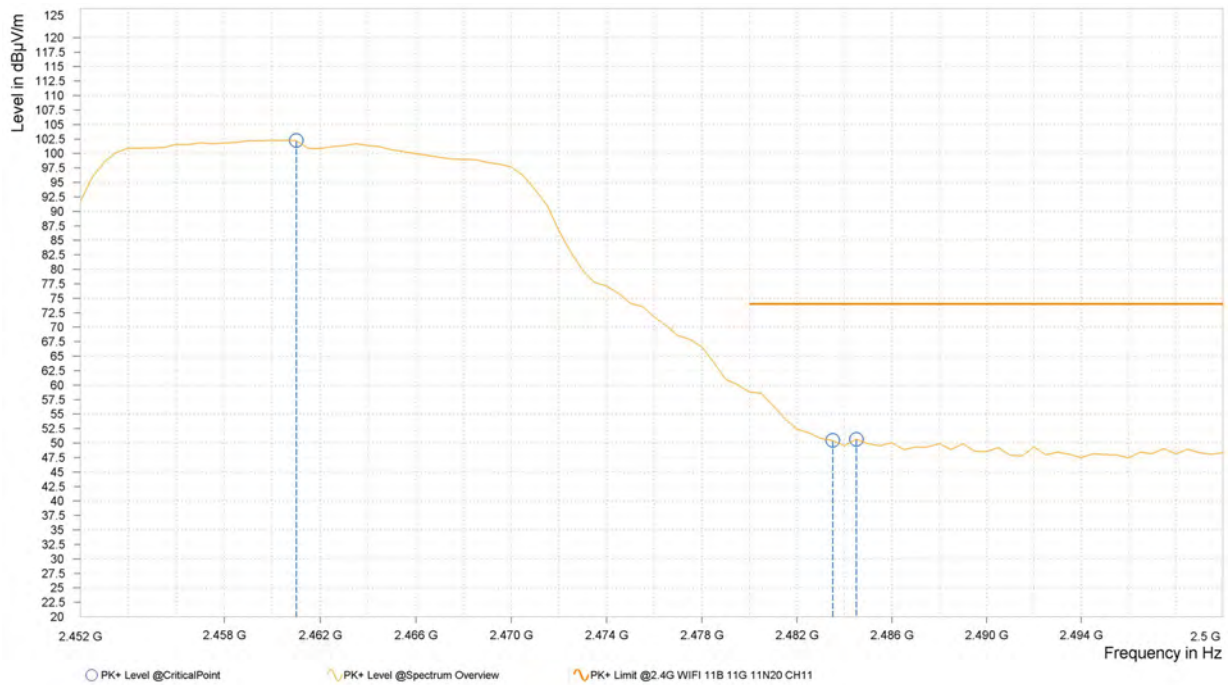



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,460.500	89.75			7.40	V	0.9	2.00
2	2,483.500	37.31	54.00	16.69	7.36	V	349.4	2.00
2	2,484.000	37.00	54.00	17.00	7.36	V	349.4	2.00

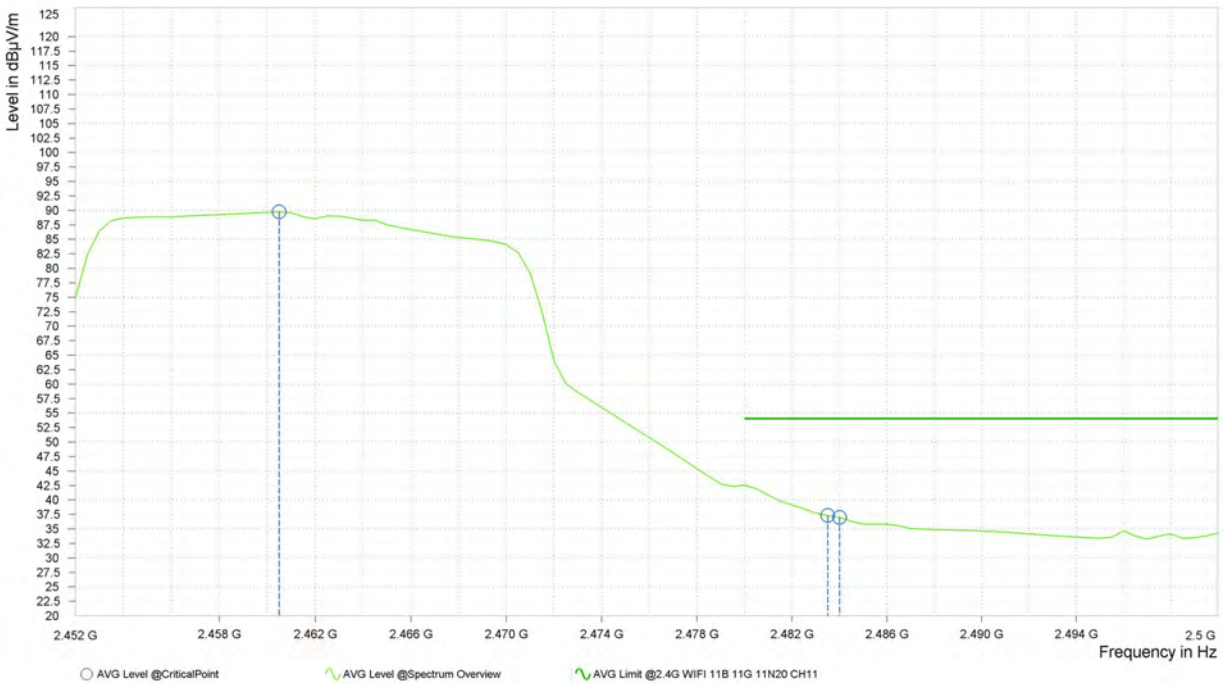

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level .
2. 2462MHz: Fundamental frequency.




BUREAU VERITAS Test Report No.: PSU-NQN2402040109RF06

802.11n (40MHz)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,389.000	55.74	74.00	18.26	7.08	H	70.2	2.00
3	2,390.000	57.09	74.00	16.91	7.08	H	70.2	2.00
3	2,413.000	100.69			7.19	H	359	2.00

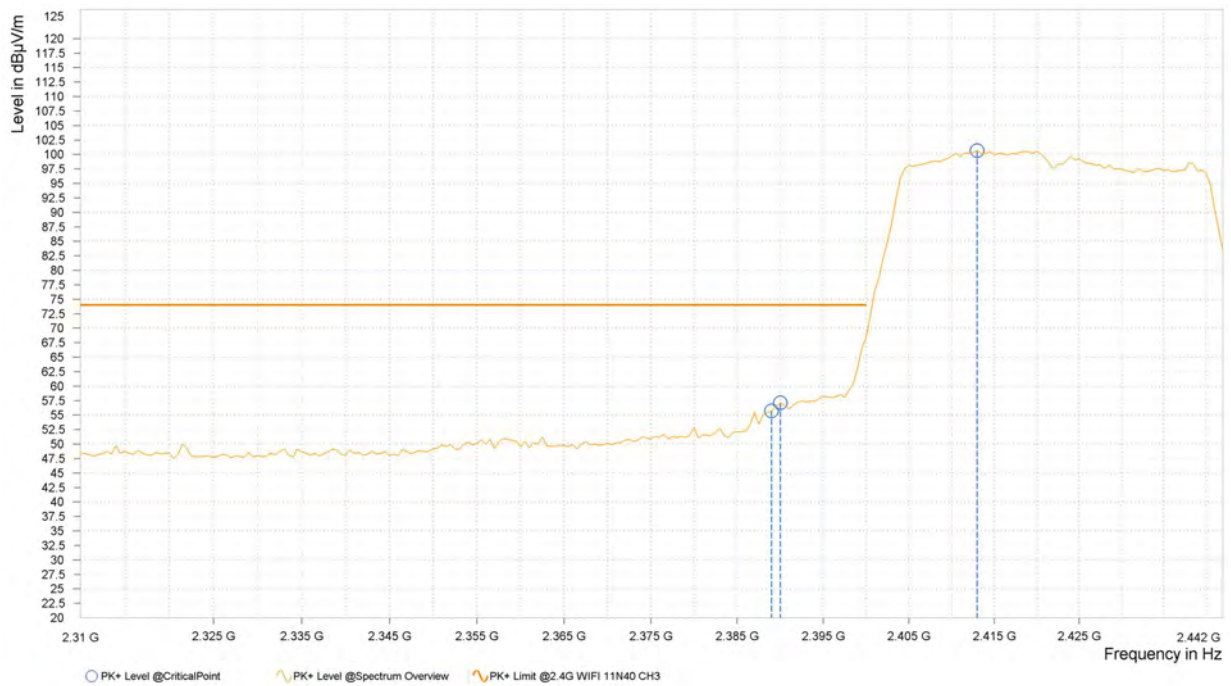



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,389.000	41.77	54.00	12.23	7.08	H	69	2.00
3	2,390.000	42.42	54.00	11.58	7.08	H	69	2.00
3	2,419.000	87.14			7.24	H	359	2.00

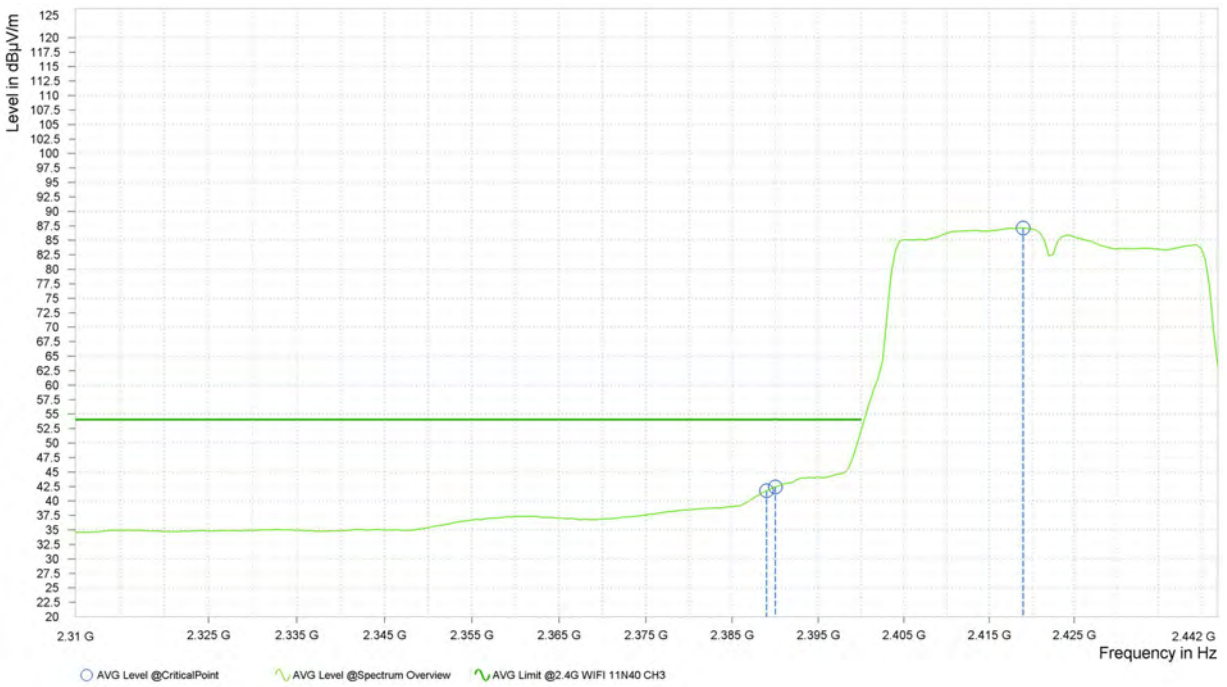




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,387.500	54.91	74.00	19.09	7.08	V	4.9	1.00
3	2,390.000	55.65	74.00	18.35	7.08	V	4.9	1.00
3	2,418.000	98.66			7.23	V	0.9	2.00

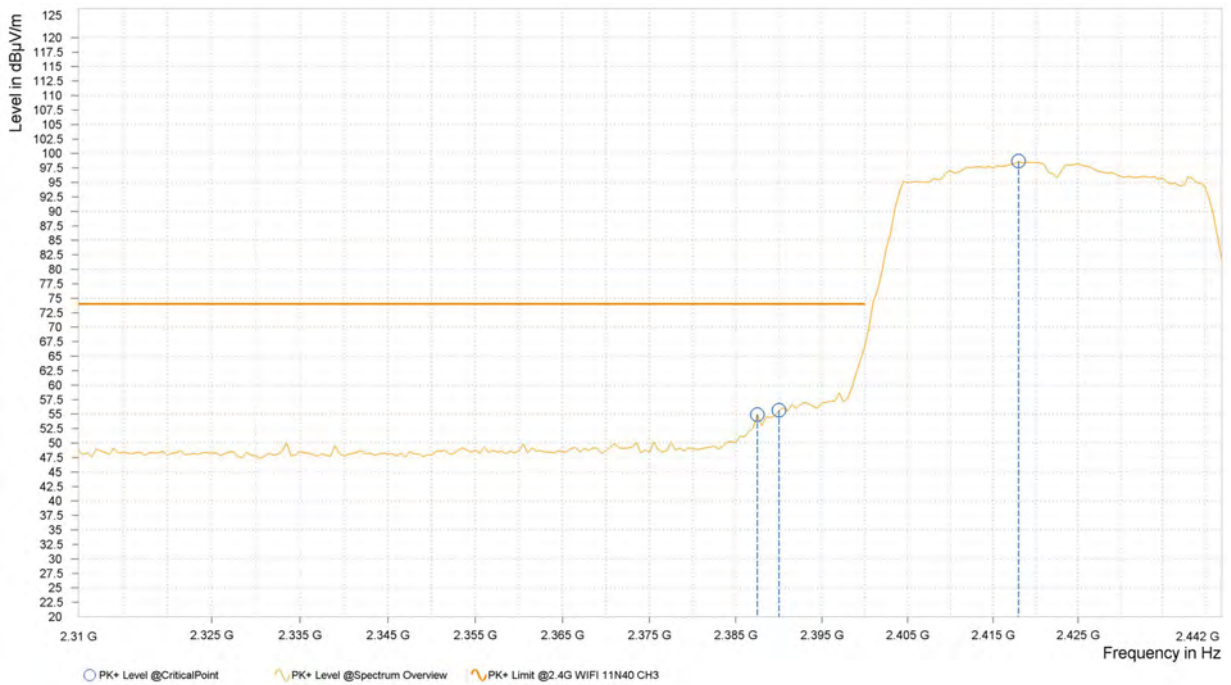



Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,389.000	40.71	54.00	13.29	7.08	V	6.4	1.00
3	2,390.000	41.00	54.00	13.00	7.08	V	6.4	1.00
3	2,420.000	85.48			7.25	V	0.9	2.00

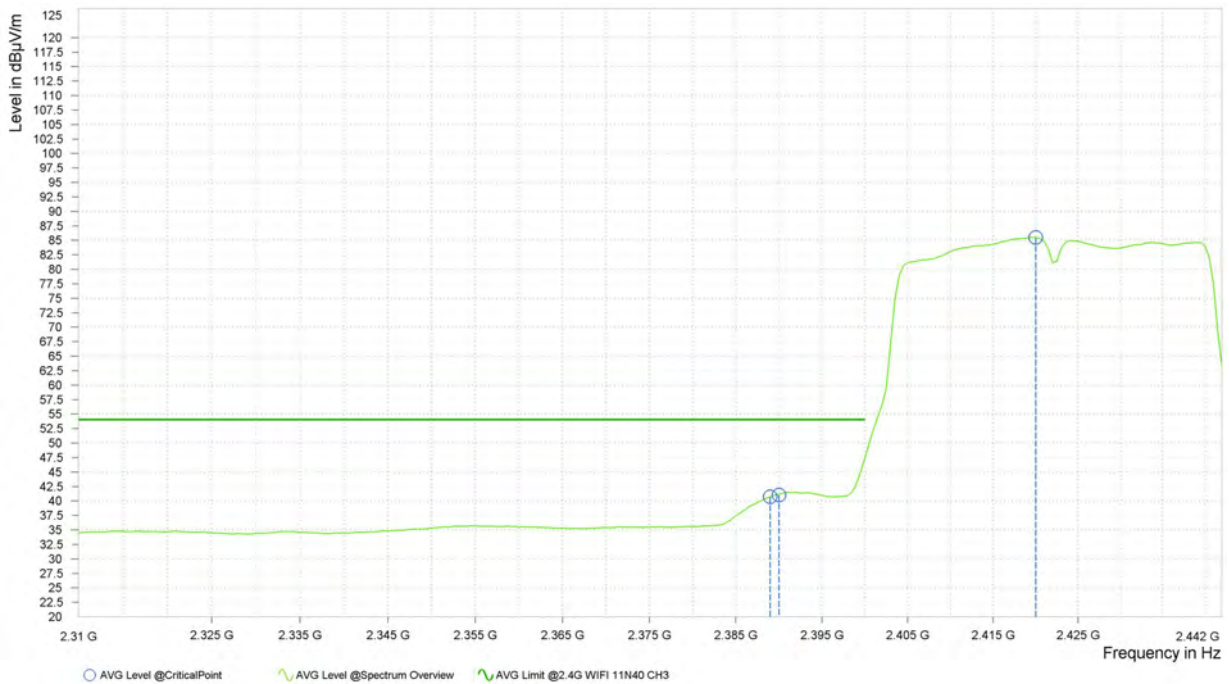

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2422MHz: Fundamental frequency.




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	50.70	74.00	23.30	39.67	54.00	14.33	15.25	H	359	1.00
2	7,311.000	57.45	74.00	16.55	45.83	54.00	8.17	21.10	H	1	2.00

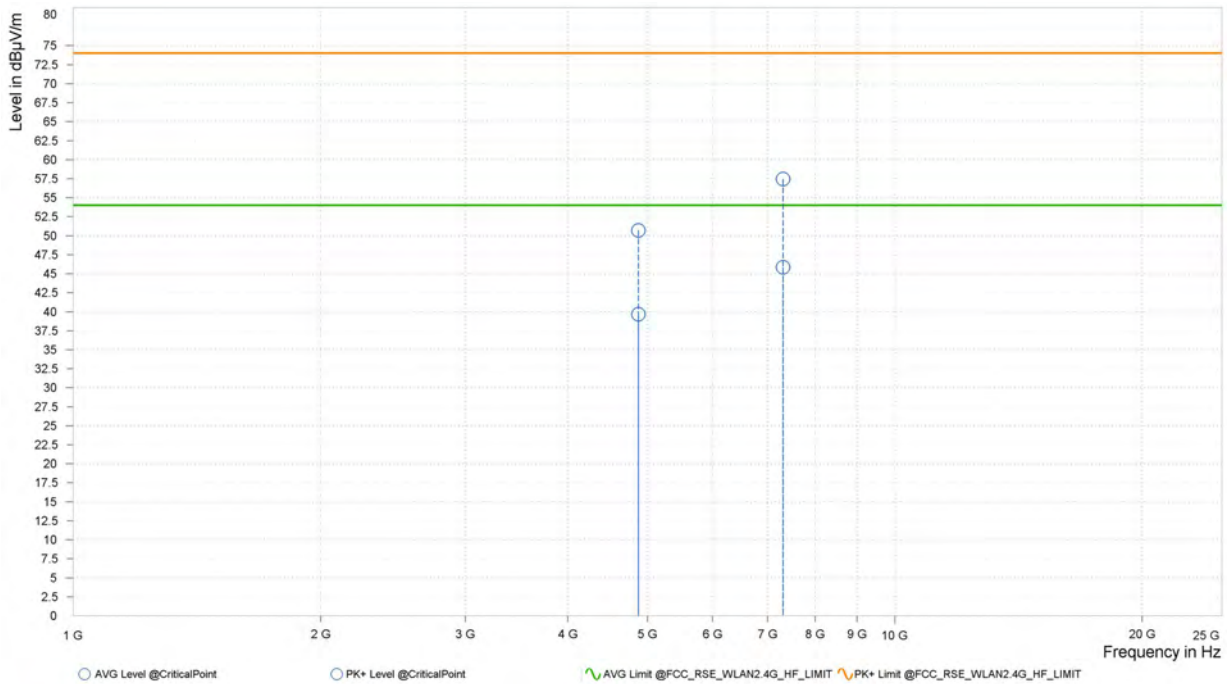



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	50.36	74.00	23.64	39.71	54.00	14.29	15.25	V	359	2.00
2	7,311.000	57.19	74.00	16.81	46.18	54.00	7.82	21.10	V	0.9	2.00

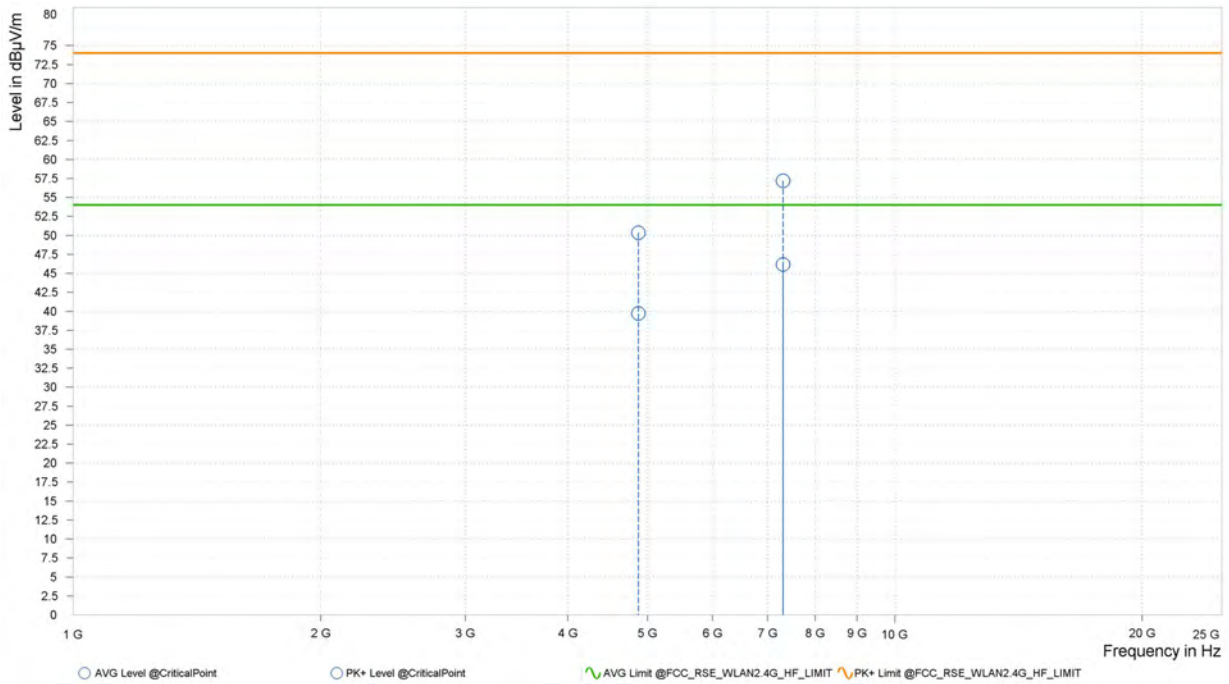

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2437MHz: Fundamental frequency.




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,449.500	103.03			7.44	H	72.6	2.00
4	2,483.500	55.15	74.00	18.85	7.36	H	217.2	2.00
4	2,484.000	54.89	74.00	19.11	7.36	H	217.2	2.00

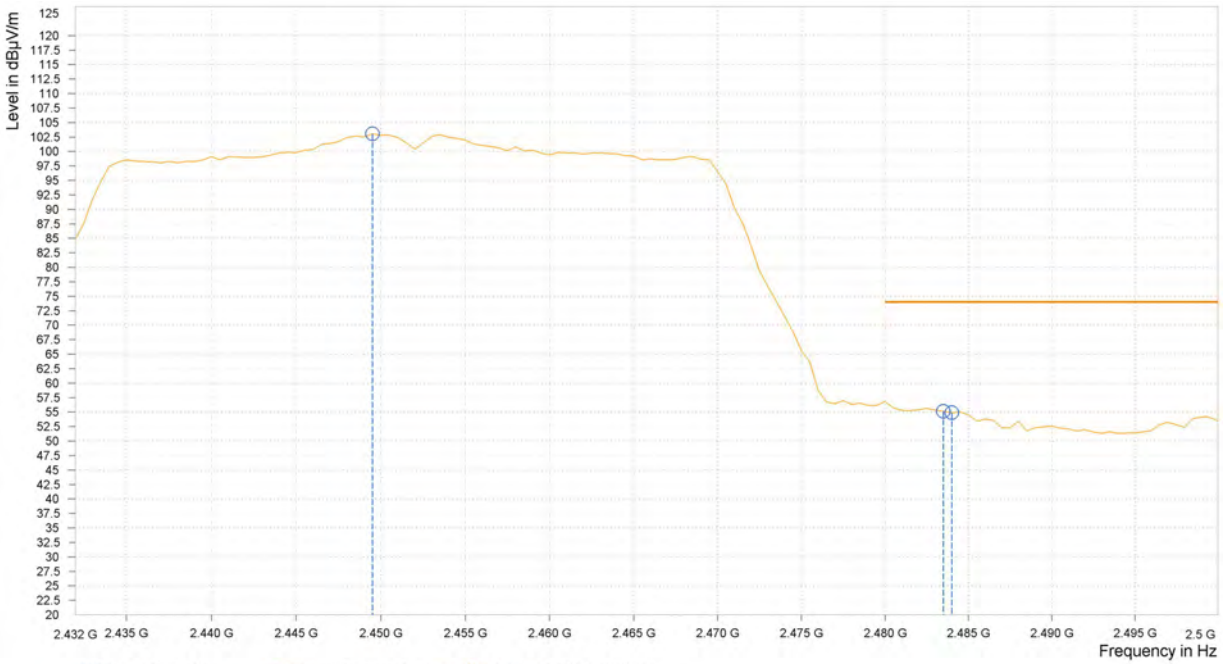



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,454.500	88.62			7.43	H	75	2.00
4	2,483.500	40.09	54.00	13.91	7.36	H	218.4	2.00
4	2,484.000	39.88	54.00	14.12	7.36	H	218.4	2.00






ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,454.500	85.17			7.43	V	68.6	1.00
4	2,483.500	37.61	54.00	16.39	7.36	V	68.6	1.00
4	2,484.000	37.46	54.00	16.54	7.36	V	68.6	1.00





Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,456.000	98.57			7.42	V	68.6	1.00
4	2,483.500	51.08	74.00	22.92	7.36	V	5	1.00
4	2,484.000	51.42	74.00	22.58	7.36	V	68.6	1.00

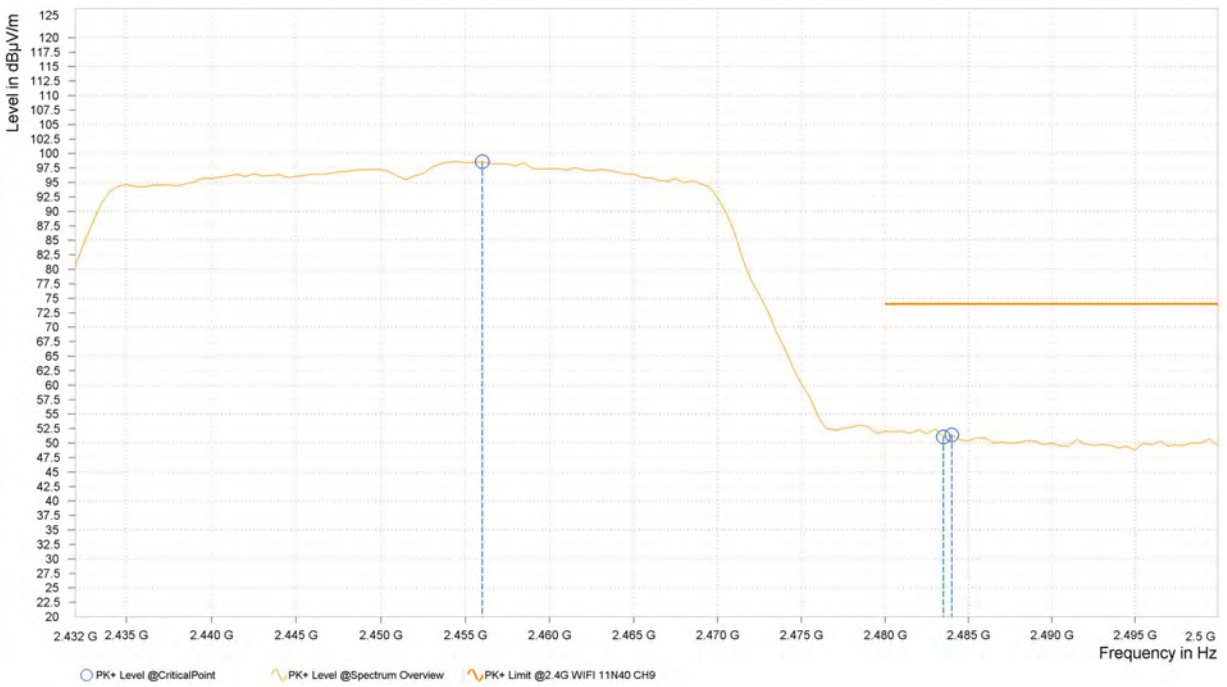

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2452MHz: Fundamental frequency.



BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:

BT-LE _1M


CHANNEL	TX Channel 19	ODETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBµV/m]	QPK Limit [dBµV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	43.532	25.22	40.00	14.78	-9.85	H	0.9	2.00	120.000
1	64.047	24.33	40.00	15.67	-11.76	H	145.2	1.00	120.000
1	167.401	22.11	43.50	21.39	-14.01	H	145.2	1.00	120.000
1	316.102	18.95	46.00	27.05	-7.00	H	145.2	1.00	120.000
1	692.898	24.55	46.00	21.45	-1.58	H	214.9	2.00	120.000
1	924.971	27.75	46.00	18.25	2.40	H	145.2	1.00	120.000

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

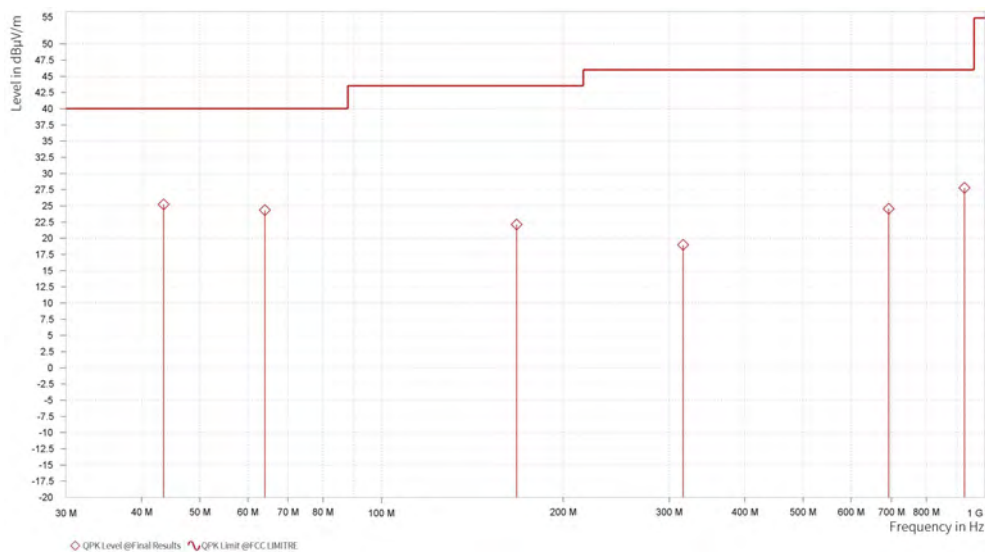




CHANNEL	TX Channel 19	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	44.162	25.00	40.00	15.00	-10.98	V	1	1.00	120.000
1	98.191	18.66	43.50	24.84	-12.23	V	0.9	2.00	120.000
1	181.514	19.97	43.50	23.53	-12.78	V	0.9	2.00	120.000
1	274.586	16.51	46.00	29.49	-8.05	V	214.9	2.00	120.000
1	554.916	24.77	46.00	21.23	-3.48	V	359.1	1.00	120.000
1	962.995	27.02	54.00	26.98	2.31	V	143.9	1.00	120.000

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

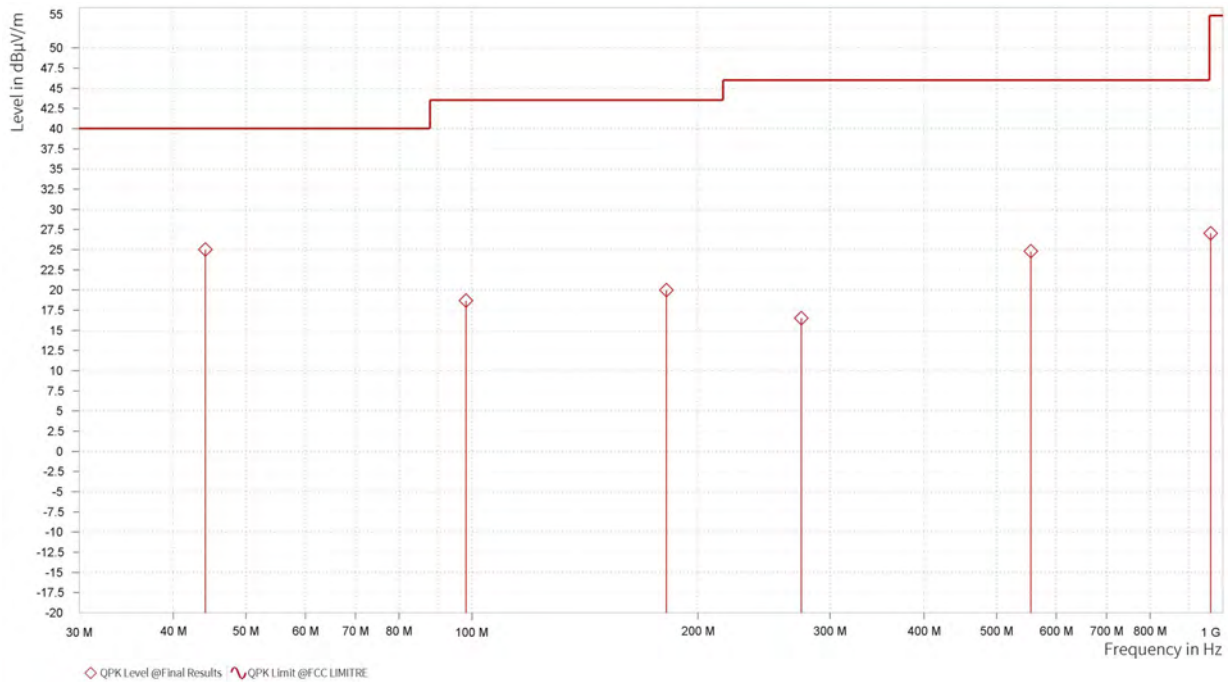



ABOVE 1GHz TEST DATA

Note: 1. For radiated emissions testing · the full testing range of different modes have been scanned · only the worst case harmonic data is reported in the sheet.


2. All other emissions were greater than 20dB below the limit was not recorded

BT-LE _1M

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,388.500	51.69	74.00	22.31	7.08	H	216	2.00
5	2,390.000	51.08	74.00	22.92	7.08	H	216	2.00
5	2,402.000	101.06			7.08	H	216	2.00

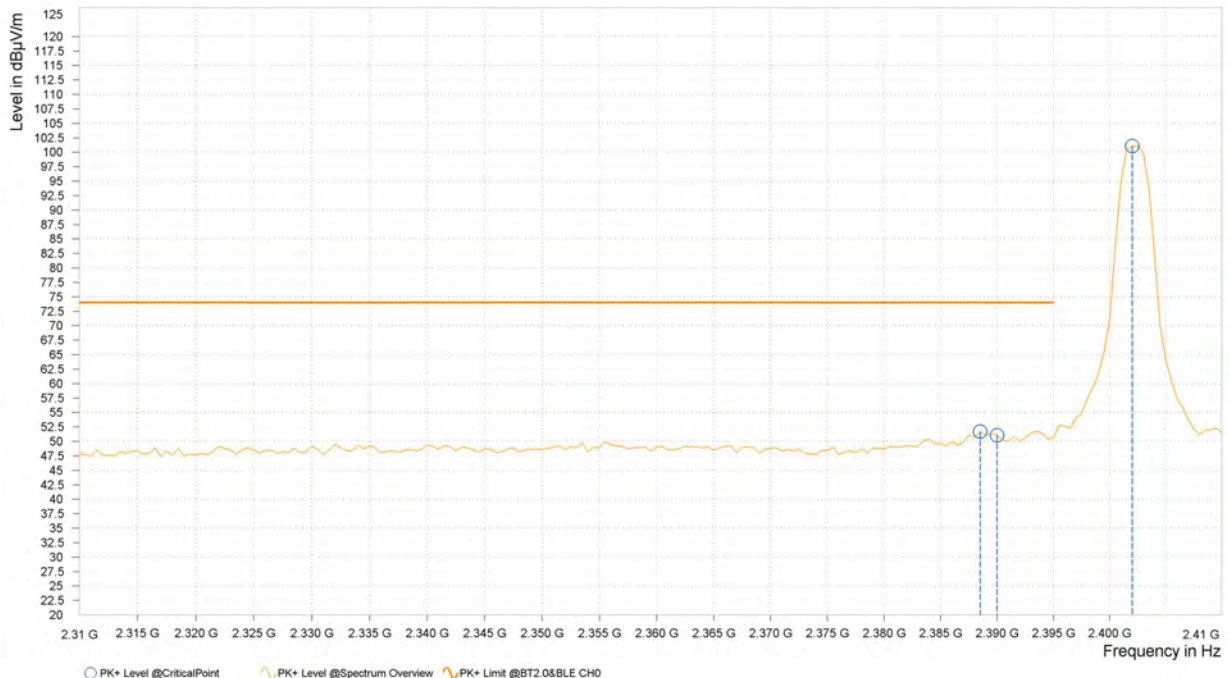




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,389.500	38.03	54.00	15.97	7.08	H	214.9	2.00
5	2,390.000	37.65	54.00	16.35	7.08	H	214.9	2.00
5	2,402.000	80.19			7.08	H	214.9	2.00

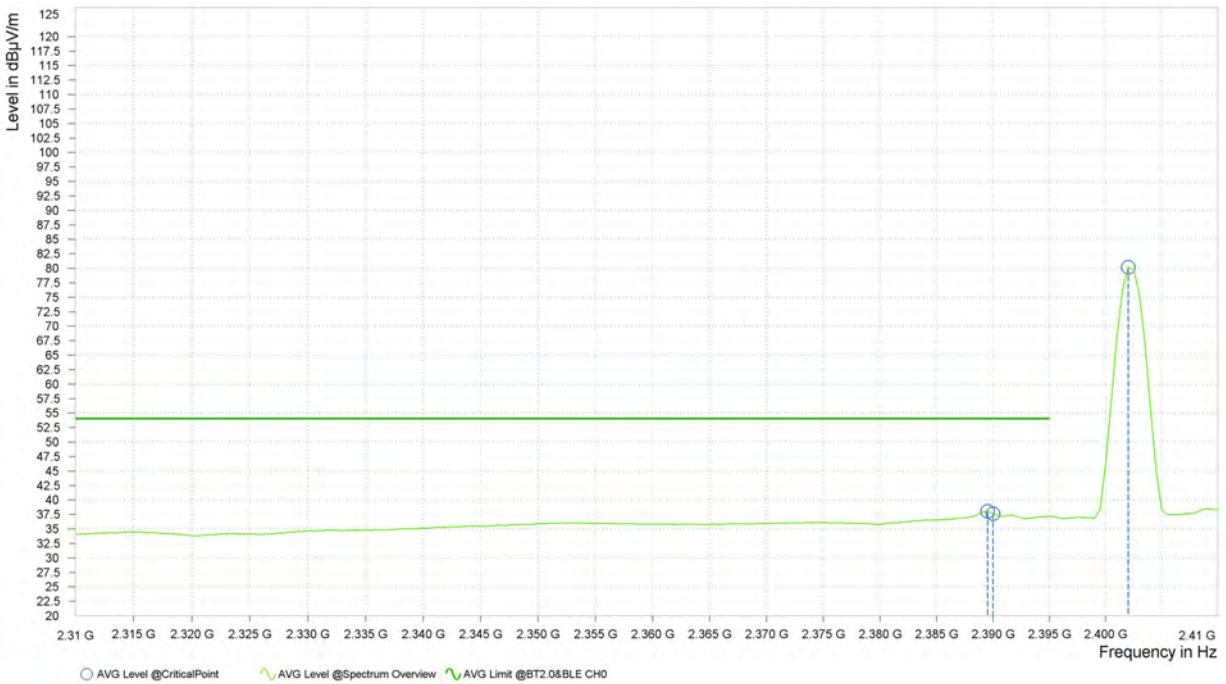




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,389.500	35.41	54.00	18.59	7.08	V	152.2	1.00
5	2,390.000	35.37	54.00	18.63	7.08	V	152.2	1.00
5	2,402.000	75.76			7.08	V	4.9	1.00

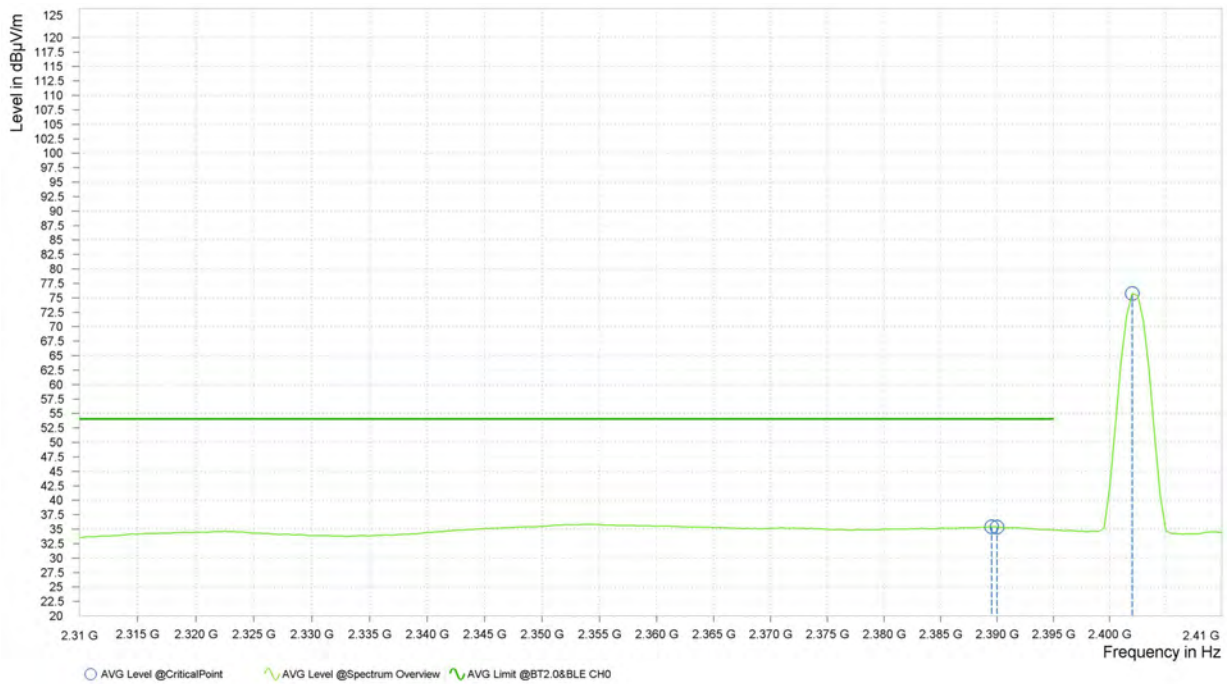



Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,373.000	50.17	74.00	23.83	7.09	V	149.9	1.00
5	2,390.000	48.21	74.00	25.79	7.08	V	149.9	1.00
5	2,402.000	96.19			7.08	V	5	1.00

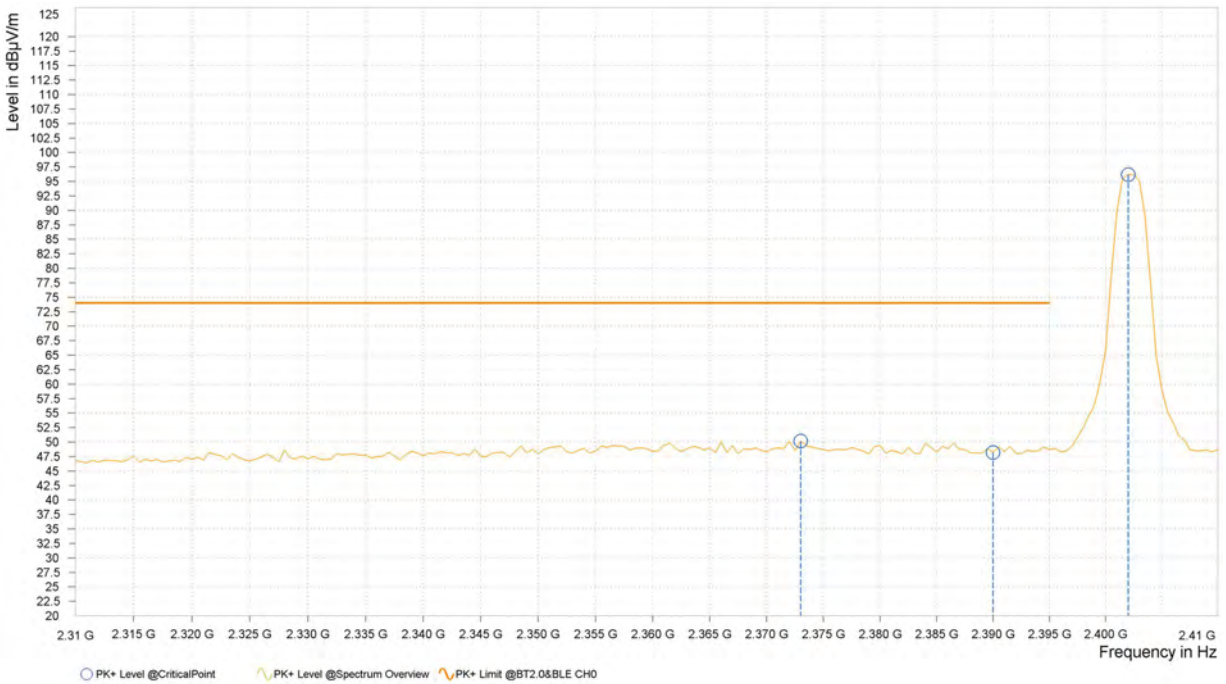

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2402MHz: Fundamental frequency.




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	50.85	74.00	23.15	39.69	54.00	14.31	15.30	H	24.7	2.00
2	7,320.000	56.74	74.00	17.26	45.99	54.00	8.01	21.10	H	334	1.00

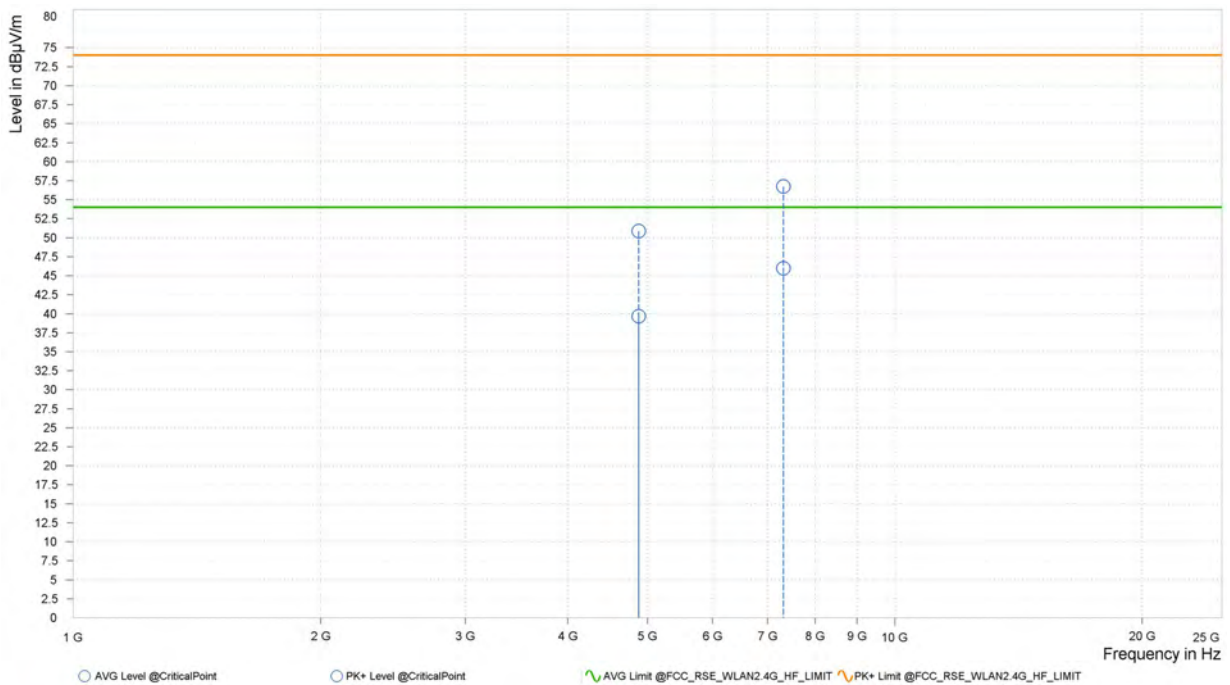



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	50.12	74.00	23.88	39.75	54.00	14.25	15.30	V	1	2.00
2	7,320.000	57.03	74.00	16.97	45.92	54.00	8.08	21.10	V	359	2.00

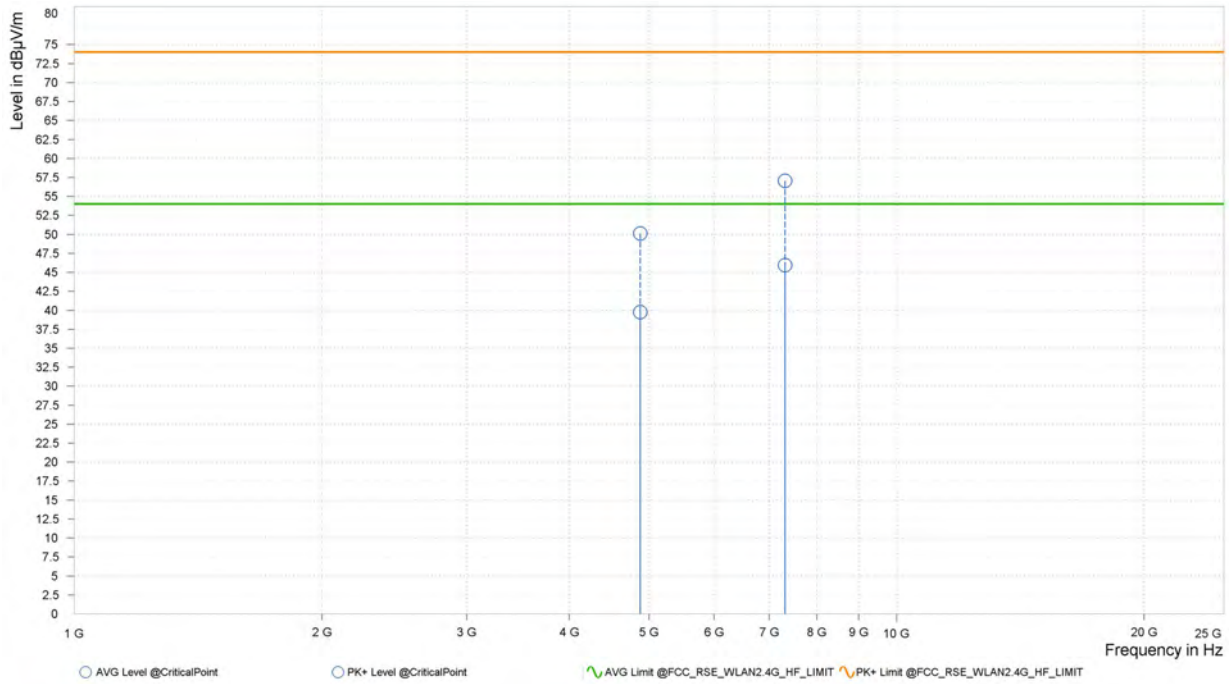

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2440MHz: Fundamental frequency.




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.250	98.91			7.36	H	5.6	1.00
6	2,483.500	57.69	74.00	16.31	7.36	H	146.3	1.00
6	2,484.250	54.82	74.00	19.18	7.36	H	146.3	1.00

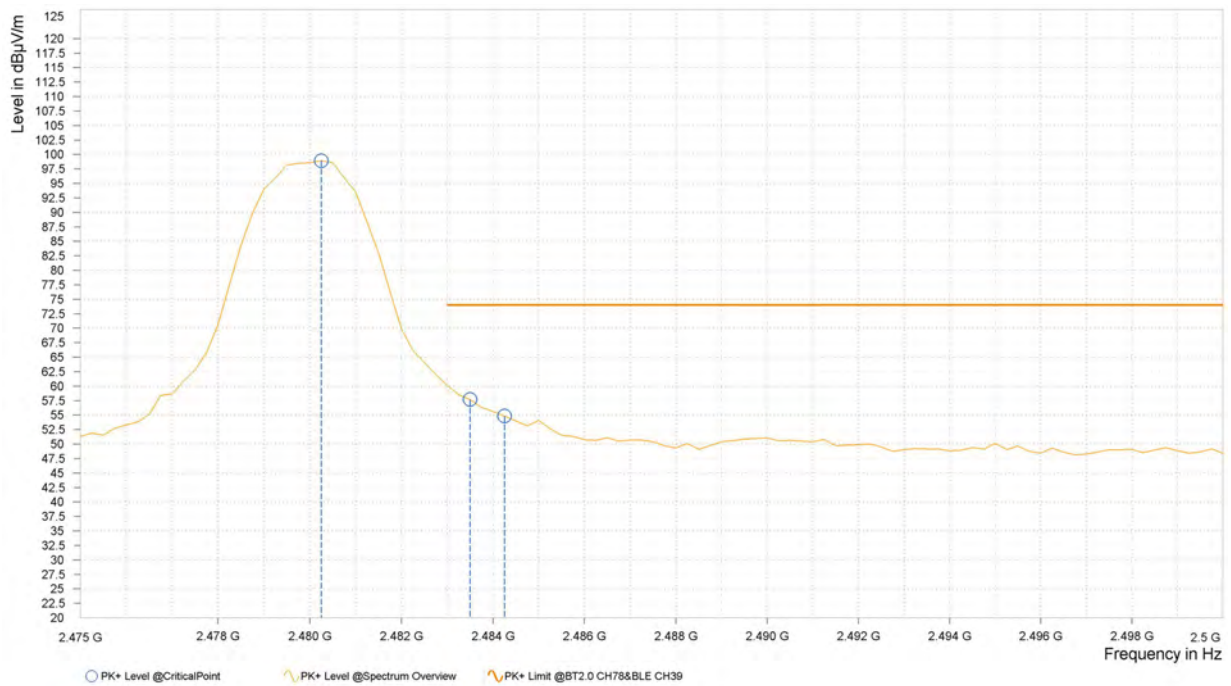



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.000	78.79			7.36	H	4.9	1.00
6	2,483.500	36.38	54.00	17.62	7.36	H	213.7	2.00
6	2,490.000	37.03	54.00	16.97	7.37	H	213.7	2.00

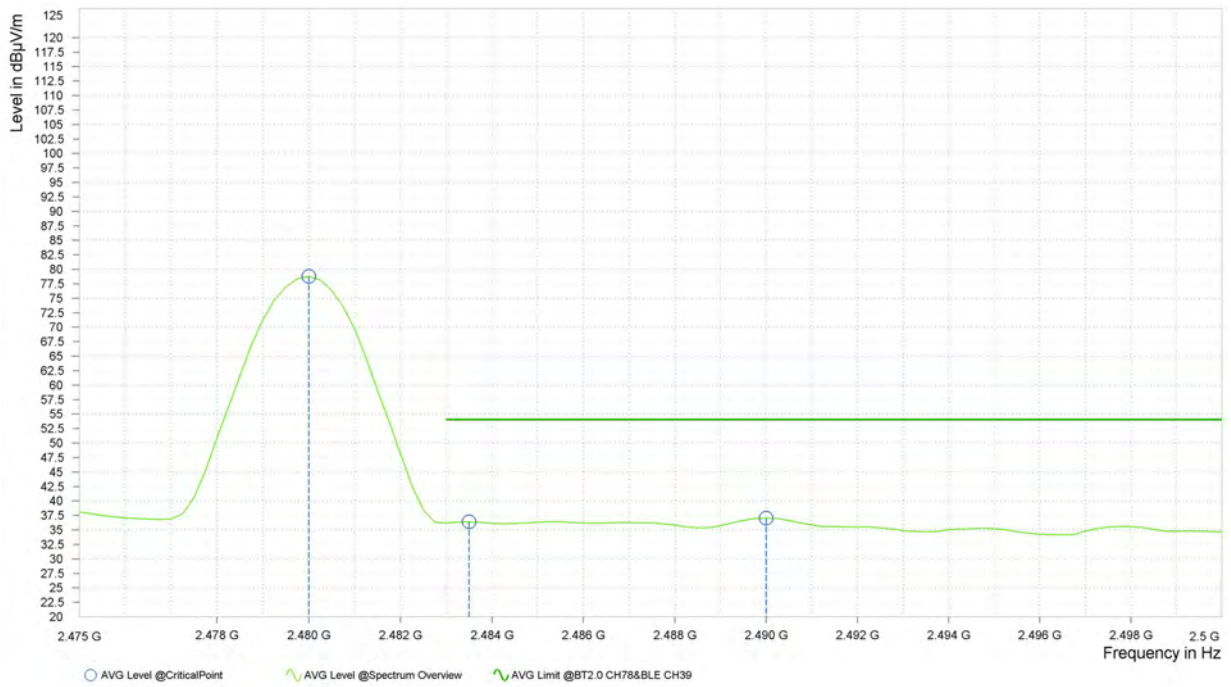




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.250	95.34			7.36	V	54.6	2.00
6	2,483.500	54.73	74.00	19.27	7.36	V	1	2.00
6	2,484.000	52.83	74.00	21.17	7.36	V	1	2.00

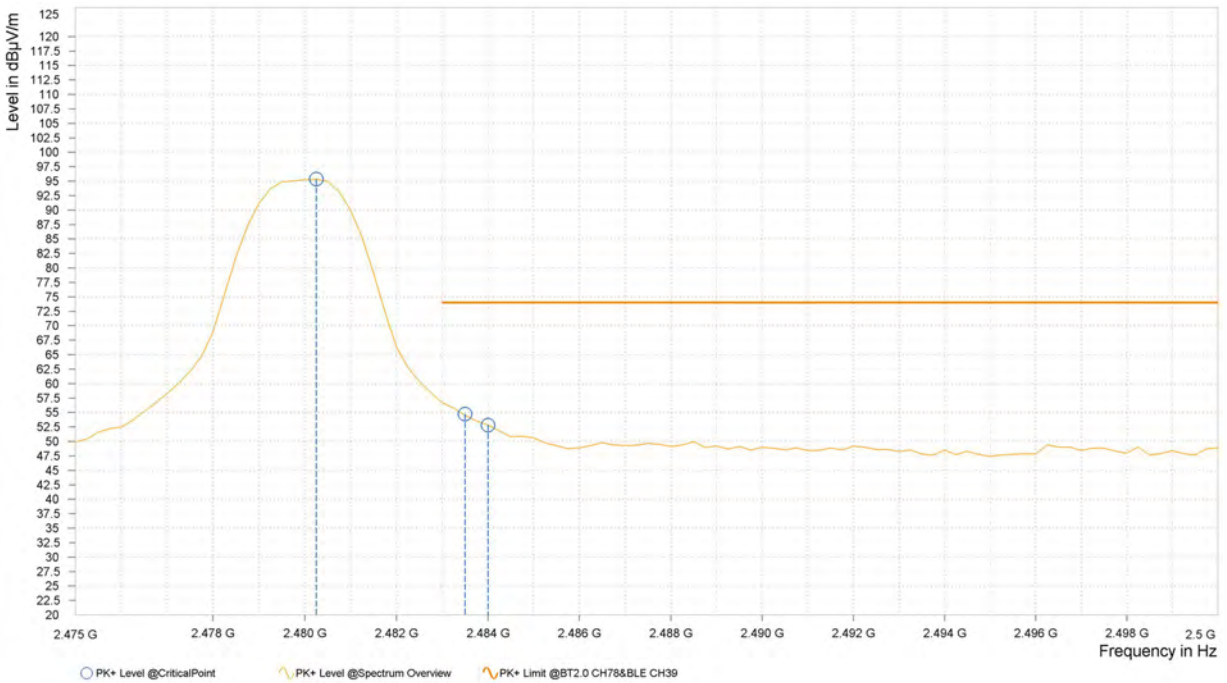



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.000	75.52			7.36	V	3.9	2.00
6	2,483.500	35.33	54.00	18.67	7.36	V	146.3	1.00
6	2,487.500	36.09	54.00	17.91	7.36	V	146.3	1.00

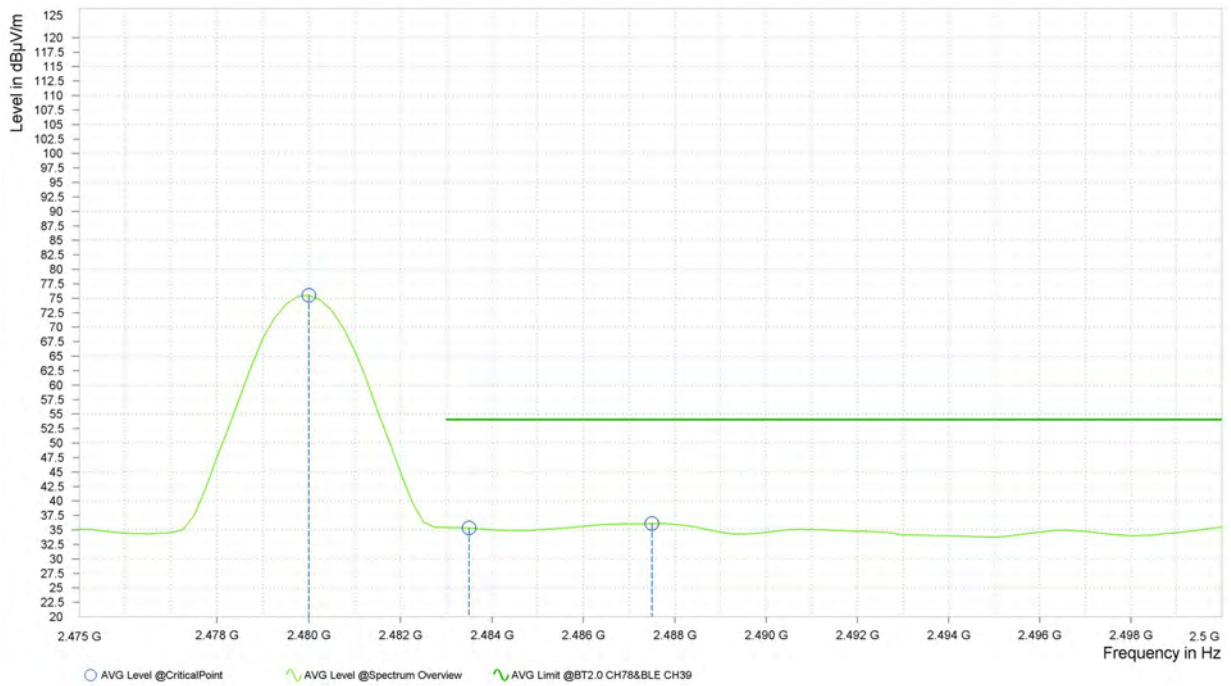

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2480MHz: Fundamental frequency.



3.3 6 dB BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

3.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	R&S	ESW 44	101973	Feb.25,22	Feb.24,24
Open Switch and Control Unit	R&S	OSP-B157W8	100836	N/A	N/A
Vector Signal Generator	R&S	SMBV100B	102176	Feb.16,22	Feb.15,24
Vector Signal Generator	R&S	SMBV100B	102176	Feb.15,24	Feb.14,26
Signal Generator	R&S	SMB100A03	182185	Feb.16,22	Feb.15,24
Signal Generator	R&S	SMB100A03	182185	Feb.15,24	Feb.14,26
Wideband Radio Communication	R&S	CMW500	169399	Jun.26,22	Jun.25,24
Hygrothermograph	DELI	20210528	SZ015	Sep.06,22	Sep.05,24
PC	LENOVO	E14	HRSW0024	N/A	N/A
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Apr.28,23	Apr.27,24
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Apr.28,23	Apr.27,24
Test Software	EMC32	EMC32	N/A	N/A	N/A
Temperature Chamber	votsch	VT4002	58566078100050	May.31,22	May.30,24

NOTE:

1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.




3.3.3 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3.4 DEVIATION FROM TEST STANDARD

No deviation.

3.3.5 TEST SETUP

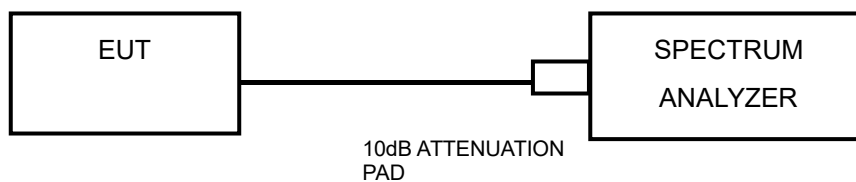

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



BUREAU VERITAS Test Report No.: PSU-NQN2402040109RF06

3.3.7 TEST RESULTS

Please Refer to Appendix1/2 Of this test report.




3.4 CONDUCTED OUTPUT POWER

3.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

3.4.2 TEST SETUP

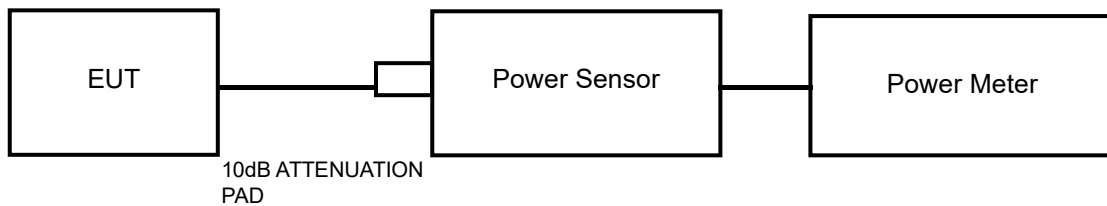

3.4.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



BUREAU VERITAS Test Report No.: PSU-NQN2402040109RF06

3.4.7 TEST RESULTS

3.4.7.1 MAXIMUM PEAK OUTPUT POWER

Please Refer to Appendix1/2 Of this test report.



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06

3.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

Please Refer to Appendix1/2 Of this test report.




3.5 POWER SPECTRAL DENSITY MEASUREMENT

3.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

3.5.2 TEST SETUP



3.5.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW $\geq 3 \times$ RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



BUREAU Test Report No.: PSU-NQN2402040109RF06
VERITAS

3.5.7 TEST RESULTS

Please Refer to Appendix1/2 Of this test report.




3.6 OUT OF BAND EMISSION MEASUREMENT

3.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

3.6.2 TEST SETUP

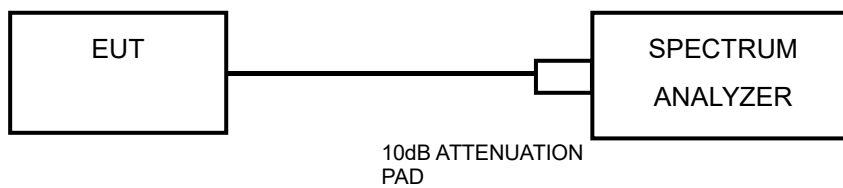

3.6.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

3.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.6.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.

Please Refer to Appendix1/2 Of this test report.



3.7 ANTENNA REQUIREMENTS

3.7.1 STANDARD APPLICABLE

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 ANTENNA CONNECTED CONSTRUCTION

An embedded-in antenna design is used.

3.7.3 ANTENNA GAIN

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit and PSD limit.



4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



BUREAU VERITAS Test Report No.: PSU-NQN2402040109RF06

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



6 APPENDIX 1


WLAN 2.4G DTS BANDWIDTH TEST RESULT

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant0	2412	8.661	2407.870	2416.531	0.5	PASS
	Ant0	2437	9.111	2432.419	2441.530	0.5	PASS
	Ant0	2462	8.661	2457.419	2466.080	0.5	PASS
11G	Ant0	2412	8.661	2407.870	2416.531	0.5	PASS
	Ant0	2437	9.111	2432.419	2441.530	0.5	PASS
	Ant0	2462	8.661	2457.419	2466.080	0.5	PASS
11N20	Ant0	2412	15.569	2404.365	2419.934	0.5	PASS
	Ant0	2437	16.270	2429.165	2445.435	0.5	PASS
	Ant0	2462	15.820	2453.765	2469.585	0.5	PASS
11N40	Ant0	2422	35.222	2404.414	2439.636	0.5	PASS
	Ant0	2437	36.423	2418.814	2455.237	0.5	PASS
	Ant0	2452	35.222	2434.414	2469.636	0.5	PASS




TEST GRAPHS

11B-CDD_Ant0_2412

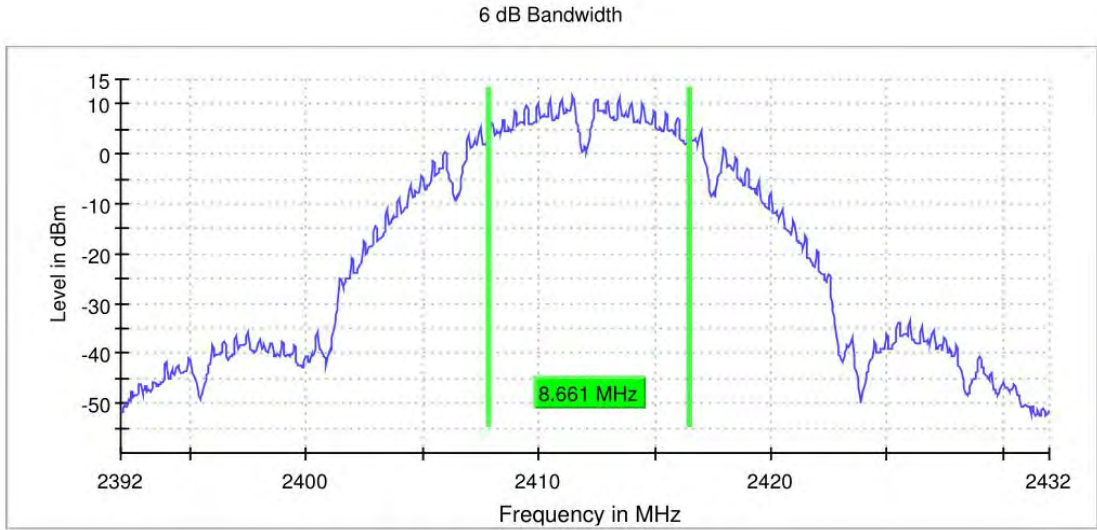


11B_Ant0_2437

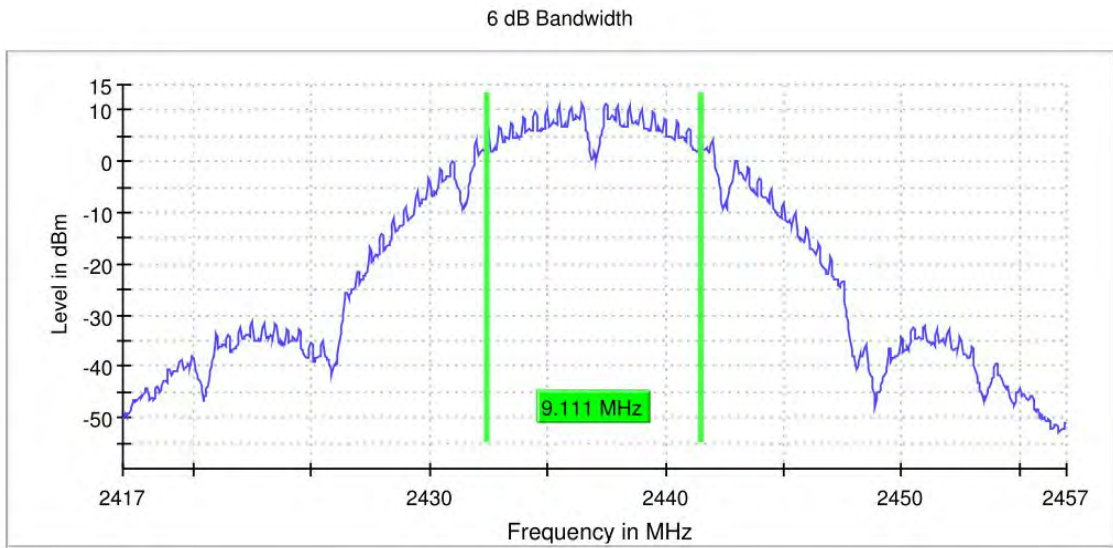




11B_Ant0_2462

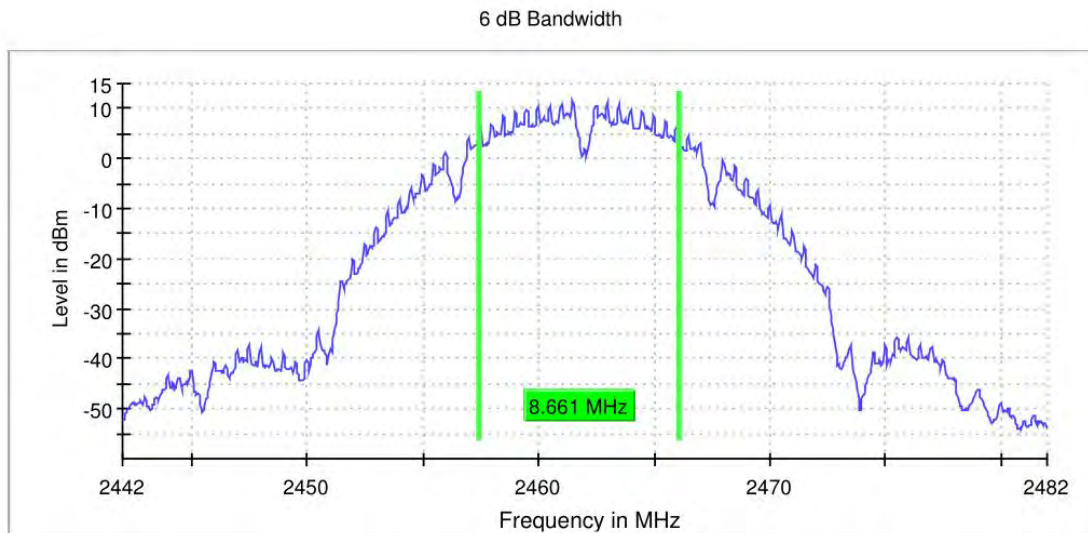


11G_Ant0_2412

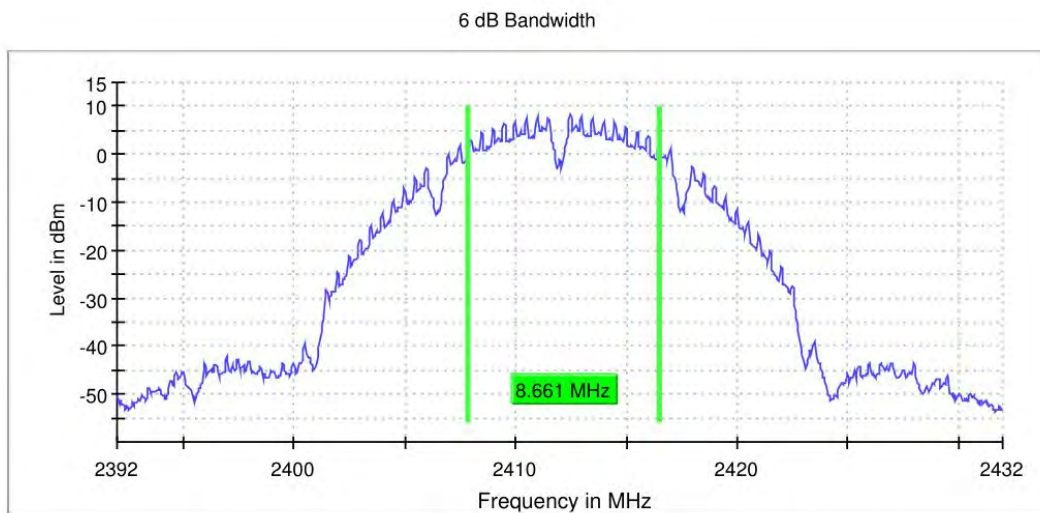




11G_Ant0_2437

6 dB Bandwidth

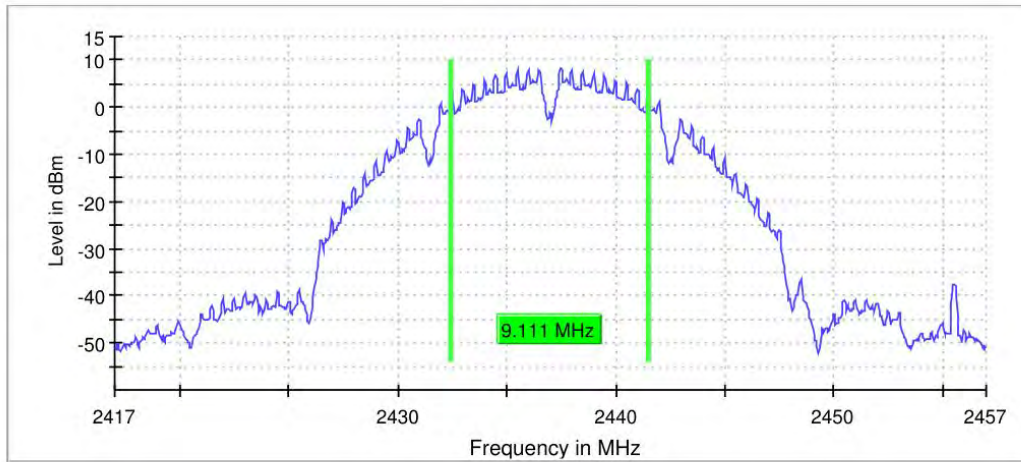

11G_Ant0_2462


6 dB Bandwidth

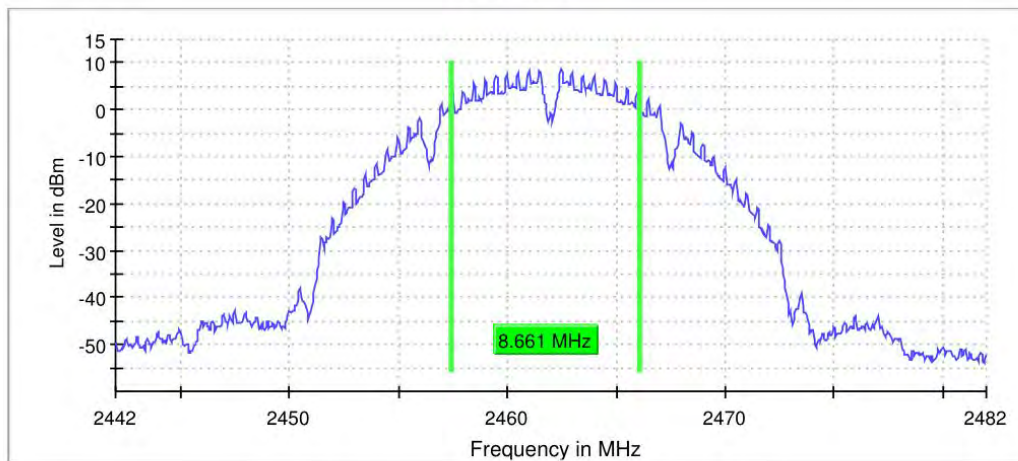




11N20_Ant0_2412

6 dB Bandwidth

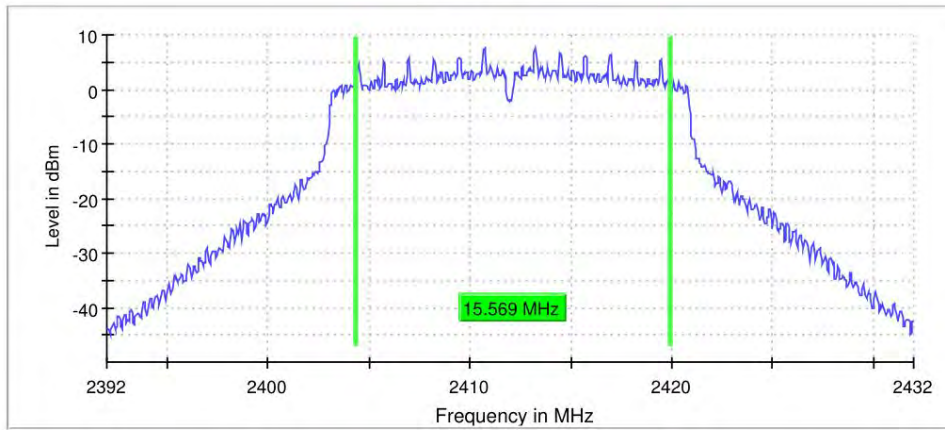

11N20_Ant0_2437

6 dB Bandwidth

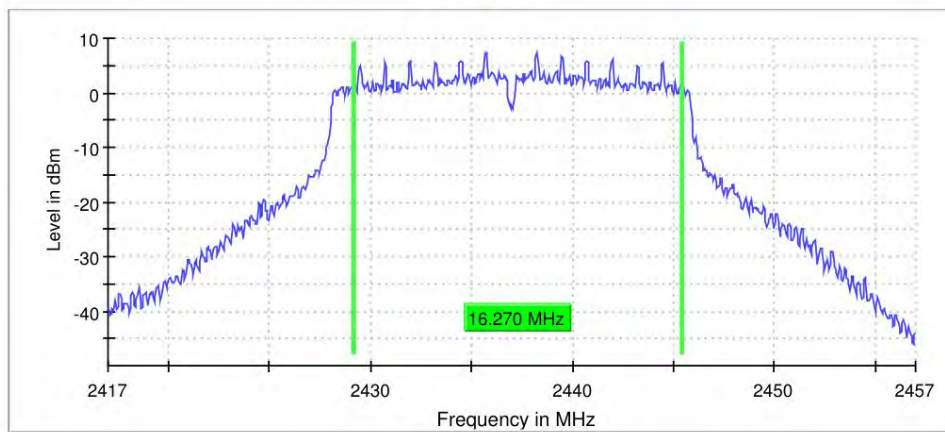




BUREAU
VERITAS

Test Report No.: PSU-NQN2402040109RF06


11N20_Ant0_2462

6 dB Bandwidth

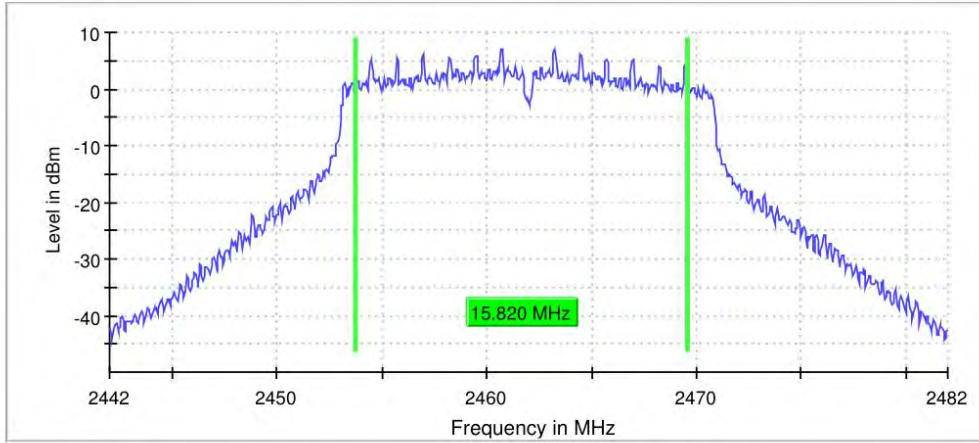

11N40_Ant0_2422


6 dB Bandwidth

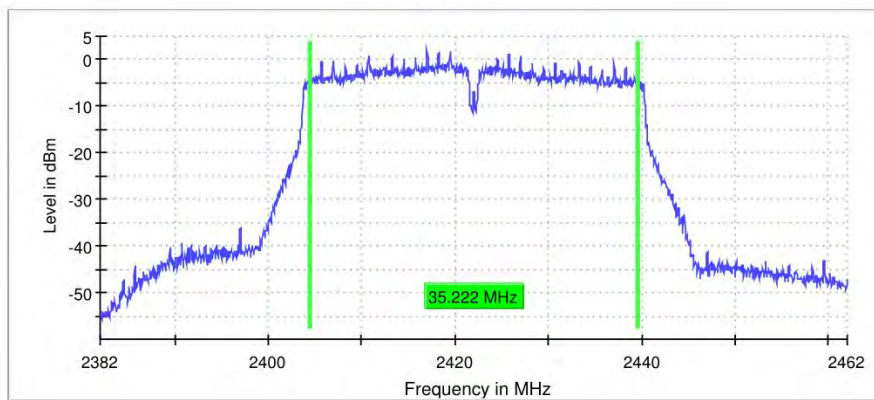




11N40_Ant0_2437

6 dB Bandwidth

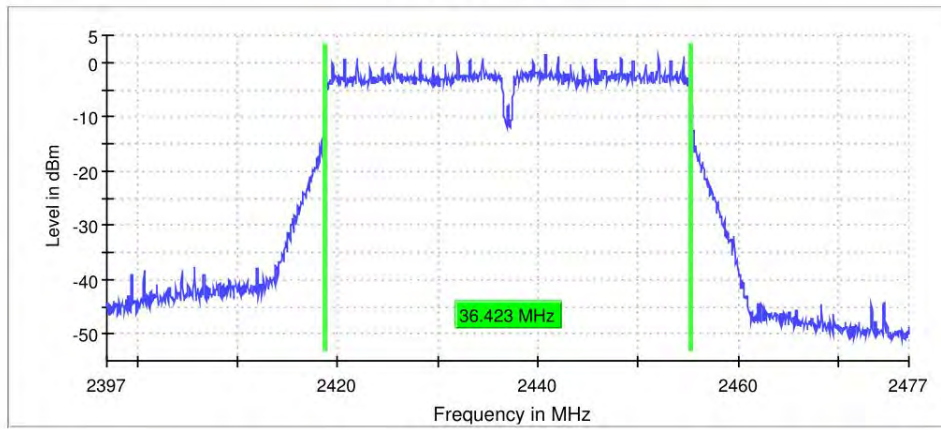

11N40_Ant0_2452

6 dB Bandwidth

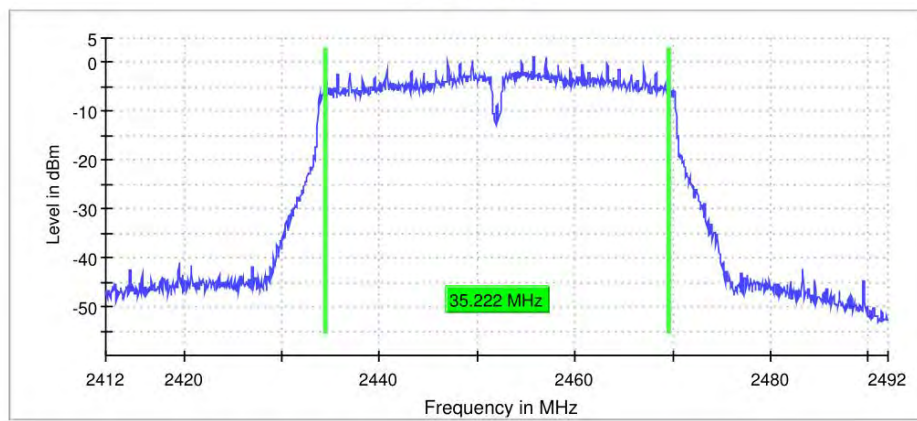



MAXIMUM CONDUCTED OUTPUT POWER

TEST RESULT PEAK

TestMode	Antenna	Frequency [MHz]	Peak power [dBm]	Peak power [mw]	Limit [dBm]	Verdict	Power Setting
11B	Ant0	2412	21.68	147.23	≤30.00	PASS	17.5
	Ant0	2437	22.29	169.43	≤30.00	PASS	17.5
	Ant0	2462	21.96	157.04	≤30.00	PASS	17.5
11G	Ant0	2412	21.70	147.91	≤30.00	PASS	15
	Ant0	2437	23.33	215.28	≤30.00	PASS	16
	Ant0	2462	21.57	143.55	≤30.00	PASS	15
11N20-	Ant0	2412	21.60	144.54	≤30.00	PASS	15
	Ant0	2437	23.31	214.29	≤30.00	PASS	16
	Ant0	2462	21.48	140.60	≤30.00	PASS	15
11N40	Ant0	2412	21.19	131.52	≤30.00	PASS	13
	Ant0	2437	21.91	155.24	≤30.00	PASS	13
	Ant0	2462	21.11	129.12	≤30.00	PASS	13.5

TEST RESULT AVERAGE

Test Mode	Antenna	Frequency [MHz]	Average power [dBm]	Limit [dBm]	Verdict	Power Setting
11B -SISO	Ant0	2412	17.99	/	PASS	17.5
	Ant0	2437	18.62	/	PASS	17.5
	Ant0	2462	18.25	/	PASS	17.5
11G -SISO	Ant0	2412	15.57	/	PASS	15
	Ant0	2437	17.06	/	PASS	16
	Ant0	2462	15.38	/	PASS	15
11N20 -SISO	Ant0	2412	15.37	/	PASS	15
	Ant0	2437	16.88	/	PASS	16
	Ant0	2462	15.20	/	PASS	15



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2402040109RF06

11N40 -SISO	Ant0	2422	13.52	/	PASS	13
	Ant0	2437	14.08	/	PASS	13
	Ant0	2452	13.29	/	PASS	13.5



MAXIMUM POWER SPECTRAL DENSITY

TEST RESULT

TestMode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant0	2412	-3.23	≤8.00	PASS
	Ant0	2437	-8.66	≤8.00	PASS
	Ant0	2462	-3.06	≤8.00	PASS
11G	Ant0	2412	-8.83	≤8.00	PASS
	Ant0	2437	-8.66	≤8.00	PASS
	Ant0	2462	-9.48	≤8.00	PASS
11N20	Ant0	2412	-9.22	≤8.00	PASS
	Ant0	2437	-8.89	≤8.00	PASS
	Ant0	2462	-9.89	≤8.00	PASS
11N40	Ant0	2422	-14.50	≤8.00	PASS
	Ant0	2437	-14.97	≤8.00	PASS
	Ant0	2452	-15.10	≤8.00	PASS




BUREAU VERITAS


Test Report No.: PSU-NQN2402040109RF06

TEST GRAPHS

11B_Ant0_2412

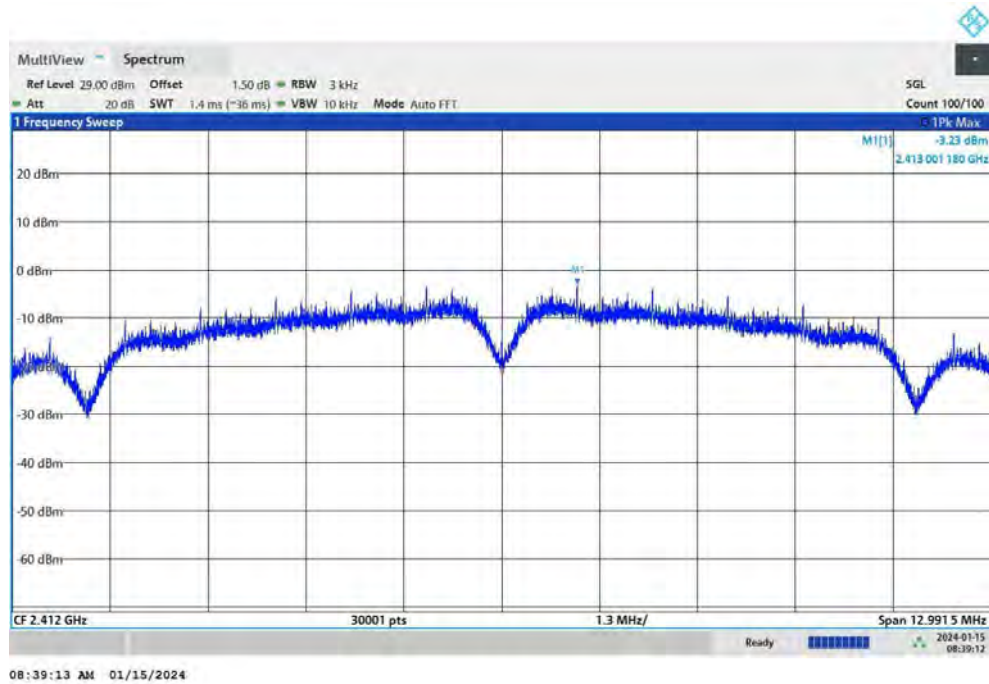

11B_Ant0_2437

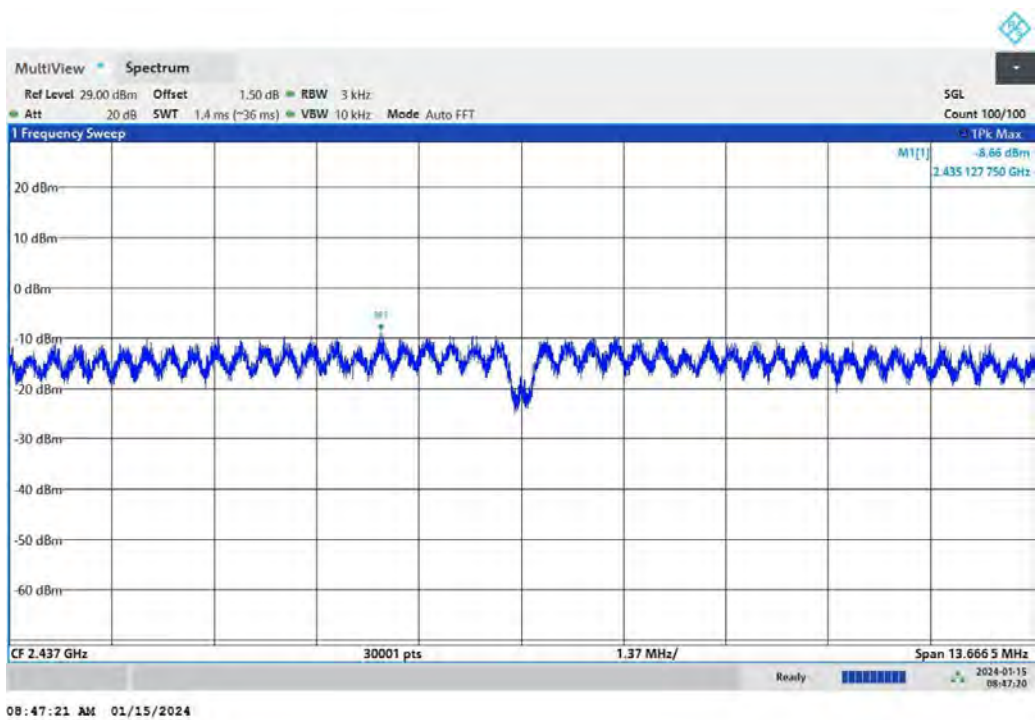




BUREAU VERITAS


Test Report No.: PSU-NQN2402040109RF06

11B_Ant0_2462

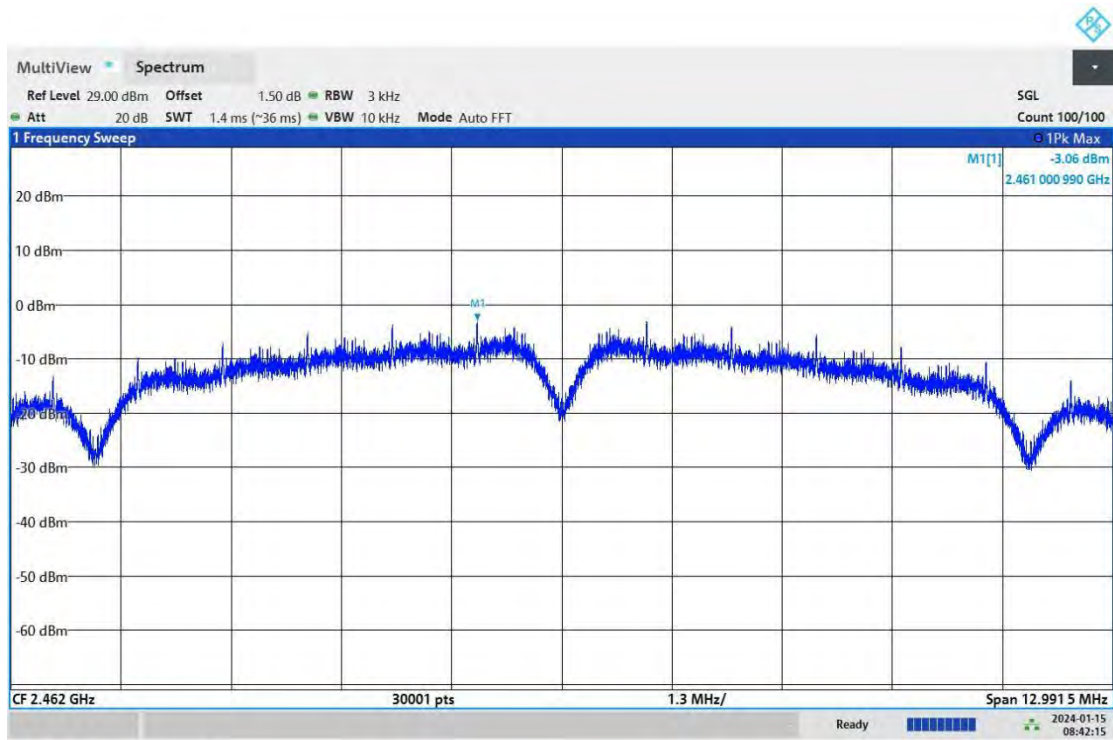

08:42:15 AM 01/15/2024

11G_Ant0_2412

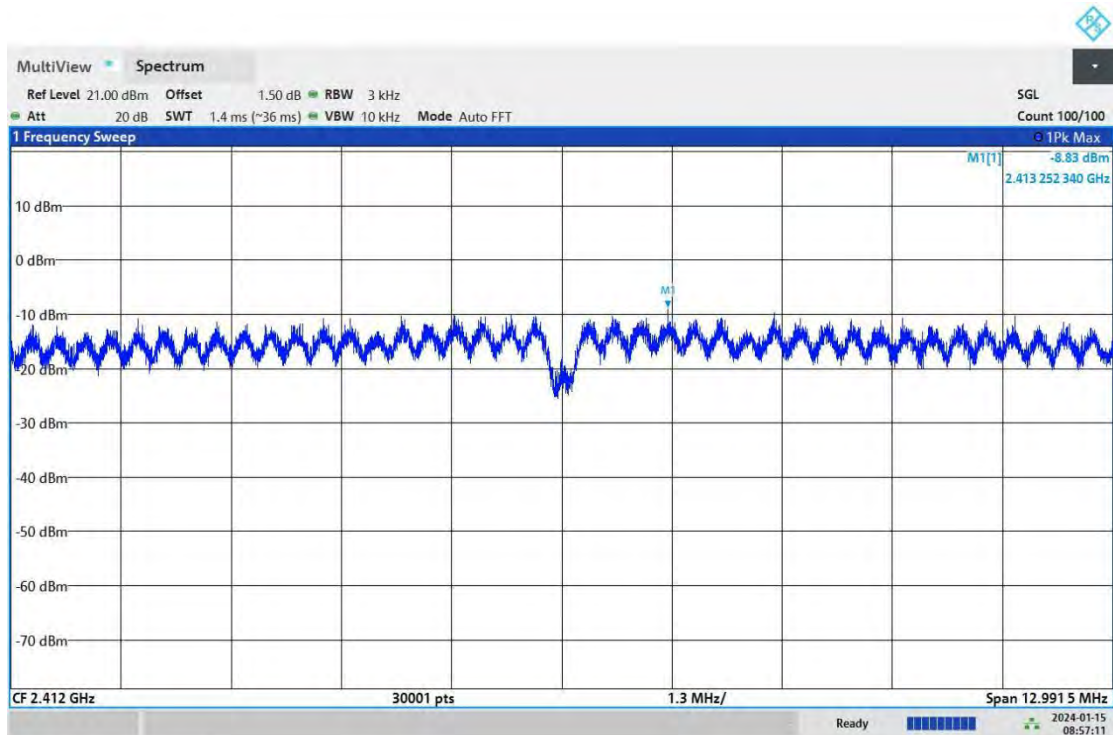


08:57:11 AM 01/15/2024




BUREAU VERITAS

Test Report No.: PSU-NQN2402040109RF06

11G_Ant0_2437

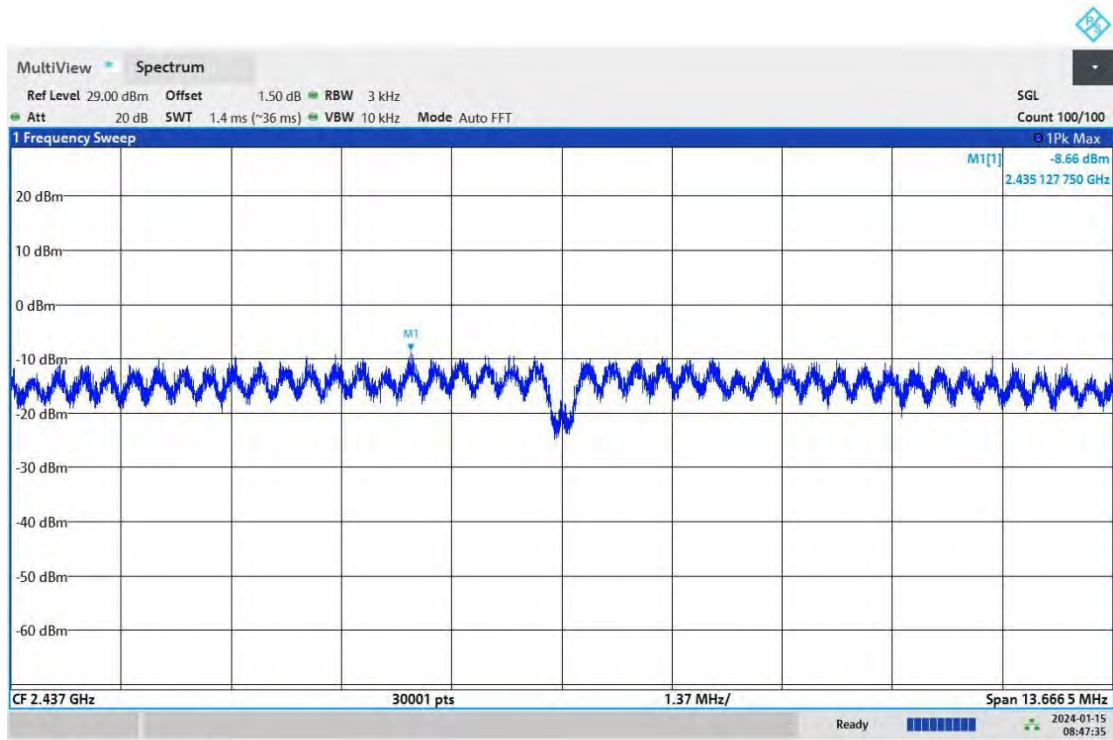

11G_Ant0_2462

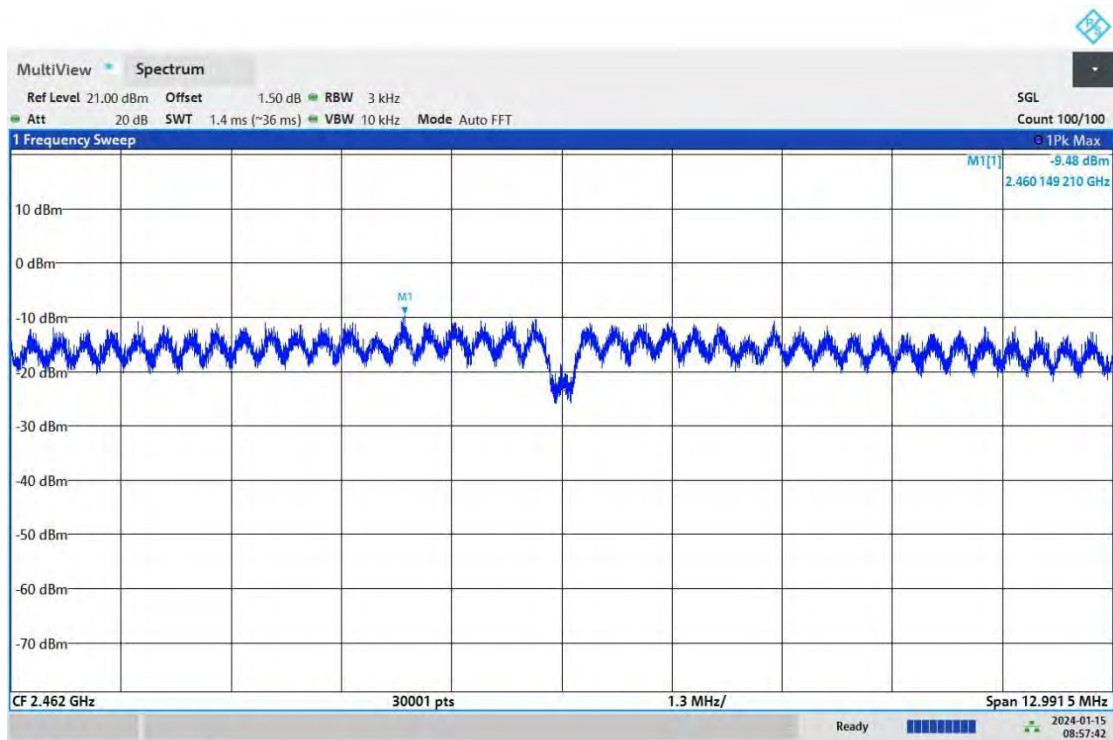




BUREAU VERITAS


Test Report No.: PSU-NQN2402040109RF06

11N20_Ant0_2412

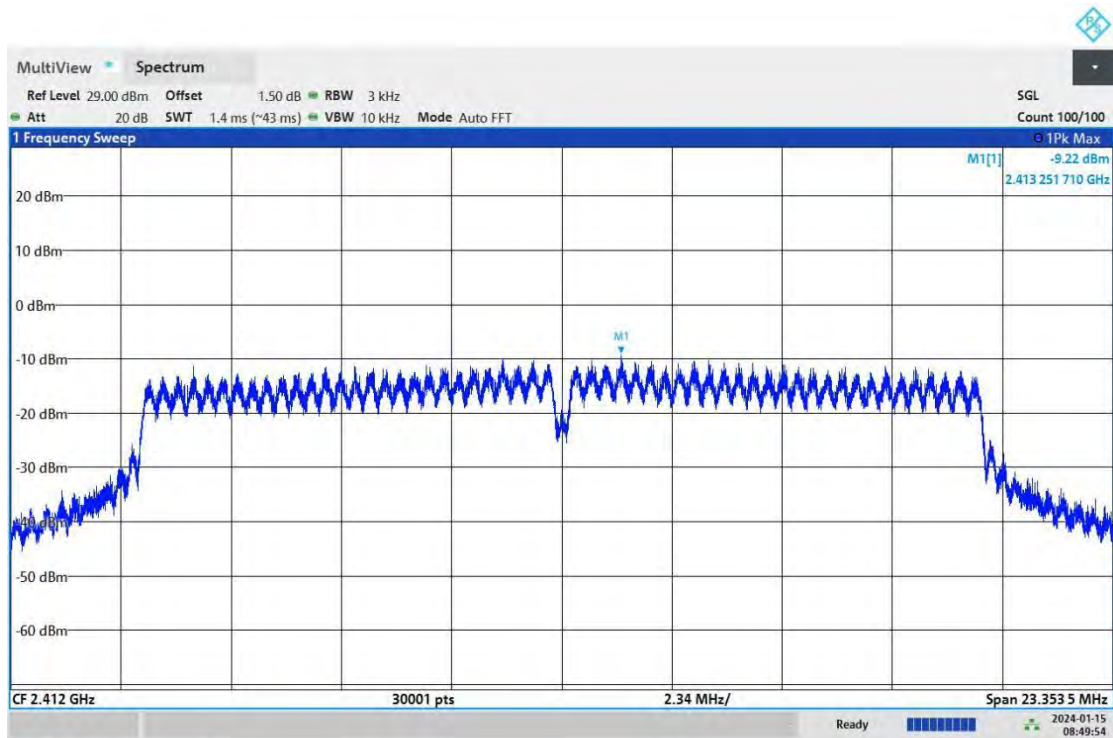

08:49:55 AM 01/15/2024

11N20_Ant0_2437

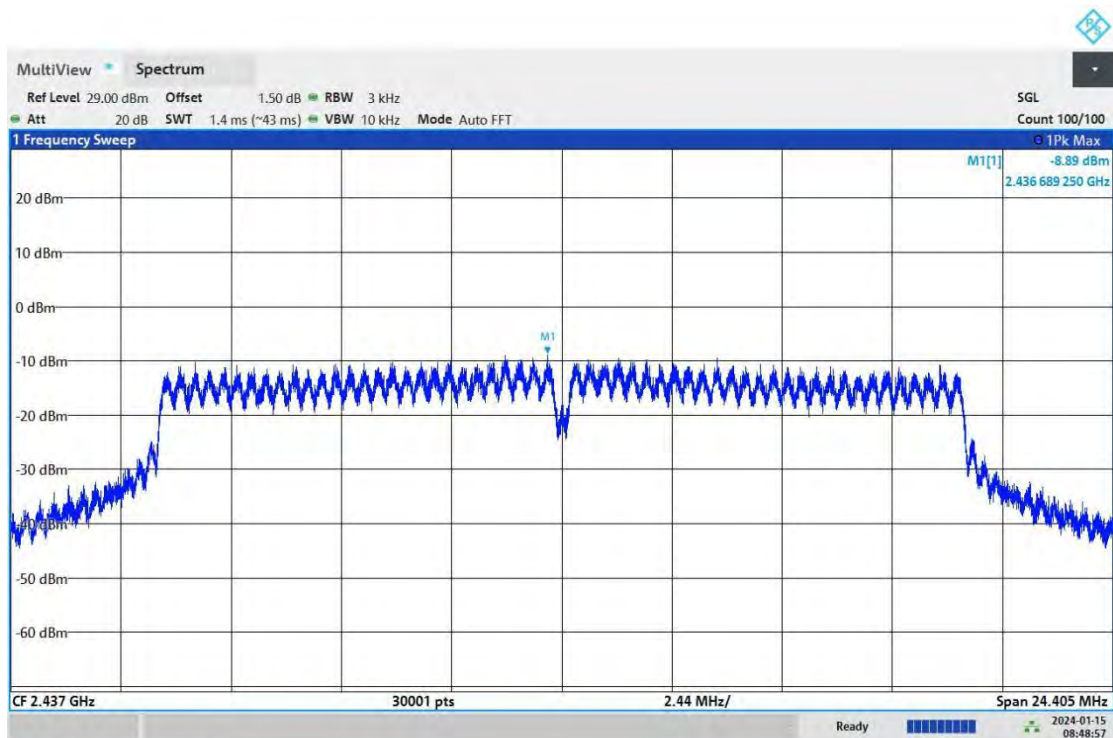


08:48:58 AM 01/15/2024



BUREAU VERITAS


Test Report No.: PSU-NQN2402040109RF06

11N20_Ant0_2462

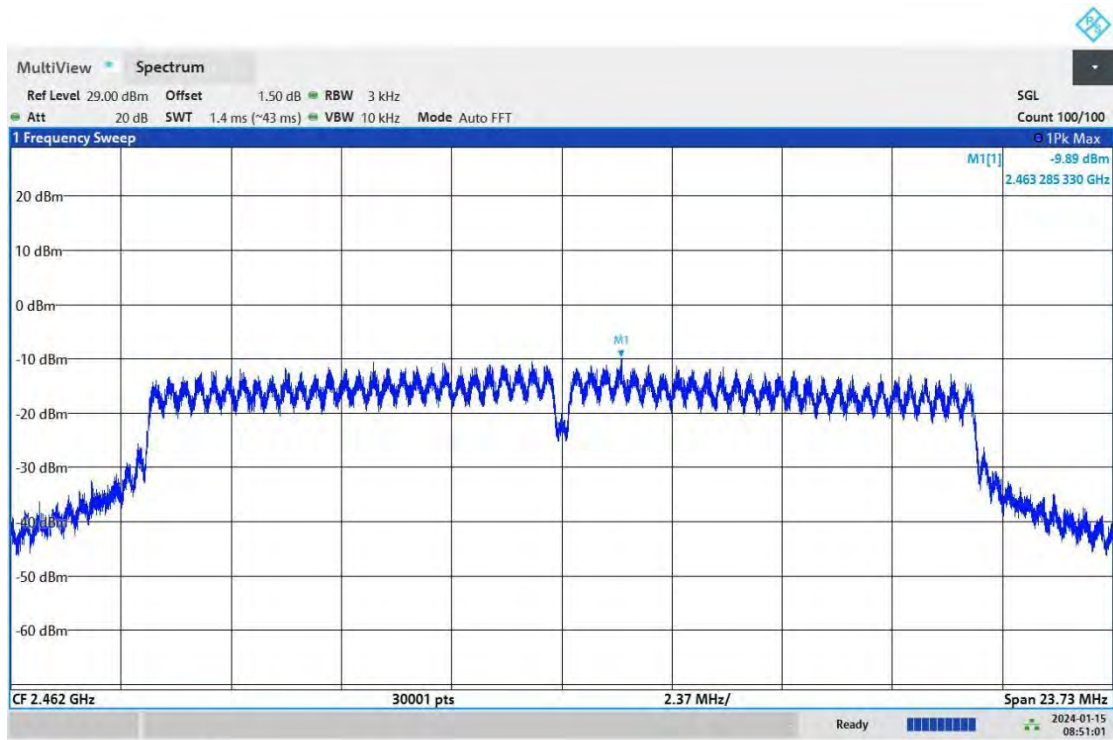

08:51:02 AM 01/15/2024

11N40_Ant0_2422

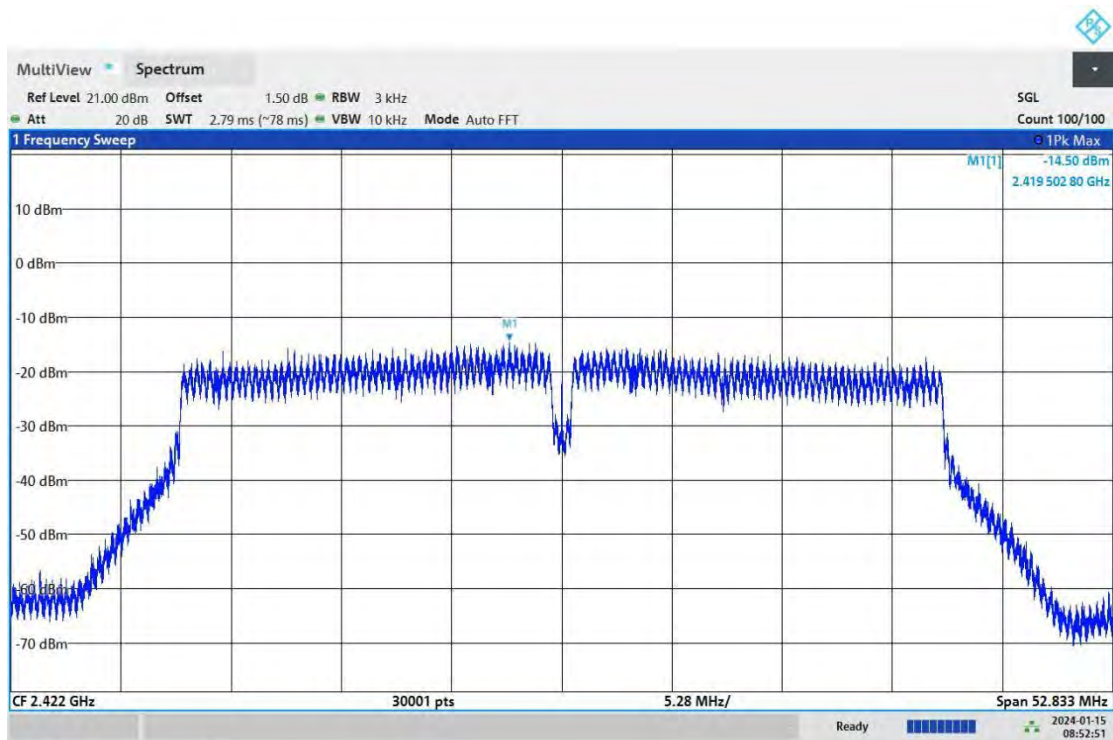

08:52:51 AM 01/15/2024