




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,322.800	76.74			3.53	H	346.6	1.00
6	5,350.000	37.35	54.00	16.65	3.60	H	5.1	1.00
6	5,351.200	37.25	54.00	16.75	3.60	H	346.6	1.00





ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,323.600	98.49			3.54	V	312.7	2.00
6	5,350.000	51.45	74.00	22.55	3.60	V	1.2	2.00
6	5,350.400	52.29	74.00	21.71	3.60	V	56.8	2.00

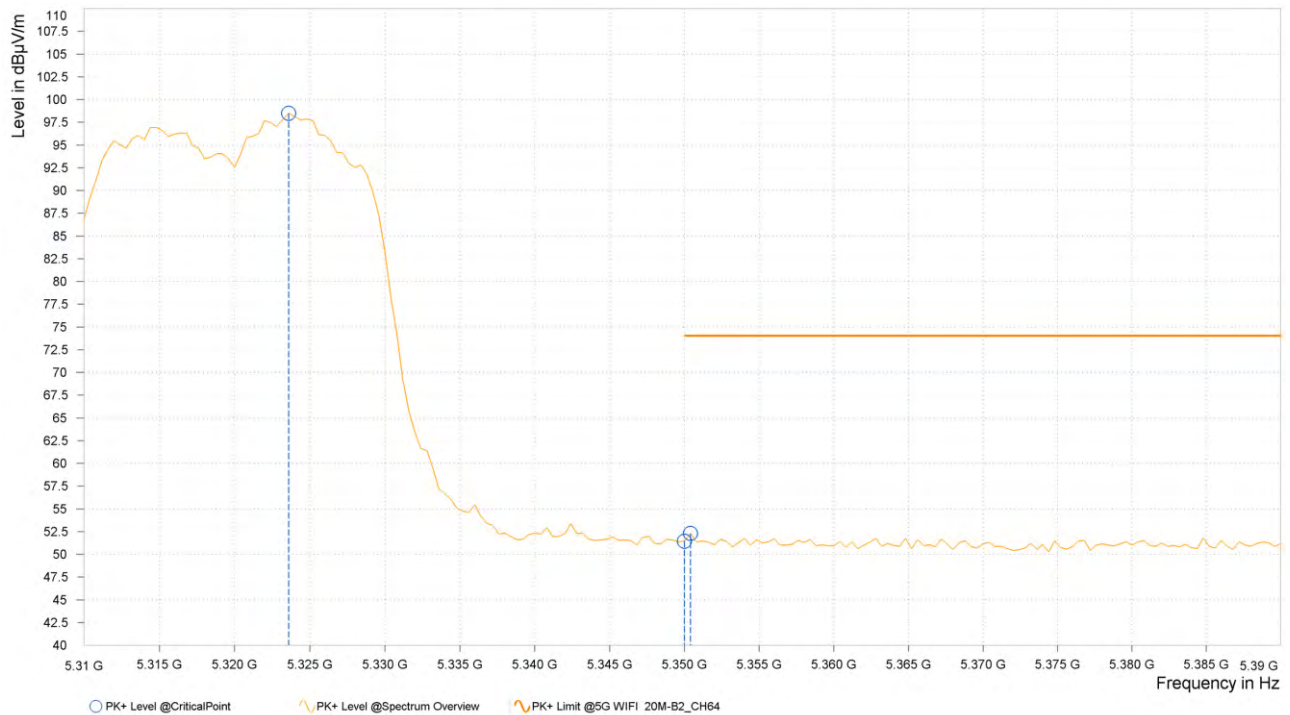



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,323.200	79.12			3.54	V	313.9	2.00
6	5,350.000	37.34	54.00	16.66	3.60	V	110.7	2.00
6	5,350.400	37.40	54.00	16.60	3.60	V	313.9	2.00



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 5260MHz: Fundamental frequency.



**BUREAU
VERITAS**


Test Report No.: PSU-NQN2403180115RF03

802.11ax (20MHz) (RU52):

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,300.900	90.62			3.48	H	359.1	1.00
5	5,350.000	51.08	74.00	22.92	3.60	H	359	2.00
5	5,356.700	52.70	74.00	21.30	3.61	H	108.4	2.00

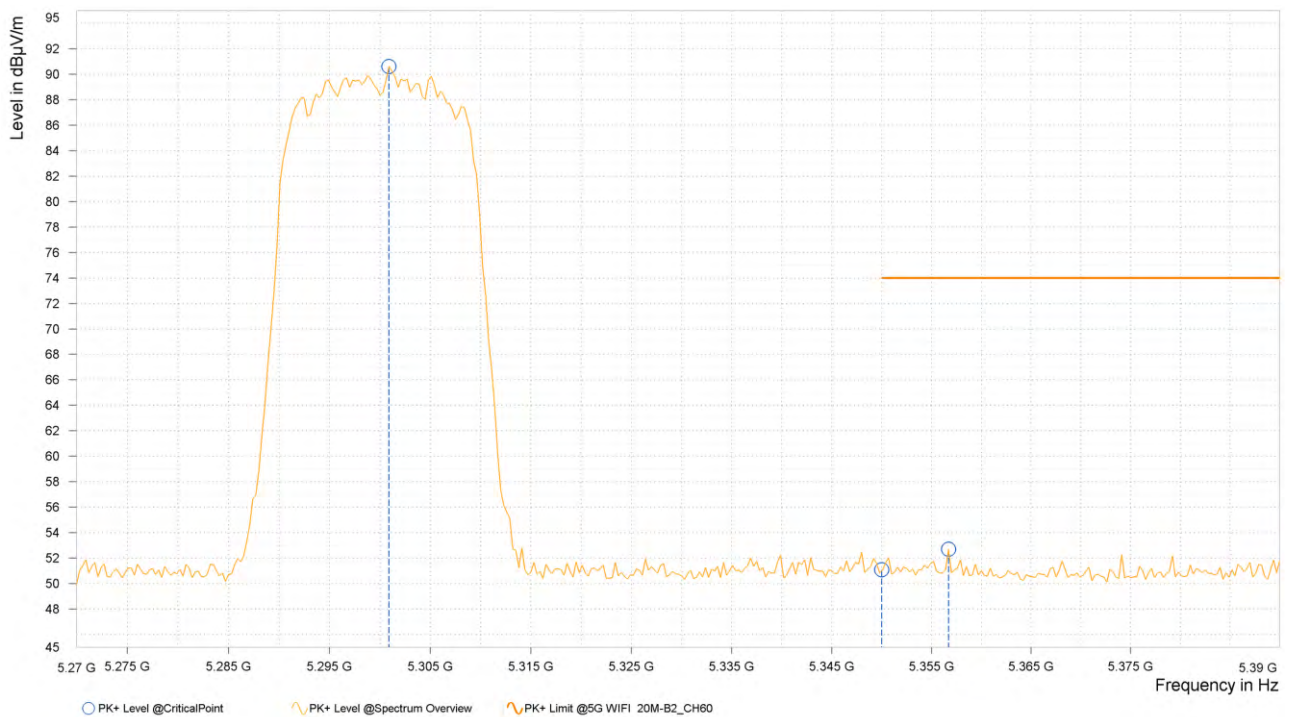




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,301.500	71.61			3.48	H	359	1.00
5	5,350.000	37.28	54.00	16.72	3.60	H	359	2.00
5	5,350.400	37.41	54.00	16.59	3.60	H	0.9	2.00





ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,302.400	94.60			3.48	V	253	1.00
5	5,350.000	51.37	74.00	22.63	3.60	V	312.7	2.00
5	5,366.300	52.37	74.00	21.63	3.61	V	100	1.00

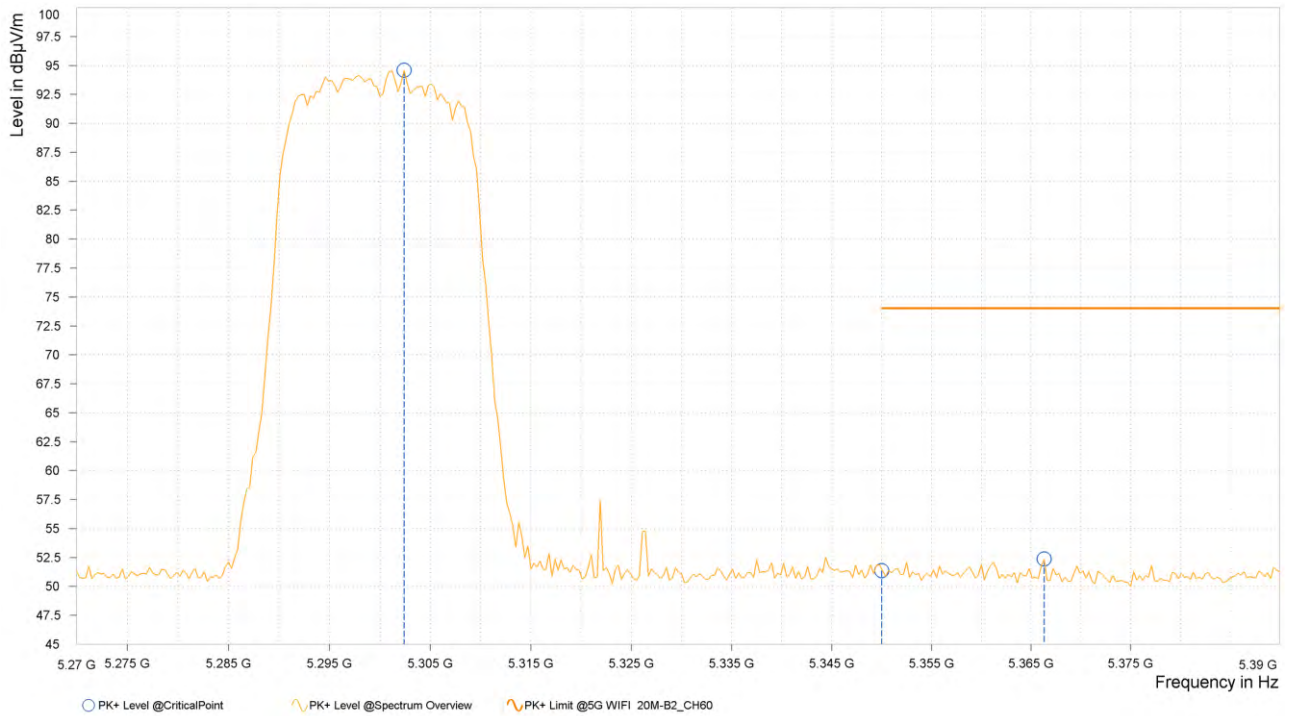



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,303.000	75.89			3.49	V	156.2	2.00
5	5,350.000	37.44	54.00	16.56	3.60	V	199	1.00
5	5,350.700	37.44	54.00	16.56	3.60	V	311.6	2.00



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 5180MHz: Fundamental frequency.




802.11ax (20MHz)(RU52):

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,321.200	96.02			3.53	H	5.1	1.00
6	5,350.000	51.33	74.00	22.67	3.60	H	354.9	2.00
6	5,354.800	52.98	74.00	21.02	3.60	H	354.9	2.00

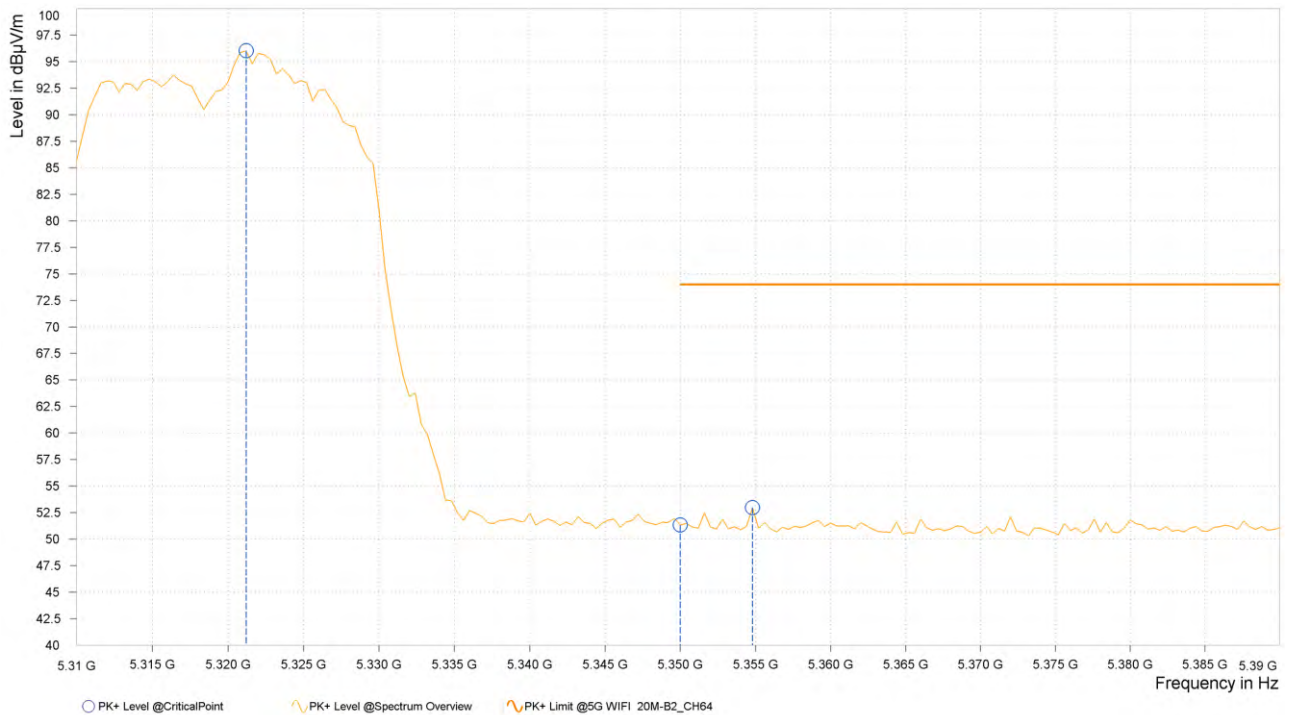




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,322.800	76.74			3.53	H	346.6	1.00
6	5,350.000	37.35	54.00	16.65	3.60	H	5.1	1.00
6	5,351.200	37.25	54.00	16.75	3.60	H	346.6	1.00





ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,323.600	98.49			3.54	V	312.7	2.00
6	5,350.000	51.45	74.00	22.55	3.60	V	1.2	2.00
6	5,350.400	52.29	74.00	21.71	3.60	V	56.8	2.00

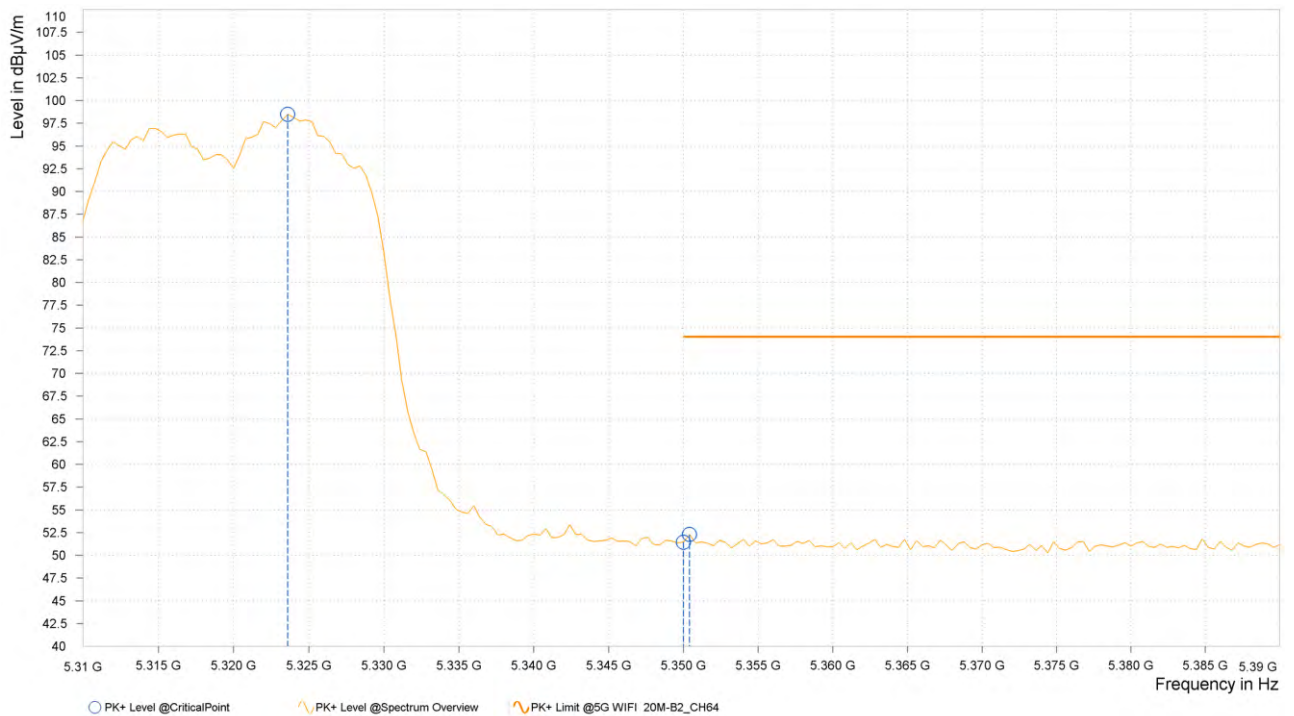



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,323.200	79.12			3.54	V	313.9	2.00
6	5,350.000	37.34	54.00	16.66	3.60	V	110.7	2.00
6	5,350.400	37.40	54.00	16.60	3.60	V	313.9	2.00



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 5300MHz: Fundamental frequency.




802.11ax (20MHz)(RU106):

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,260.800	93.12			3.52	H	1	1.00
4	5,350.000	51.07	74.00	22.93	3.60	H	256.6	1.00
4	5,382.400	51.77	74.00	22.23	3.62	H	50.8	2.00

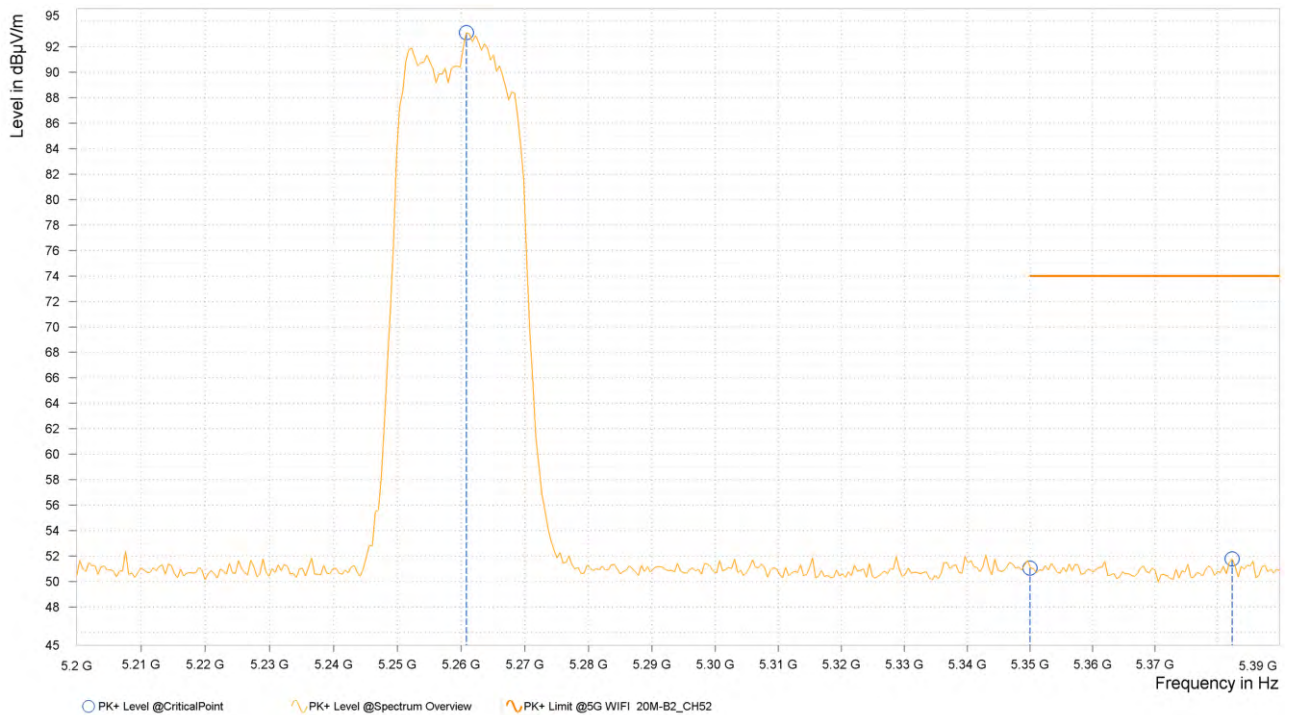



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,261.750	75.79			3.52	H	316.4	1.00
4	5,350.000	37.32	54.00	16.68	3.60	H	89.1	2.00
4	5,351.525	37.28	54.00	16.72	3.60	H	89.1	2.00

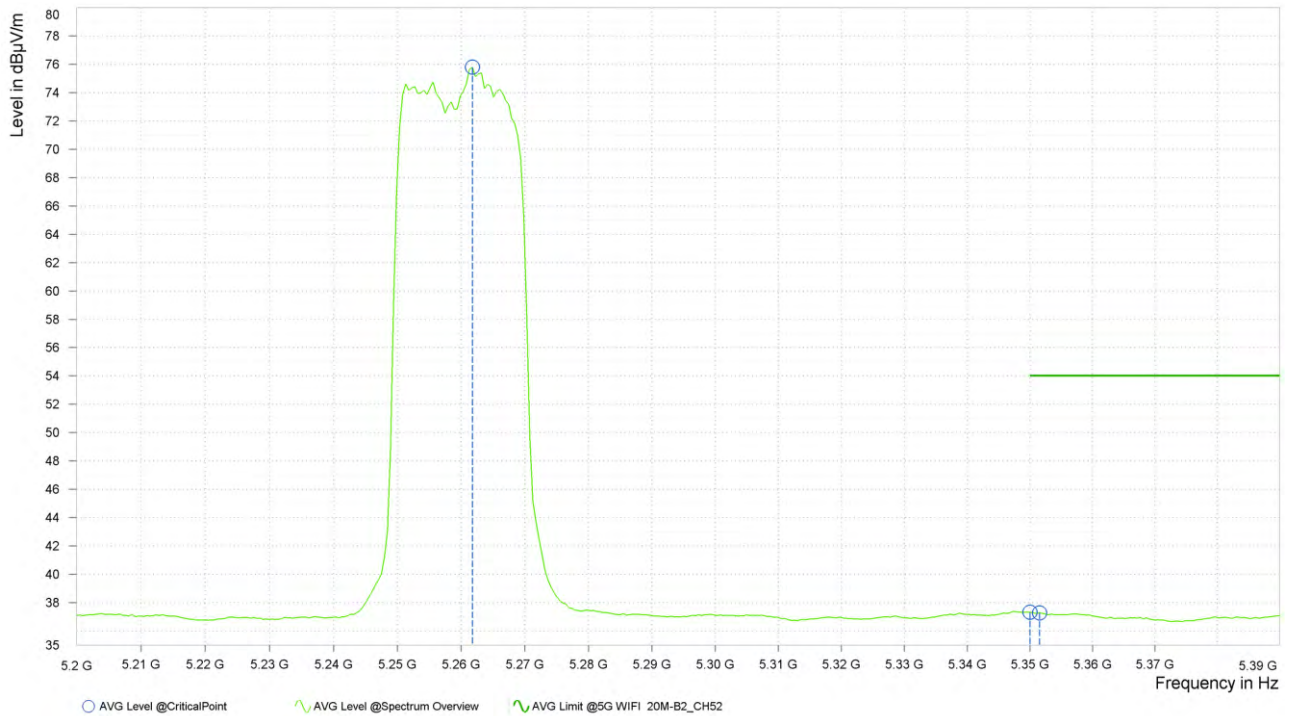




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,265.075	93.49			3.52	V	312.8	2.00
4	5,350.000	50.92	74.00	23.08	3.60	V	101.2	2.00
4	5,358.650	52.06	74.00	21.94	3.61	V	359.1	1.00





Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,255.575	81.78			3.53	V	5.1	1.00
4	5,350.000	38.70	54.00	15.30	3.60	V	310.3	2.00
4	5,350.575	38.69	54.00	15.31	3.60	V	359	2.00

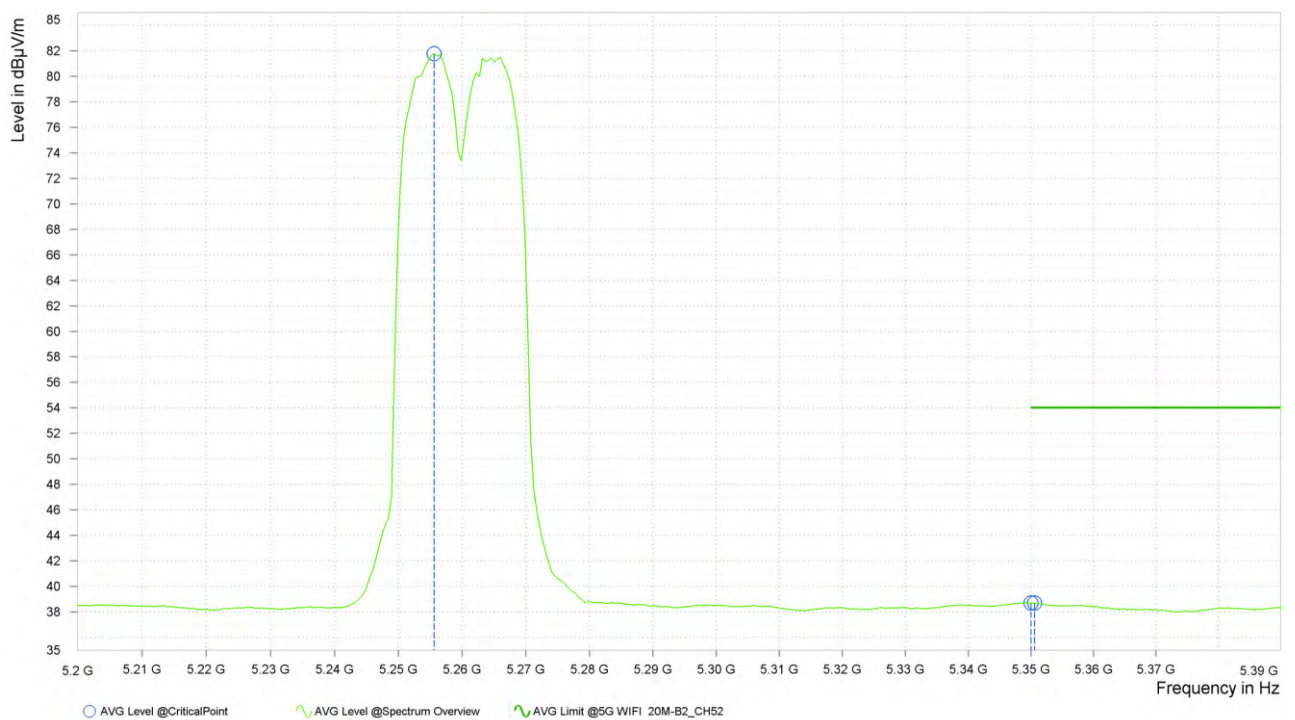

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 5260MHz: Fundamental frequency.



**BUREAU
VERITAS**


Test Report No.: PSU-NQN2403180115RF03

802.11ax (20MHz)(RU106):

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,305.100	93.51			3.49	H	257.8	2.00
5	5,350.000	51.02	74.00	22.98	3.60	H	257.8	2.00
5	5,381.300	51.79	74.00	22.21	3.62	H	351.8	1.00

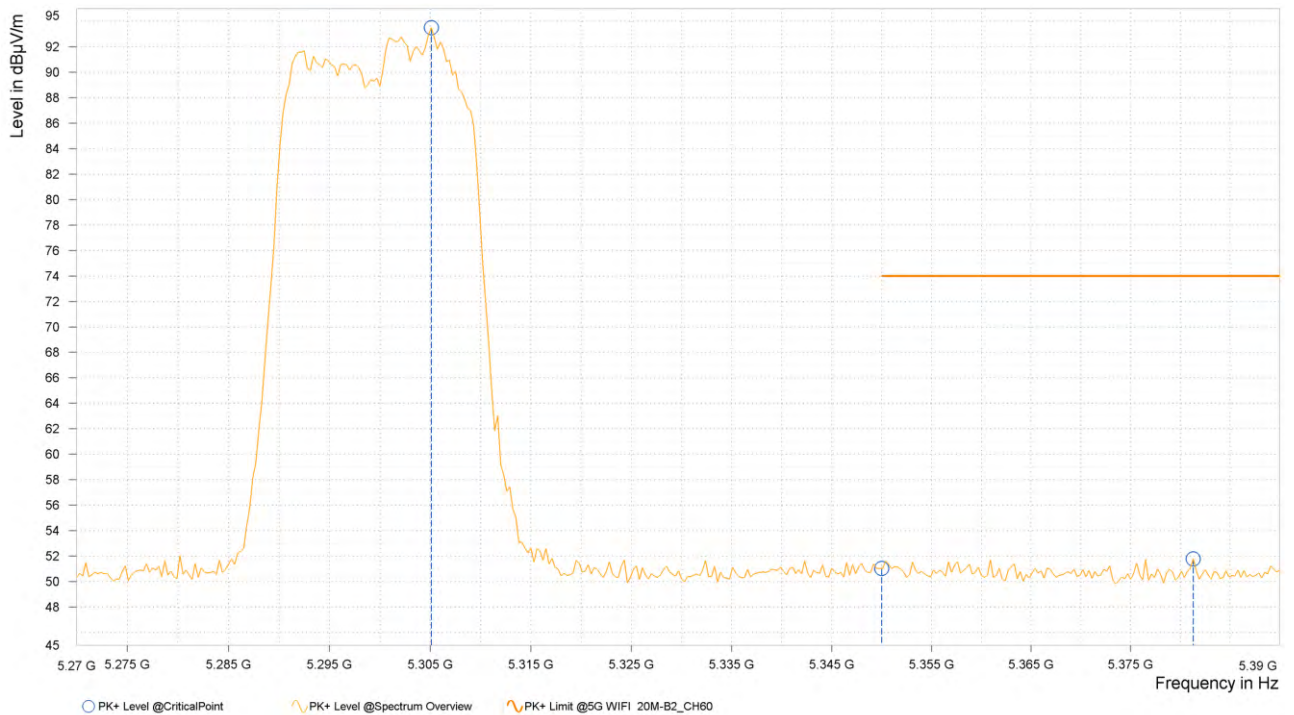




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,301.800	76.31			3.48	H	343	1.00
5	5,350.000	37.28	54.00	16.72	3.60	H	359.1	1.00
5	5,351.300	37.26	54.00	16.74	3.60	H	359	2.00






ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,294.600	96.69			3.48	V	205	1.00
5	5,350.000	51.24	74.00	22.76	3.60	V	355	2.00
5	5,383.100	52.29	74.00	21.71	3.62	V	355	2.00

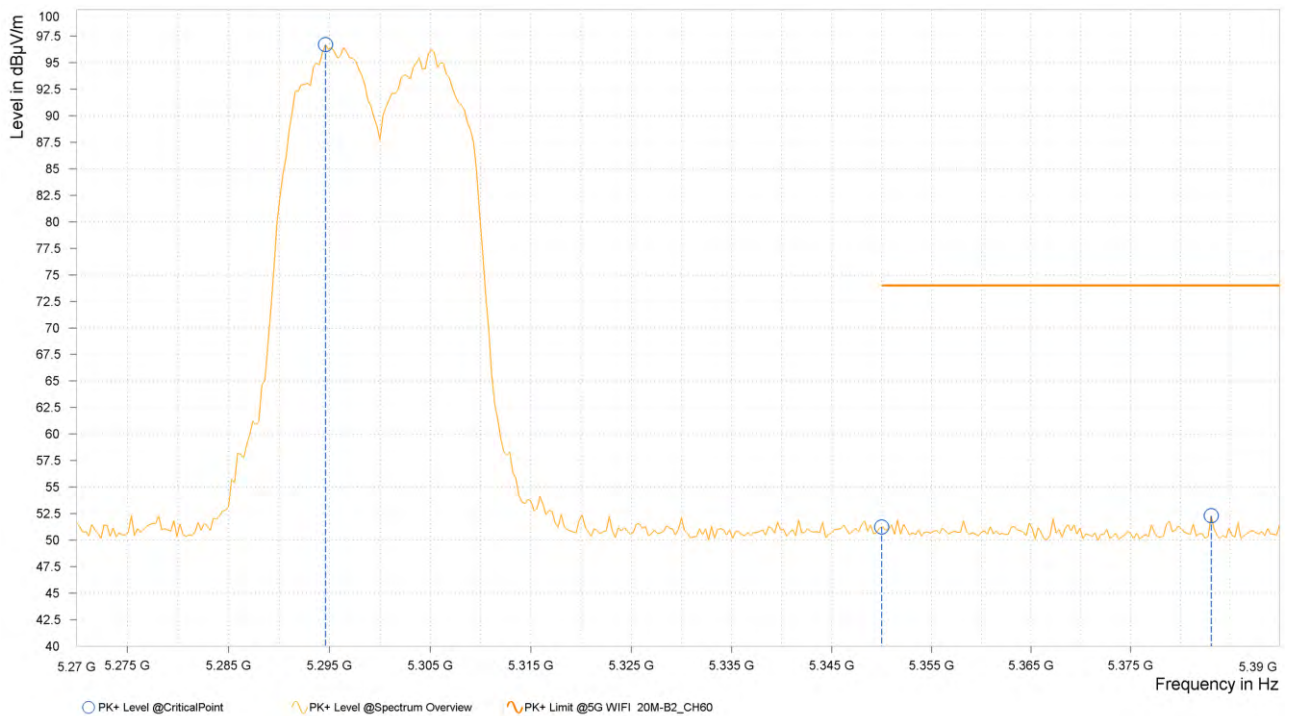



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,295.500	78.06			3.48	V	257.7	1.00
5	5,350.000	37.23	54.00	16.77	3.60	V	310.4	2.00
5	5,351.300	37.19	54.00	16.81	3.60	V	259	2.00

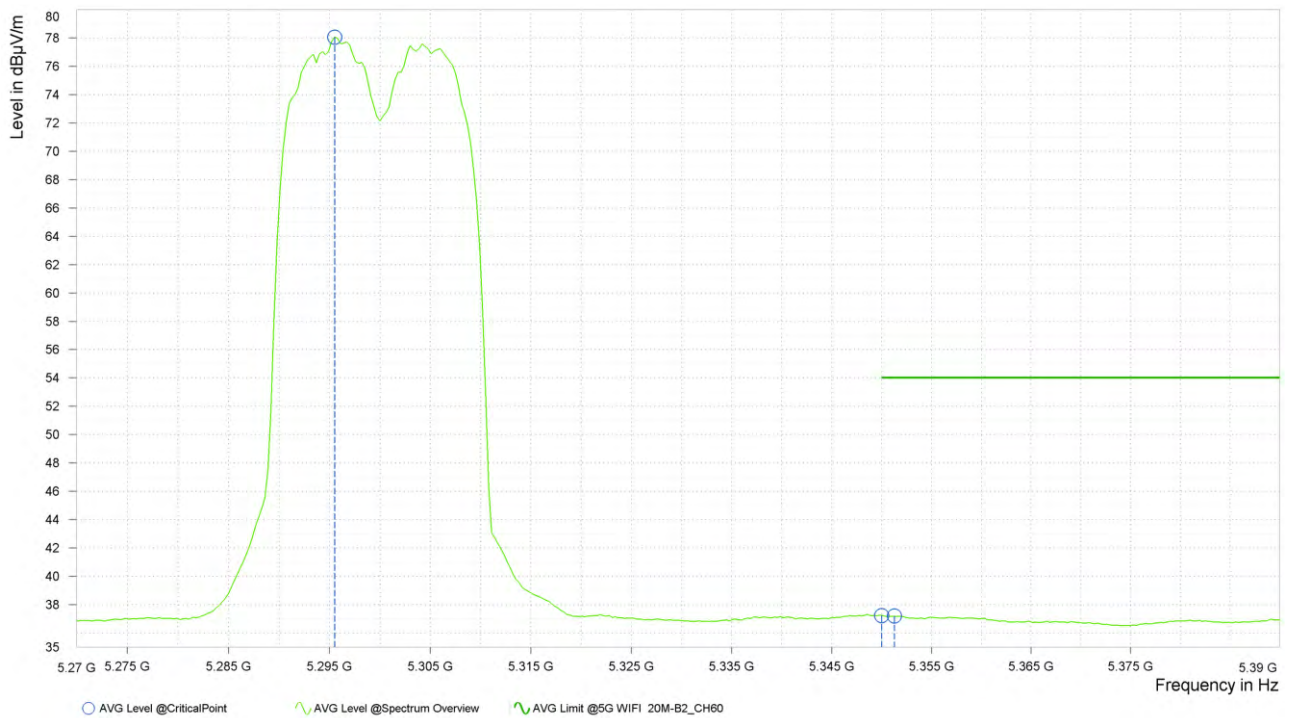

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 5300MHz: Fundamental frequency.



**BUREAU
VERITAS**


Test Report No.: PSU-NQN2403180115RF03

802.11ax (20MHz) (RU106):

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,322.000	94.85			3.53	H	345.9	1.00
6	5,350.000	51.33	74.00	22.67	3.60	H	359.1	1.00
6	5,359.600	52.71	74.00	21.29	3.61	H	345.9	1.00

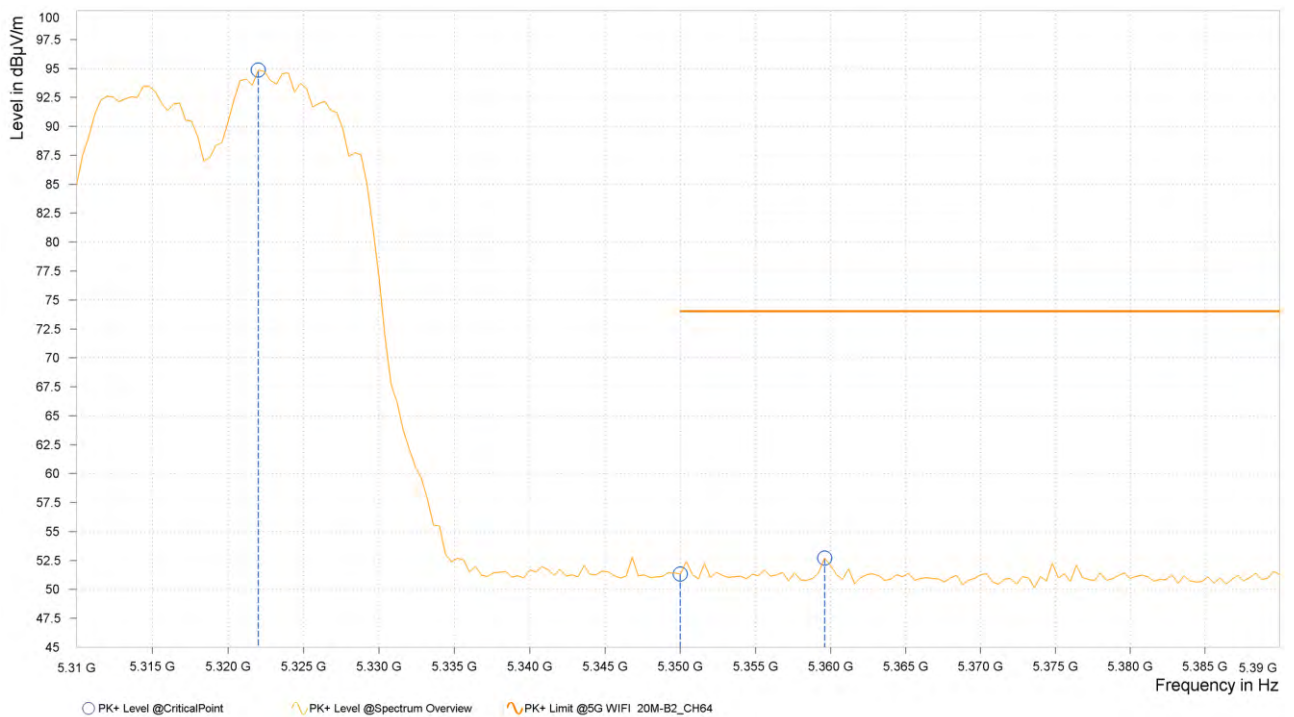




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,324.400	77.61			3.54	H	3.9	1.00
6	5,350.000	37.31	54.00	16.69	3.60	H	153.8	2.00
6	5,351.200	37.25	54.00	16.75	3.60	H	359	1.00

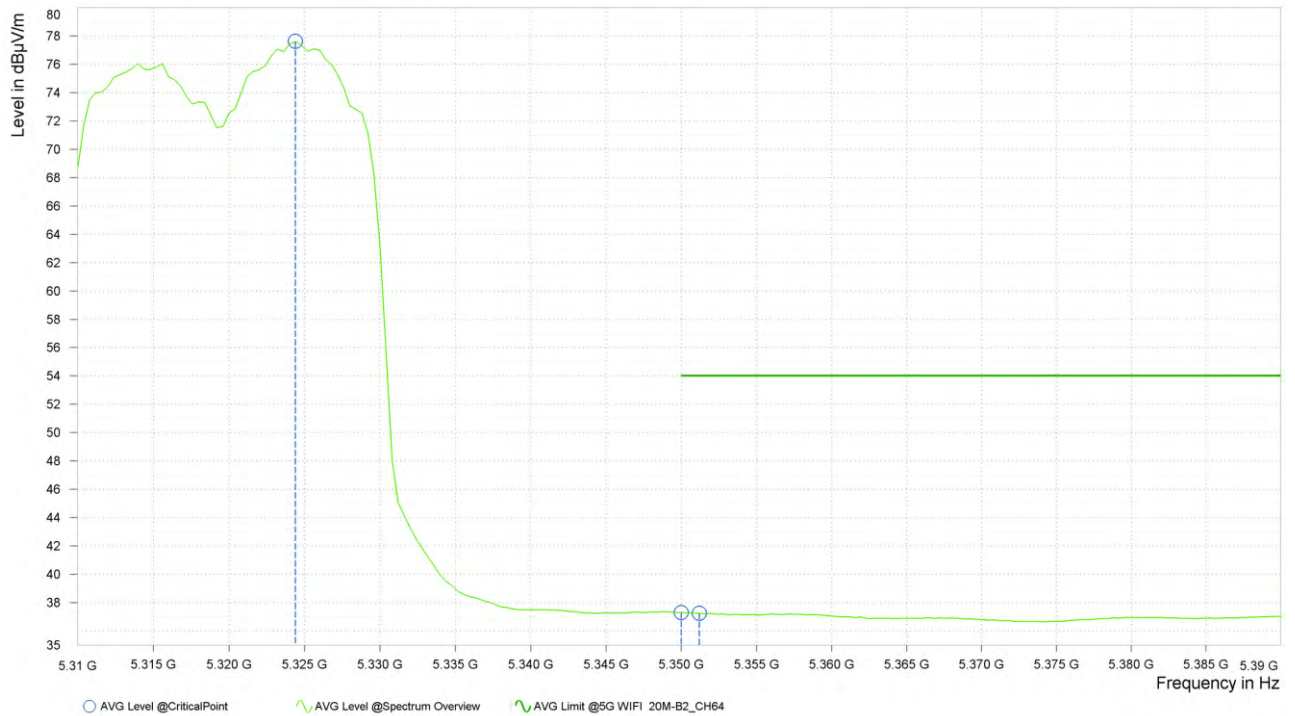




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,324.800	96.25			3.54	V	359.1	1.00
6	5,350.000	52.18	74.00	21.82	3.60	V	359	2.00
6	5,357.600	51.90	74.00	22.10	3.61	V	312.7	2.00

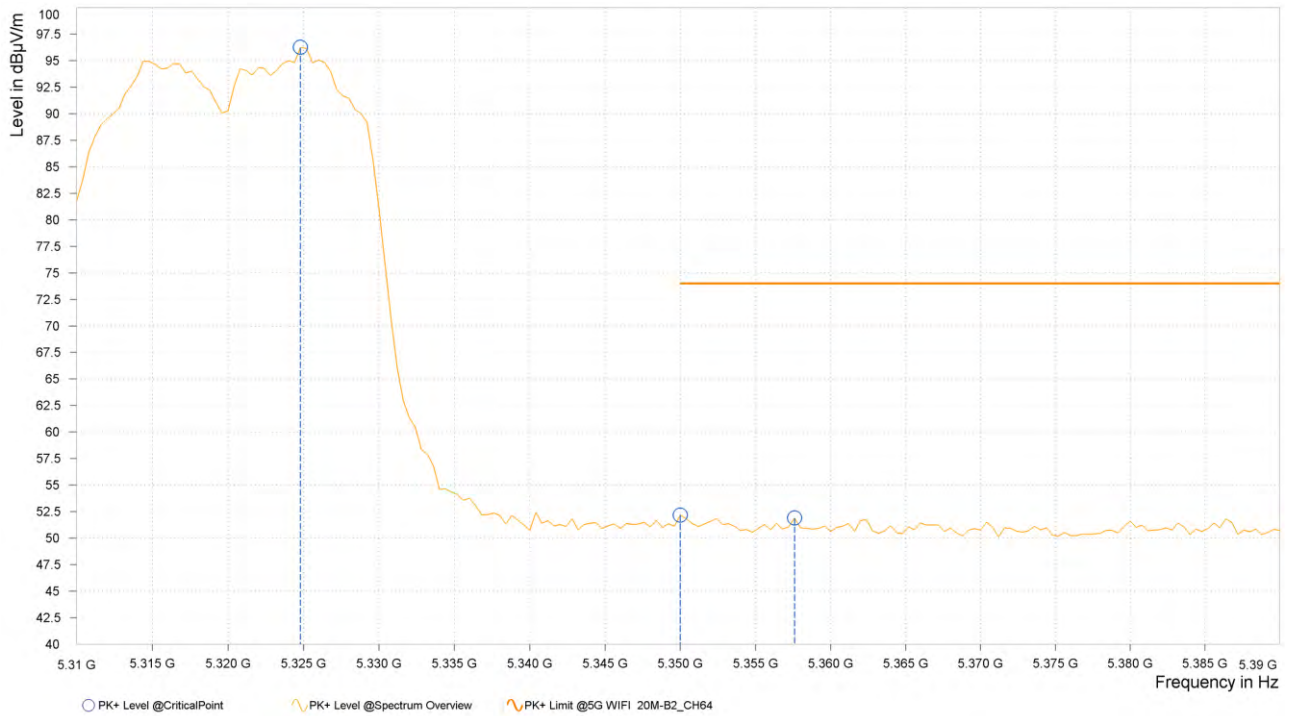



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,323.200	79.48			3.54	V	58	1.00
6	5,350.000	37.48	54.00	16.52	3.60	V	58	1.00
6	5,350.400	37.49	54.00	16.51	3.60	V	58	1.00

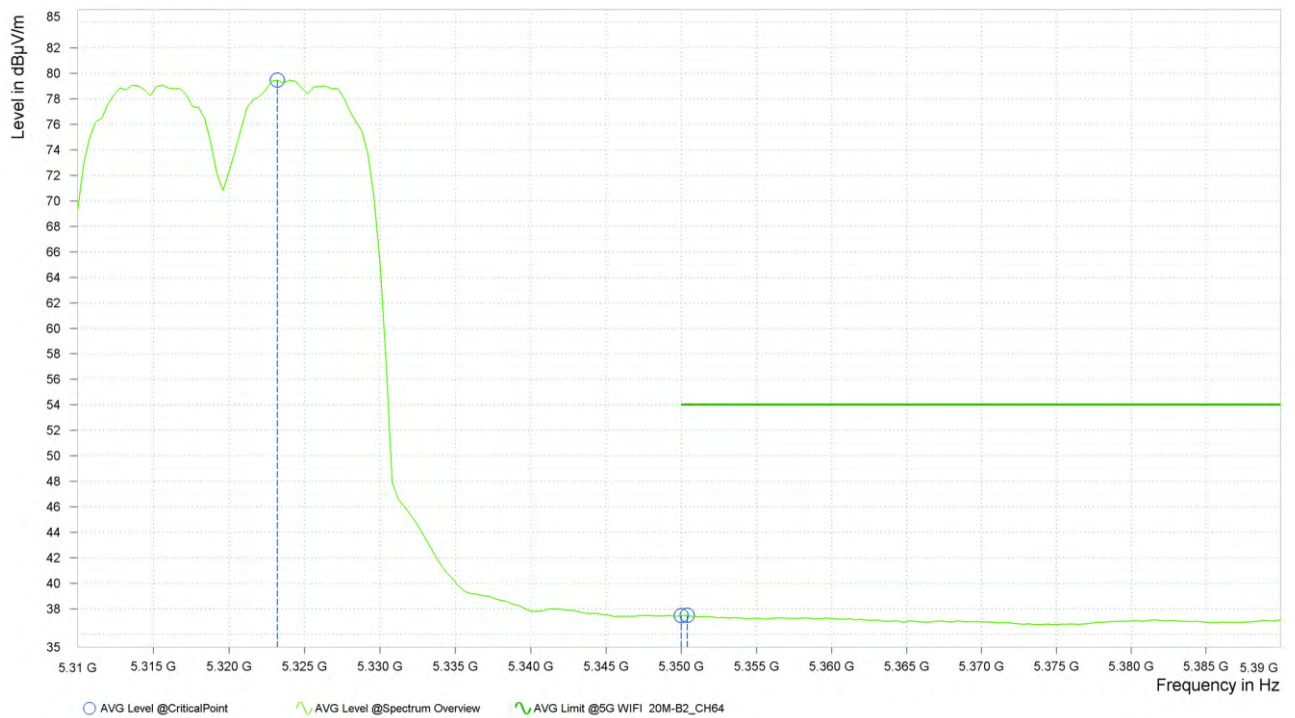

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 5180MHz: Fundamental frequency.



**BUREAU
VERITAS**


Test Report No.: PSU-NQN2403180115RF03

802.11ax (20MHz)(RU242):

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,265.075	89.30			3.52	H	110.8	2.00
4	5,350.000	51.12	74.00	22.88	3.60	H	355	2.00
4	5,354.850	52.41	74.00	21.59	3.60	H	324.7	1.00

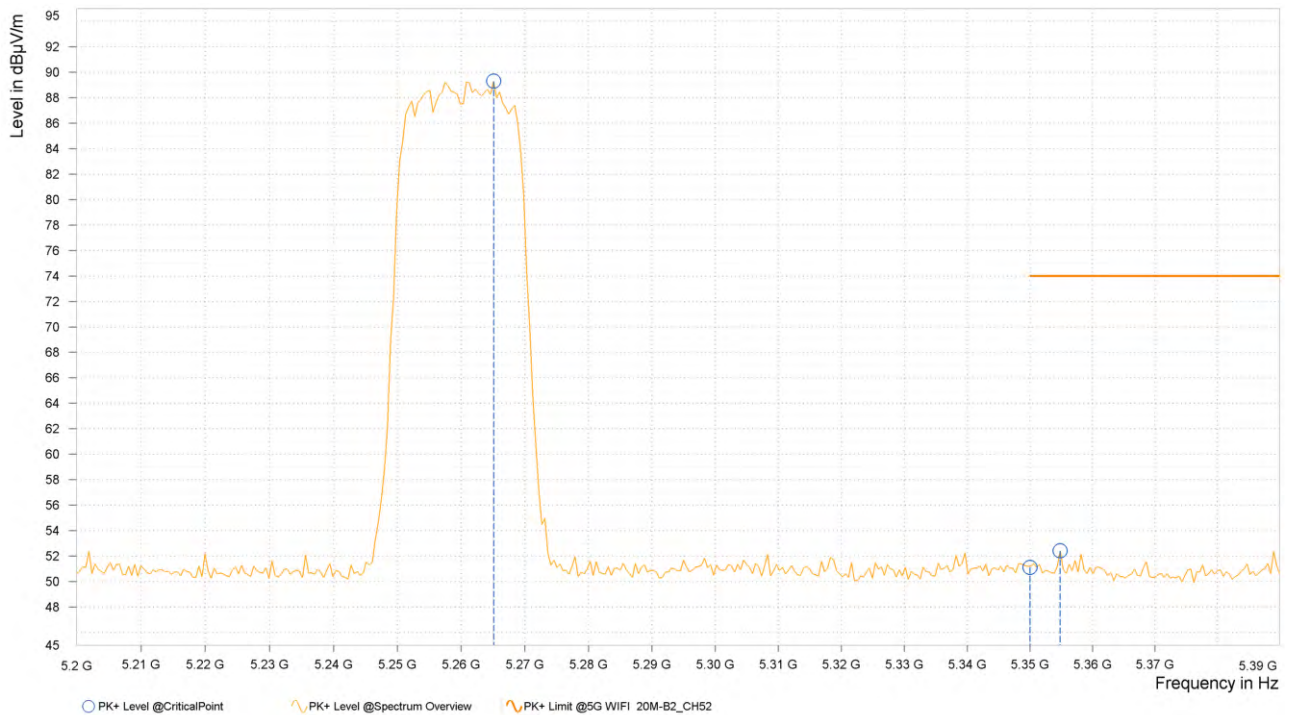




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,255.575	72.69			3.53	H	323.4	1.00
4	5,350.000	37.27	54.00	16.73	3.60	H	359.1	1.00
4	5,350.580	37.26	54.00	16.74	3.60	H	0.9	2.00

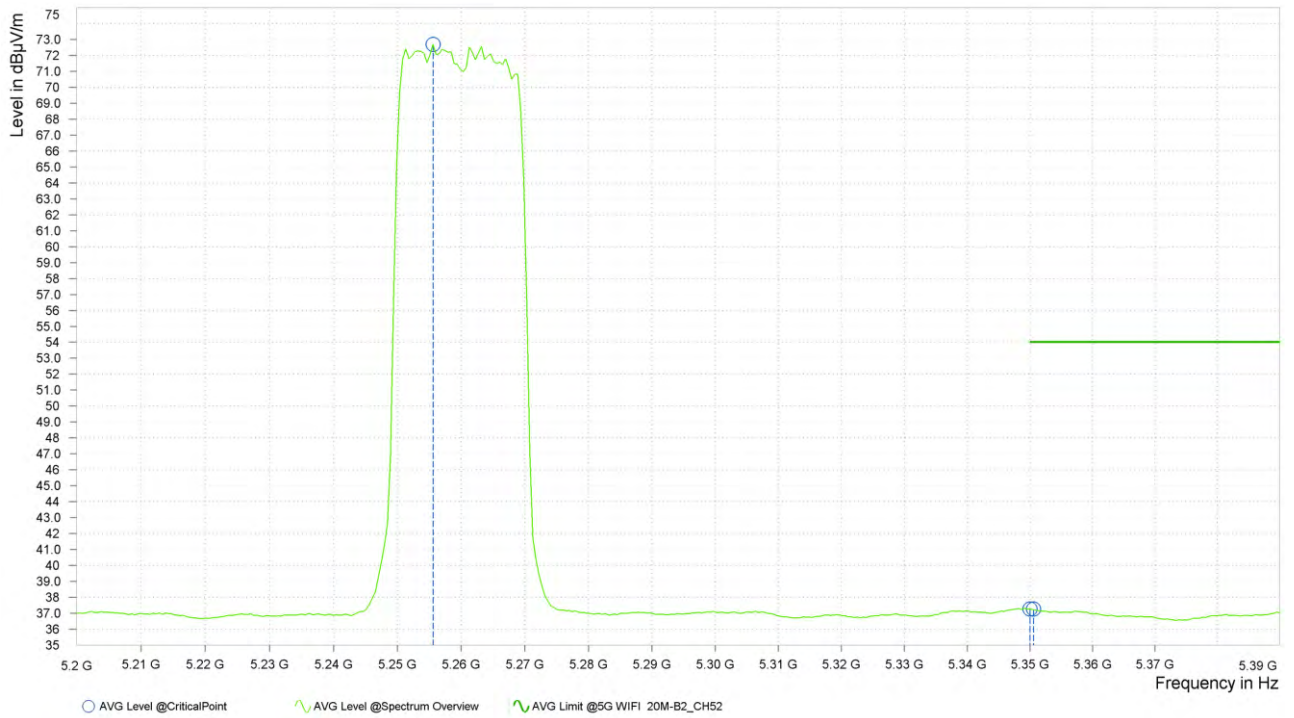




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,261.275	92.68			3.52	V	359.1	1.00
4	5,350.000	51.30	74.00	22.70	3.60	V	0.9	2.00
4	5,368.625	52.00	74.00	22.00	3.61	V	359.1	1.00

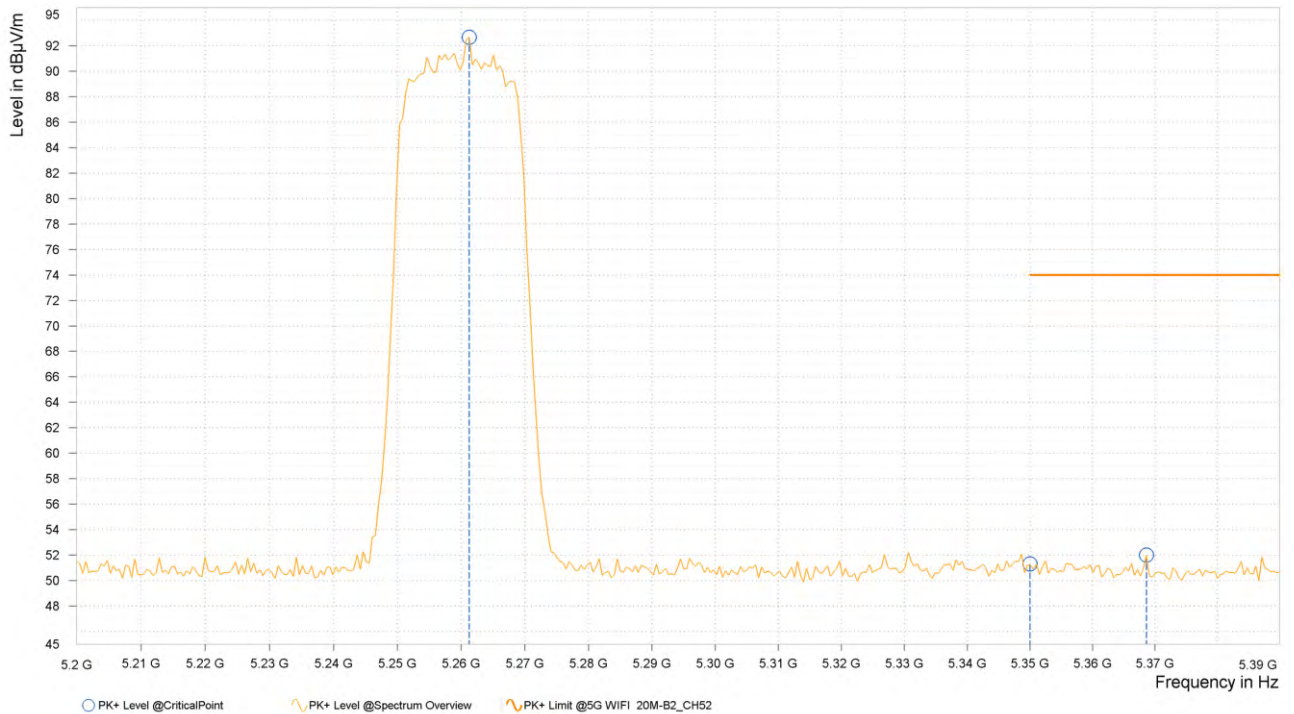



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,264.125	74.89			3.52	V	359.1	1.00
4	5,350.000	37.10	54.00	16.90	3.60	V	1	1.00
4	5,351.050	37.07	54.00	16.93	3.60	V	4.5	1.00

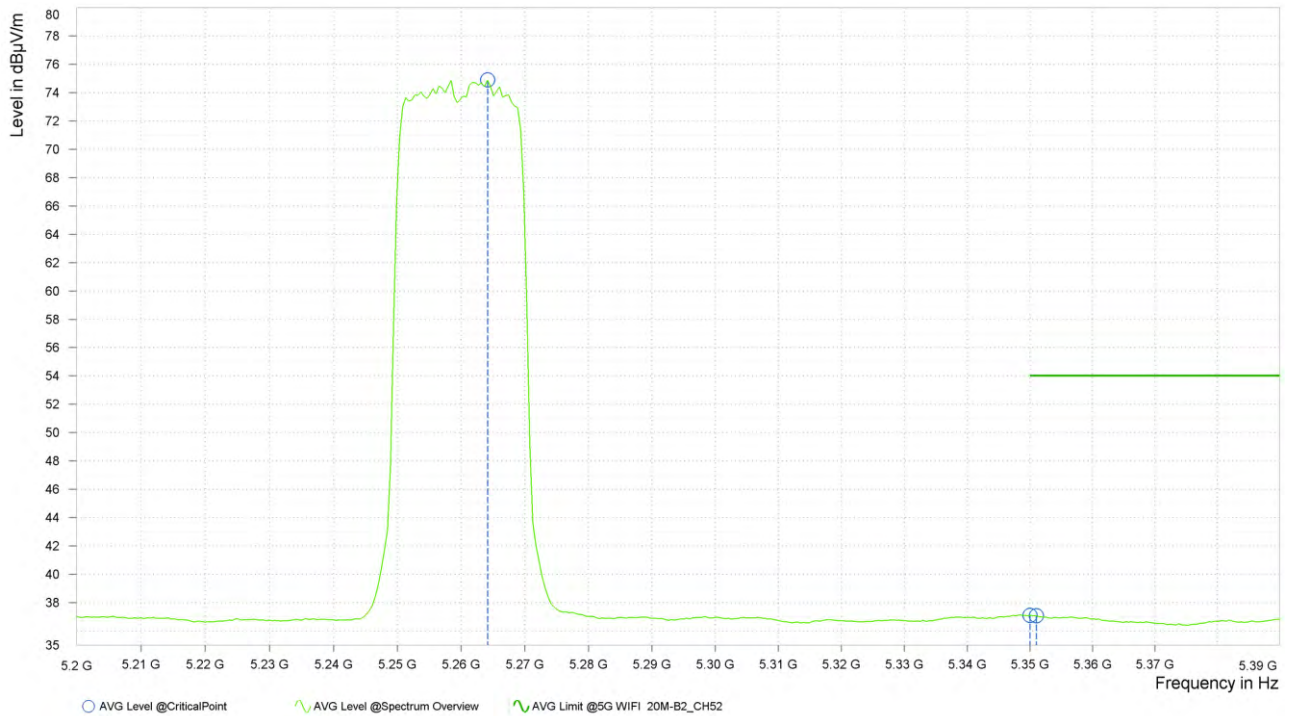

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 5260MHz: Fundamental frequency.




802.11ax (20MHz)(RU242):

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,301.200	89.76			3.48	H	322.3	1.00
5	5,350.000	51.47	74.00	22.53	3.60	H	159.8	2.00
5	5,388.800	51.99	74.00	22.01	3.62	H	356.5	1.00

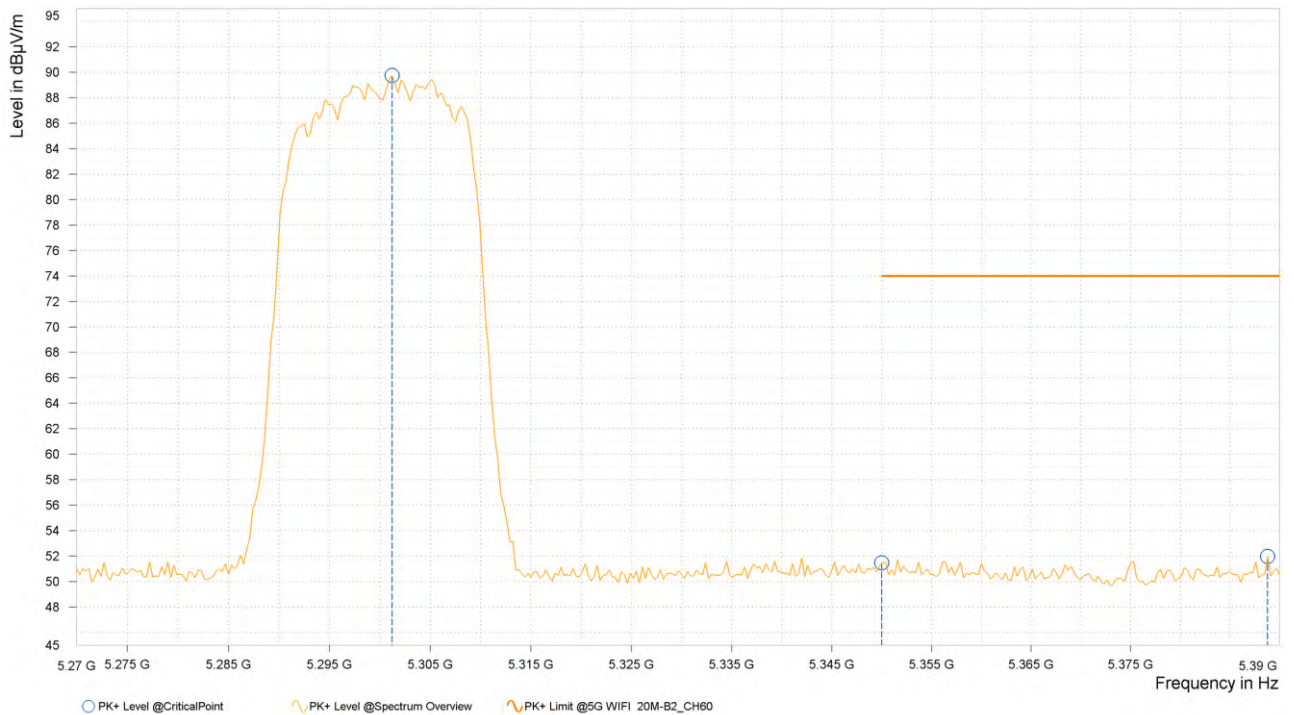



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,301.500	93.81			3.48	V	315.1	2.00
5	5,350.000	51.17	74.00	22.83	3.60	V	356.1	2.00
5	5,371.100	52.25	74.00	21.75	3.61	V	315.1	2.00

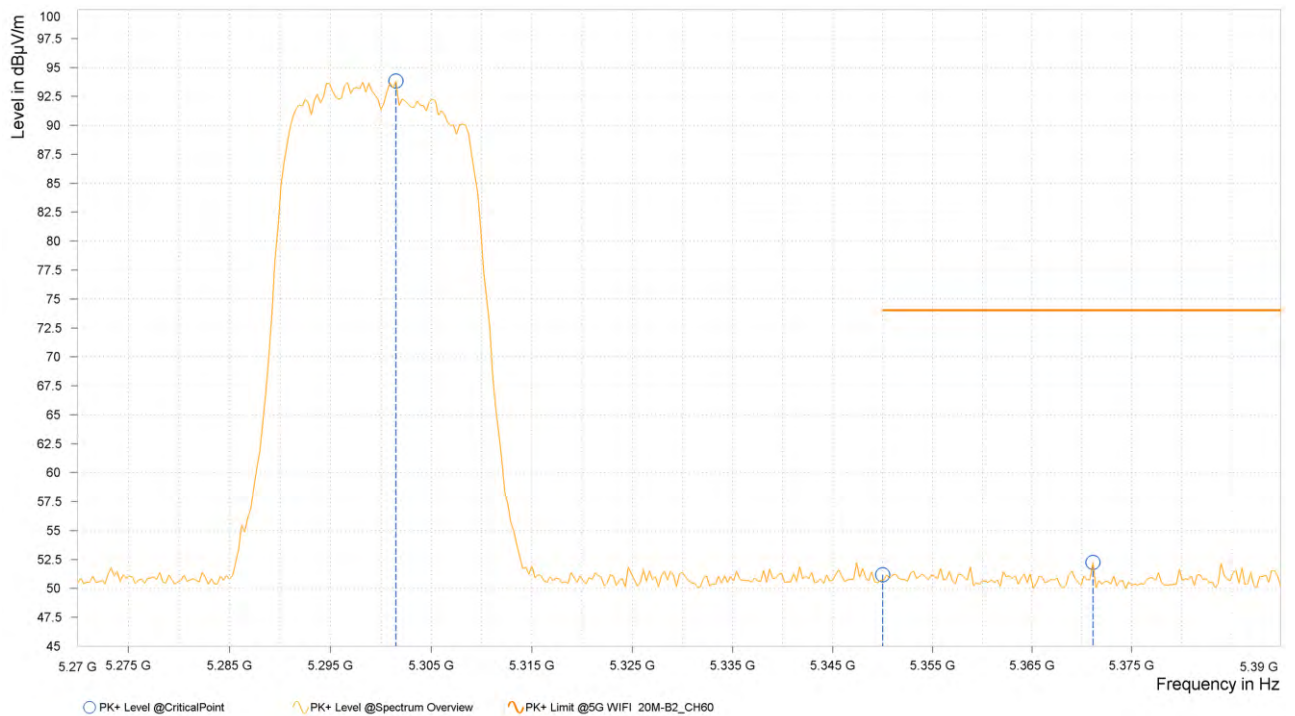



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,297.300	75.01			3.48	V	113.1	2.00
5	5,350.000	37.02	54.00	16.98	3.60	V	1	2.00
5	5,351.300	37.06	54.00	16.94	3.60	V	1	2.00



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 5300MHz: Fundamental frequency.




802.11ax (20MHz) (RU242):

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,320.400	90.60			3.53	H	349.4	1.00
6	5,350.000	51.89	74.00	22.11	3.60	H	10	2.00
6	5,355.200	52.34	74.00	21.66	3.60	H	349.4	1.00

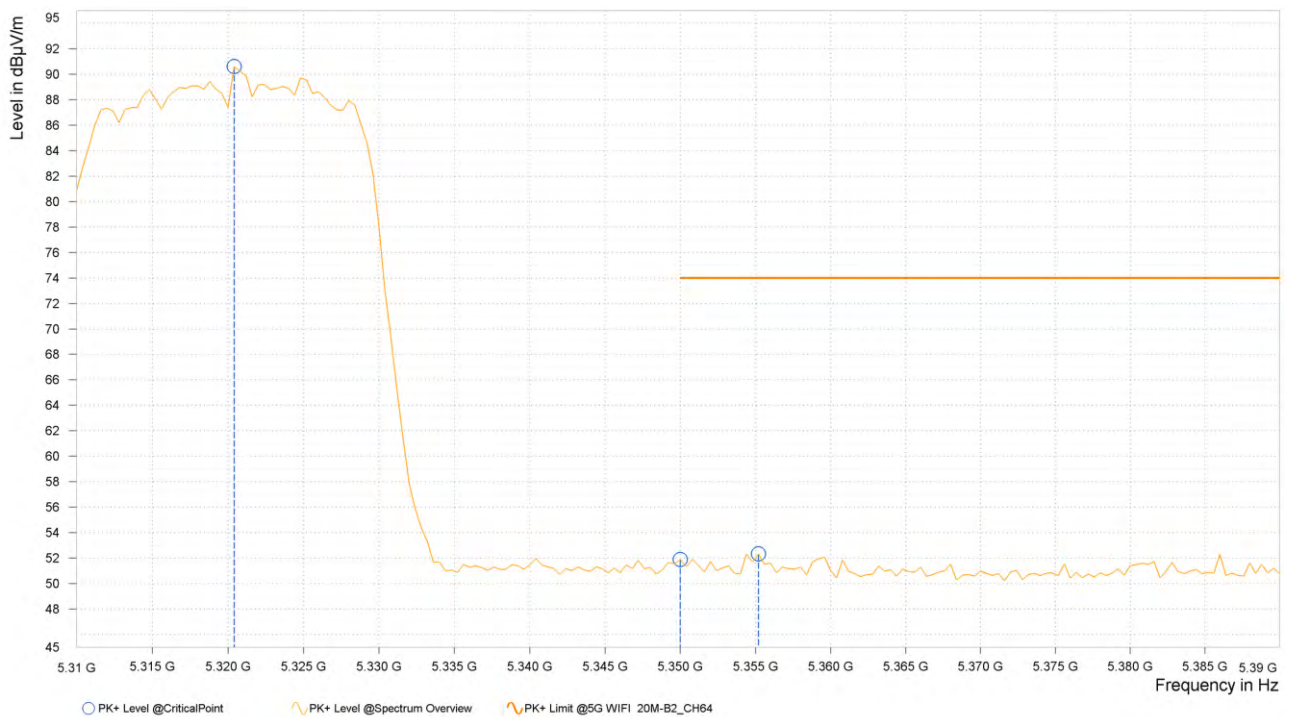




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,326.000	73.95			3.54	H	333	1.00
6	5,350.000	37.25	54.00	16.75	3.60	H	354.9	2.00
6	5,350.800	37.19	54.00	16.81	3.60	H	359	2.00

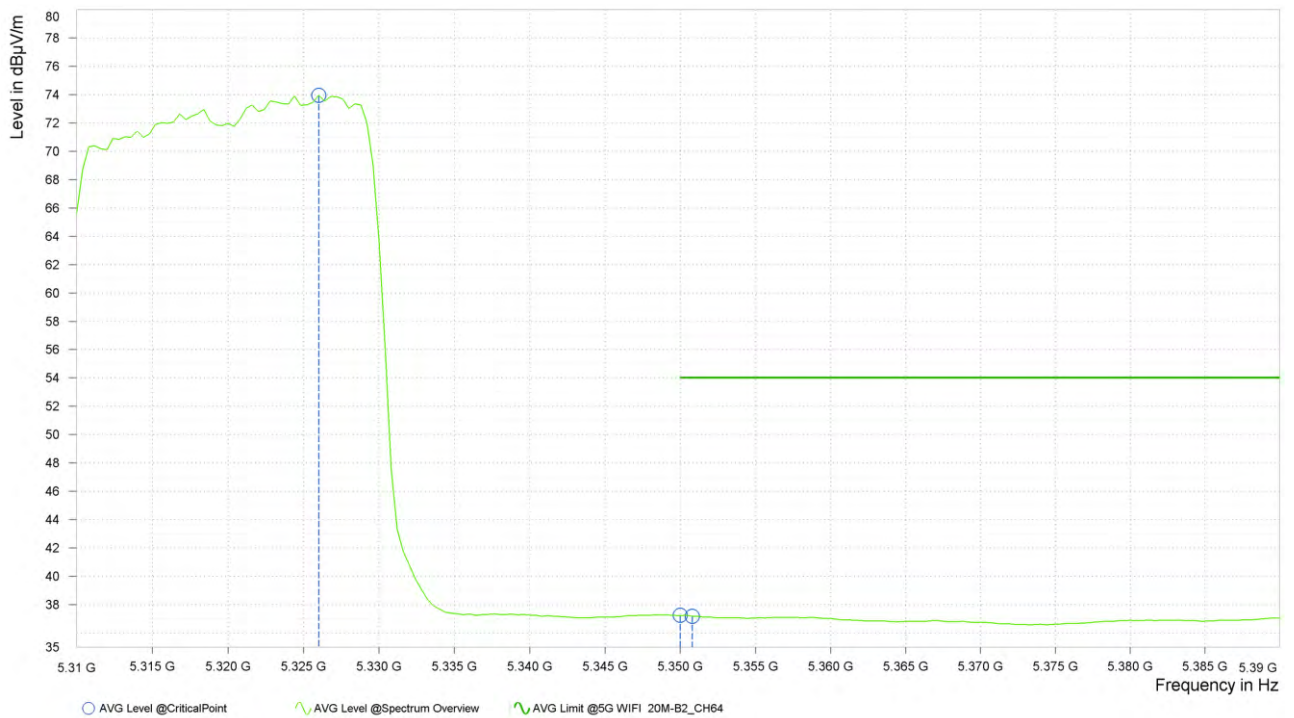



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,320.800	93.57			3.53	V	312.8	2.00
6	5,350.000	51.59	74.00	22.41	3.60	V	106	2.00
6	5,384.800	52.23	74.00	21.77	3.62	V	359	2.00

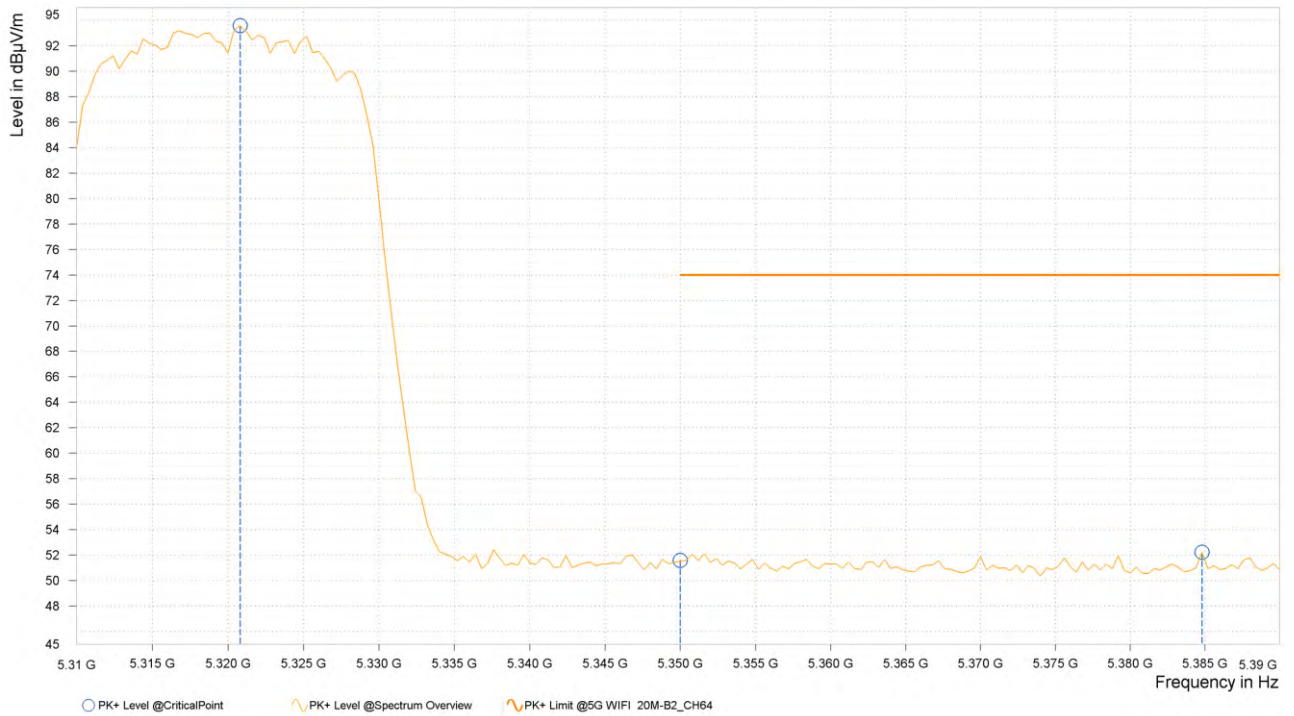



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,318.400	76.35			3.52	V	347.2	1.00
6	5,350.000	37.38	54.00	16.62	3.60	V	299.5	1.00
6	5,351.200	37.33	54.00	16.67	3.60	V	299.5	1.00



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 5180MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF03

802.11ax (40MHz) (RU484):

CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,263.100	88.09			3.52	H	5	1.00
3	5,350.000	51.23	74.00	22.77	3.60	H	62.3	2.00
3	5,356.600	52.74	74.00	21.26	3.60	H	30.8	1.00






Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,266.400	69.70			3.52	H	5	1.00
3	5,350.000	37.26	54.00	16.74	3.60	H	313.8	2.00
3	5,399.500	37.37	54.00	16.63	3.62	H	30.2	1.00

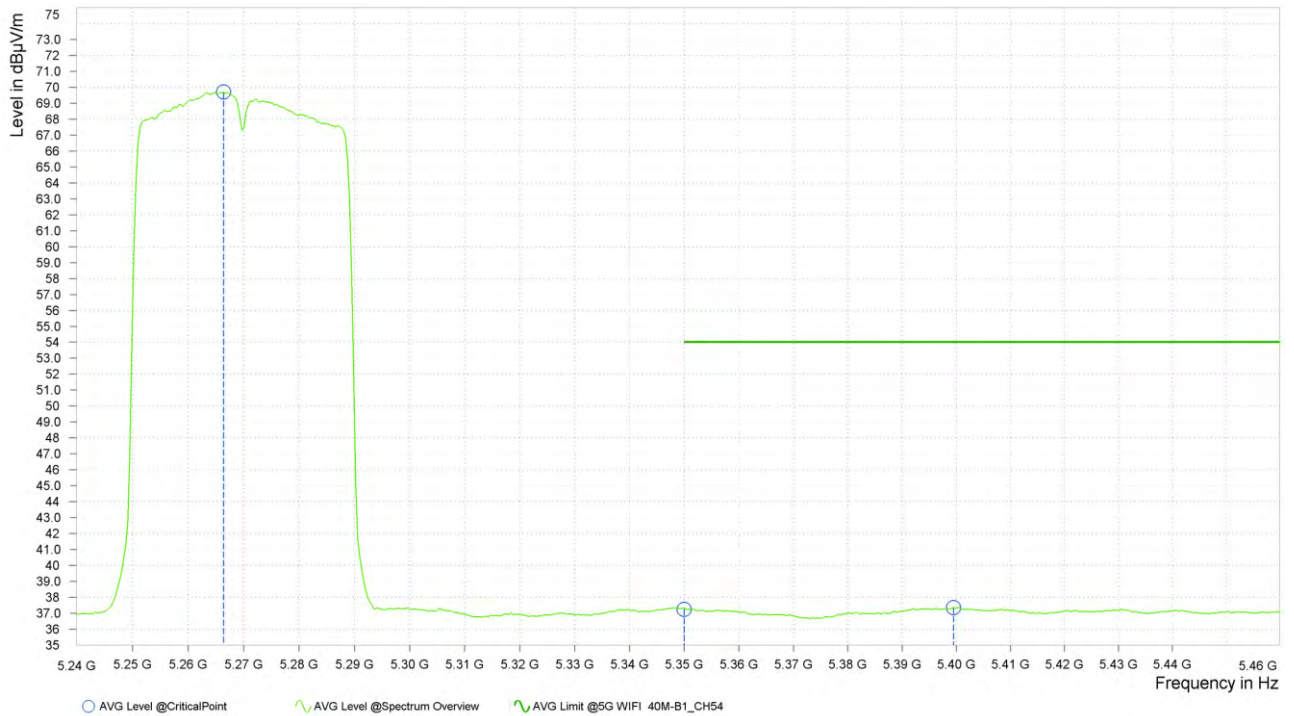




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,263.100	88.81			3.52	V	303	2.00
3	5,350.000	51.68	74.00	22.32	3.60	V	149.5	1.00
3	5,449.367	52.33	74.00	21.67	3.74	V	1	1.00

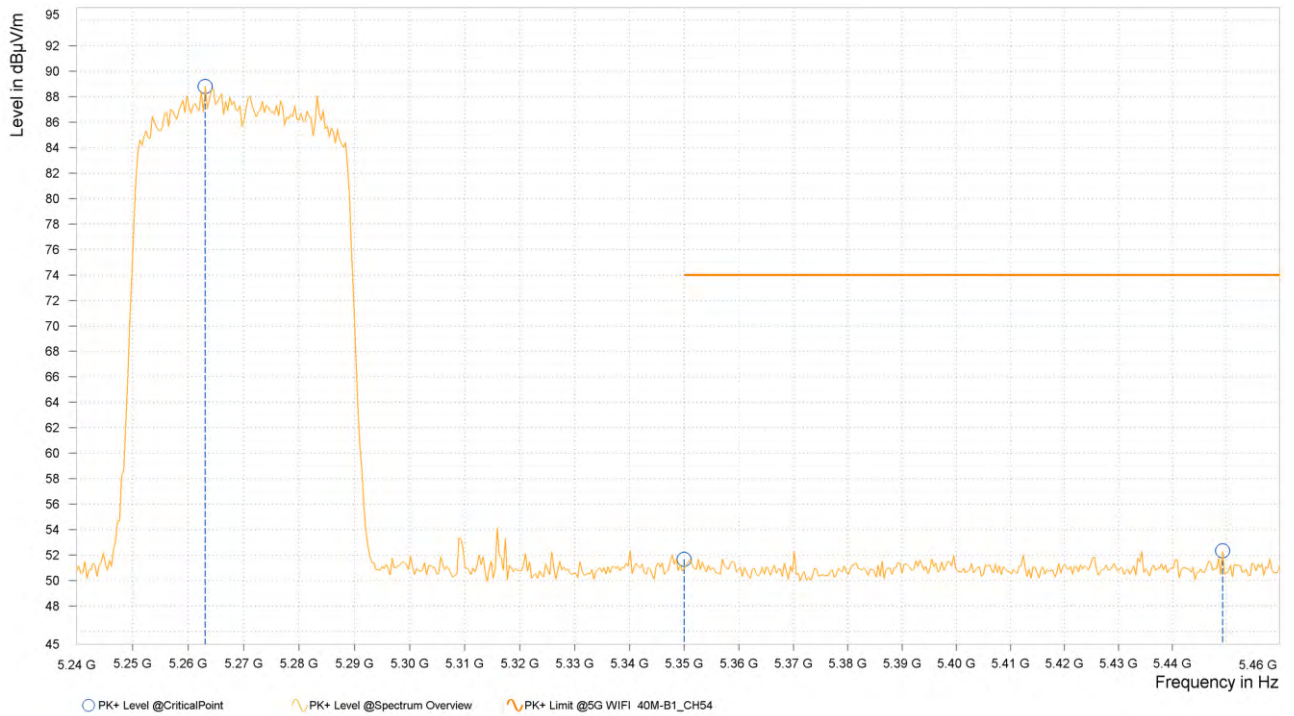



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,267.500	70.80			3.52	V	5.7	1.00
3	5,350.000	37.21	54.00	16.79	3.60	V	1	1.00
3	5,400.233	37.36	54.00	16.64	3.63	V	235.7	1.00

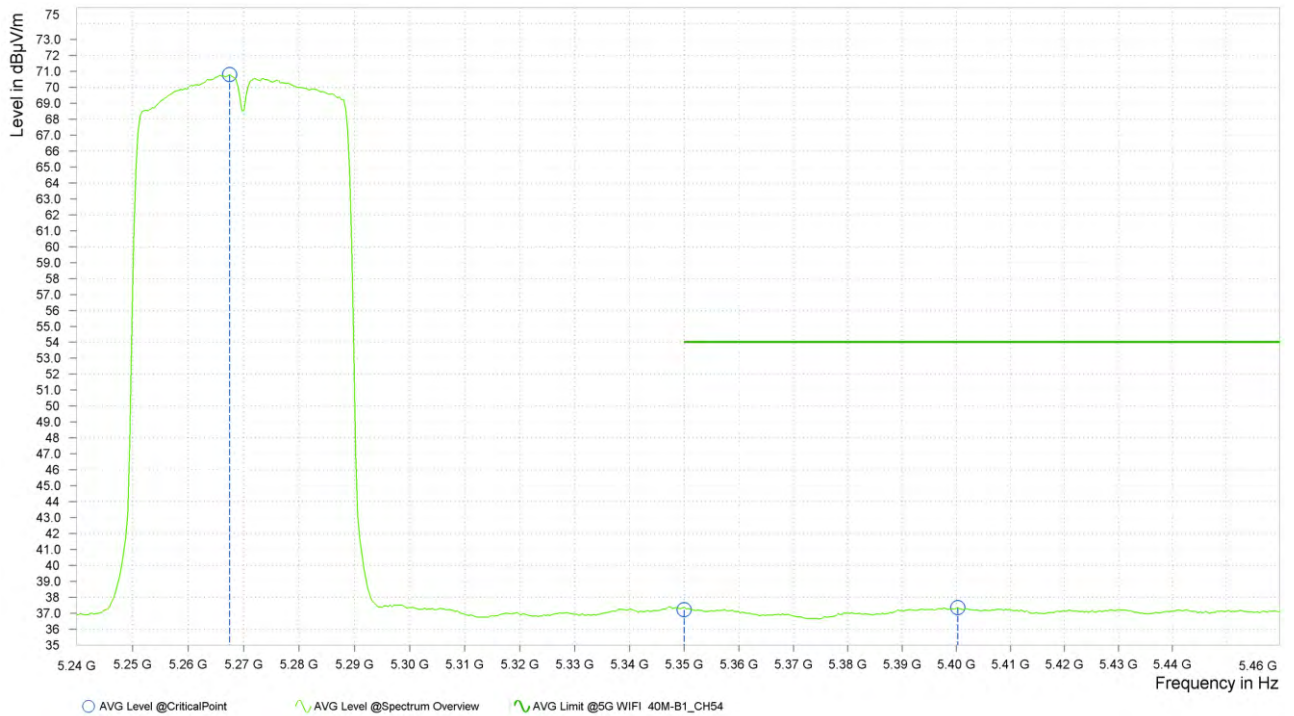

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
- 5180MHz: Fundamental frequency.



802.11ax (40MHz) (RU484):

CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,304.000	89.03			3.49	H	30.2	1.00
4	5,350.000	52.79	74.00	21.21	3.60	H	359.1	1.00
4	5,378.000	52.30	74.00	21.70	3.61	H	300.1	1.00





Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,303.500	70.07			3.49	H	23	2.00
4	5,350.000	37.40	54.00	16.60	3.60	H	1	1.00
4	5,351.000	37.38	54.00	16.62	3.60	H	5	1.00

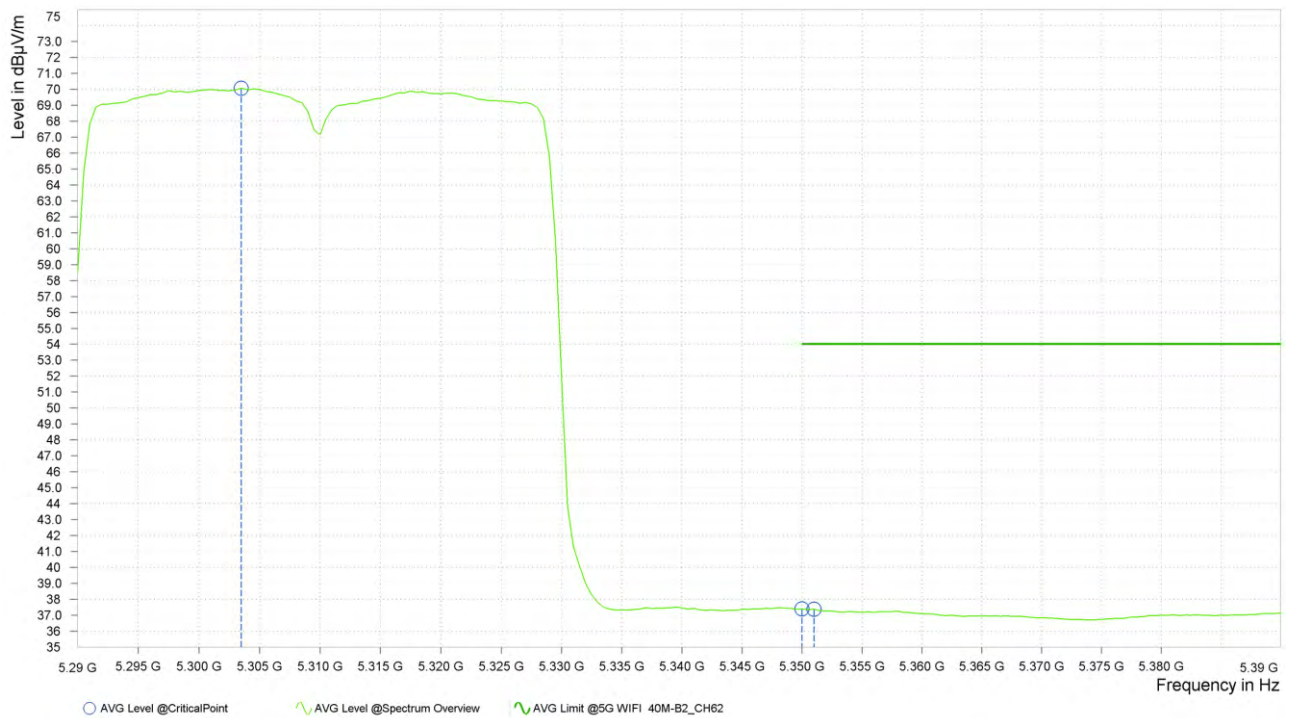




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF03


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,323.000	90.68			3.54	V	290.4	2.00
4	5,350.000	51.60	74.00	22.40	3.60	V	0.9	2.00
4	5,356.000	52.47	74.00	21.53	3.60	V	258.8	2.00

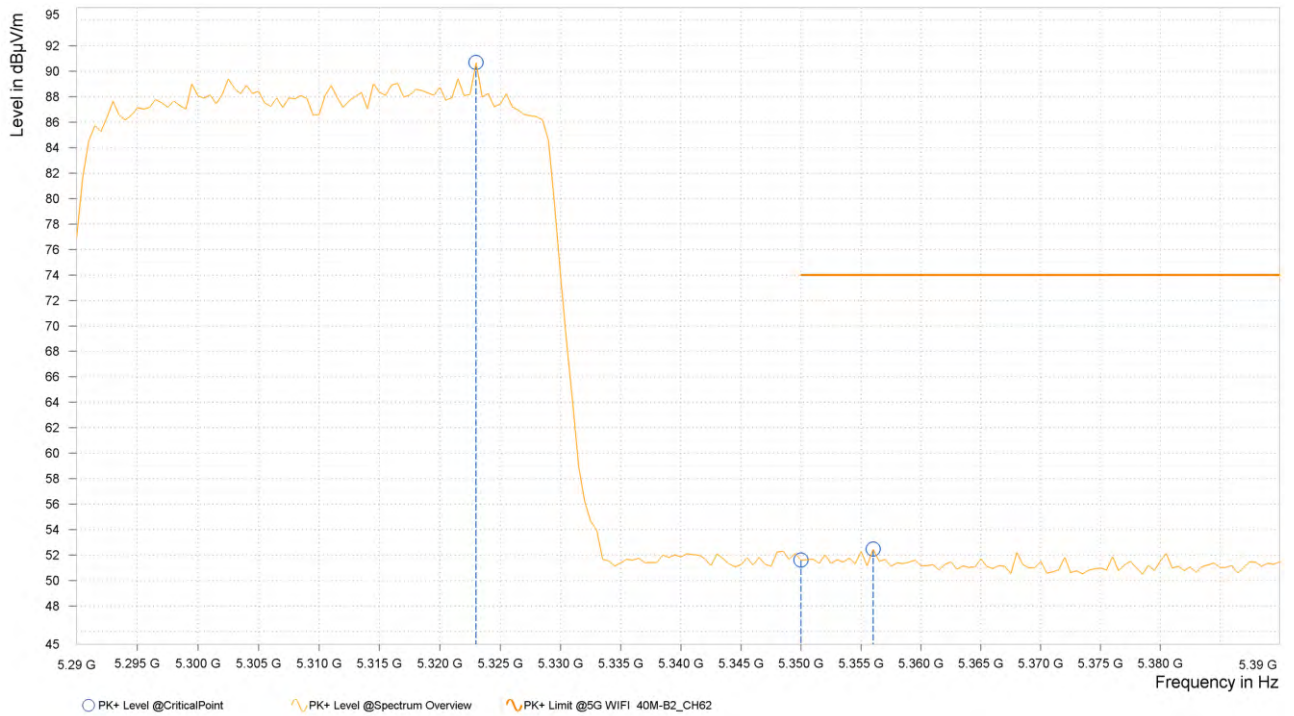



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,318.500	73.32			3.52	V	5.1	1.00
4	5,350.000	37.50	54.00	16.50	3.60	V	5.1	1.00
4	5,351.000	37.47	54.00	16.53	3.60	V	5.1	1.00

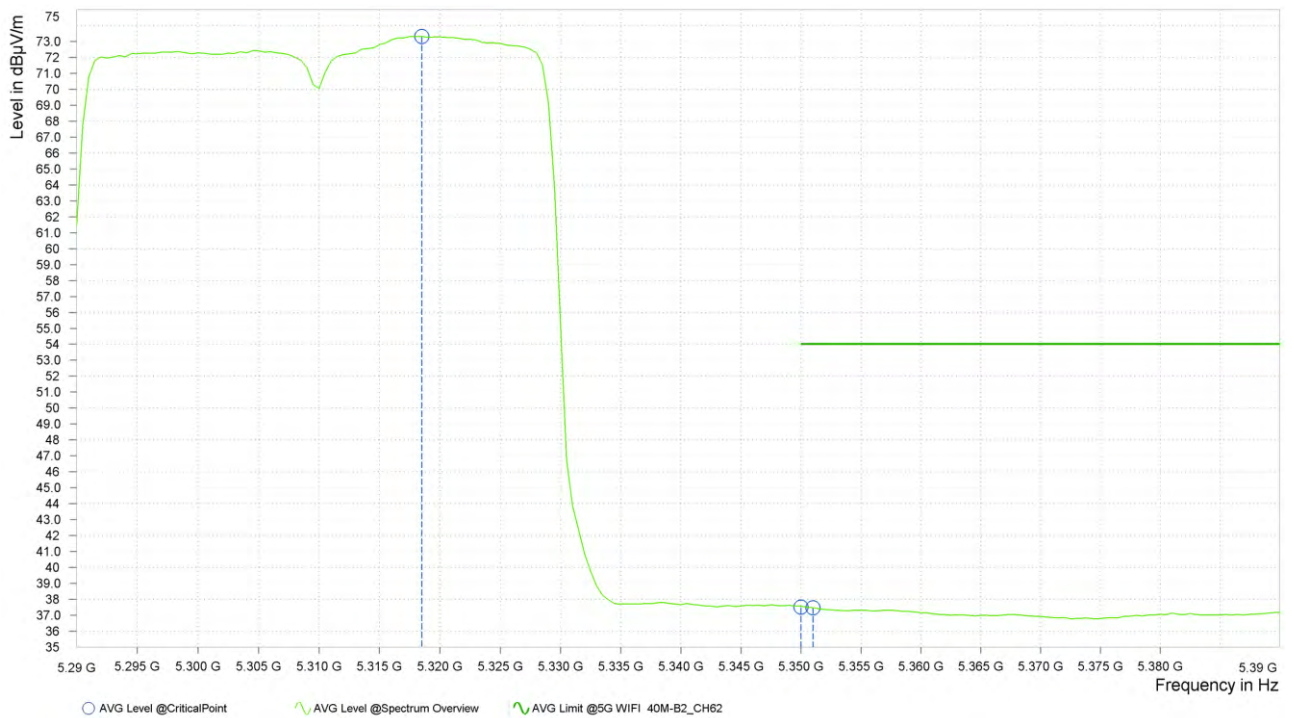

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 5180MHz: Fundamental frequency.



**BUREAU
VERITAS**


Test Report No.: PSU-NQN2403180115RF03

802.11ax (80MHz) (RU996):

CHANNEL	TX Channel 58	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,290.967	89.63			3.48	H	0.9	2.00
2	5,350.000	50.54	74.00	23.46	3.60	H	86.8	2.00
2	5,425.167	52.29	74.00	21.71	3.68	H	0.9	2.00

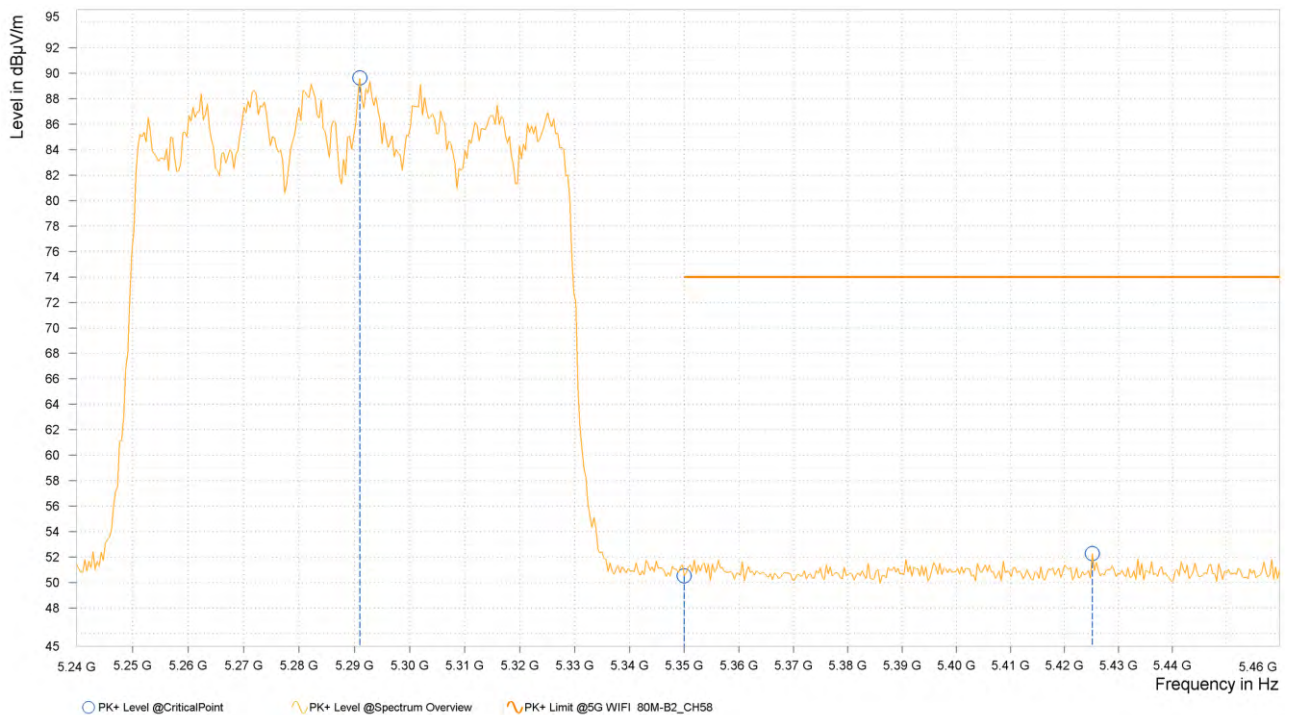




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,292.067	70.39			3.48	H	0.9	2.00
2	5,350.000	37.36	54.00	16.64	3.60	H	359.1	1.00
2	5,351.100	37.51	54.00	16.49	3.60	H	359.1	1.00





ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,293.900	91.73			3.48	V	359.1	1.00
2	5,350.000	51.19	74.00	22.81	3.60	V	60.5	2.00
2	5,405.000	52.24	74.00	21.76	3.64	V	1.2	2.00

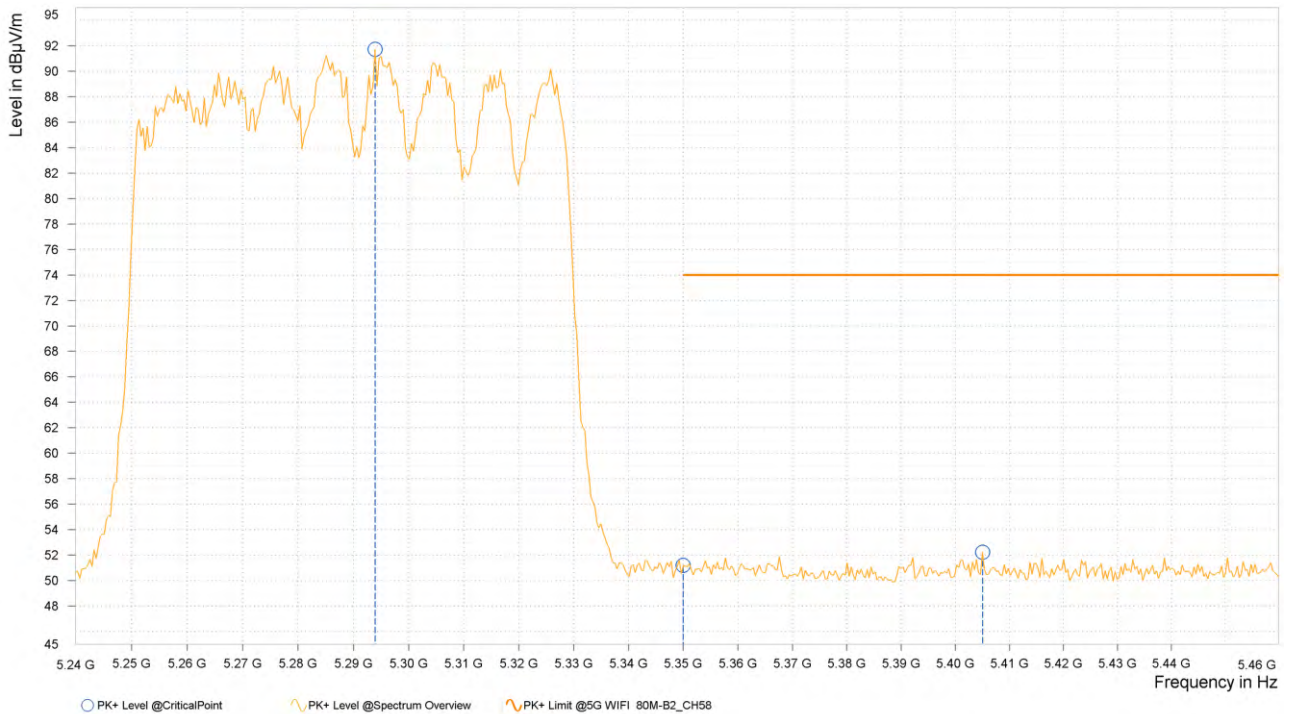



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	5,295.733	72.60			3.48	V	359.1	1.00
2	5,350.000	37.37	54.00	16.63	3.60	V	59.3	2.00
2	5,353.667	37.38	54.00	16.62	3.60	V	359.1	1.00



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 5180MHz: Fundamental frequency.




Band 3

802.11a

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,442.000	51.36	74.00	22.64	11.13	H	25.9	2.00
8	5,460.000	50.48	74.00	23.52	11.12	H	175.4	2.00
8	5,498.000	97.61			11.10	H	5	1.00

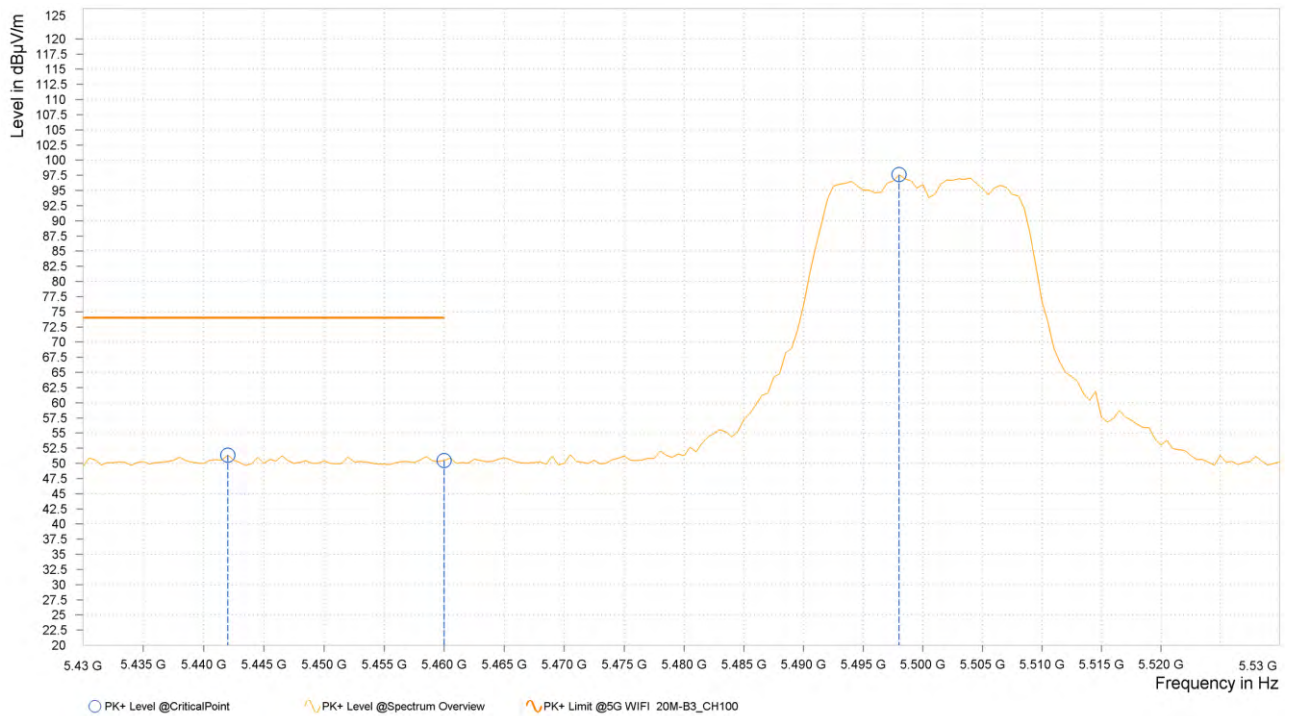




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,456.500	36.39	54.00	17.61	11.12	H	313.7	1.00
8	5,460.000	36.38	54.00	17.62	11.12	H	165.8	2.00
8	5,498.000	82.58			11.10	H	4.9	1.00

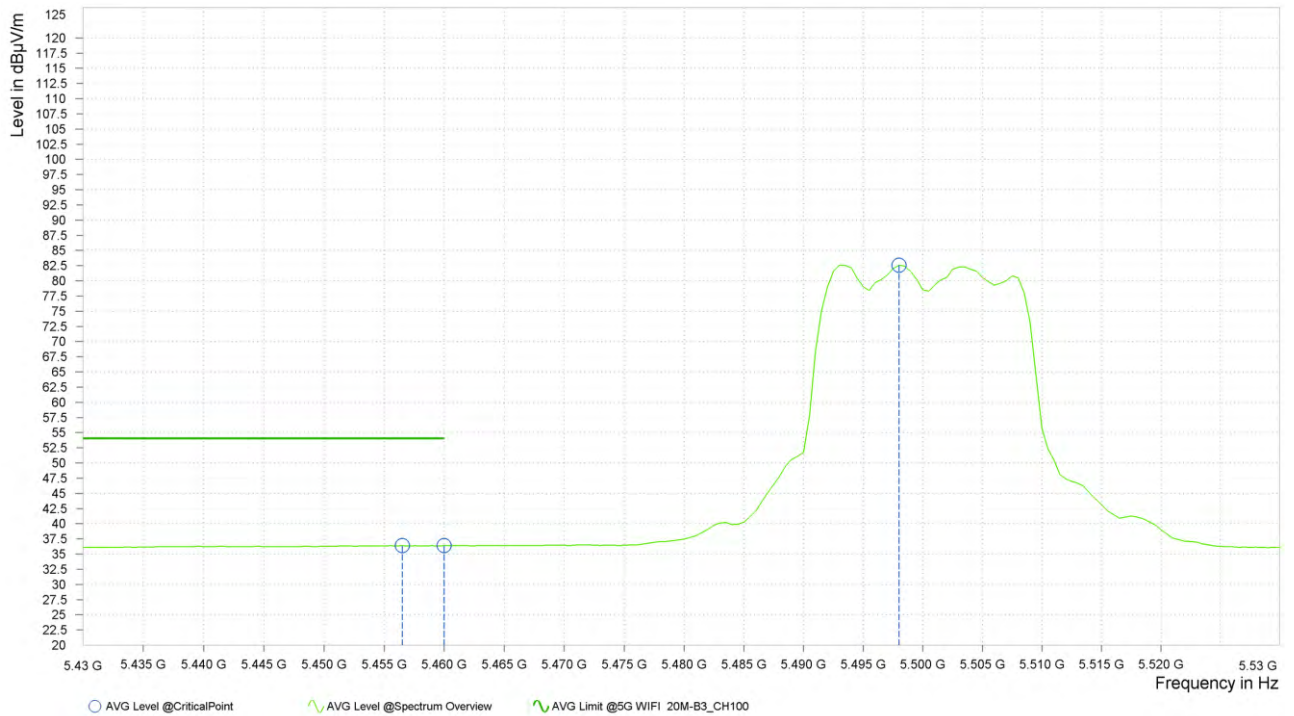




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,453.000	51.24	74.00	22.76	11.12	V	359	1.00
8	5,460.000	50.38	74.00	23.62	11.12	V	359	1.00
8	5,502.000	100.54			11.09	V	314	2.00

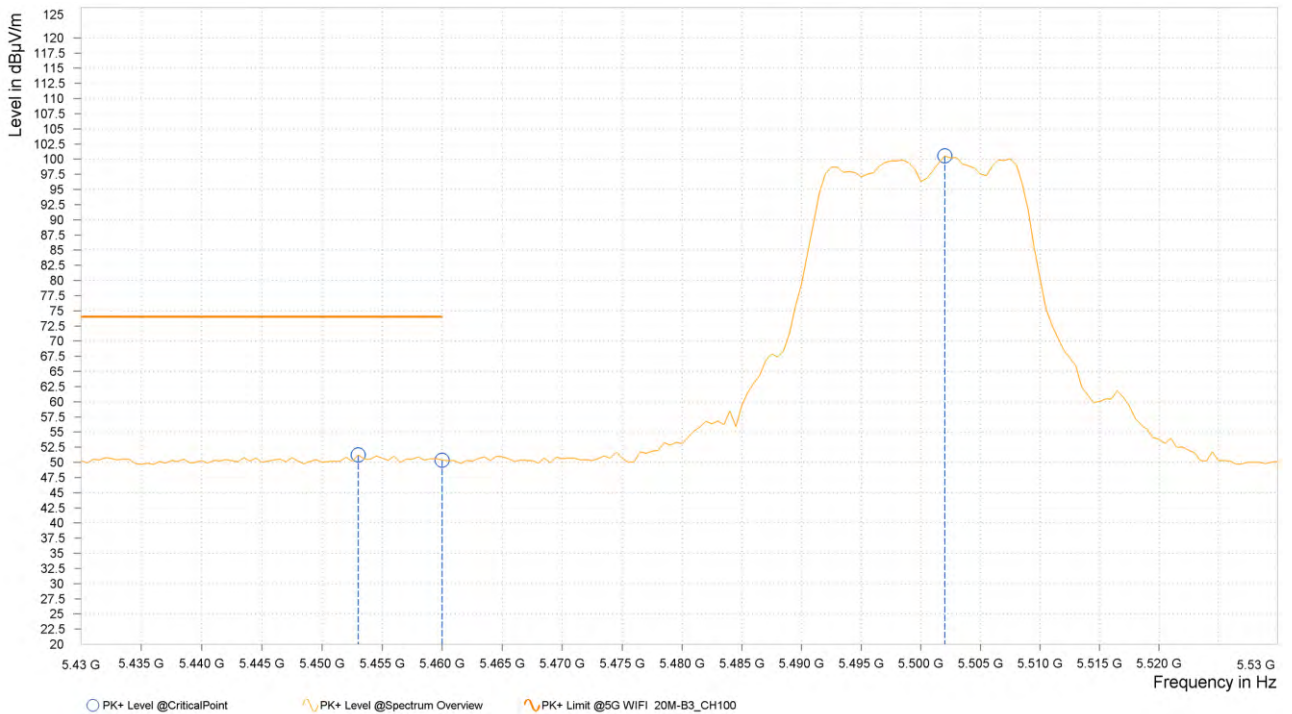



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,457.000	36.48	54.00	17.52	11.12	V	249.1	1.00
8	5,460.000	36.53	54.00	17.47	11.12	V	249.1	1.00
8	5,507.000	85.96			11.09	V	315.2	2.00

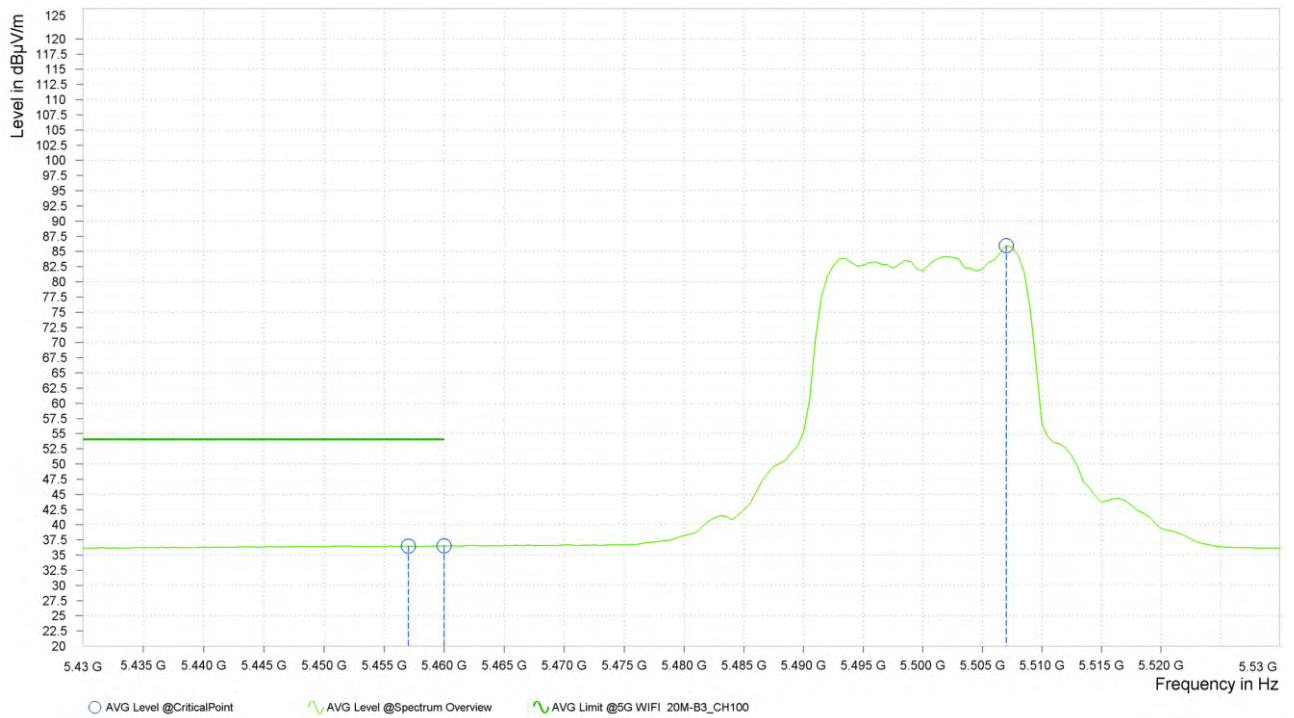

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF03

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,459.000	51.38	74.00	22.62	11.12	H	1.4	2.00
9	5,460.000	50.07	74.00	23.93	11.12	H	359.1	1.00
9	5,578.500	95.43			11.21	H	5.5	1.00

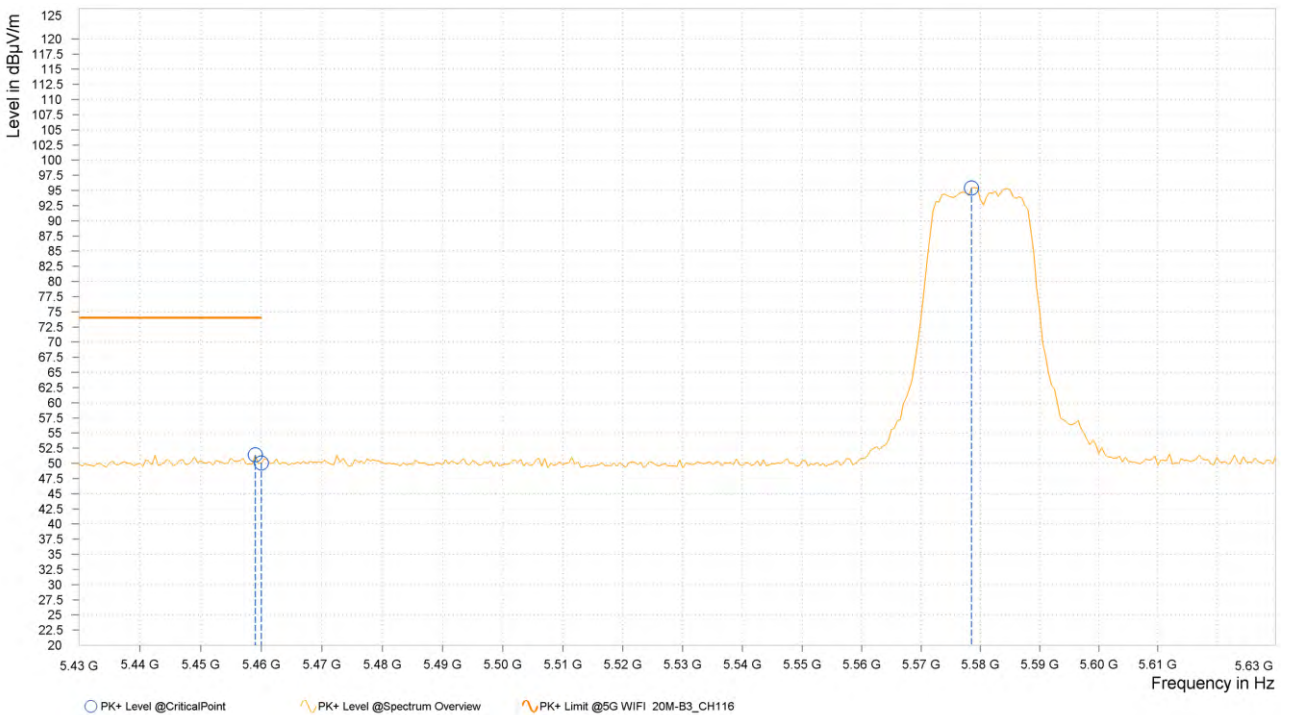




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,456.000	36.28	54.00	17.72	11.12	H	5	1.00
9	5,460.000	36.24	54.00	17.76	11.12	H	113.3	2.00
9	5,584.500	81.41			11.22	H	5	1.00

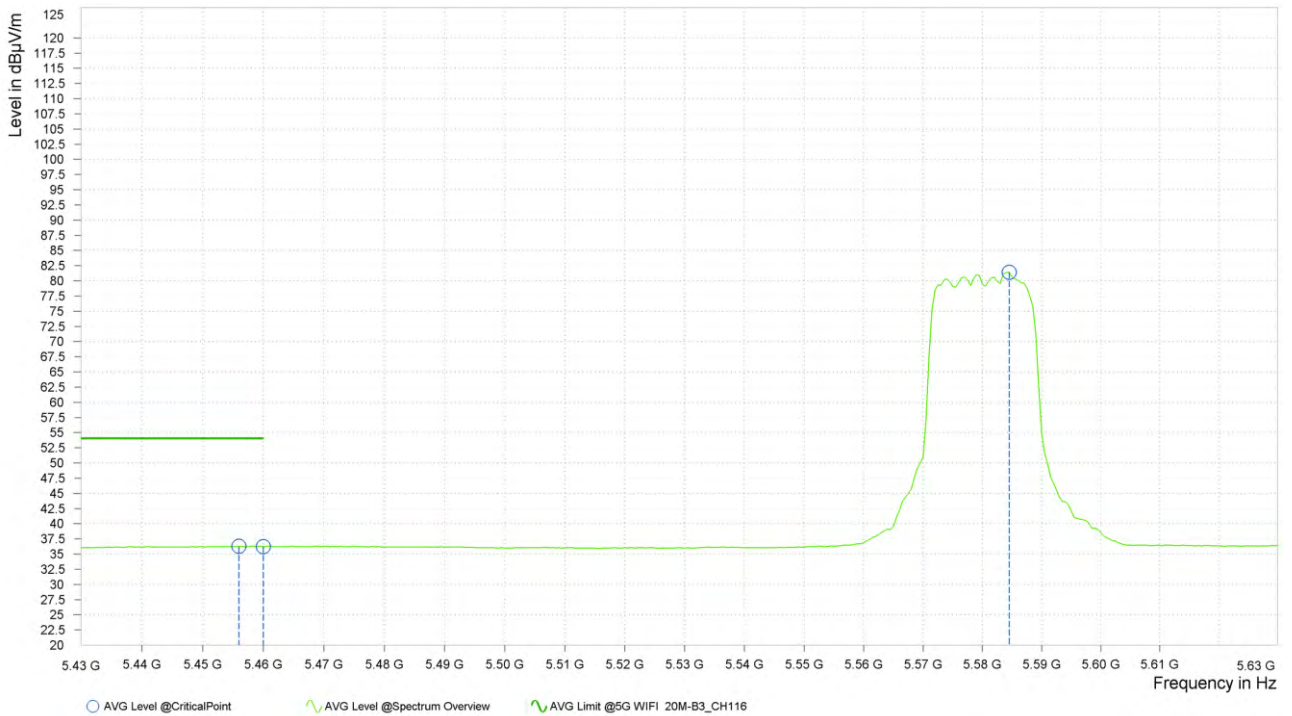




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,451.000	51.09	74.00	22.91	11.12	V	359	1.00
9	5,460.000	49.99	74.00	24.01	11.12	V	346.6	1.00
9	5,586.500	98.71			11.23	V	315.2	2.00

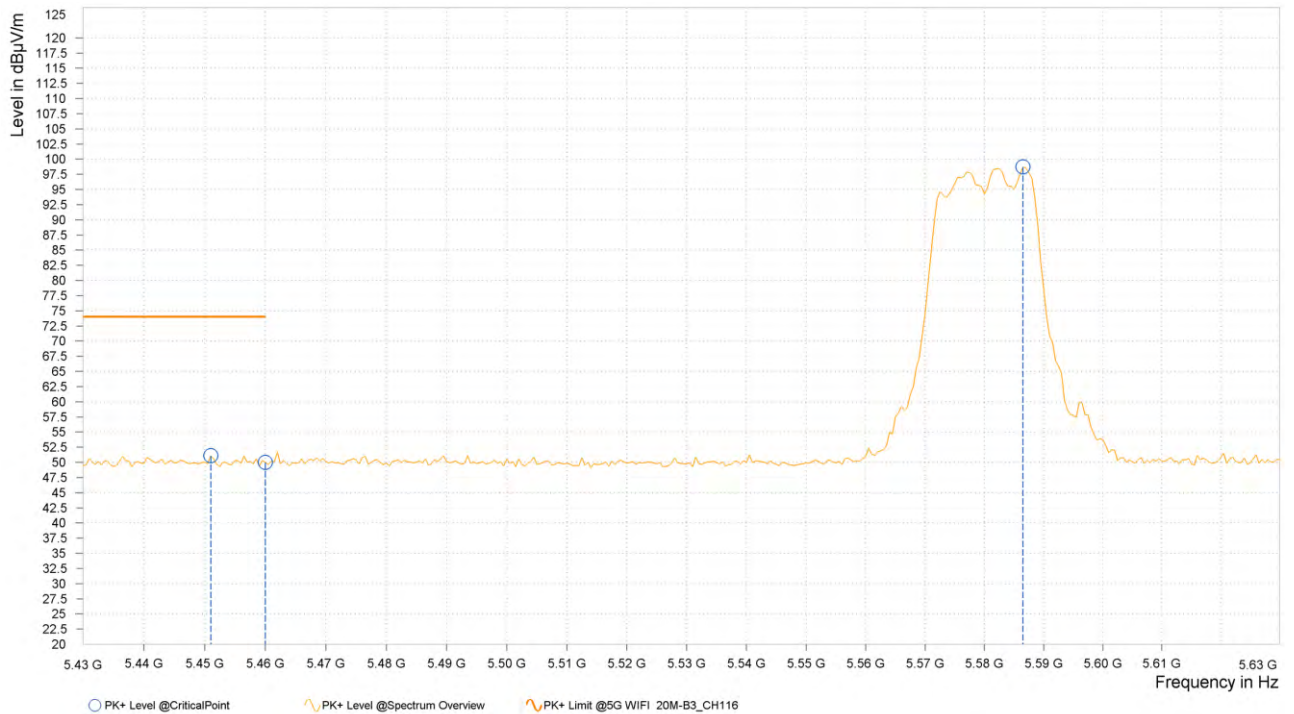



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,455.500	36.32	54.00	17.68	11.12	V	257.4	1.00
9	5,460.000	36.24	54.00	17.76	11.12	V	45.8	1.00
9	5,582.000	85.07			11.22	V	314.1	2.00

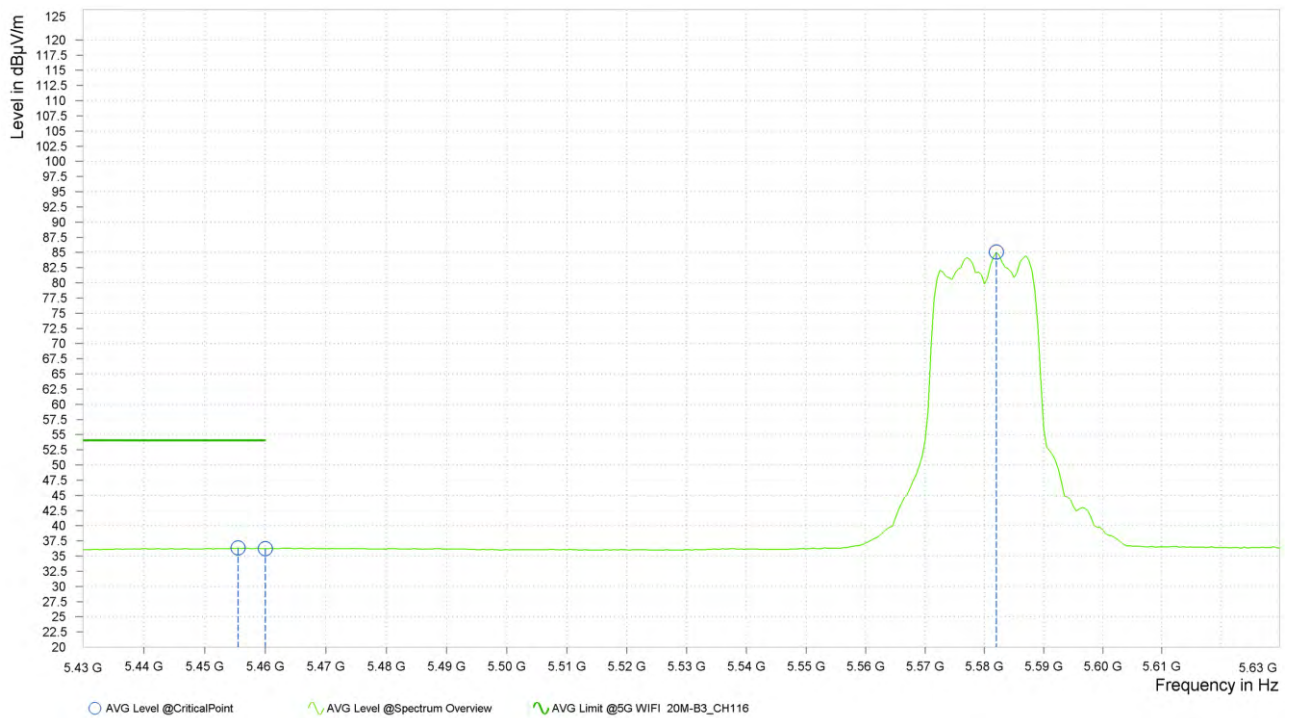

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
2. 5580MHz: Fundamental frequency.
3. #: Out of restricted band.




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF03

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,701.500	95.67			11.65	H	359.1	1.00
10	5,725.000	48.17	68.20	20.03	11.70	H	358.6	1.00
10	5,741.000	49.27	68.20	18.93	11.72	H	358.6	1.00

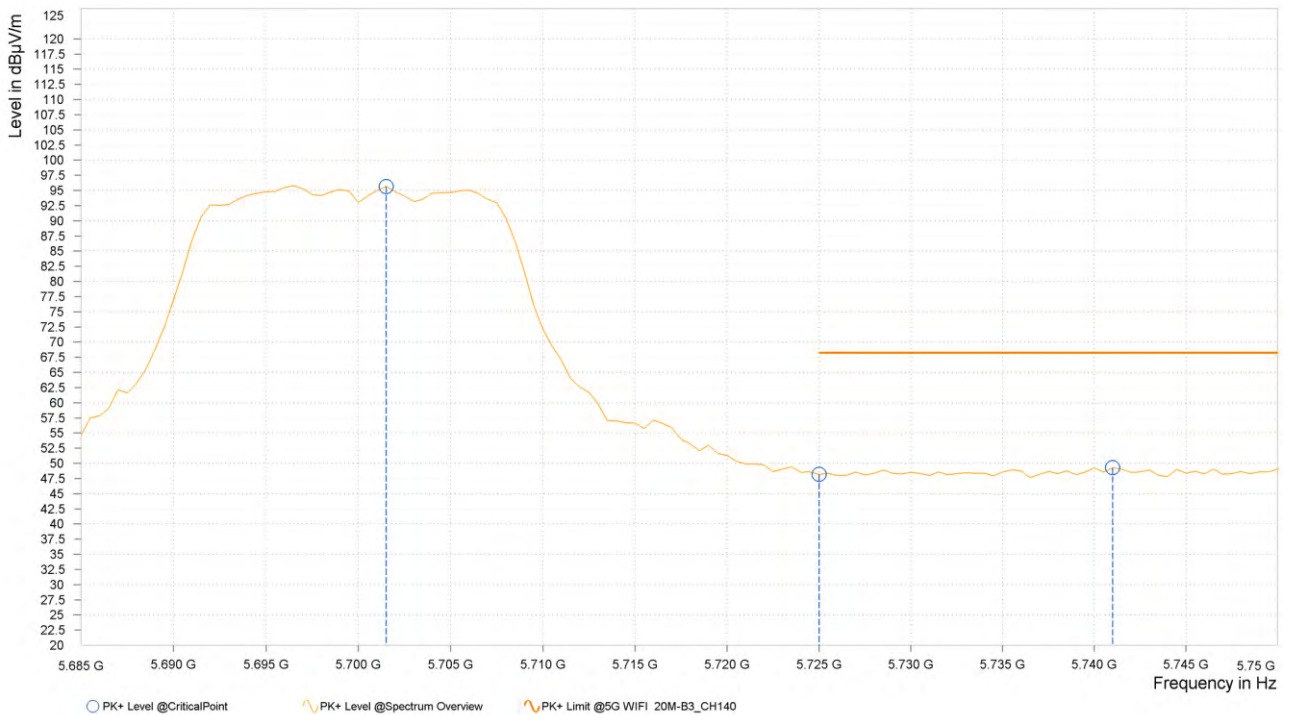



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,696.500	96.70			11.63	V	213.7	2.00
10	5,725.000	48.15	68.20	20.05	11.70	V	101	1.00
10	5,728.000	49.41	68.20	18.79	11.70	V	152.3	1.00

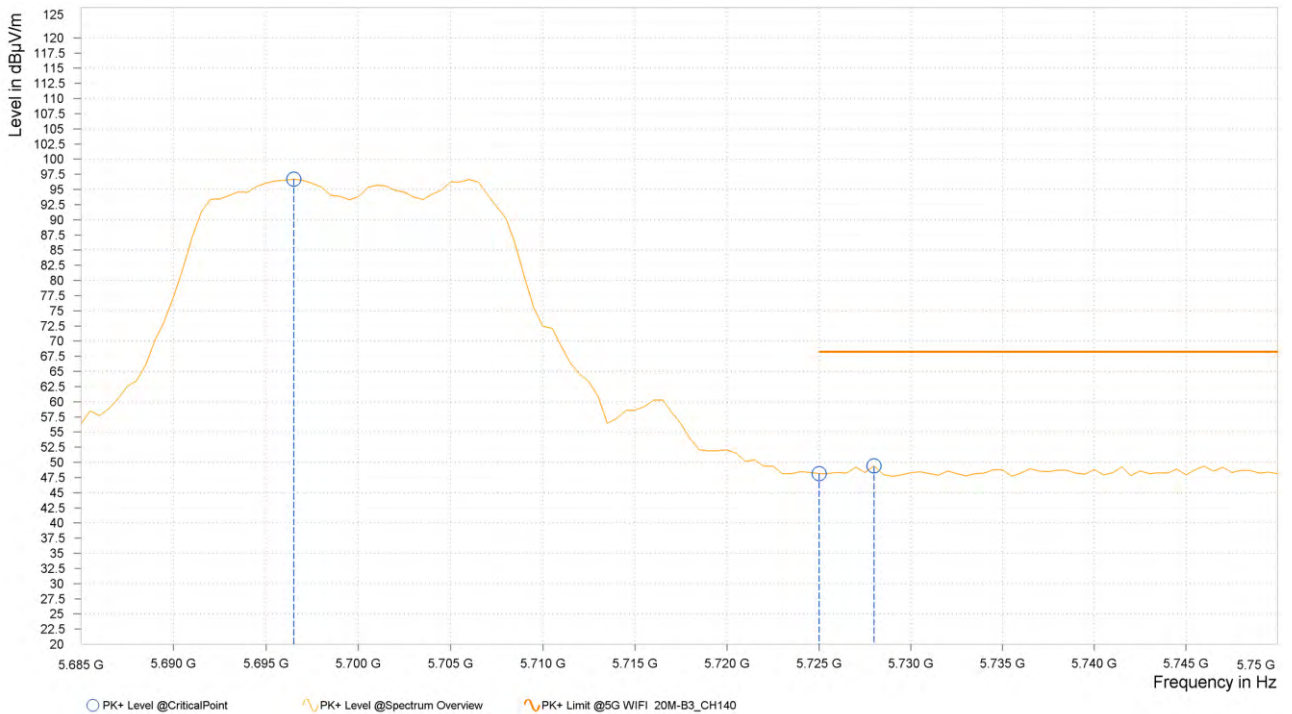

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
2. 5700MHz: Fundamental frequency.
3. #: Out of restricted band.




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF03

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,716.500	94.89			11.68	H	359.1	1.00
11	5,850.000	48.55	68.20	19.65	11.98	H	5	1.00
11	5,897.000	49.83	68.20	18.37	12.13	H	63.1	2.00

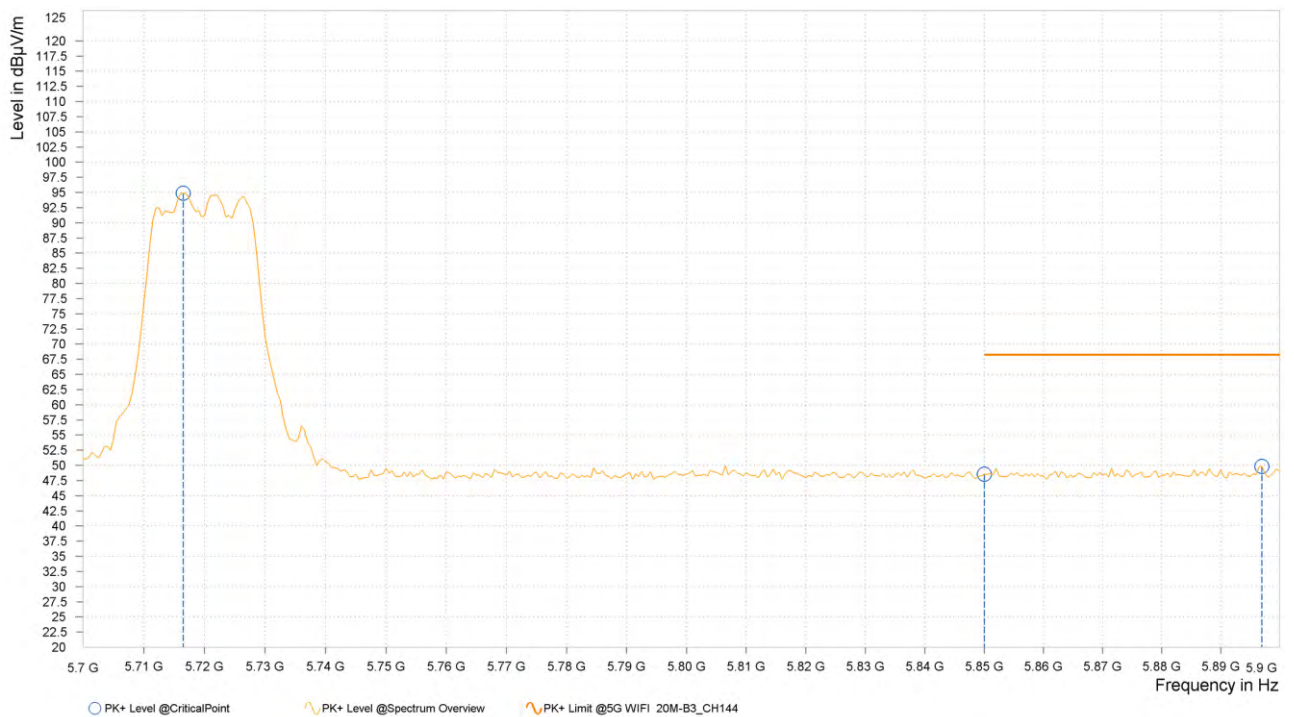



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,721.500	96.17			11.69	V	314.1	2.00
11	5,850.000	48.32	68.20	19.89	11.98	V	359	2.00
11	5,898.000	49.45	68.20	18.75	12.14	V	359	2.00



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5720MHz: Fundamental frequency.
- #: Out of restricted band.



**BUREAU
VERITAS**


Test Report No.: PSU-NQN2403180115RF03

802.11n (20MHz)

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,438.500	51.54	74.00	22.46	11.13	H	143.1	2.00
8	5,460.000	49.93	74.00	24.07	11.12	H	1	2.00
8	5,495.500	97.60			11.10	H	4.9	1.00

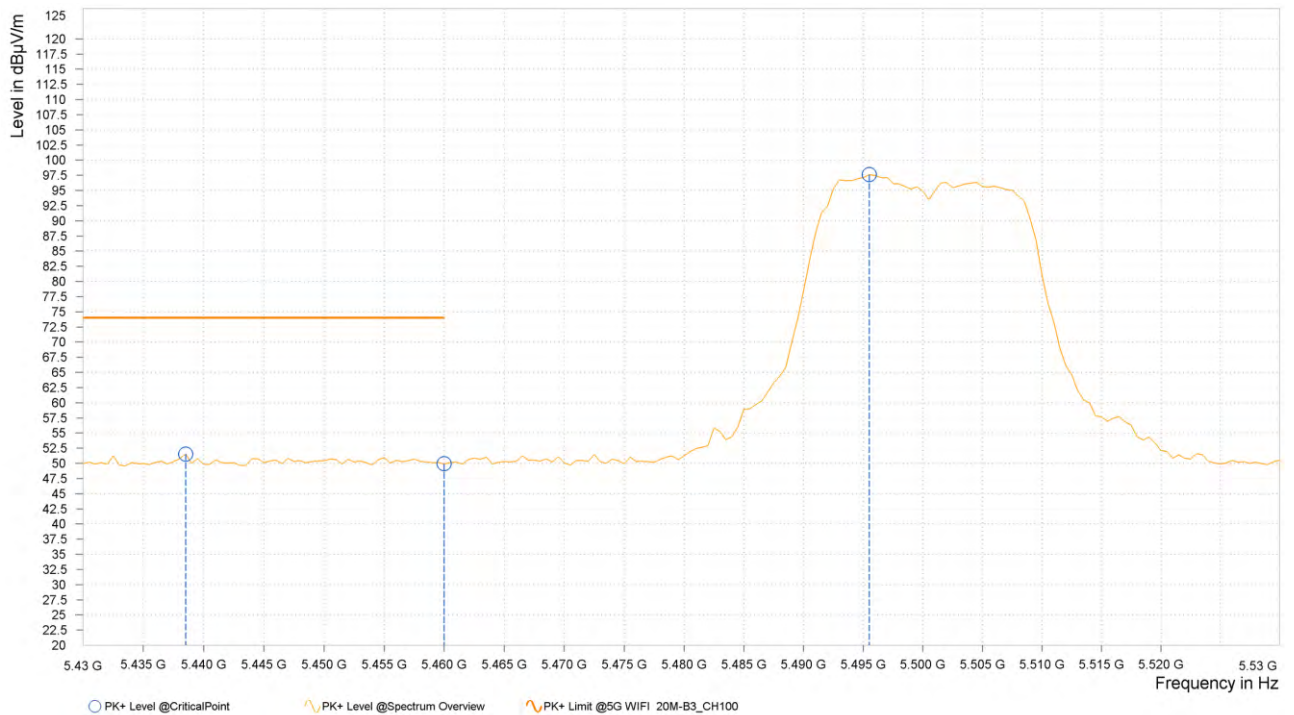




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,457.000	36.30	54.00	17.70	11.12	H	1	1.00
8	5,460.000	36.28	54.00	17.72	11.12	H	1	1.00
8	5,495.500	81.73			11.10	H	5	1.00






ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,455.000	51.66	74.00	22.34	11.12	V	198.2	2.00
8	5,460.000	50.78	74.00	23.22	11.12	V	2.3	2.00
8	5,494.000	97.14			11.10	V	309.3	2.00

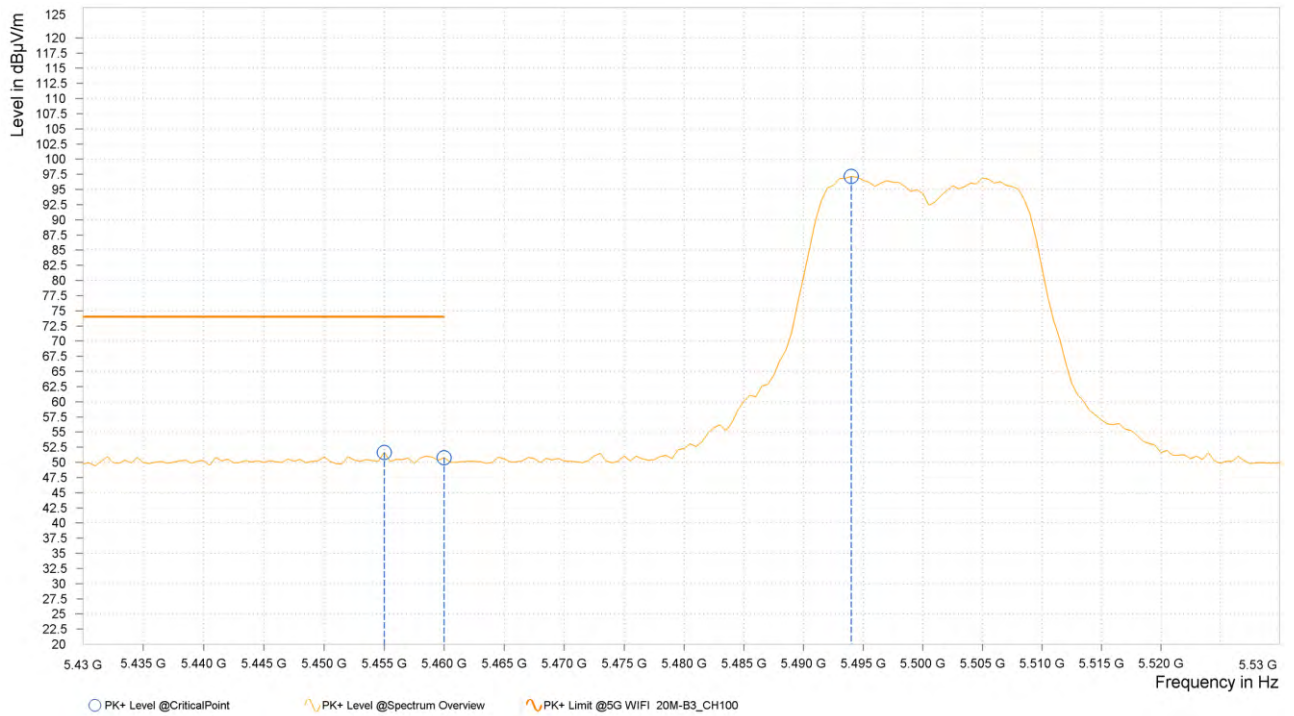



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,458.500	36.54	54.00	17.46	11.12	V	308	2.00
8	5,460.000	36.42	54.00	17.58	11.12	V	308	2.00
8	5,504.000	82.97			11.09	V	216.9	1.00

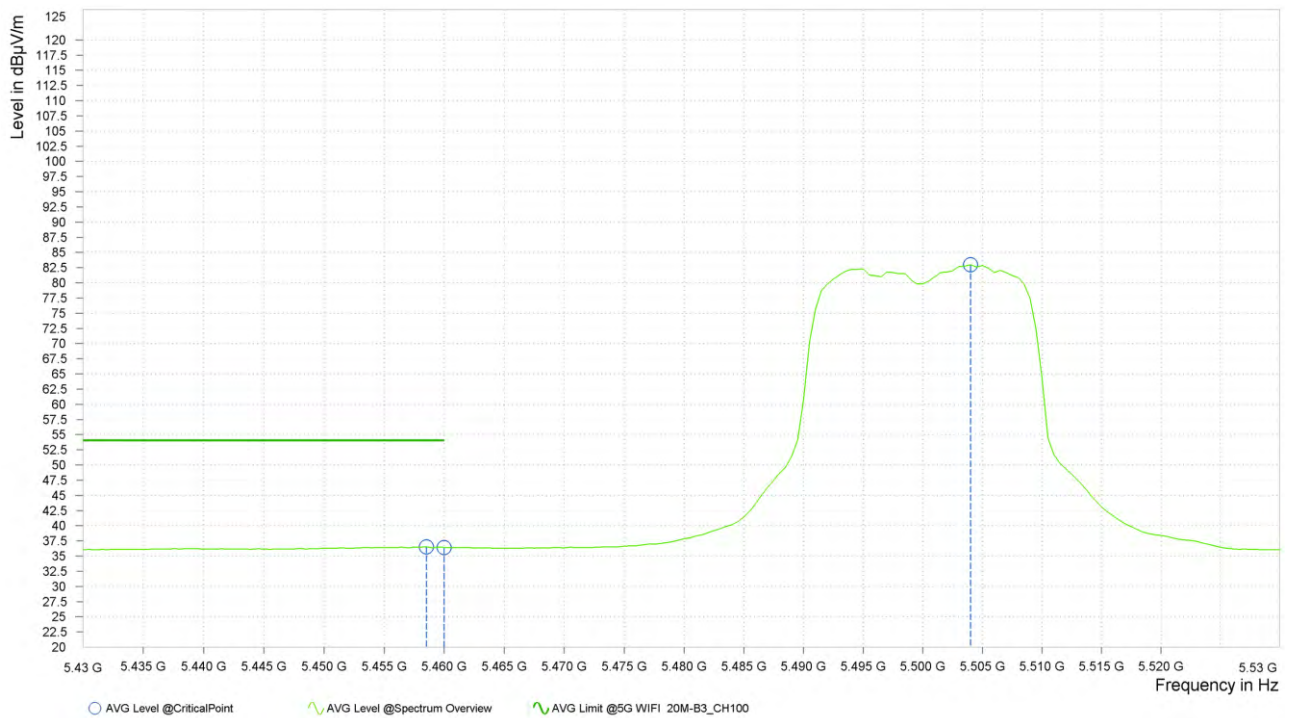

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.



CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,446.000	51.18	74.00	22.82	11.12	H	355.7	2.00
9	5,460.000	50.81	74.00	23.19	11.12	H	330.4	1.00
9	5,577.000	95.50			11.20	H	4.9	1.00

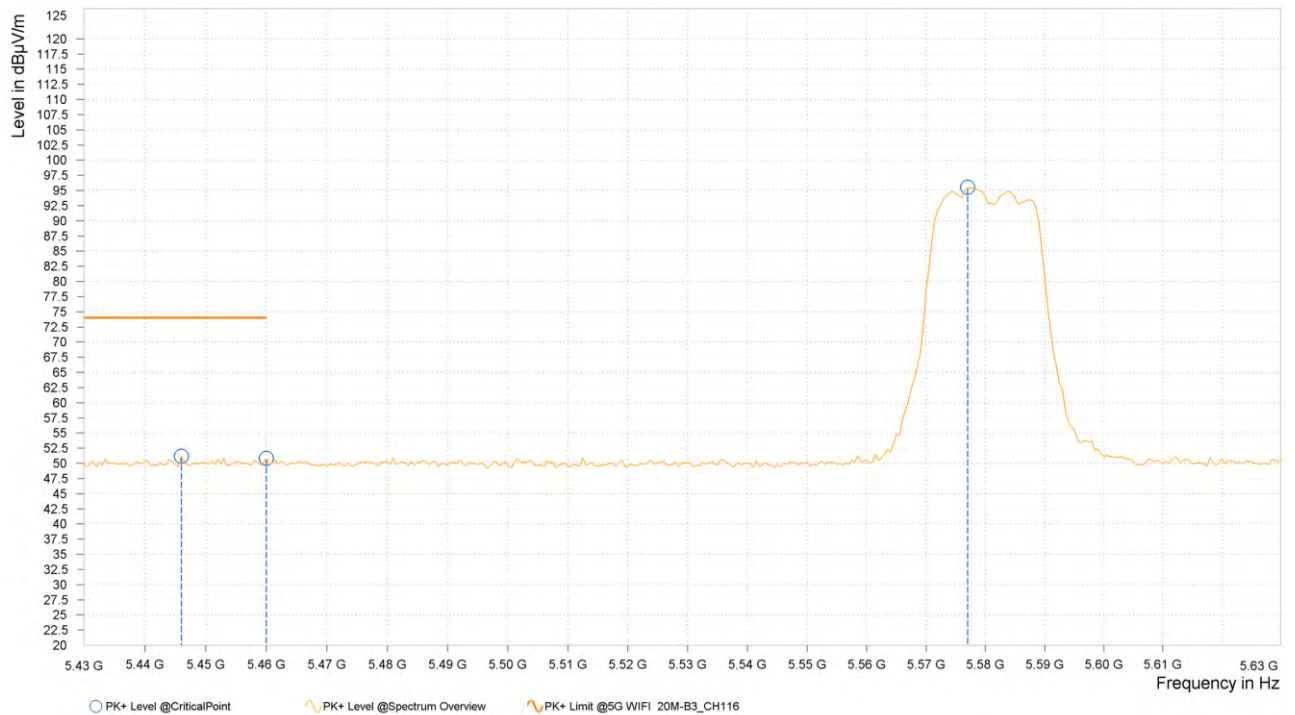




Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,458.000	36.26	54.00	17.74	11.12	H	358.1	1.00
9	5,460.000	36.25	54.00	17.75	11.12	H	335.2	1.00
9	5,578.000	79.96			11.20	H	4.3	1.00





ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,448.000	51.64	74.00	22.36	11.12	V	197	2.00
9	5,460.000	49.73	74.00	24.27	11.12	V	359	2.00
9	5,577.000	95.32			11.20	V	25.6	1.00

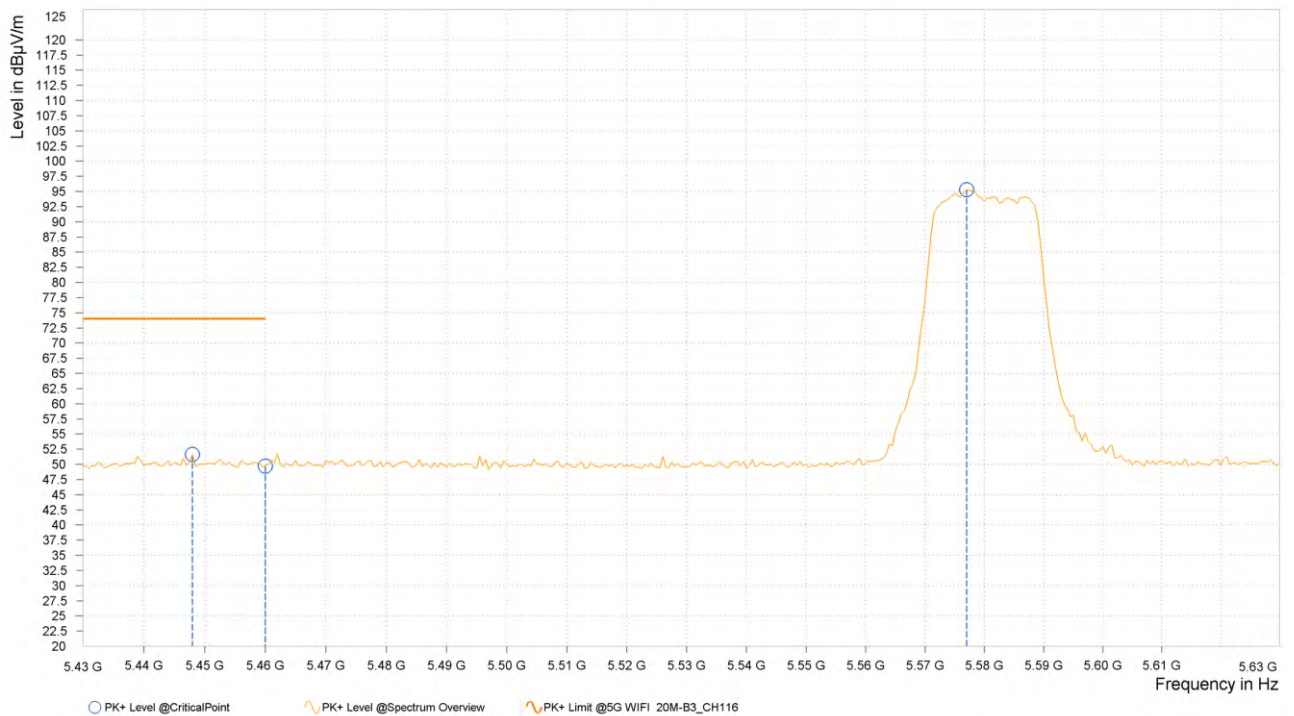



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,459.000	36.25	54.00	17.75	11.12	V	1	2.00
9	5,460.000	36.24	54.00	17.76	11.12	V	320.9	1.00
9	5,583.500	81.45			11.22	V	182.2	1.00



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
2. 5580MHz: Fundamental frequency.
3. #: Out of restricted band.