



Test Report No.: PSU-NQN2405090215RF03



Certificate #6613.01

FCC TEST REPORT (PART 27)

Applicant:	HMD Global Oy
Address:	Bertel Jungin aukio 9 Espoo 02600 Finland

Manufacturer or Supplier:	HMD Global Oy
Address:	Bertel Jungin aukio 9 Espoo 02600 Finland
Product:	Mobile Phone
Brand Name:	HMD
Model Name:	TA-1606
FCC ID:	2AJOTTA-1606
Date of tests:	May. 14, 2024 ~ Jun. 13, 2024

The tests have been carried out according to the requirements of the following standard:

- FCC Part 27 ANSI/TIA/EIA-603-D
- FCC Part 2 ANSI/TIA/EIA-603-E ANSI C63.26-2015

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
Date: Jun. 13, 2024	Date: Jun. 13, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	6
1.2 TEST SITE AND INSTRUMENTS	7
2 GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 CONFIGURATION OF SYSTEM UNDER TEST	14
2.3 DESCRIPTION OF SUPPORT UNITS	15
2.4 TEST ITEM AND TEST CONFIGURATION	15
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	20
3 TEST TYPES AND RESULTS	21
3.1 OUTPUT POWER MEASUREMENT	21
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	21
3.1.2 TEST PROCEDURES	21
3.1.3 TEST SETUP	23
3.1.4 TEST RESULTS	24
3.2 FREQUENCY STABILITY MEASUREMENT	47
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	47
3.2.2 TEST PROCEDURE	47
3.2.3 TEST SETUP	47
3.2.4 TEST RESULTS	48
3.3 OCCUPIED BANDWIDTH MEASUREMENT	49
3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	49
3.3.2 TEST SETUP	49
3.3.3 TEST PROCEDURES	49
3.3.4 TEST RESULTS	50
3.4 BAND EDGE MEASUREMENT	51
3.4.1 LIMITS OF BAND EDGE MEASUREMENT	51
3.4.2 TEST SETUP	52
3.4.3 TEST PROCEDURES	53
3.4.4 TEST RESULTS	54
3.5 CONDUCTED SPURIOUS EMISSIONS	55
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	55
3.5.2 TEST PROCEDURE	55
3.5.3 TEST SETUP	55
3.5.4 TEST RESULTS	55
3.6 RADIATED EMISSION MEASUREMENT	57
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	57
3.6.2 TEST PROCEDURES	57
3.6.3 DEVIATION FROM TEST STANDARD	57
3.6.4 TEST SETUP	58
3.6.5 TEST RESULTS	60
3.7 PEAK TO AVERAGE RATIO	94
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	94
3.7.2 TEST SETUP	94
3.7.3 TEST PROCEDURES	94
3.7.4 TEST RESULTS	95
4 INFORMATION ON THE TESTING LABORATORIES	96
5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB... 97	



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2405090215RF03

6 APPENDIX	98
LTE BAND7	98
LTE BAND12(INCLUDING B17)	133
LTE BAND13	161



Test Report No.: PSU-NQN2405090215RF03

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
PSU-NQN2405090215RF03	Original release	Jun. 13, 2024



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 27 & PART 2			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	TEST LAB*
§2.1046	Conducted Output Power	Compliance	A
§27.50(c)(10) §27.50(b)(10)	Effective Radiated Power (Band 12) (Band 13) (Band 17)	Compliance	A
§27.50(h)(2)	Equivalent Isotropically Radiated Power (Band 7)	Compliance	A
§2.1055 §27.54	Frequency Stability	Compliance	A
§2.1049	Occupied Bandwidth	Compliance	A
§2.1051 §27.53(g) §27.53(m)(4)(6) §27.53(c)(2)(4)	Conducted Band Edge Measurements (Band 7) (Band 12) (Band 13) (Band 17)	Compliance	A
§2.1051 §27.53(g) §27.53(m)(4)(6) §27.53(c)(2)(4)	Conducted Spurious Emissions (Band 7) (Band 12) (Band 13) (Band 17)	Compliance	A
§2.1053 §27.53(g) §27.53(m)(4)(6) §27.53(c)(2)(4)	Radiated Spurious Emissions (Band 7) (Band 12) (Band 13) (Band 17)	Compliance	A
N/A	Peak to average ratio	Compliance	A

*Test Lab Information Reference

Lab A:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zhuyi Road, High-tech District, Suzhou City, Anhui Province

Accredited Test Lab Cert 6613.01


The FCC Site Registration No. is 434559; The Designation No. is CN1325.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	±76.97Hz
Radiated emissions (9KHz~30MHz)	±2.68dB
Radiated emissions & Radiated Power (30MHz~1GHz)	±4.98dB
Radiated emissions & Radiated Power (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Band Edge Measurements	±4.70dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

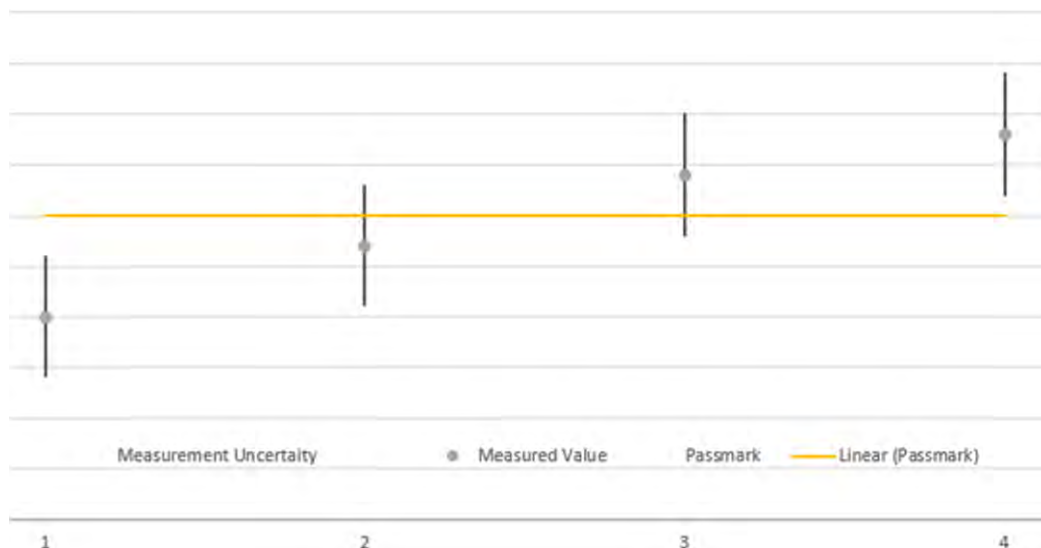

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.

1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,22	Aug.29,24
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Vector Signal Generator	R&S	SMBV100B	102176	Feb.16,24	Feb.15,26
Signal Generator	R&S	SMB100A	182185	Feb.16,24	Feb.15,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-E MC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-E MC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESR26	101734	Feb.25,24	Feb.24,26
EMI TEST Receiver	R&S	ESW44	101973	Feb.25,24	Feb.24,26
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.28,24	Feb.27,26
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,22	Aug.21,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.23,24	Feb.22,26
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.22,22	Aug.21,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,24	Feb.22,26
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.27,22	Jun.26,24
Test Software	EMC32	EMC32	N/A	N/A	N/A
6DB attenuator	Tonscend Technology Co., Ltd	N/A	23062787	N/A	N/A
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	Oct.01,22	Sep.30,24
DC Source	HYELEC	HY3010B	551016	Aug.31,22	Aug.30,24
Hygrothermograph	DELI	20210528	SZ014	Sep.06,22	Sep.05,24
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.26,24	Apr.25,25
CABLE	R&S	W12.14	N/A	Apr.26,24	Apr.25,25
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Apr.26,24	Apr.25,25
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Apr.26,24	Apr.25,25
Temperature Chamber	votsch	VT4002	58566078100050	May.31,22	May.30,24
Temperature Chamber	votsch	VT4002	58566078100050	May.30,24	May.29,26



Test Report No.: PSU-NQN2405090215RF03

NOTE:

1. The calibration interval of the above test instruments is 12 months or 24 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GREGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 434559; The Designation No. is CN1325.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT*	Mobile Phone	
BRAND NAME*	HMD	
MODEL NAME*	TA-1606	
NOMINAL VOLTAGE*	5.0 or 9.0 or 12.0 Vdc (adapter) 3.87Vdc (battery)	
MODULATION TECHNOLOGY*	LTE	QPSK, 16QAM, 64QAM
FREQUENCY RANGE	LTE Band 7 Channel Bandwidth: 5MHz	2502.5MHz ~ 2567.5MHz
	LTE Band 7 Channel Bandwidth: 10MHz	2505MHz ~ 2565MHz
	LTE Band 7 Channel Bandwidth: 15MHz	2507.5MHz ~ 2562.5MHz
	LTE Band 7 Channel Bandwidth: 20MHz	2510MHz ~ 2560MHz
	LTE Band 12 Channel Bandwidth: 1.4MHz	699.7MHz ~ 715.3MHz
	LTE Band 12 Channel Bandwidth: 3MHz	700.5MHz ~ 714.5MHz
	LTE Band 12 Channel Bandwidth: 5MHz	701.5MHz ~ 713.5MHz
	LTE Band 12 Channel Bandwidth: 10MHz	704MHz ~ 711MHz
	LTE Band 13 Channel Bandwidth: 5MHz	779.5MHz ~ 784.5MHz
	LTE Band 13 Channel Bandwidth: 10MHz	782MHz
	LTE Band 17 Channel Bandwidth: 5MHz	706.5MHz ~ 713.5MHz
	LTE Band 17 Channel Bandwidth: 10MHz	709MHz ~ 711 MHz
	MAX. ERP POWER	LTE Band 7 Channel Bandwidth: 5MHz
LTE Band 7 Channel Bandwidth: 10MHz		180.72mW
LTE Band 7 Channel Bandwidth: 15MHz		179.89mW
LTE Band 7 Channel Bandwidth: 20MHz		184.5mW
LTE Band 12 Channel Bandwidth: 1.4MHz		49.09mW
LTE Band 12 Channel Bandwidth: 3MHz		48.53mW



Test Report No.: PSU-NQN2405090215RF03

	LTE Band 12 Channel Bandwidth: 5MHz	48.64mW	
	LTE Band 12 Channel Bandwidth: 10MHz	49.66mW	
	LTE Band 13 Channel Bandwidth: 5MHz	61.52mW	
	LTE Band 13 Channel Bandwidth: 10MHz	63.97mW	
	LTE Band 17 Channel Bandwidth: 5MHz	48.87mW	
	LTE Band 17 Channel Bandwidth: 10MHz	50.12mW	
EMISSION DESIGNATOR	LTE Band 7 Channel Bandwidth: 5MHz	QPSK: 4M53G7D 16QAM: 4M50W7D	
	LTE Band 7 Channel Bandwidth: 10MHz	QPSK: 9M04G7D 16QAM: 9M01W7D	
	LTE Band 7 Channel Bandwidth: 15MHz	QPSK: 13M5G7D 16QAM: 13M5W7D	
	LTE Band 7 Channel Bandwidth: 20MHz	QPSK: 18M0G7D 16QAM: 18M0W7D	
	LTE Band 12 Channel Bandwidth: 1.4MHz	QPSK: 1M09G7D 16QAM: 1M10W7D	
	LTE Band 12 Channel Bandwidth: 3MHz	QPSK: 2M71G7D 16QAM: 2M70W7D	
	LTE Band 12 Channel Bandwidth: 5MHz	QPSK: 4M53G7D 16QAM: 4M50W7D	
	LTE Band 12 Channel Bandwidth: 10MHz	QPSK: 9M03G7D 16QAM: 9M02W7D	
	LTE Band 13 Channel Bandwidth: 5MHz	QPSK: 4M53G7D 16QAM: 4M50W7D	
	LTE Band 13 Channel Bandwidth: 10MHz	QPSK: 9M02G7D 16QAM: 9M01W7D	
	ANTENNA TYPE*	PIFA Antenna with -0.2dBi gain for LTE7 PIFA Antenna with -4.9dBi gain for LTE12/17 PIFA Antenna with -3.7dBi gain for LTE13	
	HW VERSION*	V00	



BUREAU
VERITAS

Test Report No.: PSU-NQN2405090215RF03

SW VERSION*	V0.019_A01
I/O PORTS*	Refer to user's manual
CABLE SUPPLIED*	USB cable1: non-shielded cable, with w/o ferrite core, 1.0 meter USB cable2: non-shielded cable, with w/o ferrite core, 1.0 meter USB cable3: non-shielded cable, with w/o ferrite core, 1.0 meter USB cable4: non-shielded cable, with w/o ferrite core, 1.0 meter
EXTREME TEMPERATURE*	-10 ~ 55 °C
EXTREME VOLTAGE*	3.6V ~ 4.45V

NOTE:

- *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information , Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
LTE	1TX/1RX

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

5. For the product of TA-1606 (FCC ID: 2AJOTTA-1606), the following components are different between the first and second supply, other parameters are the same.





Key Component List						
No.	Component	Description	First supply		Second supply	
			SUPPLIER	Spec	SUPPLIER	Spec
1	NMOS	PCBA	RISEMI	PNM3FD20V2	JSCJ	CJBA3134K
2	E-compass		MEMSIC	MMCS603NJ	QST	QMC6308-TR
3	Memory-256GB		FORESEE	FEUDNN256G-C2G07	BIWIN	BWU2ASV46A256G
4	Memory-64GB		FORESEE	FLXC4008G-30	BIWIN	BWMZCX32H2A-64G-X
5	nano-SIM		LCN	CAF99-06033-0305	HRD	S186-1B01F13F
6	T-card		LCN	CAF11-08136-031901	HRD	S186-1B02F13F
7	iron covering		LCN	CAF00-21134-032307	HRD	S186-2B21F13F-1
8	Type C connector		LETCON	15-16815-110	LCN	UAF05-16323-3007
9	headphone socket		LETCON	11-058126A	HRD	PH157-0B12F36M
10	G sensor		slan	2*2 12bit	sensortek	2*2 12bit
11	Proximity light sensor		Liteon	LTR-569ALS-02	sensortek	STK3335-X
12	Backlight driver		AWINIC	dfn2*2-6L	broadchip	dfn2*2-6L
13	Flash driver		AWINIC	2A DCDC	OCS	2A DCDC
14	CKDID baschip		AWINIC	±5V	OCS	±5V
15	overvoltage protection chip		broadchip	6.8V FCQFN12	AWINIC	6.8V FCQFN12
16	CKD BDS/GPS/GAL LNA		SILICONWAVE	LNA 1.5*1.0 6pin	AWINIC	LNA 1.5*1.0 6pin
17	MIC		GETTOP	2.75*1.85*0.9mm	YUTAI	2.75*1.85*0.9mm
18	LCM	LCD	HUAXIAN	incell5.56HD+	DZX	incell5.56HD+
19	Macro cam	camera	CXT	2M CSP	lianhe	2M CSP
20	Finger print	module	SYX	side fingerprint	SHENAO	side fingerprint
21	Battery		GAOYUAN	Rated: 4900mAh Typical: 5000mAh	FENGHUA	Rated: 4900mAh Typical: 5000mAh
22	Receiver		SENNOR	'0809	TUNESS	'0809
23	Vibrator		JX	0830 3.35mm	JD	0830 3.35mm
24	Charger US		BJD	5V 2A	JUWEI	5V 2A
25	Data cable		JUWEI	A-C	FKY	A-C
			JUWEI	C-C	FKY	C-C

List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
Battery 1	HMD	Gaoyuan	HBA5020AA	Power Rating: 3.87 Vdc;18.963 Wh;4900 mAh
Battery 2	HMD	Fenghua	HBA5020AA	Power Rating: 3.87 Vdc;18.963 Wh;4900 mAh
AC Adapter 1	HMD	Shenzhen Baijunda Electronics Co.,Ltd	HAD-020U(US-P D 20W)	I/P: 100-240 V,50~60Hz,0.6A O/P: USB-C Output:5.0V 3.0A or 9.0V 2.22A or 12.0V 1.67A 20.0W Max
AC Adapter 2	HMD	Shenzhen Baijunda Electronics Co.,Ltd	HAD-010U(US)	I/P: 100-240 V,50~60Hz,0.35A O/P: 5V 2A,10W
AC Adapter 3	HMD	Huizhou Juwei Electronics Co., Ltd.	HAD-010U(US)	I/P: 100-240 V,50~60Hz,0.35A O/P: 5V 2A,10W
Earphone	HMD	N/A	JWEP1266-H24H	N/A
USB Cable 1	HMD	JUWEI	JWUB1684-M01H	A to C
USB Cable 2	HMD	JUWEI	JWUB1688-M01H	C to C
USB Cable 3	HMD	FUKANGYUAN	FKY-23-368	A to C
USB Cable 4	HMD	FUKANGYUAN	FKY-23-369	C to C

6. The worst-case scenario for all measurements is based on an engineering evaluation made on different modulations. Then, QPSK and 16QAM were observed as the worst mode to LTE bands respectively and set for all conducted and radiated. Output power measurements were measured on QPSK, 16QAM, 64QAM modulations, and tests other than output power are performed only in worse-case QPSK and 16QAM modulations.

2.2 CONFIGURATION OF SYSTEM UNDER TEST FOR RADIATION EMISSION TEST

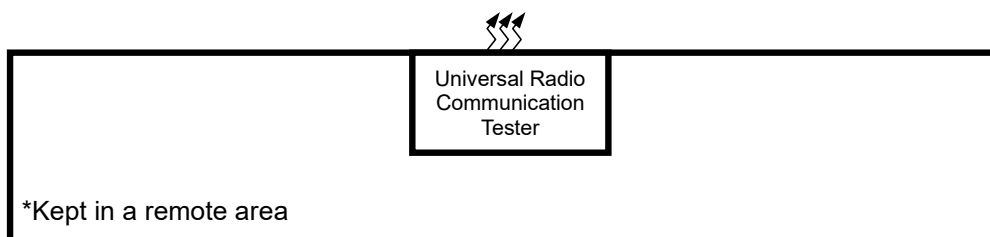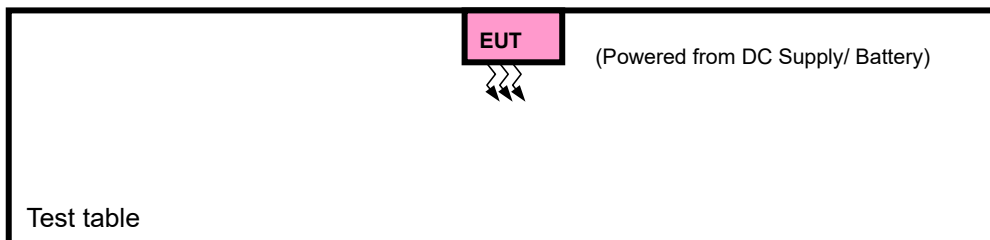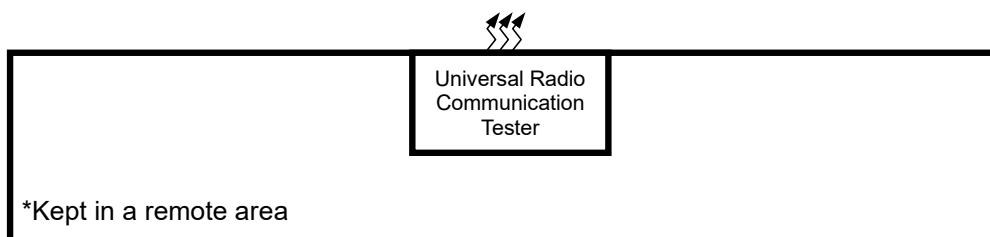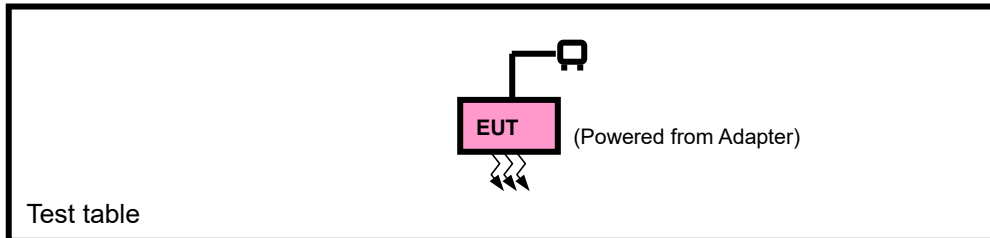



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC Source	HYELEC	HY3010B	551016	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + USB Cable with LTE link
B	EUT + DC Supply with LTE link

LTE BAND 7 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDT H	MODULATION	MODE		
A	EIRP	20775 to 21425	20775, 21100, 21425	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
		20800 to 21400	20800, 21100, 21400	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0RB Offset		
		20825 to 21375	20825, 21100, 21375	15MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
		20850 to 21350	20850, 21100, 21350	20MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
B	FREQUENCY STABILITY	20800 to 21400	20800, 21100, 21400	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset		
A	OCCUPIED BANDWIDTH	20775 to 21425	20775, 21100, 21425	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset		
		20800 to 21400	20800, 21100, 21400	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset		
		20825 to 21375	20825, 21100, 21375	15MHz	QPSK, 16QAM	75 RB / 0 RB Offset		
		20850 to 21350	20850, 21100, 21350	20MHz	QPSK, 16QAM	100 RB / 0 RB Offset		
A	PEAK TO AVERAGE RATIO	20850 to 21350	20850, 21100, 21350	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset 100 RB / 0 RB Offset		
A	BAND EDGE	20775 to 21425	20775	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset		
			21425	5MHz	QPSK, 16QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset		
		20800 to 21400	20800	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset		
			21400	10MHz	QPSK, 16QAM	1 RB / 49 RB Offset 50 RB / 0 RB Offset		
		20825 to 21375	20825	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset 75 RB / 0 RB Offset		
			21375	15MHz	QPSK, 16QAM	1 RB / 74 RB Offset 75 RB / 0 RB Offset		
		20850 to 21350	20850	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset 100 RB / 0 RB Offset		
			21350	20MHz	QPSK, 16QAM	1 RB / 99 RB Offset 100 RB / 0 RB Offset		
		A	CONDUCTED EMISSION	20775 to 21425	20775, 21100, 21425	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
				20800 to 21400	20800, 21100, 21400	10MHz	QPSK, 16QAM	1 RB / 0RB Offset
				20825 to 21375	20825, 21100, 21375	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset
				20850 to 21350	20850, 21100, 21350	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	20775 to 21425	21100	5MHz	QPSK	1 RB / 0 RB Offset		
		20800 to 21400	21100	10MHz	QPSK	1 RB / 0 RB Offset		
		20825 to 21375	21100	15MHz	QPSK	1 RB / 0 RB Offset		
		20850 to 21350	20850, 21100, 21350	20MHz	QPSK	1 RB / 0 RB Offset		

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE BAND 12 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE		
A	ERP	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
B	FREQUENCY STABILITY	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK, 16QAM	6 RB / 0 RB Offset		
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK, 16QAM	15 RB / 0 RB Offset		
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset		
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset		
A	OCCUPIED BANDWIDTH	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK, 16QAM	6 RB / 0 RB Offset		
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK, 16QAM	15 RB / 0 RB Offset		
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset		
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset		
A	PEAK TO AVERAGE RATIO	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset 6 RB / 0 RB Offset		
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset 15 RB / 0 RB Offset		
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset		
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset		
A	BAND EDGE	23017 to 23173	23017	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset 6 RB / 0 RB Offset		
			23173	1.4MHz	QPSK, 16QAM	1 RB / 5 RB Offset 6 RB / 0 RB Offset		
		23025 to 23165	23025	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset 15 RB / 0 RB Offset		
			23165	3MHz	QPSK, 16QAM	1 RB / 14 RB Offset 15 RB / 0 RB Offset		
		23035 to 23155	23035	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset		
			23155	5MHz	QPSK, 16QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset		
		23060 to 23130	23060	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset		
			23130	10MHz	QPSK, 16QAM	1 RB / 49 RB Offset 50 RB / 0 RB Offset		
		A	CONDCUEDTED EMISSION	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset
				23025 to 23165	23025, 23095 ,23165	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset
				23035 to 23155	23035, 23095 ,23155	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
				23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	23017 to 23173	23095	1.4MHz	QPSK	1 RB / 0 RB Offset		
		23025 to 23165	23025 ,23095, 23165	3MHz	QPSK	1 RB / 0 RB Offset		
		23035 to 23155	23095	5MHz	QPSK	1 RB / 0 RB Offset		
		23060 to 23130	23095	10MHz	QPSK	1 RB / 0 RB Offset		

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



BUREAU
VERITAS

Test Report No.: PSU-NQN2405090215RF03

LTE BAND 13 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	ERP	23205 to 23255	23205, 20175, 23255	5MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		23230	23230	10MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	23230	23230	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	23205 to 23255	23205, 20175, 23255	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
		23230	23230	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	23230	23230	10MHz	QPSK,16QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
A	BAND EDGE	23205 to 23255	23205	5MHz	QPSK,16QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			23255	5MHz	QPSK,16QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		23230	23230	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
						1 RB / 49 RB Offset
						50 RB / 0 RB Offset
						50 RB / 0 RB Offset
A	CONDCUDED EMISSION	23205 to 23255	23205, 20175, 23255	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		23230	23230	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	23205 to 23255	23205,23230,23255	5MHz	QPSK	1 RB / 0 RB Offset
		23230	23230	10MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE BAND 17 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	ERP	23755 to 23825	23755, 23790, 23825	5MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		23780 to 23800	23780, 23790, 23800	10MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset

Note: 1.This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

2. LTE Band 17 are covered by LTE Band 12, Because it is a subset of LTE Band 12 with the same output power and supported bandwidths, So the conducted test data and RSE test data please refer to LTE Band 12



Test Report No.: PSU-NQN2405090215RF03

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP&EIRP	23deg. C, 70%RH	DC 5/9/12V By Adapter	Hanwen Xu
FREQUENCY STABILITY	23deg. C, 70%RH	DC 3.87V By DC Supply	Hanwen Xu
OCCUPIED BANDWIDTH	23deg. C, 70%RH	DC 5/9/12V By Adapter	Hanwen Xu
BAND EDGE	23deg. C, 70%RH	DC 5/9/12V By Adapter	Hanwen Xu
CONDCUDETED EMISSION	23deg. C, 70%RH	DC 5/9/12V By Adapter	Hanwen Xu
RADIATED EMISSION	23deg. C, 70%RH	DC 5/9/12V By Adapter	Hanwen Xu
PEAK TO AVERAGE RATIO	23deg. C, 70%RH	DC 5/9/12V By Adapter	Hanwen Xu



Test Report No.: PSU-NQN2405090215RF03

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “User stations are limited to 2 watts” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP

According to the specific rule Part 27.50(b)(10) and 27.50(c)(10) Fixed, mobile, and Portable stations (hand-held devices) transmitting in the 698-746 MHz, 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2405090215RF03

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_c = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

CONDUCTED POWER MEASUREMENT:


- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



Test Report No.: PSU-NQN2405090215RF03

3.1.3 TEST SETUP

CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.4 TEST RESULTS

AVERAGE CONDUCTED OUTPUT POWER (dBm)

LTE Band 7

Band/BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				20775 Frequency 2502.5 MHz	21100 Frequency 2535 MHz	21425 Frequency 2567.5 MHz
7/5	QPSK	1	0	22.45	22.40	22.68
		1	12	22.41	22.44	22.59
		1	24	22.55	22.58	22.80
		12	0	21.60	21.36	21.69
		12	6	21.53	21.45	21.72
		12	13	21.59	21.51	21.74
		25	0	21.54	21.34	21.72
	16QAM	1	0	21.59	21.86	21.67
		1	12	21.51	21.98	21.82
		1	24	21.37	21.87	21.69
		12	0	20.78	20.65	20.94
		12	6	20.63	20.79	20.73
		12	13	20.86	20.70	20.72
		25	0	20.77	20.87	20.92
	64QAM	1	0	20.88	20.67	20.88
		1	12	20.71	20.68	20.74
		1	24	20.70	20.68	20.80
		12	0	20.33	20.28	20.36
		12	6	20.16	20.23	20.34
		12	13	20.31	20.29	20.28
		25	0	20.32	20.13	20.30

Band/BW	Modulation	RB Size	RB Offset	Low CH 20800	Mid CH 21100	High CH 21400
				Frequency 2505 MHz	Frequency 2535 MHz	Frequency 2565 MHz
7/ 10	QPSK	1	0	22.49	22.43	22.77
		1	24	22.49	22.36	22.64
		1	49	22.53	22.65	22.76
		25	0	21.55	21.44	21.60
		25	12	21.54	21.47	21.62
		25	25	21.60	21.48	21.69
		50	0	21.60	21.44	21.70
	16QAM	1	0	21.60	21.90	21.80
		1	24	21.63	21.84	21.79
		1	49	21.43	21.77	21.80
		25	0	20.76	20.69	20.84
		25	12	20.67	20.77	20.82
		25	25	20.94	20.70	20.73
		50	0	20.77	20.83	20.95
	64QAM	1	0	20.84	20.73	20.84
		1	24	20.72	20.72	20.74
		1	49	20.70	20.69	20.70
		25	0	20.42	20.24	20.44
		25	12	20.26	20.19	20.31
		25	25	20.32	20.32	20.38
		50	0	20.26	20.25	20.34



Test Report No.: PSU-NQN2405090215RF03

Band/BW	Modulation	RB Size	RB Offset	Low CH 20825	Mid CH 21100	High CH 21375
				Frequency 2507.5 MHz	Frequency 2535 MHz	Frequency 2562.5 MHz
7/ 15	QPSK	1	0	22.37	22.45	22.75
		1	37	22.43	22.43	22.62
		1	74	22.50	22.59	22.74
		36	0	21.60	21.47	21.57
		36	19	21.41	21.47	21.62
		36	39	21.52	21.52	21.67
		75	0	21.55	21.31	21.67
	16QAM	1	0	21.51	21.84	21.70
		1	37	21.53	21.93	21.78
		1	74	21.40	21.80	21.76
		36	0	20.77	20.61	20.80
		36	19	20.65	20.69	20.86
		36	39	20.93	20.73	20.73
		75	0	20.65	20.82	20.92
	64QAM	1	0	20.89	20.73	20.88
		1	37	20.75	20.67	20.75
		1	74	20.72	20.67	20.75
		36	0	20.39	20.25	20.39
		36	19	20.15	20.26	20.25
		36	39	20.37	20.27	20.35
		75	0	20.34	20.20	20.32

Band/BW	Modulation	RB Size	RB Offset	Low CH 20850	Mid CH 21100	High CH 21350
				Frequency 2510 MHz	Frequency 2535 MHz	Frequency 2560 MHz
7/ 20	QPSK	1	0	22.50	22.46	22.81
		1	50	22.53	22.50	22.66
		1	99	22.56	22.69	22.86
		50	0	21.61	21.49	21.72
		50	25	21.56	21.52	21.74
		50	50	21.63	21.55	21.77
		100	0	21.65	21.45	21.82
	16QAM	1	0	21.62	21.96	21.82
		1	50	21.64	21.99	21.84
		1	99	21.49	21.89	21.81
		50	0	20.84	20.75	20.95
		50	25	20.78	20.80	20.87
		50	50	20.96	20.76	20.81
		100	0	20.78	20.89	20.97
	64QAM	1	0	20.94	20.80	20.92
		1	50	20.80	20.76	20.86
		1	99	20.79	20.72	20.82
		50	0	20.43	20.39	20.46
		50	25	20.30	20.31	20.37
		50	50	20.39	20.33	20.41
		100	0	20.35	20.27	20.39

LTE Band 12

Band/BW	Modulation	RB Size	RB Offset	Low CH 23017	Mid CH 23095	High CH 23173
				Frequency 699.7 MHz	Frequency 707.5 MHz	Frequency 715.3 MHz
12/ 1.4	QPSK	1	0	23.64	23.72	23.96
		1	2	23.76	23.80	23.89
		1	5	23.66	23.70	23.94
		3	0	22.70	22.71	22.68
		3	1	22.68	22.62	22.62
		3	3	22.61	22.68	22.76
		6	0	22.69	22.68	22.67
	16QAM	1	0	23.00	22.71	22.82
		1	2	22.79	22.62	22.65
		1	5	22.85	22.71	22.54
		3	0	21.47	21.53	21.35
		3	1	21.26	21.61	21.37
		3	3	21.36	21.66	21.35
		6	0	21.47	21.44	21.38
	64QAM	1	0	21.70	21.76	21.32
		1	2	21.84	21.62	21.23
		1	5	21.76	21.70	21.14
		3	0	20.60	20.80	20.45
		3	1	20.71	20.42	20.61
		3	3	20.78	20.83	20.58
		6	0	20.79	20.47	20.74



Test Report No.: PSU-NQN2405090215RF03

Band/BW	Modulation	RB Size	RB Offset	Low CH 23025	Mid CH 23095	High CH 23165
				Frequency 700.5 MHz	Frequency 707.5 MHz	Frequency 714.5 MHz
12/ 3	QPSK	1	0	23.70	23.75	23.89
		1	7	23.88	23.76	23.91
		1	14	23.78	23.68	23.82
		8	0	22.69	22.63	22.62
		8	3	22.62	22.69	22.63
		8	7	22.63	22.69	22.69
		15	0	22.58	22.66	22.60
	16QAM	1	0	22.93	22.70	22.79
		1	7	22.77	22.67	22.67
		1	14	22.76	22.66	22.63
		8	0	21.44	21.50	21.43
		8	3	21.33	21.61	21.38
		8	7	21.39	21.74	21.41
		15	0	21.43	21.46	21.40
	64QAM	1	0	21.82	21.64	21.25
		1	7	21.83	21.63	21.23
		1	14	21.75	21.70	21.10
		8	0	20.57	20.83	20.45
		8	3	20.65	20.43	20.50
		8	7	20.76	20.79	20.64
		15	0	20.71	20.49	20.79

Band/BW	Modulation	RB Size	RB Offset	Low CH 23035	Mid CH 23095	High CH 23155
				Frequency 701.5 MHz	Frequency 707.5 MHz	Frequency 713.5 MHz
12/ 5	QPSK	1	0	23.73	23.77	23.84
		1	12	23.76	23.87	23.87
		1	24	23.72	23.77	23.92
		12	0	22.58	22.65	22.60
		12	6	22.65	22.70	22.57
		12	13	22.68	22.74	22.77
		25	0	22.66	22.61	22.58
	16QAM	1	0	22.87	22.73	22.81
		1	12	22.77	22.64	22.67
		1	24	22.82	22.60	22.58
		12	0	21.42	21.64	21.31
		12	6	21.30	21.65	21.31
		12	13	21.37	21.67	21.44
		25	0	21.35	21.39	21.37
	64QAM	1	0	21.81	21.62	21.33
		1	12	21.78	21.69	21.23
		1	24	21.73	21.72	21.12
		12	0	20.64	20.73	20.57
		12	6	20.72	20.33	20.54
		12	13	20.78	20.83	20.59
		25	0	20.75	20.42	20.80

Band/BW	Modulation	RB Size	RB Offset	Low CH 23060	Mid CH 23095	High CH 23130
				Frequency 704 MHz	Frequency 707.5 MHz	Frequency 711 MHz
12/ 10	QPSK	1	0	23.79	23.81	23.97
		1	24	23.91	23.90	24.01
		1	49	23.80	23.83	23.97
		25	0	22.71	22.73	22.70
		25	12	22.74	22.76	22.72
		25	25	22.75	22.80	22.81
		50	0	22.70	22.72	22.73
	16QAM	1	0	23.02	22.85	22.84
		1	24	22.86	22.72	22.71
		1	49	22.90	22.74	22.65
		25	0	21.48	21.65	21.46
		25	12	21.39	21.66	21.42
		25	25	21.43	21.76	21.49
		50	0	21.50	21.54	21.46
	64QAM	1	0	21.83	21.77	21.38
		1	24	21.87	21.76	21.25
		1	49	21.78	21.78	21.19
		25	0	20.67	20.87	20.58
		25	12	20.73	20.47	20.65
		25	25	20.79	20.88	20.67
		50	0	20.86	20.54	20.87



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2405090215RF03

LTE Band 13

Band/BW	Modulation	RB Size	RB Offset	Low CH 23205	Mid CH 23230	High CH 23255
				Frequency 779.5 MHz	Frequency 782.0 MHz	Frequency 784.5 MHz
13/ 5	QPSK	1	0	23.64	23.57	23.67
		1	12	23.66	23.67	23.74
		1	24	23.59	23.59	23.73
		12	0	22.51	22.45	22.63
		12	6	22.58	22.56	22.46
		12	13	22.58	22.67	22.69
		25	0	22.26	22.60	22.50
	16QAM	1	0	22.59	22.57	23.19
		1	12	22.56	22.72	23.08
		1	24	22.60	22.59	23.03
		12	0	21.14	21.30	21.28
		12	6	20.97	21.48	21.34
		12	13	21.11	21.39	21.31
		25	0	21.13	21.26	21.25
	64QAM	1	0	21.17	21.75	20.53
		1	12	21.08	21.82	20.58
		1	24	21.31	21.71	20.44
		12	0	20.59	20.28	20.31
		12	6	20.37	20.79	20.83
		12	13	20.23	20.28	20.90
		25	0	20.21	20.62	20.72



Test Report No.: PSU-NQN2405090215RF03

Band/BW	Modulation	RB Size	RB Offset	/	Mid CH 23230	/
				/	Frequency 782.0 MHz	/
13/ 10	QPSK	1	0	/	23.91	/
		1	24	/	23.89	/
		1	49	/	23.82	/
		25	0	/	22.94	/
		25	12	/	22.91	/
		25	25	/	22.77	/
		50	0	/	22.80	/
	16QAM	1	0	/	22.70	/
		1	24	/	22.75	/
		1	49	/	22.67	/
		25	0	/	22.16	/
		25	12	/	21.96	/
		25	25	/	22.08	/
		50	0	/	22.09	/
	64QAM	1	0	/	22.26	/
		1	24	/	22.19	/
		1	49	/	22.25	/
		25	0	/	21.10	/
		25	12	/	21.10	/
		25	25	/	21.06	/
		50	0	/	21.04	/



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2405090215RF03

LTE Band 17

Band/BW	Modulation	RB Size	RB Offset	Low CH 23755	Mid CH 23790	High CH 23825
				Frequency 706.5 MHz	Frequency 710 MHz	Frequency 713.5 MHz
17/ 5	QPSK	1	0	23.85	23.73	23.94
		1	12	23.82	23.77	23.87
		1	24	23.89	23.74	23.83
		12	0	22.62	22.63	22.67
		12	6	22.72	22.63	22.61
		12	13	22.71	22.72	22.83
		25	0	22.55	22.72	22.71
	16QAM	1	0	22.92	22.82	23.02
		1	12	22.74	22.72	22.94
		1	24	22.84	22.72	22.84
		12	0	21.27	21.58	21.42
		12	6	21.12	21.71	21.45
		12	13	21.25	21.59	21.42
		25	0	21.21	21.41	21.36
	64QAM	1	0	21.41	21.48	21.55
		1	12	21.37	21.62	21.53
		1	24	21.40	21.37	21.52
		12	0	20.80	20.47	20.48
		12	6	20.55	20.95	20.65
		12	13	20.39	20.43	20.64
		25	0	20.31	20.85	20.92



Test Report No.: PSU-NQN2405090215RF03

Band/BW	Modulation	RB Size	RB Offset	Low CH 23780	Mid CH 23790	High CH 23800
				Frequency 709 MHz	Frequency 710 MHz	Frequency 711 MHz
17/ 10	QPSK	1	0	23.96	23.85	24.05
		1	24	23.87	23.82	24.02
		1	49	23.90	23.83	23.95
		25	0	22.75	22.72	22.70
		25	12	22.80	22.76	22.76
		25	25	22.83	22.77	22.86
		50	0	22.65	22.74	22.82
	16QAM	1	0	22.94	22.87	23.11
		1	24	22.84	22.86	22.99
		1	49	22.89	22.85	22.96
		25	0	21.38	21.67	21.56
		25	12	21.27	21.74	21.60
		25	25	21.37	21.64	21.49
		50	0	21.36	21.50	21.43
	64QAM	1	0	21.45	21.62	21.10
		1	24	21.39	21.66	21.18
		1	49	21.49	21.89	21.14
		25	0	20.93	20.56	20.63
		25	12	20.58	20.99	21.09
		25	25	20.40	20.49	21.14
		50	0	20.46	20.91	20.96



BUREAU
VERITAS

Test Report No.: PSU-NQN2405090215RF03

EIRP/ ERP

LTE BAND 7

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20775	2502.5	22.55	-0.2	22.35	171.79	2
21100	2535.0	22.58	-0.2	22.38	172.98	2
21425	2567.5	22.8	-0.2	22.6	181.97	2

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20775	2502.5	21.59	-0.2	21.39	137.72	2
21100	2535.0	21.98	-0.2	21.78	150.66	2
21425	2567.5	21.82	-0.2	21.62	145.21	2

CHANNEL BANDWIDTH: 5MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20775	2502.5	20.88	-0.2	20.68	116.95	2
21100	2535	20.68	-0.2	20.48	111.69	2
21425	2567.5	20.88	-0.2	20.68	116.95	2



Test Report No.: PSU-NQN2405090215RF03

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20800	2505.0	22.53	-0.2	22.33	171	2
21100	2535.0	22.65	-0.2	22.45	175.79	2
21400	2565.0	22.77	-0.2	22.57	180.72	2

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20800	2505.0	21.63	-0.2	21.43	139	2
21100	2535.0	21.9	-0.2	21.7	147.91	2
21400	2565.0	21.8	-0.2	21.6	144.54	2

CHANNEL BANDWIDTH: 10MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20800	2505	20.84	-0.2	20.64	115.88	2
21100	2535	20.73	-0.2	20.53	112.98	2
21400	2565	20.84	-0.2	20.64	115.88	2



Test Report No.: PSU-NQN2405090215RF03

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20825	2507.5	22.5	-0.2	22.3	169.82	2
21100	2535.0	22.59	-0.2	22.39	173.38	2
21375	2562.5	22.75	-0.2	22.55	179.89	2

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20825	2507.5	21.53	-0.2	21.33	135.83	2
21100	2535.0	21.93	-0.2	21.73	148.94	2
21375	2562.5	21.78	-0.2	21.58	143.88	2

CHANNEL BANDWIDTH: 15MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20825	2507.5	20.89	-0.2	20.69	117.22	2
21100	2535	20.73	-0.2	20.53	112.98	2
21375	2562.5	20.88	-0.2	20.68	116.95	2



BUREAU
VERITAS

Test Report No.: PSU-NQN2405090215RF03

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20850	2510.0	22.56	-0.2	22.36	172.19	2
21100	2535.0	22.69	-0.2	22.49	177.42	2
21350	2560.0	22.86	-0.2	22.66	184.5	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20850	2510.0	21.64	-0.2	21.44	139.32	2
21100	2535.0	21.99	-0.2	21.79	151.01	2
21350	2560.0	21.84	-0.2	21.64	145.88	2

CHANNEL BANDWIDTH: 20MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20850	2510	20.94	-0.2	20.74	118.58	2
21100	2535	20.8	-0.2	20.6	114.82	2
21350	2560	20.92	-0.2	20.72	118.03	2

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

LTE BAND 12

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23017	699.7	23.76	-4.9	16.71	46.88	3
23095	707.5	23.8	-4.9	16.75	47.32	3
23173	715.3	23.96	-4.9	16.91	49.09	3

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23017	699.7	23	-4.9	15.95	39.36	3
23095	707.5	22.71	-4.9	15.66	36.81	3
23173	715.3	22.82	-4.9	15.77	37.76	3

CHANNEL BANDWIDTH: 1.4MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23017	699.7	21.84	-4.9	14.79	30.13	3
23095	707.5	21.76	-4.9	14.71	29.58	3
23173	715.3	21.32	-4.9	14.27	26.73	3

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23025	700.5	23.88	-4.9	16.83	48.19	3
23095	707.5	23.76	-4.9	16.71	46.88	3
23165	714.5	23.91	-4.9	16.86	48.53	3

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23025	700.5	22.93	-4.9	15.88	38.73	3
23095	707.5	22.7	-4.9	15.65	36.73	3
23165	714.5	22.79	-4.9	15.74	37.5	3

CHANNEL BANDWIDTH: 3MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23025	700.5	21.83	-4.9	14.78	30.06	3
23095	707.5	21.7	-4.9	14.65	29.17	3
23165	714.5	21.25	-4.9	14.2	26.3	3

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23035	701.5	23.76	-4.9	16.71	46.88	3
23095	707.5	23.87	-4.9	16.82	48.08	3
23155	713.5	23.92	-4.9	16.87	48.64	3

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23035	701.5	22.87	-4.9	15.82	38.19	3
23095	707.5	22.73	-4.9	15.68	36.98	3
23155	713.5	22.81	-4.9	15.76	37.67	3



BUREAU
VERITAS

Test Report No.: PSU-NQN2405090215RF03

CHANNEL BANDWIDTH: 5MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23035	701.5	21.81	-4.9	14.76	29.92	3
23095	707.5	21.72	-4.9	14.67	29.31	3
23155	713.5	21.33	-4.9	14.28	26.79	3

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23060	704	23.91	-4.9	16.86	48.53	3
23095	707.5	23.9	-4.9	16.85	48.42	3
23130	711	24.01	-4.9	16.96	49.66	3

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23060	704	23.02	-4.9	15.97	39.54	3
23095	707.5	22.85	-4.9	15.8	38.02	3
23130	711	22.84	-4.9	15.79	37.93	3

CHANNEL BANDWIDTH: 10MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23060	704	21.87	-4.9	14.82	30.34	3
23095	707.5	21.78	-4.9	14.73	29.72	3
23130	711	21.38	-4.9	14.33	27.1	3

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2405090215RF03

LTE BAND 13

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23205	779.5	23.66	-3.7	17.81	60.39	3
23230	782	23.67	-3.7	17.82	60.53	3
23255	784.5	23.74	-3.7	17.89	61.52	3

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23205	779.5	22.6	-3.7	16.75	47.32	3
23230	782	22.72	-3.7	16.87	48.64	3
23255	784.5	23.19	-3.7	17.34	54.2	3

CHANNEL BANDWIDTH: 5MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23205	779.5	21.31	-3.7	15.46	35.16	3
23230	782	21.82	-3.7	15.97	39.54	3
23255	784.5	20.9	-3.7	15.05	31.99	3



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2405090215RF03

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
-	-	-	-	-	-	-
23230	782	23.91	-3.7	18.06	63.97	3
-	-	-	-	-	-	-

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
-	-	-	-	-	-	-
23230	782	22.75	-3.7	16.9	48.98	3
-	-	-	-	-	-	-

CHANNEL BANDWIDTH: 10MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
-	-	-	-	-	-	-
23230	782	22.26	-3.7	16.41	43.75	3
-	-	-	-	-	-	-



Test Report No.: PSU-NQN2405090215RF03

LTE BAND 17

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23755	706.5	23.89	-4.9	16.84	48.31	3
23790	710	23.77	-4.9	16.72	46.99	3
23825	713.5	23.94	-4.9	16.89	48.87	3

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23755	706.5	22.92	-4.9	15.87	38.64	3
23790	710	22.82	-4.9	15.77	37.76	3
23825	713.5	23.02	-4.9	15.97	39.54	3

CHANNEL BANDWIDTH: 5MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23755	706.5	21.41	-4.9	14.36	27.29	3
23790	710	21.62	-4.9	14.57	28.64	3
23825	713.5	21.55	-4.9	14.5	28.18	3



Test Report No.: PSU-NQN2405090215RF03

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23780	709	23.96	-4.9	16.91	49.09	3
23790	710	23.85	-4.9	16.8	47.86	3
23800	711	24.05	-4.9	17	50.12	3

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23780	709	22.94	-4.9	15.89	38.82	3
23790	710	22.87	-4.9	15.82	38.19	3
23800	711	23.11	-4.9	16.06	40.36	3

CHANNEL BANDWIDTH: 10MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23780	709	21.49	-4.9	14.44	27.8	3
23790	710	21.89	-4.9	14.84	30.48	3
23800	711	21.18	-4.9	14.13	25.88	3

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.2.2 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

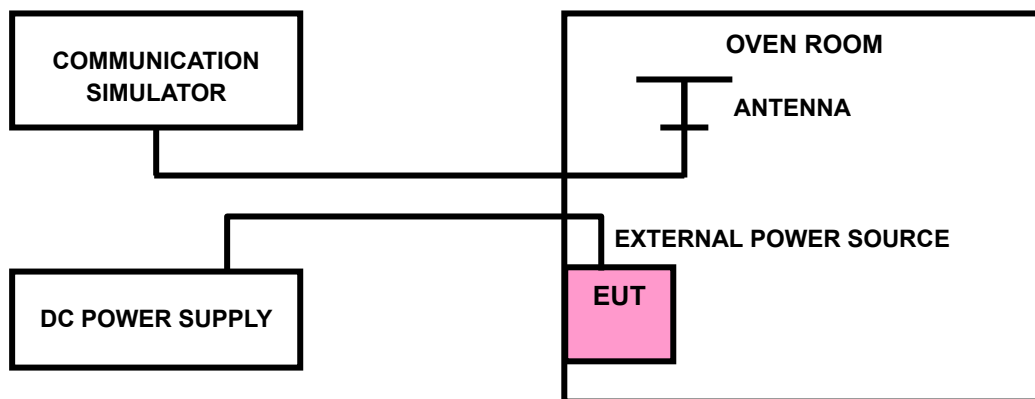



Test Report No.: PSU-NQN2405090215RF03

3.2.4 TEST RESULTS

Please Refer to Appendix Of this test report.


Note: VL = Low voltage(3.6V); VN/NV = Normal voltage(3.87V); VH = High voltage(4.45V);
NT = Normal temperature (25°C)

3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

3.3.2 TEST SETUP

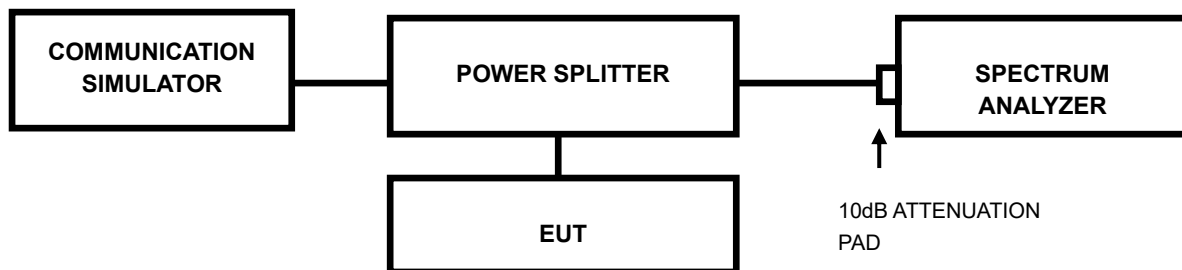

3.3.3 TEST PROCEDURES

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.



Test Report No.: PSU-NQN2405090215RF03

3.3.4 TEST RESULTS

Please Refer to Appendix Of this test report.



3.4 BAND EDGE MEASUREMENT


3.4.1 LIMITS OF BAND EDGE MEASUREMENT

According to FCC 27.53(c) specified that For operations in the 746-758 MHz band and the 776-788 MHz band , the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed. In addition, the power of any unwanted emission in an 6.25kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, $P(\text{dBW})$, by at least $65 + 10 \log 10p(P)$, dB, for mobile and portable equipment.

According to FCC 27.53(g) specified that For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

According to FCC 27.53(m)(4) specified that For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. For mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed.

3.4.2 TEST SETUP

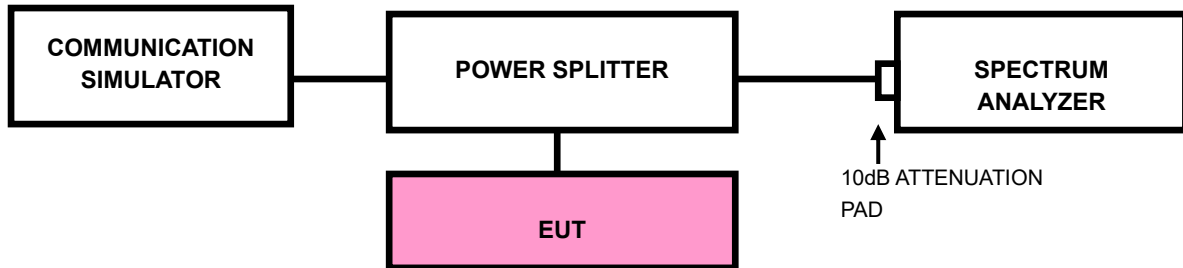



3.4.3 TEST PROCEDURES

- a) All measurements were done at low and high operational frequency range.
- b) Connect the transmitter to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
- c) Tune the analyzer to the nominal center frequency of the emission bandwidth (EBW)
- d) .Set the resolution bandwidth (RBW) $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
- e) Beyond the 1MHz band from the band edge, RBW=1MHz was used.
- f) Set the video bandwidth (VBW) to $\geq 3 \times$ RBW.
- g) Select the average power (RMS) display detector.
- h) Set the number of measurement points to ≥ 1001 .
- i) Use auto-coupled sweep time.
- j) Perform the measurement over an interval of time when the transmission is continuous and at its maximum power level.
- k) The RF fundamental frequency should be excluded against the limit line in the operating frequency band and use RBW is 10KHz or 100KHz.
- l) Record the max trace plot into the test report.



Test Report No.: PSU-NQN2405090215RF03

3.4.4 TEST RESULTS

Please Refer to Appendix Of this test report.

3.5 CONDUCTED SPURIOUS EMISSIONS

3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .


For: LTE Band7

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25dBm .

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9kHz up to a frequency including its 10th harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

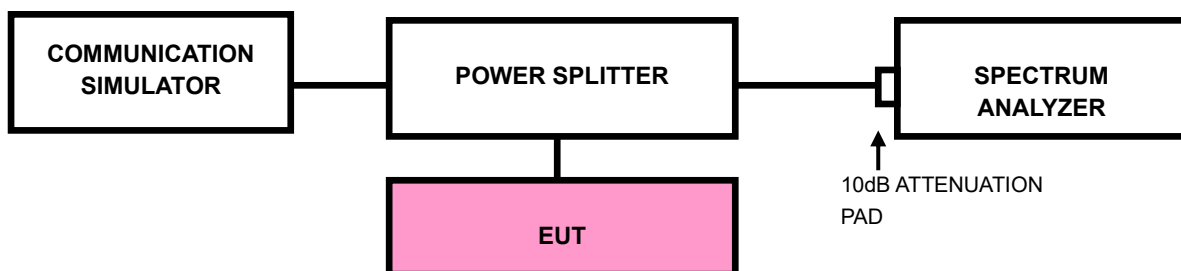

3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2405090215RF03

Please Refer to Appendix Of this test report.



Test Report No.: PSU-NQN2405090215RF03

3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

For: LTE Band7

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25dBm .

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G.
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,
 $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15\text{dBi}$.


NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

3.6.3 DEVIATION FROM TEST STANDARD


No deviation

3.6.4 TEST SETUP


< Frequency Range below 30MHz >

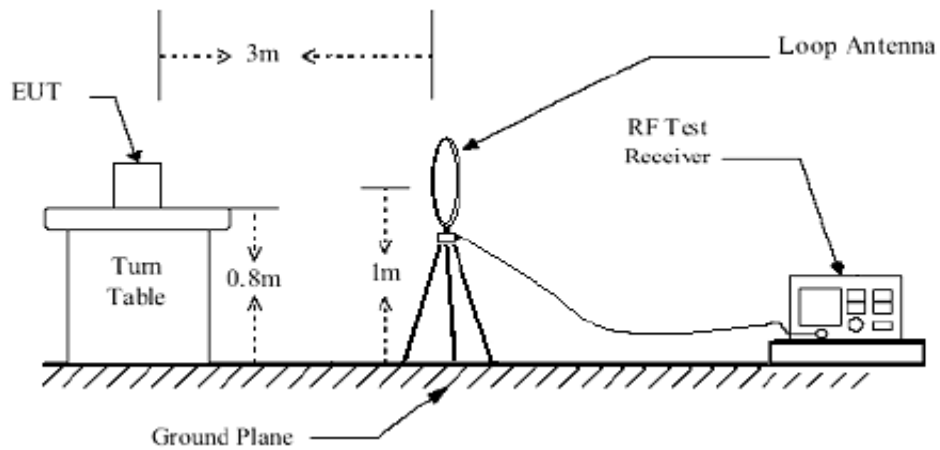

< Frequency Range 30MHz~1GHz >

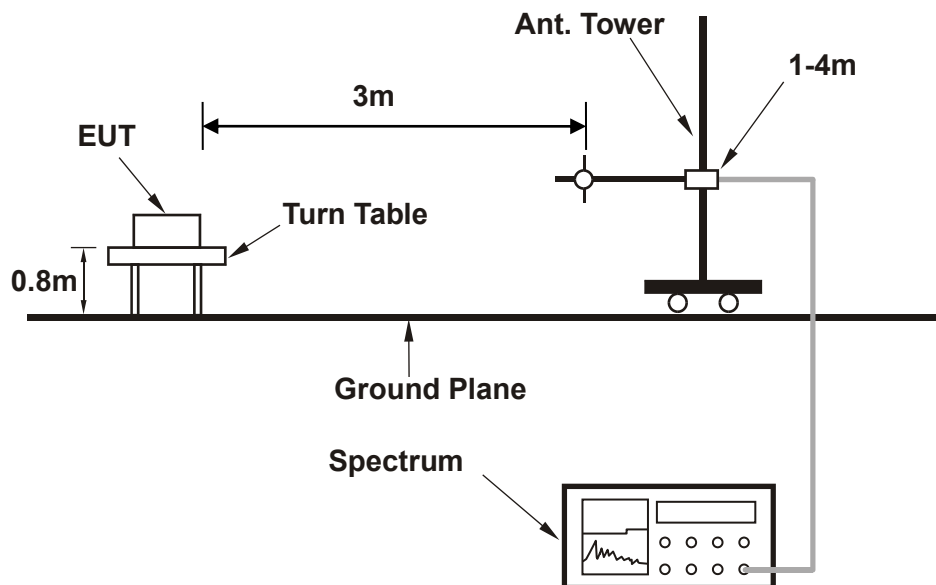

<Frequency Range above 1GHz>

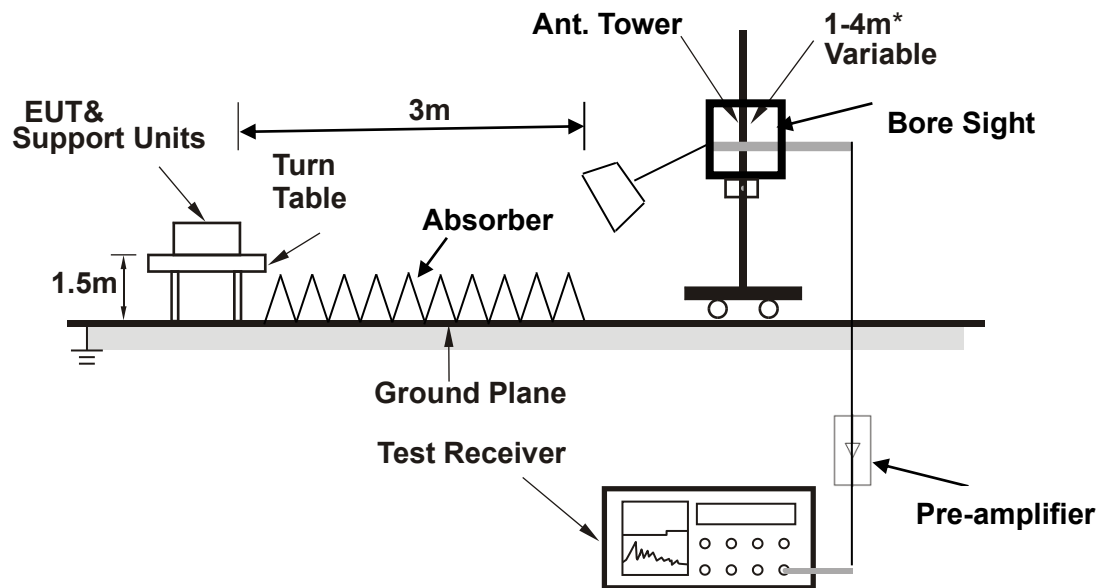

Note: Above 1G is a directional antenna depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

LTE Band 13

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 23255	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	37.100	-63.04	-13.00	50.04	5.33	H	259.1	2.00
1	59.100	-69.07	-13.00	56.07	1.32	H	124.8	1.00
1	97.000	-71.05	-13.00	58.05	-6.25	H	355.1	2.00
1	193.050	-67.31	-13.00	54.31	0.10	H	124.8	1.00
1	314.100	-72.92	-13.00	59.92	0.57	H	190.5	1.00
1	428.350	-71.93	-13.00	58.93	7.64	H	317.2	1.00

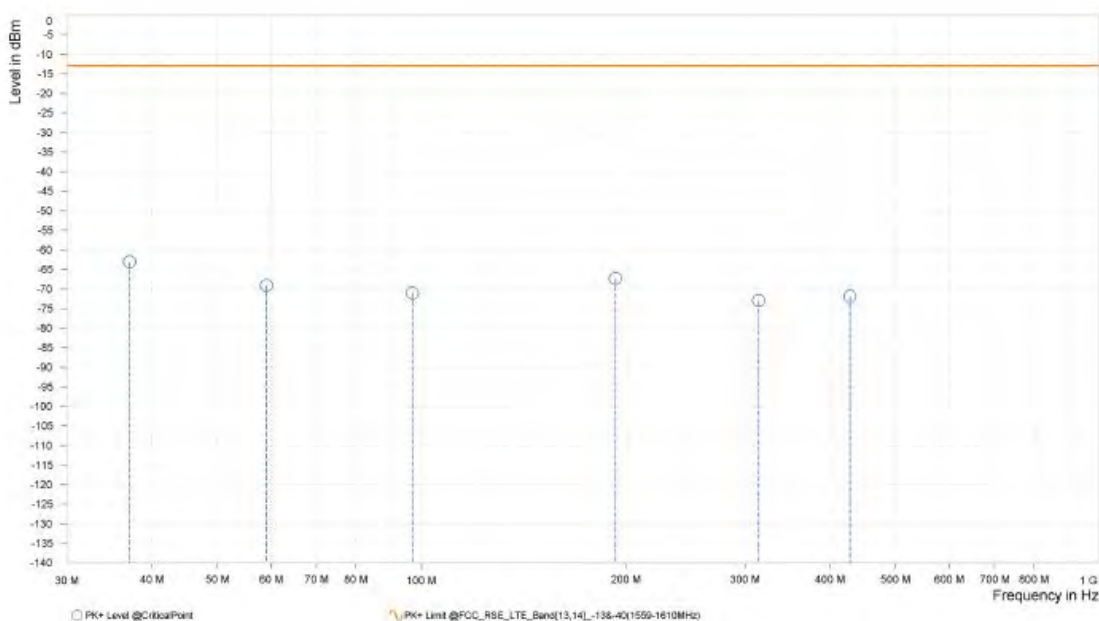




Test Report No.: PSU-NQN2405090215RF03

MODE	TX channel 23255	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	32.800	-63.94	-13.00	50.94	-1.60	V	4.9	1.00
1	58.450	-69.54	-13.00	56.54	1.68	V	357.4	1.00
1	98.300	-58.91	-13.00	45.91	9.46	V	124.1	2.00
1	211.700	-74.77	-13.00	61.77	-2.61	V	313.7	1.00
1	312.900	-74.84	-13.00	61.84	2.60	V	355.1	2.00
1	436.050	-73.33	-13.00	60.33	7.02	V	57.1	2.00

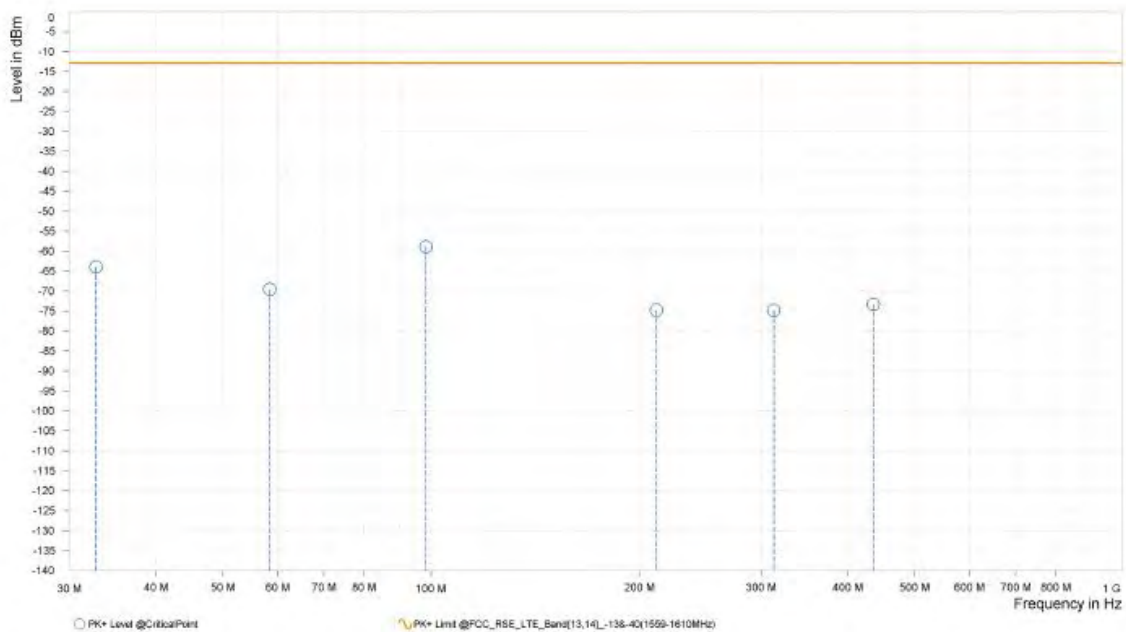



BUREAU VERITAS

Test Report No.: PSU-NQN2405090215RF03

ABOVE 1GHz


Note: For higher frequency, the emission is too low to be detected.

LTE Band 7

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,065.500	-52.29	-25.00	27.29	23.37	H	1	1.00
5	7,598.250	-46.82	-25.00	21.82	26.93	H	359	2.00

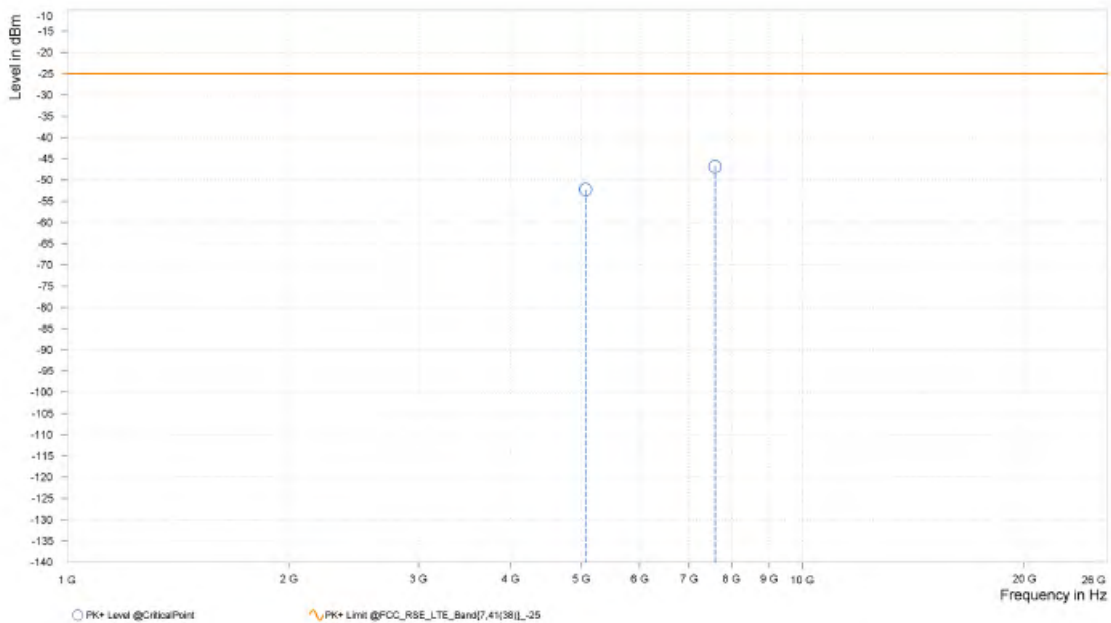




Test Report No.: PSU-NQN2405090215RF03

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,065.500	-50.70	-25.00	25.70	23.82	V	0.9	2.00
5	7,598.250	-46.74	-25.00	21.74	26.72	V	1	1.00

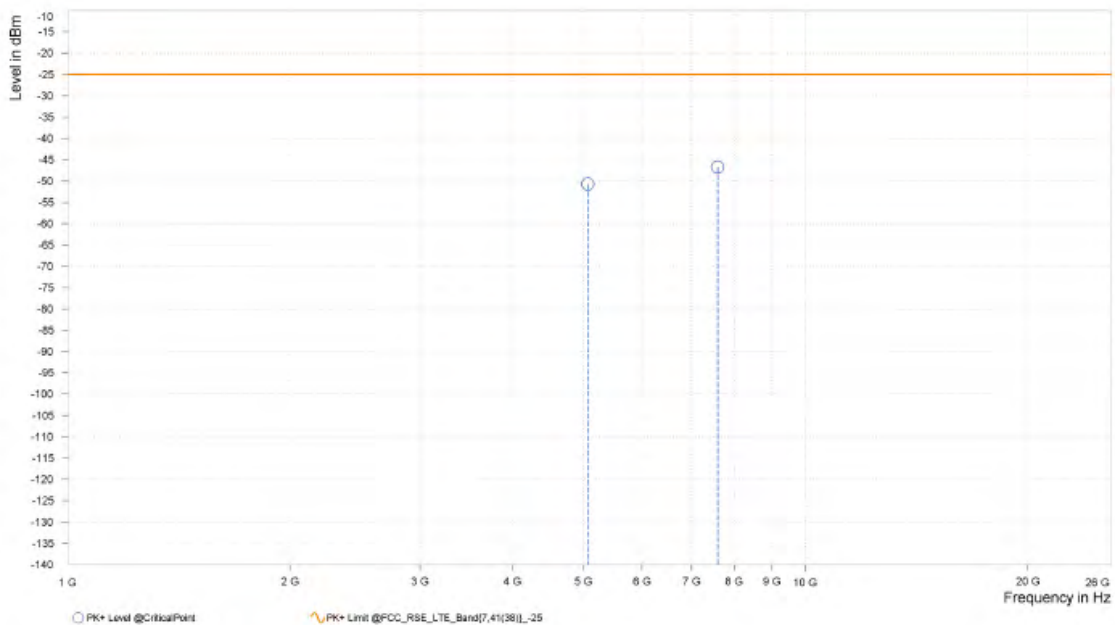




Test Report No.: PSU-NQN2405090215RF03

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,061.000	-50.03	-25.00	25.03	23.43	H	194.2	1.00
5	7,591.500	-46.12	-25.00	21.12	26.92	H	265.8	1.00

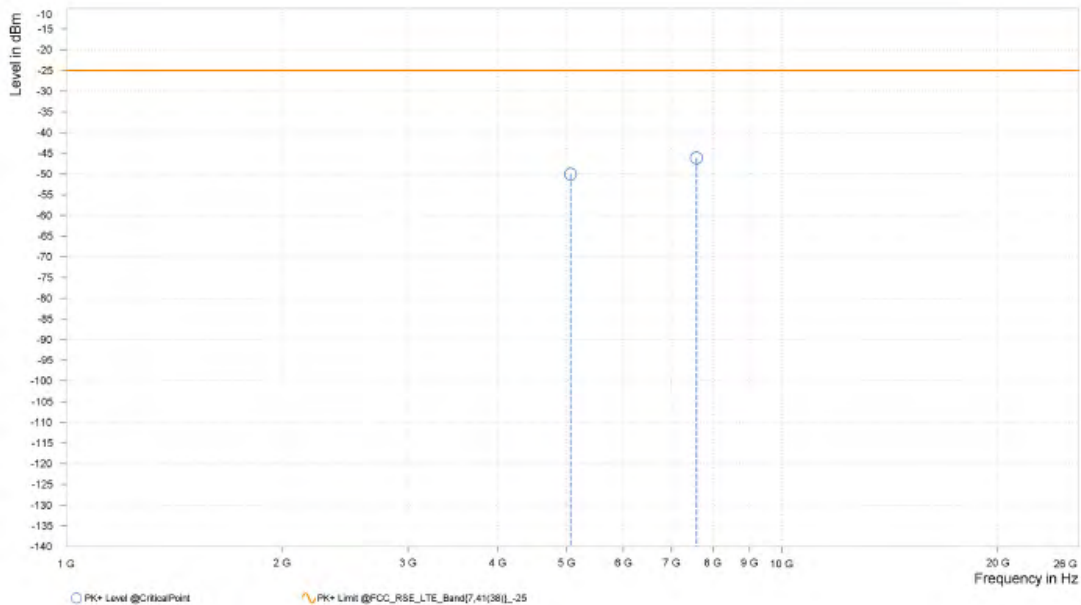




Test Report No.: PSU-NQN2405090215RF03

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,061.000	-46.95	-25.00	21.95	23.87	V	0.9	2.00
5	7,591.500	-45.02	-25.00	20.02	26.70	V	0.9	2.00

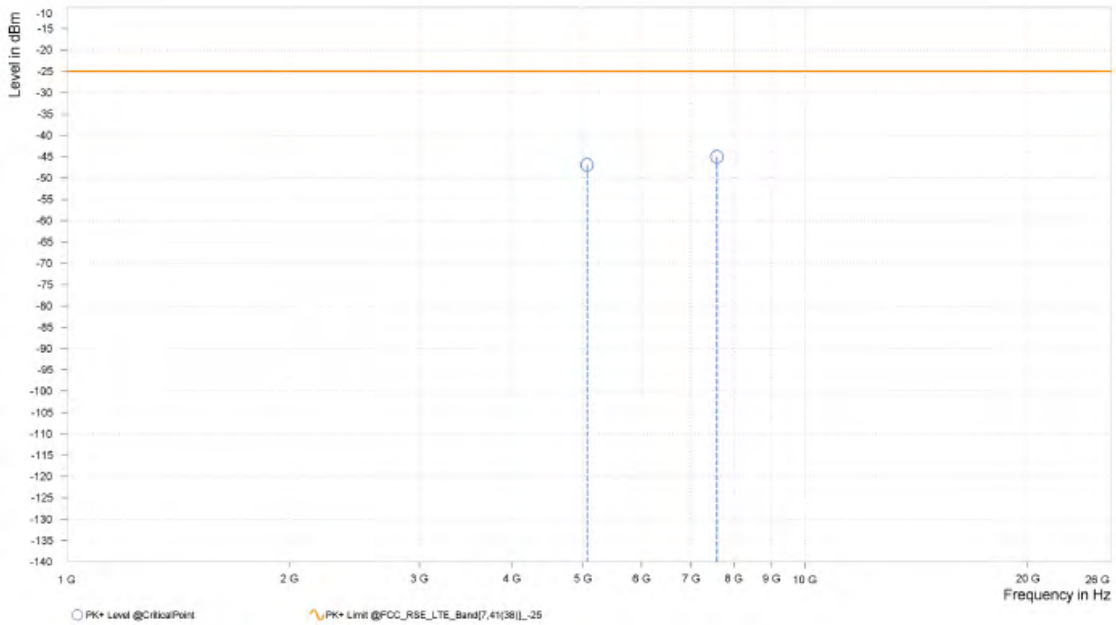




BUREAU VERITAS

Test Report No.: PSU-NQN2405090215RF03

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,056.500	-49.37	-25.00	24.37	23.50	H	158.7	2.00
5	7,585.000	-44.98	-25.00	19.98	26.92	H	1	1.00

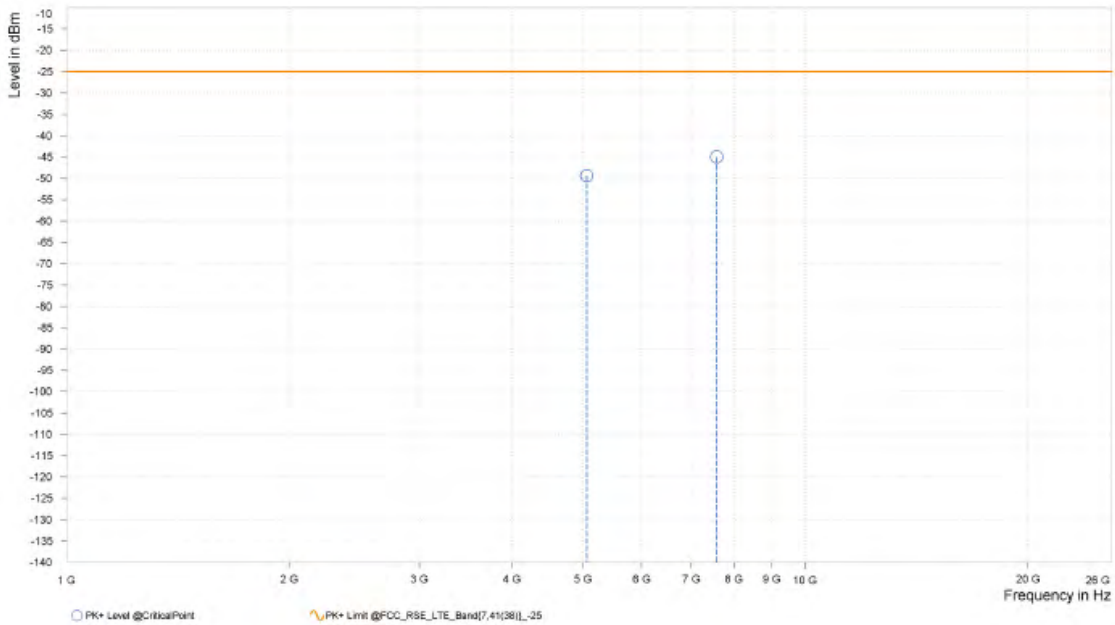




Test Report No.: PSU-NQN2405090215RF03

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,056.500	-47.10	-25.00	22.10	23.92	V	1	1.00
5	7,585.000	-42.81	-25.00	17.81	26.69	V	1	2.00

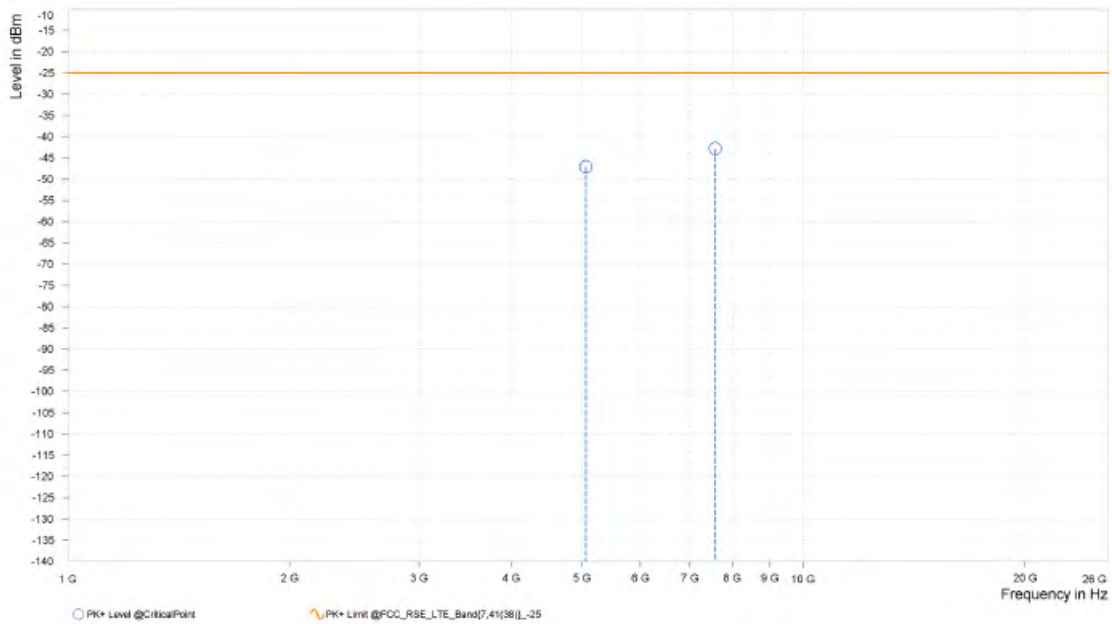




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2405090215RF03

**CHANNEL BANDWIDTH: 20MHz / QPSK
CH 20850**

MODE	TX channel 20850	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,002.000	-49.01	-25.00	24.01	23.41	H	359	2.00
5	7,503.000	-43.02	-25.00	18.02	27.03	H	359.1	1.00

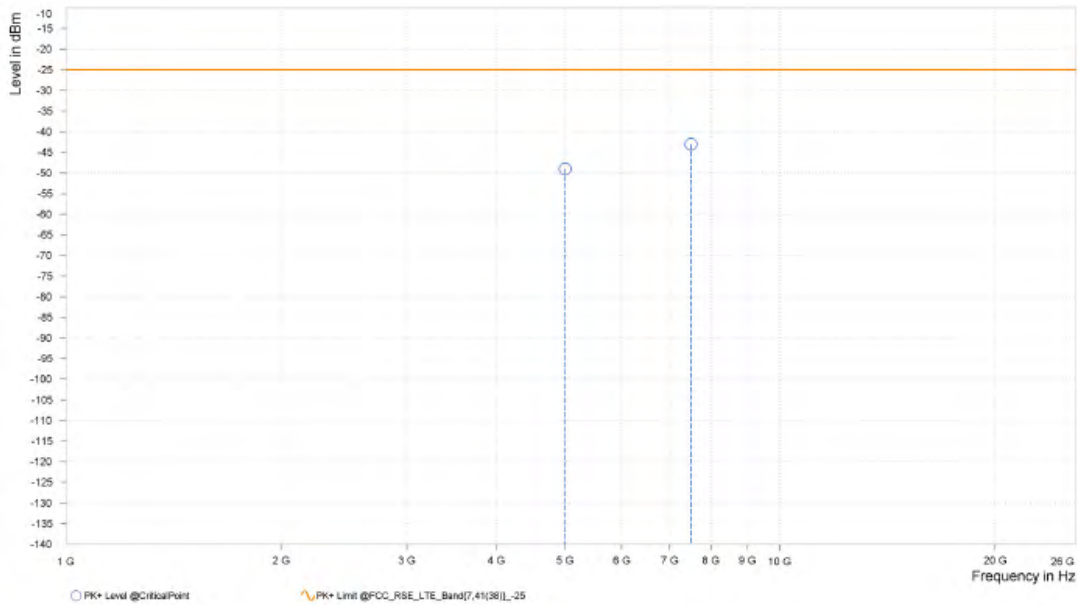




Test Report No.: PSU-NQN2405090215RF03

MODE	TX channel 20850	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,002.000	-49.29	-25.00	24.29	23.62	V	0.9	2.00
5	7,503.000	-41.93	-25.00	16.93	27.00	V	359	1.00

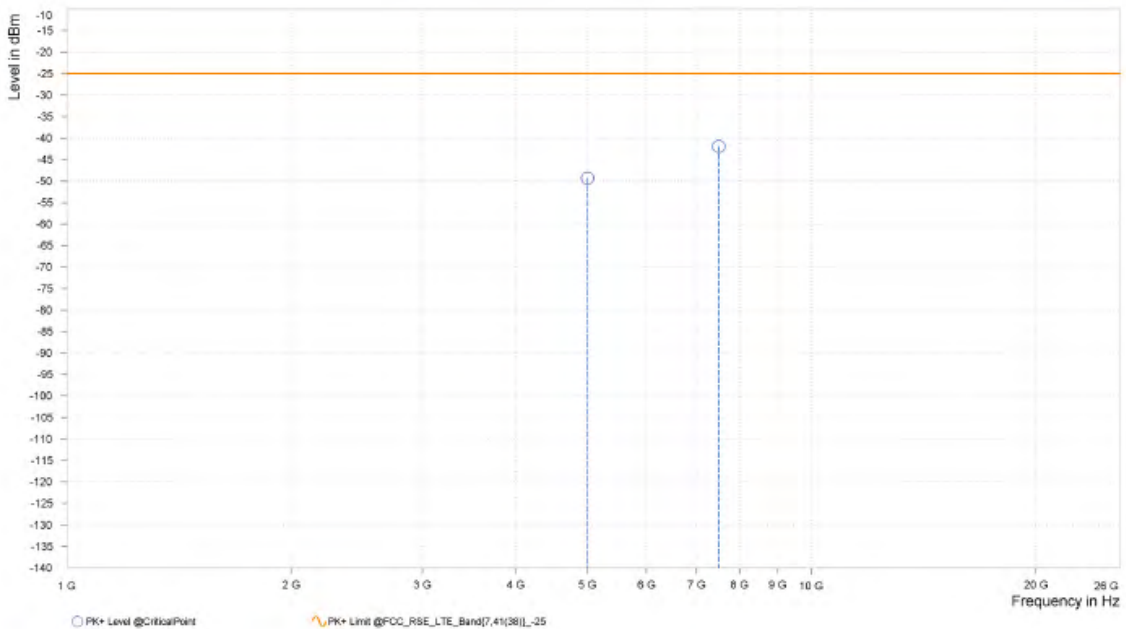




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2405090215RF03

CH 21100

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,052.000	-51.61	-25.00	26.61	23.57	H	144.4	2.00
5	7,578.000	-44.06	-25.00	19.06	26.95	H	81	2.00

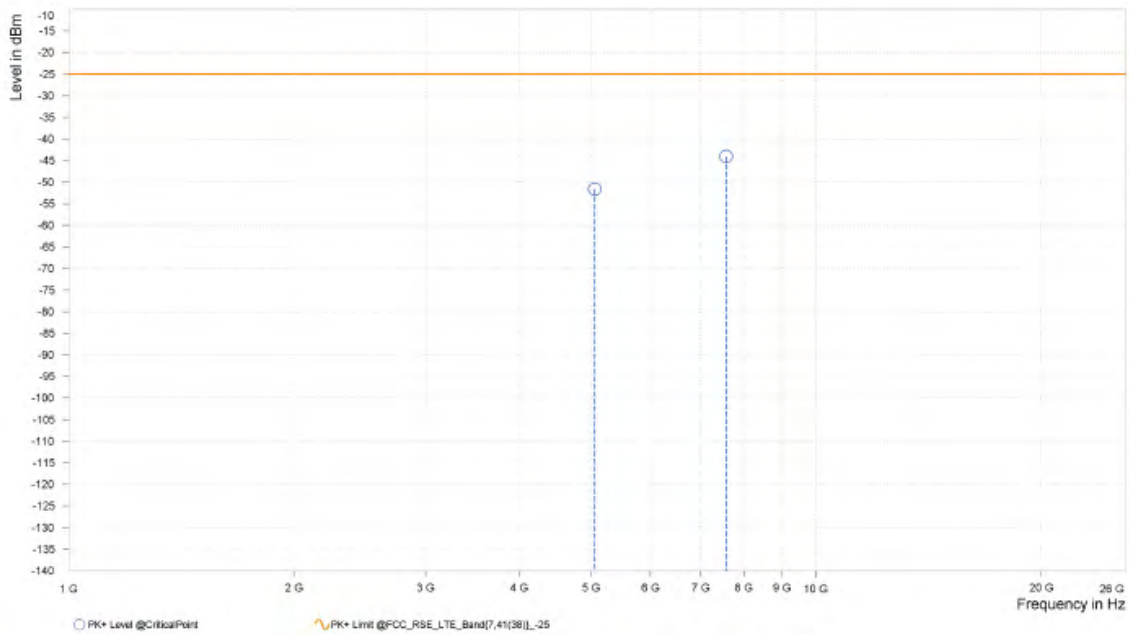




Test Report No.: PSU-NQN2405090215RF03

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,052.000	-45.84	-25.00	20.84	23.98	V	359.1	1.00
5	7,578.000	-41.67	-25.00	16.67	26.74	V	95.4	2.00

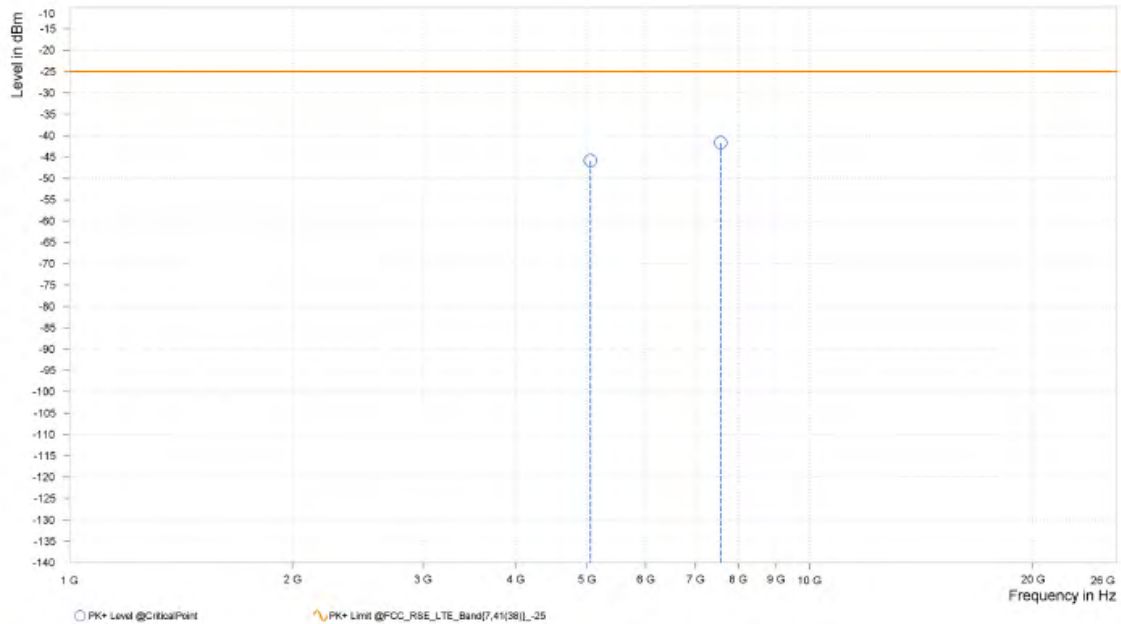




BUREAU VERITAS

Test Report No.: PSU-NQN2405090215RF03

CH 21350

MODE	TX channel 21350	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,102.000	-51.49	-25.00	26.49	22.91	H	359.1	1.00
5	7,653.000	-42.75	-25.00	17.75	26.99	H	359.1	1.00

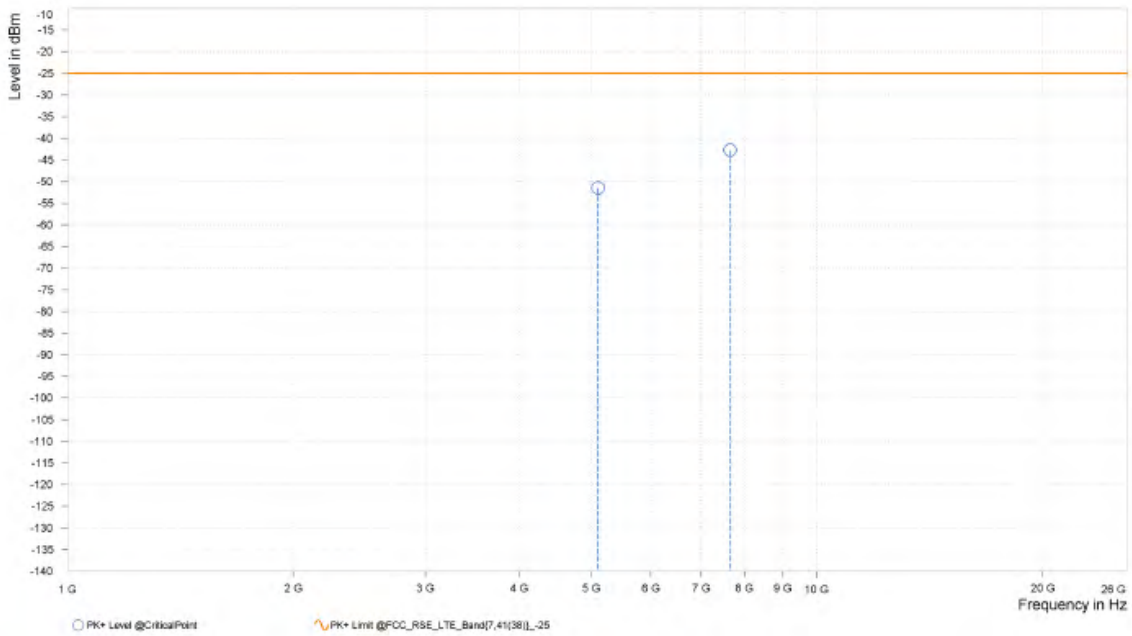




Test Report No.: PSU-NQN2405090215RF03

MODE	TX channel 21350	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,102.000	-49.81	-25.00	24.81	23.43	V	1	1.00
5	7,653.000	-45.47	-25.00	20.47	26.84	V	93	2.00

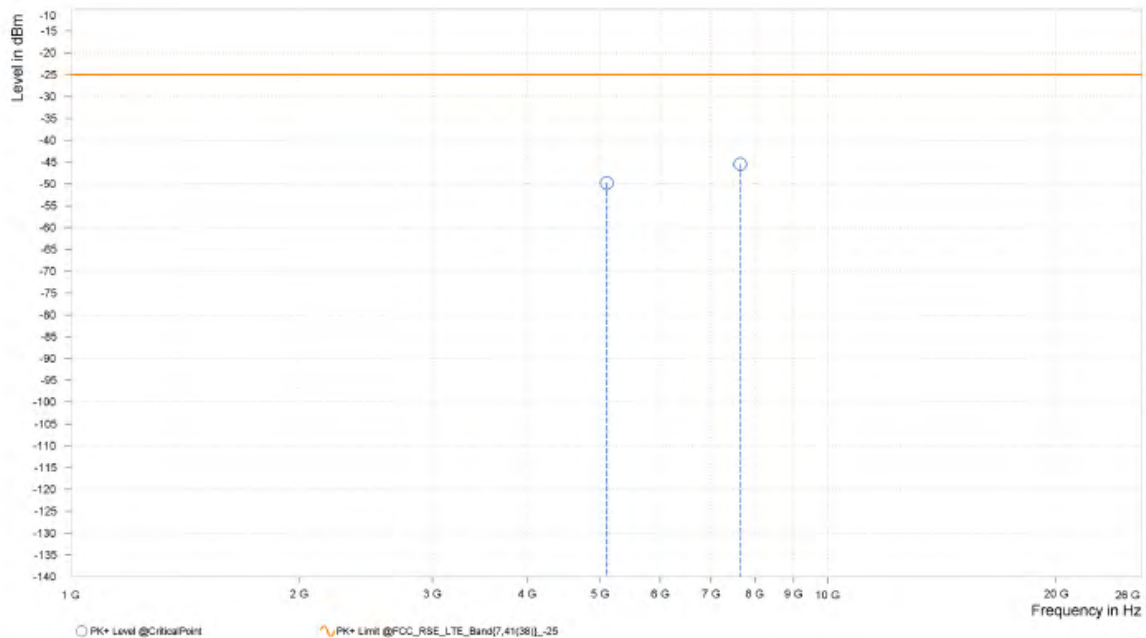




Test Report No.: PSU-NQN2405090215RF03

LTE BAND 12

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,415.000	-44.38	-13.00	31.38	12.46	H	293.4	1.00
2	2,121.000	-53.69	-13.00	40.69	17.48	H	359	2.00

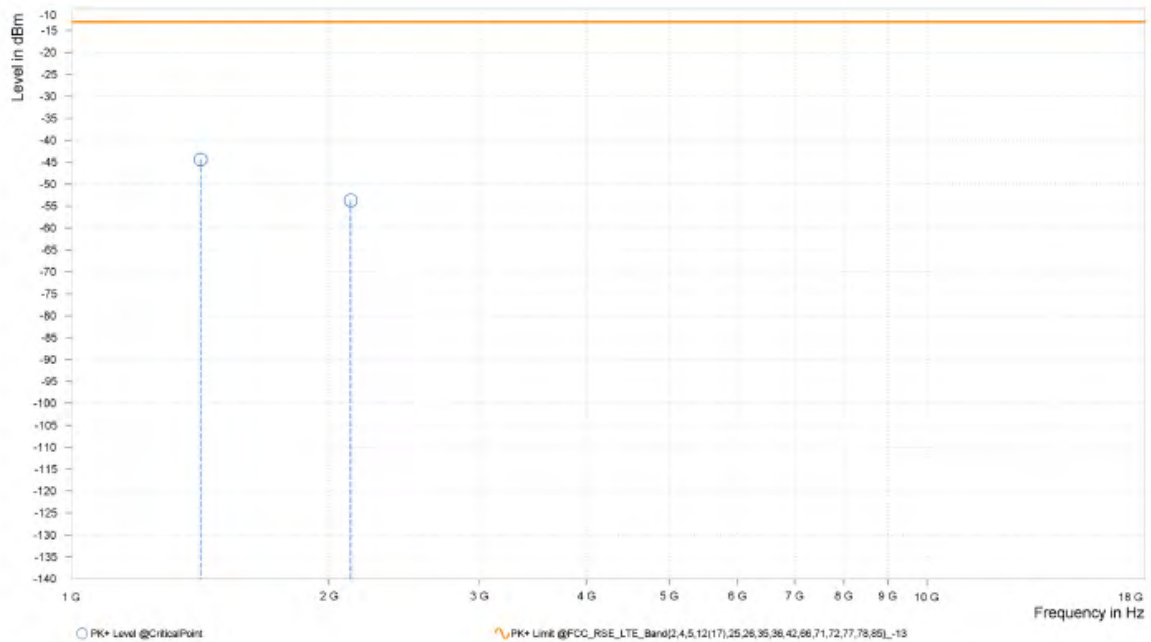




Test Report No.: PSU-NQN2405090215RF03

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,415.000	-40.23	-13.00	27.23	11.97	V	309.3	2.00
2	2,121.000	-53.20	-13.00	40.20	18.06	V	1.8	2.00

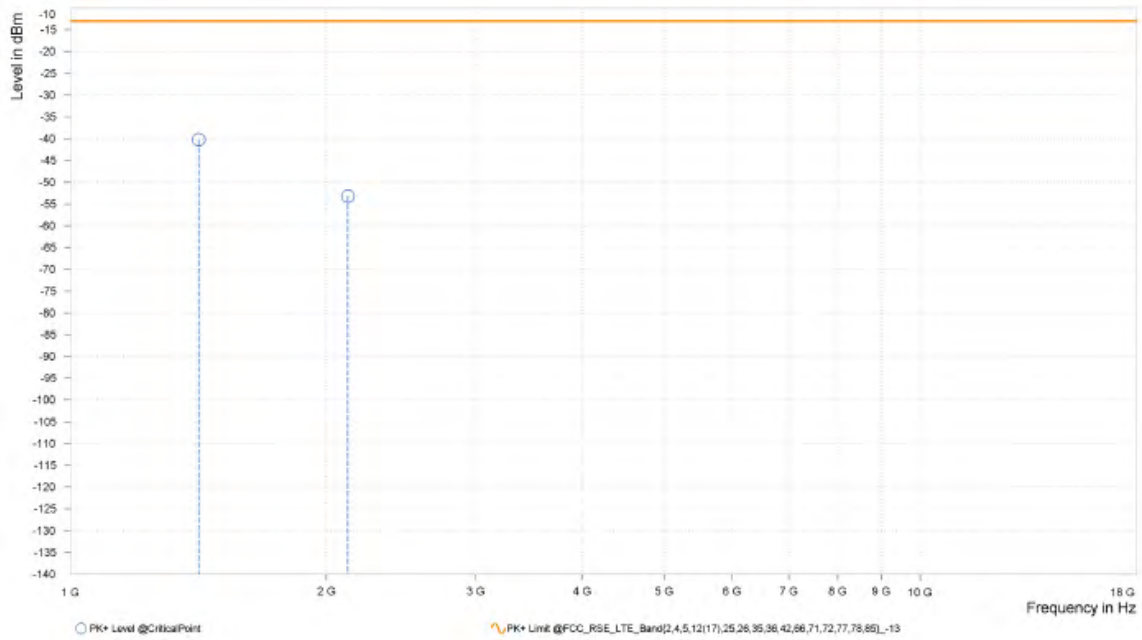



BUREAU VERITAS


Test Report No.: PSU-NQN2405090215RF03

CHANNEL BANDWIDTH: 3MHz / QPSK

CH 23025

MODE	TX channel 23025	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 53%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,405.500	-39.33	-13.00	26.33	12.07	H	291	1.00
2	2,108.000	-52.26	-13.00	39.26	17.66	H	1.9	2.00

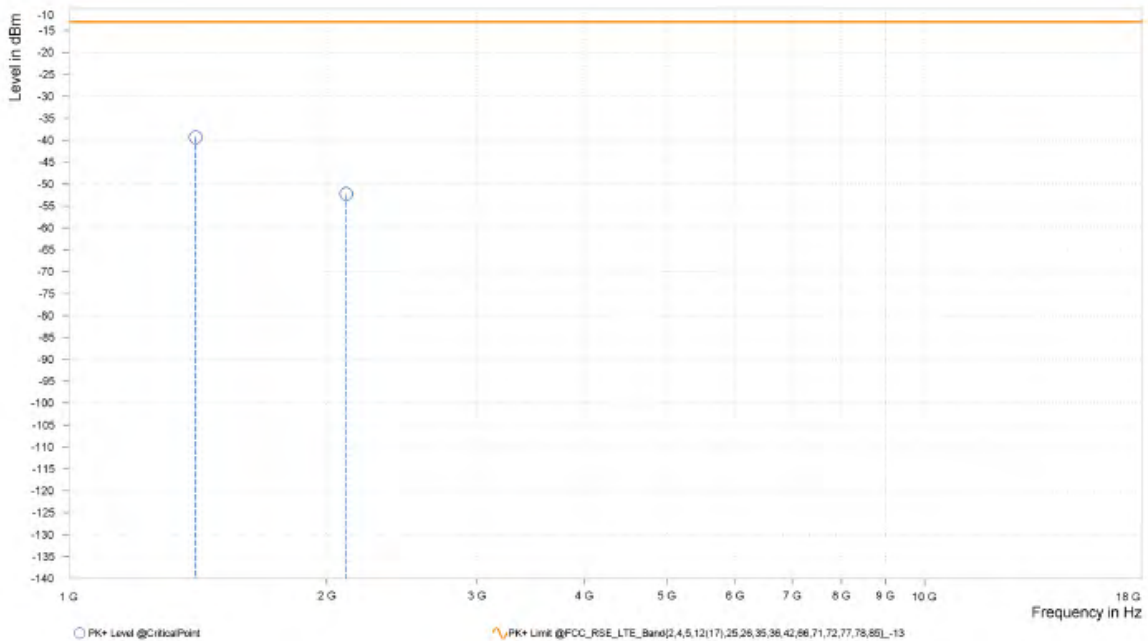




Test Report No.: PSU-NQN2405090215RF03

MODE	TX channel 23025	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 53%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,405.500	-39.10	-13.00	26.10	12.23	V	309.3	2.00
2	2,108.000	-52.84	-13.00	39.84	18.38	V	1.8	2.00

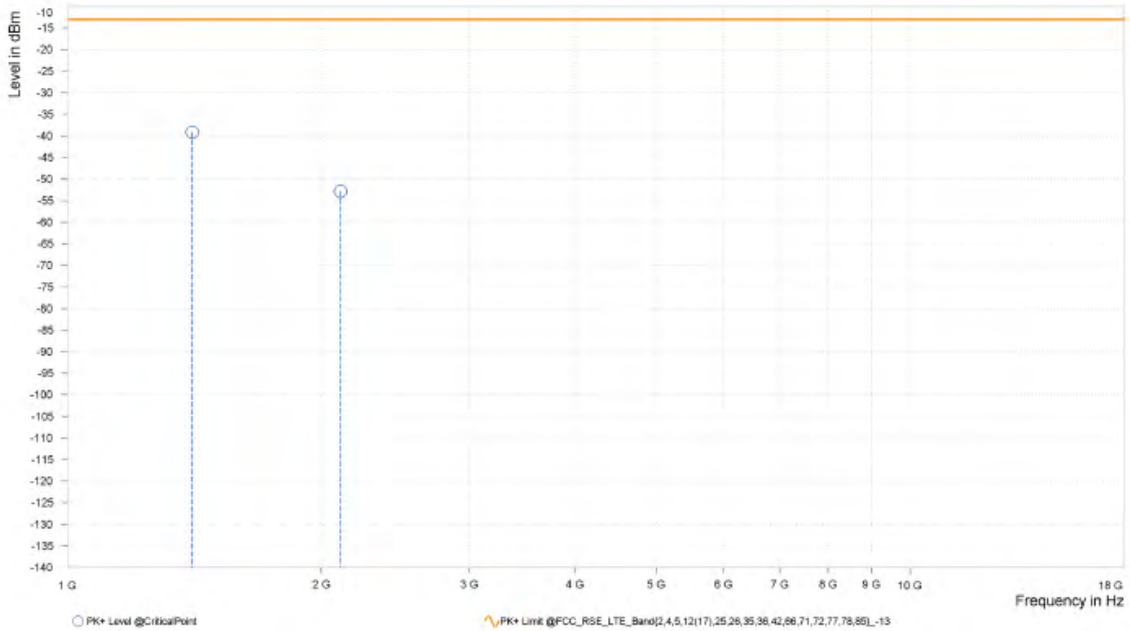




Test Report No.: PSU-NQN2405090215RF03

CH 23095

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 53%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,413.000	-53.29	-13.00	40.29	12.38	H	66.6	2.00
2	2,119.000	-54.53	-13.00	41.53	17.51	H	1.8	2.00

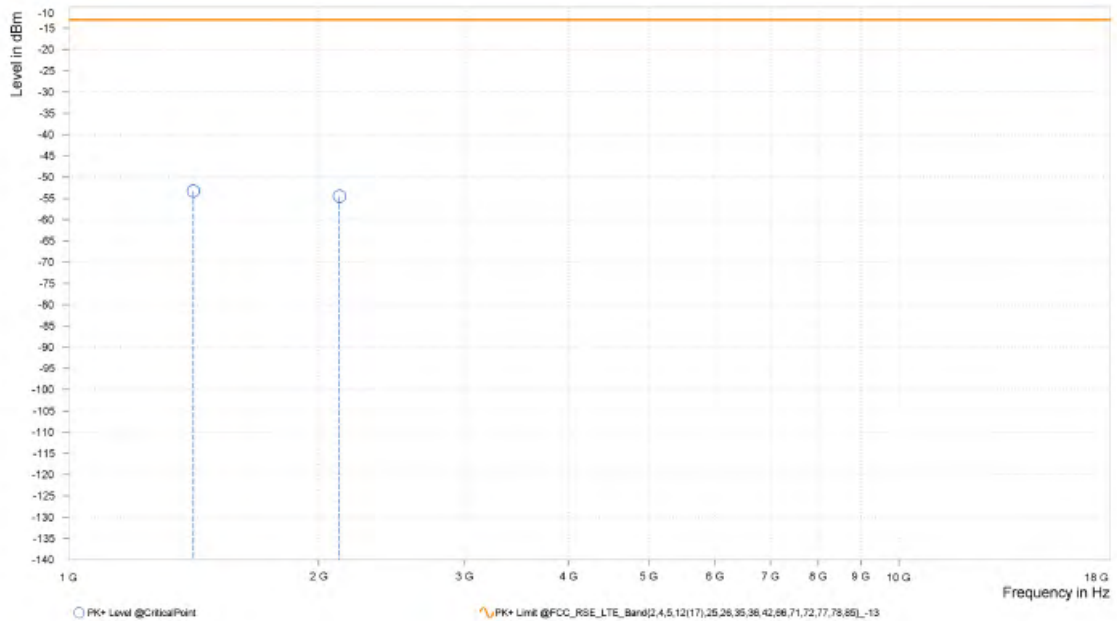




Test Report No.: PSU-NQN2405090215RF03

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 53%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,412.500	-38.26	-13.00	25.26	12.04	V	2.1	2.00
2	2,118.450	-53.17	-13.00	40.17	18.12	V	2.1	2.00

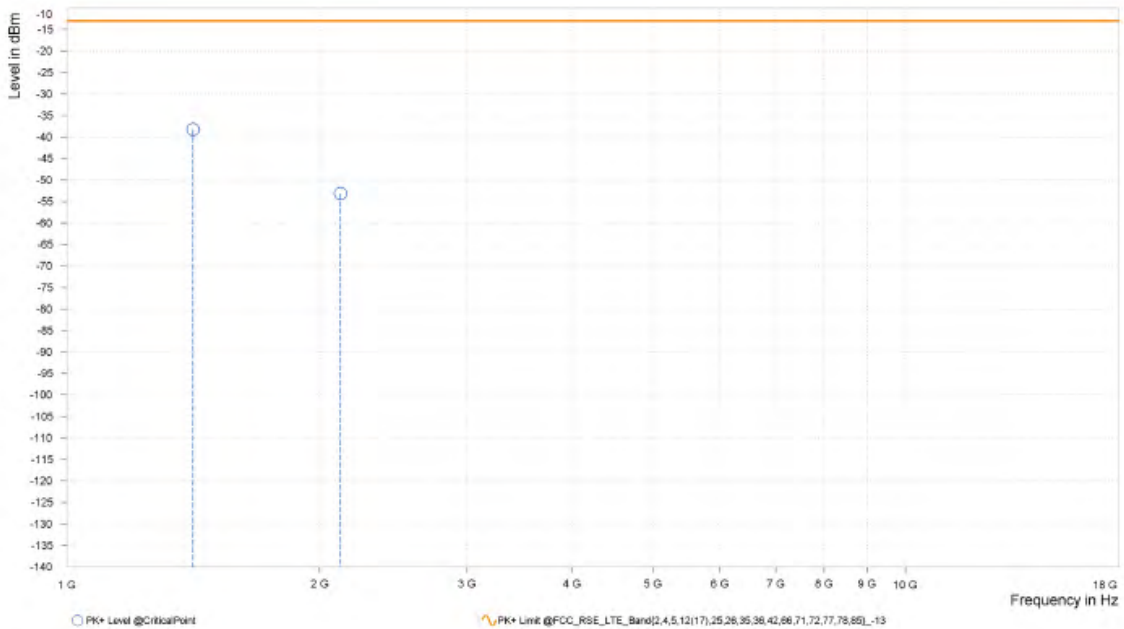




BUREAU
VERITAS

Test Report No.: PSU-NQN2405090215RF03

CH 23165

MODE	TX channel 23165	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 53%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,419.500	-39.48	-13.00	26.48	12.45	H	292.2	1.00
2	2,129.000	-52.75	-13.00	39.75	17.46	H	1	1.00

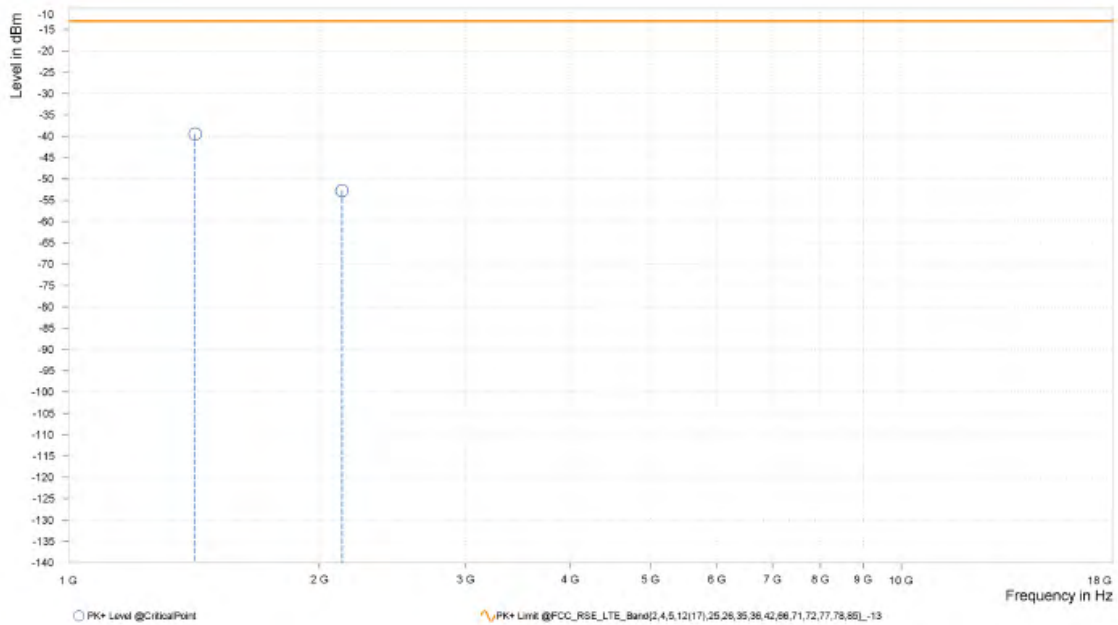




Test Report No.: PSU-NQN2405090215RF03

MODE	TX channel 23165	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 53%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,419.500	-38.29	-13.00	25.29	11.91	V	1.9	2.00
2	2,129.000	-52.55	-13.00	39.55	17.90	V	1	1.00

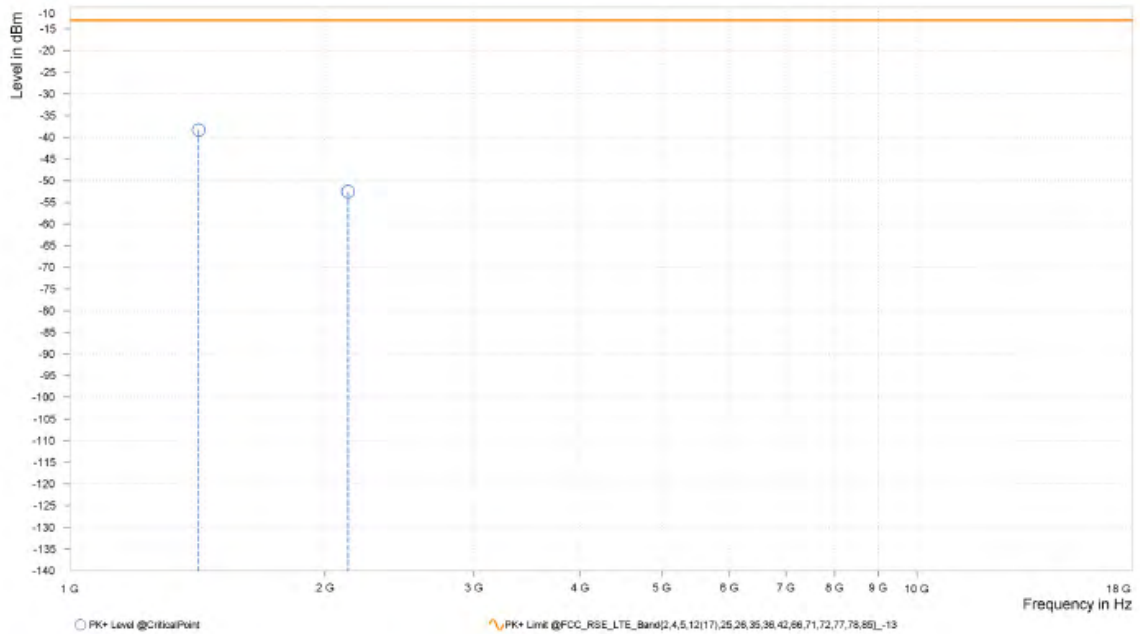




Test Report No.: PSU-NQN2405090215RF03

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,411.000	-46.39	-13.00	33.39	12.30	H	55.5	1.00
2	2,116.000	-54.47	-13.00	41.47	17.55	H	309.3	2.00

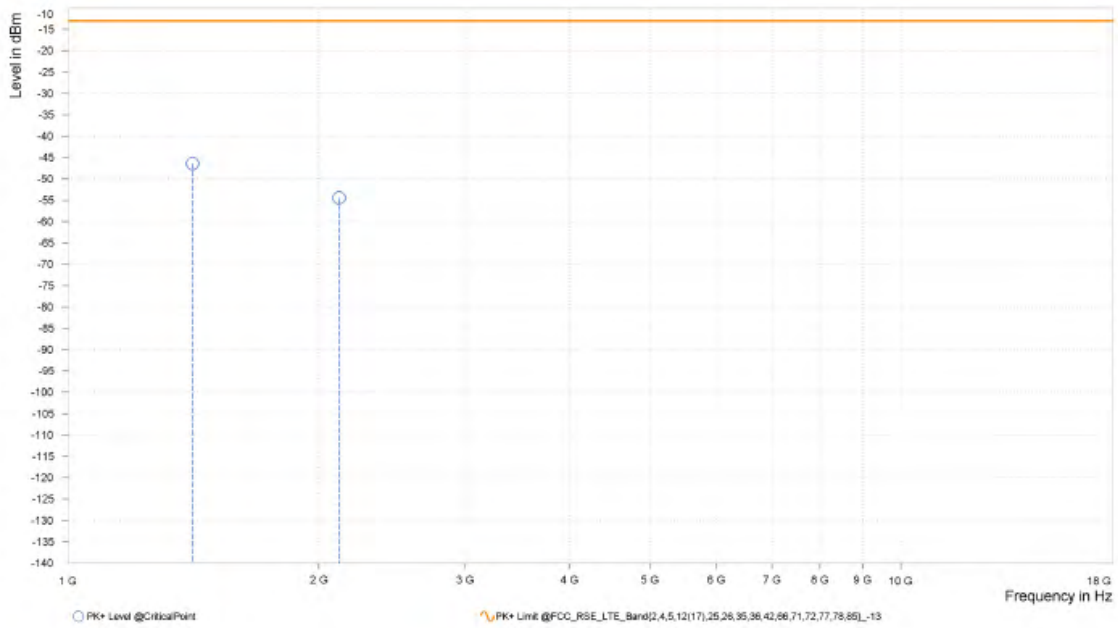




Test Report No.: PSU-NQN2405090215RF03

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,410.500	-42.03	-13.00	29.03	12.09	V	309.3	2.00
2	2,116.000	-51.66	-13.00	38.66	18.18	V	291	1.00

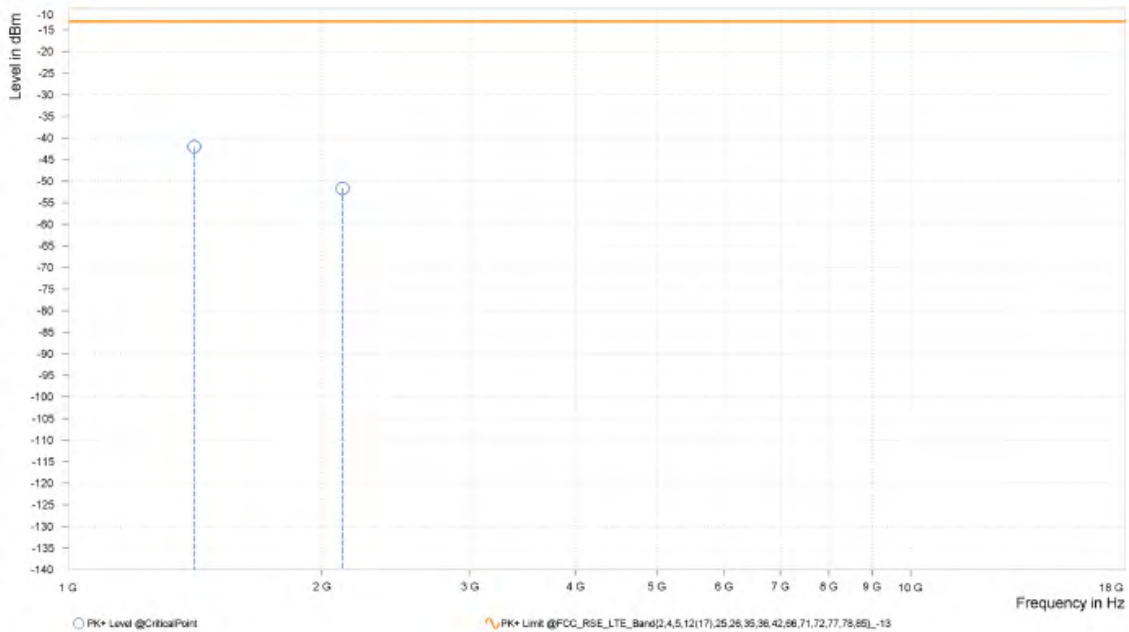




Test Report No.: PSU-NQN2405090215RF03

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,406.000	-39.55	-13.00	26.55	12.09	H	50.6	1.00
2	2,109.000	-53.24	-13.00	40.24	17.65	H	358.5	1.00

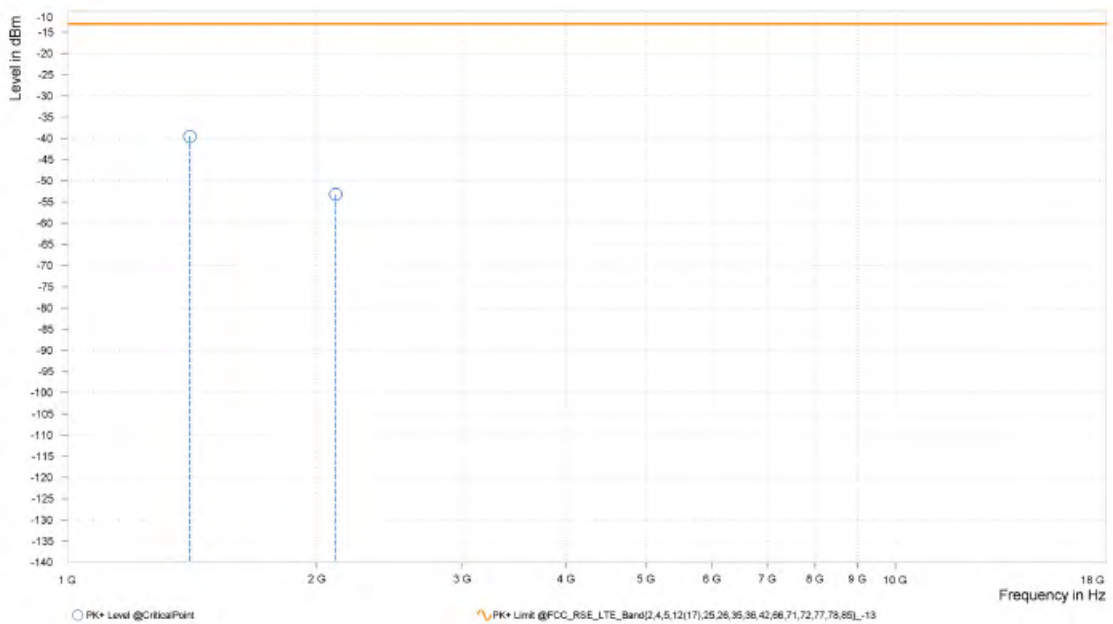




Test Report No.: PSU-NQN2405090215RF03

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,406.000	-42.51	-13.00	29.51	12.22	V	309.3	2.00
2	2,109.000	-52.85	-13.00	39.85	18.36	V	359.1	1.00

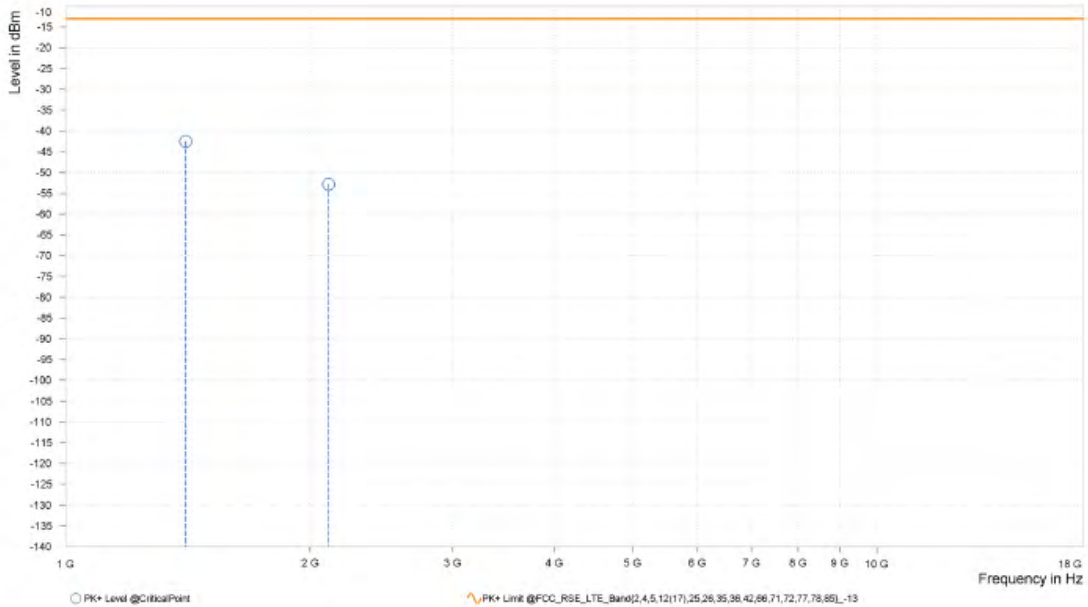



Test Report No.: PSU-NQN2405090215RF03


LTE Band 13

CHANNEL BANDWIDTH: 5MHz / QPSK

CH23205

MODE	TX channel 23205	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,554.500	-51.41	-13.00	38.41	12.09	H	1.4	2.00
3	2,331.750	-49.23	-13.00	36.23	18.55	H	0.9	2.00

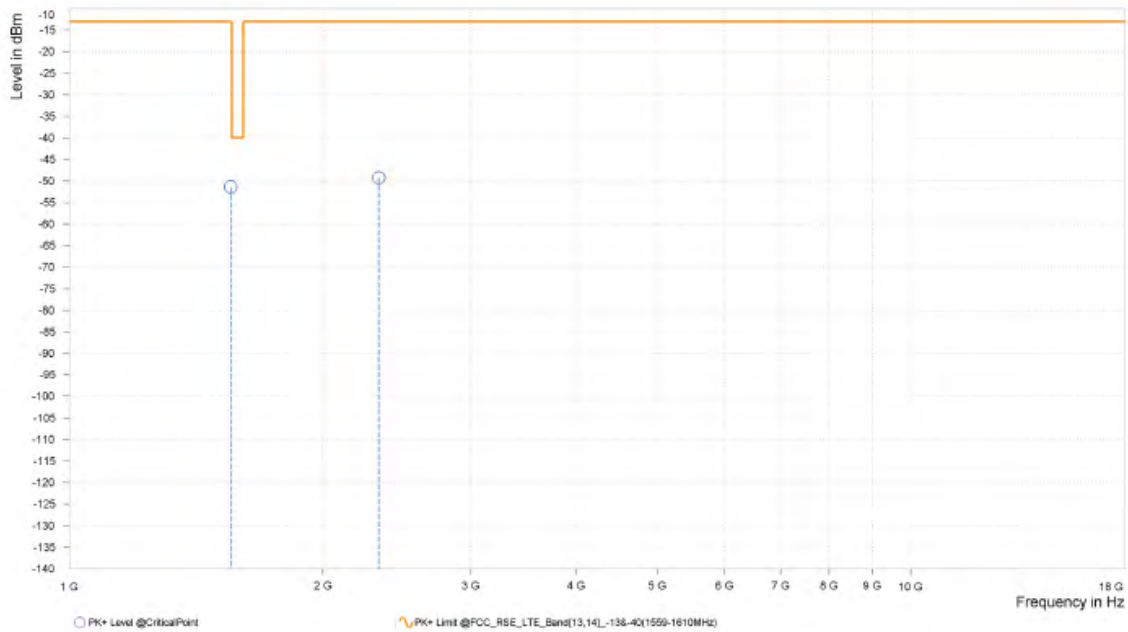




Test Report No.: PSU-NQN2405090215RF03

MODE	TX channel 23205	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,554.500	-56.60	-13.00	43.60	13.43	V	1.4	2.00
3	2,331.750	-51.54	-13.00	38.54	19.17	V	99.7	1.00

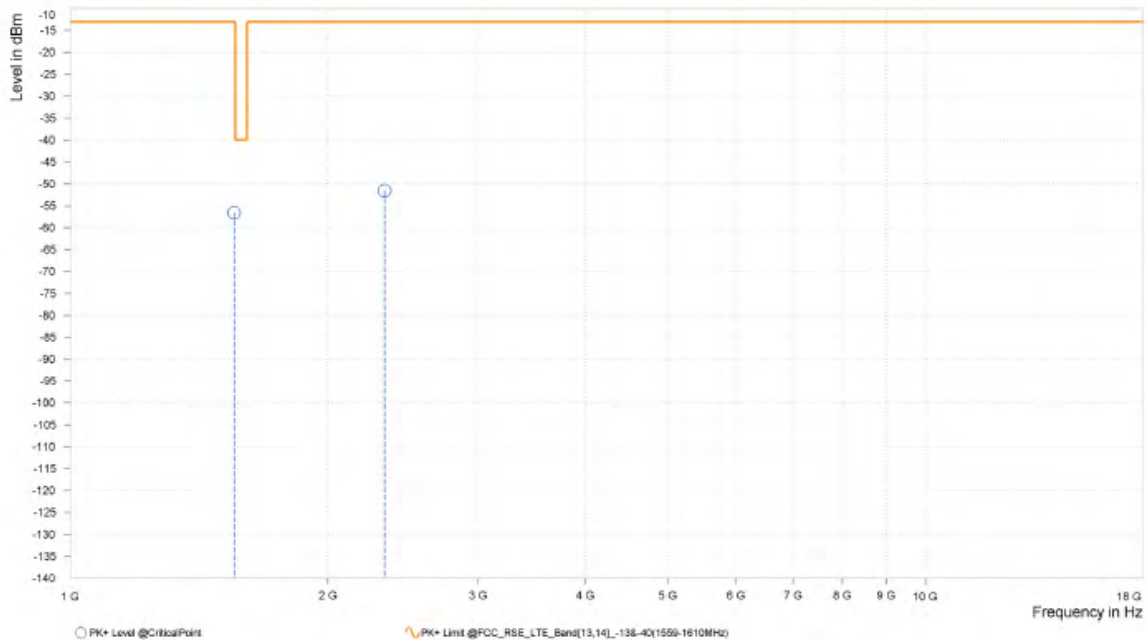




Test Report No.: PSU-NQN2405090215RF03

CH23230

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,559.500	-57.80	-40.00	17.80	12.10	H	1	1.00
3	2,339.000	-51.23	-13.00	38.23	18.80	H	254.2	2.00

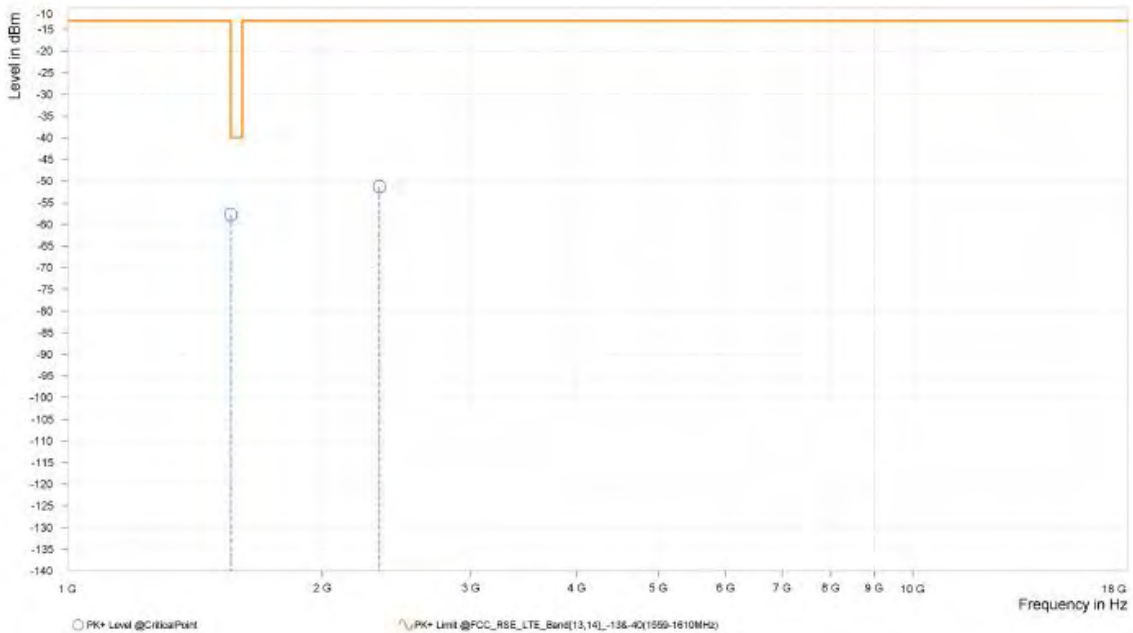




Test Report No.: PSU-NQN2405090215RF03

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,559.500	-57.54	-40.00	17.54	13.48	V	21.5	2.00
3	2,339.250	-52.34	-13.00	39.34	19.20	V	359.1	1.00

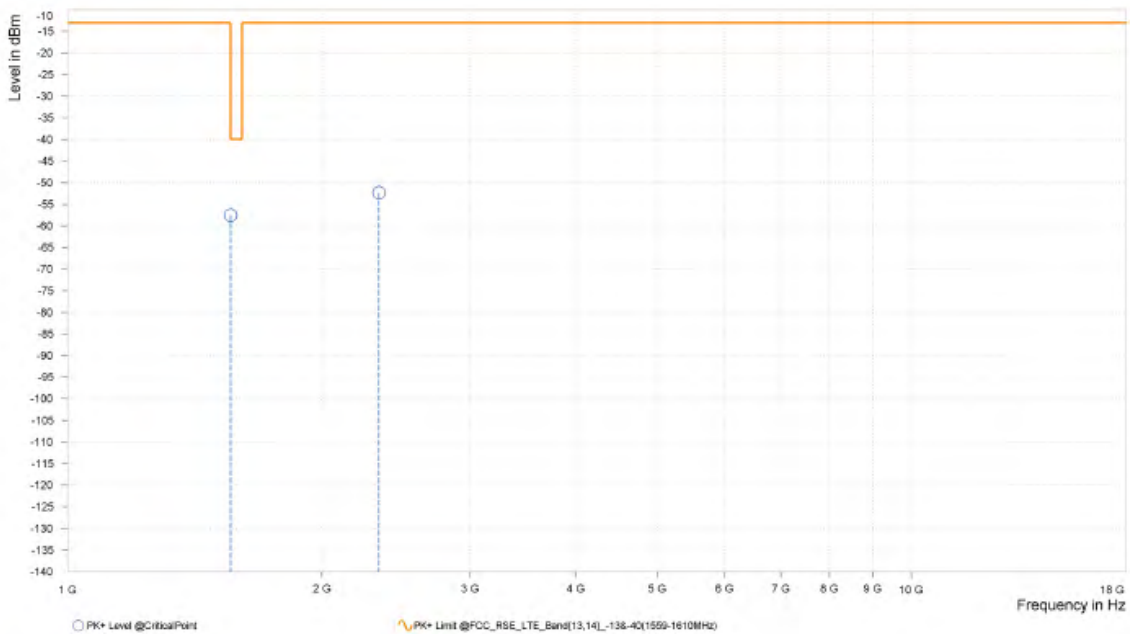




Test Report No.: PSU-NQN2405090215RF03

CH23255

MODE	TX channel 23255	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,564.500	-55.27	-40.00	15.27	12.06	H	358.6	1.00
3	2,346.750	-50.38	-13.00	37.38	19.04	H	359	1.00

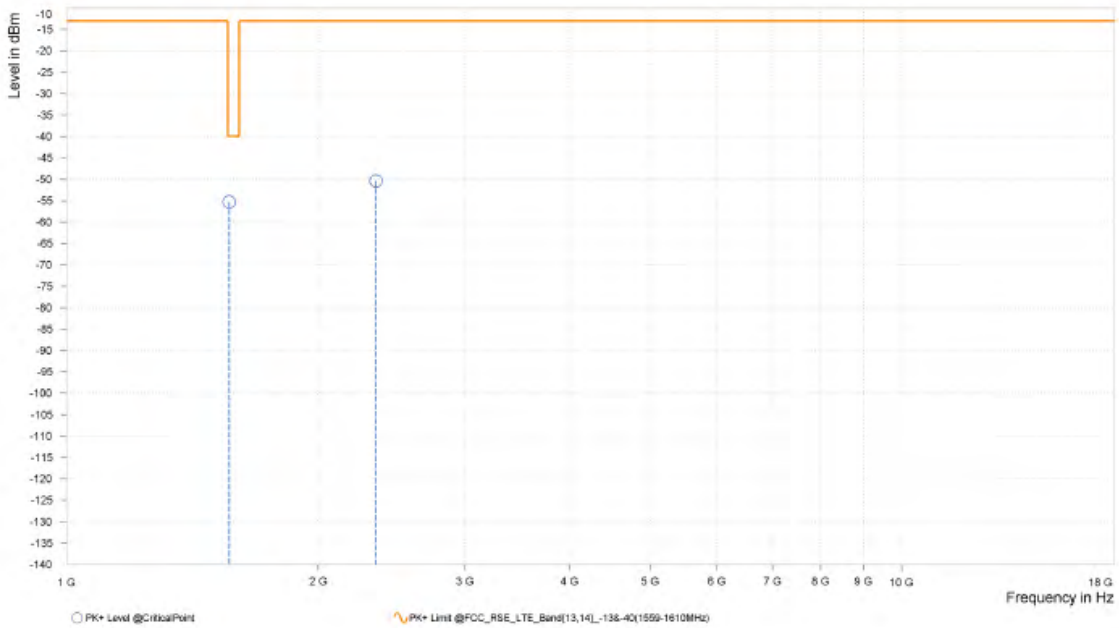




Test Report No.: PSU-NQN2405090215RF03

MODE	TX channel 23255	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,564.500	-56.60	-40.00	16.60	13.47	V	358.7	1.00
3	2,346.750	-51.00	-13.00	38.00	19.24	V	100.9	1.00

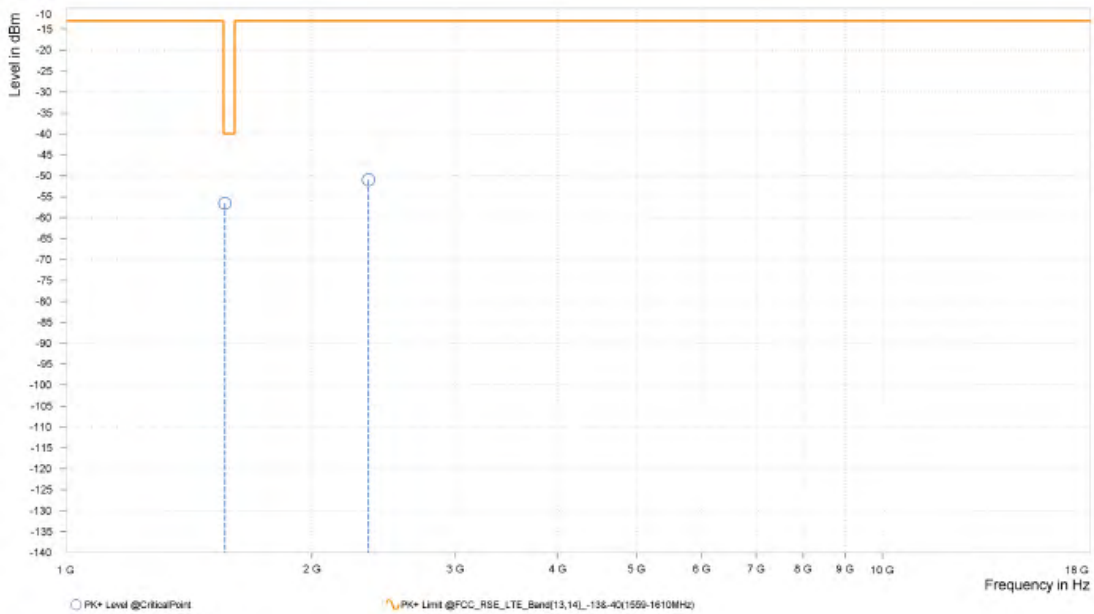




Test Report No.: PSU-NQN2405090215RF03

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,555.000	-35.12	-13.00	22.12	11.54	H	51.9	1.00
3	2,332.500	-51.90	-13.00	38.90	18.59	H	320.9	1.00

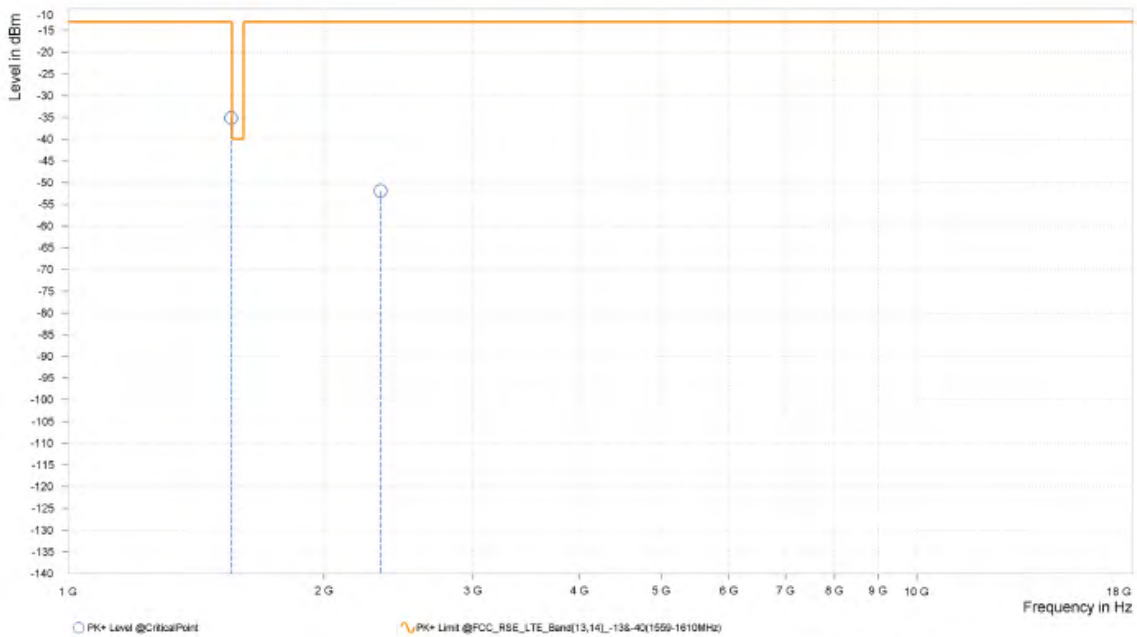




Test Report No.: PSU-NQN2405090215RF03

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,555.500	-45.87	-13.00	32.87	12.88	V	358.8	1.00
3	2,332.500	-48.91	-13.00	35.91	19.17	V	359	2.00

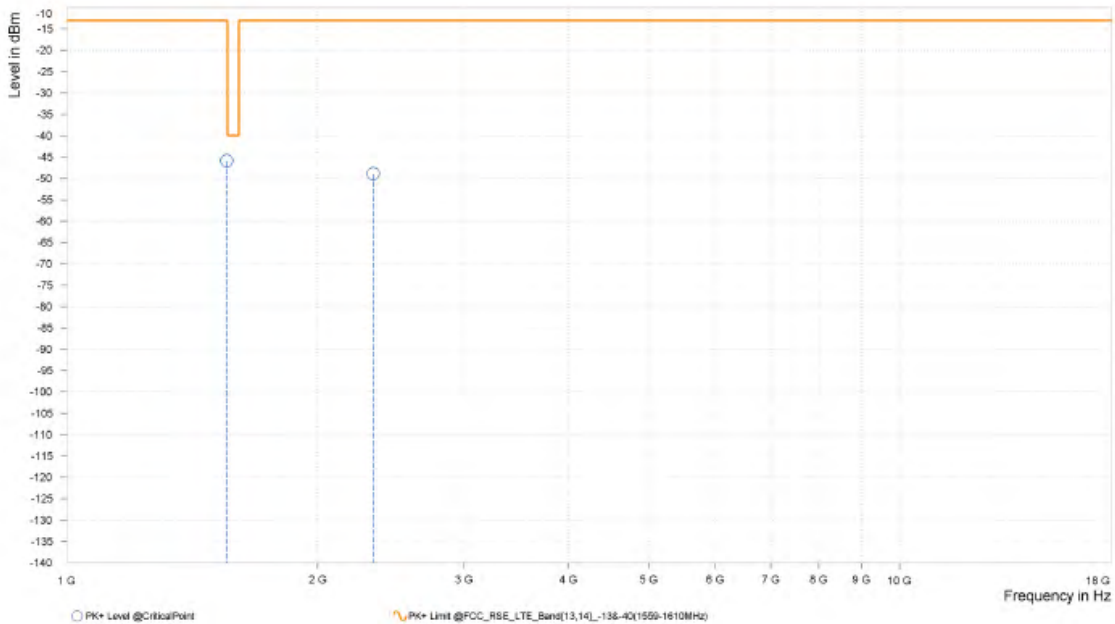


3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

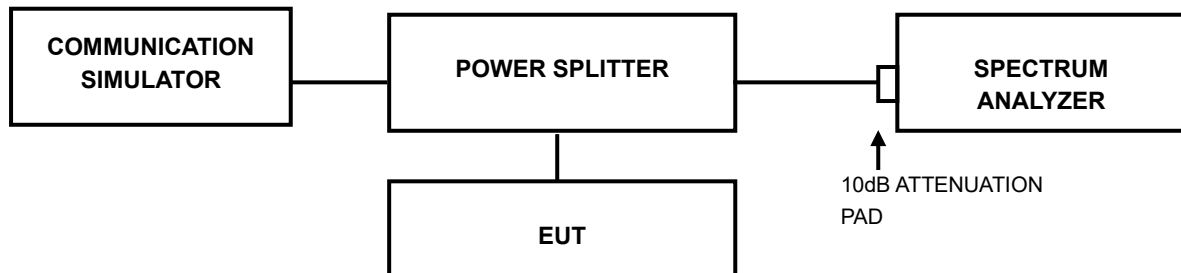

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.



Test Report No.: PSU-NQN2405090215RF03

3.7.4 TEST RESULTS

Please Refer to Appendix Of this test report.



Test Report No.: PSU-NQN2405090215RF03

4 INFORMATION ON THE TESTING LABORATORIES

We, Huarui 7layers High Technology (Suzhou) Co., Ltd. ,were founded in 2020 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Suzhou EMC/RF Lab:

Tel: +86 (0557) 368 1008



Test Report No.: PSU-NQN2405090215RF03

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



6 APPENDIX


LTE BAND7

PEAK-TO-AVERAGE RATIO(CCDF)

Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dB)	Limit(dB)	Verdict
Band7	20MHz	QPSK	20850	1RB#0	5.09	13	PASS
Band7	20MHz	QPSK	20850	100RB#0	5.69	13	PASS
Band7	20MHz	QPSK	21100	1RB#0	5.16	13	PASS
Band7	20MHz	QPSK	21100	100RB#0	5.73	13	PASS
Band7	20MHz	QPSK	21350	1RB#0	5.09	13	PASS
Band7	20MHz	QPSK	21350	100RB#0	5.77	13	PASS
Band7	20MHz	16QAM	20850	1RB#0	5.69	13	PASS
Band7	20MHz	16QAM	20850	100RB#0	6.35	13	PASS
Band7	20MHz	16QAM	21100	1RB#0	5.70	13	PASS
Band7	20MHz	16QAM	21100	100RB#0	6.45	13	PASS
Band7	20MHz	16QAM	21350	1RB#0	5.53	13	PASS
Band7	20MHz	16QAM	21350	100RB#0	6.47	13	PASS


Test Graphs

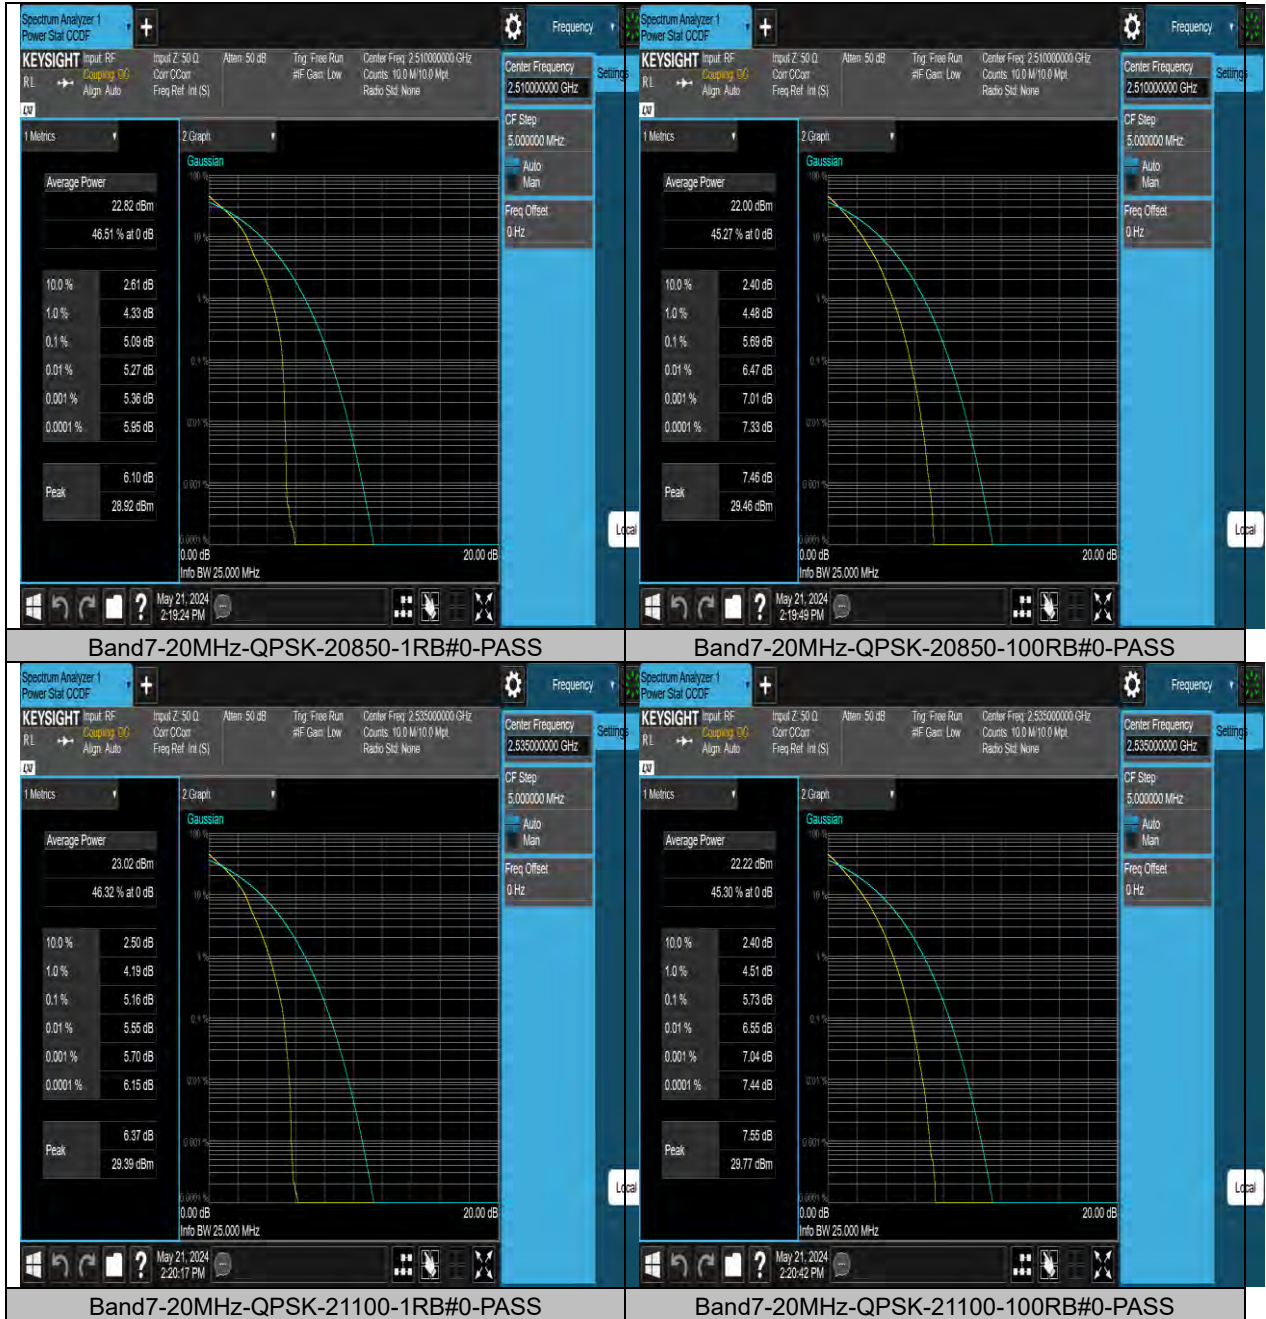



BUREAU VERITAS


Test Report No.: PSU-NQN2405090215RF03

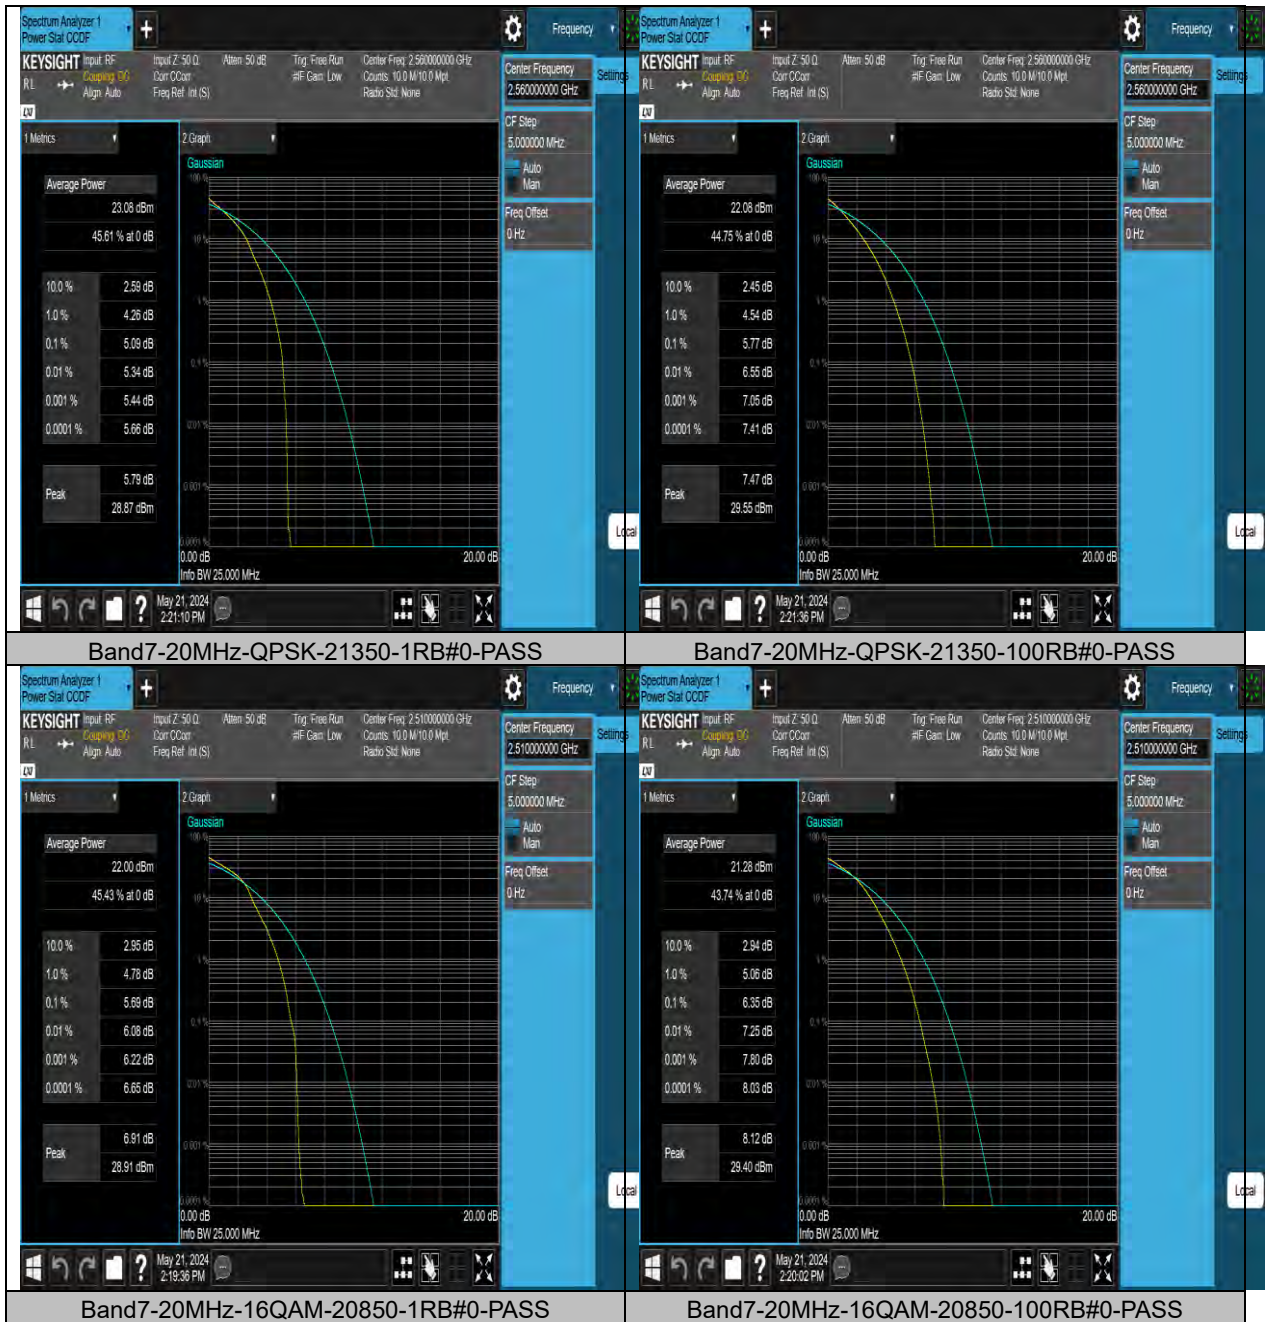



BUREAU VERITAS

Test Report No.: PSU-NQN2405090215RF03

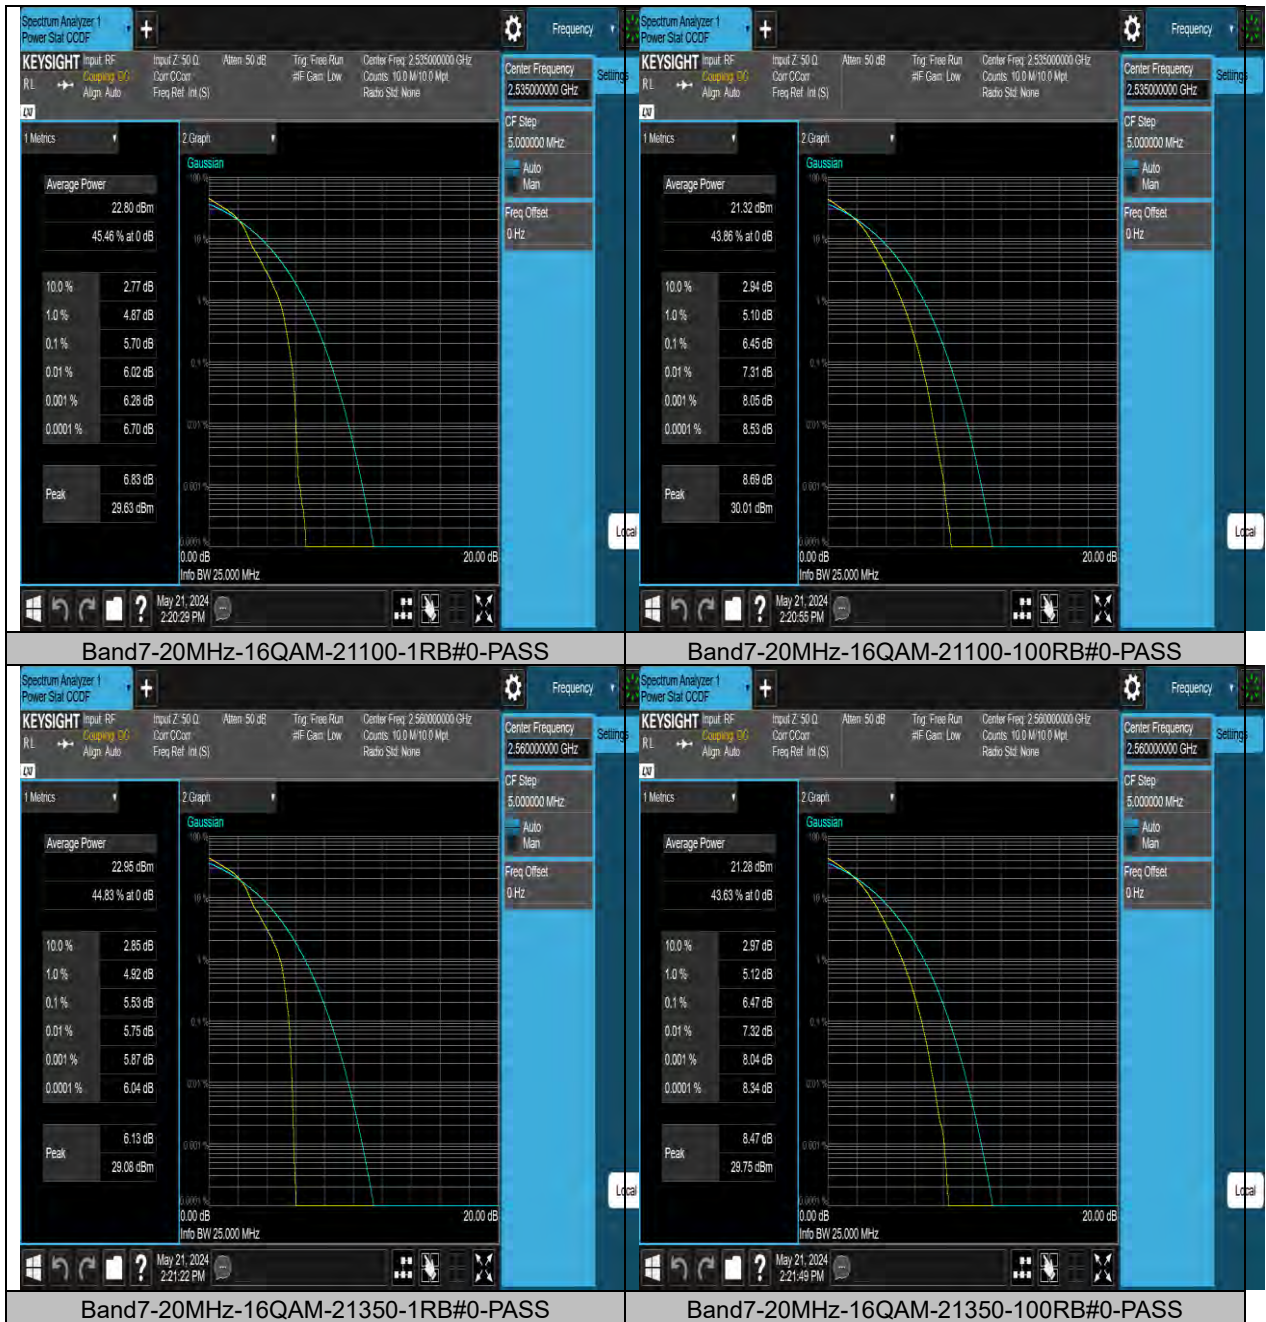




Test Report No.: PSU-NQN2405090215RF03

26DB BANDWIDTH AND OCCUPIED BANDWIDTH

Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
Band7	5MHz	QPSK	20775	25RB#0	4.5275	5.012	PASS
Band7	5MHz	QPSK	21100	25RB#0	4.5315	5.002	PASS
Band7	5MHz	QPSK	21425	25RB#0	4.5283	5.009	PASS
Band7	5MHz	16QAM	20775	25RB#0	4.4977	4.999	PASS
Band7	5MHz	16QAM	21100	25RB#0	4.5022	5.005	PASS
Band7	5MHz	16QAM	21425	25RB#0	4.5034	4.999	PASS
Band7	10MHz	QPSK	20800	50RB#0	9.0131	9.859	PASS
Band7	10MHz	QPSK	21100	50RB#0	9.0372	9.912	PASS
Band7	10MHz	QPSK	21400	50RB#0	9.0134	9.944	PASS
Band7	10MHz	16QAM	20800	50RB#0	8.9993	9.923	PASS
Band7	10MHz	16QAM	21100	50RB#0	9.0067	9.903	PASS
Band7	10MHz	16QAM	21400	50RB#0	9.0016	9.928	PASS
Band7	15MHz	QPSK	20825	75RB#0	13.464	14.92	PASS
Band7	15MHz	QPSK	21100	75RB#0	13.504	14.92	PASS
Band7	15MHz	QPSK	21375	75RB#0	13.504	14.97	PASS
Band7	15MHz	16QAM	20825	75RB#0	13.462	14.84	PASS
Band7	15MHz	16QAM	21100	75RB#0	13.495	14.92	PASS
Band7	15MHz	16QAM	21375	75RB#0	13.511	14.91	PASS
Band7	20MHz	QPSK	20850	100RB#0	18.024	19.65	PASS
Band7	20MHz	QPSK	21100	100RB#0	18.044	19.77	PASS
Band7	20MHz	QPSK	21350	100RB#0	18.042	19.83	PASS
Band7	20MHz	16QAM	20850	100RB#0	17.936	19.59	PASS
Band7	20MHz	16QAM	21100	100RB#0	17.996	19.65	PASS
Band7	20MHz	16QAM	21350	100RB#0	17.984	19.52	PASS




Test Graphs

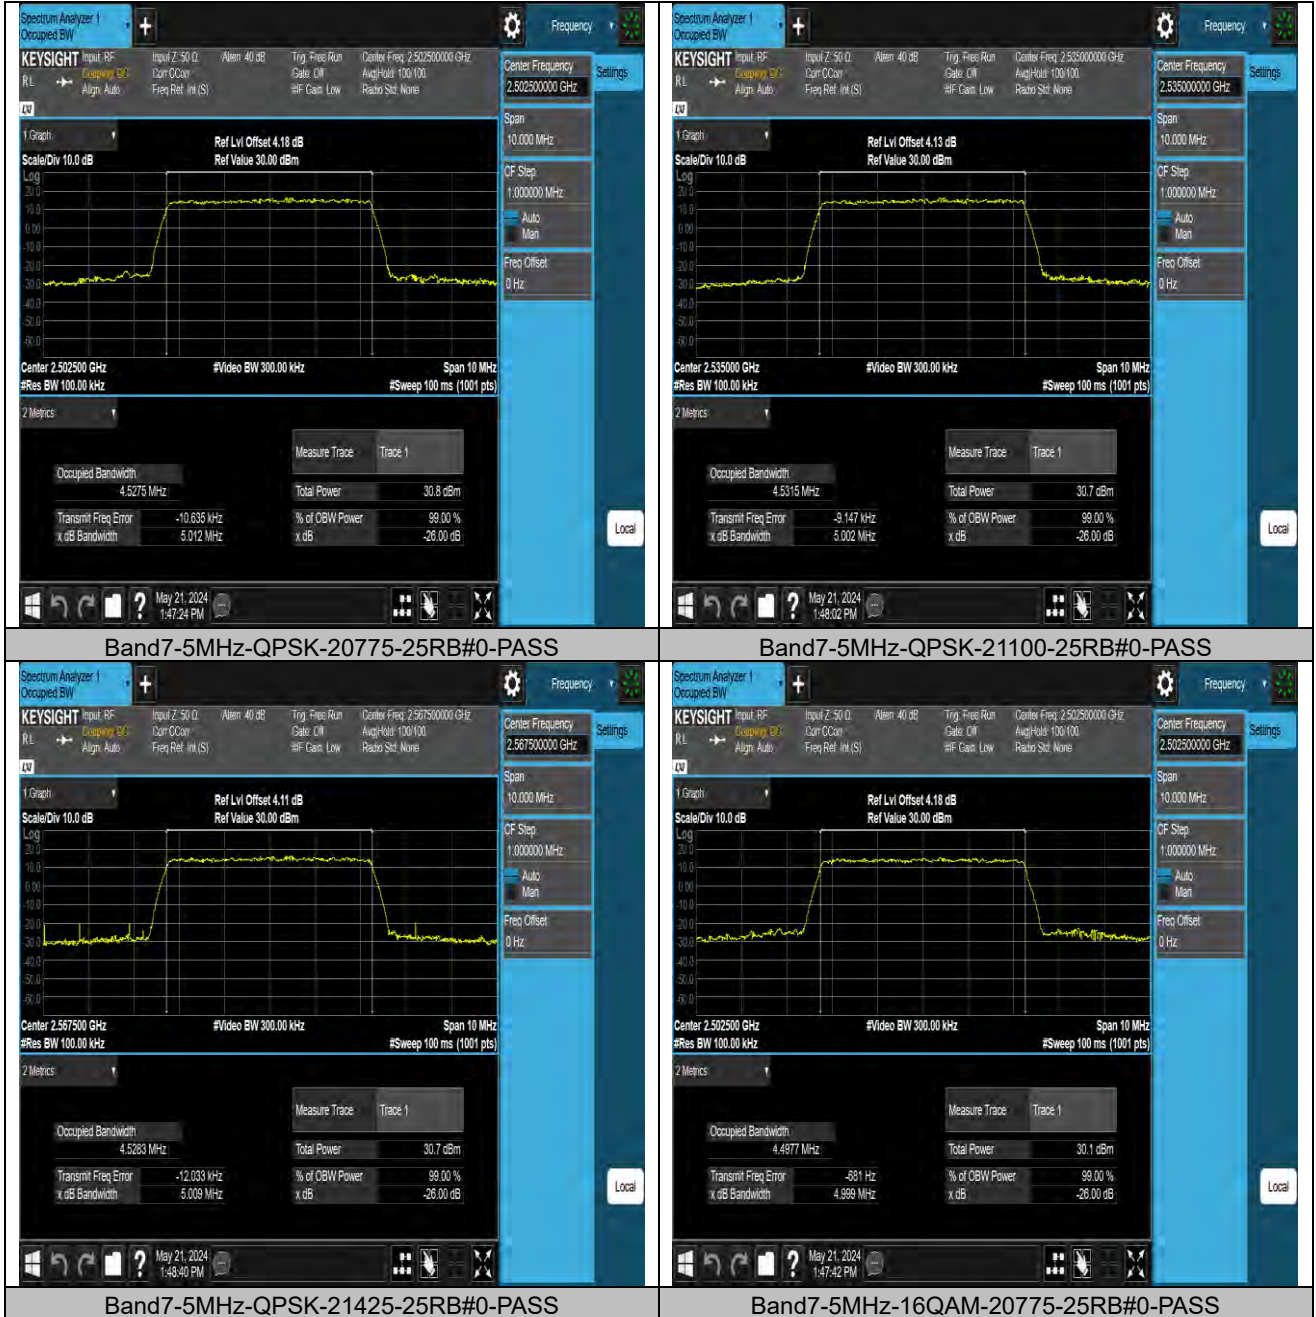



BUREAU VERITAS


Test Report No.: PSU-NQN2405090215RF03

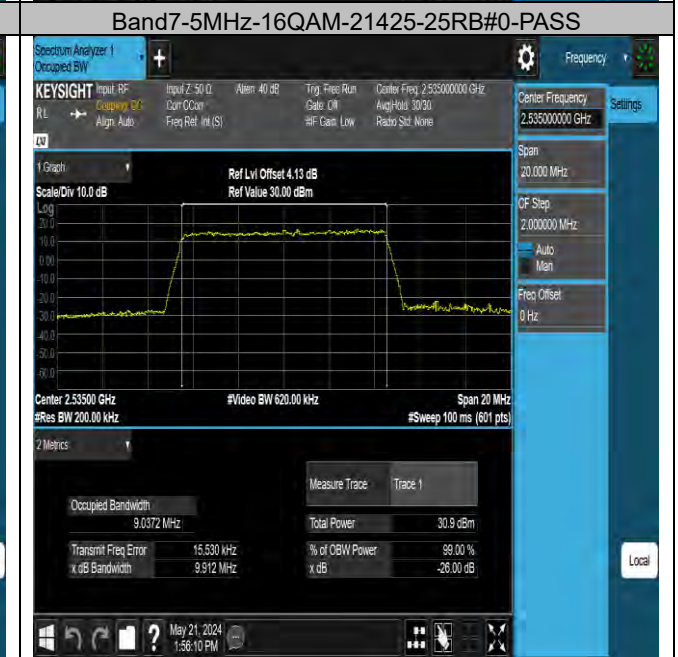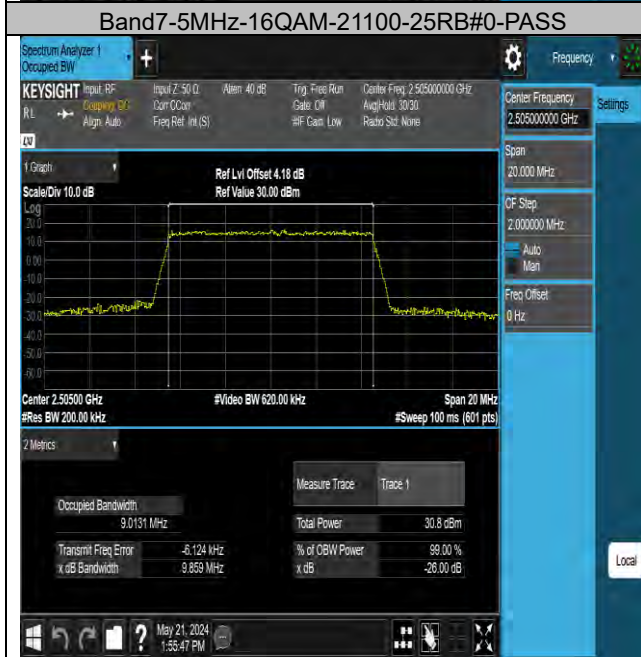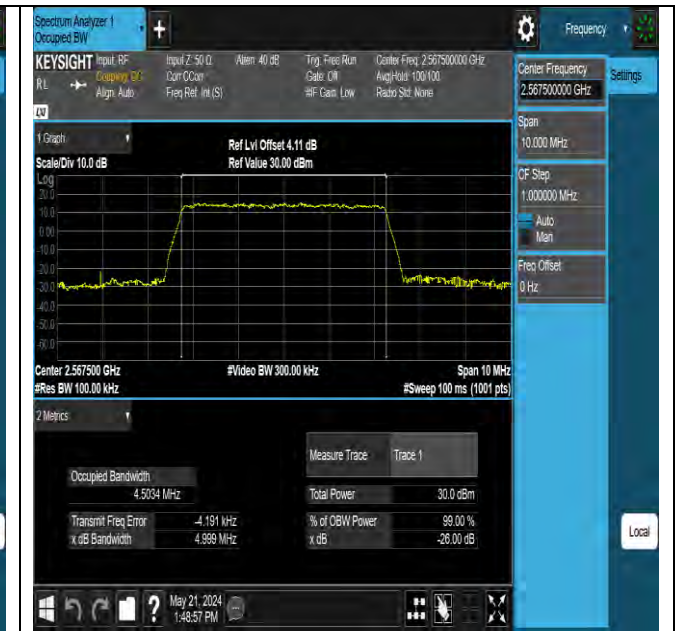



BUREAU VERITAS

Test Report No.: PSU-NQN2405090215RF03

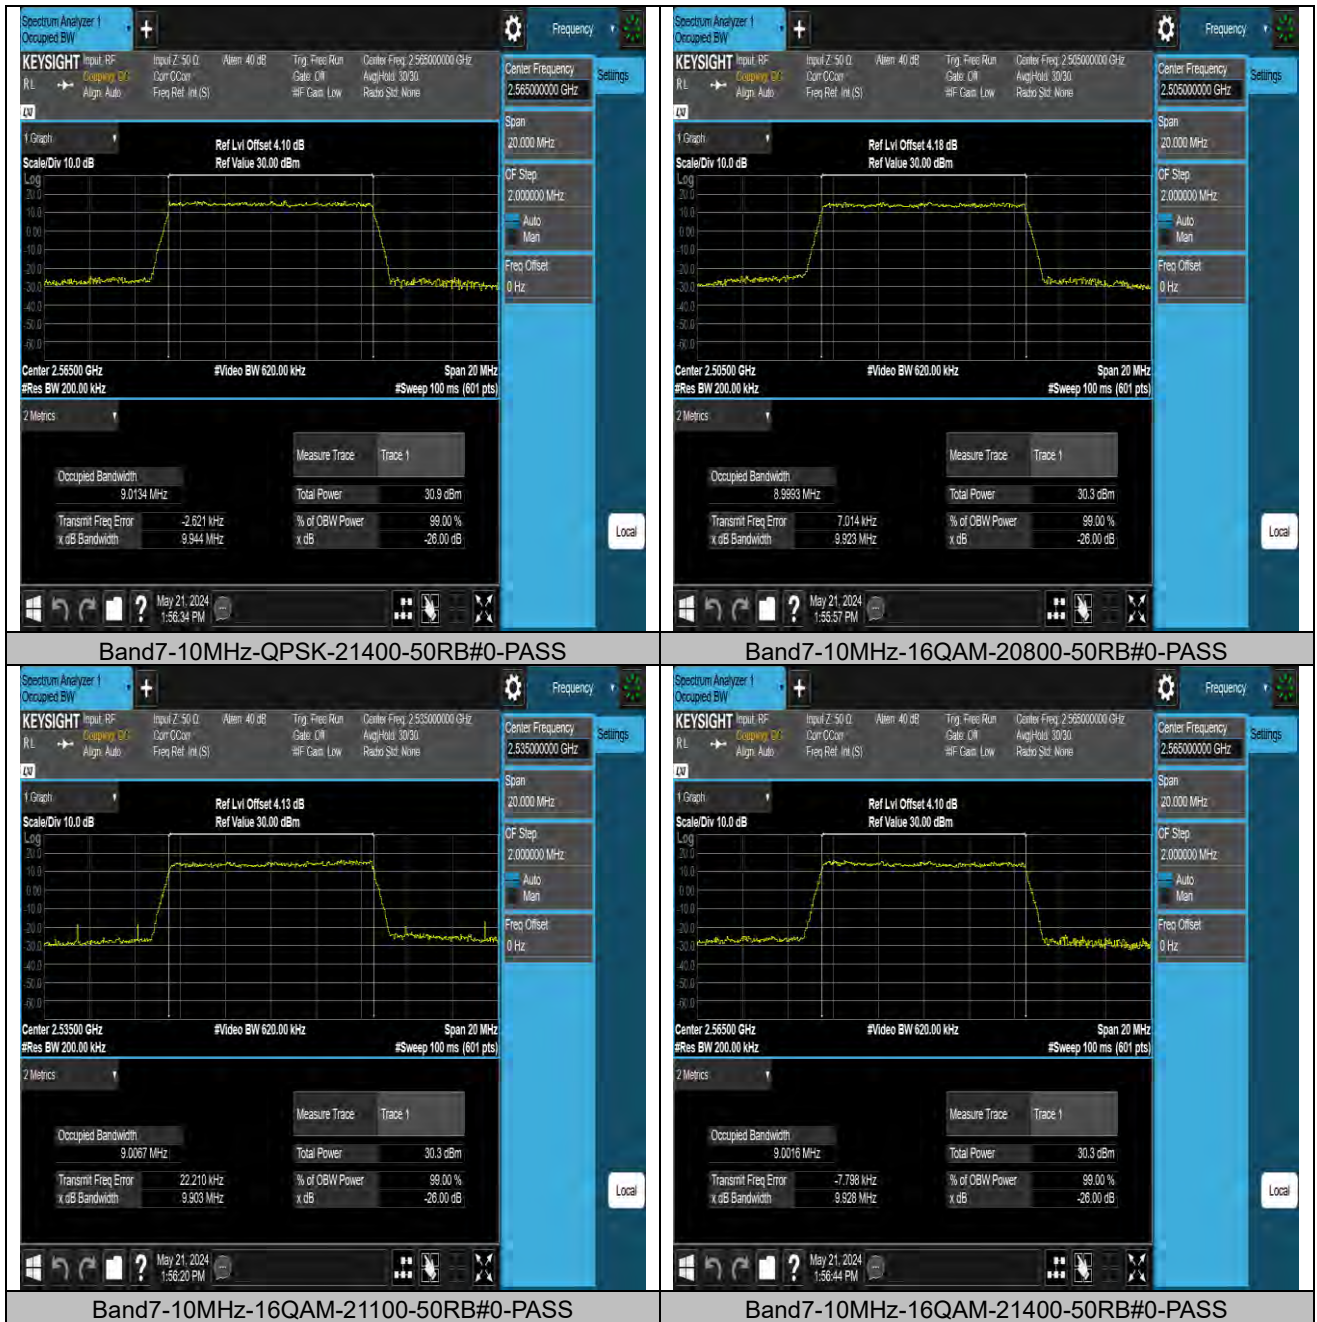



BUREAU VERITAS


Test Report No.: PSU-NQN2405090215RF03




Band7-15MHz-QPSK-20825-75RB#0-PASS



Band7-15MHz-QPSK-21100-75RB#0-PASS

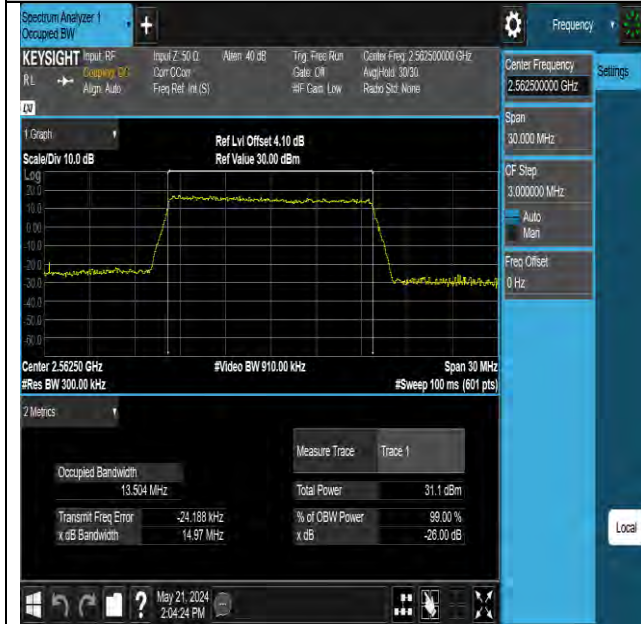

Band7-15MHz-QPSK-21375-75RB#0-PASS

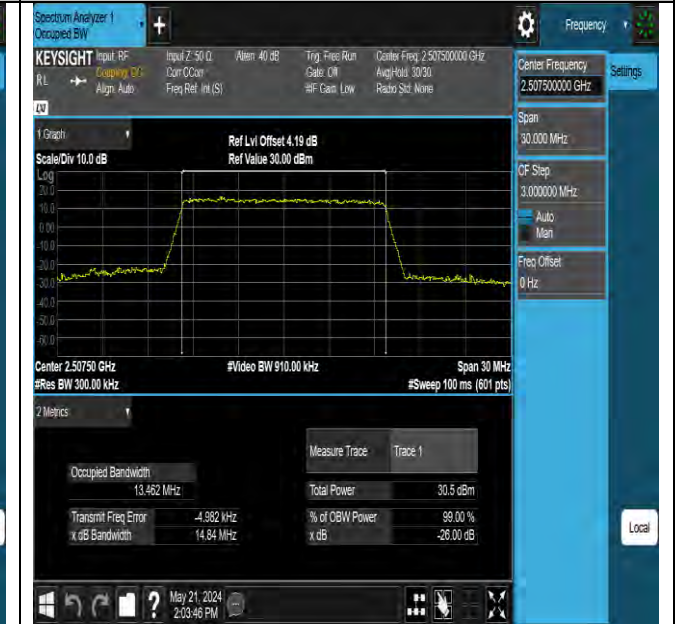

Band7-15MHz-16QAM-20825-75RB#0-PASS




BUREAU VERITAS

Test Report No.: PSU-NQN2405090215RF03



Band7-15MHz-16QAM-21100-75RB#0-PASS

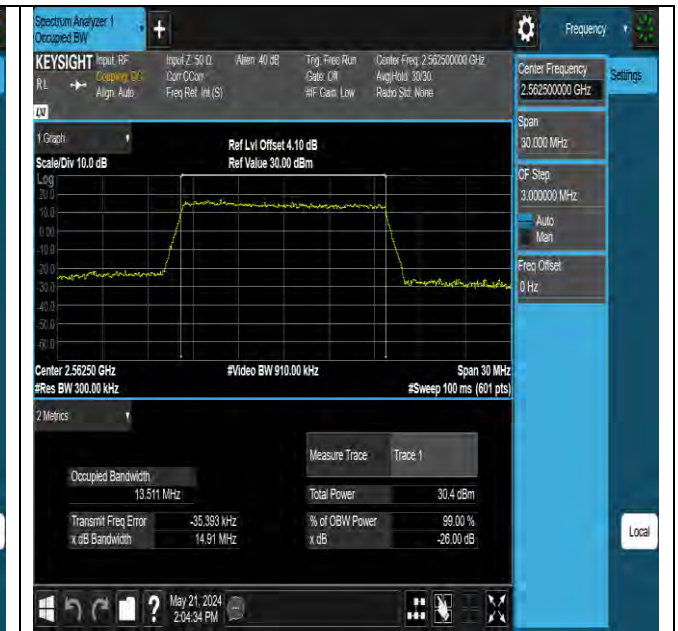

Band7-15MHz-16QAM-21375-75RB#0-PASS



Band7-20MHz-QPSK-20850-100RB#0-PASS



Band7-20MHz-QPSK-21100-100RB#0-PASS



BUREAU VERITAS

Test Report No.: PSU-NQN2405090215RF03



Band7-20MHz-QPSK-21350-100RB#0-PASS



Band7-20MHz-16QAM-20850-100RB#0-PASS



Band7-20MHz-16QAM-21100-100RB#0-PASS



Band7-20MHz-16QAM-21350-100RB#0-PASS



Test Report No.: PSU-NQN2405090215RF03

BAND EDGE

Test Result


Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band7	5MHz	QPSK	20775	1RB#0	-22.75	PASS
Band7	5MHz	QPSK	20775	25RB#0	-43.75	PASS
Band7	5MHz	QPSK	21425	1RB#24	-22.27	PASS
Band7	5MHz	QPSK	21425	25RB#0	-41.38	PASS
Band7	5MHz	16QAM	20775	1RB#0	-23.90	PASS
Band7	5MHz	16QAM	20775	25RB#0	-43.47	PASS
Band7	5MHz	16QAM	21425	1RB#24	-23.29	PASS
Band7	5MHz	16QAM	21425	25RB#0	-40.72	PASS
Band7	10MHz	QPSK	20800	1RB#0	-48.30	PASS
Band7	10MHz	QPSK	20800	50RB#0	-43.57	PASS
Band7	10MHz	QPSK	21400	1RB#49	-31.66	PASS
Band7	10MHz	QPSK	21400	50RB#0	-42.04	PASS
Band7	10MHz	16QAM	20800	1RB#0	-48.21	PASS
Band7	10MHz	16QAM	20800	50RB#0	-43.56	PASS
Band7	10MHz	16QAM	21400	1RB#49	-32.74	PASS
Band7	10MHz	16QAM	21400	50RB#0	-41.22	PASS
Band7	15MHz	QPSK	20825	1RB#0	-45.50	PASS
Band7	15MHz	QPSK	20825	75RB#0	-39.69	PASS
Band7	15MHz	QPSK	21375	1RB#74	-48.60	PASS
Band7	15MHz	QPSK	21375	75RB#0	-43.01	PASS
Band7	15MHz	16QAM	20825	1RB#0	-44.63	PASS
Band7	15MHz	16QAM	20825	75RB#0	-40.96	PASS
Band7	15MHz	16QAM	21375	1RB#74	-48.59	PASS
Band7	15MHz	16QAM	21375	75RB#0	-42.70	PASS
Band7	20MHz	QPSK	20850	1RB#0	-47.60	PASS
Band7	20MHz	QPSK	20850	100RB#0	-37.24	PASS
Band7	20MHz	QPSK	21350	1RB#99	-48.48	PASS
Band7	20MHz	QPSK	21350	100RB#0	-45.27	PASS
Band7	20MHz	16QAM	20850	1RB#0	-48.08	PASS
Band7	20MHz	16QAM	20850	100RB#0	-38.56	PASS
Band7	20MHz	16QAM	21350	1RB#99	-48.59	PASS
Band7	20MHz	16QAM	21350	100RB#0	-45.18	PASS



BUREAU VERITAS


Test Report No.: PSU-NQN2405090215RF03

Test Graphs

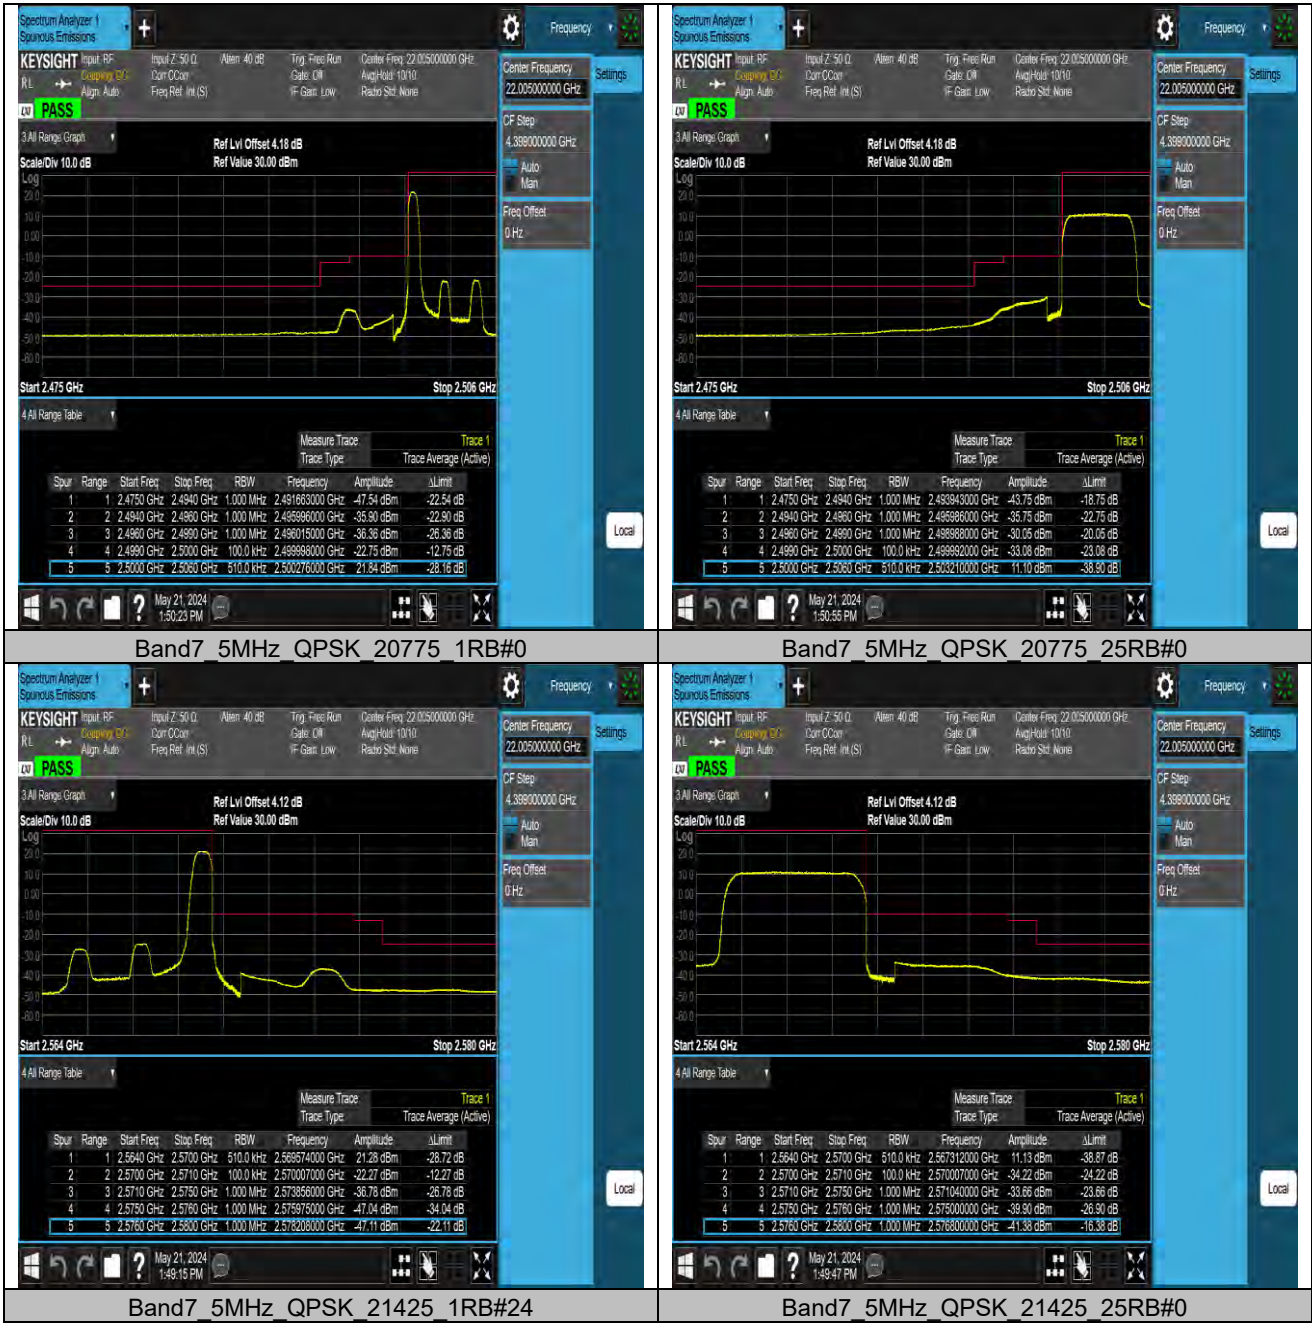




Test Report No.: PSU-NQN2405090215RF03

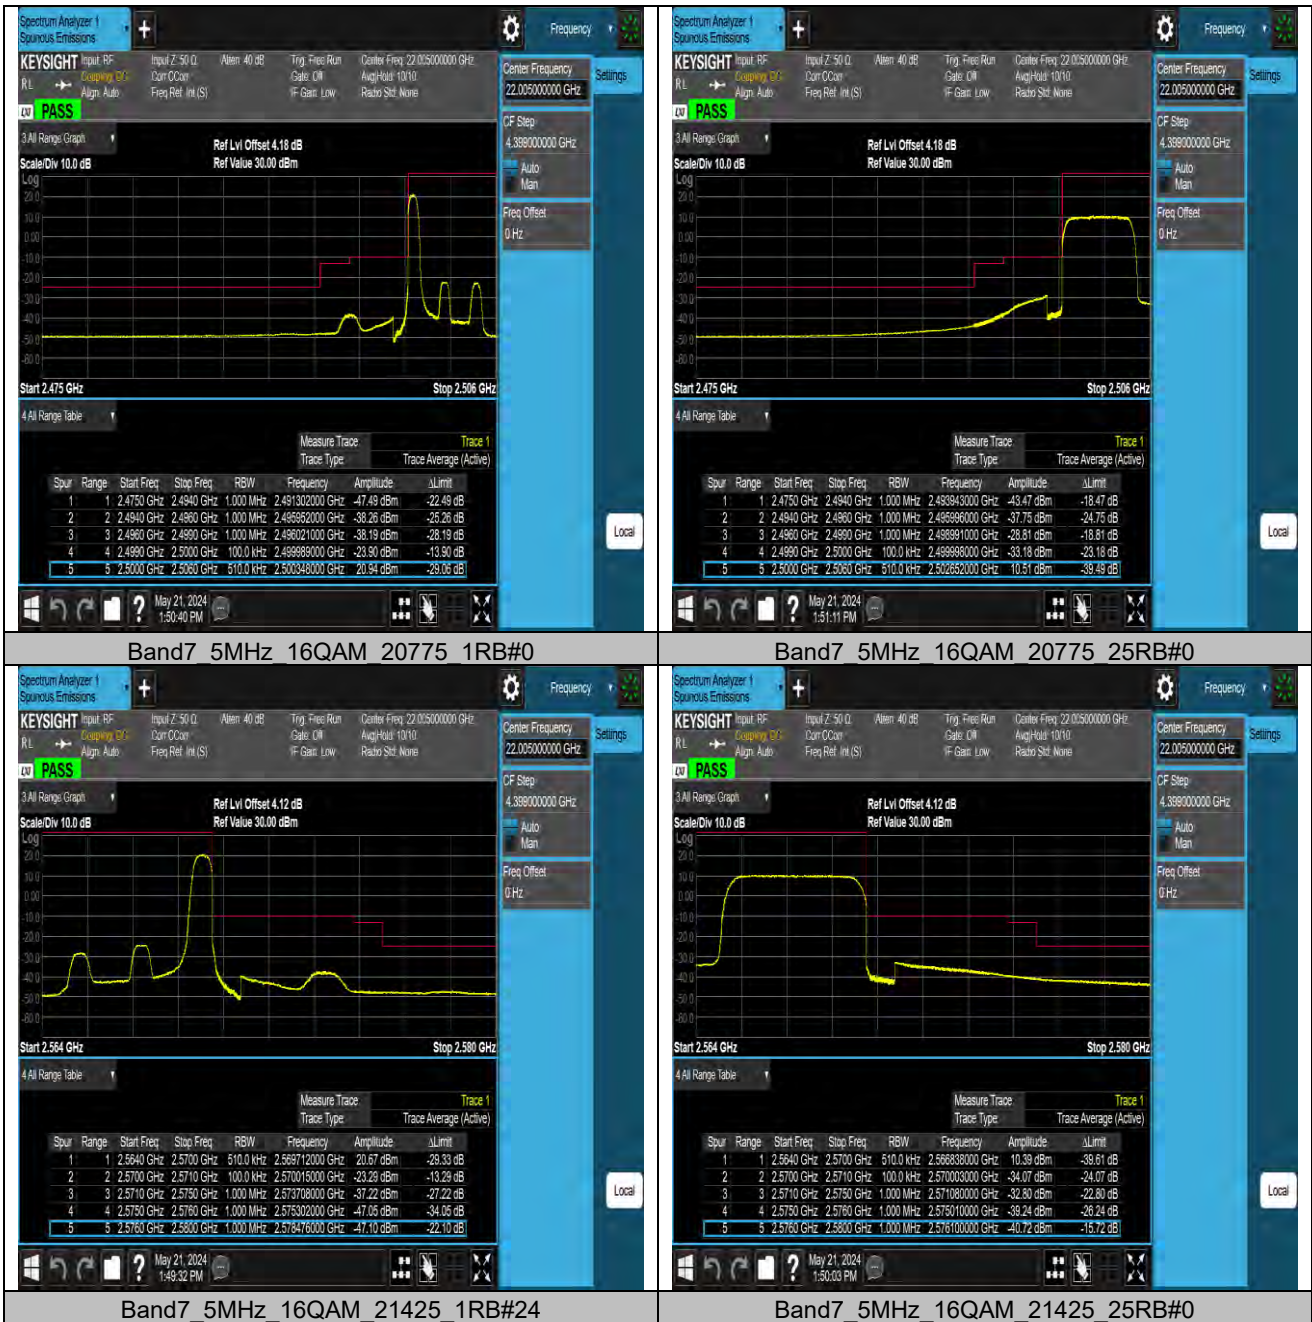




Test Report No.: PSU-NQN2405090215RF03

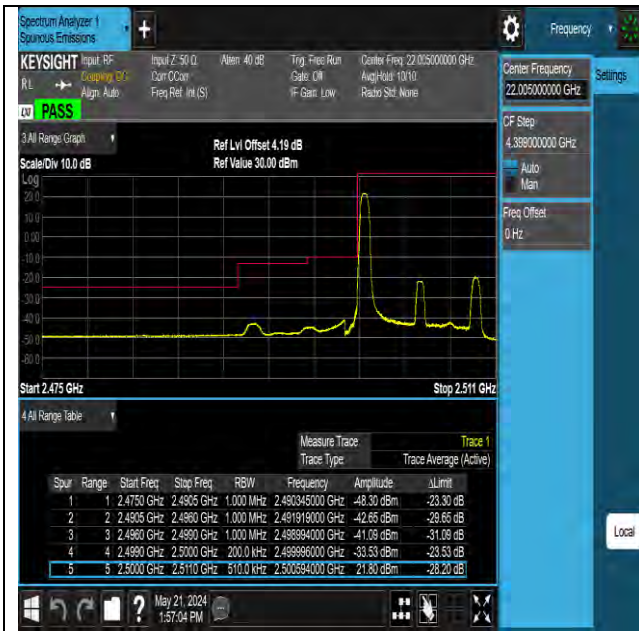

Band7 10MHz QPSK 20800 1RB#0



Band7 10MHz QPSK 20800 50RB#0

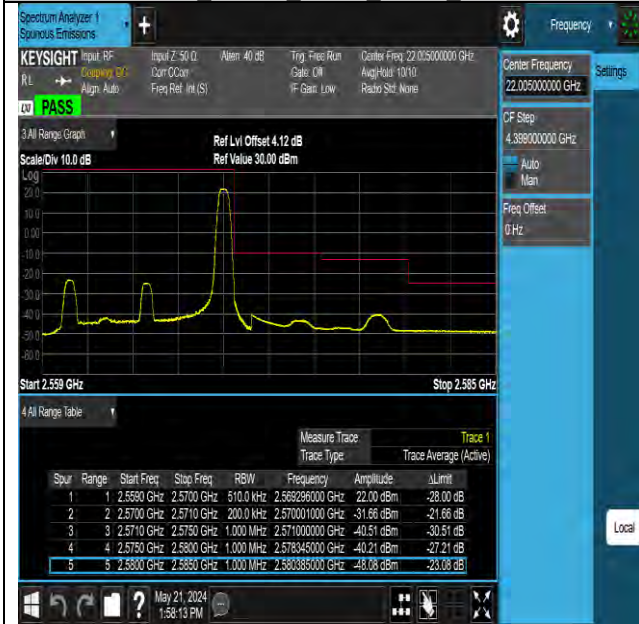


Band7 10MHz QPSK 21400 1RB#49



Band7 10MHz QPSK 21400 50RB#0



Test Report No.: PSU-NQN2405090215RF03

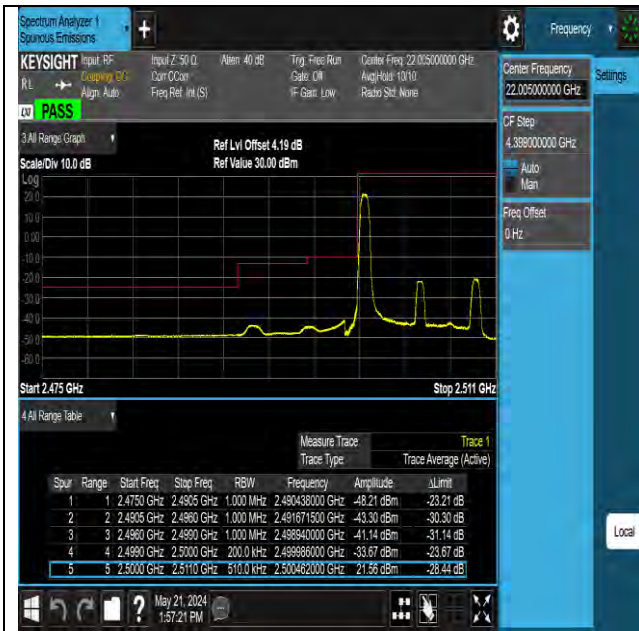


Band7 10MHz 16QAM 20800 1RB#0



Band7 10MHz 16QAM 20800 50RB#0



Band7 10MHz 16QAM 21400 1RB#49

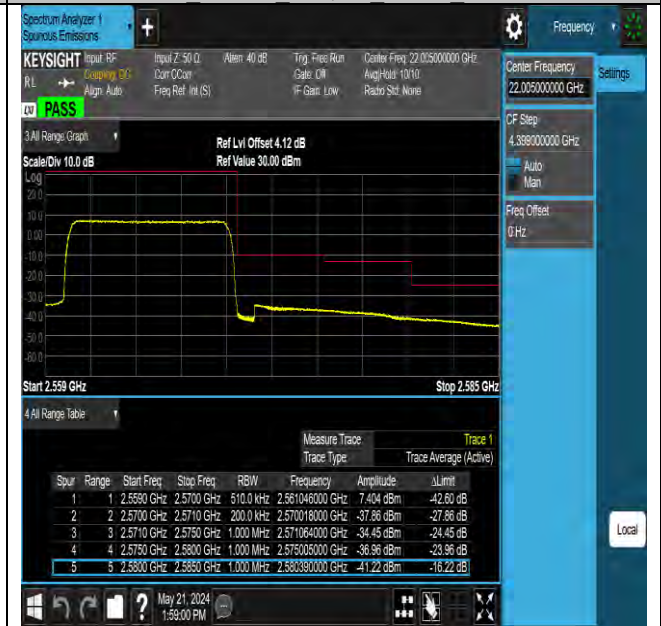

Band7 10MHz 16QAM 21400 50RB#0