



BUREAU VERITAS

Test Report No.: PSU-QSU2306120115RF04



Certificate #6613.01

# FCC TEST REPORT (PART 24)

Applicant:	HMD Global Oy
Address:	Bertel Jungin aukio 9,02600 Espoo,Finland

Manufacturer or Supplier:	HMD Global Oy
Address:	Bertel Jungin aukio 9,02600 Espoo,Finland
Product:	Mobile Phone
Brand Name:	HMD
Model Name:	TA-1681
FCC ID	2AJOTTA-1681
Date of tests	Aug. 29, 2024 ~ Sep. 27, 2024

The tests have been carried out according to the requirements of the following standard:

- FCC PART 24, Subpart E
- FCC PART 2
- ANSI/TIA/EIA-603-D
- ANSI/TIA/EIA-603-E
- ANSI C63.26-2015

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
Date: Sep. 27, 2024	Date: Sep. 27, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



## TABLE OF CONTENTS

RELEASE CONTROL RECORD .....	5
1 SUMMARY OF TEST RESULTS .....	6
1.1 MEASUREMENT UNCERTAINTY .....	7
1.2 TEST SITE AND INSTRUMENTS .....	8
2 GENERAL INFORMATION.....	10
2.1 GENERAL DESCRIPTION OF EUT .....	10
2.2 CONFIGURATION OF SYSTEM UNDER TEST .....	13
2.3 DESCRIPTION OF SUPPORT UNITS .....	14
2.4 TEST ITEM AND TEST CONFIGURATION.....	14
2.5 EUT OPERATING CONDITIONS .....	17
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	17
3 TEST TYPES AND RESULTS .....	18
3.1 OUTPUT POWER MEASUREMENT .....	18
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT .....	18
3.1.2 TEST PROCEDURES.....	18
3.1.3 TEST SETUP .....	19
3.1.4 TEST RESULTS .....	19
3.2 FREQUENCY STABILITY MEASUREMENT .....	27
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT .....	27
3.2.2 TEST PROCEDURE .....	27
3.2.3 TEST SETUP .....	27
3.2.4 TEST RESULTS .....	28
3.3 OCCUPIED BANDWIDTH MEASUREMENT .....	29
3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT .....	29
3.3.2 TEST SETUP .....	29
3.3.3 TEST PROCEDURES.....	29
3.3.4 TEST RESULTS .....	30
3.4 BAND EDGE MEASUREMENTC .....	31
3.4.1 LIMITS OF BAND EDGE MEASUREMENT .....	31
3.4.2 TEST SETUP .....	31
3.4.3 TEST PROCEDURES.....	32
3.4.4. TEST RESULTS .....	33
3.5 CONDUCTED SPURIOUS EMISSIONS.....	34
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT .....	34
3.5.2 TEST PROCEDURE .....	34
3.5.3 TEST SETUP .....	34
3.5.4 TEST RESULTS .....	35
3.6 RADIATED EMISSION MEASUREMENT .....	36
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	36
3.6.2 TEST PROCEDURES.....	36
3.6.3 DEVIATION FROM TEST STANDARD.....	36



3.6.4 TEST SETUP .....37

3.6.5 TEST RESULTS .....39

3.7 PEAK TO AVERAGE RATIO .....69

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT .....69

3.7.2 TEST SETUP .....69

3.7.3 TEST PROCEDURES .....69

3.7.4 TEST RESULTS .....70

4 INFORMATION ON THE TESTING LABORATORIES .....71

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....72

6 APPENDIX .....73

GSM 1900 .....73

PEAK-TO-AVERAGE RATIO(CCDF) .....73

TEST RESULT .....73

TEST GRAPHS .....74

26DB BANDWIDTH AND OCCUPIED BANDWIDTH .....77

TEST RESULT .....77

BAND EDGE .....84

TEST RESULT .....84

TEST GRAPHS .....85

CONDUCTED SPURIOUS EMISSION .....87

TEST RESULT .....87

TEST GRAPHS .....88

FREQUENCY STABILITY .....91

TEST RESULT .....91

WCDMA BAND2 .....92

PEAK-TO-AVERAGE RATIO .....92

TEST RESULT .....92

TEST GRAPHS .....93

26DB BANDWIDTH AND OCCUPIED BANDWIDTH .....95

TEST RESULT .....95

TEST GRAPHS .....96

OCCUPIED BANDWIDTH .....96

BAND EDGE .....99

TEST RESULT .....99

TEST GRAPHS .....100

CONDUCTED SPURIOUS EMISSION .....101

TEST RESULT .....101

TEST GRAPHS .....102

FREQUENCY STABILITY .....104

TEST RESULT .....104

LTE BAND 2 .....105

PEAK-TO-AVERAGE RATIO(CCDF) .....105

TEST RESULT .....105

TEST GRAPHS .....106

26DB BANDWIDTH AND OCCUPIED BANDWIDTH .....108



**BUREAU**  
**VERITAS**

**Test Report No.: PSU-NQN2405210111RF03**

TEST RESULT .....	108
TEST GRAPHS .....	109
BAND EDGE .....	119
TEST RESULT .....	119
TEST GRAPHS .....	121
CONDUCTED SPURIOUS EMISSION .....	128
TEST RESULT .....	128
TEST GRAPHS .....	130
FREQUENCY STABILITY .....	136
TEST RESULT .....	136



**BUREAU**  
**VERITAS**

Test Report No.: PSU-NQN2405210111RF03

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
PSU-NQN2405210111RF03	Original release	Sep. 27, 2024



# 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	Test lab*
§2.1046	Coducted Output Power	Compliance	A
§24.232(c)	Equivalent Isotropic Radiated Power	Compliance	A
§2.1055 §24.235	Frequency Stability	Compliance	A
§2.1049	Occupied Bandwidth	Compliance	A
§24.232(d)	Peak to average ratio*	Compliance	A
§24.238(a)(b)	Band Edge Measurements	Compliance	A
§2.1051 §24.238(a)(b)	Conducted Spurious Emissions	Compliance	A
§2.1053 §24.238(a)(b)	Radiated Spurious Emissions	Compliance	A

\* Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01.

### \*Test Lab Information Reference

**Lab A:**

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

**Lab Address:**

Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province

**Accredited Test Lab Cert 6613.01**


**The FCC Site Registration No. is 434559; The Designation No. is CN1325.**

### 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	± 76.97Hz
Radiated emissions (9KHz~30MHz)	±2.68dB
Radiated emissions & Radiated Power (30MHz~1GHz)	±4.98dB
Radiated emissions & Radiated Power (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Band Edge Measurements	±4.70dB
Peak to average ratio	±0.76dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

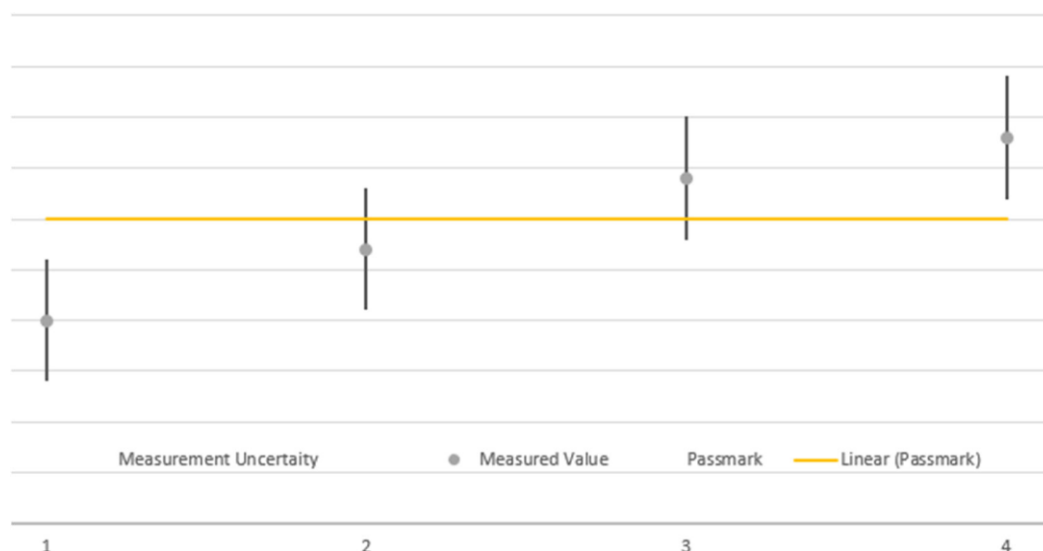

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.



**1.2 TEST SITE AND INSTRUMENTS**

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.29,24	Aug.28,26
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Pre-Amplifier	R&S	SCU08F1	101028	Sep.15,24	Sep.14,26
Vector Signal Generator	R&S	SMBV100B	102176	Mar.29,24	Mar.28,26
Signal Generator	R&S	SMB100A	182185	Mar.29,24	Mar.28,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESR26	101734	Mar.28,24	Mar.27,26
EMI TEST Receiver	R&S	ESW44	101973	Mar.28,24	Mar.27,26
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Dec.26,23	Dec.25,25
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.21,24	Aug.20,26
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Jul.15,24	Jul.14,26
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.21,24	Aug.20,26
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.22,24	Feb.21,26
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.19,24	Jun.18,26
Test Software	EMC32	EMC32	N/A	N/A	N/A
6DB attenuator	Tonscend Technology Co., Ltd	N/A	23062787	N/A	N/A
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	Oct.01,22	Sep.30,24
DC Source	HYELEC	HY3010B	551016	Aug.31,22	Aug.30,24
DC Source	HYELEC	HY3010B	551016	Aug.30,24	Aug.29,26
Hygrothermograph	DELI	20210528	SZ014	Sep.06,22	Sep.05,24
Hygrothermograph	DELI	20210528	SZ014	Sep.05,24	Sep.04,26
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.27,24	Apr.26,25
CABLE	R&S	W12.14	N/A	Apr.27,24	Apr.26,25
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Apr.27,24	Apr.26,25
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Apr.27,24	Apr.26,25
Temperature Chamber	votsch	VT4002	58566078100050	May.30,24	May.29,26





**BUREAU  
VERITAS**

**Test Report No.: PSU-NQN2405210111RF03**

- NOTE:** 1. The calibration interval of the above test instruments is 12/24/36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
  3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 434559; The Designation No. is CN1325.



## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT*</b>	Mobile Phone	
<b>BRAND NAME*</b>	HMD	
<b>MODEL NAME*</b>	TA-1681	
<b>NOMINAL VOLTAGE*</b>	5Vdc (Adapter) 3.8Vdc (Battery)	
<b>MODULATION TYPE*</b>	<b>GSM:</b> GMSK <b>WCDMA:</b> BPSK, QPSK <b>LTE Band 2:</b> QPSK, 16QAM	
<b>FREQUENCY RANGE</b>	<b>GSM/GPRS</b>	1850.2MHz ~ 1909.8MHz
	<b>WCDMA</b>	1852.4MHz ~ 1907.6MHz
	<b>LTE Band 2 Channel Bandwidth: 1.4MHz</b>	1850.7MHz ~ 1909.3MHz
	<b>LTE Band 2 Channel Bandwidth: 3MHz</b>	1851.5MHz ~ 1908.5MHz
	<b>LTE Band 2 Channel Bandwidth: 5MHz</b>	1852.5MHz ~ 1907.5MHz
	<b>LTE Band 2 Channel Bandwidth: 10MHz</b>	1855.0MHz ~ 1905.0MHz
	<b>LTE Band 2 Channel Bandwidth: 15MHz</b>	1857.5MHz ~ 1902.5MHz
	<b>LTE Band 2 Channel Bandwidth: 20MHz</b>	1860.0MHz ~ 1900.0MHz
	<b>MAX. EIRP POWER</b>	<b>GSM/GPRS</b>
<b>WCDMA</b>		113.24mW
<b>LTE Band 2 Channel Bandwidth: 1.4MHz</b>		115.35mW
<b>LTE Band 2 Channel Bandwidth: 3MHz</b>		116.14mW
<b>LTE Band 2 Channel Bandwidth: 5MHz</b>		115.88mW
<b>LTE Band 2 Channel Bandwidth: 10MHz</b>		115.08mW
<b>LTE Band 2 Channel Bandwidth: 15MHz</b>		114.55mW
<b>LTE Band 2 Channel Bandwidth: 20MHz</b>		116.14mW



<b>EMISSION DESIGNATOR</b>	<b>GSM</b>	245KGXW
	<b>GPRS</b>	245KGXW
	<b>WCDMA</b>	4M15F9W
	<b>LTE Band 2 Channel Bandwidth: 1.4MHz</b>	QPSK: 1M09G7D 16QAM: 1M09W7D
	<b>LTE Band 2 Channel Bandwidth: 3MHz</b>	QPSK: 2M70G7D 16QAM: 2M70W7D
	<b>LTE Band 2 Channel Bandwidth: 5MHz</b>	QPSK: 4M49G7D 16QAM: 4M49W7D
	<b>LTE Band 2 Channel Bandwidth: 10MHz</b>	QPSK: 8M97G7D 16QAM: 8M96W7D
	<b>LTE Band 2 Channel Bandwidth: 15MHz</b>	QPSK: 13M5G7D 16QAM: 13M5W7D
	<b>LTE Band 2 Channel Bandwidth: 20MHz</b>	QPSK: 17M9G7D 16QAM: 18M0W7D
	<b>ANTENNA TYPE*</b>	PIFA Antenna with -1.3dBi gain for WCDMA II/LTE B2
<b>HW VERSION*</b>	FF618-MB-V3.0	
<b>SW VERSION*</b>	MOCOR_20A_MP_W22.04.6_P5	
<b>I/O PORTS*</b>	Refer to user's manual	
<b>CABLE SUPPLIED*</b>	USB cable: non-shielded cable, with w/o ferrite core, 1.0 meter	
<b>EXTREME TEMPERATURE*</b>	-10-55 °C	
<b>EXTREME VOLTAGE*</b>	3.35V – 4.35V	

**NOTE:**

1. \*Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information , Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.



3. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and two receivers.

<b>MODULATION MODE</b>	<b>TX FUNCTION</b>
<b>GSM/GPRS/EDGE</b>	1TX/2RX
<b>WCDMA</b>	1TX/2RX
<b>LTE</b>	1TX/2RX

4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.





**5. List of Accessory:**

<b>ACCESSORIES</b>	<b>BRAND</b>	<b>MANUFACTURER</b>	<b>MODEL</b>	<b>SPECIFICATION</b>
USB Cable	HMD	Huizhou Juwei Electronics Co., Ltd.	JWUB1801-W27H	USB 2.0
Battery	HMD	HuNan ADF Alternative Energy Technology Co., Ltd	BL-L4E	3.8V, Rated Capacity: 1450mAh, 5.51Wh Typical Capacity: 1500mAh, 5.7Wh



## 2.2 CONFIGURATION OF SYSTEM UNDER TEST

### FOR RADIATION EMISSION TEST

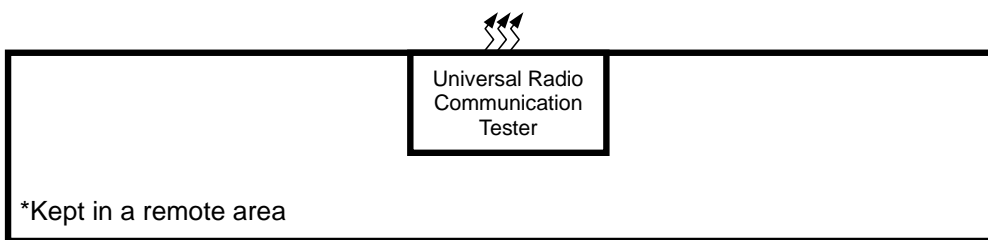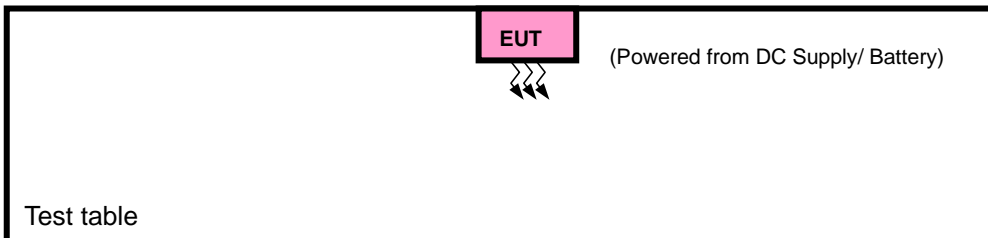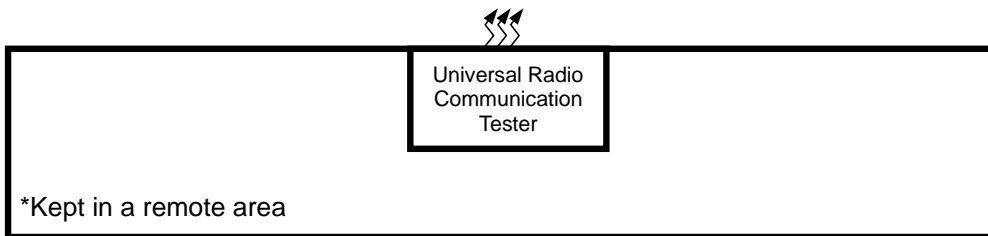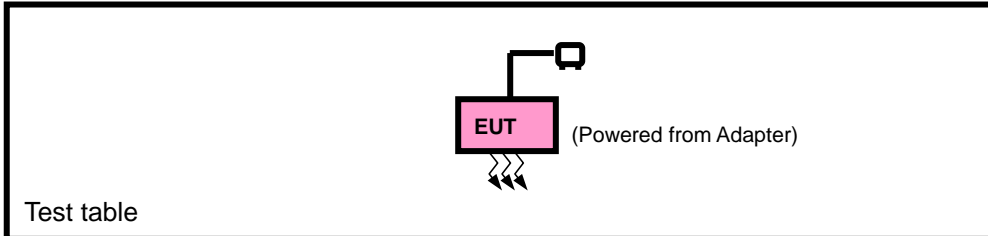



### 2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Adapter	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	USB Line: Shielded, Detachable 1m;

### 2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in EIRP and radiated emission was found when positioned on X-plane for GSM/EDGE/ LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter with GSM or WCDMA or LTE link
B	EUT + Battery /DC Supply with GSM or WCDMA or LTE link

#### GSM MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	EIRP	512 to 810	512, 661, 810	GSM
B	FREQUENCY STABILITY	512 to 810	512, 661, 810	GSM
A	OCCUPIED BANDWIDTH	512 to 810	512, 661, 810	GSM
A	PEAK TO AVERAGE RATIO	512 to 810	512, 661, 810	GSM
A	BAND EDGE	512 to 810	512, 810	GSM
A	CONDCUDED EMISSION	512 to 810	512, 661, 810	GSM
A	RADIATED EMISSION	512 to 810	512, 661, 810	GSM



**WCDMA**

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
B	FREQUENCY STABILITY	9262 to 9538	9262, 9400, 9538	WCDMA
A	OCCUPIED BANDWIDTH	9262 to 9538	9262, 9400, 9538	WCDMA
A	PEAK TO AVERAGE RATIO	9262 to 9538	9262, 9400, 9538	WCDMA
A	BAND EDGE	9262 to 9538	9262, 9538	WCDMA
A	CONDCUDED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA
A	RADIATED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA

**LTE BAND 2 MODE**

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM,	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset
A	FREQUENCY STABILITY	18607 to 19193	18607, 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 19185	3MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 19175	5MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18650, 19150	10MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 19125	15MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 19100	20MHz	QPSK	1 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	6 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	6 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	6 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	6 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	6 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset



A	BAND EDGE	18607 to 19193	18607	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset		
			19193	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset		
		18615 to 19185	18615	3MHz	QPSK,16QAM	1 RB / 5 RB Offset		
			19185	3MHz	QPSK,16QAM	6 RB / 0 RB Offset		
		18625 to 19175	18625	5MHz	QPSK,16QAM	1 RB / 0 RB Offset		
			19175	5MHz	QPSK,16QAM	6 RB / 0 RB Offset		
		18650 to 19150	18650	10MHz	QPSK,16QAM	1 RB / 5 RB Offset		
			19150	10MHz	QPSK,16QAM	6 RB / 0 RB Offset		
		18675 to 19125	18675	15MHz	QPSK,16QAM	1 RB / 0 RB Offset		
			19125	15MHz	QPSK,16QAM	6 RB / 0 RB Offset		
		18700 to 19100	18700	20MHz	QPSK,16QAM	1 RB / 0 RB Offset		
			19100	20MHz	QPSK,16QAM	6 RB / 0 RB Offset		
		A	CONDUCTED EMISSION	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
				18615 to 19185	18615, 18900, 19185	3MHz	QPSK	1 RB / 0 RB Offset
				18625 to 19175	18625, 18900, 19175	5MHz	QPSK	1 RB / 0 RB Offset
				18650 to 19150	18650, 18900, 19150	10MHz	QPSK	1 RB / 0 RB Offset
18675 to 19125	18675, 18900, 19125			15MHz	QPSK	1 RB / 0 RB Offset		
18700 to 19100	18700, 18900, 19100			20MHz	QPSK	1 RB / 0 RB Offset		
A	RADIATED EMISSION	18607 to 19193	18900	1.4MHz	QPSK	1 RB / 0 RB Offset		
		18615 to 19185	18900	3MHz	QPSK	1 RB / 0 RB Offset		
		18625 to 19175	18900	5MHz	QPSK	1 RB / 0 RB Offset		
		18650 to 19150	18900	10MHz	QPSK	1 RB / 0 RB Offset		
		18675 to 19125	18900	15MHz	QPSK	1 RB / 0 RB Offset		
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK	1 RB / 0 RB Offset		

**Note:** 1.This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.





**TEST CONDITION:**

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	23deg. C, 70%RH	DC 5V By Adapter	Hanwen Xu
FREQUENCY STABILITY	23deg. C, 70%RH	DC 3.35V/ 3.8V/ 4.35V By DC Source	Hanwen Xu
OCCUPIED BANDWIDTH	23deg. C, 70%RH	DC 5V By Adapter	Hanwen Xu
BAND EDGE	23deg. C, 70%RH	DC 5V By Adapter	Hanwen Xu
CONDCUDED EMISSION	23deg. C, 70%RH	DC 5V By Adapter	Hanwen Xu
RADIATED EMISSION	23deg. C, 70%RH	DC 5V By Adapter	Hanwen Xu
PEAK TO AVERAGE RATIO	23deg. C, 70%RH	DC 5V By Adapter	Hanwen Xu

**2.5 EUT OPERATING CONDITIONS**

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

**2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**ANSI/TIA/EIA-603-D**

**ANSI/TIA/EIA-603-E**

**ANSI C63.26-2015**

**NOTE:** All test items have been performed and recorded as per the above standards.

## 3 TEST TYPES AND RESULTS

### 3.1 OUTPUT POWER MEASUREMENT

#### 3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP.

#### 3.1.2 TEST PROCEDURES

##### **EIRP MEASUREMENT:**

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as  $P_{\text{Meas}}$ , typically dBW or dBm);

$P_{\text{Meas}}$  = measured transmitter output power or PSD, in dBm or dBW;

$G_{\text{T}}$  = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

$L_{\text{C}}$  = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

##### **CONDUCTED POWER MEASUREMENT:**


The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



### 3.1.3 TEST SETUP

**EIRP / ERP Measurement:**

**CONDUCTED POWER MEASUREMENT:**

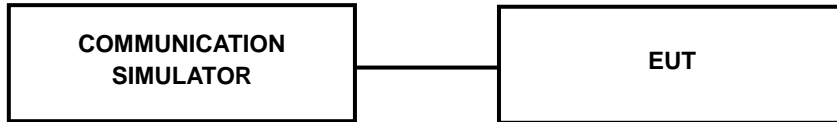

### 3.1.4 TEST RESULTS

**CONDUCTED OUTPUT POWER (dBm) :**

Band	GSM1900		
	512	661	810
Channel	512	661	810
Frequency	1850.2	1880	1909.8
GSM	29.68	29.82	29.73
GPRS 1Tx Slot	29.67	29.81	29.72
GPRS 2Tx Slot	27.65	27.54	27.27
GPRS 3Tx Slot	26.05	26.01	25.68
GPRS 4Tx Slot	23.96	23.84	23.52

Band	WCDMA II		
	9262	9400	9538
TX Channel	9262	9400	9538
Rx Channel	9662	9800	9938
Frequency	1852.4	1880	1907.6
RMC 12.2K	21.77	21.75	21.84
HSDPA Subtest-1	20.73	20.81	20.79
HSDPA Subtest-2	20.74	20.78	20.75
HSDPA Subtest-3	20.28	20.31	20.28
HSDPA Subtest-4	20.23	20.32	20.26
HSUPA Subtest-1	20.78	20.81	20.85
HSUPA Subtest-2	18.81	18.88	18.86
HSUPA Subtest-3	19.83	19.85	19.84
HSUPA Subtest-4	18.81	18.85	18.87
HSUPA Subtest-5	20.75	20.73	20.79



**LTE BAND 2**

Band/BW	Modulation	RB Size	RB Offset	Low CH 18607	Mid CH 18900	High CH 19193
				Frequency 1850.7 MHz	Frequency 1880 MHz	Frequency 1909.3 MHz
2/ 1.4	QPSK	1	0	21.92	21.85	21.86
		1	2	21.67	21.74	21.79
		1	5	21.72	21.75	21.81
		3	0	21.66	21.59	21.57
		3	1	21.65	21.73	21.70
		3	3	21.64	21.61	21.66
		6	0	21.17	21.22	21.20
	16QAM	1	0	20.98	20.98	20.86
		1	2	20.82	20.83	20.80
		1	5	20.88	20.85	20.82
		3	0	20.87	20.96	20.77
		3	1	20.72	20.79	20.73
		3	3	20.78	20.79	20.67
		6	0	20.20	20.31	20.28

Band/BW	Modulation	RB Size	RB Offset	Low CH 18615	Mid CH 18900	High CH 19185
				Frequency 1851.5 MHz	Frequency 1880 MHz	Frequency 1908.5 MHz
2/ 3	QPSK	1	0	21.88	21.95	21.84
		1	7	21.66	21.70	21.74
		1	14	21.81	21.73	21.83
		8	0	21.14	21.12	21.07
		8	3	21.14	21.24	21.23
		8	7	21.17	21.14	21.08
		15	0	21.20	21.22	21.18
	16QAM	1	0	20.95	21.02	20.93
		1	7	20.83	20.84	20.81
		1	14	20.87	20.93	20.88
		8	0	20.43	20.41	20.26
		8	3	20.29	20.30	20.26
		8	7	20.27	20.23	20.24
		15	0	20.23	20.31	20.26



Band/BW	Modulation	RB Size	RB Offset	Low CH 18625	Mid CH 18900	High CH 19175
				Frequency 1852.5 MHz	Frequency 1880 MHz	Frequency 1907.5 MHz
2/ 5	QPSK	1	0	21.87	21.94	21.80
		1	12	21.76	21.73	21.81
		1	24	21.73	21.75	21.81
		12	0	21.11	21.08	21.02
		12	6	21.08	21.16	21.19
		12	13	21.14	21.10	21.15
		25	0	21.25	21.27	21.23
	16QAM	1	0	20.94	21.01	20.94
		1	12	20.81	20.83	20.82
		1	24	20.88	20.84	20.83
		12	0	20.40	20.45	20.29
		12	6	20.26	20.32	20.26
		12	13	20.28	20.22	20.19
		25	0	20.18	20.26	20.22

Band/BW	Modulation	RB Size	RB Offset	Low CH 18650	Mid CH 18900	High CH 19150
				Frequency 1855 MHz	Frequency 1880 MHz	Frequency 1905 MHz
2/ 10	QPSK	1	0	21.84	21.91	21.88
		1	24	21.70	21.78	21.74
		1	49	21.72	21.70	21.82
		25	0	21.09	21.13	21.07
		25	12	21.18	21.18	21.18
		25	25	21.11	21.16	21.12
		50	0	21.20	21.24	21.15
	16QAM	1	0	20.92	20.93	20.93
		1	24	20.90	20.89	20.87
		1	49	20.87	20.86	20.82
		25	0	20.38	20.38	20.30
		25	12	20.20	20.38	20.26
		25	25	20.25	20.23	20.23
		50	0	20.21	20.25	20.21



Band/BW	Modulation	RB Size	RB Offset	Low CH 18675	Mid CH 18900	High CH 19125
				Frequency 1857.5 MHz	Frequency 1880 MHz	Frequency 1902.5 MHz
2/ 15	QPSK	1	0	21.88	21.85	21.89
		1	37	21.66	21.71	21.77
		1	74	21.82	21.72	21.74
		36	0	21.10	21.12	21.02
		36	19	21.18	21.23	21.21
		36	39	21.08	21.17	21.10
		75	0	21.18	21.28	21.21
	16QAM	1	0	20.92	20.95	20.89
		1	37	20.80	20.86	20.85
		1	74	20.85	20.91	20.82
		36	0	20.44	20.46	20.26
		36	19	20.21	20.36	20.28
		36	39	20.23	20.23	20.19
		75	0	20.14	20.29	20.26

Band/BW	Modulation	RB Size	RB Offset	Low CH 18700	Mid CH 18900	High CH 19100
				Frequency 1860 MHz	Frequency 1880 MHz	Frequency 1900 MHz
2/ 20	QPSK	1	0	21.93	<b>21.95</b>	21.89
		1	50	21.76	21.80	21.82
		1	99	21.82	21.80	21.83
		50	0	21.17	21.14	21.09
		50	25	21.18	21.25	21.23
		50	50	21.17	21.20	21.16
		100	0	21.25	21.31	21.23
	16QAM	1	0	21.00	21.03	20.94
		1	50	20.90	20.93	20.89
		1	99	20.95	20.93	20.90
		50	0	20.45	20.47	20.35
		50	25	20.30	20.38	20.28
		50	50	20.29	20.29	20.24
		100	0	20.24	20.32	20.29



**BUREAU  
VERITAS**

Test Report No.: PSU-NQN2405210111RF03

**EIRP POWER (dBm)**

**GSM 1900**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	29.68	-1.3	28.38	688.65	2
661	1880	29.82	-1.3	28.52	711.21	2
810	1909.8	29.73	-1.3	28.43	696.63	2

**WCDMA II**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
9262	1852.4	21.77	-1.3	20.47	111.43	2
9400	1880	21.75	-1.3	20.45	110.92	2
9538	1907.6	21.84	-1.3	20.54	113.24	2



LTE BAND 2

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-LC</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	21.92	-1.3	20.62	115.35	2
18900	1880.0	21.85	-1.3	20.55	113.5	2
19193	1909.3	21.86	-1.3	20.56	113.76	2

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-LC</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	20.98	-1.3	19.68	92.9	2
18900	1880.0	20.98	-1.3	19.68	92.9	2
19193	1909.3	20.86	-1.3	19.56	90.36	2

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-LC</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	21.88	-1.3	20.58	114.29	2
18900	1880	21.95	-1.3	20.65	116.14	2
19185	1908.5	21.84	-1.3	20.54	113.24	2

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T-LC</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	20.95	-1.3	19.65	92.26	2
18900	1880	21.02	-1.3	19.72	93.76	2
19185	1908.5	20.93	-1.3	19.63	91.83	2





**BUREAU  
VERITAS**

Test Report No.: PSU-NQN2405210111RF03

**CHANNEL BANDWIDTH: 5MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	21.87	-1.3	20.57	114.02	2
18900	1880	21.94	-1.3	20.64	115.88	2
19175	1907.5	21.81	-1.3	20.51	112.46	2

**CHANNEL BANDWIDTH: 5MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	20.94	-1.3	19.64	92.04	2
18900	1880	21.01	-1.3	19.71	93.54	2
19175	1907.5	20.94	-1.3	19.64	92.04	2

**CHANNEL BANDWIDTH: 10MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855	21.84	-1.3	20.54	113.24	2
18900	1880	21.91	-1.3	20.61	115.08	2
19150	1905	21.88	-1.3	20.58	114.29	2

**CHANNEL BANDWIDTH: 10MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855	20.92	-1.3	19.62	91.62	2
18900	1880	20.93	-1.3	19.63	91.83	2
19150	1905	20.93	-1.3	19.63	91.83	2



**CHANNEL BANDWIDTH: 15MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	21.88	-1.3	20.58	114.29	2
18900	1880	21.85	-1.3	20.55	113.5	2
19125	1902.5	21.89	-1.3	20.59	114.55	2

**CHANNEL BANDWIDTH: 15MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	20.92	-1.3	19.62	91.62	2
18900	1880	20.95	-1.3	19.65	92.26	2
19125	1902.5	20.89	-1.3	19.59	90.99	2

**CHANNEL BANDWIDTH: 20MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	21.93	-1.3	20.63	115.61	2
18900	1880	21.95	-1.3	20.65	116.14	2
19100	1900	21.89	-1.3	20.59	114.55	2

**CHANNEL BANDWIDTH: 20MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	21	-1.3	19.7	93.33	2
18900	1880	21.03	-1.3	19.73	93.97	2
19100	1900	20.94	-1.3	19.64	92.04	2

**REMARKS:** ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



### 3.2 FREQUENCY STABILITY MEASUREMENT

#### 3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

#### 3.2.2 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

#### 3.2.3 TEST SETUP

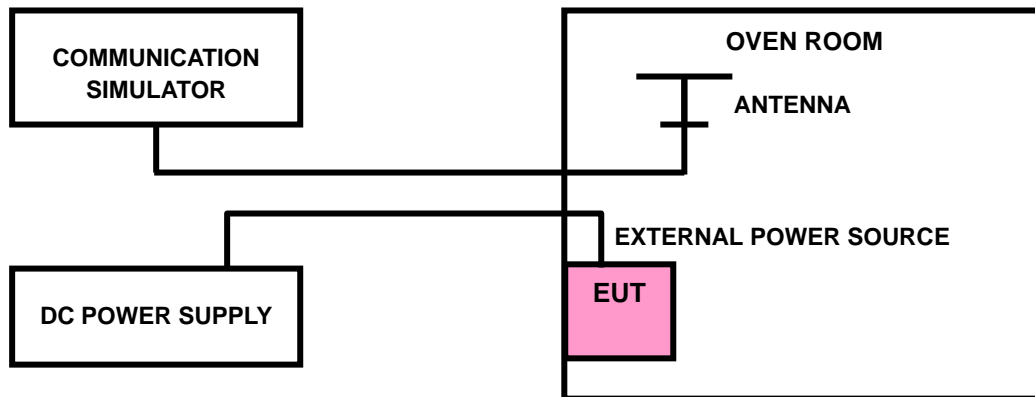



**BUREAU  
VERITAS**

**Test Report No.: PSU-NQN2405210111RF03**

### 3.2.4 TEST RESULTS

Please Refer to Appendix Of this test report.

- Note: 1.VL = Low voltage(3.35V); VN/NV = Normal voltage(3.8V); VH = High voltage(4.35V);  
NT = Normal temperature (25°C)  
2. The frequency fundamental emissions stay within the authorized frequency block.




### 3.3 OCCUPIED BANDWIDTH MEASUREMENT

#### 3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

#### 3.3.2 TEST SETUP

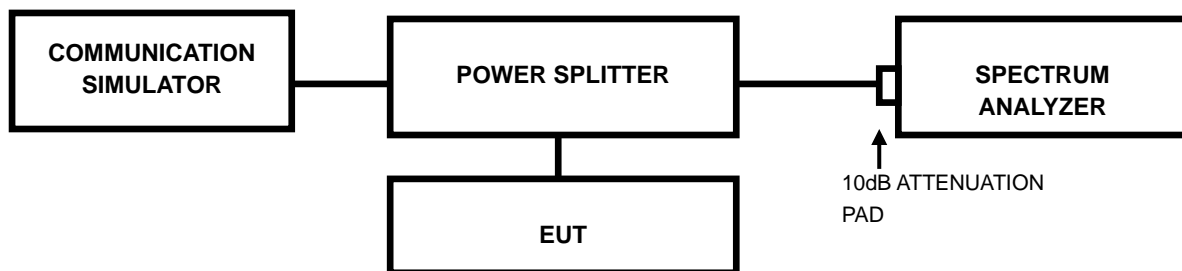

#### 3.3.3 TEST PROCEDURES

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.



Test Report No.: PSU-NQN2405210111RF03

### 3.3.4 TEST RESULTS

Please Refer to Appendix Of this test report.




### 3.4 BAND EDGE MEASUREMENTC

#### 3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

#### 3.4.2 TEST SETUP

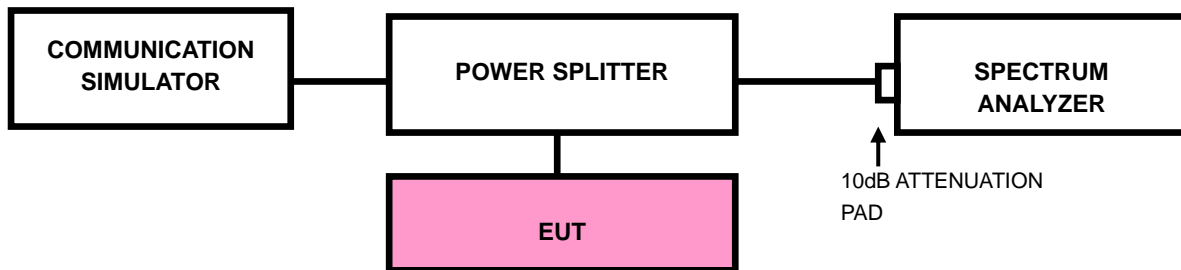

### 3.4.3 TEST PROCEDURES

- a) All measurements were done at low and high operational frequency range
- b) Connect the transmitter to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
- c) Tune the analyzer to the nominal center frequency of the emission bandwidth (EBW)
- d) .Set the resolution bandwidth (RBW)  $\geq 1\%$  EBW in the 1MHz band immediately outside and adjacent to the band edge.
- e) Beyond the 1MHz band from the band edge, RBW=1MHz was used.
- f) Set the video bandwidth (VBW) to  $\geq 3 \times$  RBW.
- g) Select the average power (RMS) display detector.
- h) Set the number of measurement points to  $\geq 1001$ .
- i) Use auto-coupled sweep time.
- j) Perform the measurement over an interval of time when the transmission is continuous and at its maximum power level.
- k) The RF fundamental frequency should be excluded against the limit line in the operating frequency band and use RBW is 10KHz or 100KHz.
- l) Record the max trace plot into the test report.





**BUREAU  
VERITAS**

**Test Report No.: PSU-NQN2405210111RF03**

### 3.4.4. TEST RESULTS

Please Refer to Appendix Of this test report.



### 3.5 CONDUCTED SPURIOUS EMISSIONS


#### 3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

#### 3.5.2 TEST PROCEDURE

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 30MHz up to a frequency including its 10<sup>th</sup> harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

#### 3.5.3 TEST SETUP

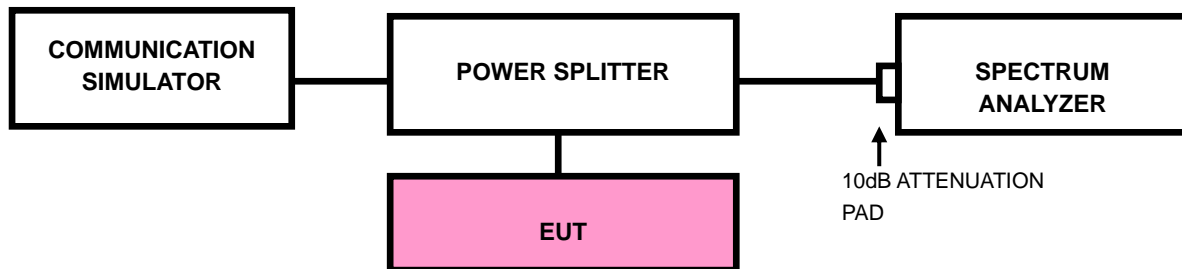



**BUREAU  
VERITAS**

**Test Report No.: PSU-NQN2405210111RF03**

### 3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Appendix Of this test report.



### 3.6 RADIATED EMISSION MEASUREMENT

#### 3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

#### 3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step a. Record the power level of S.G
- c.  $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ .

**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.


#### 3.6.3 DEVIATION FROM TEST STANDARD

No deviation




### 3.6.4 TEST SETUP

#### < Frequency Range below 30MHz >

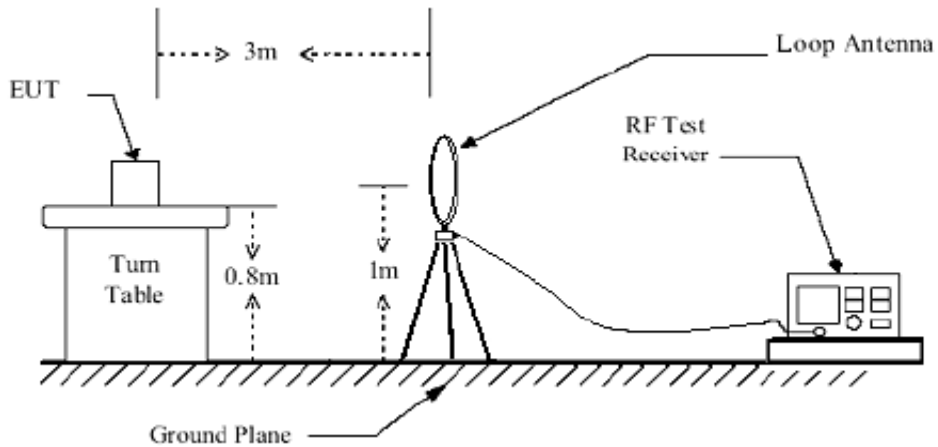


#### < Frequency Range 30MHz~1GHz >

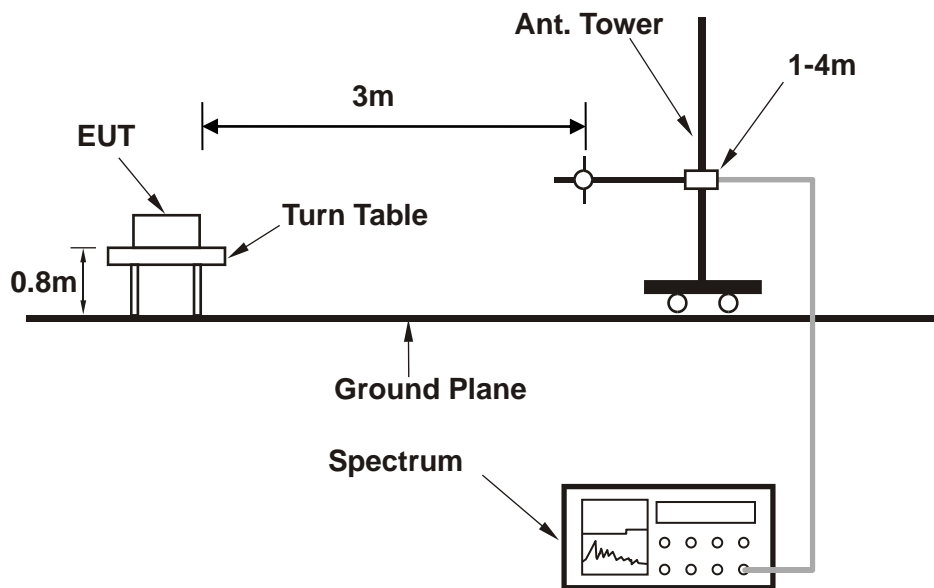



<Frequency Range above 1GHz>

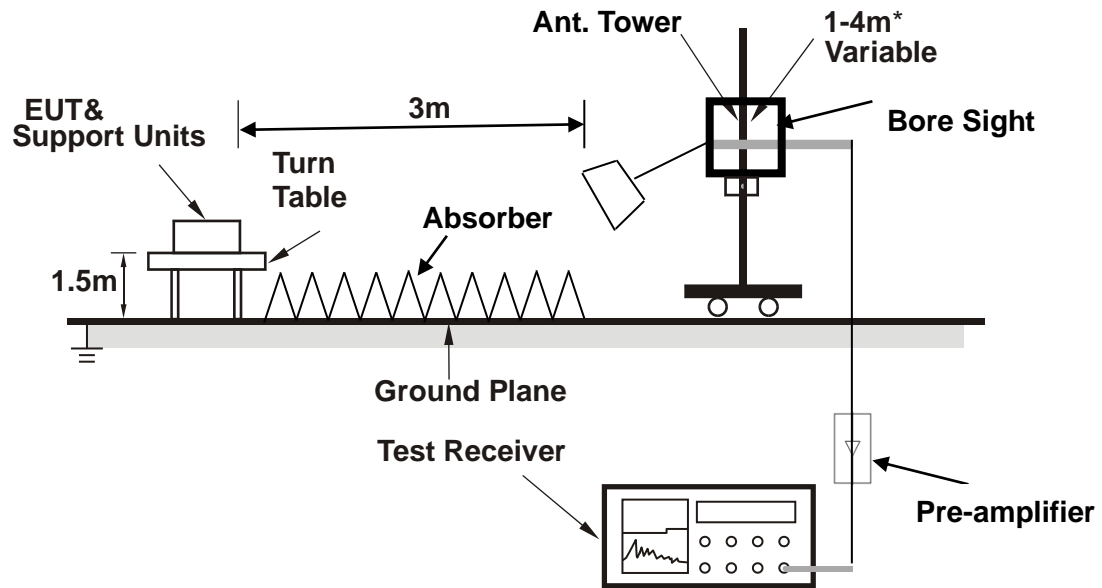

**Note:** Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



**3.6.5 TEST RESULTS**

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

**BELOW 1GHz WORST-CASE DATA**

**30 MHz – 1GHz data:**


**LTE Band 2:**

**CHANNEL BANDWIDTH:**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	51.292	-55.83	-13.0	42.83	9.91	H	359.0	1.0
1	90.674	-65.05	-13.0	52.05	4.33	H	1.1	2.0
1	123.702	-66.93	-13.0	53.93	4.39	H	1.0	2.0
1	180.884	-68.07	-13.0	55.07	3.86	H	46.1	1.0
1	473.775	-61.81	-13.0	48.81	11.39	H	1.0	2.0
1	753.669	-57.32	-13.0	44.32	17.43	H	56.9	2.0

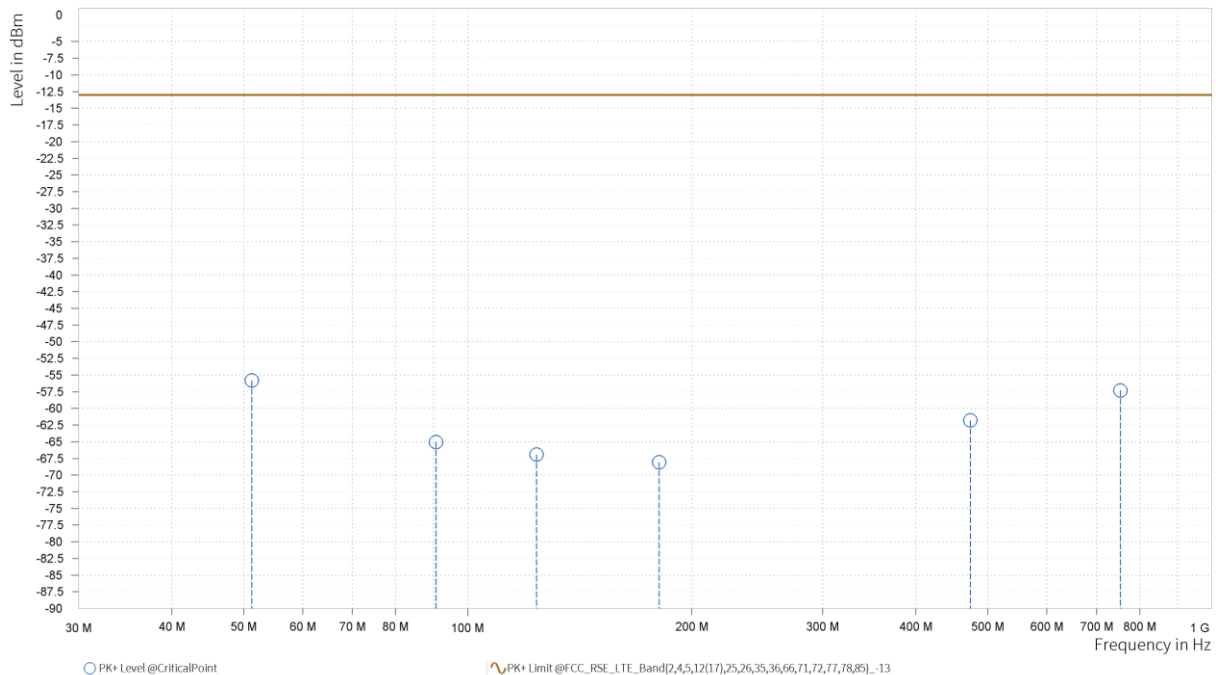




BUREAU  
VERITAS

Test Report No.: PSU-NQN2405210111RF03

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	52.601	-56.67	-13.0	43.67	10.15	V	359.1	1.0
1	90.528	-62.59	-13.0	49.59	7.24	V	108.4	2.0
1	155.712	-68.11	-13.0	55.11	4.44	V	355.6	2.0
1	336.375	-65.62	-13.0	52.62	9.22	V	261.4	2.0
1	598.226	-63.25	-13.0	50.25	14.04	V	314.0	2.0
1	898.49	-55.34	-13.0	42.34	19.26	V	358.3	1.0

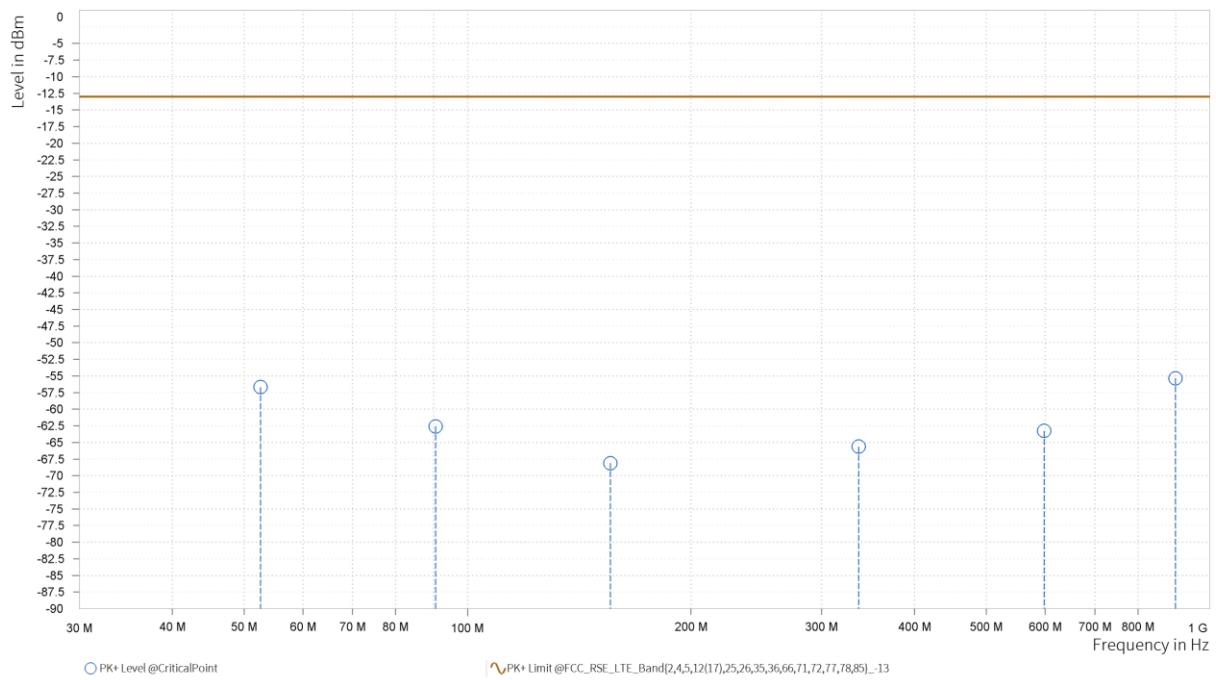





**BUREAU  
VERITAS**

**Test Report No.: PSU-NQN2405210111RF03**

**ABOVE 1GHz DATA**

**Note:** For higher frequency, the emission is too low to be detected.

**WORST-CASE DATA**


**PCS 1900:**

**CH 512**

<b>MODE</b>	TX channel 512	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,700.400	-49.6	-13.0	36.6	20.98	H	116.9	2.0
4	5,550.600	-49.75	-13.0	36.75	23.76	H	1.0	1.0

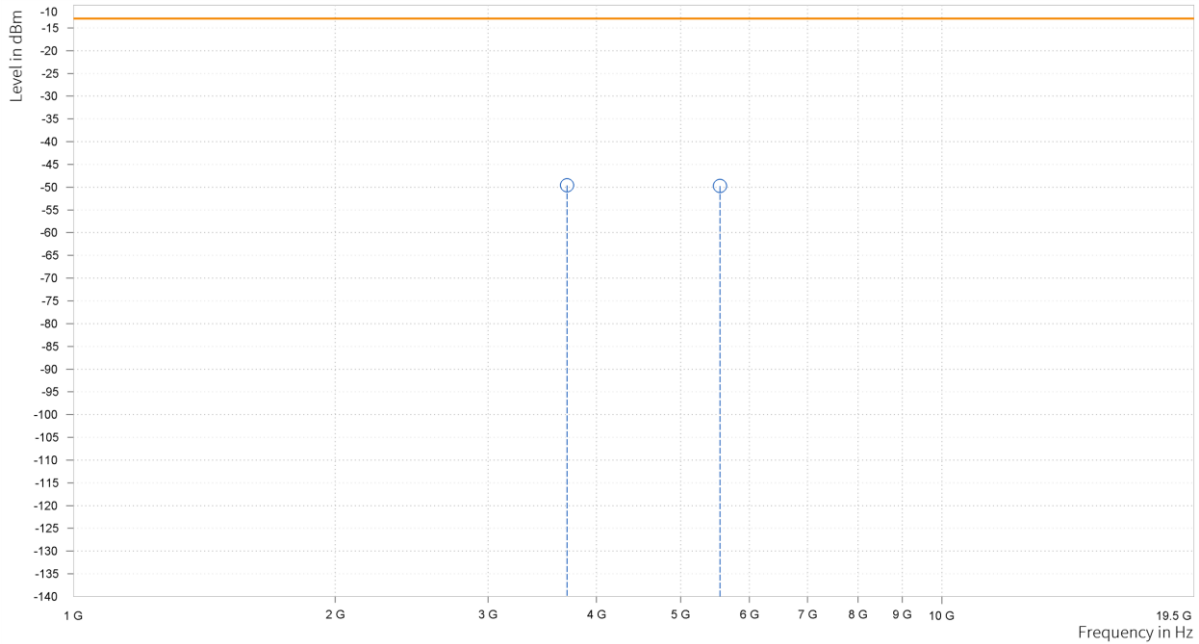




**BUREAU  
VERITAS**

**Test Report No.: PSU-NQN2405210111RF03**

<b>MODE</b>	TX channel 512	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,700.400	-51.76	-13.0	38.76	21.57	V	240.8	1.0
4	5,550.600	-48.58	-13.0	35.58	24.45	V	359.1	1.0

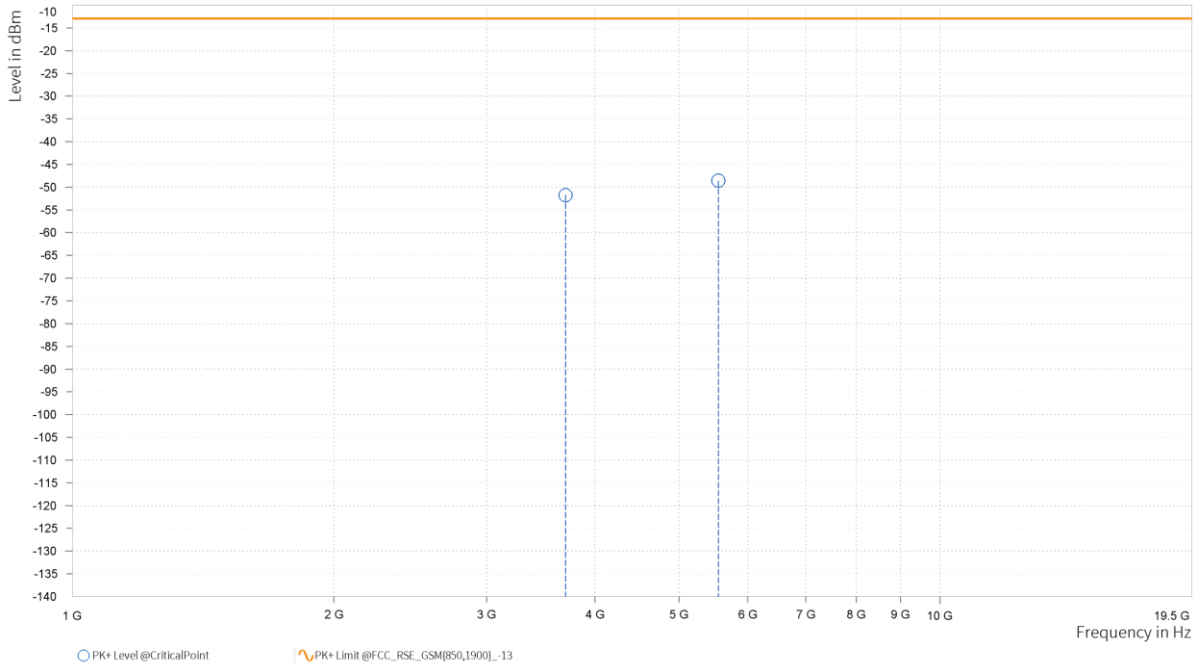



**BUREAU  
VERITAS**


Test Report No.: PSU-NQN2405210111RF03

**CH 661**

<b>MODE</b>	TX channel 661	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,760.000	-50.66	-13.0	37.66	21.19	H	119.2	2.0
4	5,640.000	-48.42	-13.0	35.42	24.12	H	241.9	1.0

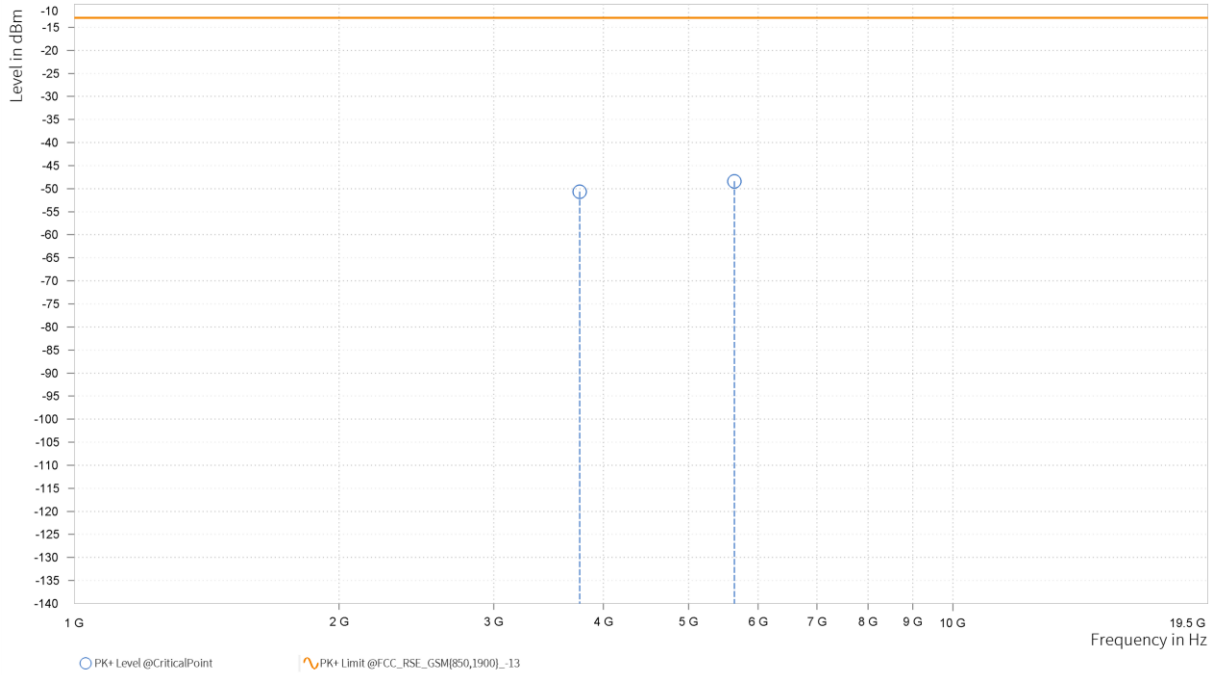




**BUREAU  
VERITAS**

Test Report No.: PSU-NQN2405210111RF03

<b>MODE</b>	TX channel 661	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,760.000	-49.88	-13.0	36.88	21.68	V	1	1.0
4	5,640.000	-47.76	-13.0	34.76	24.46	V	1	1.0

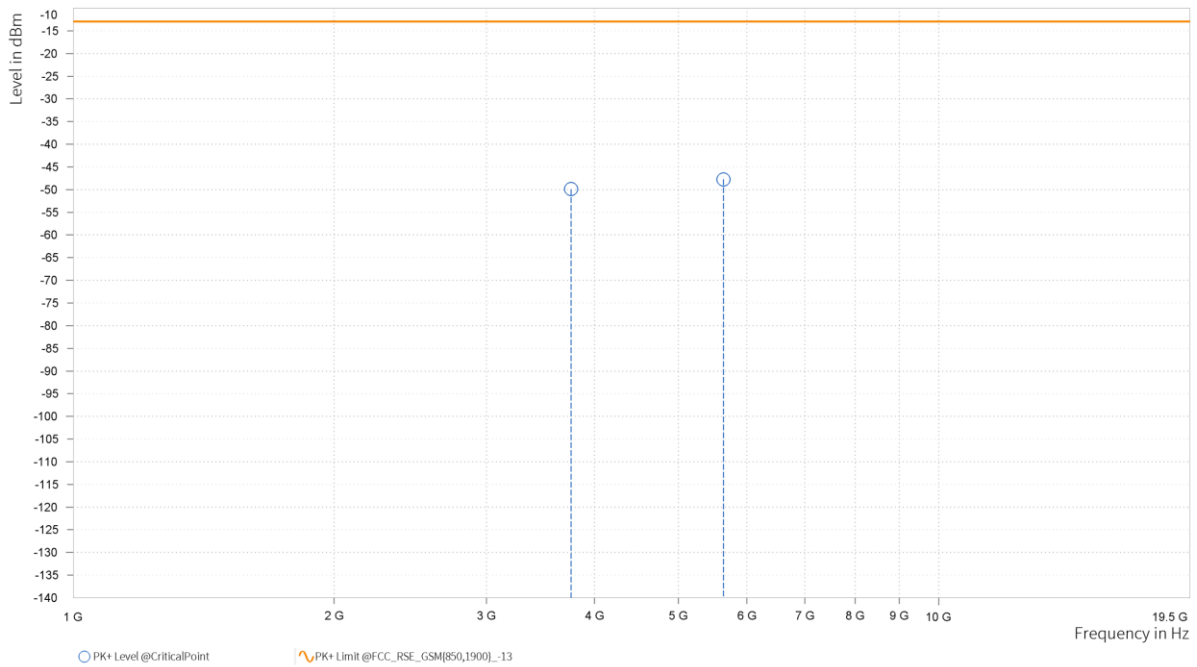



BUREAU  
VERITAS


Test Report No.: PSU-NQN2405210111RF03

CH 810

<b>MODE</b>	TX channel 810	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,819.600	-50.06	-13.0	37.06	21.85	H	1	1.0
4	5,729.400	-47.42	-13.0	34.42	24.45	H	359	1.0

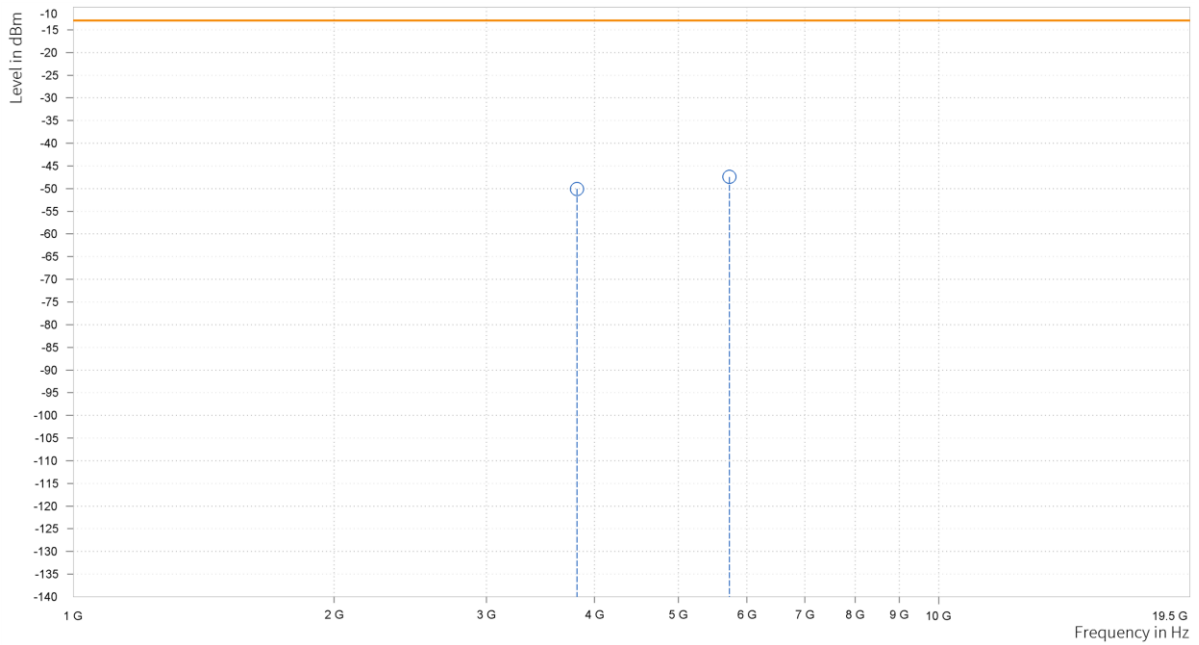




**BUREAU  
VERITAS**

Test Report No.: PSU-NQN2405210111RF03

<b>MODE</b>	TX channel 810	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,819.600	-49.66	-13.0	36.66	22.2	V	1.0	2.0
4	5,729.400	-48.49	-13.0	35.49	24.92	V	359.1	1.0

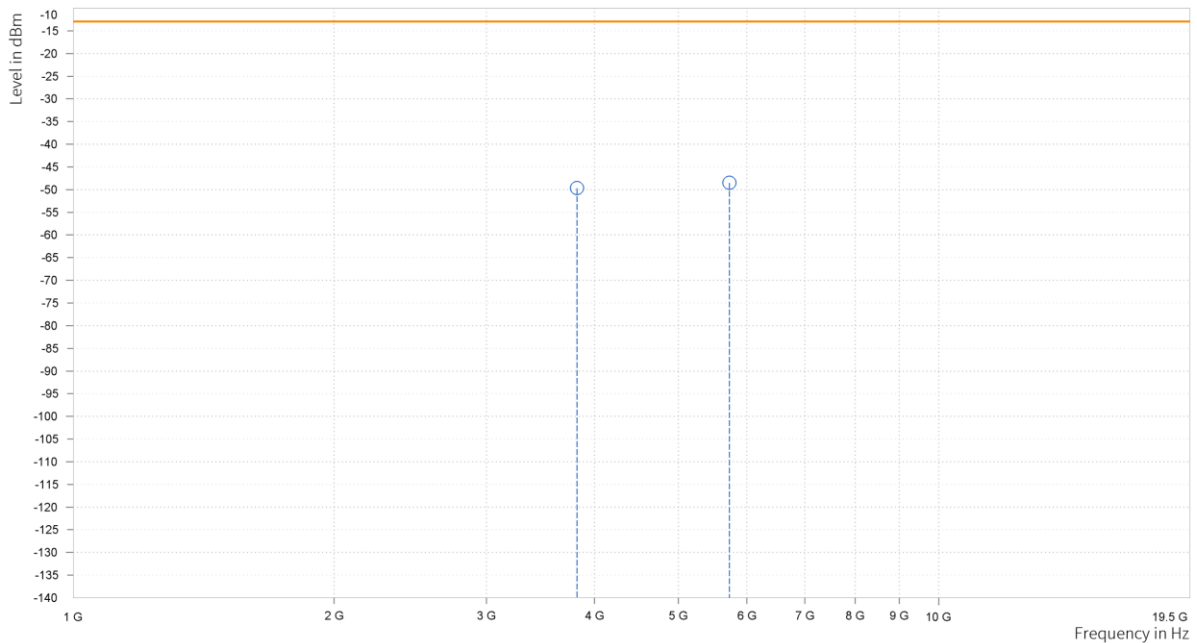



BUREAU  
VERITAS

Test Report No.: PSU-NQN2405210111RF03


WCDMA Band II

CH 9262

<b>MODE</b>	TX channel 9262	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,704.800	-44.59	-13.0	31.59	27.18	H	122.6	2.0
4	5,557.200	-43.62	-13.0	30.62	31.3	H	359.0	1.0

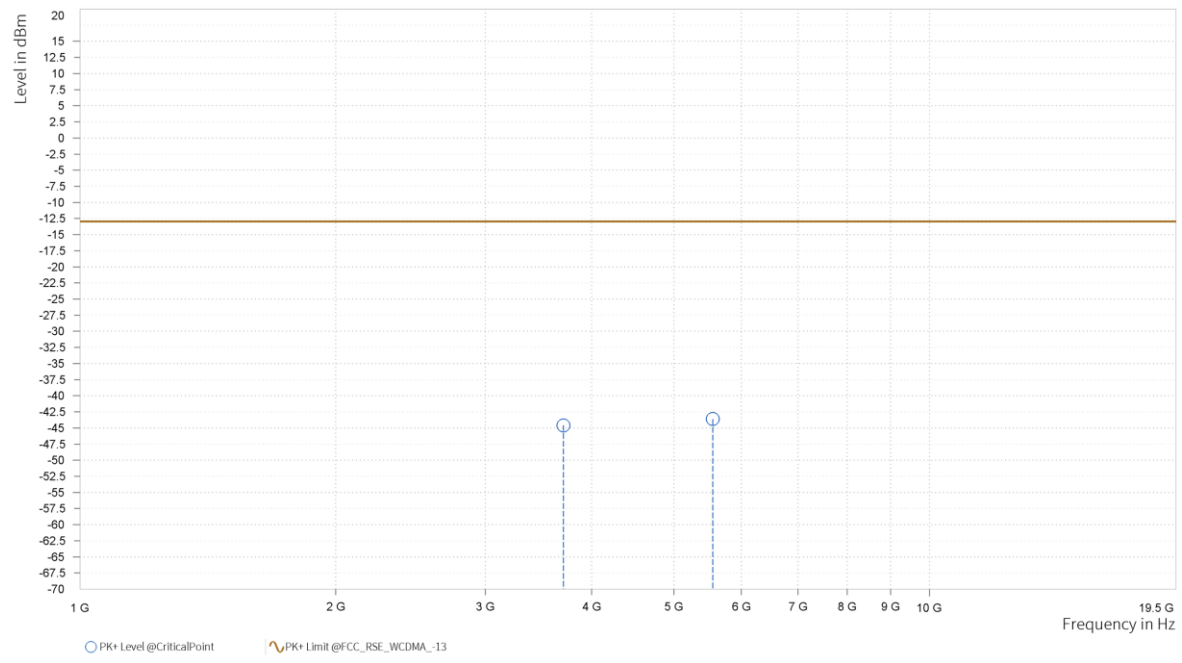




**BUREAU  
VERITAS**

**Test Report No.: PSU-NQN2405210111RF03**

<b>MODE</b>	TX channel 9262	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,704.800	-45.5	-13.0	32.5	26.98	V	1	2.0
4	5,557.200	-43.35	-13.0	30.35	31.04	V	1	1.0

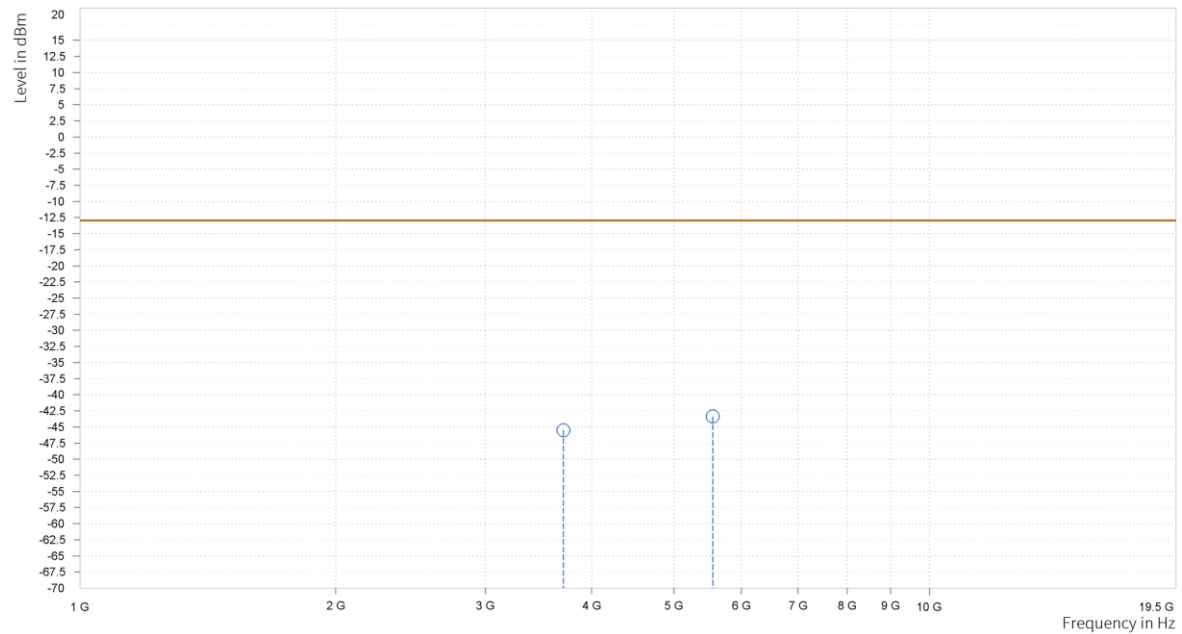





**BUREAU  
VERITAS**


Test Report No.: PSU-NQN2405210111RF03

**CH 9400**

<b>MODE</b>	TX channel 9400	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,760.000	-45.91	-13.0	32.91	27.64	H	1	1.0
4	5,640.000	-42.19	-13.0	29.19	31.89	H	1	1.0

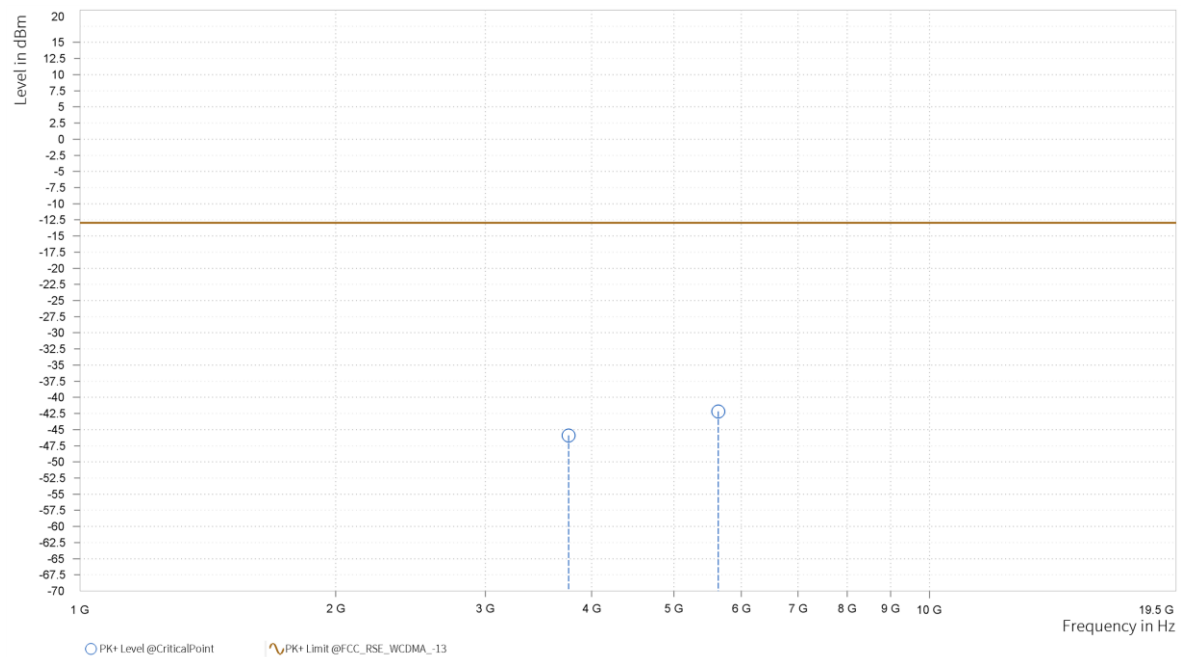




**BUREAU  
VERITAS**

**Test Report No.: PSU-NQN2405210111RF03**

<b>MODE</b>	TX channel 9400	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,760.000	-46.24	-13.0	33.24	27.33	V	101.3	2.0
4	5,640.000	-44.04	-13.0	31.04	31.62	V	359.0	2.0

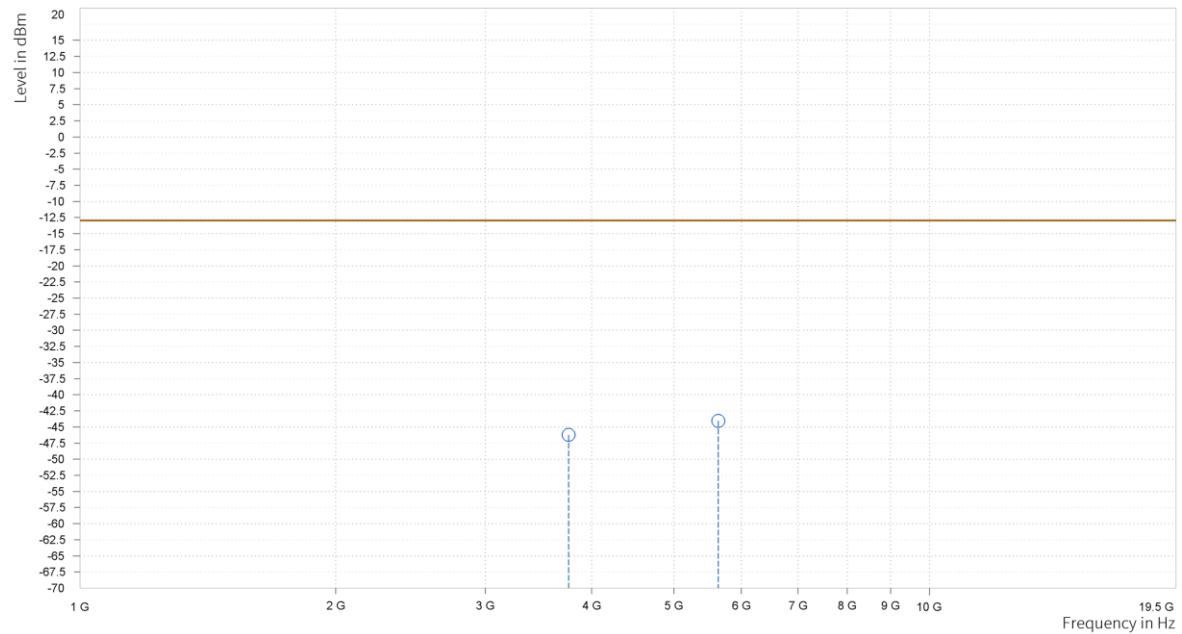

○ PK+ Level @CriticalPoint      ▽ PK+ Limit @FCC\_RSE\_WCDMA\_13



**BUREAU  
VERITAS**


Test Report No.: PSU-NQN2405210111RF03

CH 9538

<b>MODE</b>	TX channel 9538	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,815.200	-42.96	-13.0	29.96	27.91	H	359	1.0
4	5,722.800	-41.37	-13.0	28.37	33.99	H	1	1.0

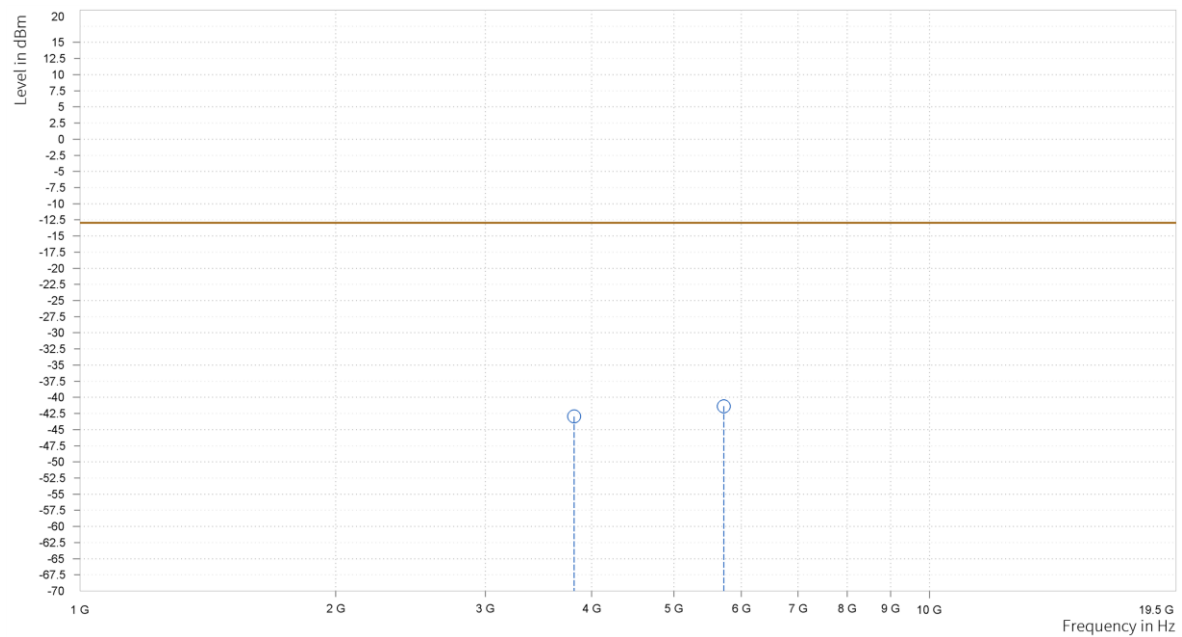

○ PK+ Level @CriticalPoint      ▽ PK+ Limit @FCC\_RSE\_WCDMA\_13




**BUREAU  
VERITAS**

**Test Report No.: PSU-NQN2405210111RF03**

<b>MODE</b>	TX channel 9538	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,815.200	-43.17	-13.0	30.17	27.62	V	1	1.0
4	5,722.800	-41.14	-13.0	28.14	33.73	V	359	2.0

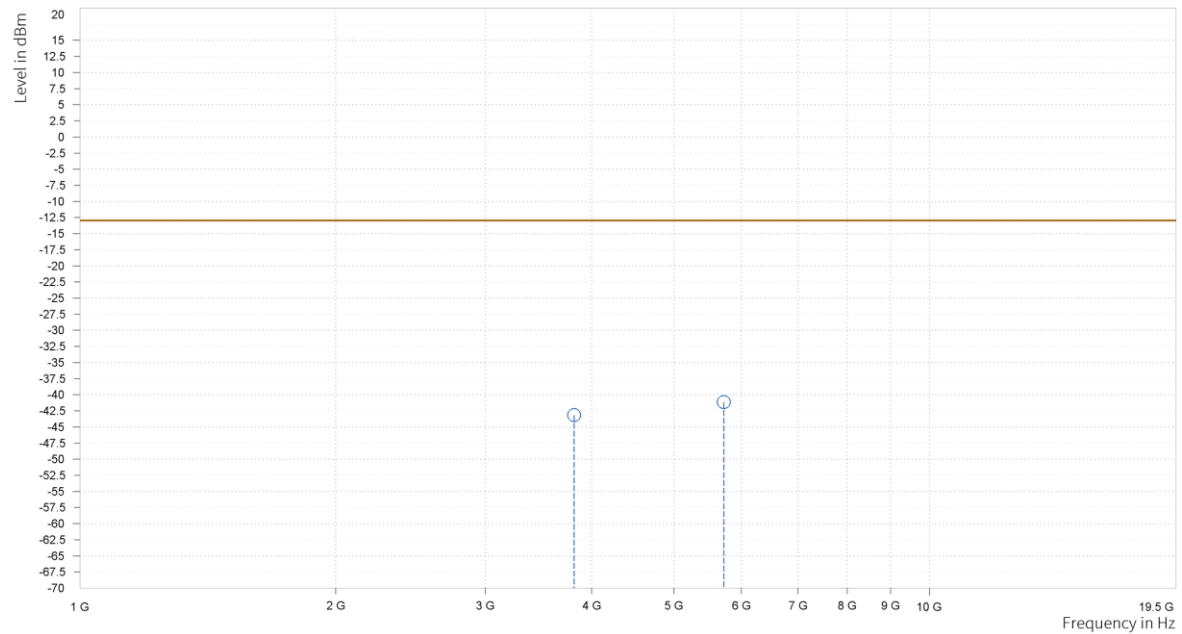




LTE Band 2

CHANNEL BANDWIDTH: 1.4MHz / QPSK

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,758.740	-43.01	-13.0	30.01	27.6	H	307.9	1.0
4	5,638.110	-41.46	-13.0	28.46	32.22	H	359.1	1.0

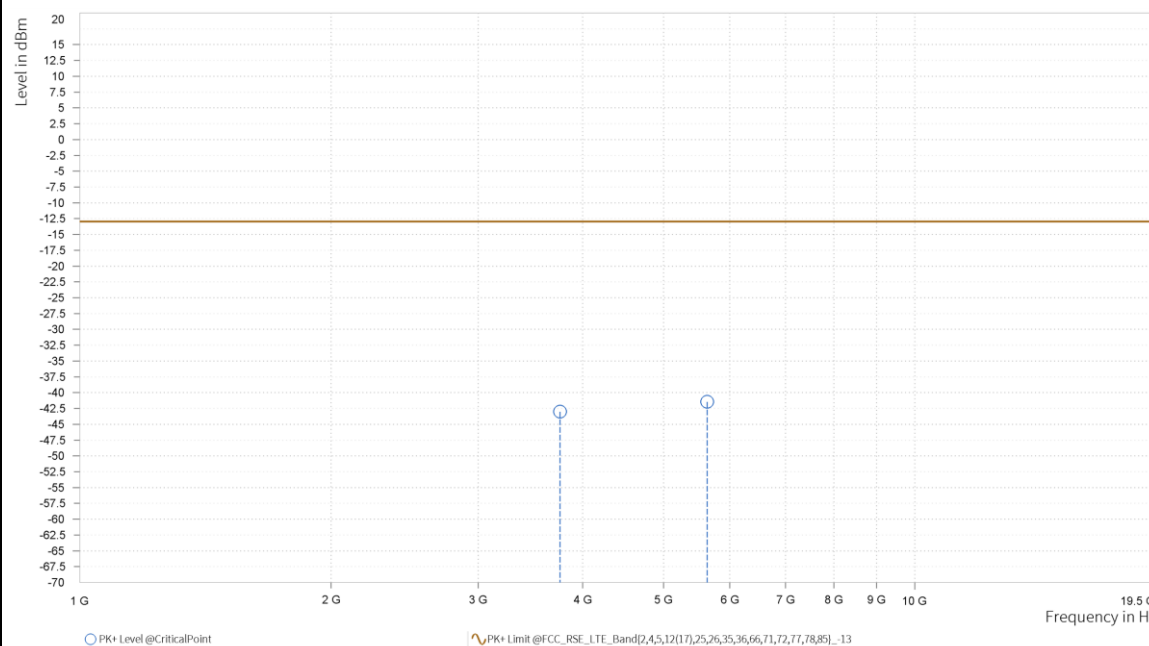




**BUREAU  
VERITAS**

**Test Report No.: PSU-NQN2405210111RF03**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,758.740	-42.56	-13.0	29.56	27.3	V	1.0	1.0
4	5,638.110	-41.31	-13.0	28.31	31.96	V	309.1	1.0

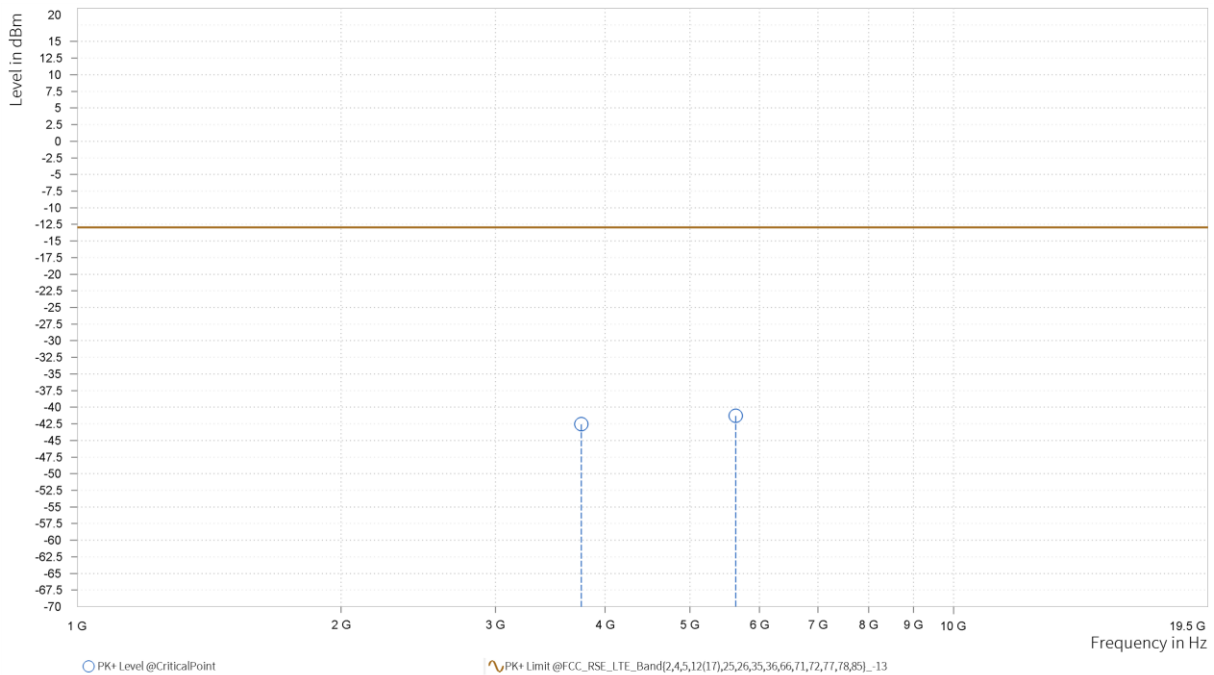




CHANNEL BANDWIDTH: 3MHz / QPSK

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,757.000	-38.61	-13.0	25.61	27.57	H	312.8	1.0
4	5,635.950	-40.96	-13.0	27.96	32.55	H	1.0	1.0

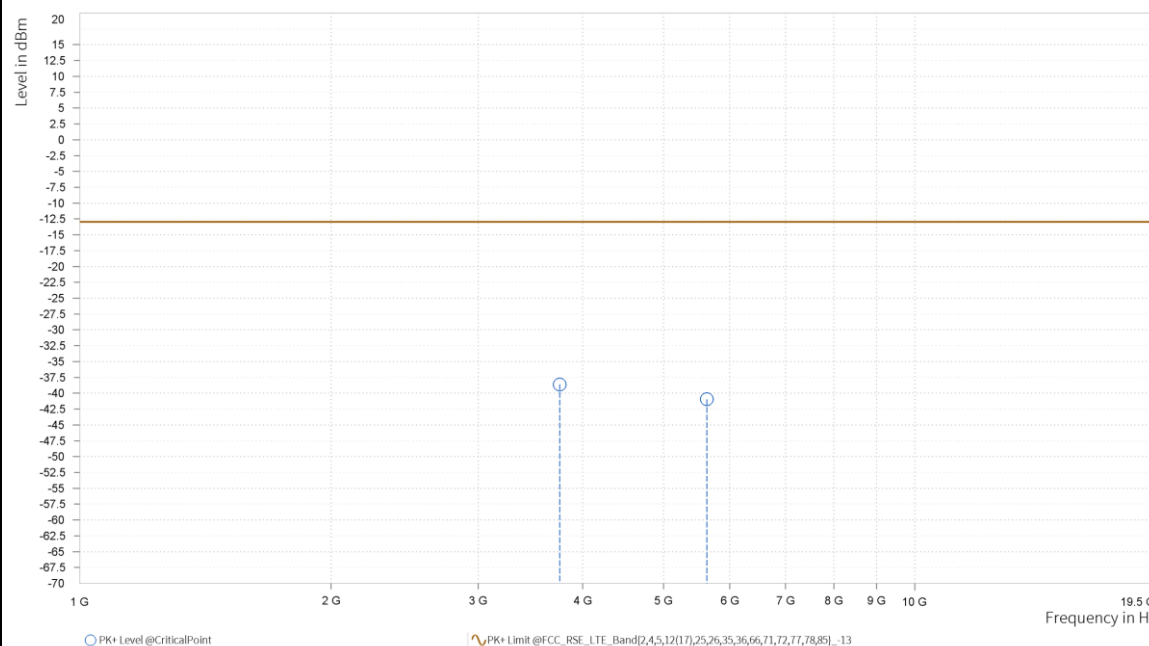




**BUREAU  
VERITAS**

Test Report No.: PSU-NQN2405210111RF03

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,757.000	-38.0	-13.0	25.0	27.26	V	1	1.0
4	5,635.950	-39.85	-13.0	26.85	32.29	V	359	2.0

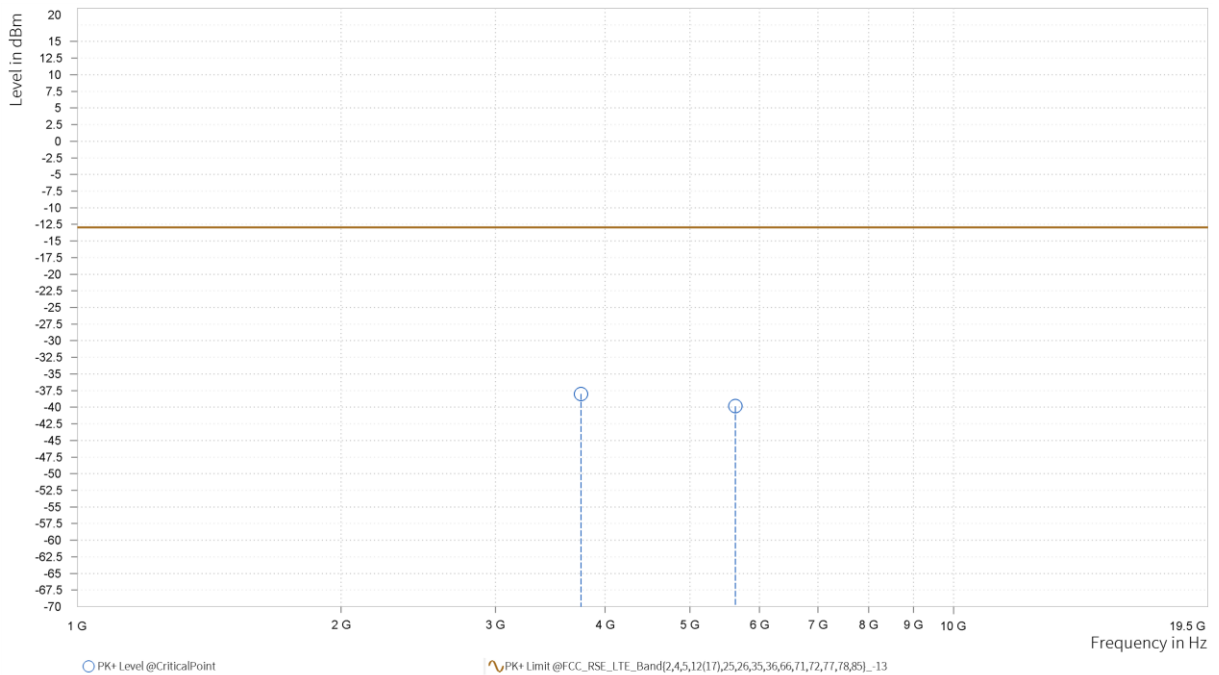





BUREAU  
VERITAS


Test Report No.: PSU-NQN2405210111RF03

**CHANNEL BANDWIDTH: 5MHz / QPSK**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,755.500	-40.68	-13.0	27.68	27.53	H	98.7	2.0
4	5,633.250	-40.16	-13.0	27.16	33.05	H	359.0	1.0

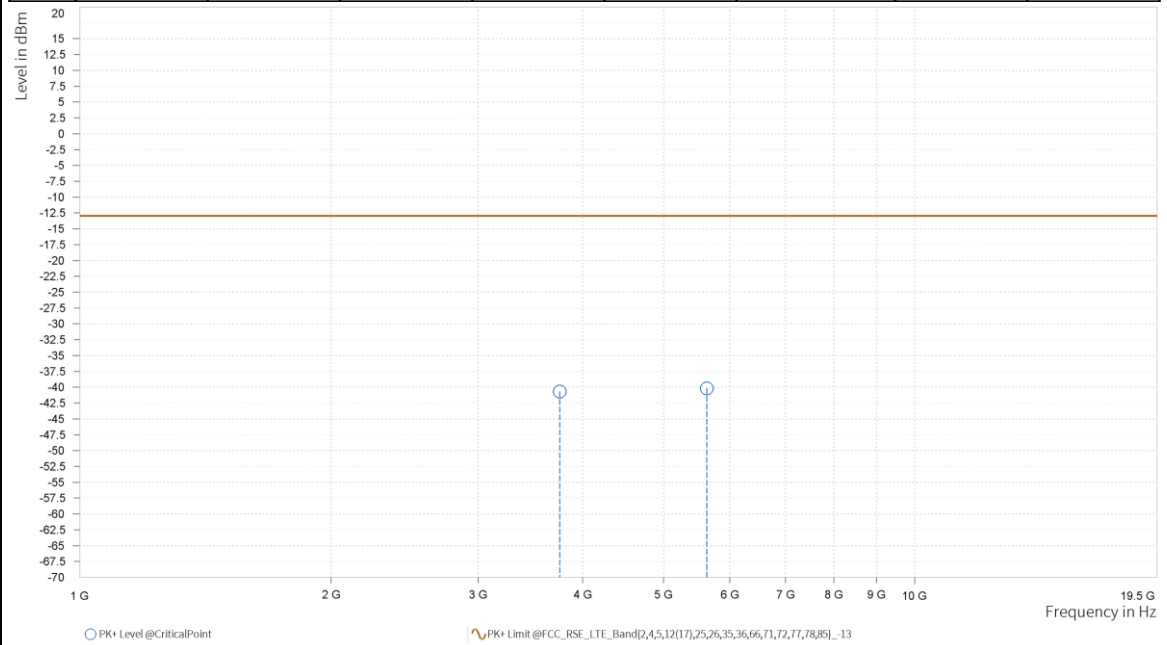




**BUREAU  
VERITAS**

**Test Report No.: PSU-NQN2405210111RF03**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,755.000	-40.4	-13.0	27.4	27.22	V	359.0	2.0
4	5,633.250	-39.7	-13.0	26.7	32.79	V	98.8	2.0

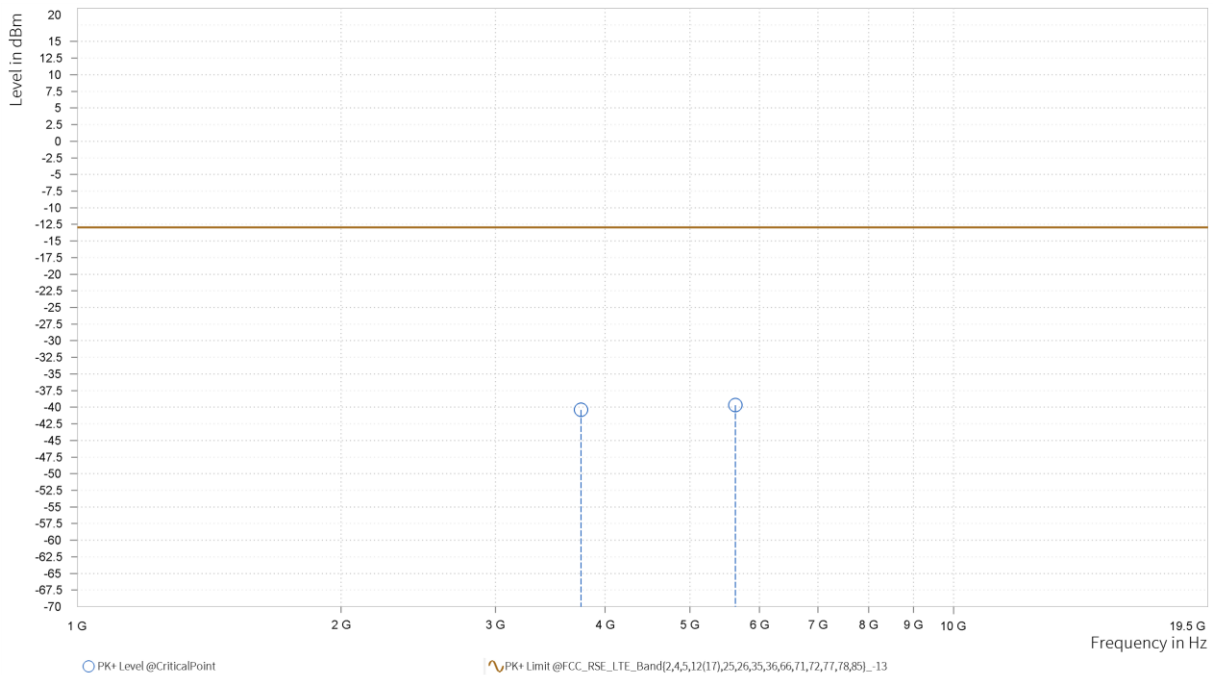




CHANNEL BANDWIDTH: 10MHz / QPSK

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,751.000	-41.94	-13.0	28.94	27.42	H	114.3	2.0
4	5,626.500	-39.35	-13.0	26.35	33.26	H	0.9	2.0

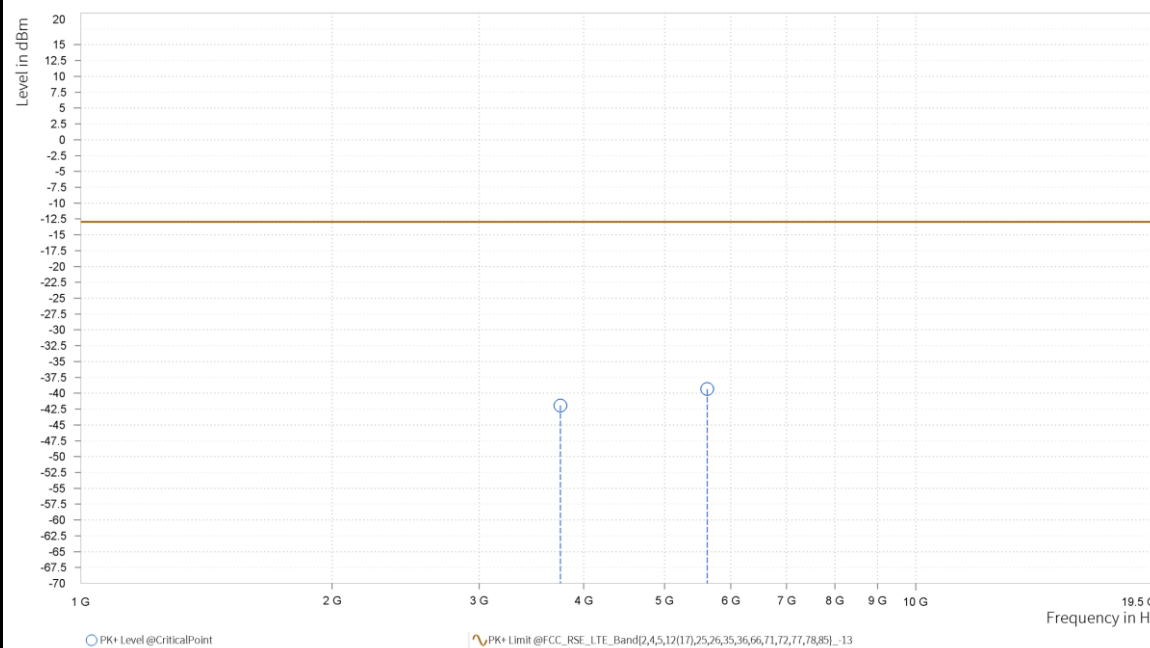




**BUREAU  
VERITAS**

Test Report No.: PSU-NQN2405210111RF03

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,751.000	-38.0	-13.0	25.0	27.14	V	1	1.0
4	5,626.500	-40.31	-13.0	27.31	33.0	V	1	1.0

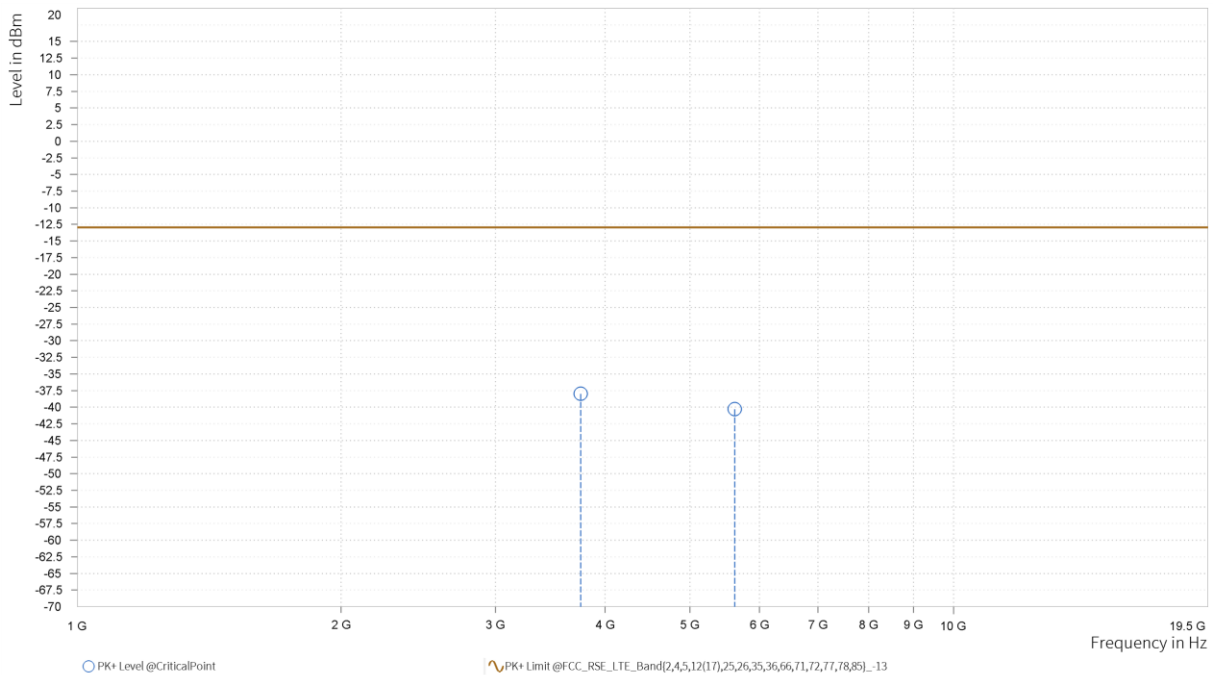




**CHANNEL BANDWIDTH: 15MHz / QPSK**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,746.500	-39.46	-13.0	26.46	27.26	H	95.3	2.0
4	5,619.750	-40.49	-13.0	27.49	32.7	H	0.9	2.0

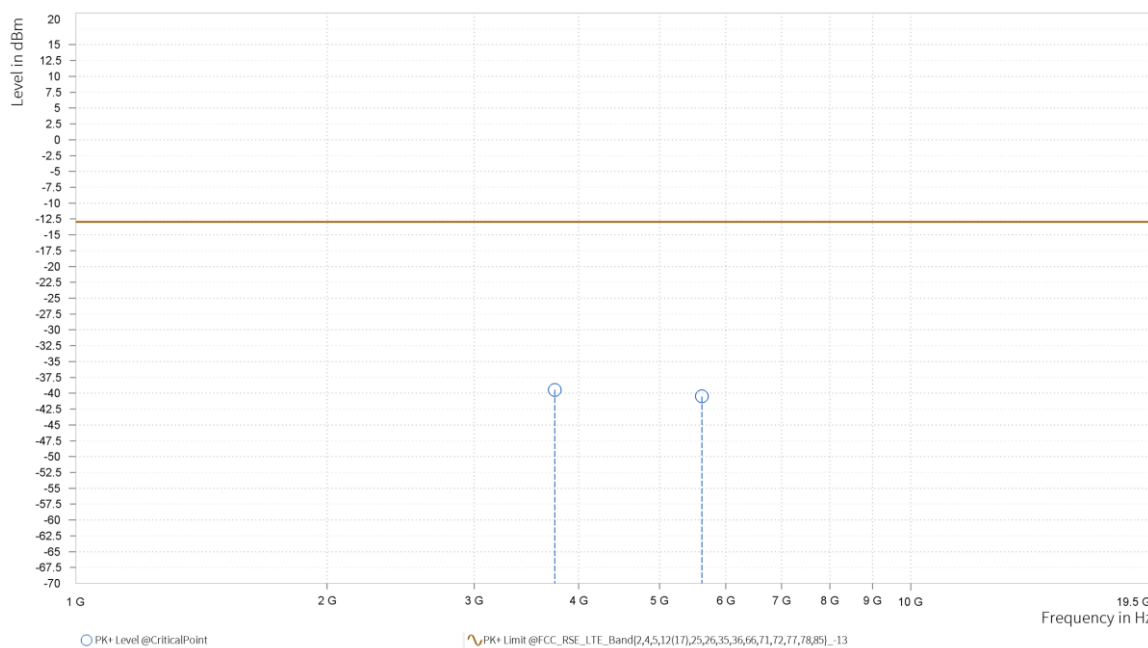




**BUREAU  
VERITAS**

**Test Report No.: PSU-NQN2405210111RF03**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,746.500	-38.33	-13.0	25.33	26.98	V	1.0	1.0
4	5,619.750	-41.01	-13.0	28.01	32.44	V	257.7	1.0

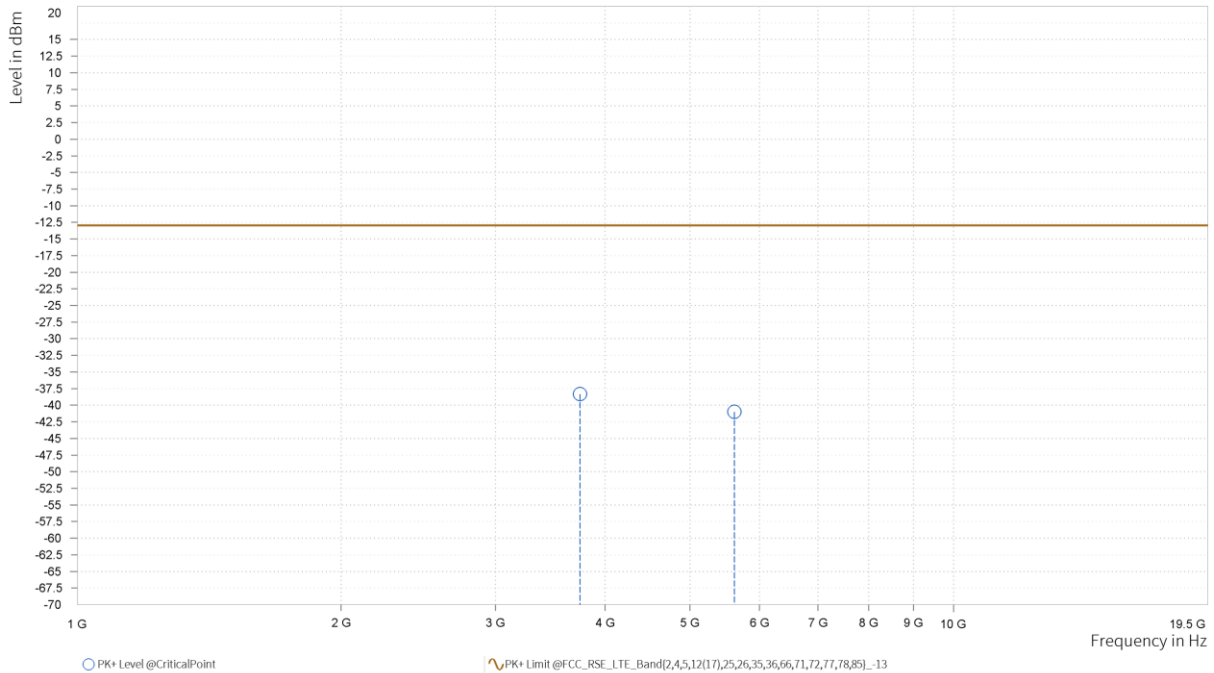




CHANNEL BANDWIDTH: 20MHz / QPSK

CH18700

<b>MODE</b>	TX channel 18700	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,702.000	-41.27	-13.0	28.27	27.47	H	359	2.0
4	5,553.000	-41.51	-13.0	28.51	31.31	H	359	2.0

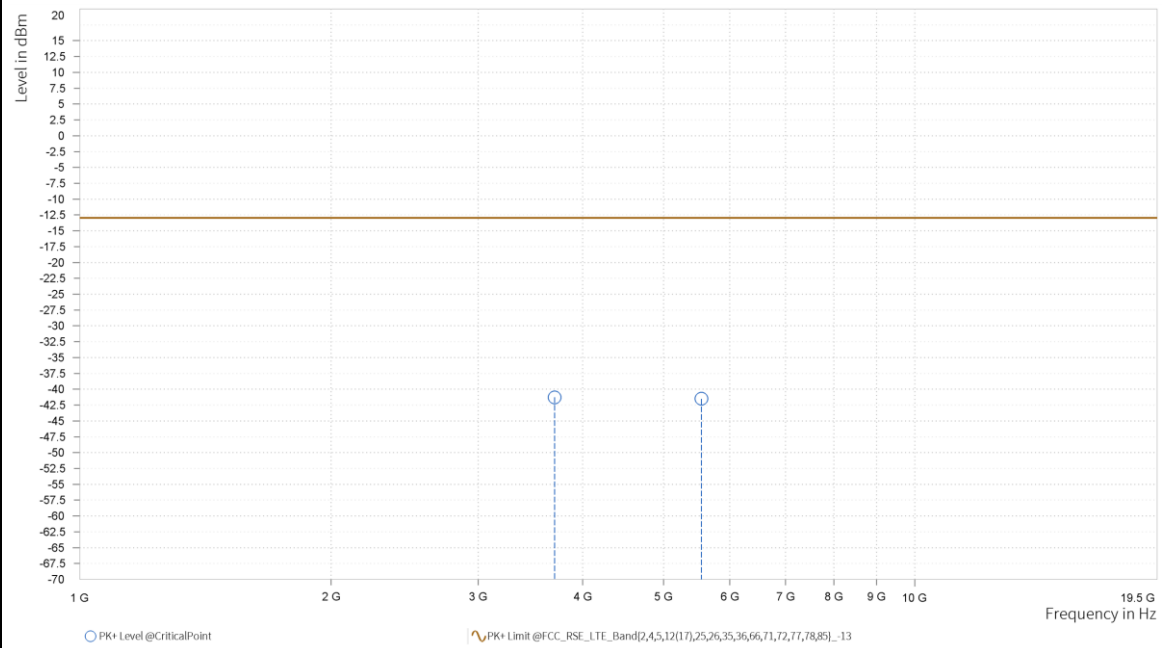




**BUREAU  
VERITAS**

Test Report No.: PSU-NQN2405210111RF03

<b>MODE</b>	TX channel 18700	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,702.000	-41.92	-13.0	28.92	27.29	V	1	1.0
4	5,553.000	-42.15	-13.0	29.15	31.06	V	359	2.0

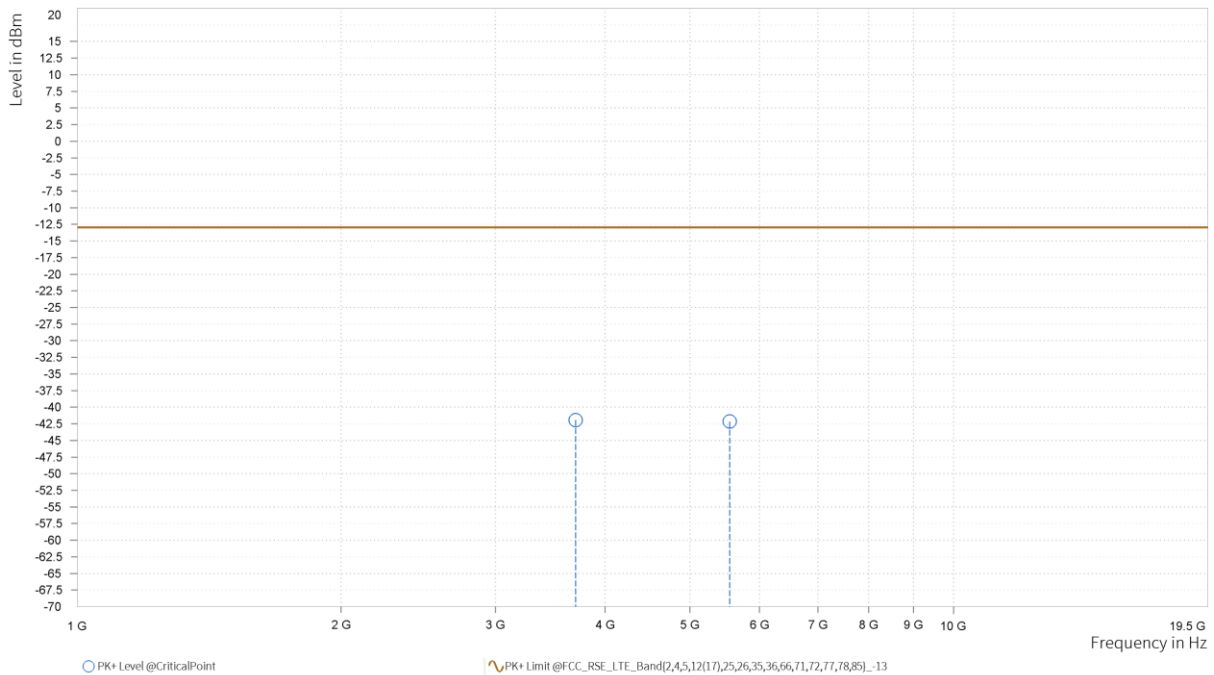





**BUREAU  
VERITAS**


**Test Report No.: PSU-NQN2405210111RF03**

**CH18900**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,742.000	-40.07	-13.0	27.07	27.12	H	106.0	2.0
4	5,613.000	-40.9	-13.0	27.9	32.53	H	0.9	2.0

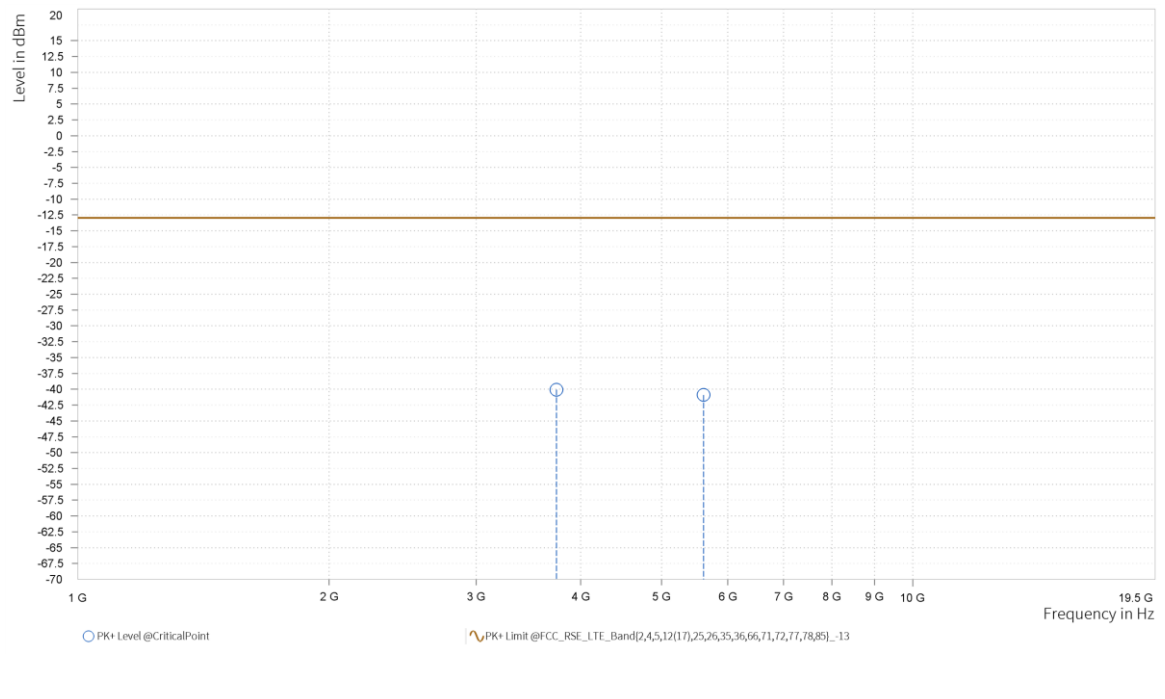




**BUREAU  
VERITAS**

Test Report No.: PSU-NQN2405210111RF03

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,742.000	-38.01	-13.0	25.01	26.84	V	1.0	1.0
4	5,613.000	-41.24	-13.0	28.24	32.27	V	359.1	1.0

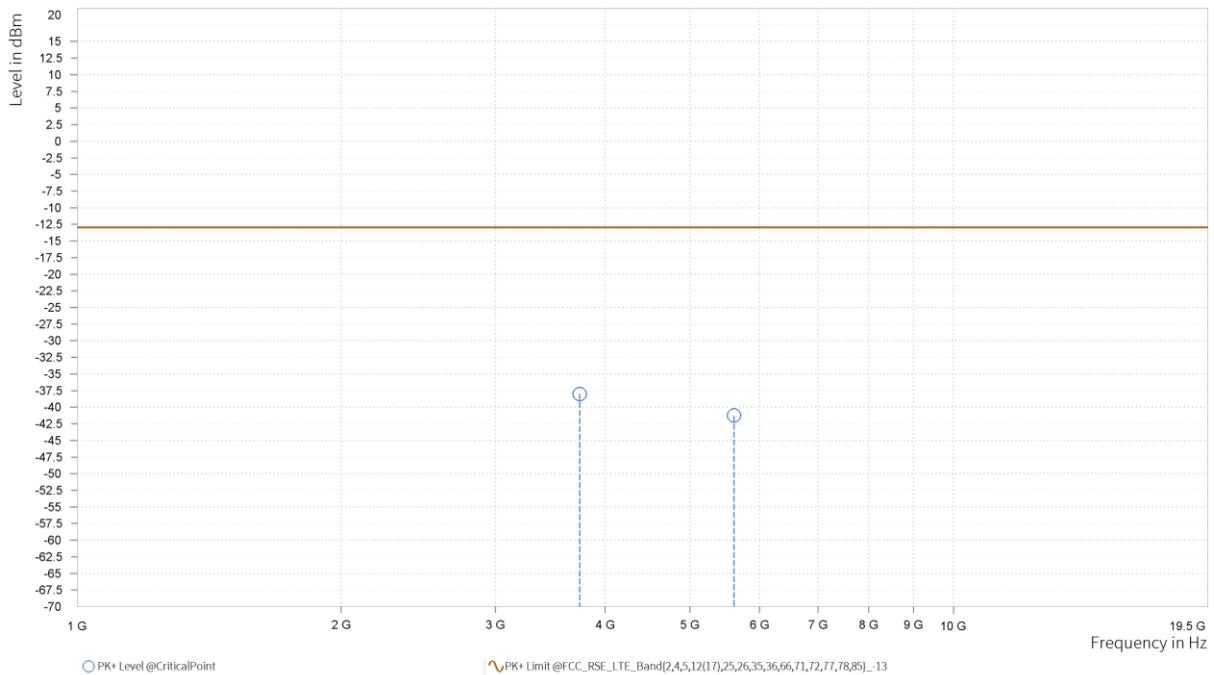



**BUREAU  
VERITAS**


**Test Report No.: PSU-NQN2405210111RF03**

**CH19100**

<b>MODE</b>	TX channel 19100	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,782.000	-40.6	-13.0	27.6	27.95	H	0.9	2.0
4	5,673.000	-39.92	-13.0	26.92	32.5	H	1.0	1.0

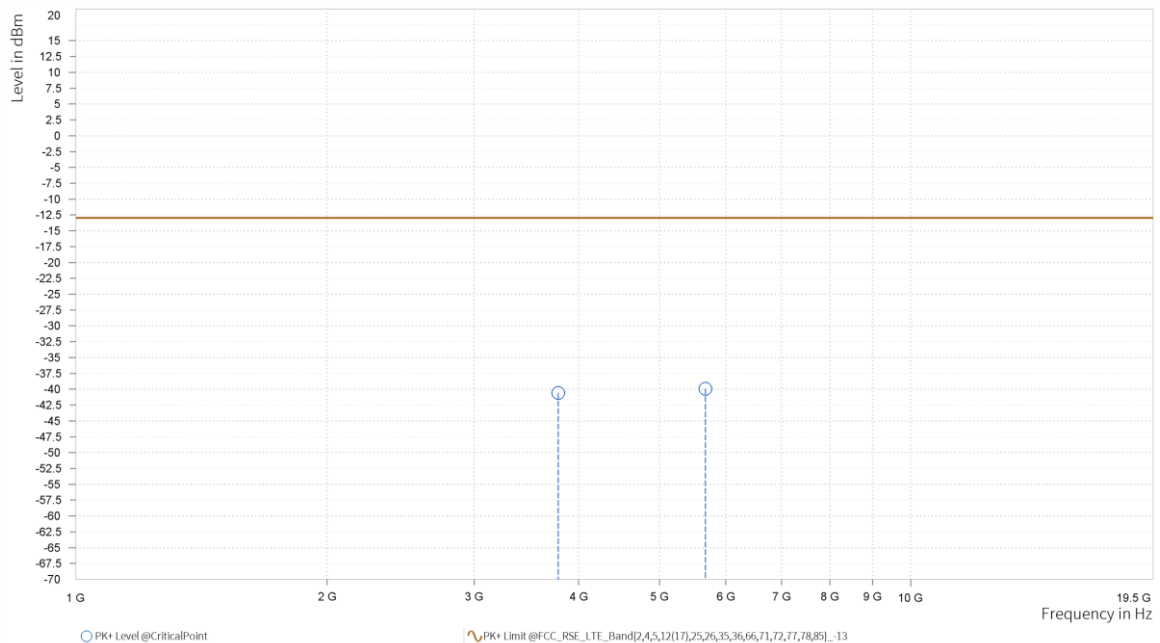




**BUREAU  
VERITAS**

**Test Report No.: PSU-NQN2405210111RF03**

<b>MODE</b>	TX channel 19100	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	120Vac 60HZ
<b>TESTED BY</b>	Hanwen Xu		

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,782.000	-42.07	-13.0	29.07	27.63	V	359.1	1.0
4	5,673.000	-41.26	-13.0	28.26	32.23	V	359.1	1.0

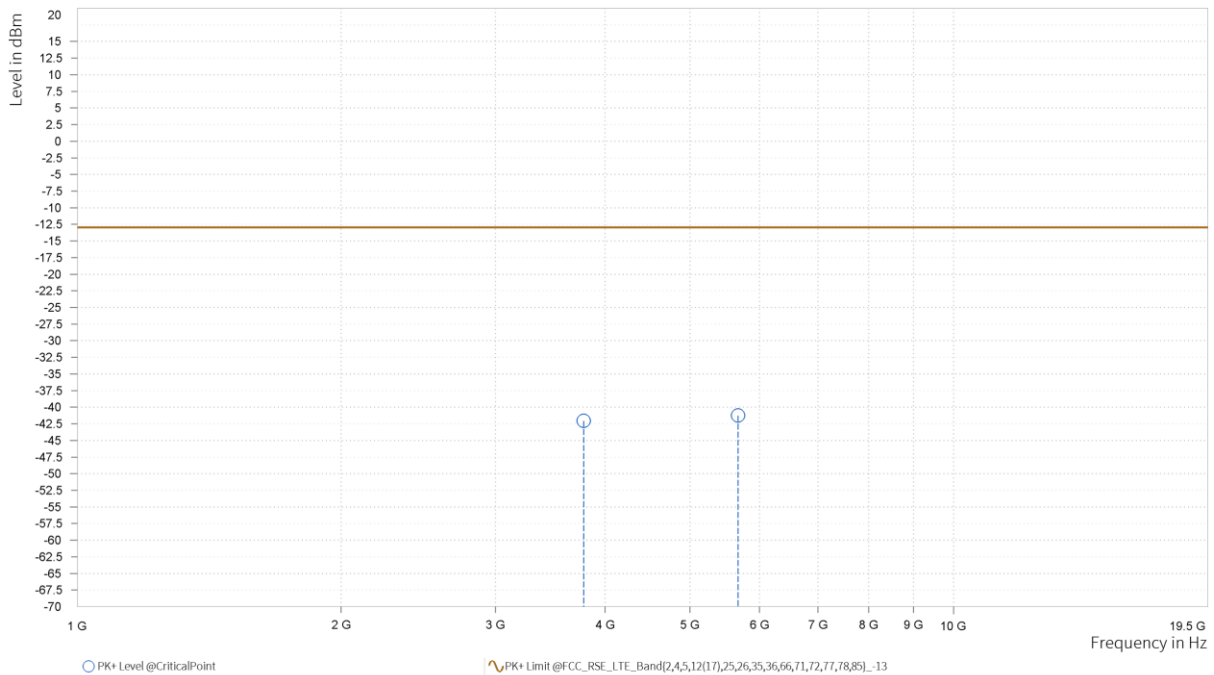




### 3.7 PEAK TO AVERAGE RATIO

#### 3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

#### 3.7.2 TEST SETUP

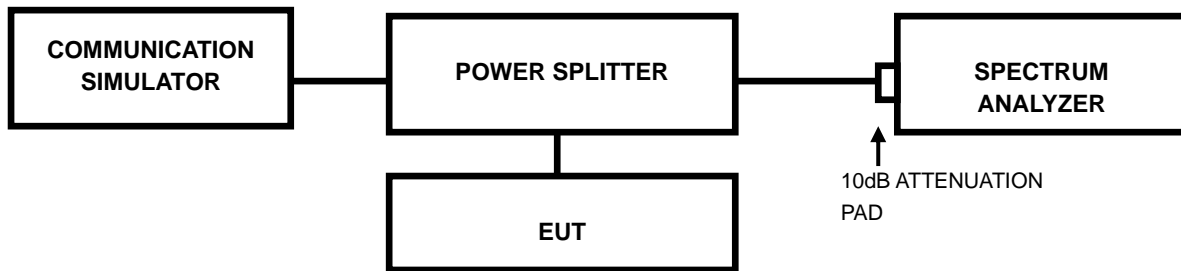

#### 3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.



Test Report No.: PSU-NQN2405210111RF03

### 3.7.4 TEST RESULTS

Please Refer to Appendix Of this test report.



**BUREAU  
VERITAS**

Test Report No.: PSU-NQN2405210111RF03

## 4 INFORMATION ON THE TESTING LABORATORIES

We, Huarui 7layers High Technology (Suzhou) Co., Ltd. ,were founded in 2020 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province

Accredited Test Lab Cert 6613.01

If you have any comments, please feel free to contact us at the following:

**Suzhou EMC/RF Lab:**

Tel: +86 (0557) 368 1008



**BUREAU  
VERITAS**

Test Report No.: PSU-NQN2405210111RF03

## **5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.





## 6 Appendix

### GSM 1900

#### PEAK-TO-AVERAGE RATIO(CCDF)

##### Test Result


Band	Channel	Result(dB)	Limit(dB)	Verdict
GSM1900	512	1.24	13	PASS
GSM1900	661	0.66	13	PASS
GSM1900	810	0.76	13	PASS
GPRS1900	512	2.74	13	PASS
GPRS1900	661	2.74	13	PASS
GPRS1900	810	2.74	13	PASS



BUREAU VERITAS

Test Report No.: PSU-NQN2405210111RF03


### Test Graphs

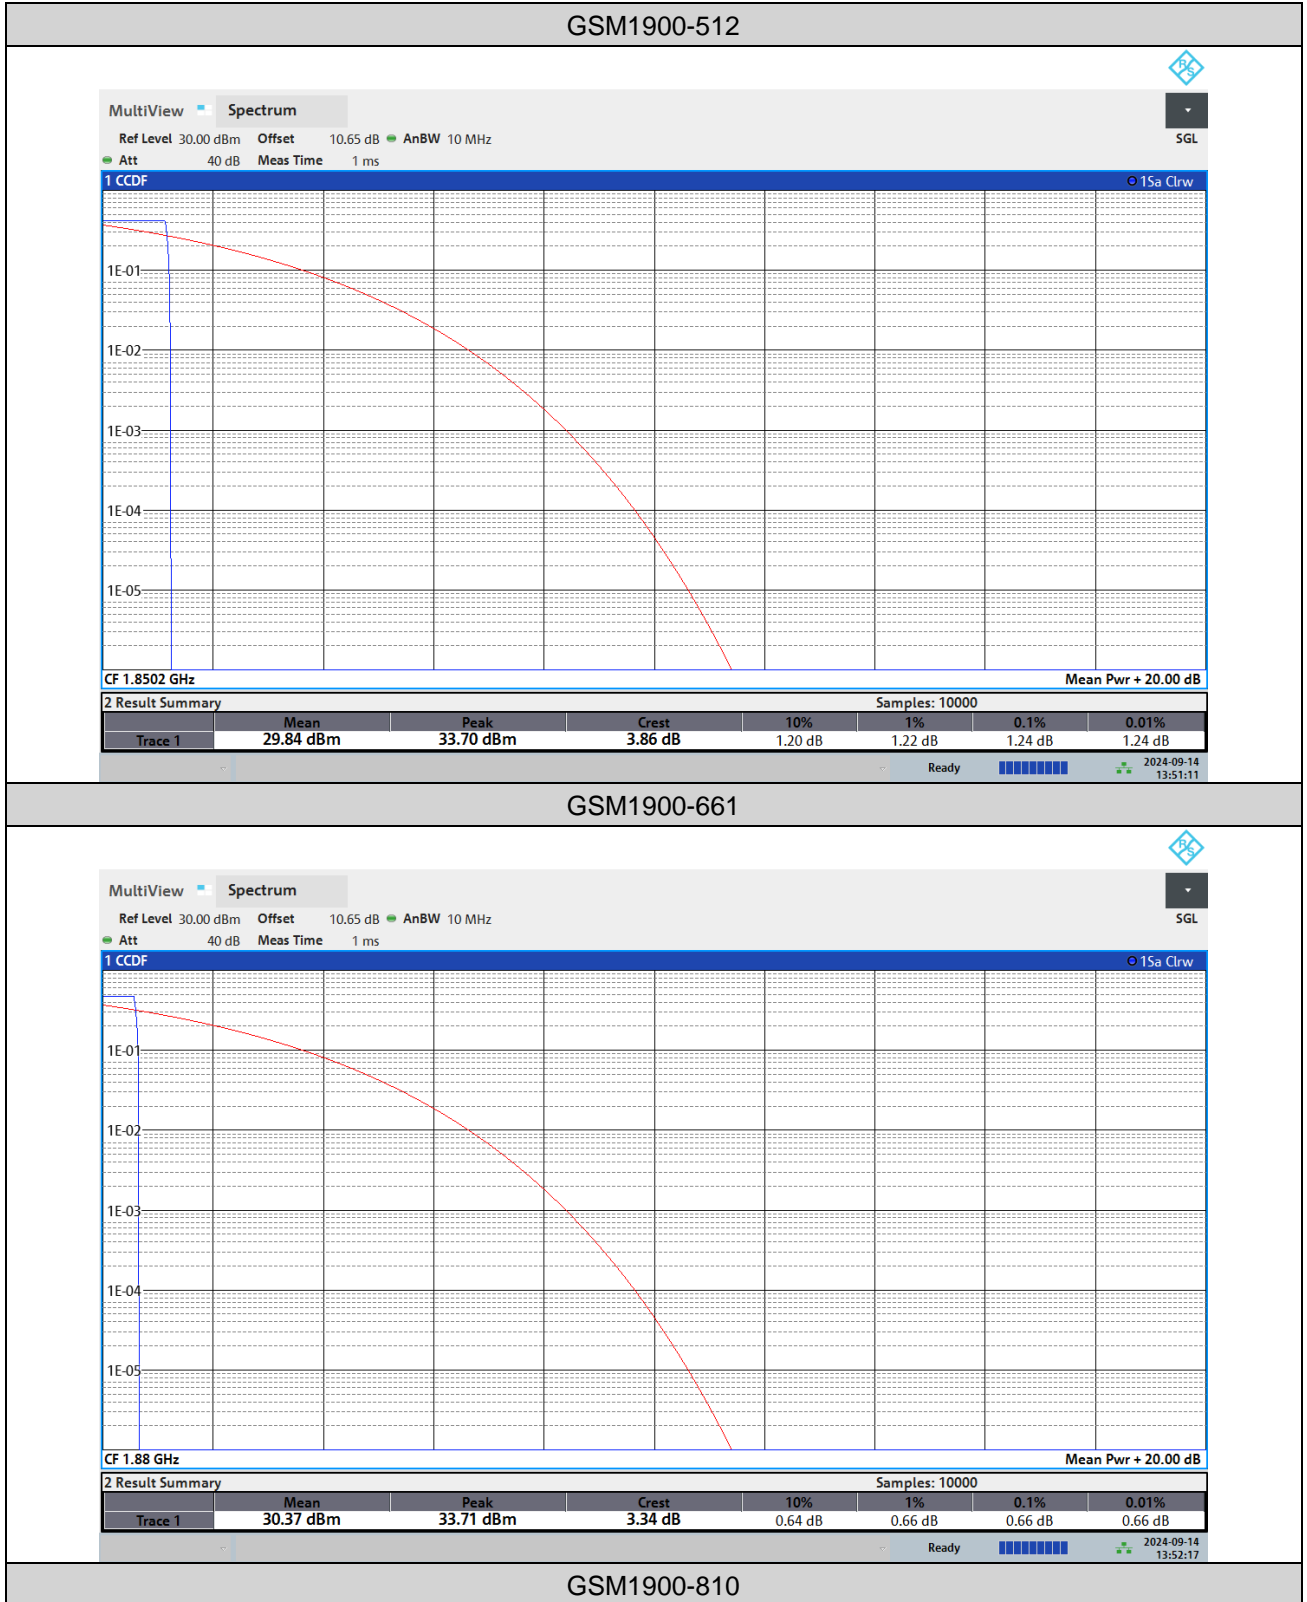




BUREAU VERITAS

### Test Report No.: PSU-NQN2405210111RF03

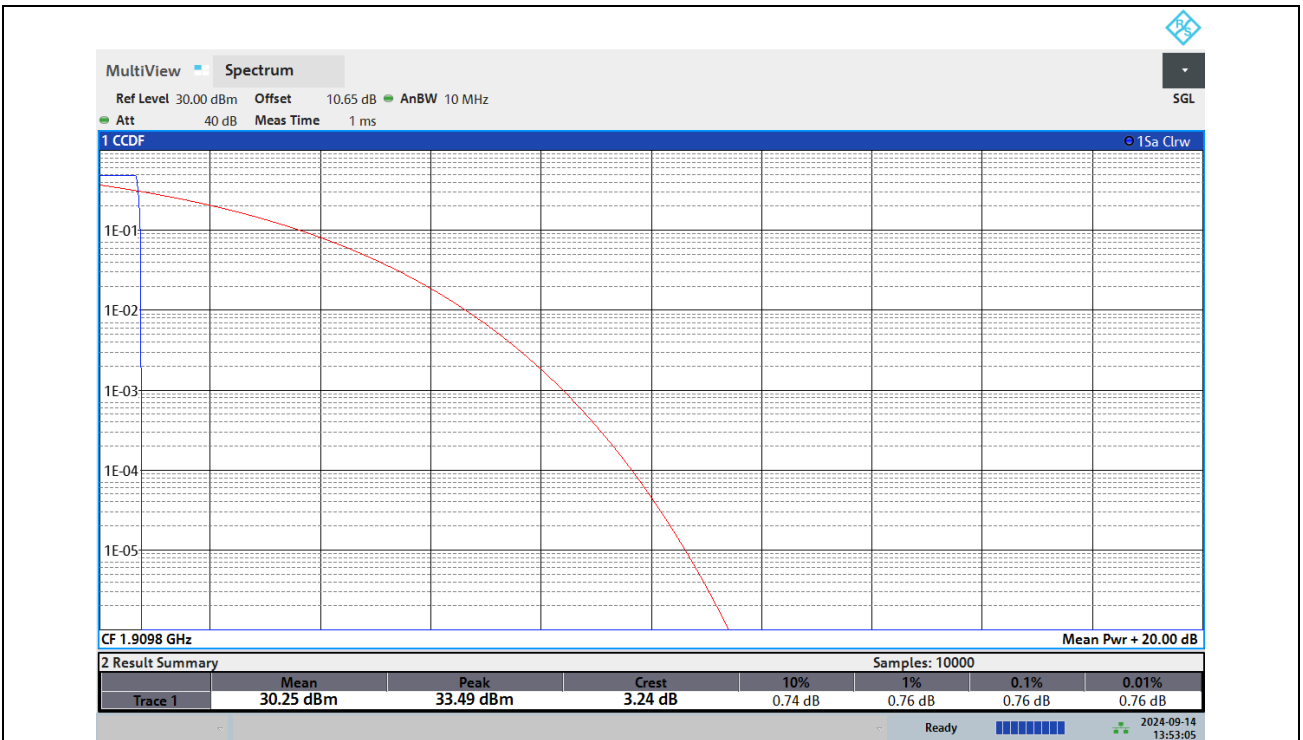

### GPRS1900-512

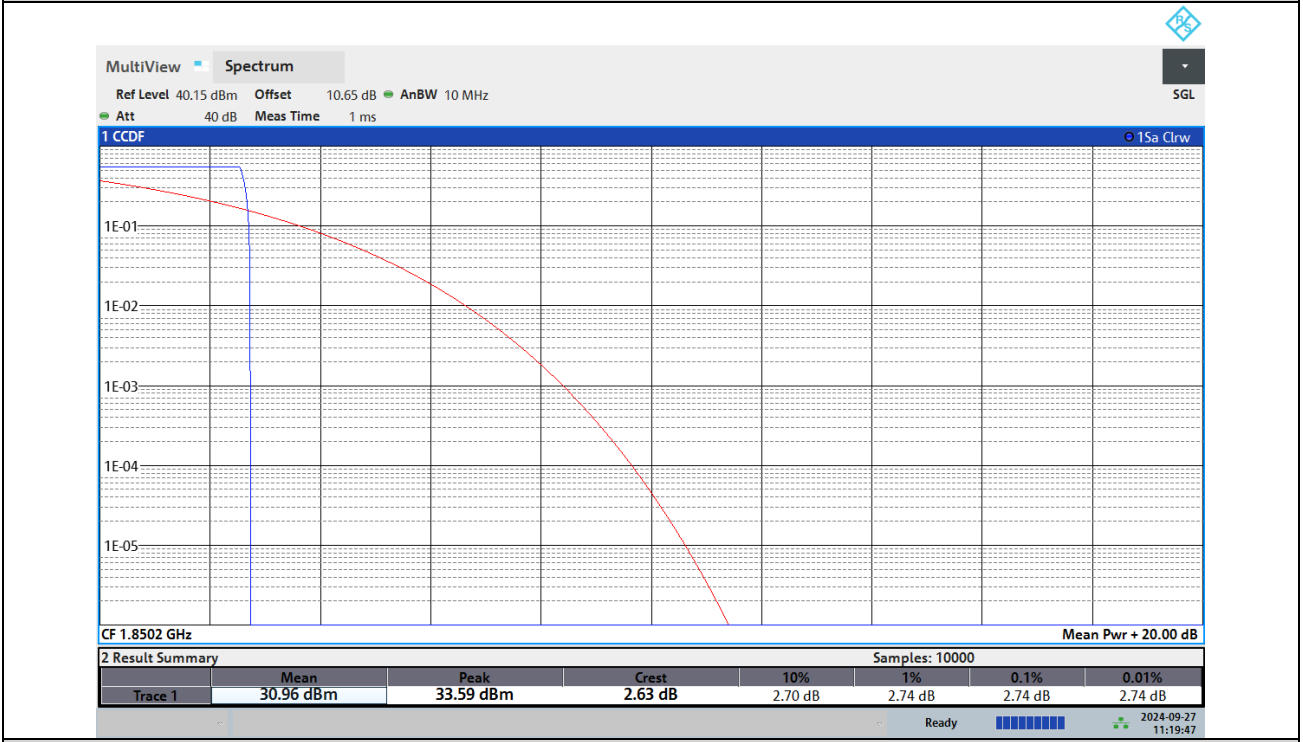


### GPRS1900-661




BUREAU VERITAS

### Test Report No.: PSU-NQN2405210111RF03

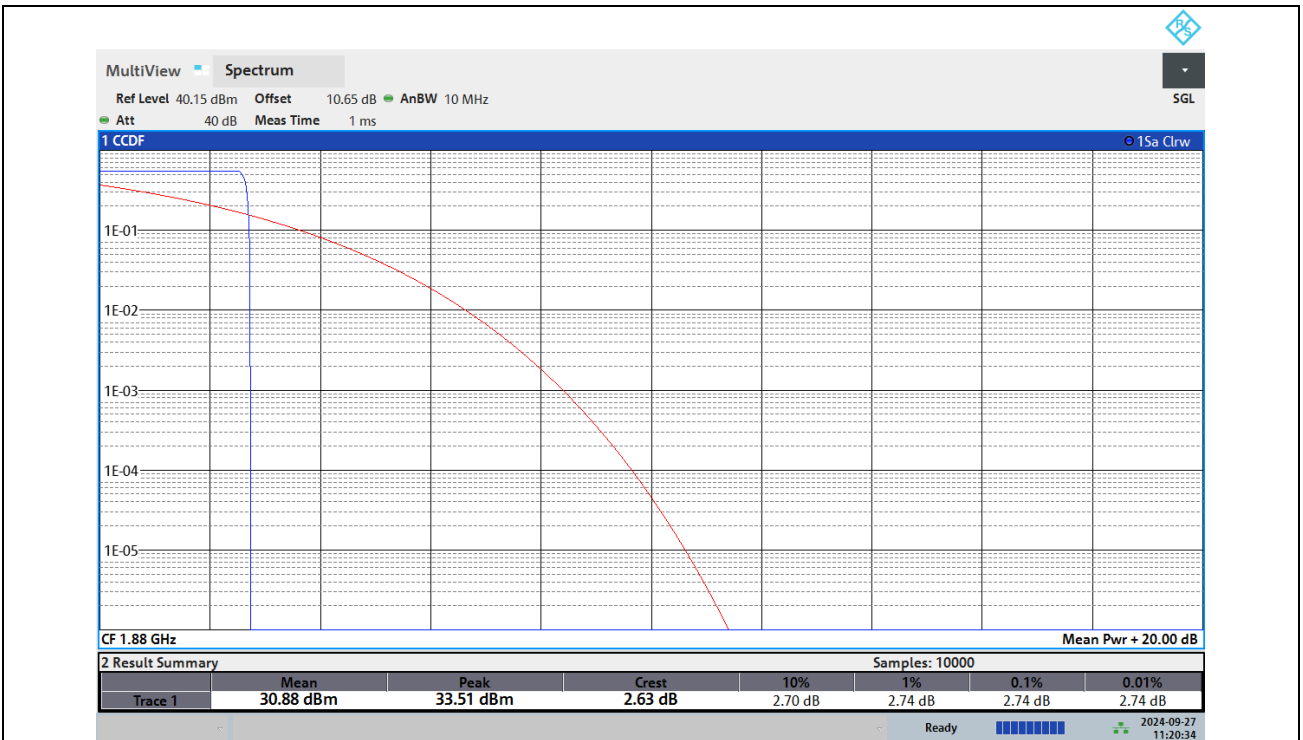

### GPRS1900-810

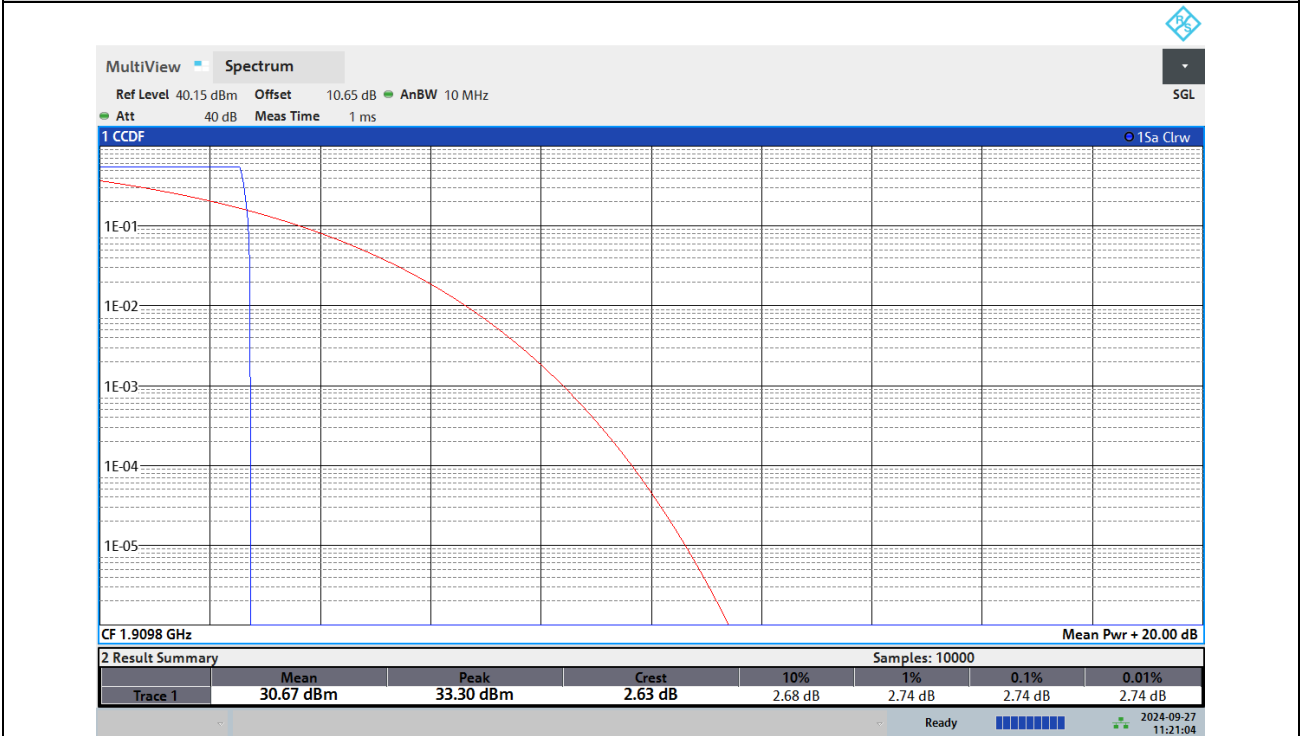



**BUREAU**  
**VERITAS**

Test Report No.: PSU-NQN2405210111RF03

## 26DB BANDWIDTH AND OCCUPIED BANDWIDTH

### Test Result

Band	Channel	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
GSM1900	512	244.933	309.69	PASS
GSM1900	661	245.433	303.20	PASS
GSM1900	810	243.405	310.69	PASS
GPRS1900	512	243.736	316.18	PASS
GPRS1900	661	244.746	314.69	PASS
GPRS1900	810	244.870	315.18	PASS



BUREAU VERITAS

Test Report No.: PSU-NQN2405210111RF03

### Test Graphs


### Occupied Bandwidth






BUREAU VERITAS

### Test Report No.: PSU-NQN2405210111RF03

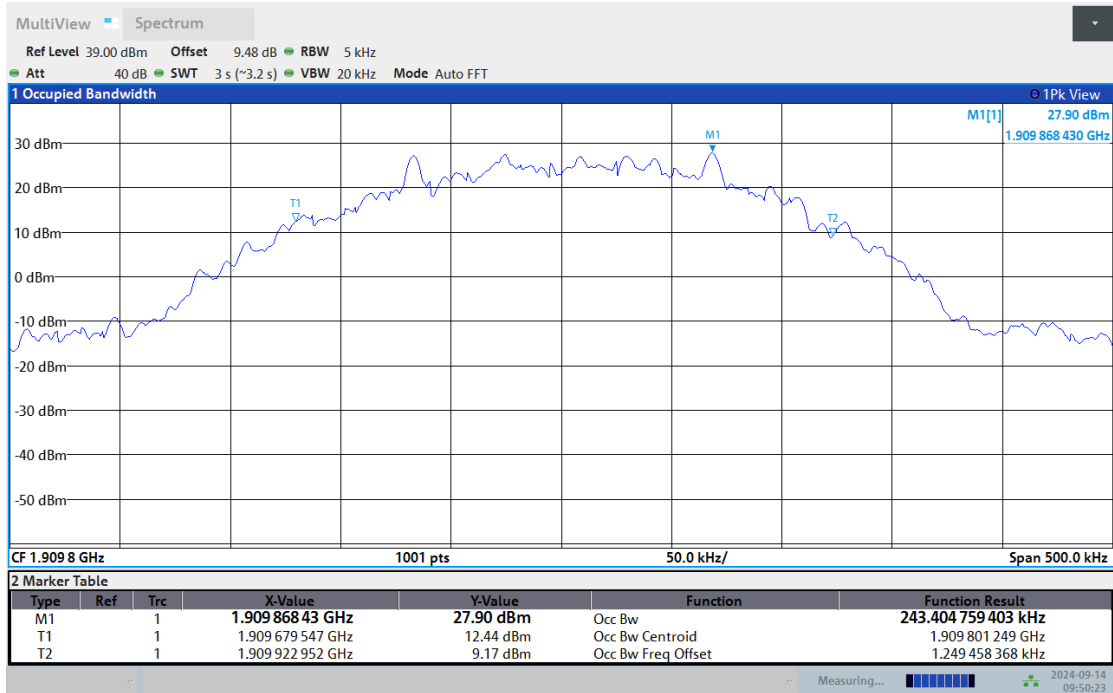

### GPRS1900-512

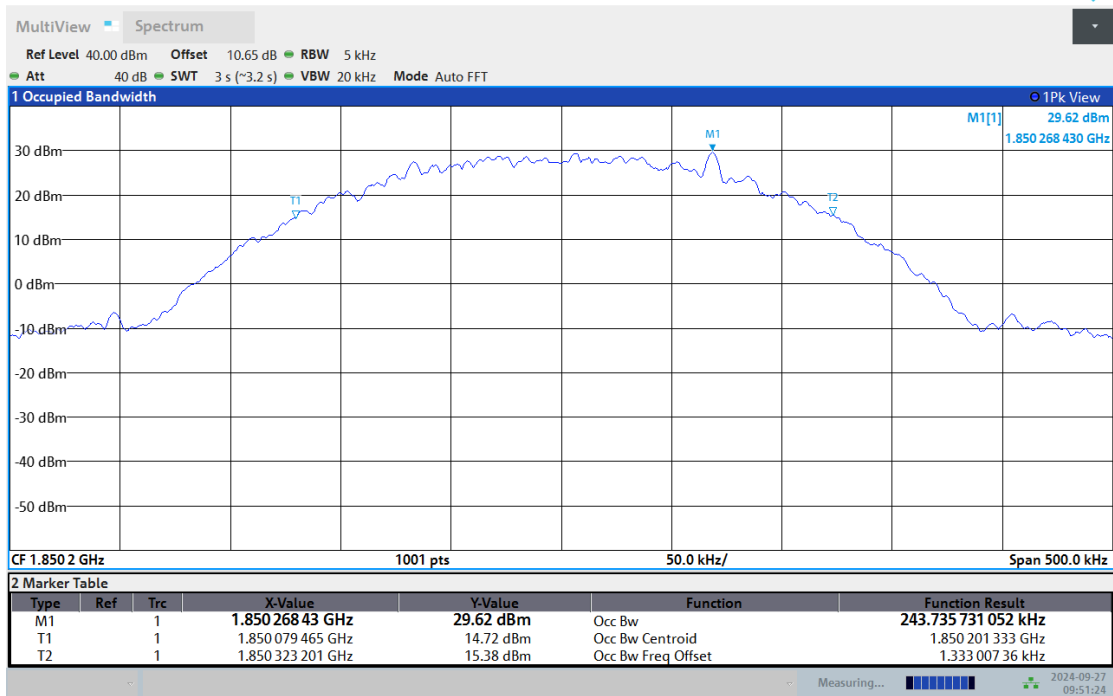


### GPRS1900-661




BUREAU VERITAS

Test Report No.: PSU-NQN2405210111RF03

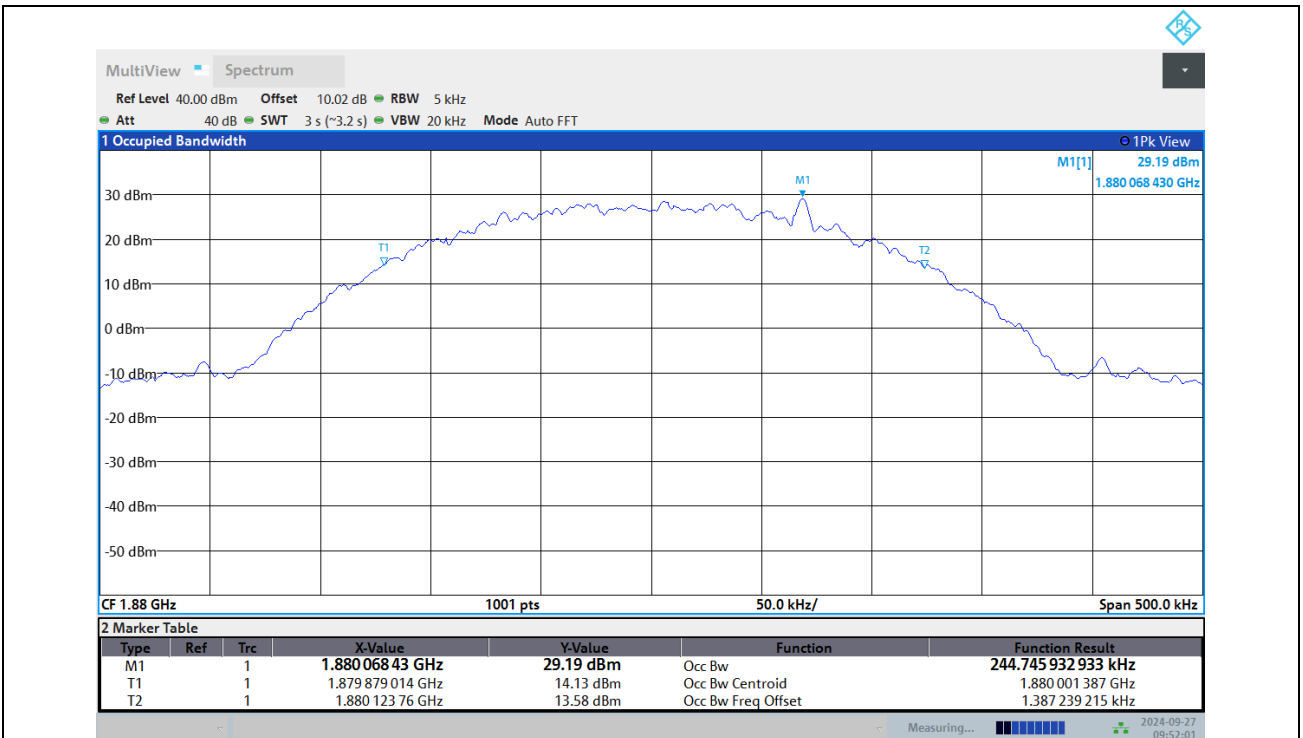

### GPRS1900-810

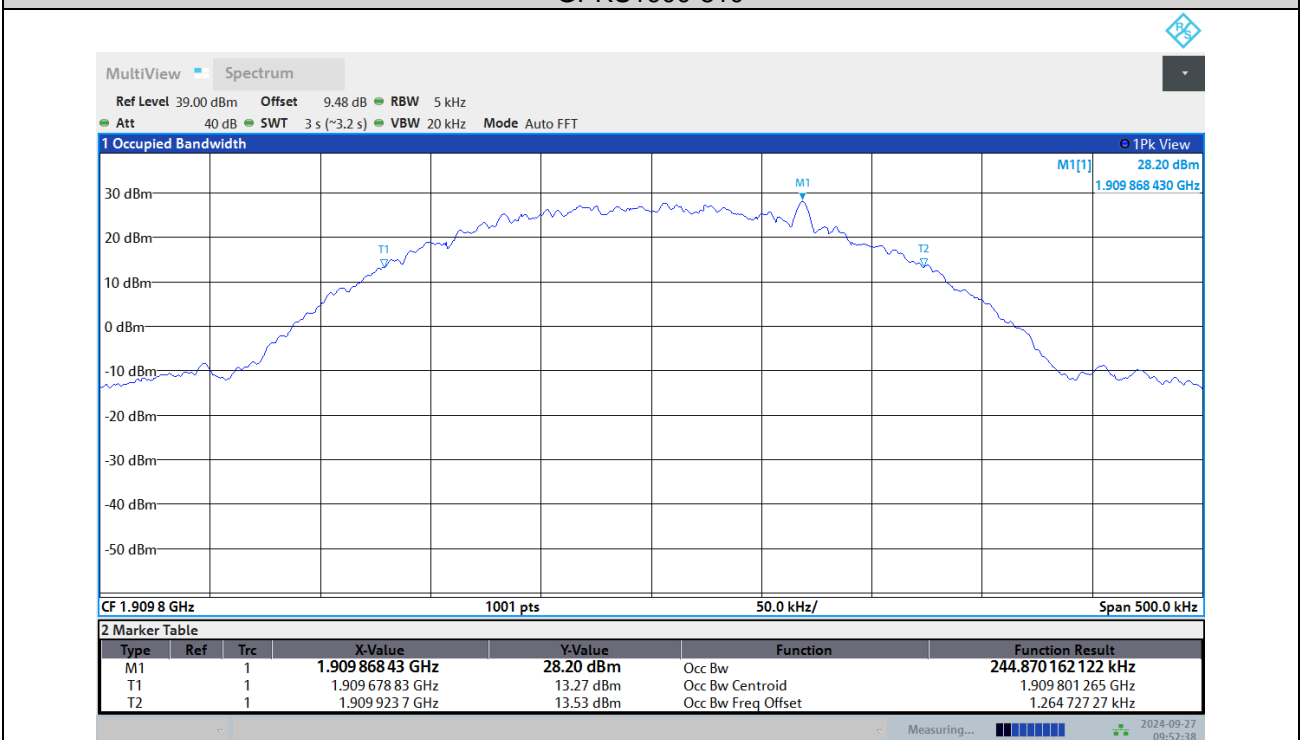

### 26dB Bandwidth


### GSM1900-512






BUREAU VERITAS

### Test Report No.: PSU-NQN2405210111RF03

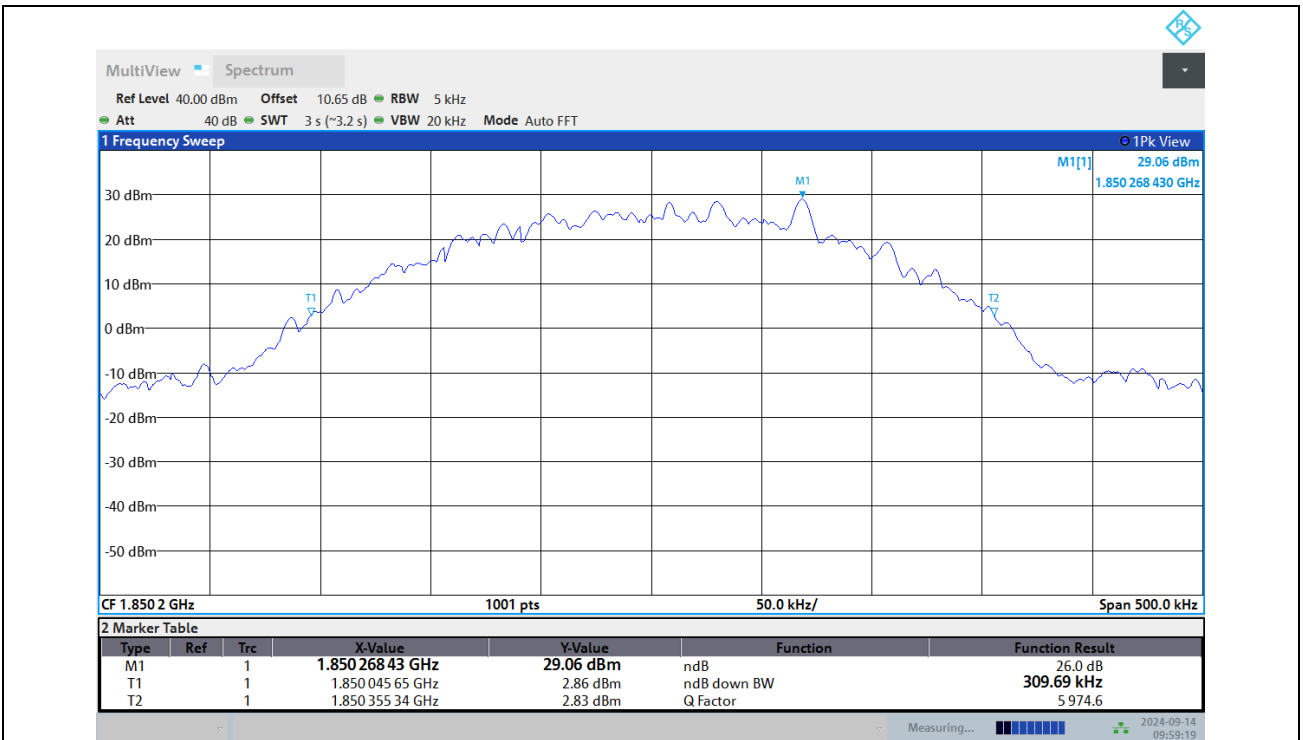

### GSM1900-661

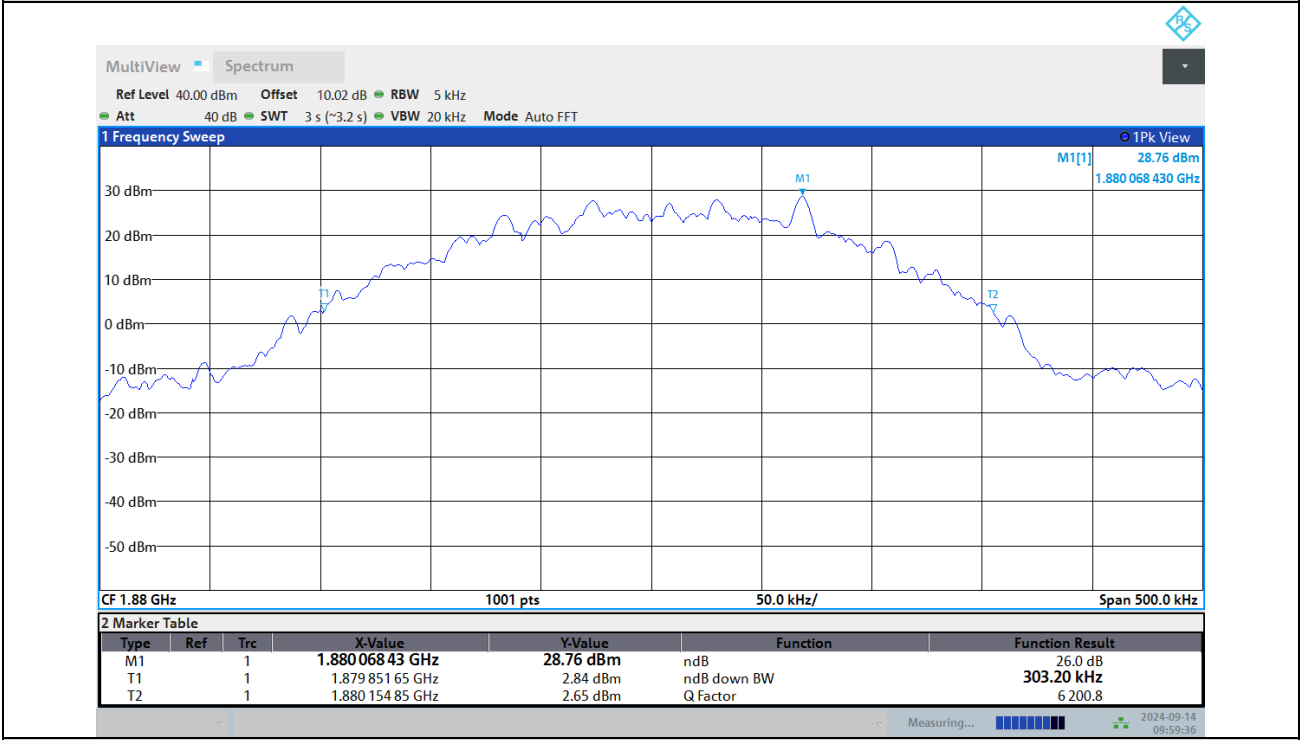


### GSM1900-810




BUREAU VERITAS

### Test Report No.: PSU-NQN2405210111RF03

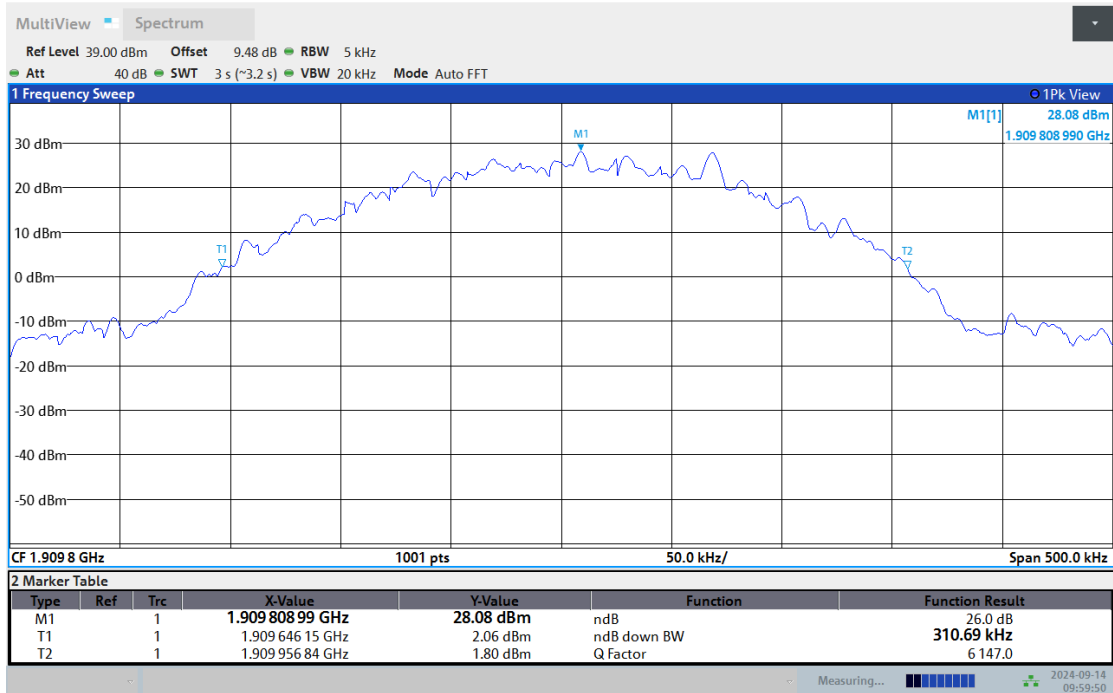

### GPRS1900-512

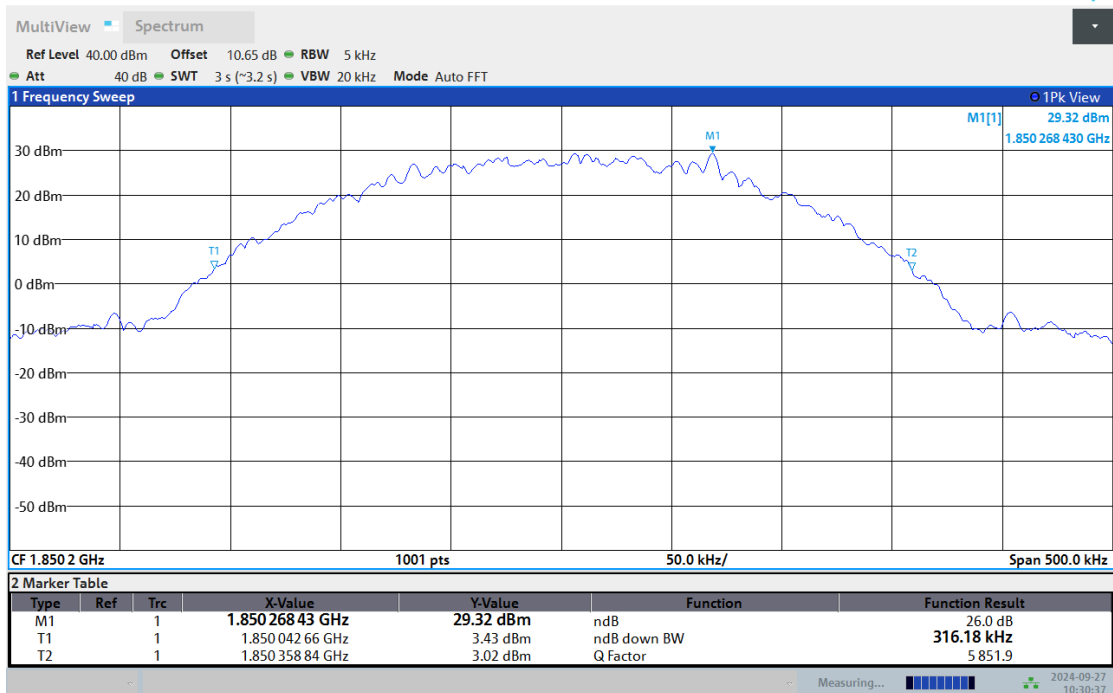


### GPRS1900-661



BUREAU VERITAS

### Test Report No.: PSU-NQN2405210111RF03

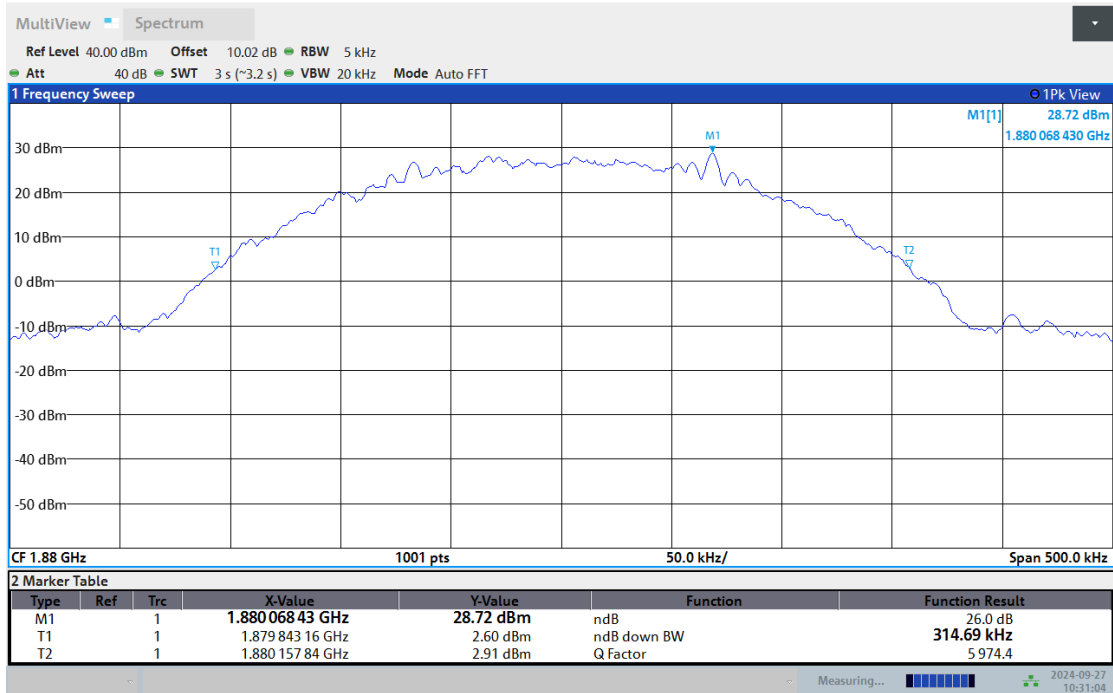

### GPRS1900-810

