

FCC RF Test Report

APPLICANT : HMD Global Oy
EQUIPMENT : Smart Phone
BRAND NAME : NOKIA
MODEL NAME : TA-1053
FCC ID : 2AJOTTA-1053
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Jan. 26, 2017 and testing was completed on Mar. 11, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : 2AJOTTA-1053

Page Number : 1 of 24

Report Issued Date : Apr. 06, 2017

Report Version : Rev. 01

Report Template No.: BU5-FR15EWLB4 Version 2.0



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Re-use of Measured Data	5
1.5 Modification of EUT	9
1.6 Testing Location	9
1.7 Applicable Standards.....	10
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	11
2.1 Carrier Frequency and Channel	11
2.2 Test Mode.....	12
2.3 Connection Diagram of Test System.....	13
2.4 Support Unit used in test configuration and system	13
2.5 EUT Operation Test Setup	13
3 TEST RESULT	14
3.1 Maximum Conducted Output Power Measurement	14
3.2 Unwanted Emissions Measurement.....	15
3.3 AC Conducted Emission Measurement.....	19
3.4 Automatically Discontinue Transmission	21
3.5 Antenna Requirements.....	22
4 LIST OF MEASURING EQUIPMENT	23
5 UNCERTAINTY OF EVALUATION.....	24
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS	
APPENDIX E. DUTY CYCLE PLOTS	
APPENDIX F. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR712016-02G	Rev. 01	Initial issue of report	Apr. 06, 2017

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.2	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 5.51 dB at 32.430 MHz
3.3	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 13.90 dB at 13.558 MHz
3.4	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.5	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

HMD Global Oy

Karaportti 2, 02610 Espoo, Finland

1.2 Manufacturer

HMD Global Oy

Karaportti 2, 02610 Espoo, Finland

1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n, ANT+, FM Receiver, NFC, and GPS.

Product Specification subjective to this standard	
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna ANT+: PIFA Antenna GPS/Glonass/Beidou : Monopole Antenna NFC : Loop Antenna

1.4 Re-use of Measured Data

1.4.1 Introduction Section

The original model (FCC ID: 2AJOTTA-1044) and the variant model (FCC ID: 2AJOTTA-1053) has identical PCB layout, antenna, SW implementation for Bluetooth/Wi-Fi/GPS. Based on their similarity, the FCC Part 15C & 15E(equipment class: DTS, DSS,DXX, NII) test data issued for original model also apply for the variant model.

The applicant takes full responsibility that the test data as referenced in section 4 below represent compliance for this FCC ID (FCC ID: 2AJOTTA-1053).

1.4.2 Difference Section

The original model (FCC ID: 2AJOTTA-1044) and the variant model (FCC ID: 2AJOTTA-1053) has identical PCB layout, antenna, SW implementation for Bluetooth/Wi-Fi/GPS. The details of similarity and difference can be found in the Operating Description.

The product specification is outlined in the following table:

FCC ID			2AJOTTA-1044	2AJOTTA-1053
Wireless Tech	Mode		Frequency (MHz)	
GSM	GSM Voice GPRS (GMSK) EDGE (8PSK)	Multi-Slot Class 11 DTM: Yes	850/1900	850/1900
UMTS	AMR/RCM12.2Kbps HSDPA/HSUPA/DC-HSDPA		B2/B4/B5	B2/B5
LTE	QPSK/16QAM VoLTE		B2/B4/B7/B12/B17/B38	B5/B7/B38
Wi-Fi	11b/11g/11n(HT20)		2412-2462 MHz/	
	11a/11n(HT20)/11n(HT40)		5180-5240 MHz 5260-5320 MHz 5500-5700 MHz 5745-5825 MHz	
Bluetooth	BR/EDR/LE		2402-2480 MHz	
ANT+	ANT+		2402-2480 MHz	



1.4.3 Spot Check Verification Data Section

Summary of the spot check:

Test Item	Mode	2AJOTTA-1044 Worst Result	2AJOTTA-1053 Worst Result	Difference (dB)
Average Conducted Power (dBm)	802.11b	13.99	13.89	0.10
	802.11g	11.64	11.65	0.01
	11n HT20	10.90	10.92	-0.02
	20MHz BW 5150-5250MHz	14.42	14.48	-0.06
	20MHz BW 5250-5350MHz	14.41	14.47	-0.06
	20MHz BW 5470-5725MHz	14.37	14.34	0.03
	20MHz BW 5725-5850MHz	14.43	14.40	0.03
	40MHz BW 5150-5250MHz	14.23	14.19	0.04
	40MHz BW 5250-5350MHz	14.21	14.26	-0.05
	40MHz BW 5470-5725MHz	14.17	14.04	0.13
	40MHz BW 5725-5850MHz	14.34	14.40	-0.06
	BT (1Mbps)	7.53	7.62	-0.09
	BT (2Mbps)	5.23	5.17	0.06
	BT (3Mbps)	5.20	5.13	0.07
	BT-LE	0.63	0.72	-0.09
	ANT+	0.47	0.48	-0.01
	Test date	2017/02/11 – 2017/02/24	2017/03/14 – 2017/03/14	
Peak Radiated Spurious Emission (Band Edge) (dBuV/m)	802.11b	54.48	54.95	-0.47
	11n HT20	56.36	57.04	-0.68
	BT (1Mbps)	44.35	43.75	0.60
	BT-LE	55.17	54.61	0.56
	ANT+	65.94	63.66	2.28
	Test date	2017/02/11 – 2017/02/24	2017/03/03 – 2017/03/11	
Average Radiated Spurious Emission (Band Edge) (dBuV/m)	802.11b	45.51	44.25	1.26
	11n HT20	45.77	46.96	-1.19
	BT (1Mbps)	19.59	18.99	0.60
	BT-LE	45.28	45.24	0.04
	ANT+	38.85	38.59	0.26
	Test date	2017/02/11 – 2017/02/24	2017/03/03 – 2017/03/11	
Peak Radiated Spurious Emission (Harmonic) (dBuV/m)	802.11b	45.27	46.25	-0.98
	11n HT20	41.37	43.54	-2.17
	BT (1Mbps)	40.93	41.49	-0.56
	BT-LE	40.63	42.23	-1.60
	ANT+	37.66	39.64	-1.98
	Test date	2017/02/11 – 2017/02/24	2017/03/03 – 2017/03/11	

**Conclusion:**

WLAN Radiated spurious emission test against the variant model for non-cellular part based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result (power levels measured are within 0.5dB, and the worst case of RSE spot check verification based on the worst condition from the original model is within 3dB, and are compliance with the limits), the test data from the original model is representative for the variant model.

The unwanted, harmonics, radiated spurious emission is reported peak measurement only due to spurious lower than 20dB than the limit.

The detail test results can be found in this document, Appendix A, hereafter.

1.4.4 Reference detail Section

Equipment Class	Reference FCC ID	Type Grant/Permissive Change	Reference Application	Folder Test/RF Exposure	Report Title
DTS	2AJOTTA-1044	Original Grant	FR712016B	Part 15C	All sections applicable
			FR712016C	Part 15C	All sections applicable
			FA712016	RF Exposure	All sections applicable
DSS	2AJOTTA-1044	Original Grant	FR712016A	Part 15C	All sections applicable
			FA712016	RF Exposure	All sections applicable
DXX	2AJOTTA-1044	Original Grant	FR712016D	Part 15C	All sections applicable
			FA712016	RF Exposure	All sections applicable
NII	2AJOTTA-1044	Original Grant	FR712016F FR712016G FZ712016	Part 15E	Conducted sections applicable
			FA712016	RF Exposure	All sections applicable



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH11-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	-	-	165	5825

Note: The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.



2.2 Test Mode

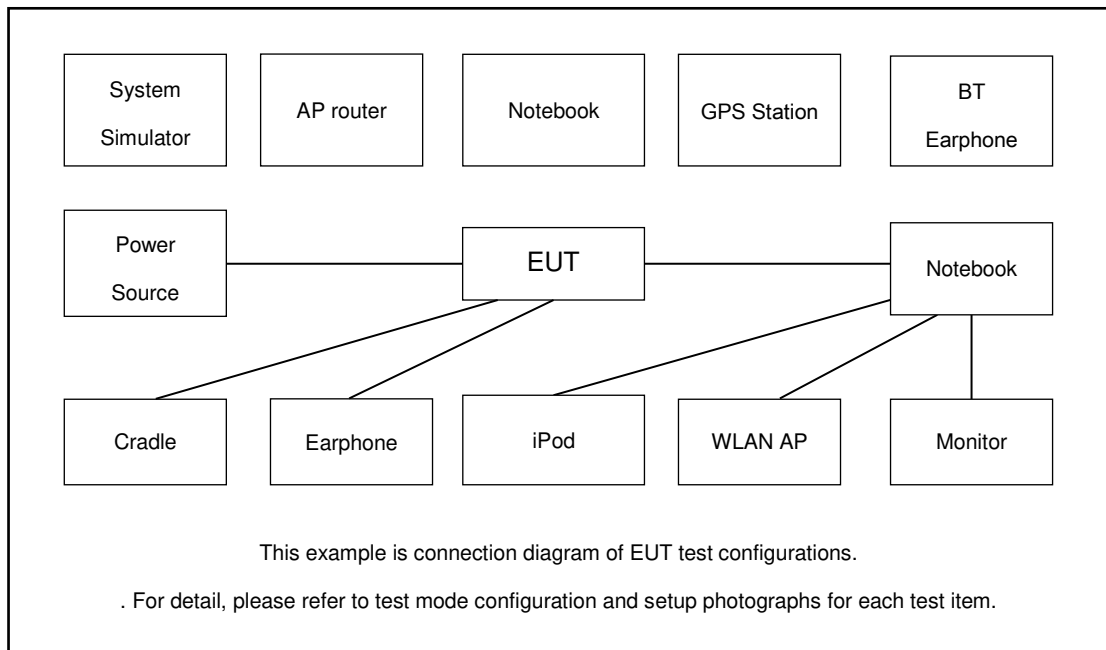
Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN (5GHz) Link + NFC On + Earphone + USB Cable (Charging from Adapter) + SIM 1

Ch. #		Band IV : 5725-5850 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	149	149	151
M	Middle	157	157	-
H	High	165	165	159

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
3.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
4.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, programmed RF utility, "QRCT" installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

3 Test Result

3.1 Maximum Conducted Output Power Measurement

3.1.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

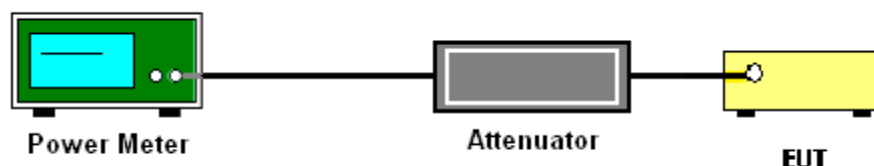
3.1.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.1.4 Test Setup



3.1.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.2 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.2.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part 15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

- (3) KDB 789033 D02 General UNII Test Procedures New Rules v01r03 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.



3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

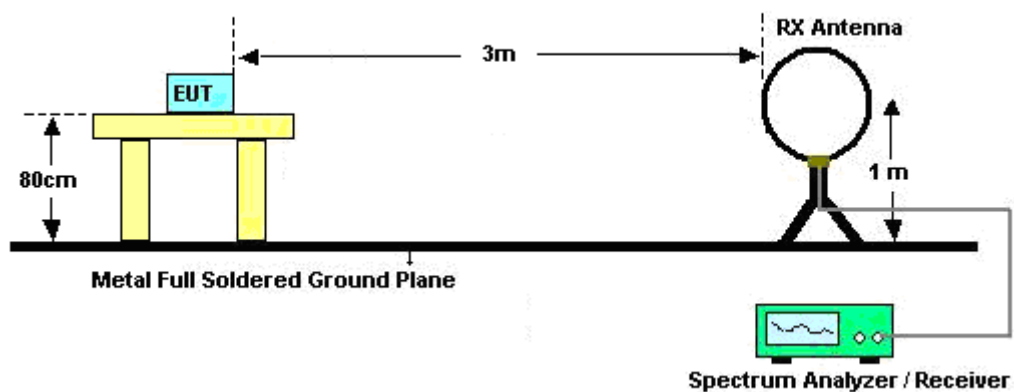
3.2.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.

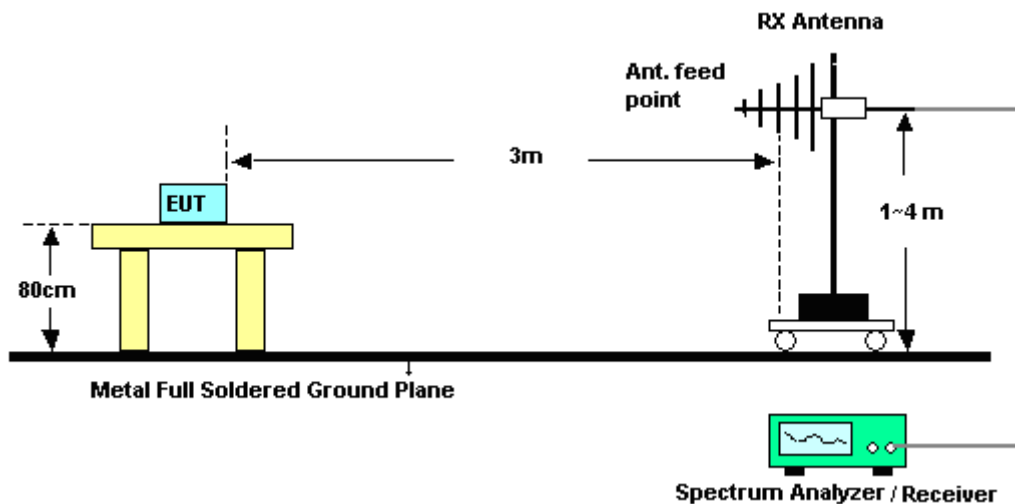
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.2.4 Test Setup

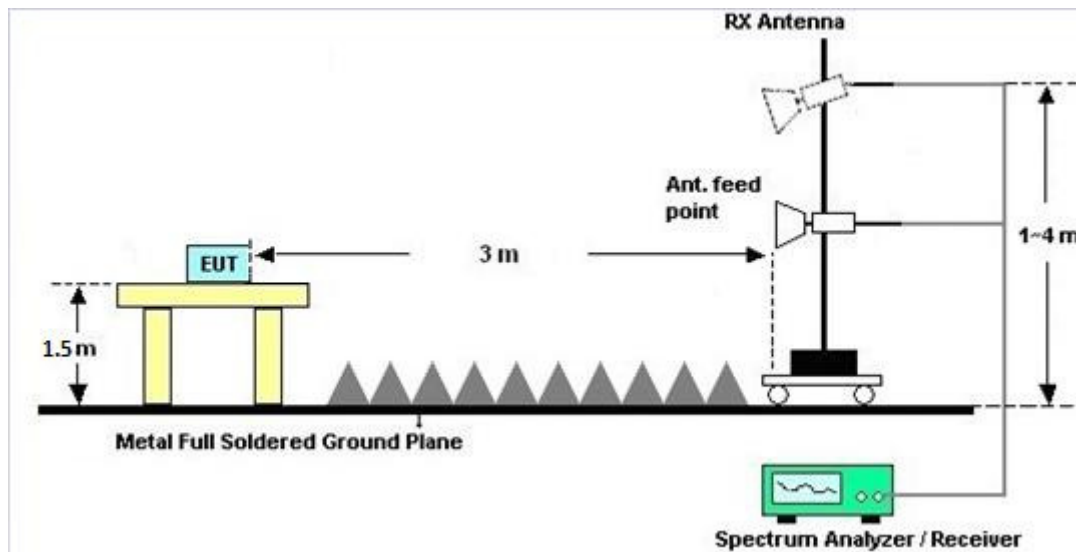
For radiated emissions below 30MHz



For radiated emissions from 30MHz to 1GHz



For radiated emissions above 1GHz



3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.2.7 Duty Cycle

Please refer to Appendix E.

3.2.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.3 AC Conducted Emission Measurement

3.3.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

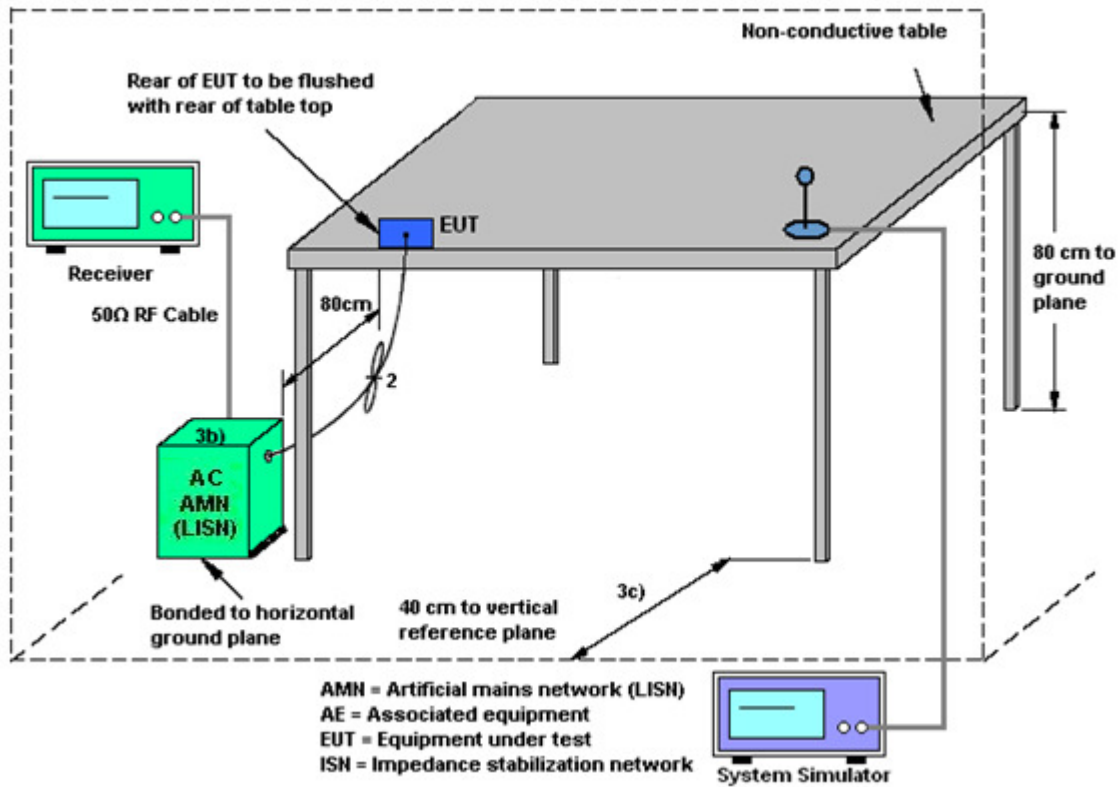
3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.3.4 Test Setup



3.3.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.4 Automatically Discontinue Transmission

3.4.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.5 Antenna Requirements

3.5.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.5.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.5.3 Antenna Gain

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	0932001	300MHz~40GHz	Sep. 29, 2016	Feb. 09, 2017 ~ Feb. 27, 2017	Sep. 28, 2017	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	0846202	300MHz~40GHz	Sep. 29, 2016	Feb. 09, 2017 ~ Feb. 27, 2017	Sep. 28, 2017	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz-40GHz	Jul. 17, 2016	Feb. 09, 2017 ~ Feb. 27, 2017	Jul. 16, 2017	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40℃ ~90℃	Sep. 01, 2016	Feb. 09, 2017 ~ Feb. 27, 2017	Aug. 31, 2017	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890094	1V~20V 0.5A~5A	Oct. 11, 2016	Feb. 09, 2017 ~ Feb. 27, 2017	Oct. 10, 2017	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Feb. 11, 2017	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2016	Feb. 11, 2017	Aug. 29, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 29, 2016	Feb. 11, 2017	Nov. 28, 2017	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 05, 2017	Feb. 11, 2017	Jan. 04, 2018	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 05, 2017	Feb. 11, 2017	Jan. 04, 2018	Conduction (CO05-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Mar. 03, 2017 ~ Mar. 11, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Mar. 03, 2017 ~ Mar. 11, 2017	Sep. 01, 2017	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D	35414	30MHz~1GHz	Oct. 15, 2016	Mar. 03, 2017 ~ Mar. 11, 2017	Oct. 14, 2017	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1522	1GHz ~ 18GHz	Mar. 30, 2016	Mar. 03, 2017 ~ Mar. 11, 2017	Mar. 31, 2017	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 10, 2016	Mar. 03, 2017 ~ Mar. 11, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY52350276	10Hz ~ 44GHZ	Mar. 21, 2016	Mar. 03, 2017 ~ Mar. 11, 2017	Mar. 20, 2017	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Mar. 03, 2017 ~ Mar. 11, 2017	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Mar. 03, 2017 ~ Mar. 11, 2017	N/A	Radiation (03CH11-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800	2025787	1GHz~18GHz	Feb. 13, 2017	Mar. 03, 2017 ~ Mar. 11, 2017	Feb. 12, 2018	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917058 4	18GHz- 40GHz	Nov. 08, 2016	Mar. 03, 2017 ~ Mar. 11, 2017	Nov. 07, 2017	Radiation (03CH11-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Derek Hsu	Temperature:	21~25	°C
Test Date:	2017/2/9~2017/02/27	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	149	5745	0.59	14.30	30.00	-5.20		Pass
11a	6Mbps	1	157	5785	0.59	14.29	30.00	-5.20		Pass
11a	6Mbps	1	165	5825	0.59	14.08	30.00	-5.20		Pass
HT20	MCS 0	1	149	5745	0.63	14.40	30.00	-5.20		Pass
HT20	MCS 0	1	157	5785	0.63	14.35	30.00	-5.20		Pass
HT20	MCS 0	1	165	5825	0.63	14.13	30.00	-5.20		Pass
HT40	MCS 0	1	151	5755	0.63	14.40	30.00	-5.20		Pass
HT40	MCS 0	1	159	5795	0.63	14.00	30.00	-5.20		Pass

TEST RESULTS DATA
Frequency Stability

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6M bps	1	149	5745	5744.950	-0.050	-8.70	55	3.8	
11a	6M bps	1	149	5745	5745.000	0.000	0.00	-30	3.8	
11a	6M bps	1	149	5745	5745.000	0.000	0.00	20	4.2	
11a	6M bps	1	149	5745	5744.950	-0.050	-8.70	20	3.5	
11a	6M bps	1	149	5745	5745.000	0.000	0.00	20	3.8	



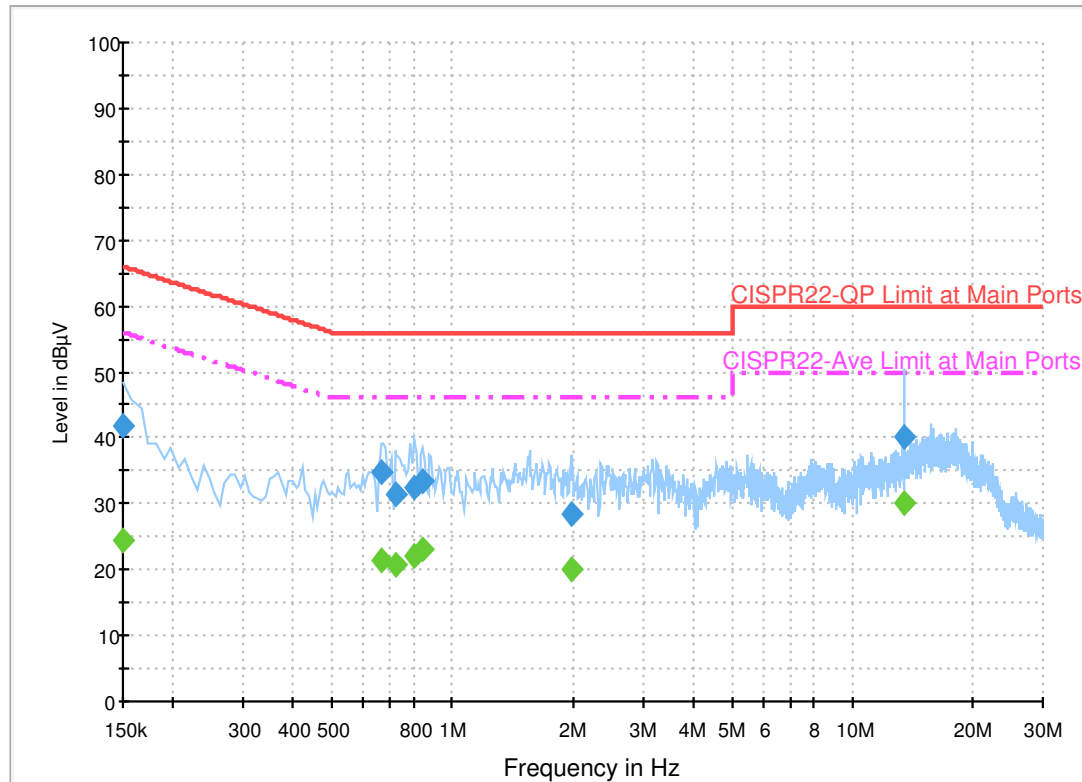
Appendix B. AC Conducted Emission Test Results

Test Engineer :	Arthur Hsieh	Temperature :	21~22°C
		Relative Humidity :	58~60%

EUT Information

Report NO : 712016-02
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

ENV216 Auto Test FCC Power Bar - L



Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	41.8	Off	L1	19.6	24.2	66.0
0.662000	34.8	Off	L1	19.6	21.2	56.0
0.718000	31.5	Off	L1	19.6	24.5	56.0
0.806000	32.5	Off	L1	19.6	23.5	56.0
0.846000	33.5	Off	L1	19.6	22.5	56.0
1.998000	28.6	Off	L1	19.6	27.4	56.0
13.558000	40.2	Off	L1	20.2	19.8	60.0

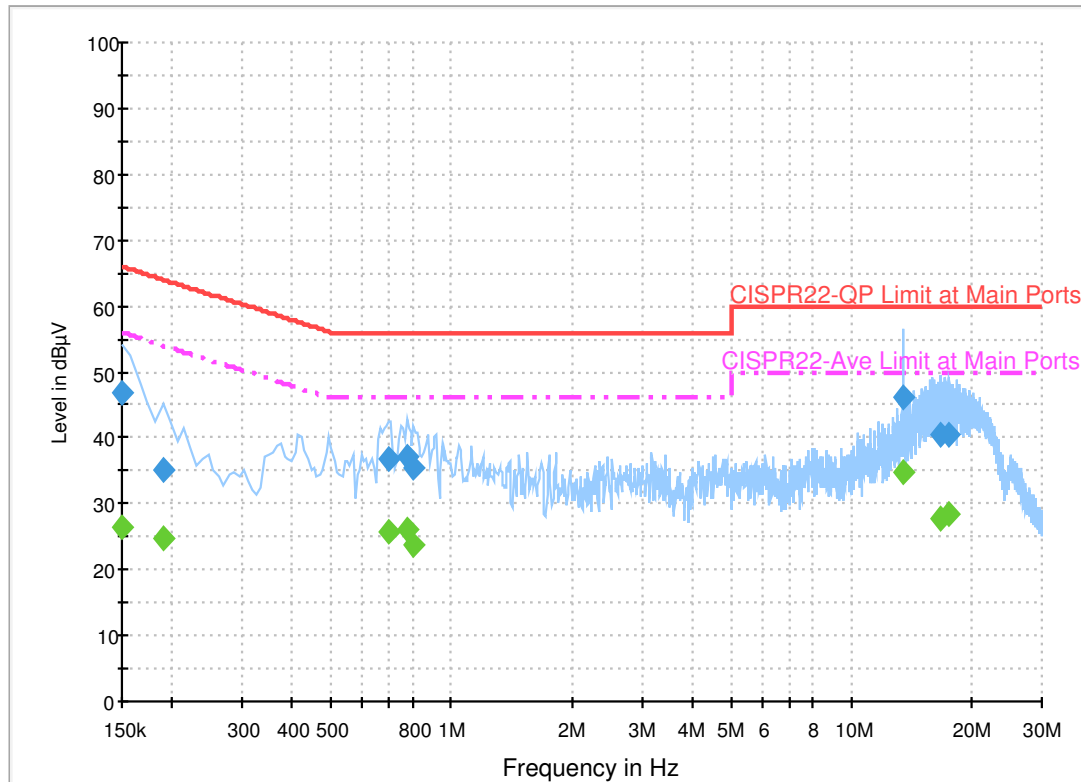
Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	24.5	Off	L1	19.6	31.5	56.0
0.662000	21.3	Off	L1	19.6	24.7	46.0
0.718000	20.6	Off	L1	19.6	25.4	46.0
0.806000	22.1	Off	L1	19.6	23.9	46.0
0.846000	23.1	Off	L1	19.6	22.9	46.0
1.998000	20.2	Off	L1	19.6	25.8	46.0
13.558000	30.2	Off	L1	20.2	19.8	50.0

EUT Information

Report NO : 712016-02
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

ENV216 Auto Test FCC Power Bar - N



Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	46.8	Off	N	19.5	19.2	66.0
0.190000	35.0	Off	N	19.5	29.0	64.0
0.694000	36.7	Off	N	19.5	19.3	56.0
0.774000	37.2	Off	N	19.5	18.8	56.0
0.806000	35.6	Off	N	19.6	20.4	56.0
13.558000	46.1	Off	N	20.3	13.9	60.0
16.766000	40.3	Off	N	20.5	19.7	60.0
17.462000	40.5	Off	N	20.5	19.5	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	26.6	Off	N	19.5	29.4	56.0
0.190000	24.8	Off	N	19.5	29.2	54.0
0.694000	25.9	Off	N	19.5	20.1	46.0
0.774000	26.1	Off	N	19.5	19.9	46.0
0.806000	23.7	Off	N	19.6	22.3	46.0
13.558000	34.8	Off	N	20.3	15.2	50.0
16.766000	27.8	Off	N	20.5	22.2	50.0
17.462000	28.4	Off	N	20.5	21.6	50.0



Appendix C. Radiated Spurious Emission

Test Engineer :	J.C. Liang, Jacky Hung, and Ken Wu	Temperature :	20~24°C
		Relative Humidity :	50~54%

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		5623.4	51.07	-17.13	68.2	39.81	32.87	11.47	33.08	200	114	P	H
		5678.8	49.49	-40.06	89.55	38.19	32.94	11.47	33.11	200	114	P	H
		5700.4	50.86	-54.45	105.31	39.55	32.97	11.46	33.12	200	114	P	H
		5724.2	51.6	-68.78	120.38	40.26	33.01	11.46	33.13	200	114	P	H
	*	5745	95.16	-	-	83.81	33.04	11.46	33.15	200	114	P	H
	*	5745	86.05	-	-	74.7	33.04	11.46	33.15	200	114	A	H
													H
													H
		5630	50.27	-17.93	68.2	39.03	32.87	11.47	33.1	311	89	P	V
		5693.8	50.36	-50.27	100.63	39.04	32.97	11.47	33.12	311	89	P	V
		5705	49.43	-57.17	106.6	38.11	32.99	11.46	33.13	311	89	P	V
		5723.4	50.62	-67.93	118.55	39.28	33.01	11.46	33.13	311	89	P	V
	*	5745	93.86	-	-	82.51	33.04	11.46	33.15	311	89	P	V
	*	5745	84.41	-	-	73.06	33.04	11.46	33.15	311	89	A	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		5610.6	51.54	-16.66	68.2	40.3	32.84	11.48	33.08	200	110	P	H
		5682.4	50.23	-41.98	92.21	38.94	32.94	11.47	33.12	200	110	P	H
		5719.6	50.42	-60.27	110.69	39.08	33.01	11.46	33.13	200	110	P	H
		5721.4	48.72	-65.27	113.99	37.38	33.01	11.46	33.13	200	110	P	H
	*	5785	94.9	-	-	83.53	33.09	11.45	33.17	200	110	P	H
	*	5785	85.64	-	-	74.27	33.09	11.45	33.17	200	110	A	H
		5853.2	49.93	-64.97	114.9	38.41	33.18	11.53	33.19	200	110	P	H
		5872.4	49.75	-56.18	105.93	38.13	33.23	11.6	33.21	200	110	P	H
		5895.2	50.94	-39.27	90.21	39.3	33.26	11.6	33.22	200	110	P	H
		5940.2	49.82	-18.38	68.2	37.99	33.33	11.74	33.24	200	110	P	H
													H
													H
		5619.6	50.12	-18.08	68.2	38.85	32.87	11.48	33.08	333	83	P	V
		5679.4	50.9	-39.1	90	39.61	32.94	11.47	33.12	333	83	P	V
		5712.8	50.17	-58.62	108.79	38.85	32.99	11.46	33.13	333	83	P	V
		5723.8	49.42	-70.04	119.46	38.08	33.01	11.46	33.13	333	83	P	V
	*	5785	93.49	-	-	82.12	33.09	11.45	33.17	333	83	P	V
	*	5785	83.61	-	-	72.24	33.09	11.45	33.17	333	83	A	V
		5851.8	49.82	-68.28	118.1	38.3	33.18	11.53	33.19	333	83	P	V
		5857.6	50.92	-59.15	110.07	39.37	33.21	11.53	33.19	333	83	P	V
		5883.2	51.36	-47.75	99.11	39.74	33.23	11.6	33.21	333	83	P	V
		5945.4	51.77	-16.43	68.2	39.94	33.33	11.74	33.24	333	83	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz	*	5825	94.94	-	-	83.43	33.16	11.53	33.18	220	113	P	H
	*	5825	86.02	-	-	74.51	33.16	11.53	33.18	220	113	A	H
		5850	51.61	-70.59	122.2	40.09	33.18	11.53	33.19	220	113	P	H
		5863	50.47	-58.09	108.56	38.87	33.21	11.6	33.21	220	113	P	H
		5912	50.76	-27.03	77.79	39.04	33.28	11.67	33.23	220	113	P	H
		5945.2	49.97	-18.23	68.2	38.14	33.33	11.74	33.24	220	113	P	H
													H
													H
	*	5825	94.16	-	-	82.65	33.16	11.53	33.18	321	83	P	V
	*	5825	84.4	-	-	72.89	33.16	11.53	33.18	321	83	A	V
		5852.8	50.12	-65.7	115.82	38.6	33.18	11.53	33.19	321	83	P	V
		5859.8	50.43	-59.02	109.45	38.9	33.21	11.53	33.21	321	83	P	V
		5877	51.53	-52.18	103.71	39.91	33.23	11.6	33.21	321	83	P	V
		5947.4	50.62	-17.58	68.2	38.79	33.33	11.74	33.24	321	83	P	V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	45.25	-28.75	74	55.67	39.12	15.85	65.39	100	0	P	H
		17235	49.65	-18.55	68.2	50.51	42.84	20.57	64.27	100	0	P	H
													H
													H
		11490	45.27	-28.73	74	55.69	39.12	15.85	65.39	100	0	P	V
		17235	49.95	-18.25	68.2	50.81	42.84	20.57	64.27	100	0	P	V
													V
													V
802.11a CH 157 5785MHz		11570	45.33	-28.67	74	55.72	39.07	15.91	65.37	100	0	P	H
		17355	49.78	-18.42	68.2	49.85	43.26	20.78	64.11	100	0	P	H
													H
													H
		11570	44.65	-29.35	74	55.04	39.07	15.91	65.37	100	0	P	V
		17355	48.74	-19.46	68.2	48.81	43.26	20.78	64.11	100	0	P	V
													V
													V
802.11a CH 165 5825MHz		11650	47.58	-26.42	74	57.91	39.04	15.97	65.34	100	0	P	H
		17475	49.66	-18.54	68.2	48.94	43.68	20.99	63.95	100	0	P	H
													H
													H
		11650	45.76	-28.24	74	56.09	39.04	15.97	65.34	100	0	P	V
		17475	49.36	-18.84	68.2	48.64	43.68	20.99	63.95	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												


Band 4 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		5636.6	49.99	-18.21	68.2	38.73	32.89	11.47	33.1	200	113	P	H
		5671.4	50.23	-33.85	84.08	38.93	32.94	11.47	33.11	200	113	P	H
		5713.4	50.12	-58.83	108.95	38.8	32.99	11.46	33.13	200	113	P	H
		5725	52.3	-69.9	122.2	40.96	33.01	11.46	33.13	200	113	P	H
	*	5745	96.37	-	-	85.02	33.04	11.46	33.15	200	113	P	H
	*	5745	85.95	-	-	74.6	33.04	11.46	33.15	200	113	A	H
													H
													H
		5616.6	50.36	-17.84	68.2	39.09	32.87	11.48	33.08	313	83	P	V
		5692.6	51.37	-48.37	99.74	40.05	32.97	11.47	33.12	313	83	P	V
		5704.4	49.5	-56.93	106.43	38.17	32.99	11.46	33.12	313	83	P	V
		5725	52.26	-69.94	122.2	40.92	33.01	11.46	33.13	313	83	P	V
	*	5745	94.05	-	-	82.7	33.04	11.46	33.15	313	83	P	V
	*	5745	84.5	-	-	73.15	33.04	11.46	33.15	313	83	A	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 157 5785MHz		5633.4	50.8	-17.4	68.2	39.25	32.89	11.76	33.1	220	119	P	H
		5683.8	50.87	-42.38	93.25	39.22	32.97	11.8	33.12	220	119	P	H
		5715.4	50.24	-59.27	109.51	38.56	32.99	11.82	33.13	220	119	P	H
		5721.6	49.22	-65.23	114.45	37.51	33.01	11.83	33.13	220	119	P	H
	*	5785	98.62	-	-	86.82	33.09	11.88	33.17	220	119	P	H
	*	5785	91	-	-	79.2	33.09	11.88	33.17	220	119	A	H
		5852.8	50.06	-65.76	115.82	38.1	33.18	11.97	33.19	220	119	P	H
		5867.2	50.34	-57.04	107.38	38.34	33.21	12	33.21	220	119	P	H
		5912.2	50.87	-26.77	77.64	38.77	33.28	12.05	33.23	220	119	P	H
		5949	52.53	-15.67	68.2	40.33	33.33	12.11	33.24	220	119	P	H
													H
													H
		5620.2	50.18	-18.02	68.2	38.65	32.87	11.74	33.08	216	100	P	V
		5676.4	51.32	-36.46	87.78	39.7	32.94	11.79	33.11	216	100	P	V
		5705.6	49.35	-57.42	106.77	37.67	32.99	11.82	33.13	216	100	P	V
		5720	49.01	-61.79	110.8	37.3	33.01	11.83	33.13	216	100	P	V
	*	5785	94.4	-	-	82.6	33.09	11.88	33.17	216	100	P	V
	*	5785	86.9	-	-	75.1	33.09	11.88	33.17	216	100	A	V
		5851.8	49.71	-68.39	118.1	37.75	33.18	11.97	33.19	216	100	P	V
		5867.8	52.05	-55.16	107.21	40.05	33.21	12	33.21	216	100	P	V
		5888	51.48	-44.07	95.55	39.41	33.26	12.03	33.22	216	100	P	V
		5943.8	51.53	-16.67	68.2	39.33	33.33	12.11	33.24	216	100	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz	*	5825	98.27	-	-	86.37	33.16	11.92	33.18	227	113	P	H
	*	5825	90.26	-	-	78.36	33.16	11.92	33.18	227	113	A	H
		5853.2	50.97	-63.93	114.9	39.01	33.18	11.97	33.19	227	113	P	H
		5866.2	50.93	-56.73	107.66	38.93	33.21	12	33.21	227	113	P	H
		5905.8	51.41	-30.96	82.37	39.3	33.28	12.05	33.22	227	113	P	H
		5934.6	52.02	-16.18	68.2	39.85	33.3	12.11	33.24	227	113	P	H
													H
													H
	*	5825	93.95	-	-	82.05	33.16	11.92	33.18	217	100	P	V
	*	5825	86.26	-	-	74.36	33.16	11.92	33.18	217	100	A	V
		5851	50.4	-69.52	119.92	38.44	33.18	11.97	33.19	217	100	P	V
		5871.8	51.75	-54.34	106.09	39.73	33.23	12	33.21	217	100	P	V
		5904.4	51.65	-31.76	83.41	39.56	33.26	12.05	33.22	217	100	P	V
		5938.8	51.43	-16.77	68.2	39.23	33.33	12.11	33.24	217	100	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		11490	45.87	-28.13	74	56.29	39.12	15.85	65.39	100	0	P	H
		17235	49.98	-18.22	68.2	50.84	42.84	20.57	64.27	100	0	P	H
													H
													H
		11490	45.45	-28.55	74	55.87	39.12	15.85	65.39	100	0	P	V
		17235	49.93	-18.27	68.2	50.79	42.84	20.57	64.27	100	0	P	V
													V
													V
802.11n HT20 CH 157 5785MHz		11570	45.53	-28.47	74	55.92	39.07	15.91	65.37	100	0	P	H
		17355	49.76	-18.44	68.2	49.83	43.26	20.78	64.11	100	0	P	H
													H
													H
		11570	44.13	-29.87	74	54.52	39.07	15.91	65.37	100	0	P	V
		17355	48.91	-19.29	68.2	48.98	43.26	20.78	64.11	100	0	P	V
													V
													V
802.11n HT20 CH 165 5825MHz		11650	44.81	-29.19	74	55.14	39.04	15.97	65.34	100	0	P	H
		17475	49.15	-19.05	68.2	48.43	43.68	20.99	63.95	100	0	P	H
													H
													H
		11650	44.82	-29.18	74	55.15	39.04	15.97	65.34	100	0	P	V
		17475	50.76	-17.44	68.2	50.04	43.68	20.99	63.95	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		5629	50.75	-17.45	68.2	39.22	32.87	11.76	33.1	240	115	P	H
		5699.8	49.92	-55.13	105.05	38.25	32.97	11.82	33.12	240	115	P	H
		5719	53.94	-56.58	110.52	42.23	33.01	11.83	33.13	240	115	P	H
		5724.4	55.65	-65.18	120.83	43.94	33.01	11.83	33.13	240	115	P	H
	*	5755	95.53	-	-	83.76	33.06	11.86	33.15	240	115	P	H
	*	5755	88.02	-	-	76.25	33.06	11.86	33.15	240	115	A	H
		5853	50.04	-65.32	115.36	38.08	33.18	11.97	33.19	240	115	P	H
		5862	51.84	-57	108.84	39.84	33.21	12	33.21	240	115	P	H
		5876	51.22	-53.24	104.46	39.2	33.23	12	33.21	240	115	P	H
		5925.2	50.61	-17.59	68.2	38.46	33.3	12.08	33.23	240	115	P	H
													H
													H
		5623.4	51.06	-17.14	68.2	39.53	32.87	11.74	33.08	220	101	P	V
		5686.8	51.44	-44.02	95.46	39.79	32.97	11.8	33.12	220	101	P	V
		5711.4	52.1	-56.29	108.39	40.42	32.99	11.82	33.13	220	101	P	V
		5721.8	53.7	-61.2	114.9	41.99	33.01	11.83	33.13	220	101	P	V
	*	5755	92.19	-	-	80.42	33.06	11.86	33.15	220	101	P	V
	*	5755	84.73	-	-	72.96	33.06	11.86	33.15	220	101	A	V
		5851.6	50.13	-68.42	118.55	38.17	33.18	11.97	33.19	220	101	P	V
		5862	50.61	-58.23	108.84	38.61	33.21	12	33.21	220	101	P	V
		5907.8	50.55	-30.34	80.89	38.44	33.28	12.05	33.22	220	101	P	V
		5944.2	51.88	-16.32	68.2	39.68	33.33	12.11	33.24	220	101	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5607.6	50.28	-17.92	68.2	38.79	32.84	11.73	33.08	219	119	P	H
		5677.4	50.81	-37.71	88.52	39.19	32.94	11.79	33.11	219	119	P	H
		5701.2	50.82	-54.72	105.54	39.13	32.99	11.82	33.12	219	119	P	H
		5723.2	50.04	-68.06	118.1	38.33	33.01	11.83	33.13	219	119	P	H
	*	5795	95.65	-	-	83.82	33.11	11.89	33.17	219	119	P	H
	*	5795	87.8	-	-	75.97	33.11	11.89	33.17	219	119	A	H
		5850.6	50.86	-69.97	120.83	38.9	33.18	11.97	33.19	219	119	P	H
		5861.8	51.33	-57.56	108.89	39.33	33.21	12	33.21	219	119	P	H
		5905.8	51.23	-31.14	82.37	39.12	33.28	12.05	33.22	219	119	P	H
		5948.6	50.03	-18.17	68.2	37.83	33.33	12.11	33.24	219	119	P	H
													H
													H
		5629.8	51.98	-16.22	68.2	40.45	32.87	11.76	33.1	219	97	P	V
		5688.6	50.89	-45.9	96.79	39.24	32.97	11.8	33.12	219	97	P	V
		5702.4	50.69	-55.18	105.87	39	32.99	11.82	33.12	219	97	P	V
		5723.4	48.85	-69.7	118.55	37.14	33.01	11.83	33.13	219	97	P	V
	*	5795	90.48	-	-	78.65	33.11	11.89	33.17	219	97	P	V
	*	5795	83.62	-	-	71.79	33.11	11.89	33.17	219	97	A	V
		5852.4	50.71	-66.02	116.73	38.75	33.18	11.97	33.19	219	97	P	V
		5858	50.82	-59.14	109.96	38.85	33.21	11.97	33.21	219	97	P	V
		5892.4	52.22	-40.07	92.29	40.15	33.26	12.03	33.22	219	97	P	V
		5939.6	51.3	-16.9	68.2	39.1	33.33	12.11	33.24	219	97	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		11510	44.77	-29.23	74	53.82	39.1	17.25	65.4	100	0	P	H
		17265	49.03	-19.17	68.2	49.03	42.96	21.27	64.23	100	0	P	H
													H
													H
		11510	45.34	-28.66	74	54.39	39.1	17.25	65.4	100	0	P	V
		17265	49.65	-18.55	68.2	49.65	42.96	21.27	64.23	100	0	P	V
													V
													V
802.11n HT40 CH 159 5795MHz		11590	43.91	-30.09	74	52.89	39.07	17.32	65.37	100	0	P	H
		17385	49.22	-18.98	68.2	48.53	43.38	21.37	64.06	100	0	P	H
													H
													H
		11590	45.13	-28.87	74	54.11	39.07	17.32	65.37	100	0	P	V
		17385	49.87	-18.33	68.2	49.18	43.38	21.37	64.06	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

Emission below 1GHz

5GHz WIFI 802.11n HT20 (LF @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11n HT20 LF		99.93	23.97	-19.53	43.5	38.84	16.1	1.51	32.48	-	-	P	H
		199.56	24.12	-19.38	43.5	38.87	16	2.14	32.89	-	-	P	H
		226.56	25.69	-20.31	46	39.44	16.69	2.31	32.75	-	-	P	H
		696.9	28.35	-17.65	46	30.16	26.67	3.99	32.47	-	-	P	H
		788.6	33.45	-12.55	46	33.28	28.16	4.22	32.21	-	-	P	H
		949.6	33.72	-12.28	46	29.68	30.6	4.64	31.2	155	284	P	H
													H
													H
													H
													H
													H
													H
		32.43	34.49	-5.51	40	41.96	24.14	0.88	32.49	199	336	P	V
		38.1	33.96	-6.04	40	44.15	21.42	0.88	32.49	-	-	P	V
		59.97	24.35	-15.65	40	43.68	11.9	1.26	32.49	-	-	P	V
		675.2	28.51	-17.49	46	30.61	26.45	3.92	32.47	-	-	P	V
		878.2	31.82	-14.18	46	30.06	29.07	4.46	31.77	-	-	P	V
		925.8	33.26	-12.74	46	30.14	29.94	4.6	31.42	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	J.C. Liang, Jacky Hung, and Ken Wu	Temperature :	20~24°C
		Relative Humidity :	50~54%

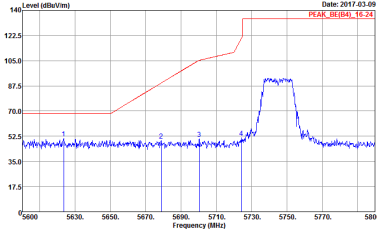
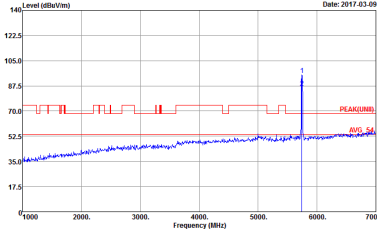
Note symbol

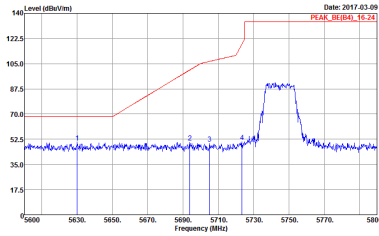
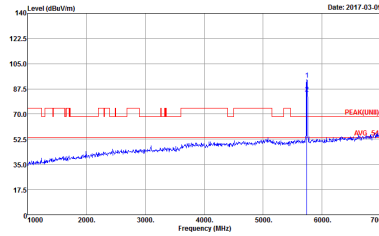
-L	Low channel location
-R	High channel location



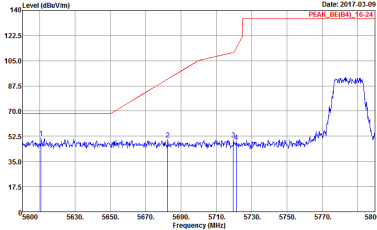
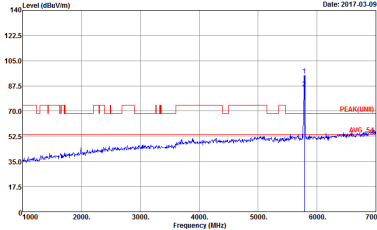
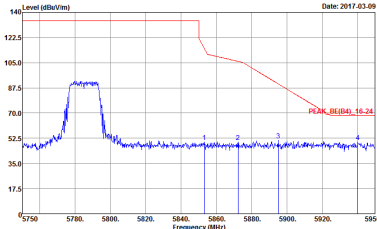
Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

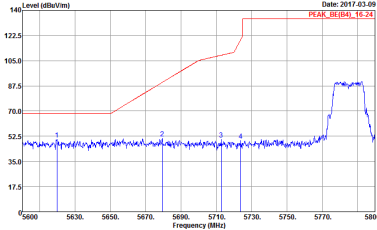
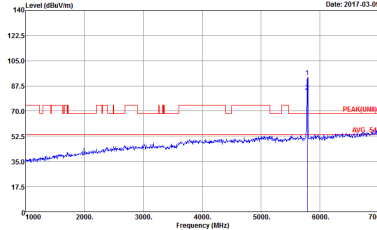
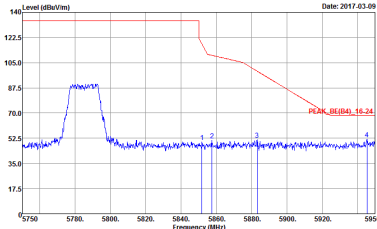
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : PEAK(LINE) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 712016-02

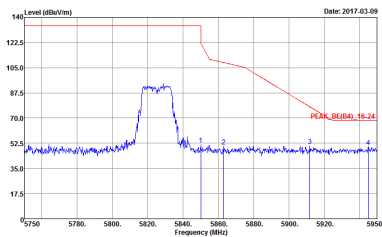
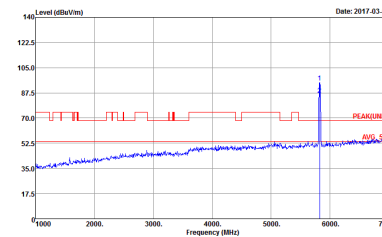
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-14Y Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02	 Site : 03CH11-14Y Condition : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02

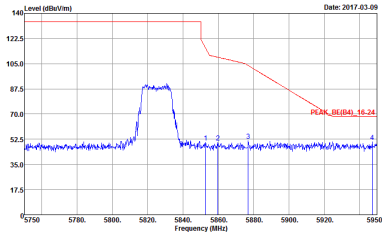
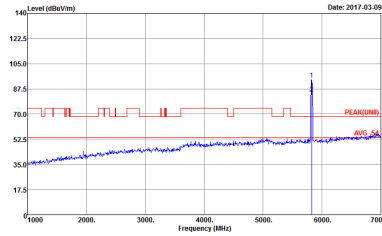


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : PEAK(B4)_16-24 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02
	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02
	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02	Left blank

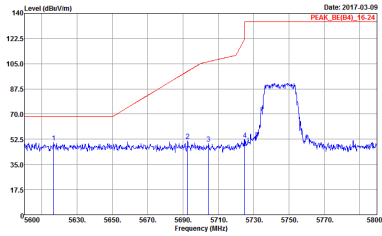
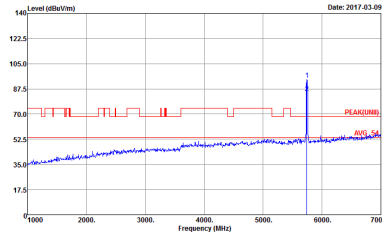
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-14Y Condition : PEAK_B4(B4)_16-24 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02	 Site : 03CH11-14Y Condition : PEAK(B4) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02

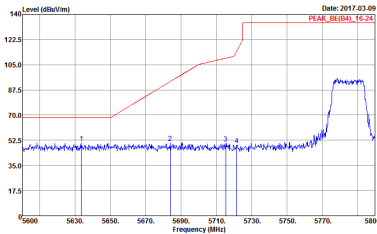
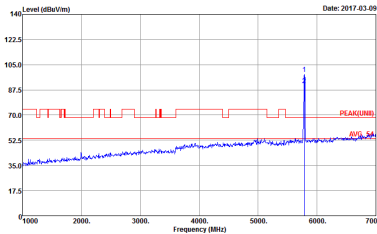
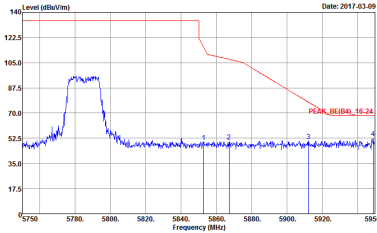
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-14Y Condition : PEAK_B4_16-24 3m HORN 91200-HF VERTICAL Detector : Peak Project : 712016-02	 Site : 03CH11-14Y Condition : PEAK_B4_16-24 3m HORN 91200-HF VERTICAL Detector : Peak Project : 712016-02



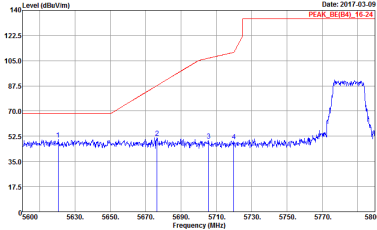
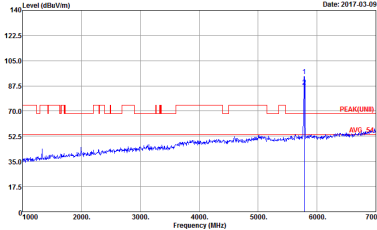
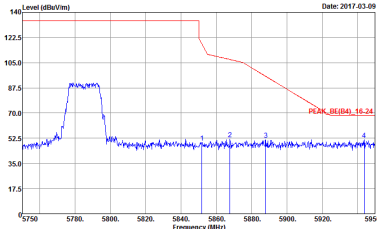
Band 4 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Fundamental
Peak	Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 712016-02	Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 712016-02

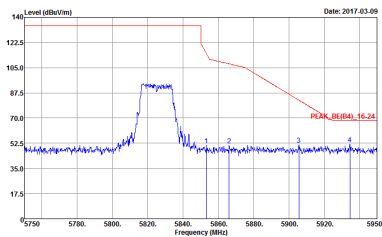
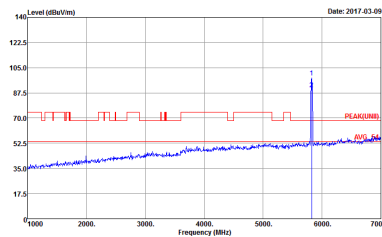
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-14Y Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02	 Site : 03CH11-14Y Condition : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02
	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02
	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-14Y Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Project : 712016-02	 Site : 03CH11-14Y Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Project : 712016-02

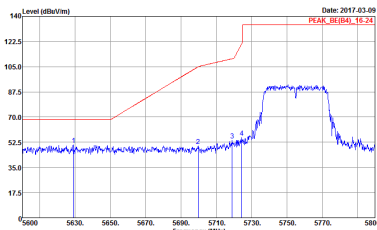
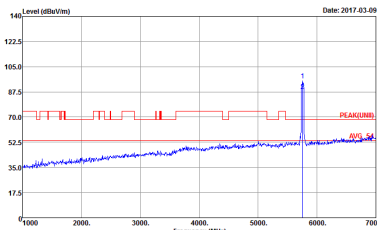
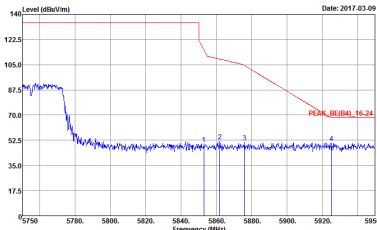


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Vertical	Fundamental
Peak	Site : 03CH11-14Y Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL Detector : Peak Project : 712016-02	Site : 03CH11-14Y Condition : PEAK(FUND) 3m HORN 91200-HF VERTICAL Detector : Peak Project : 712016-02

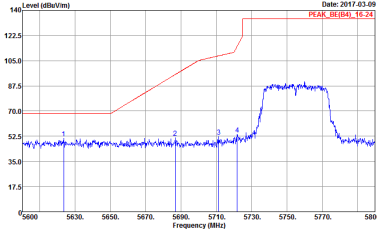
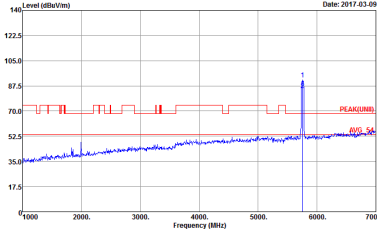
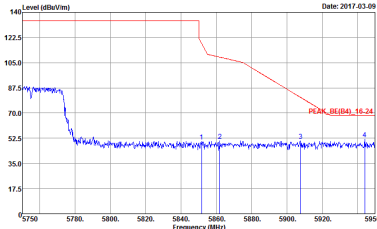


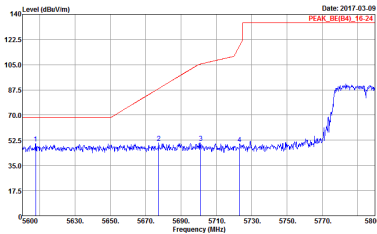
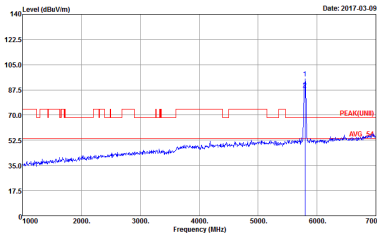
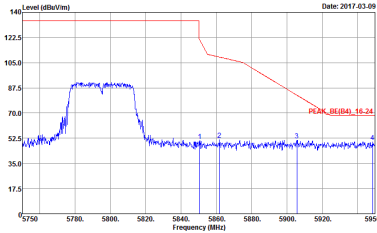
Band 4 5725~5850MHz

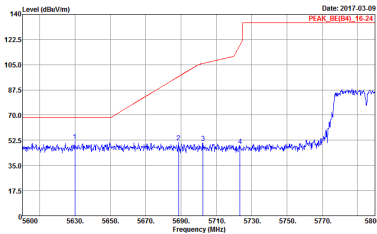
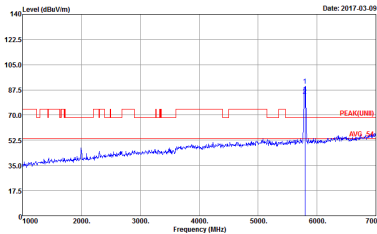
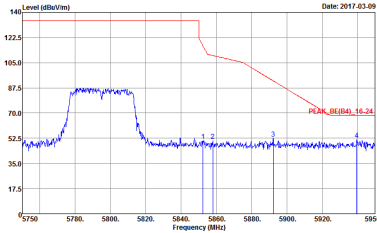
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL Detector : 8BW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 712016-02	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 91200-HF HORIZONTAL Detector : 8BW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 712016-02
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL Detector : 8BW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 712016-02	Left blank

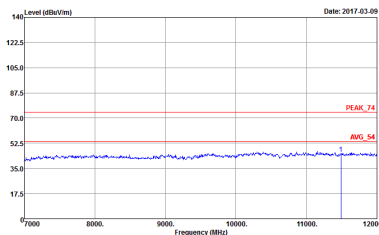
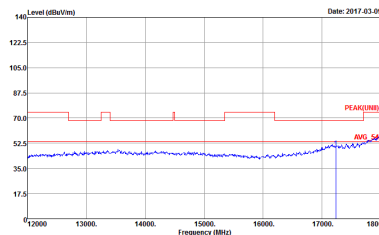


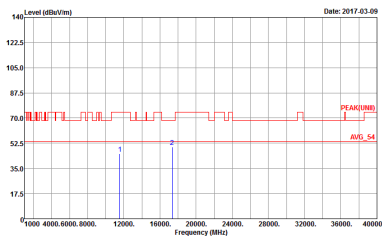
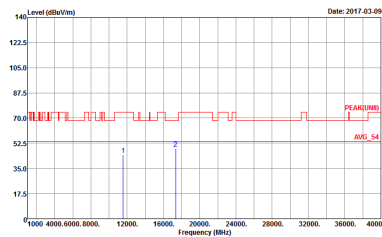
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02
	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02	Left blank

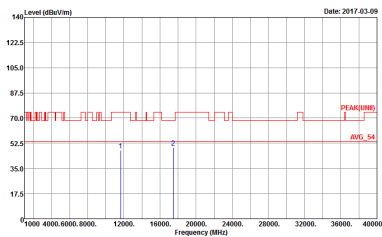
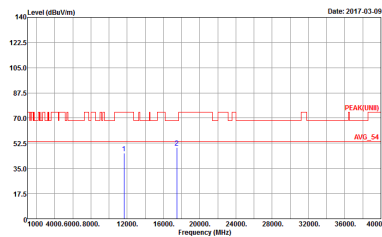
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02
	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02	Left blank

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02
	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02	Left blank

Band 4 5725~5850MHz
Band 4 - 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

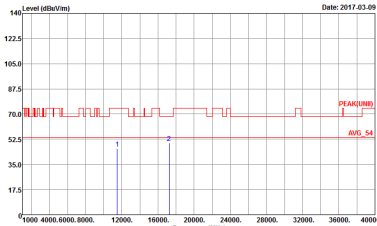
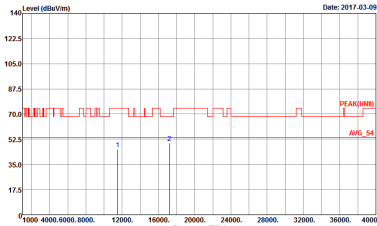
WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02

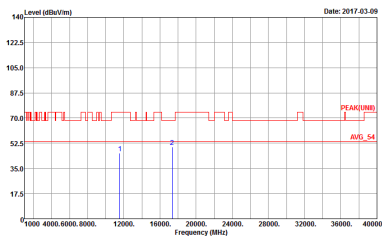
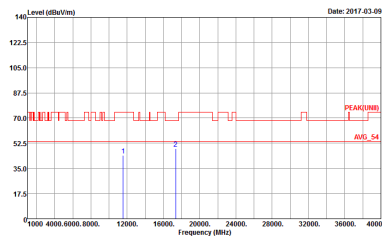
WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-14Y Condition : PEAK(UNII) 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 712016-02	 Site : 03CH11-14Y Condition : PEAK(UNII) 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 712016-02

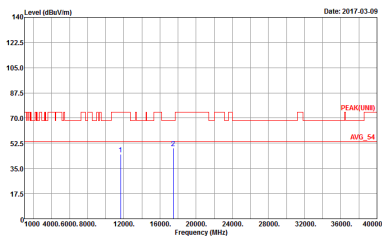
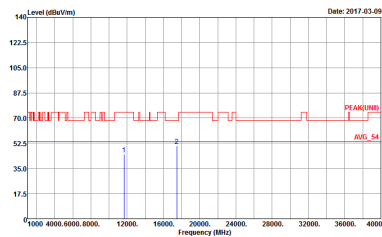
WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-14Y Condition : PEAK(UNII) 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 712016-02	 Site : 03CH11-14Y Condition : PEAK(UNII) 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 712016-02



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

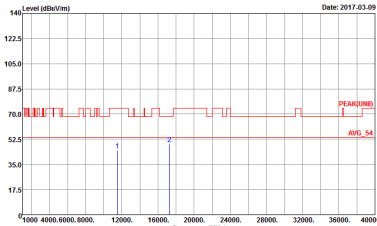
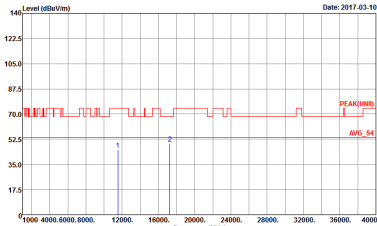
WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CHI1-HY Condition : PEAK(UNIT) 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 712016-02	 Site : 03CHI1-HY Condition : PEAK(UNIT) 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 712016-02

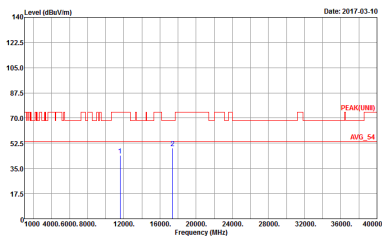
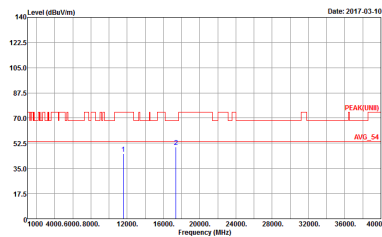
WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-14Y Condition : PEAK(UNII) 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 712016-02	 Site : 03CH11-14Y Condition : PEAK(UNII) 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 712016-02

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-14Y Condition : PEAK(UNII) 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 712016-02	 Site : 03CH11-14Y Condition : PEAK(UNII) 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 712016-02

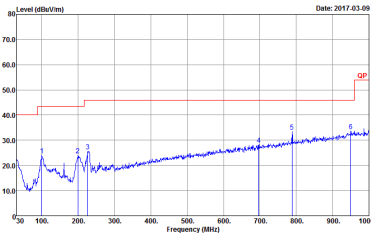
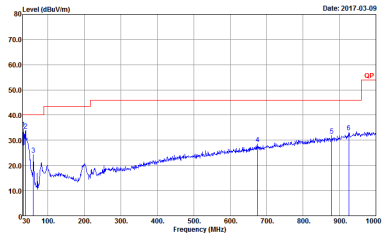


Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CHI1-HY Condition : PEAK(UNIT) 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 712016-02	 Site : 03CHI1-HY Condition : PEAK(UNIT) 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 712016-02

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-14Y Condition : PEAK(UNII) 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 712016-02	 Site : 03CH11-14Y Condition : PEAK(UNII) 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 712016-02

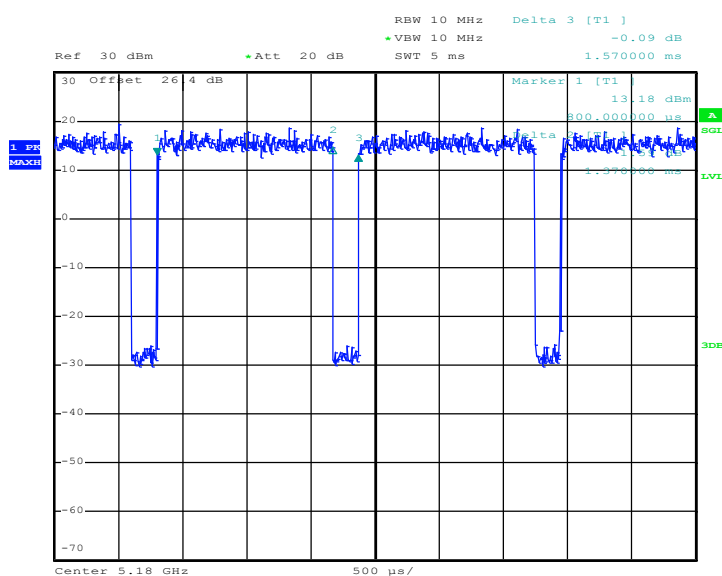
Band 4 5725~5850MHz
Emission below 1GHz
5GHz WIFI 802.11n HT20 (LF)

WIFI	5GHz 5725~5850MHz	
ANT	802.11n HT20 LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC VERTICAL Detector : Peak Project : 712016-02

Appendix E. Duty Cycle Plots

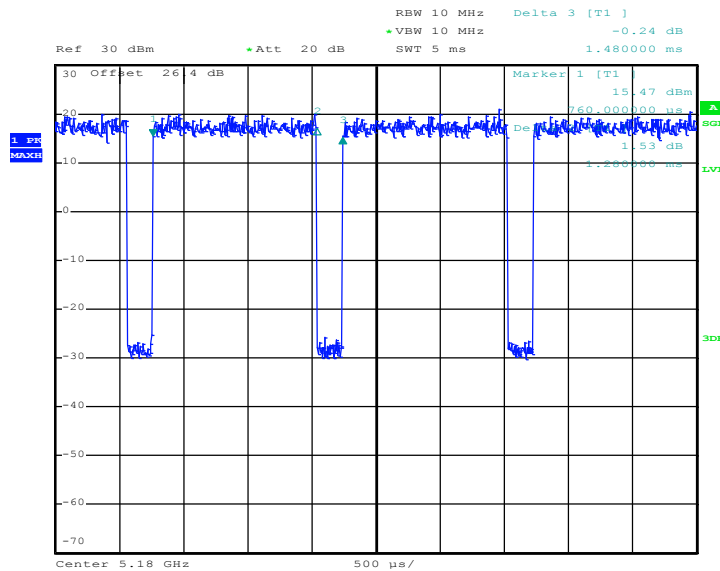
Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11a	87.26	1370	0.73	1kHz
5GHz 802.11n HT20	86.49	1280	0.78	1kHz
5GHz 802.11n HT40	86.49	640	1.56	3kHz

802.11a



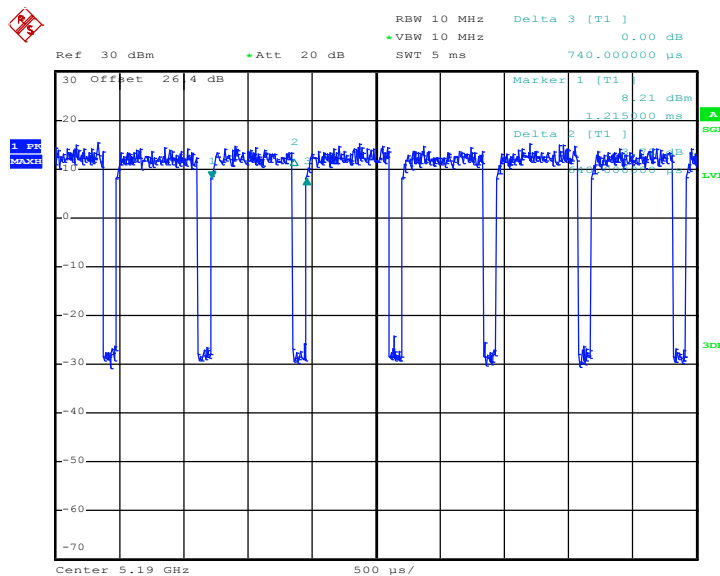
Date: 9.FEB.2017 21:06:17

5GHz 802.11n HT20



Date: 9.FEB.2017 21:21:49

5GHz 802.11n HT40



Date: 15.FEB.2017 22:14:11