



FCC RF Test Report

APPLICANT : HMD Global Oy
EQUIPMENT : Smart Phone
BRAND NAME : NOKIA
MODEL NAME : TA-1053
FCC ID : 2AJOTTA-1053
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jan. 26, 2017 and testing was completed on Mar. 11, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : 2AJOTTA-1053

Page Number : 1 of 22

Report Issued Date : Apr. 06, 2017

Report Version : Rev. 01

Report Template No.: BU5-FR15CWL Version 2.0



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Re-use of Measured Data	5
1.5 Modification of EUT	9
1.6 Testing Location	9
1.7 Applicable Standards.....	10
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	11
2.1 Carrier Frequency and Channel	11
2.2 Test Mode.....	11
2.3 Connection Diagram of Test System.....	12
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	12
3 TEST RESULT	13
3.1 Output Power Measurement.....	13
3.2 Radiated Band Edges and Spurious Emission Measurement	14
3.3 AC Conducted Emission Measurement.....	18
3.4 Antenna Requirements	20
4 LIST OF MEASURING EQUIPMENT	21
5 UNCERTAINTY OF EVALUATION	22
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS	
APPENDIX E. DUTY CYCLE PLOTS	
APPENDIX F. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR712016-02C	Rev. 01	Initial issue of report	Apr. 06, 2017



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.59 dB at 35.400 MHz
3.3	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 13.80 dB at 13.558 MHz
3.4	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

HMD Global Oy

Karaportti 2, 02610 Espoo, Finland

1.2 Manufacturer

HMD Global Oy

Karaportti 2, 02610 Espoo, Finland

1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n, ANT +, FM Receiver, NFC, and GPS.

Product Specification subjective to this standard	
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna ANT+: PIFA Antenna GPS/Glonass/Beidou : Monopole Antenna NFC : Loop Antenna

1.4 Re-use of Measured Data

1.4.1 Introduction Section

The original model (FCC ID: 2AJOTTA-1044) and the variant model (FCC ID: 2AJOTTA-1053) has identical PCB layout, antenna, SW implementation for Bluetooth/Wi-Fi/GPS. Based on their similarity, the FCC Part 15C & 15E(equipment class: DTS, DSS,DXX, NII) test data issued for original model also apply for the variant model.

The applicant takes full responsibility that the test data as referenced in section 4 below represent compliance for this FCC ID (FCC ID: 2AJOTTA-1053).

1.4.2 Difference Section

The original model (FCC ID: 2AJOTTA-1044) and the variant model (FCC ID: 2AJOTTA-1053) has identical PCB layout, antenna, SW implementation for Bluetooth/Wi-Fi/GPS. The details of similarity and difference can be found in the Operating Description.

The product specification is outlined in the following table:

FCC ID			2AJOTTA-1044	2AJOTTA-1053
Wireless Tech	Mode		Frequency (MHz)	
GSM	GSM Voice GPRS (GMSK) EDGE (8PSK)	Multi-Slot Class 11 DTM: Yes	850/1900	850/1900
UMTS	AMR/RCM12.2Kbps HSDPA/HSUPA/DC-HSDPA		B2/B4/B5	B2/B5
LTE	QPSK/16QAM VoLTE		B2/B4/B7/B12/B17/B38	B5/B7/B38
Wi-Fi	11b/11g/11n(HT20)		2412-2462 MHz/	
	11a/11n(HT20)/11n(HT40)		5180-5240 MHz 5260-5320 MHz 5500-5700 MHz 5745-5825 MHz	
Bluetooth	BR/EDR/LE		2402-2480 MHz	
ANT+	ANT+		2402-2480 MHz	



1.4.3 Spot Check Verification Data Section

Summary of the spot check:

Test Item	Mode	2AJOTTA-1044 Worst Result	2AJOTTA-1053 Worst Result	Difference (dB)
Average Conducted Power (dBm)	802.11b	13.99	13.89	0.10
	802.11g	11.64	11.65	0.01
	11n HT20	10.90	10.92	-0.02
	20MHz BW 5150-5250MHz	14.42	14.48	-0.06
	20MHz BW 5250-5350MHz	14.41	14.47	-0.06
	20MHz BW 5470-5725MHz	14.37	14.34	0.03
	20MHz BW 5725-5850MHz	14.43	14.40	0.03
	40MHz BW 5150-5250MHz	14.23	14.19	0.04
	40MHz BW 5250-5350MHz	14.21	14.26	-0.05
	40MHz BW 5470-5725MHz	14.17	14.04	0.13
	40MHz BW 5725-5850MHz	14.34	14.40	-0.06
	BT (1Mbps)	7.53	7.62	-0.09
	BT (2Mbps)	5.23	5.17	0.06
	BT (3Mbps)	5.20	5.13	0.07
	BT-LE	0.63	0.72	-0.09
	ANT+	0.47	0.48	-0.01
	Test date	2017/02/11 – 2017/02/24	2017/03/14 – 2017/03/14	
Peak Radiated Spurious Emission (Band Edge) (dBuV/m)	802.11b	54.48	54.95	-0.47
	11n HT20	56.36	57.04	-0.68
	BT (1Mbps)	44.35	43.75	0.60
	BT-LE	55.17	54.61	0.56
	ANT+	65.94	63.66	2.28
	Test date	2017/02/11 – 2017/02/24	2017/03/03 – 2017/03/11	
Average Radiated Spurious Emission (Band Edge) (dBuV/m)	802.11b	45.51	44.25	1.26
	11n HT20	45.77	46.96	-1.19
	BT (1Mbps)	19.59	18.99	0.60
	BT-LE	45.28	45.24	0.04
	ANT+	38.85	38.59	0.26
	Test date	2017/02/11 – 2017/02/24	2017/03/03 – 2017/03/11	
Peak Radiated Spurious Emission (Harmonic) (dBuV/m)	802.11b	45.27	46.25	-0.98
	11n HT20	41.37	43.54	-2.17
	BT (1Mbps)	40.93	41.49	-0.56
	BT-LE	40.63	42.23	-1.60
	ANT+	37.66	39.64	-1.98
	Test date	2017/02/11 – 2017/02/24	2017/03/03 – 2017/03/11	


Conclusion:

WLAN Radiated spurious emission test against the variant model for non-cellular part based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result (power levels measured are within 0.5dB, and the worst case of RSE spot check verification based on the worst condition from the original model is within 3dB, and are compliance with the limits), the test data from the original model is representative for the variant model.

The unwanted, harmonics, radiated spurious emission is reported peak measurement only due to spurious lower than 20dB than the limit.

The detail test results can be found in this document, Appendix A, hereafter.

1.4.4 Reference detail Section

Equipment Class	Reference FCC ID	Type Grant/Permissive Change	Reference Application	Folder Test/RF Exposure	Report Title
DTS	2AJOTTA-1044	Original Grant	FR712016B	Part 15C	All sections applicable
			FR712016C	Part 15C	All sections applicable
			FA712016	RF Exposure	All sections applicable
DSS	2AJOTTA-1044	Original Grant	FR712016A	Part 15C	All sections applicable
			FA712016	RF Exposure	All sections applicable
DXX	2AJOTTA-1044	Original Grant	FR712016D	Part 15C	All sections applicable
			FA712016	RF Exposure	All sections applicable
NII	2AJOTTA-1044	Original Grant	FR712016F FR712016G FZ712016	Part 15E	Conducted sections applicable
			FA712016	RF Exposure	All sections applicable

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH11-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

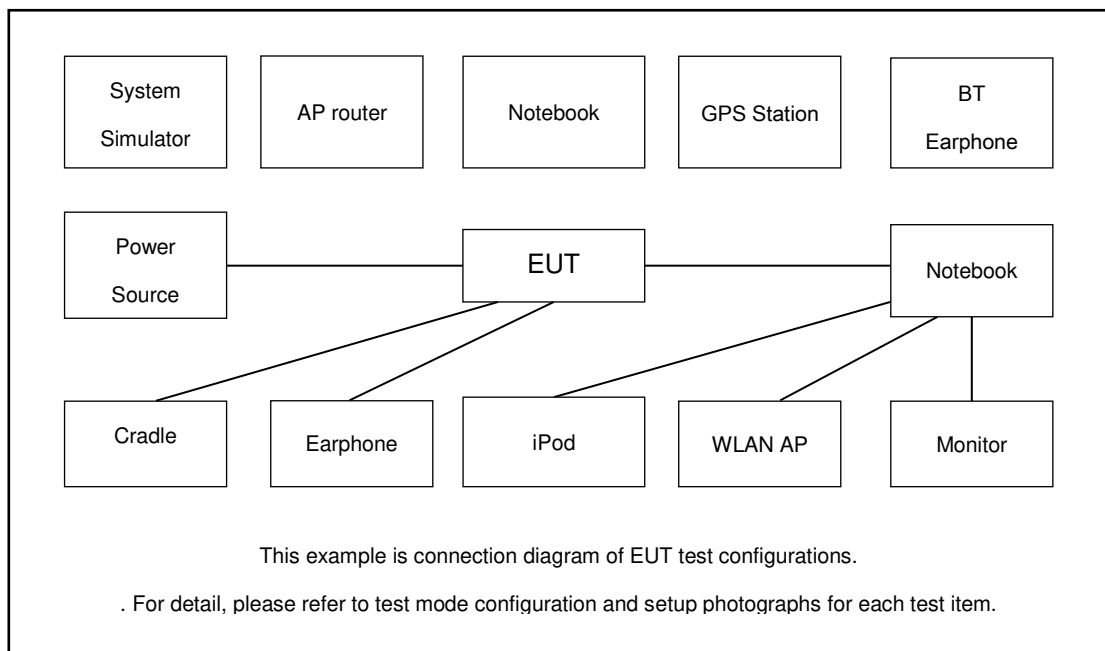
2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

Test Cases	
AC Conducted Emission	Mode 1: GSM850 Idle + Bluetooth Link + WLAN (2.4GHz) Link + NFC On + Earphone + USB Cable (Charging from Adapter) + SIM 1

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
3.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
5.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, programmed RF utility, "QRCT" installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

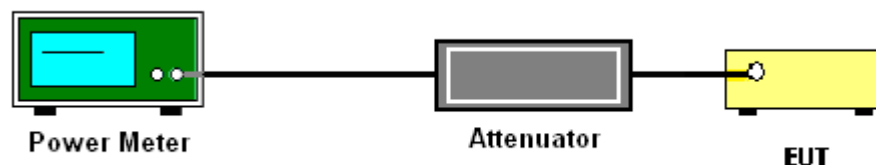
3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r05 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.1.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.2.3 Test Procedures

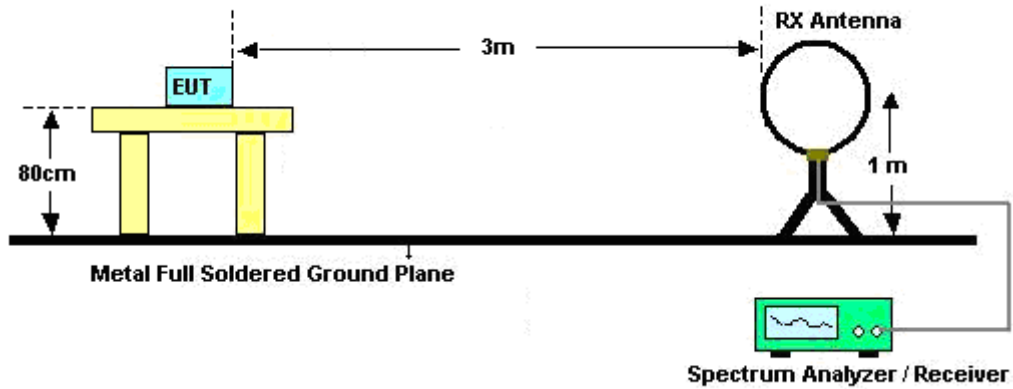
1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:

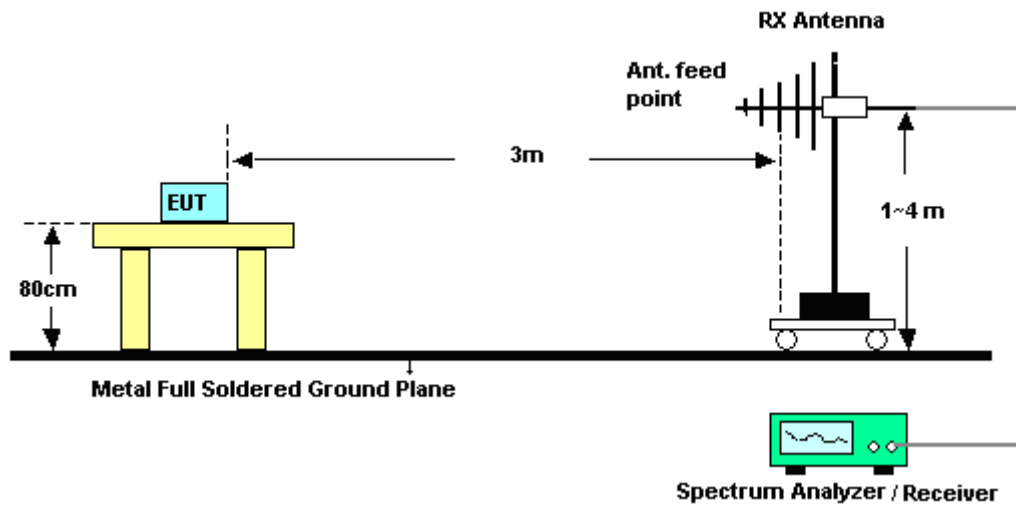
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.2.4 Test Setup

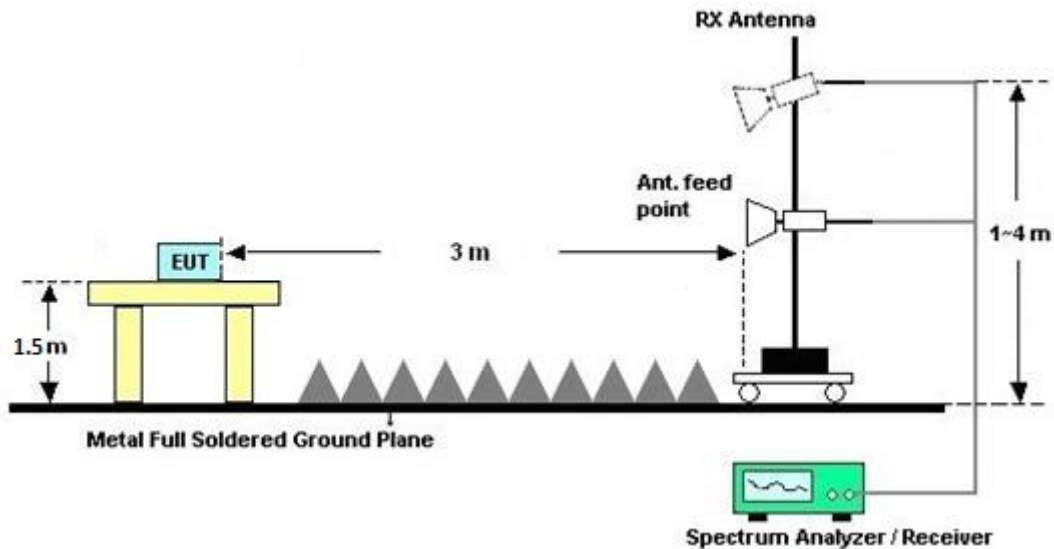
For radiated emissions below 30MHz



For radiated emissions from 30MHz to 1GHz



For radiated emissions above 1GHz



3.2.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.2.7 Duty Cycle

Please refer to Appendix E.

3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.3 AC Conducted Emission Measurement

3.3.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

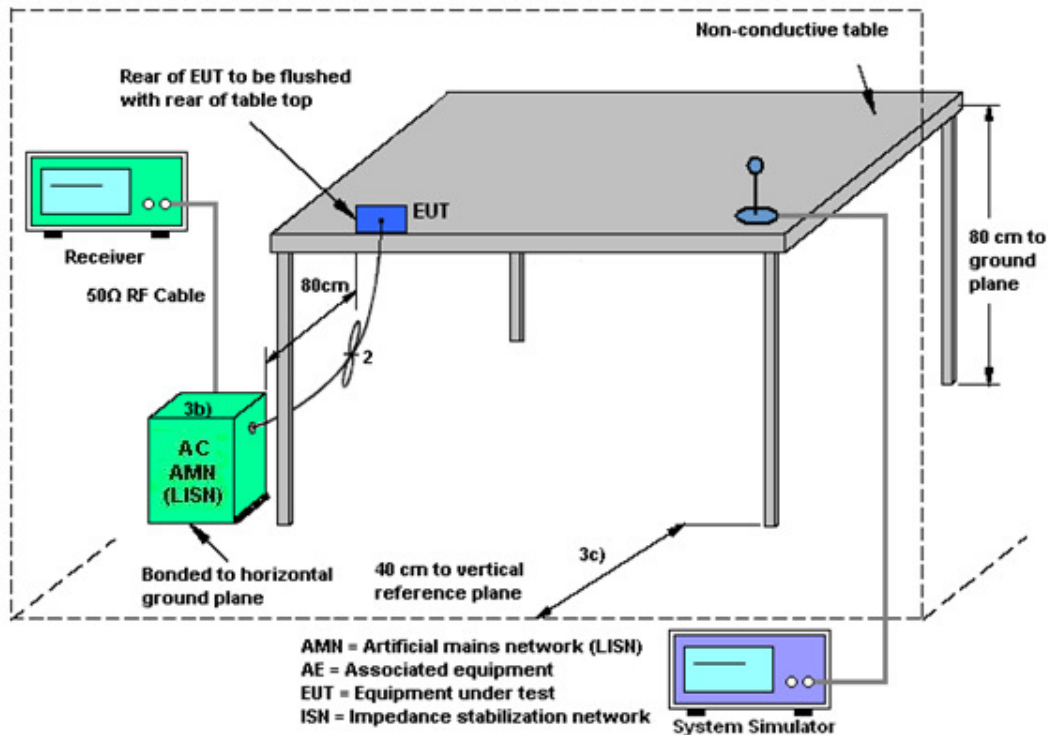
3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.3.4 Test Setup



3.3.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.4 Antenna Requirements

3.4.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the Antenna exceeds 6 dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.4.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.4.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	0932001	300MHz~40GHz	Sep. 29, 2016	Feb. 09, 2017 ~ Feb. 23, 2017	Sep. 28, 2017	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	0846202	300MHz~40GHz	Sep. 29, 2016	Feb. 09, 2017 ~ Feb. 23, 2017	Sep. 28, 2017	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jul. 17, 2016	Feb. 09, 2017 ~ Feb. 23, 2017	Jul. 16, 2017	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Feb. 11, 2017	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2016	Feb. 11, 2017	Aug. 29, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 29, 2016	Feb. 11, 2017	Nov. 28, 2017	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 05, 2017	Feb. 11, 2017	Jan. 04, 2018	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 05, 2017	Feb. 11, 2017	Jan. 04, 2018	Conduction (CO05-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Mar. 03, 2017 ~ Mar. 11, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Mar. 03, 2017 ~ Mar. 11, 2017	Sep. 01, 2017	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D	35414	30MHz~1GHz	Oct. 15, 2016	Mar. 03, 2017 ~ Mar. 11, 2017	Oct. 14, 2017	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-152 2	1GHz ~ 18GHz	Mar. 30, 2016	Mar. 03, 2017 ~ Mar. 11, 2017	Mar. 31, 2017	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY532700 80	1GHz~26.5GHz	Nov. 10, 2016	Mar. 03, 2017 ~ Mar. 11, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY523502 76	10Hz ~ 44GHZ	Mar. 21, 2016	Mar. 03, 2017 ~ Mar. 11, 2017	Mar. 20, 2017	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Mar. 03, 2017 ~ Mar. 11, 2017	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1~4m	N/A	Mar. 03, 2017 ~ Mar. 11, 2017	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Mar. 03, 2017 ~ Mar. 11, 2017	N/A	Radiation (03CH11-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800	2025787	1GHz~18GHz	Feb. 13, 2017	Mar. 03, 2017 ~ Mar. 11, 2017	Feb. 12, 2018	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Nov. 08, 2016	Mar. 03, 2017 ~ Mar. 11, 2017	Nov. 07, 2017	Radiation (03CH11-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Derek Hsu	Temperature:	21~25	°C
Test Date:	2017/2/9~2017/02/23	Relative Humidity:	51~54	%

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	16.46	30.00	-2.22	14.24	36.00	Pass
11b	1Mbps	1	6	2437	16.85	30.00	-2.22	14.63	36.00	Pass
11b	1Mbps	1	11	2462	17.00	30.00	-2.22	14.78	36.00	Pass
11g	6Mbps	1	1	2412	20.71	30.00	-2.22	18.49	36.00	Pass
11g	6Mbps	1	6	2437	20.63	30.00	-2.22	18.41	36.00	Pass
11g	6Mbps	1	11	2462	21.01	30.00	-2.22	18.79	36.00	Pass
HT20	MCS0	1	1	2412	19.94	30.00	-2.22	17.72	36.00	Pass
HT20	MCS0	1	6	2437	20.04	30.00	-2.22	17.82	36.00	Pass
HT20	MCS0	1	11	2462	20.33	30.00	-2.22	18.11	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.13	13.80
11b	1Mbps	1	6	2437	0.13	13.88
11b	1Mbps	1	11	2462	0.13	13.89
11g	6Mbps	1	1	2412	0.60	11.57
11g	6Mbps	1	6	2437	0.60	11.45
11g	6Mbps	1	11	2462	0.60	11.65
HT20	MCS0	1	1	2412	0.67	10.63
HT20	MCS0	1	6	2437	0.67	10.70
HT20	MCS0	1	11	2462	0.67	10.92



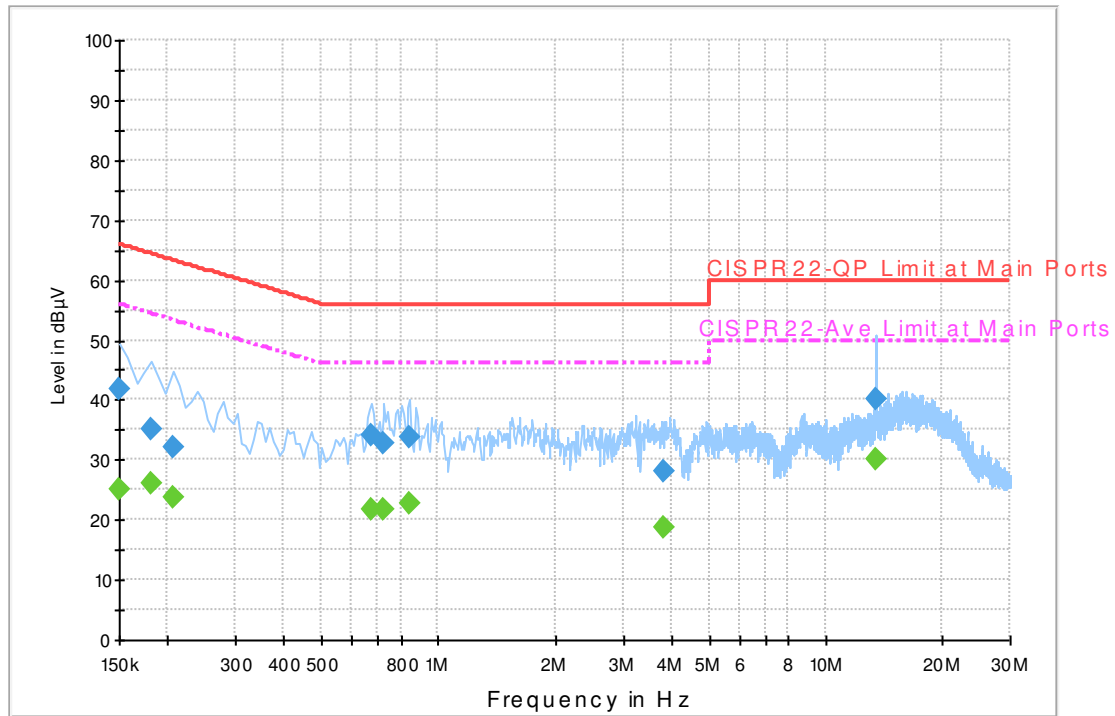
Appendix B. AC Conducted Emission Test Results

Test Engineer :	Arthur Hsieh	Temperature :	21~22°C
		Relative Humidity :	54~56%

EUT Information

Report NO : 712016-02
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

ENV216 Auto Test FCC Power Bar - L



Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	41.8	Off	L1	19.6	24.2	66.0
0.182000	35.2	Off	L1	19.6	29.2	64.4
0.206000	32.1	Off	L1	19.6	31.3	63.4
0.670000	34.3	Off	L1	19.6	21.7	56.0
0.726000	32.6	Off	L1	19.6	23.4	56.0
0.846000	33.9	Off	L1	19.6	22.1	56.0
3.846000	28.1	Off	L1	19.7	27.9	56.0
13.558000	40.2	Off	L1	20.2	19.8	60.0

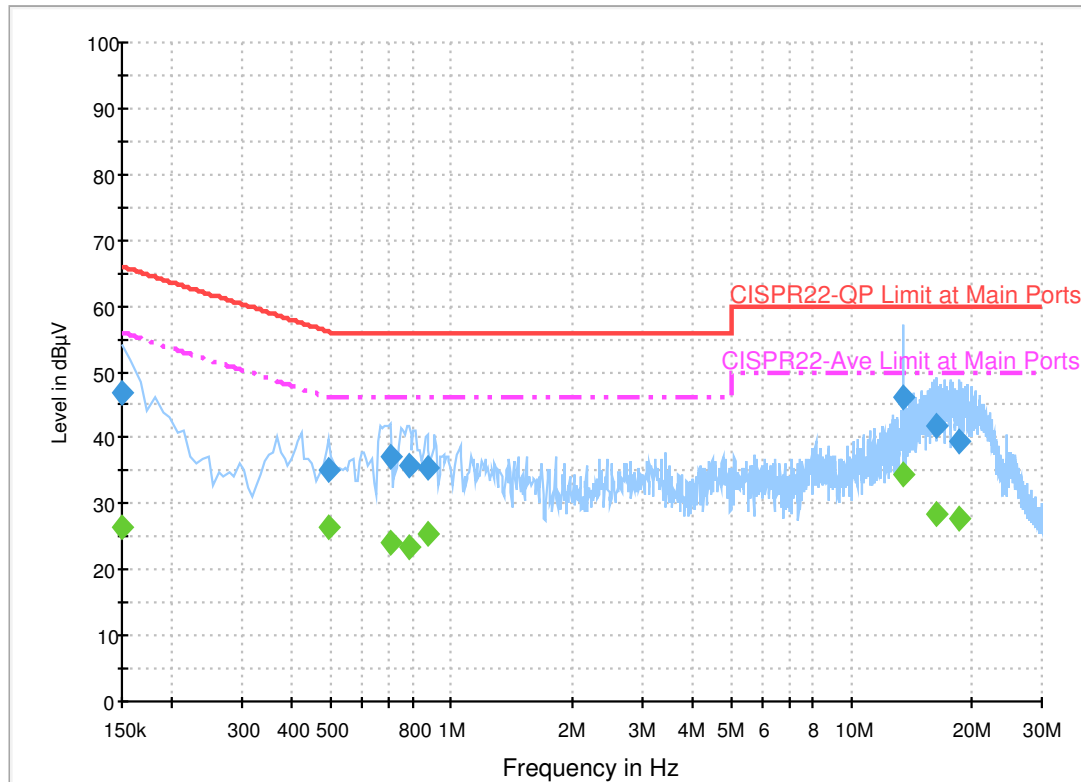
Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	25.2	Off	L1	19.6	30.8	56.0
0.182000	25.9	Off	L1	19.6	28.5	54.4
0.206000	23.8	Off	L1	19.6	29.6	53.4
0.670000	21.6	Off	L1	19.6	24.4	46.0
0.726000	21.7	Off	L1	19.6	24.3	46.0
0.846000	22.8	Off	L1	19.6	23.2	46.0
3.846000	18.6	Off	L1	19.7	27.4	46.0
13.558000	30.2	Off	L1	20.2	19.8	50.0

EUT Information

Report NO : 712016-02
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

ENV216 Auto Test FCC Power Bar - N



Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	46.8	Off	N	19.5	19.2	66.0
0.494000	35.0	Off	N	19.5	21.1	56.1
0.702000	37.2	Off	N	19.5	18.8	56.0
0.782000	35.9	Off	N	19.5	20.1	56.0
0.870000	35.4	Off	N	19.6	20.6	56.0
13.558000	46.2	Off	N	20.3	13.8	60.0
16.374000	41.8	Off	N	20.5	18.2	60.0
18.566000	39.3	Off	N	20.6	20.7	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	26.5	Off	N	19.5	29.5	56.0
0.494000	26.4	Off	N	19.5	19.7	46.1
0.702000	24.1	Off	N	19.5	21.9	46.0
0.782000	23.3	Off	N	19.5	22.7	46.0
0.870000	25.4	Off	N	19.6	20.6	46.0
13.558000	34.5	Off	N	20.3	15.5	50.0
16.374000	28.4	Off	N	20.5	21.6	50.0
18.566000	27.9	Off	N	20.6	22.1	50.0



Appendix C. Radiated Spurious Emission

Test Engineer :	J.C. Liang, Jacky Hung, and Ken Wu	Temperature :	20~24°C
		Relative Humidity :	50~54%

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 11 2462MHz	*	2462	103.03	-	-	100.23	27.4	8.98	33.58	350	37	P	H
	*	2462	99.53	-	-	96.73	27.4	8.98	33.58	350	37	A	H
		2497.44	54.2	-19.8	74	51.29	27.5	8.98	33.57	350	37	P	H
		2485.84	44.22	-9.78	54	41.37	27.45	8.98	33.58	350	37	A	H
													H
													H
	*	2462	103.5	-	-	100.7	27.4	8.98	33.58	270	97	P	V
	*	2462	99.74	-	-	96.94	27.4	8.98	33.58	270	97	A	V
		2487.84	54.95	-19.05	74	52.05	27.5	8.98	33.58	270	97	P	V
		2486.2	44.25	-9.75	54	41.4	27.45	8.98	33.58	270	97	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz****WIFI 802.11b (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 11 2462MHz		4924	41.63	-32.37	74	63.53	31.88	10.88	64.66	100	0	P	H
		7386	46.25	-28.75	74	60.16	37.38	13.57	64.86	100	0	P	H
													H
													H
		4924	41.56	-32.44	74	63.46	31.88	10.88	64.66	100	0	P	V
		7386	42.18	-31.82	74	56.09	37.38	13.57	64.86	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 11 2462MHz	*	2462	99.11	-	-	96.31	27.4	8.98	33.58	344	25	P	H
	*	2462	90.99	-	-	88.19	27.4	8.98	33.58	344	25	A	H
		2484.72	57.04	-16.96	74	54.19	27.45	8.98	33.58	344	25	P	H
		2483.52	46.17	-7.83	54	43.32	27.45	8.98	33.58	344	25	A	H
													H
													H
	*	2462	99.23	-	-	96.43	27.4	8.98	33.58	266	96	P	V
	*	2462	90.95	-	-	88.15	27.4	8.98	33.58	266	96	A	V
		2483.64	56.64	-17.36	74	53.79	27.45	8.98	33.58	266	96	P	V
		2483.72	46.96	-7.04	54	44.11	27.45	8.98	33.58	266	96	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz****WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 11 2462MHz		4924	38.12	-35.88	74	60.02	31.88	10.88	64.66	100	0	P	H
		7386	42.81	-31.19	74	56.72	37.38	13.57	64.86	100	0	P	H
													H
													H
		4924	38.86	-35.14	74	60.76	31.88	10.88	64.66	100	0	P	V
		7386	43.54	-30.46	74	57.45	37.38	13.57	64.86	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11b LF		100.47	25.12	-18.38	43.5	39.88	16.21	1.51	32.48	-	-	P	H
		204.15	22.19	-21.31	43.5	36.74	16.09	2.23	32.87	-	-	P	H
		225.21	21.38	-24.62	46	35.28	16.55	2.31	32.76	-	-	P	H
		596.1	28.9	-17.1	46	32.03	25.63	3.7	32.46	-	-	P	H
		736.1	29.93	-16.07	46	30.78	27.43	4.09	32.37	-	-	P	H
		881.7	31.84	-14.16	46	30.04	29.09	4.46	31.75	310	166	P	H
													H
													H
													H
													H
													H
													H
		37.29	35.23	-4.77	40	45.42	21.42	0.88	32.49	152	274	P	V
		59.97	22.81	-17.19	40	42.14	11.9	1.26	32.49	-	-	P	V
		81.03	19.73	-20.27	40	36.96	13.82	1.43	32.48	-	-	P	V
		659.1	27.37	-18.63	46	29.69	26.3	3.85	32.47	-	-	P	V
		896.4	32.23	-13.77	46	30.21	29.18	4.52	31.68	-	-	P	V
		936.3	33.37	-12.63	46	29.88	30.22	4.6	31.33	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT20 LF		32.16	22.55	-17.45	40	29.5	24.66	0.88	32.49	-	-	P	H
		101.01	24.94	-18.56	43.5	39.7	16.21	1.51	32.48	-	-	P	H
		205.77	22.49	-21.01	43.5	37.01	16.11	2.23	32.86	-	-	P	H
		780.2	29.84	-16.16	46	29.8	28.06	4.22	32.24	-	-	P	H
		820.1	30.63	-15.37	46	29.85	28.55	4.31	32.08	-	-	P	H
		917.4	33.03	-12.97	46	30.28	29.69	4.56	31.5	141	277	P	H
													H
													H
													H
													H
													H
													H
		35.4	35.41	-4.59	40	44.48	22.54	0.88	32.49	152	334	P	V
		59.7	23.17	-16.83	40	42.5	11.9	1.26	32.49	-	-	P	V
		95.34	21.07	-22.43	43.5	36.54	15.5	1.51	32.48	-	-	P	V
		645.8	28.02	-17.98	46	30.52	26.16	3.8	32.46	-	-	P	V
		740.3	29.59	-16.41	46	30.3	27.5	4.14	32.35	-	-	P	V
		937.7	33.61	-12.39	46	30.01	30.27	4.64	31.31	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



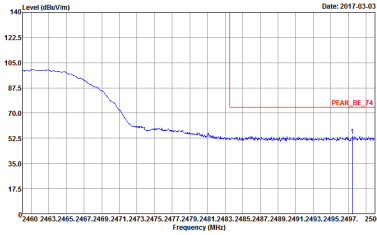
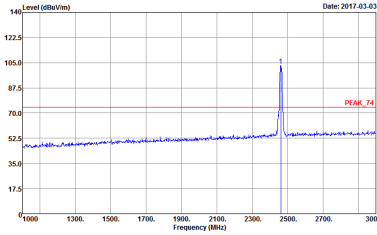
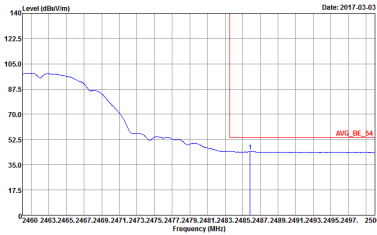
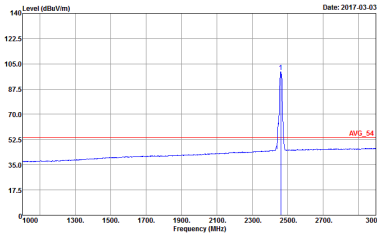
Appendix D. Radiated Spurious Emission Plots

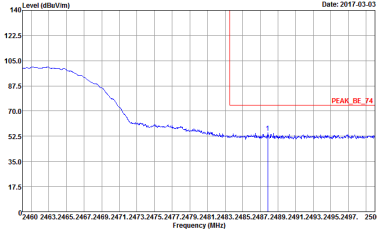
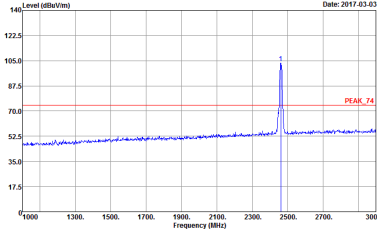
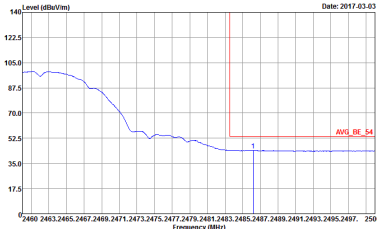
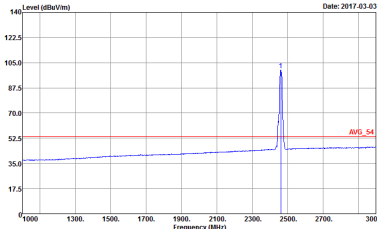
Test Engineer :	J.C. Liang, Jacky Hung, and Ken Wu	Temperature :	20~24°C
		Relative Humidity :	50~54%

Note symbol

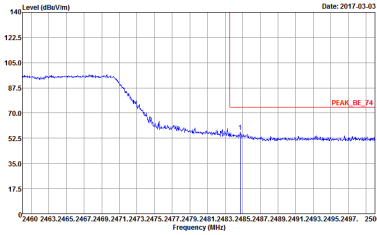
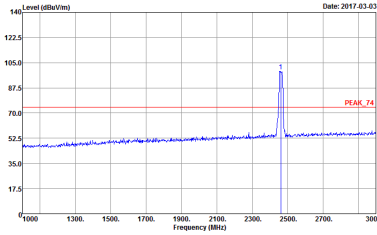
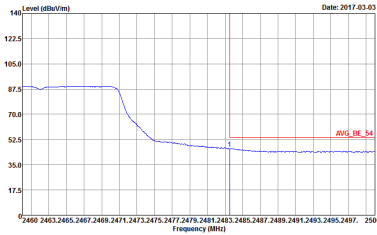
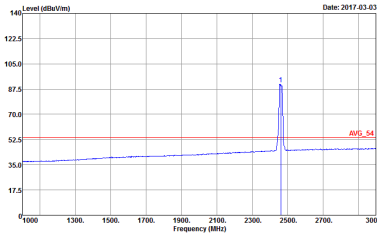
-L	Low channel location
-R	High channel location

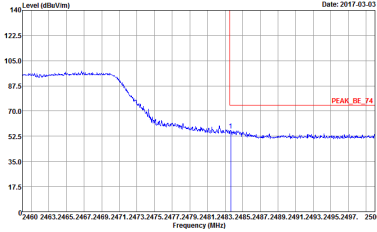
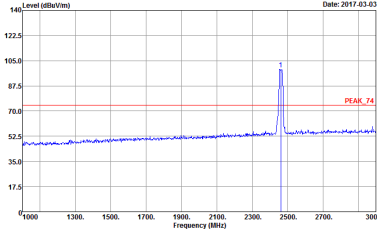
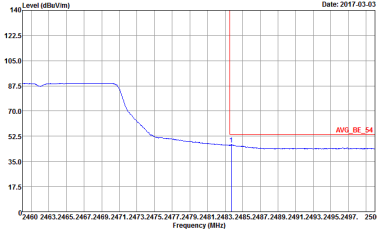
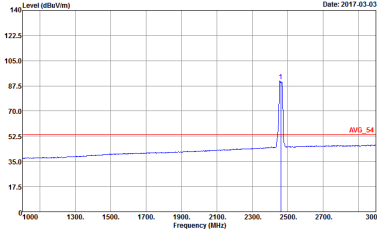
2.4GHz 2400~2483.5MHz
WIFI 802.11b (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02
	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02
	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02

2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02
	 Site : 03CH11-HY Condition : AV6_BE_54 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : AV6_54 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02

WIFI	2.4GHz 2400~2483.5MHz Fundamental @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02
	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02



2.4GHz 2400~2483.5MHz

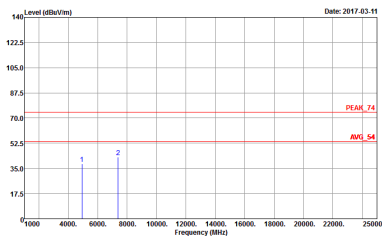
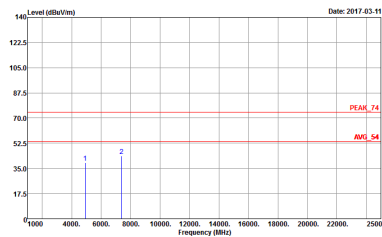
WIFI 802.11b (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Vertical
Peak Avg.	Site : 03CH11-HY Condition : PEAK_74 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 712016-02	Site : 03CH11-HY Condition : PEAK_74 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 712016-02

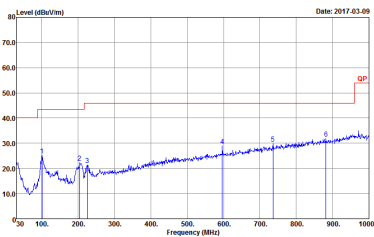
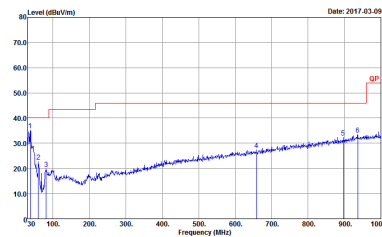


2.4GHz 2400~2483.5MHz

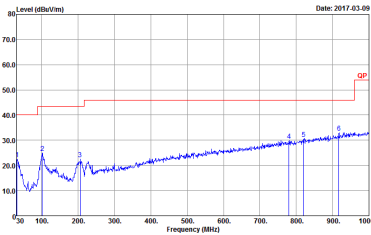
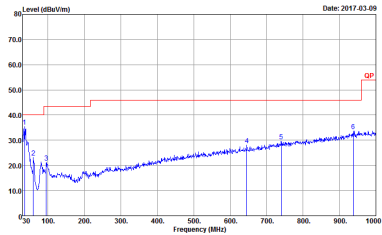
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 712016-02

Emission below 1GHz
2.4GHz WIFI 802.11b (LF)

WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11b LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC VERTICAL Detector : Peak Project : 712016-02

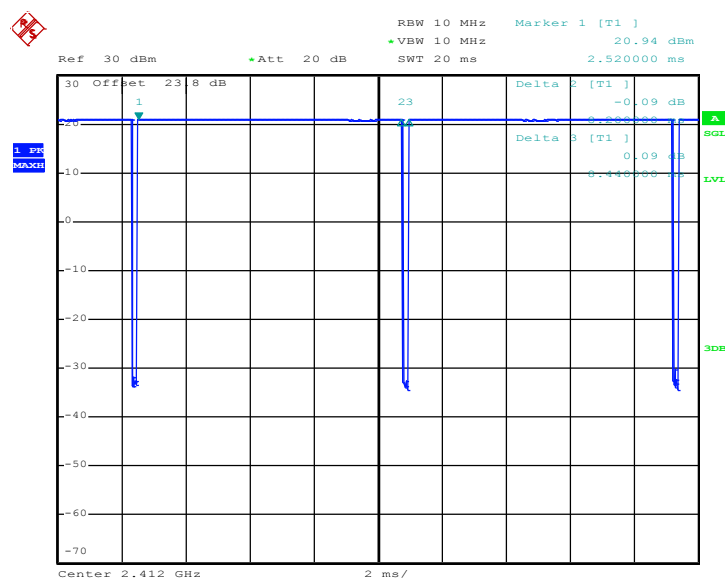
2.4GHz 2400~2483.5MHz
Emission below 1GHz
2.4GHz WIFI 802.11n HT20 (LF)

WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11n HT20 LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak Project : 712016-02	 Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC VERTICAL Detector : Peak Project : 712016-02

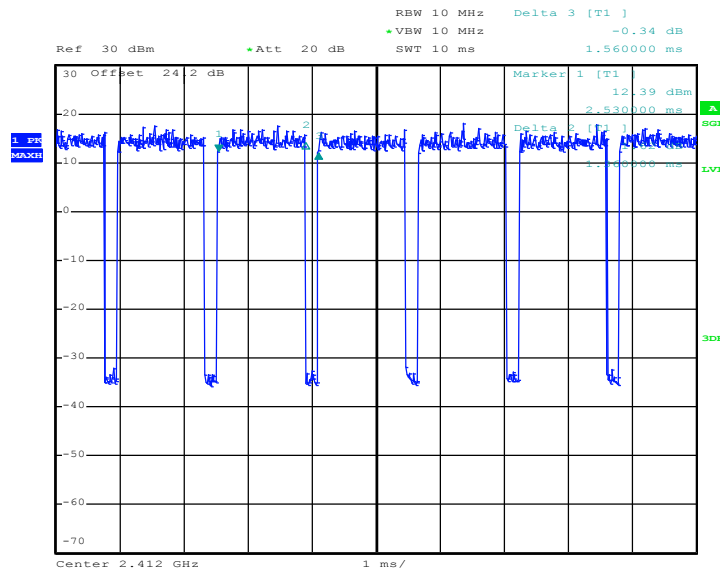
Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11b	97.16	8440.00	0.12	300Hz
802.11g	87.18	1360.00	0.74	1kHz
2.4GHz 802.11n HT20	85.71	1260.00	0.79	1kHz

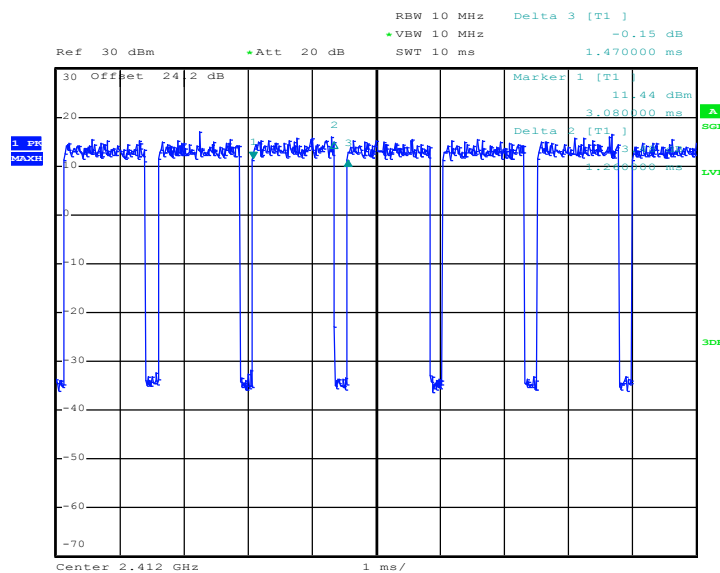
802.11b



Date: 9.FEB.2017 11:24:07

802.11g


Date: 9.FEB.2017 20:49:46

802.11n HT20


Date: 9.FEB.2017 20:36:23