Report No.: SEWM2303000098RG01 Rev.: 01 Page: 1 of 37

## **TEST REPORT**

Test Result :	PASS *
Date of Issue:	2023/04/21
Date of Test:	2023/04/17 to 2023/04/20
Date of Receipt:	2023/03/30
	47 CFR Part 27
	47 CFR Part 24
Stanuarus.	47 CFR Part 22
FCC ID: Standards:	2AJQ6MCG-14080 47 CFR Part 2
Trade Mark:	MOULTRIE MOBILE
Model No.:	MCG-14080
EUT Description:	EDGE PRO
Address of Manufacturer:	8F, 3-1, YuanQu St., NanKang, Taipei 115, Taiwan
Manufacturer:	SERCOMM CORPORATION
Address of Applicant:	2600 Corporate Drive., Suite 250 Birmingham, AL.35242
Applicant:	EBSCO Industries Inc., DBA PRADCO Outdoor Brands
Application No.:	SEWM2303000098RG

In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Sun án

Panta Sun Wireless Laboratory Manager



ct to its General Conditions aspx and, for electro is issued by the Company ns.aspx a at http://www.sgs.co isdiction issues defin d therein. Any h older of t dra to the limitatio indings at the time of its intervention o its Client and this document does a transaction documents. This docu only or fals 30 day only e: (86-755) 8307 1443 South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWM230300098RG01

 Rev.:
 01

 Page:
 2 of 37

## 1 Version

Revision Record					
Version	Chapter	Modifier	Remark		
01		2023/04/21		Original	

Prepared By	Kinj-P_Li (King-p Li) / Test Engineer
Checked By	(Well Wei) / Reviewer




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document to excent parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, remail: Clience source is a such as and such sample(s) the sample(s) are retained for 30 days only.

South of No. 5 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chira (Jangsu) Pliot Free Trade Zone 215000 t (86-512) 62992980 中国 - 苏州 - 中国(江苏)自由現場试验区苏州片区苏州工业园区润胜着1号的6号厂房南部 邮集: 215000 t (86-512) 62992980

www.sgsgroup.com.cn

sgs.china@sgs.com



## Contents

1	Versio	on	2
2	Test S	Summary	5
	2.1	UMTS Band 5/LTE Band 5	5
	2.2	LTE Band 26(824~849 MHz)	6
	2.3	UMTS Band 2 /LTE Band 2	7
	2.4	LTE Band 25	8
	2.5	UMTS Band 4 /LTE Band 4	9
	2.6	LTE Band 12	10
	2.7	LTE Band 13	11
	2.8	LTE Band 26(814~824 MHz)	12
3	Gene	ral Information	13
	3.1	Details of Client	13
	3.2	Test Location	13
	3.3	Test Facility	13
	3.4	General Description of EUT	14
	3.5	Test Mode	15
	3.6	Test Environment	15
	3.7	Description of Support Units	15
	3.8	Technical Specification	16
	3.9	Test Frequencies	17
4	Descr	iption of Tests	23
	4.1	Conducted Output Power	23
	4.2	Effective (Isotropic) Radiated Power of Transmitter	24
	4.3	Occupied Bandwidth	25
	4.4	Band Edge at Antenna Terminals	26
	4.5	Spurious And Harmonic Emissions at Antenna Terminal	27
	4.6	Peak-Average Ratio	
	4.7	Field Strength of Spurious Radiation	29
	4.8	Frequency Stability / Temperature Variation	30
	4.9	Test Setups	31



SG

Unless otherwise agreed in writing, this document is issued by t overleaf, available on request or accessible at http://www.sga.com/ subject to Terms and Conditions for Electronic Documents at http Attention is drawn to the limitation of liability, indemnification and advised that information contained hereon reflects the Company's Client's instructions, if any. The Company's sole responsibility is transaction from exercising all their rights and obligations under except in full, without prior written approval of the Company. Any appearance of this document is unlawful and offenders may be pro results shown in this test report refer only to the sample(s) tested an Attention: To check the authenticity of testing /inspection repor or email: Chooccheck@ags.com	en/Terms-and-( ://www.sgs.com jurisdiction iss findings at the to its Client a the transactior unauthorized secuted to the d such sample(	<u>Conditions.aspx</u> and, for electry ven/Terms-and-Conditions/Te ues defined therein. Any holo time of its intervention only ind this document does not i documents. This document alteration, forgery or falsific: fullest extent of the law. Unles ) are retained for 30 days only	onic format documents, rms-e-Document.aspx. ler of this document is and within the limits of exonerate parties to a cannot be reproduced ation of the content or as otherwise stated the A
South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone	215000	t (86–512) 62992980	www.sgsgroup.com.cn
中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编:	215000	t (86-512) 62992980	sgs.china@sgs.com

		Report No.: Rev.:	SEWM2303000098RG01 01
		Page:	4 of 37
	4.9.1 Test Setup 1		31
	4.9.2 Test Setup 2		31
	4.9.3 Test Setup 3		
	4.10 Test Conditions		
5	Main Test Instruments		
6	Measurement Uncertainty		
7	Appendixes		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Cocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction lissues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forger or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM Doccheck@s.com

Constant No. Flow Text No. Runsheing Read, Sundou Industries Henk, Starbou Area, Chira (Alangsu) Flixt Fiee Trade Znne 215000 t (86-512) 62992980 中国・苏州・中国(江苏)自由贸易試验区苏州片区苏州工业国区润胜商に号的5月厂房南部 邮集: 215000 t (86-512) 62992980

www.sgsgroup.com.cn

sgs.china@sgs.com

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 5 of 37

## 2 Test Summary

## 2.1 UMTS Band 5/LTE Band 5

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	ERP ≤ 7 W	Section 1 of Appendix B.1&B.4	Pass
Peak-Average Ratio	§22.913(d)	Limit≤13 dB	Reference r R2006A037	
Modulation Characteristics	§2.1047	Digital modulation	Reference I R2006A037	
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference I R2006A037	
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference report R2006A0379-R4	
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Reference r R2006A037	
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	Section 2 of Appendix B.1&B.4	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §22.355	≤ ±2.5ppm.	Reference report R2006A0379-R4	

Remark:

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were fully tested in this report, and other items data please refer to the test report R2006A0379-R4.

The FCC ID is XMR202008EG91NAXD has been certified, and the test report issued by TA Technology (Shanghai) Co., Ltd. on 2020/07/29.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Dness otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 6 of 37

### 2.2 LTE Band 26(824~849 MHz)

S

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	ERP ≤ 7 W	Section 1 of Appendix B.9	Pass
Peak-Average Ratio	§22.913(d)	Limit≤13 dB	Reference r R2006A037	•
Modulation Characteristics	§2.1047	Digital modulation	Reference r R2006A037	
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference r R2006A037	•
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference report R2006A0379-R1	
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Reference r R2006A037	
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	Section 2 of Appendix B.9	Pass
Frequency Stability $\$2.1055(a)(1)(b)$ $\$2.1055(d)(1)$ $\$2.355$ $\le \pm 2.5 ppm.$ Reference report R2006A0379-R1				
Remark:				
The Effective (Isotro	opic) Radiated Power Ou	tput Data and Field Strength of Spurio	us Radiation wer	e fully
tested in this report	, and other items data ple	ease refer to the test report R2006A03	79-R1.	

The FCC ID is XMR202008EG91NAXD has been certified, and the test report issued by TA Technology (Shanghai) Co., Ltd. on 2020/08/21.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Sarvice printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits to Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Diless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing/Inspection report & certificate, please contact us at telephone: (66-755) 83071443

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 7 of 37

### 2.3 UMTS Band 2 /LTE Band 2

S

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP ≤ 2 W	Section 1 of Appendix B.1&B.2	Pass	
Peak-Average Ratio	§24.232(d)	Limit≤13 dB	Reference R2006A03		
Modulation Characteristics	§2.1047	Digital modulation	Reference R2006A03		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference R2006A03		
Band Edges Compliance	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference R2006A03		
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Reference R2006A03		
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	Section 2 of Appendix B.1&B.2	Pass	
Frequency Stability§2.1055(a)(1)(b) §2.1055(d)(1) §24.235Within authorized bands of operation/frequency block.Reference report R2006A0379-R6					
Remark:					
The Effective (Isot	ropic) Radiated Power Ou	tput Data and Field Strength of Spuriou	s Radiation were	e fully	
tested in this repor	t, and other items data ple	ease refer to the test report R2006A037	′9-R6.		

The FCC ID is XMR202008EG91NAXD has been certified, and the test report issued by TA Technology (Shanghai) Co., Ltd. on 2020/07/29.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Diless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443.

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 8 of 37

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP ≤ 2 W	Section 1 of Appendix B.7	Pass	
Peak-Average Ratio	§24.232(d)	Limit≤13 dB	Reference r R2006A037		
Modulation Characteristics	§2.1047	Digital modulation	Reference r R2006A037		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference r R2006A037		
Band Edges Compliance	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference report R2006A0379-R2		
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	<ul> <li>≤ -13 dBm/1 MHz, from 9 kHz to 10<sup>th</sup> harmonics but outside authorized operating frequency ranges.</li> </ul>	Reference r R2006A037		
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	Section 2 of Appendix B.7	Pass	
Frequency Stability	Frequency §2.1055(a)(1)(b) Within authorized bands of Reference report				
Remark:					
The Effective (Isotro	opic) Radiated Power Ou	utput Data and Field Strength of Spuric	ous Radiation were	e fully	
tested in this report, and other items data please refer to the test report R2006A0379-R2.					

### 2.4 LTE Band 25

The FCC ID is XMR202008EG91NAXD has been certified, and the test report issued by TA Technology (Shanghai) Co., Ltd. on 2020/07/08.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the Jaw. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 9 of 37

### 2.5 UMTS Band 4 /LTE Band 4

S

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP ≤ 1 W	Section 1 of Appendix B.1&B.3	Pass	
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB	Reference r R2006A037	•	
Modulation Characteristics	§2.1047	Digital modulation	Reference r R2006A037		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference r R2006A037		
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference r R2006A037		
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Reference r R2006A037		
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 2 of Appendix B.1&B.3	Pass	
Frequency Stability					
Remark:					
The Effective (Iso	tropic) Radiated Power Out	put Data and Field Strength of Spuric	ous Radiation were	e fully	
tested in this repo	rt, and other items data plea	ase refer to the test report R2006A03	879-R5.		

The FCC ID is XMR202008EG91NAXD has been certified, and the test report issued by TA Technology (Shanghai) Co., Ltd. on 2020/08/21.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and defenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (66-755) 83071443,

Report No.: SEWM2303000098RG01 Rev.: 01 Page: 10 of 37

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	ERP ≤ 3 W.	Section 1 of Appendix B.5	Pass
Peak-Average Ratio		Limit≤13 dB	Reference re R2006A037	
Modulation Characteristics	§2.1047	Digital modulation	Reference re R2006A037	
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference re R2006A037	•
Band Edges Compliance	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference re R2006A037	
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Reference re R2006A037	•
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.	Section 2 of Appendix B.5	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Reference report R2006A0379-R5	
Remark:				

## 2.6 LTE Band 12

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were fully tested in this report, and other items data please refer to the test report R2006A0379-R5.

The FCC ID is XMR202008EG91NAXD has been certified, and the test report issued by TA Technology (Shanghai) Co., Ltd. on 2020/08/21.



is otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service p eaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format docur ct to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format docur to to is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this docurn ed that information contained hereon reflects the Company's findings at the time of its intervention only and within the lin 's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate partie action from exercising all their rights and obligations under the transaction documents. This document cannot be repro-to it in uli, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the cont arance of this tesport refer only to the sample(s) tested and such sample(s) are retained for 30 days only. <u>Thion: To check the authenticity of testing inspection report & certificate, please contact us at telephone</u>; (86-755) 8307 except in nt o ne: (86-755) 8307 1443,

Report No.: SEWM2303000098RG01 Rev.: 01 11 of 37 Page:

	-					
Test Item	FCC Rule No.	Requirements	Test Result	Verdict		
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(b)(10)	ERP ≤ 3 W.	Section 1 of Appendix B.6	Pass		
Peak-Average Ratio		Limit≤13 dB	Reference r R2006A037			
Modulation Characteristics	§2.1047	Digital modulation	Reference r R2006A037	9-R5		
Bandwidth	§2.1049,	OBW: No limit. EBW: No limit.	Reference r R2006A037			
Band Edges Compliance	§2.1051, §27.53(c)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Reference r R2006A037			
Spurious Emission at Antenna Terminals	§2.1051, §27.53(c) §27.53(f)	<ul> <li>≤ -13 dBm/100 kHz, from 9 kHz to 10<sup>th</sup> harmonics but outside authorized operating frequency ranges.</li> <li>On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations.</li> <li>For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.</li> </ul>	Reference r R2006A037			
Field Strength of Spurious Radiation	§2.1053, §27.53(c) §27.53(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 746-758 MHz, 775- 788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 2 of Appendix B.6	Pass		
Frequency Stability						
Remark:						
The Effective (Iso	tropic) Radiated Po	ower Output Data and Field Strength of Spuric	ous Radiation were	e fully		
tested in this repo	ort, and other items	data please refer to the test report R2006A03	879-R5.			

### 2.7 LTE Band 13

The FCC ID is XMR202008EG91NAXD has been certified, and the test report issued by TA Technology (Shanghai) Co., Ltd. on 2020/08/21.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document tage not excered the partice of the content or a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 12 of 37

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Transmitter Conducted Power Output	§2.1046, §90.635(b)	< 100 W. Section 1 Appendix E		Pass
Peak-Average Ratio		Limit≤13 dB	Reference r R2006A037	•
Modulation Characteristics	§2.1047	Digital modulation	Reference r R2006A037	
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Reference r R2006A037	
Emission Mask	§2.1051 § 90.691(a)	For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log10(f/6.1) decibels or 50+10Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.	Reference r R2006A037	
Spurious Emission at Antenna Terminals	§2.1051, §90.691	< 43 + 10Log10(P[Watts]) for all out-of-band emissions	Reference r R2006A037	
Field Strength of Spurious Radiation	§2.1053, §90.691	< 43 + 10Log10(P[Watts]) for all out-of-band emissions	Section 2 of Appendix B.8	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §90.213	Within authorized bands of operation/frequency block.	Vithin authorized bands of Reference re	

### 2.8 LTE Band 26(814~824 MHz)

#### Remark:

S

The Effective (Isotropic) Radiated Power Output Data and Field Strength of Spurious Radiation were fully tested in this report, and other items data please refer to the test report R2006A0379-R3.

The FCC ID is XMR202008EG91NAXD has been certified, and the test report issued by TA Technology (Shanghai) Co., Ltd. on 2020/08/21.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions afor electronic format documents, attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of his document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forger or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the samp le(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@ss.com

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 13 of 37

## **3** General Information

## 3.1 Details of Client

Applicant:	EBSCO Industries Inc., DBA PRADCO Outdoor Brands		
Address of Applicant:	2600 Corporate Drive., Suite 250 Birmingham, AL.35242		
Manufacturer:	SERCOMM CORPORATION		
Address of Manufacturer:	8F, 3-1, YuanQu St., NanKang, Taipei 115, Taiwan		

## 3.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Levi Li, King-p Li

## 3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### • A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

#### Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

#### • FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.rems-a-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and juridiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Elent's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a ransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are related for 30 days only. **Attention: Check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443**,

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 14 of 37

## 3.4 General Description of EUT

	-					
EUT Description:	EDGE PRO					
Model No.:	MCG-14080					
Trade Mark:	MOULTRIE MOBILI	E				
Hardware Version:	V1.0					
Software Version:	V1.2.01					
	RF Conducted	86032	2069322813			
IMEI:	RSE	860322069142290				
Antenna Type:	Fixed External Antenna					
	WCDMA Band II:	3.57dBi (Ant0)		WCDMA Band IV:		3.57dBi (Ant0)
	WCDMA Band V:	-0.38dBi (Ant0)				
	LTE Band 2:	3.57dBi (Ant0)		LTE Band 4:		3.57dBi (Ant0)
	LTE Band 5:	-0.380	Bi (Ant0)	LTE Band 12:		-1.43dBi (Ant0)
Antenna Gain:	LTE Band 13:	-0.380	Bi (Ant0)	LTE Band 25:		3.57dBi (Ant0)
	LTE Band 26:	-0.380	Bi (Ant0)			
Note: The antenna gain are derived from the gain information report provided by the manufacturer.					provided by the	
	0.8dB(Below 1GHz)		1.0dB(1.0~2.	2.4GHz) 1.2dB		8(2.4~3.4GHz)
RF Cable:	1.5dB(Above 3.4GHz)					
Remark:						
As above information is p suitability, reliability or/and			e applicant. So	GS is not liable	to the	accuracy,



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document tage not excered the partice of the content or atransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 15 of 37

### 3.5 Test Mode

Test Mode	Test Modes Description			
UMTS/TM1	UMTS system, WCDMA, QPSK modulation			
LTE/TM1	LTE system, QPSK modulation			
LTE/TM2 LTE system, 16QAM modulation				
Remark: The test mode(s) are selected according to relevant radio technology specifications.				

## 3.6 Test Environment

Environment Parameter	101.0 kPa Selected Values During Tests				
Relative Humidity	44-46 % RH Ambient				
Value	Temperature(°C) Voltage(V)				
NTNV	22~23	12			
Remark:					
NV: Normal Voltage					
NT: Normal Temperature					

## 3.7 Description of Support Units

The EUT has been tested as an independent unit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulleet actent of tra 30 asy only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

Report No.: SEWM2303000098RG01 Rev.: 01 Page: 16 of 37

## 3.8 Technical Specification

Characteristics	Description						
Radio System Type	🛛 UMTS	⊠ LTE					
	Band		ТХ		F	RX	
	UMTS Band II		1850 to 1910 MHz		1	1930 to 1990 MHz	
	UMTS Band IV		1710 to 1755 MHz		2	2110 to	2155 MHz
	UMTS Band V	,	824 to 849	MHz	8	369 to 8	94 MHz
	LTE Band 2		1850 to 19	10 MHz	1	1930 to	1990 MHz
	LTE Band 4		1710 to 17	55 MHz	2	2110 to	2155 MHz
Supported Frequency Range	LTE Band 5		824 to 849	MHz	8	369 to 8	94 MHz
Supported Trequency Mange	LTE Band 12		699 to 716	MHz	7	729 to 7	46 MHz
	LTE Band 13		777 to 787	MHz	7	746 to 7	56 MHz
	LTE Band 25		1850 to 19	15MHz	1	1930 to	1995 MHz
	LTE Band 26 (814 to 824 MHz )		814 to 824	814 to 824MHz		859 to 869 MHz	
	LTE Band 26 (824 to 849 MHz )		824 to 849 MHz		8	869 to 894 MHz	
	UMTS system:		⊠5 MHz				
	LTE Band 2		⊠1.4 MHz ⊠15 MHz	⊠3 MHz ⊠20 MHz	⊠5	5 MHz	⊠10 MHz
	LTE Band 4				⊠5	5 MHz	⊠10 MHz
	LTE Band 5		⊠1.4 MHz	🖂 3 MHz	$\boxtimes 5$	5 MHz	🛛 10 MHz
	LTE Band 12		⊠1.4 MHz	3 MHz	$\boxtimes 5$	5 MHz	⊠10 MHz
	LTE Band 13		⊠5 MHz	🛛 10 MHz			
Supported Channel Bandwidth			🖾 1.4 MHz	🖂 3 MHz	$\boxtimes$ 5	5 MHz	🛛 10 MHz
	LTE Band 25		🛛 15 MHz	🛛 20 MHz			
	LTE Band 26(8	814-824)	⊠1.4 MHz	🖂 3 MHz	$\boxtimes$ 5	5 MHz	⊠10 MHz
	LTE Band 26(8	824-849)	⊠1.4 MHz ⊠15 MHz	⊠3 MHz	⊠5	5 MHz	⊠10 MHz
	Note1: Only 27 modulation is 7 Note2: WCDM the worst case	16QAM. IA supports I	HSUPA, HSE	DPA, DC-HSI	DPA,	HSPA+	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alleration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) itested and such sample(s) are relained for 30 days only. *Attemption: Descharted and the Descharted and the Descharted and the Descharted and the Barcehore*. (86-75) 8307 1443, *Attemption: Descharted and the sample(s)* itested and such sample(s) theses contact us at telephone: (86-75) 8307 1443, South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 17 of 37

## 3.9 Test Frequencies

Test Mode	TX / RX	RF Channel			
Test Mode		Low (L)	Middle (M)	High (H)	
	TX RX	Channel 9262	Channel 9400	Channel 9538	
WCDMA Band II		1852.4 MHz	1880.0 MHz	1907.6 MHz	
		Channel 9662	Channel 9800	Channel 9938	
		1932.4 MHz	1960.0 MHz	1987.6 MHz	

Test Mode	TX / RX	RF Channel				
Test Mode		Low (L)	Middle (M)	High (H)		
		Channel 1312	Channel 1413	Channel 1513		
WCDMA Band IV	TX	1712.4MHz	1732.6 MHz	1752.6 MHz		
	RX	Channel 1537	Channel 1638	Channel 1738		
	٢٨	2112.4 MHz	2132.6 MHz	2152.6 MHz		

Test Mode	TX / RX	RF Channel			
Test Mode		Low (L)	Middle (M)	High (H)	
	TX RX	Channel 4132	Channel 4182	Channel 4233	
WCDMA Band V		826.4MHz	836.4 MHz	846.6 MHz	
		Channel 4357	Channel 4407	Channel 4458	
		871.4 MHz	881.4 MHz	891.6 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alleration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) itested and such sample(s) are relained for 30 days only. *Attemption: Descharted and the Descharted and the Descharted and the Descharted and the Barcehore*. (86-75) 8307 1443, *Attemption: Descharted and the sample(s)* itested and such sample(s) theses contact us at telephone: (86-75) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Part, Suzhou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润畦路1号约65月/房南部 邮编: 215000

Report No.: SEWM2303000098RG01					
			Rev.:	01	
			Page:	18 of 37	
		ſ		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 18607	Channel 18900	Channel 19193
		ТХ	1850.7 MHz	1880 MHz	1909.3 MHz
	1.4MHz	DV	Channel 607	Channel 900	Channel 1193
		RX	1930.7 MHz	1960 MHz	1989.3 MHz
			Channel 18615	Channel 18900	Channel 19185
		ТХ	1851.5 MHz	1880 MHz	1908.5 MHz
	3MHz F	RX	Channel 615	Channel 900	Channel 1185
		КЛ	1931.5 MHz	1960 MHz	1988.5 MHz
	5MHz	TX RX	Channel 18625	Channel 18900	Channel 19175
			1852.5 MHz	1880 MHz	1907.5 MHz
			Channel 625	Channel 900	Channel1175
LTE Band 2			1932.5 MHz	1960 MHz	1987.5 MHz
LTE Dariu Z	10MHz	тх	Channel 18650	Channel 18900	Channel 19150
			1855 MHz	1880 MHz	1905 MHz
		RX	Channel 650	Channel 900	Channel 1150
			1935 MHz	1960 MHz	1985 MHz
		<b>T</b> 1/	Channel 18675	Channel 18900	Channel 19125
		ТХ	1857.5 MHz	1880 MHz	1902.5 MHz
	15MHz	RX	Channel 675	Channel 900	Channel 1125
			1937.5 MHz	1960 MHz	1982.5 MHz
		ту	Channel 18700	Channel 18900	Channel 19100
		ТХ	1860 MHz	1880 MHz	1900 MHz
	20MHz	RX	Channel 700	Channel 900	Channel 1100
		101	1940 MHz	1960 MHz	1980 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alleration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) itested and such sample(s) are relained for 30 days only. *Attemption: Descharted and the Descharted and the Descharted and the Descharted and the Barcehore*. (86-75) 8307 1443, *Attemption: Descharted and the sample(s)* itested and such sample(s) theses contact us at telephone: (86-75) 8307 1443,

			Report	No.: SEWM230	)3000098RG01
			Rev.:	01	
			Page:	19 of 37	
Technolo	Dec. 1. 1.10	TV / DV	<u> </u>	RF Channel	
Test Mode	Bandwidth	TX/RX	Low (L)	Middle (M)	High (H)
			Channel 19957	Channel 20175	Channel 20393
		ТХ	1710.7 MHz	1732.5 MHz	1754.3 MHz
	1.4MHz	RX	Channel 1975	Channel 2175	Channel 2375
			2112.5 MHz	2132.5MHz	2152.5 MHz
			Channel 19965	Channel 20175	Channel 20385
		ТХ	1711.5 MHz	1732.5 MHz	1753.5 MHz
	3MHz	RX	Channel 2000	Channel 2175	Channel 2350
		КЛ	2115 MHz	2132.5MHz	2150 MHz
	5MHz	ТХ	Channel 19975	Channel 20175	Channel 20375
			1712.5 MHz	1732.5 MHz	1752.5 MHz
		RX	Channel 1975	Channel 2175	Channel 2375
			2112.5 MHz	2132.5MHz	2152.5 MHz
LTE Band 4		ТХ	Channel 20000	Channel 20175	Channel 20350
			1715 MHz	1732.5 MHz	1750 MHz
	10MHz	DV	Channel 2000	Channel 2175	Channel 2350
		RX	2115 MHz	2132.5MHz	2150 MHz
			Channel 20025	Channel 20175	Channel 20325
		ТХ	1717.5 MHz	1732.5 MHz	1747.5 MHz
	15MHz	RX	Channel 2025	Channel 2175	Channel 2325
			2117.5 MHz	2132.5MHz	2147.5 MHz
			Channel 20050	Channel 20175	Channel 20300
		ТХ	1720 MHz	1732.5 MHz	1745 MHz
	20MHz	DV	Channel 2050	Channel 2175	Channel 2300
		RX	2120 MHz	2132.5MHz	2145 MHz

Toot Mada	Dondwidth			RF Channel	
Test Mode	Test Mode Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 20407	Channel 20525	Channel 20643
		TX	824.7 MHz	836.5 MHz	848.3 MHz
	1.4MHz	RX	Channel 2407	Channel 2525	Channel 2643
		КЛ	869.7 MHz	881.5 MHz	893.3 MHz
			Channel 20415	Channel 20525	Channel 20635
	3MHz	TX	825.5 MHz	836.5 MHz	847.5 MHz
		RX	Channel 2415	Channel 2525	Channel 2635
			870.5 MHz	881.5 MHz	892.5 MHz
LTE Band 5		тх	Channel 20425	Channel 20525	Channel 20625
			826.5 MHz	836.5 MHz	846.5 MHz
	5MHz	RX	Channel 2425	Channel 2525	Channel 2625
		КЛ	871.5 MHz	881.5 MHz	891.5 MHz
			Channel 20450	Channel 20525	Channel 20600
		TX	829 MHz	836.5 MHz	844 MHz
	10MHz	RX	Channel 2450	Channel 2525	Channel 2600
		ΓΛ	874 MHz	881.5 MHz	889 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined for 30 days only. Attention: Depechders of testing / Impaction report a certificate, please contact us at telephone: (86-755) 8307 1443, Attention: Depechders.

South of No.6 Plant, No.1, Runsheng Read, Stathou Industrial Park, Stathou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区调胜路1号的45厂房南部 邮编: 215000

			Report	No.: SEWM230	3000098RG01
			Rev.:	01	
			Page:	20 of 37	
Test Mode	Bandwidth	TX / RX		RF Channel	
Test Mode	Danuwiuln		Low (L)	Middle (M)	High (H)
			Channel 23017	Channel 23095	Channel 23173
		ТХ	699.7 MHz	707.5 MHz	715.3 MHz
	1.4MHz	RX	Channel 5017	Channel 5095	Channel 5173
		ΓΛ	729.7 MHz	737.5 MHz	745.3 MHz
	3MHz	тх	Channel 23025	Channel 23095	Channel 23165
			700.5 MHz	707.5 MHz	714.5 MHz
		RX	Channel 5025	Channel 5095	Channel 5165
			730.5 MHz	737.5 MHz	744.5 MHz
LTE Band 12			Channel 23035	Channel 23095	Channel 23155
	<b>5 1 1</b>	ТХ	701.5 MHz	707.5 MHz	713.5 MHz
	5MHz	RX	Channel 5035	Channel 5095	Channel 5155
		КЛ	731.5 MHz	737.5 MHz	743.5 MHz
			Channel 23060	Channel 23095	Channel 23130
		ТХ	704 MHz	707.5 MHz	711 MHz
	10MHz	RX	Channel 5060	Channel 5095	Channel 5130
		κ۸	734 MHz	737.5 MHz	741 MHz

Test Mode	Bandwidth	TX / RX	RF Channel		
Test Mode	Danuwiuun		Low (L)	Middle (M)	High (H)
			Channel 23025	Channel 23230	Channel 23255
		TX	779.5 MHz	782 MHz	784.5 MHz
	5MHz	RX	Channel 5205	Channel 5230	Channel 5255
LTE Band 13			748.5 MHz	751 MHz	753.5 MHz
LIE Dallu 13		тх	Channel 23230	Channel 23230	Channel 23230
	10MHz		782 MHz	782 MHz	782 MHz
		ΒV	Channel 5230	Channel 5230	Channel 5230
		RX	751 MHz	751 MHz	751 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) itested and such sample(s) are relained for 30 days only. *Aremedic D bocchhards of Local D bocchhards and the sample(s)* 1654 document are the aster to a transaction document is unlawful or diffender mere and the advised that and for 30 days only. *Aremedic D bocchhards of D bocchhards and the sample(s)* 1654 document approval of the 300 filestoner. (86-755) 8307 1443, *Aremedic D bocchhards and the sample(s)* 1654 document are the areas to a stepsence it as a the sample(s) testered and such sample(s) are table of the sample(s) areas and the sample(s) areas contact us at testeners and the sample(s) areas contact us at testeners and the sample(s) 1655 document is unlawful and the sample(s) areas contact us at testeners and the sample(s) test

South of No.6 Plant, No.1, Runsheng Read, Studiou Industrial Park, Studhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

			Report	No.: SEWM230	3000098RG01
			Rev.:	01	
			Page:	21 of 37	
				RF Channel	
Test Mode	Bandwidth	TX/RX	Low (L)	Middle (M)	High (H)
			Channel 26047	Channel 26365	Channel 26683
		ТХ	1850.7 MHz	1882.5 MHz	1914.3 MHz
	1.4MHz	RX	Channel 8047	Channel 8365	Channel 8683
		КЛ	1930.7 MHz	1962.5 MHz	1994.3 MHz
			Channel 26055	Channel 26365	Channel 26675
		ТХ	1851.5 MHz	1882.5 MHz	1913.5 MHz
	3MHz	RX	Channel 8055	Channel 8365	Channel 8675
		ΓΛ	1931.5 MHz	1962.5 MHz	1993.5 MHz
	5MHz -	ТХ	Channel 26065	Channel 26365	Channel 26665
			1852.5 MHz	1882.5 MHz	1912.5 MHz
		RX	Channel 8065	Channel 8365	Channel 8665
			1932.5 MHz	1962.5 MHz	1992.5 MHz
LTE Band 25		ТХ	Channel 26090	Channel 26365	Channel 26640
			1855 MHz	1882.5 MHz	1910 MHz
	10MHz	RX	Channel 8090	Channel 8365	Channel 8640
		ΓΛ	1935 MHz	1962.5 MHz	1990 MHz
			Channel 26115	Channel 26365	Channel 26615
		ТХ	1857.5 MHz	1882.5 MHz	1907.5 MHz
	15MHz	RX	Channel 8115	Channel 8365	Channel 8615
			1937.5 MHz	1962.5 MHz	1987.5 MHz
			Channel 26140	Channel 26365	Channel 26590
		ТХ	1860 MHz	1882.5 MHz	1905 MHz
	20MHz	DV	Channel 8140	Channel 8365	Channel 8590
		RX	1940 MHz	1962.5 MHz	1985 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, xtitention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined for 30 days only. Attention: Decos hervices of lesting impaction report a certificate, please contact us at telephone: (86-755) 8307 1443, Attention: Decos hervices of the sample(s) tested and such sample(s) in the sample(s) are transaction to access the sample(s) tested and such sample(s) testes denote the sample(s) are transaction to sample(s) testing impaction report access the sample(s) tested endenties of the sample(s) tested and such sample(s) are transactioned to a sample(s) testing impactioned tester (86-755) 8307 1443, tester (86-7

South of No. 6 Plant, No. 1, Runsheng Road, Stadbou Industrial Park, Stadbou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州计区苏州工业团区洞胜路号约6号厂房南部 邮编: 215000

			Report	No.: SEWM230	3000098RG01
			Rev.:	01	
			Page:	22 of 37	
Test Mode	Bandwidth	TX / RX		RF Channel	
Test Mode	Danuwiulii		Low (L)	Middle (M)	High (H)
			Channel 26697	Channel 26740	Channel 26783
		TX	814.7 MHz	819 MHz	823.3 MHz
	1.4MHz	RX	Channel 8697	Channel 8740	Channel 8783
		КЛ	859.7 MHz	864MHz	868.3 MHz
	3MHz	тх	Channel 26705	Channel 26740	Channel 26775
			815.5 MHz	819 MHz	822.5 MHz
		RX	Channel 8705	Channel 8740	Channel 8775
LTE Band 26			860.5 MHz	864MHz	867.5 MHz
(814-824)			Channel 26715	Channel 26740	Channel 26765
(0.1.0_1)		ТХ	816.5 MHz	819 MHz	821.5 MHz
	5MHz	DV	Channel 8715	Channel 8740	Channel 8755
-		RX	861.5 MHz	864MHz	866.5 MHz
			Channel 26740	Channel 26740	Channel 26740
		TX	819 MHz	819 MHz	819 MHz
	10MHz	DV	Channel 8740	Channel 8740	Channel 8740
		RX	864MHz	864MHz	864MHz

Test Made	Dondwidth	TV / DV		RF Channel	
Test Mode	Bandwidth	TX/RX	Low (L)	Middle (M)	High (H)
			Channel 26797	Channel 26915	Channel 27033
		ТХ	824.7 MHz	836.5 MHz	848.3 MHz
	1.4MHz	RX	Channel 8697	Channel 8915	Channel 9033
		ΓA	859.7 MHz	881.5 MHz	893.3 MHz
			Channel 26805	Channel 26915	Channel 27025
		ТХ	825.5 MHz	836.5 MHz	847.5 MHz
	3MHz	RX	Channel 8805	Channel 8915	Channel 9025
		ΓA	860.5 MHz	881.5 MHz	892.5 MHz
	5MHz	тх	Channel 26815	Channel 26915	Channel 27015
LTE Band26			826.5 MHz	836.5 MHz	846.5 MHz
(824-849)		RX	Channel 8815	Channel 8915	Channel 9015
			871.5 MHz	881.5 MHz	891.5 MHz
		ТХ	Channel 26840	Channel 26915	Channel 26990
			829 MHz	836.5 MHz	844 MHz
	10MHz	RX	Channel 8840	Channel 8915	Channel 8990
		ΓA	874 MHz	881.5 MHz	889 MHz
			Channel 26865	Channel 26915	Channel 26965
		ТХ	831.5 MHz	836.5 MHz	841.5 MHz
	15MHz	RX	Channel 8865	Channel 8915	Channel 8965
		ĸλ	876.5 MHz	881.5 MHz	886.5 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined for 30 days only. Attention: Depechders of testing fingeroft a certificate, please contact us at itelephone: (86-755) 8307 1443, Attention: Depechders.

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 23 of 37

## 4 Description of Tests

### 4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

**Remark: Reference test setup 1** 



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits to Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Diess otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: <u>Detect the authenticity of testing finspection report & certificate, please contact us at telephone</u>: (86-755) 8307 1443.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Plank, Suzhou Area, Chine (Jianguu) Plind Fiee Trade Zone 215000 tt (86-512) 629929800 中国・苏州・中国(江苏)自由貿易试验区苏州片区苏州工业団区洞路路1号的6号厂房南部 解编: 215000 tt (86-512) 62992980 www.sgsgroup.com.cn

sgs.china@sgs.com

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 24 of 37

### 4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB

S



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document taspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

 South of No. 6 Plant, Mo. 1, Runsheng Road, Suzhou Industrial Plant, Suzhou Area, Chine (Jaingsu) Pliot Free Trade Zone
 215000
 t (86-512) 62992980

 中国・苏州・中国(江苏)自由民勇试道区苏州上区苏州工业园区调胜路1号的号厂房南都
 戦場:
 215000
 t (86-512) 62992980

www.sgsgroup.com.cn

sgs.china@sgs.com

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 25 of 37

### 4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

#### **Remark: Reference test setup 1**

#### Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
  - 1 5% of the 99% occupied bandwidth observed in Step 7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ags.com/en/Terms-and-Conditions.Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forger or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are tested for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@sgs.com

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 26 of 37

### 4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to rms.

#### Remark: Reference test setup 1

#### Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- 4.  $VBW \ge 3 \times RBW$
- 5. Detector = RMS
- 6. Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.gas.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.gas.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits to Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document connent cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing finspection report & certificate, please contact us at telephone: (6e-755) 83071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jangsu) Pikil Firee Trade Zone 215000 t (86-512) 62992980 中国 - 苏州 - 中国(江苏)自由現場试验区苏州片区苏州工业国区湖社覧1号的5号厂房南部 単编: 215000 t (86-512) 62992980

www.sgsgroup.com.cn

sgs.china@sgs.com

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 27 of 37

## 4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

#### Remark: Reference test setup 1

#### Test Settings

1. Start frequency was set to 9kHz and stop frequency was set to at least 10\* the fundamental

frequency(Separated into at least two plots per channel)

- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions, arg. Terms-and-Conditions, arg.

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 28 of 37

## 4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

#### Remark: Reference test setup 1

#### Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.gas.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.gas.com/en/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits to Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document connent cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing finspection report & certificate, please contact us at telephone: (66-755) 83071443

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 29 of 37

## 4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

### Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete. E (dBµV/m) = Measured amplitude level (dBµV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dBµV/m) + 20 log D – 104.8; where D is the measurement distance in meters

### Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:
   E (dBµV/m) = Measured amplitude level (dBµV) + (Cable Loss (dB) + Antenna Factor (dB/m) AMP(dB))
   EIRP (dBm) = E (dBµV/m) + 20 log D 104.8; where D is the measurement distance in meters
- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

#### Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20\*LOG(3/1) = 9.54 dB.

#### Remark: Reference test setup 2

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit – Level

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics

had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by it overleaf, available on request or accessible at <u>http://www.sgs.com/</u> subject to Terms and Conditions for Electronic Documents at <u>http</u> Attention is drawn to the limitation of liability, indemnification and advised that information contained hereon reflects the Company's Client's instructions, if any. The Company's sole responsibility is transaction from exercising all their rights and obligations under except in full, without prior written approval of the Company. Any appearance of this document is unlawful and offenders may be pros results shown in this test report refer only to the sample(s) tested and	en/Terms-and-Conditi //www.sgs.com/en/Te jurisdiction issues de findings at the time of to its Client and thi the transaction docu unauthorized alterai secuted to the fullest	ons.aspx and, for electron prms-and-Conditions/Terr sfined therein. Any holde of its intervention only as s document does not eo ments. This document c tion, forgery or falsificat extent of the law. Unless	nic format documents, ms-e-Document.aspx. er of this document is nd within the limits of xonerate parties to a annot be reproduced tion of the content or s otherwise stated the
Attention: To check the authenticity of testing /inspection report or email: CN.Doccheck@sgs.com			
South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone	215000	t (86-512) 62992980	www.sgsgroup.com.cn
中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编:	215000	t (86–512) 62992980	sgs.china@sgs.com

 Report No.:
 SEWM230300098RG01

 Rev.:
 01

 Page:
 30 of 37

## 4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; Section 9

- . The frequency stability of the transmitter is measured by:
- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm ) of the center frequency.

#### Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**Remark: Reference test setup 3** 



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document connect and be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content on appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing/Inspection reports & certificate, please contact us at telephone: (86-755) 83071443


 Report No.:
 SEWM2303000098RG01

 Rev.:
 01


 Page:
 31 of 37

## 4.9 Test Setups

### 4.9.1 Test Setup 1

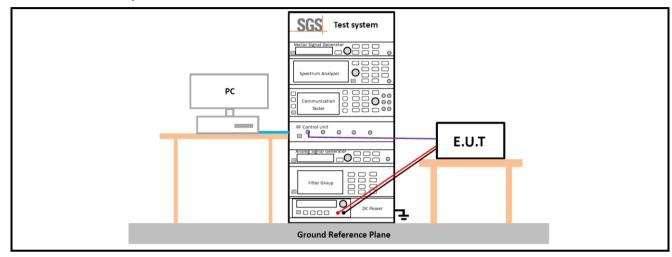

### 4.9.2 Test Setup 2

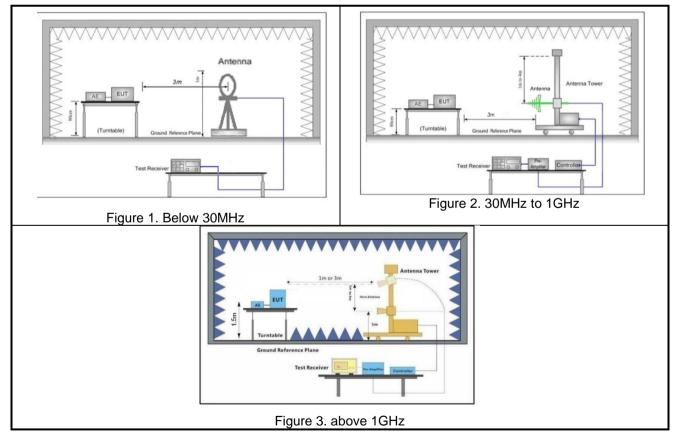




 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 32 of 37

### 4.9.3 Test Setup 3

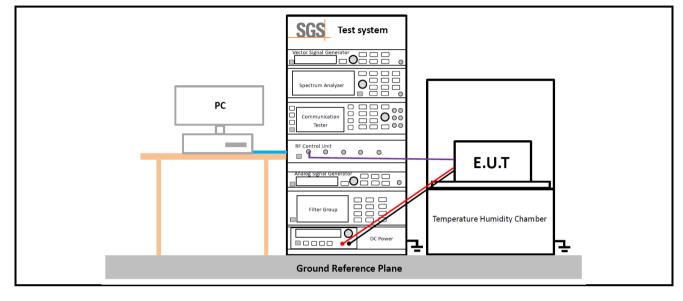



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alleration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) itested and such sample(s) are relained for 30 days only. *Attemption: Descharted and the Descharted and the Descharted and the Descharted and the Barcehore*. (86-75) 8307 1443, *Attemption: Descharted and the sample(s)* itested and such sample(s) theses contact us at telephone: (86-75) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Plant, Suzhou Area, Chine (Jangsu) Plot Free Trade Zone 215000 t (86-5 中国 - 苏州 - 中国 (江苏)自由貿易試達区苏州上区苏州工业団区周囲路1号的6号厂房南部 戦場: 215000 t (86-5

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 33 of 37

## 4.10Test Conditions

	Transmit Output Power Data - Average Power, Total				
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	UMTS/TM1;LTE/TM1;LTE/TM2				
Field Strength of Spurious Radiation					
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 2				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	UMTS/TM1;LTE/TM1 Remark: All bandwidth and modulation of UMTS/LTE have been pre tested, and only the worst results are reflected in the report.				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Cocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction lissues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forger or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM Doccheck@s.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Plank, Suchou Area, China (Jangsu) Plick Fiee Tande Zone 215000 t (86-51. 中国 - 苏州 - 中国 (江苏) 自由現場试验区苏州片区苏州工业国区词胜数1号的5号厂房南部 単编: 215000 t (86-51.

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 34 of 37

## 5 Main Test Instruments

SG

RF conducted test					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2021/05/08	2024/05/07
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2023/02/06	2024/02/05
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02-02	2022/05/17	2023/05/16
Measurement Software	Tonscend	JS1120-3 Test System V 2.6.88.0336	SUWI-02-09-09	NCR	NCR
Radio Communication Analyzer	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-05	2023/02/06	2024/02/05
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2023/02/06	2024/02/05
Temperature Chamber	ESPEC	SU-242	SUWI-01-13-01	2023/02/06	2024/02/05
Wideband Radio Communication Test Ststion	Anritsu	MT8000A	SUWI-01-34-02	2022/09/16	2023/09/15
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, xtitention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law content such as the sample(s) lested and such sample(s) are relained for 30 days only.

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 35 of 37

	RSE Test System					
Test	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Due date	
Equipment	Manufacturer	Model No.	inventory No.	(yyyy/mm/dd)	(yyyy/mm/dd)	
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2021/05/08	2024/05/07	
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2023/02/07	2024/02/06	
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27	
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-05	2022/11/23	2023/11/22	
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2023/02/08	2024/02/07	
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9163	SUWI-01-11-01	2021/05/16	2023/05/15	
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	2021/05/16	2023/05/15	
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2021/05/14	2023/05/13	
Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	2023/02/06	2024/02/05	
Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2023/02/06	2024/02/05	
Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	2023/02/08	2024/02/07	
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2021/06/10	2023/06/09	
Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-16-08	2023/02/06	2024/02/05	
Radio Communication Analyzer	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22	
Measurement Software	Tonscend	JS32-RE 4.0.0.0	SUWI-02-09-04	NCR	NCR	



SG

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) itested and such sample(s) are relatined for 30 days only. Attention: Desch Handerson of Jesting inspection report à certificate, please contact us at telehome: (86-75) 8307 1443, Attention: Desch Handerson (90 testing inspection report à certificate, please contact us at telehome: (86-75) 8307 1443,

South Mb. SPent, No. 1, Runsherg Read, Suzhou Industrel Park, Suzhou Area, Chine (Jangsu) Plot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业国区润脏路1号的号厂房南部 邮编: 215000

 Report No.:
 SEWM230300098RG01

 Rev.:
 01

 Page:
 36 of 37

## 6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in

accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.54dB
		± 3.13dB (9k -30MHz)
2	Padiated Emission	± 4.8dB (30M -1GHz)
2	Radiated Emission	± 4.8dB (1GHz to 18GHz)
		± 4.80dB (Above 18GHz)

Remark:

The U<sub>lab</sub> (lab Uncertainty) is less than U<sub>cispr/ETSI</sub> (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

Southur Mtk. 6 Plant, Mto. 1, Runsheng Road, Suzhou Hudshila Plank, Suzhou Area, Chine (Jiangua) Pluh Fine Trade Zone 215000 t (86-512) 62992980 中国・苏州・中国(江苏)自由貿易试验区苏州二区苏州工业団区河建路1号的6号厂房南部 解编: 215000 t (86-512) 62992980 www.sgsgroup.com.cn

sgs.china@sgs.com

 Report No.:
 SEWM2303000098RG01

 Rev.:
 01

 Page:
 37 of 37

## 7 Appendixes

Appendix A.3	WWAN Setup Photos
Appendix B.1	WCDMA Band II&IV&V
Appendix B.2	LTE Band 2
Appendix B.3	LTE Band 4
Appendix B.4	LTE Band 5
Appendix B.5	LTE Band 12
Appendix B.6	LTE Band 13
Appendix B.7	LTE Band 25
Appendix B.8	LTE Band 26(814-824)
Appendix B.9	LTE Band 26(824-849)

---End of Report---



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alleration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) itested and such sample(s) are relained for 30 days only. *Attemption: Descharted and the Descharted and the Descharted and the Descharted and the Barcehore*. (86-75) 8307 1443, *Attemption: Descharted and the sample(s)* itested and such sample(s) theses contact us at telephone: (86-75) 8307 1443,

www.sgsgroup.com.cn