TEST REPORT

Reference No. : WTK21D01002675W002

FCC ID : 2AJQ7WIASUP10031400

Applicant.....: QUEST USA CORP

Address : 495 Flatbush Ave, Brooklyn, NY 11225, USA

Manufacturer: TELEPHONE EST(HK)CO.,LTD

Address: Room 706, 7F, FuLi Tianhe commercial building, Linhe East Road and

Tianhe District, Guangzhou, China

Factory: TELEPHONE EST(HK)CO.,LTD

Tianhe District, Guangzhou, China

FCC CFR47 Part 1.1310

Date of Receipt sample : 2021-01-12

Date of Test : 2021-01-12 to 2021-01-18

Date of Issue.....: 2021-01-19

Test Result.....: Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By: Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998 Fax: +86-769-2267 6828

Compiled by:

Approved by:

EST REPDaniel Liu / Manager

TING GRO

Levi Xiao / Project Engineer

our Xlao

2 Contents

		Page
1	COVE	R PAGE1
2	CONT	ENTS
3		SION HISTORY
4	GENE	RAL INFORMATION
	4.1 4.2 4.3 4.4	GENERAL DESCRIPTION OF E.U.T DETAILS OF ACCESSORIES TEST MODE TEST FACILITY
5	TEST	SUMMARY
6	EQUIF	PMENT USED DURING TEST
	6.1 6.2 6.3	EQUIPMENTS LIST
7	RF EX	POSURE
	7.1 7.2 7.3 7.4 7.5	TEST SETUP EQUIPMENT APPROVAL CONSIDERATIONS (CLAUSE 5 B) OF KDB 680106 D01 v03 FCC RULES EUT OPERATION TEST RESULT
8	РНОТ	OGRAPHS OF TEST SETUP AND EUT1

Reference No.: WTK21D01002675W002 Page 3 of 11

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTK21D01002 675W002	2021-01-12	2021-01-12 to 2021-01-18	2021-01-19	original	-	Valid

Reference No.: WTK21D01002675W002 Page 4 of 11

General Information 4

4.1 General Description of E.U.T

Product: LED Wireless Charger Model(s): WIASUP100031400

Type of Modulation: ASK

Frequency Range: 110-205kHz

Antenna installation: Inductive loop coil Antenna

Hardware Version: V1.1

Software Version: V1.1

4.2 Details of accessories

Input: 5V==2A,9V===1.67A Ratings:

Wireless output: 10W Max

Reference No.: WTK21D01002675W002 Page 5 of 11

4.3 Test Mode

Test Mode	Descriptions
Standby mode	EUT alone powered by AC/DC adapter
Charging mode	loading of 10 W

Note: EUT was investigated with client device under normal charging condition as above then worst value was only report.

4.4 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

Reference No.: WTK21D01002675W002 Page 6 of 11

5 Test Summary

Test Items	Test Requirement	Result
Electric Field Strength (E) (V/m)	FCC CFR 47 part1 § 1.1310	PASS
Magnetic Field Strength (H) (A/m)	KDB 680106 D01 v03	PASS

Reference No.: WTK21D01002675W002 Page 7 of 11

6 Equipment Used during Test

6.1 Equipments List

RF EXPOSURE								
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date		
1	Magnetic Field Meter	NARDA	ELT-400	M-0155/M- 0170	2020-07-24	2021-07-23		

6.2 Description of Auxiliary Equipment


Equipment	Manufacturer	Model No.	Series No.
Simulated load	/	/	/
Adapter	HUAWEI	HW-050200C3W	N/A

6.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R. China.

7 RF Exposure

7.1 Test Setup

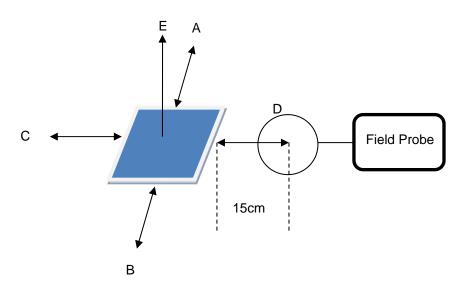

The RF exposure test was performed in anechoic chamber.

The probe was placed at test distance (15cm) which is between the edge of the charger and the geometric centre of probe.

The EUT was put in different directions (Left, Right, Front, Rear, Top and Bottom) to obtain the maximum reading.

The EUT was measured according to the dictates of KDB 680106 D01 RF Exposure Wireless Charging App v03.

7.2 Equipment approval considerations (clause 5 b) of KDB 680106 D01 v03

- (1) Power transfer frequency is less than 1 MHz.
- (2) Output power from each primary coil is less than or equal to 15 watts.
- (3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
- (4) Client device is placed directly in contact with the transmitter.
- (5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
- (6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

7.3 FCC Rules

§1.1310: The criteria listed in the following table 1 shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

TABLE 1-LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field Magnetic field strength (V/m) (A/m)		Power density (mW/cm²)	Averaging time (minutes)
(A) Lim	its for Occupational	I/Controlled Exposu	res	
0.3–3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f2)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500–100,000			5	6
(B) Limits	for General Populati	ion/Uncontrolled Exp	posure	
0.3–1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300-1500 1500-100,000			f/1500 1.0	30 30

7.4 EUT Operation

Humidity:

Operating Environment:

Temperature: 23.5 °C

Atmospheric Pressure: 101.2kPa

loading of 10 W **EUT Operation:**

Only the worst case transmitting mode were record in the report.

51.1 % RH

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

7.5 Test Result

Maximum RF exposure reading and percentage

	<u> </u>				
	Electric Field Limit			Magnetic Field Limit	
FCC	Maximum RMS (V/m)	Percentage (%)	FCC	Maximum RMS (A/m)	Percentage (%)
614	15.00	2.44	1.623	0.28	17.26

E-Filed Strength (V/m) of charging mode: loading of 10 W

Frequency Range		Maximum				
MHz	А	В	С	D	Е	(V/m)
0.127	1.365	2.321	0.589	2.337	1.258	15.00

H-Filed Strength (A/m) of charging mode: loading of 10 W

Frequency Range			Test Position			Maximum
MHz	Α	В	С	D	Е	(A/m)
0.127	0.373	0.163	0.036	0.173	0.076	0.280

Reference No.: WTK21D01002675W002 Page 11 of 11

8 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix- WIASUP100031400-Photos.

====End of Report=====