





TEST REPORT

BNetzA-CAB-02/21-102

Test report no.: 1-7420/18-04-02-A

Testing laboratory

CTC advanced GmbH

Untertuerkheimer Strasse 6 – 10 66117 Saarbruecken / Germany Phone: + 49 681 5 98 - 0 Fax: + 49 681 5 98 - 9075

Internet: https://www.ctcadvanced.com

e-mail: <u>mail@ctcadvanced.com</u>

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate starting with the registration number: D-PL-12076-01.

Applicant

Siemens AG

Werner-von-Siemens-Str. 48 92224 Amberg / GERMANY

Phone: -/-

Contact: Markus Gross

e-mail: <u>markus-gross@siemens.com</u>

Manufacturer

Siemens AG

Siemensstr. 10

93055 Regensburg / GERMANY

Test standard/s

FCC - Title 47 CFR Part 15

FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio

frequency devices

RSS - 247 Issue 2

Lab Manager

Radio Communications

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and

Licence - Exempt Local Area Network (LE-LAN) Devices

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: Handheld Test Equipment

Model name: TD400

FCC ID: 2AJRO-TD400 IC: 22001-TD400

Frequency: DTS band 2400 MHz to 2483.5 MHz

Technology tested: Bluetooth® LE
Antenna: Integrated antenna
Power supply: 6.0 V DC by AAA batteries

Temperature range: -20°C to +55°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:	Test performed:	
Marco Bertolino	Michael Dorongovski	

Lab Manager

Radio Communications



1 Table of contents

1	Table	of contents	2
2	Gener	ral information	3
	2.1	Notes and disclaimer	3
	2.2	Application details	3
	2.3	Test laboratories sub-contracted	
3	Test s	standard/s, references and accreditations	
4		ting statements of conformity – decision rule	
5	-	environment	
6	Test i	tem	6
	6.1	General description	
	6.2	Additional information	
_			
7	Seque	ence of testing	7
	7.1	Sequence of testing radiated spurious 1 GHz to 18 GHz	7
8	Descr	iption of the test setup	8
	8.1	Shielded fully anechoic chamber	9
9	Meas	urement uncertainty	10
10	s	ummary of measurement results	11
11	Α	dditional comments	12
12	M	leasurement results	13
	12.1	Band edge compliance radiated	13
	12.2	Spurious emissions radiated above 1 GHz	
13	G	ilossary	19
14	D	ocument history	20
15	Α	ccreditation Certificate – D-PL-12076-01-04	20
16	Δ	ccreditation Certificate - D-PI -12076-01-05	21



2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

This test report replaces the test report with the number 1-7420/18-04-02 and dated 2021-03-08.

2.2 Application details

Date of receipt of order: 2021-01-22
Date of receipt of test item: 2021-01-05
Start of test:* 2021-02-08
End of test:* 2021-02-09

Person(s) present during the test: -/-

2.3 Test laboratories sub-contracted

None

© CTC advanced GmbH Page 3 of 21

^{*}Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.



3 Test standard/s, references and accreditations

Test standard	Date	Description
FCC - Title 47 CFR Part 15	-/-	FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 247 Issue 2	February 2017	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE- LAN) Devices
RSS - Gen Issue 5 incl. Amendment 1	March 2019	Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus

Guidance	Version	Description
KDB 558074 D01	v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES American National Standard for Methods of Measurement of
ANSI C63.4-2014	-/-	Radio-Noise Emissions from Low-Voltage Electrical and
ANSI C63.10-2013 KDB 996369 D04	-/- v02	Electronic Equipment in the Range of 9 kHz to 40 GHz American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices MODULAR TRANSMITTERINTEGRATION GUIDEGUIDANCE FOR HOSTPRODUCTMANUFACTURERS

Accreditation	Description	
D-PL-12076-01-04	Telecommunication and EMC Canada https://www.dakks.de/as/ast/d/D-PL-12076-01-04e.pdf	DAKKS Deutsche Akkreditierungsstelle D-Pl-12076-01-04
D-PL-12076-01-05	Telecommunication FCC requirements https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf	DAKKS Deutsche Akkreditierungsstelle D-P1-12076-01-05


© CTC advanced GmbH Page 4 of 21



4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9 but is not taken into account neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

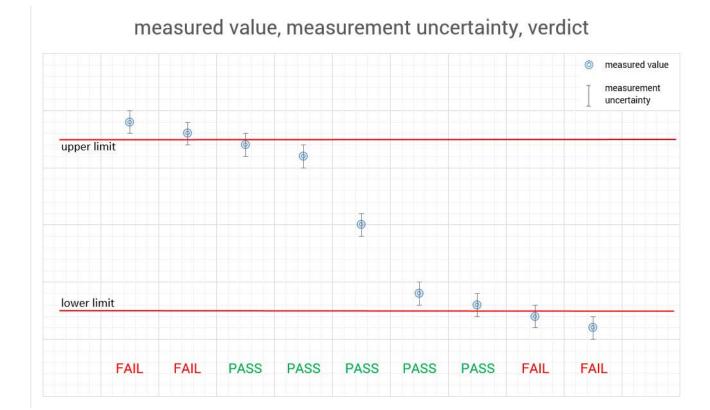

© CTC advanced GmbH Page 5 of 21



5 Test environment

Temperature	:	T _{nom} T _{max} T _{min}	+22 °C during room temperature tests No tests under extreme conditions required. No tests under extreme conditions required.
Relative humidity content	:		42 %
Barometric pressure	:		1022 hpa
		V_{nom}	6.0 V DC by AAA batteries
Power supply	:	V_{max}	No tests under extreme conditions required.
		V_{min}	No tests under extreme conditions required.

6 Test item

6.1 General description

Kind of test item :	Handheld Test Equipment		
Model name :	TD400		
HMN :	-/-		
PMN :	TD400		
HVIN :	E02		
FVIN :	-/-		
S/N serial number :	Rad. NHP/190726000001		
Hardware status :	*E02*		
Software status :	-/-		
Firmware status :	TD400_APP_FI_V01.02.00.00_06.01.00.07 +		
i iiiiwale status .	TD400_COM_AF_V01.02.00.00_01.01.00.02		
Frequency band :	DTS band 2400 MHz to 2483.5 MHz		
Type of radio transmission:	DTS		
Use of frequency spectrum :	D10		
Type of modulation :	GFSK		
Number of channels :	40		
Antenna :	Integrated antenna		
Power supply :	6.0 V DC by AAA batteries		
Temperature range :	-20°C to +55°C		

6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report: 1-7420/18-04-02_AnnexA

1-7420/18-04-02_AnnexD

© CTC advanced GmbH Page 6 of 21



7 Sequence of testing

7.1 Sequence of testing radiated spurious 1 GHz to 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna
 polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the
 premeasurement with marked maximum final results and the limit is stored.

© CTC advanced GmbH Page 7 of 21



8 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).


Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical
			maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlkl!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

© CTC advanced GmbH Page 8 of 21



8.1 Shielded fully anechoic chamber

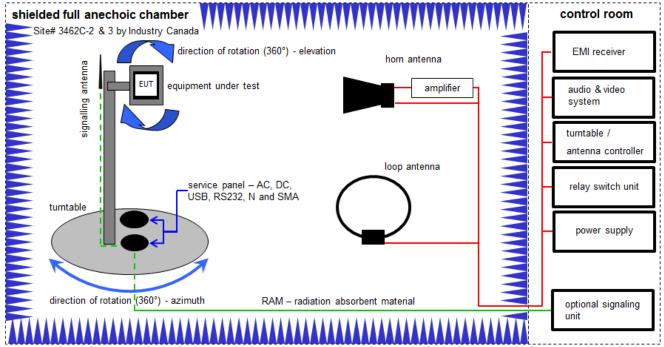

Measurement distance: horn antenna 3 meter; loop antenna 3 meter / 1 meter

FS = UR + CA + AF

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

Example calculation:

FS $[dB\mu V/m] = 40.0 [dB\mu V/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dB\mu V/m] (71.61 \(\mu V/m \))$

Equipment table:

No.	Lab / Item	Equipment	Туре	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A, B	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	9107-3696	300001604	vlKI!	27.02.2019	26.02.2021
2	В	Highpass Filter	WHK1.1/15G-10SS	Wainwright	37	400000148	ne	-/-	-/-
3	В	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne	-/-	-/-
4	В	Band Reject Filter	WRCG2400/2483- 2375/2505-50/10SS	Wainwright	26	300003792	ne	-/-	-/-
5	В	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22051	300004483	ev	-/-	-/-
6	A, B	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000032	300004510	ne	-/-	-/-
7	A, B	Computer	Intel Core i3 3220/3,3 GHz, Prozessor	-/-	2V2403033A54 21	300004591	ne	-/-	-/-
8	A, B	NEXIO EMV- Software	BAT EMC V3.20.0.13	EMCO	-/-	300004682	ne	-/-	-/-
9	A, B	Anechoic chamber	-/-	TDK	-/-	300003726	ne	-/-	-/-
10	A, B	EMI Test Receiver 9kHz-26,5GHz	ESR26	R&S	101376	300005063	k	09.12.2020	08.12.2021
11	В	RF-Amplifier	AMF-6F06001800- 30-10P-R	NARDA-MITEQ Inc	2011571	300005240	ev	-/-	-/-

© CTC advanced GmbH Page 9 of 21



9 Measurement uncertainty

Measurement uncertainty					
Test case	Uncertainty				
Antenna gain	± 3 dB				
Spectrum bandwidth	± 21.5 kHz absolute; ± 15.0 kHz relative				
Maximum output power	± 1 dB				
Detailed conducted spurious emissions @ the band edge	± 1 dB				
Band edge compliance radiated	± 3 dB				
Band edge compliance conducted	± 1.5 dB				
Spurious emissions conducted	± 3 dB				
Spurious emissions radiated below 30 MHz	± 3 dB				
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB				
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB				
Spurious emissions radiated above 12.75 GHz	± 4.5 dB				
Spurious emissions conducted below 30 MHz (AC conducted)	± 2.6 dB				

© CTC advanced GmbH Page 10 of 21



10 Summary of measurement results

\boxtimes	No deviations from the technical specifications were ascertained
	There were deviations from the technical specifications ascertained
×	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS - 247, Issue 2	See table!	2021-04-15	Only spot check tests according to KDB 996369 D04

Test specification clause	Test case	Guideline	Temperature conditions	Power source voltages	Mode	С	NC	NA	NP	Remark
§15.247(b)(4) RSS - 247 / 5.4 (4)	System gain	-/-	Nominal	Nominal	1 Msps				×	-/-
§15.247(e) RSS - 247 / 5.2 (b)	Power spectral density	KDB 558074 DTS clause: 8.4	Nominal	Nominal	1 Msps				×	-/-
§15.247(a)(2) RSS - 247 / 5.2 (a)	DTS bandwidth – 6 dB bandwidth	KDB 558074 DTS clause: 8.2	Nominal	Nominal	1 Msps				×	-/-
RSS Gen clause 4.6.1	Occupied bandwidth	-/-	Nominal	Nominal	1 Msps				\boxtimes	-/-
§15.247(b)(3) RSS - 247 / 5.4 (4)	Maximum output power	KDB 558074 DTS clause: 8.3.1.1	Nominal	Nominal	1 Msps				×	-/-
§15.205 RSS - 247 / 5.5 RSS - Gen	Band edge compliance rad.	KDB 558074 DTS clause: 8.7.2 or 8.7.3	Nominal	Nominal	1 Msps	×				Only highest channel
§15.247(d) RSS - 247 / 5.5	TX spurious emissions conducted	KDB 558074 DTS clause: 8.5	Nominal	Nominal	1 Msps				×	-/-
§15.209(a) RSS - Gen	Spurious emissions radiated below 30 MHz	-/-	Nominal	Nominal	1 Msps				×	-/-
15.247(d) RSS - 247 / 5.5 §15.109 RSS - Gen	Spurious emissions radiated 30 MHz to 1 GHz	-/-	Nominal	Nominal	1 Msps				×	-/-
§15.247(d) RSS - 247 / 5.5 §15.109 RSS - Gen	Spurious emissions radiated above 1 GHz	-/-	Nominal	Nominal	1 Msps	×				Only 1 to 18 GHz
§15.107(a) §15.207	Conducted emissions below 30 MHz (AC conducted)	-/-	Nominal	Nominal	1 Msps			×		-/-

Note: C = Compliant; NC = Not compliant; NA = Not applicable; NP = Not performed

© CTC advanced GmbH Page 11 of 21



11 Additional comments

11 Additional comm	ents		
The Bluetooth [®] word mark and logo	s are owned i	by the Bluetooth SIG Inc. and any use of such mar	ks by CTC advanced GmbH is under license.
Reference documents:	None		
Special test descriptions:	None		
Configuration descriptions:	:		
Bluetooth Low Energy			
Longest Supported payloa	ad (37 – 2	55 Byte)	Tx: 255, RX: 255
LE 1M PHY supported			Yes
LE 2M PHY supported			No
Stable Modulation Index s	supported	(SMI)	No
LE Coded PHY supported	(S=2)		No
LE Coded PHY supported	(S=8)		No
Test mode:		Bluetooth LE Test mode enabled (EUT is controlled by CMW) Special software is used. EUT is transmitting pseudo randon	n data by itself
Antennas and transmit operating modes:		Operating mode 1 (single antenna) - Equipment with 1 antenna, - Equipment with 2 diversity antennas operating by which at any moment in time only 1 antenna operating in a mode where only 1 transmit/rec Operating mode 2 (multiple antenna transmit/receive chains simultaneously but wi	in switched diversity mode a is used, t/receive chains, but eive chain is used) as, no beamforming) smart antenna system using two or more thout beamforming. as, with beamforming)
		 Equipment operating in this mode contains a stransmit/receive chains simultaneously with b 	

© CTC advanced GmbH Page 12 of 21

into account when performing the measurements.

In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken



12 Measurement results

12.1 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to single channel mode and the transmit frequency 2402 MHz for the lower restricted band and 2480 MHz for the upper restricted band. Measurement distance is 3m.

Measurement parameters				
Detector	Peak / RMS			
Sweep time	Auto			
Resolution bandwidth	1 MHz			
Video bandwidth	3 MHz			
Span	Lower Band: 2300 – 2400 MHz higher Band: 2480 – 2500 MHz			
Trace mode	Max hold			
Test setup	See sub clause 8.1 A			
Measurement uncertainty	See sub clause 9			

Limits:

FCC	IC		
Band edge com	pliance radiated		
radiator is operating, the radio frequency power that is produ that in the 100 kHz bandwidth within the band that contain RF conducted or a radiated measurement. Attenuation be	hich the spread spectrum or digitally modulated intentional uced by the intentional radiator shall be at least 20 dB below is the highest level of the desired power, based on either an low the general limits specified in Section 15.209(a) is not estricted bands, as defined in Section 15.205(a), must also fied in Section 15.209(a) (see Section 5.205(c)).		
54 dBμV/m AVG 74 dBμV/m Peak			

Result:


Scenario	Band edge compliance radiated [dBµV/m]
Data rate	1 Msps
Lower restricted band	NP
Upper restricted band	35.6 dBμV/m AVG 58.5 dBμV/m Peak

© CTC advanced GmbH Page 13 of 21



Plots:

Plot 1: Upper restricted band

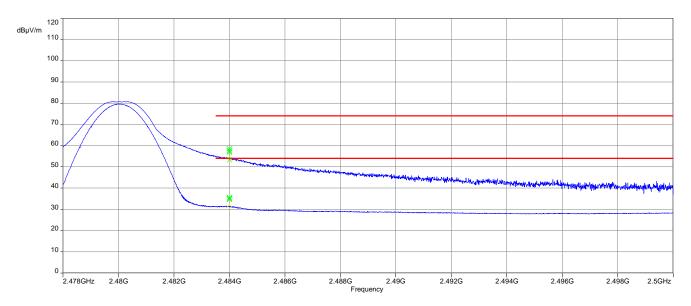

© CTC advanced GmbH Page 14 of 21



12.2 Spurious emissions radiated above 1 GHz

Description:

Measurement of the radiated spurious emissions in transmit mode. The EUT is set to single channel mode and the transmit frequencies are 2402 MHz, 2440 MHz and 2480 MHz.

Measurement parameters				
Detector	Peak / RMS			
Sweep time	Auto			
Resolution bandwidth	1 MHz			
Video bandwidth	3 x RBW			
Span	1 GHz to 26 GHz			
Trace mode	Max hold			
Measured modulation	GFSK			
Test setup	See sub clause 8.1 B (1 GHz - 18 GHz)			
Measurement uncertainty	See sub clause 9			

Limits:

FCC	IC			
TX spurious emissions radiated				

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

§15.209					
Frequency (MHz)	Field strength (dBµV/m)	Measurement distance			
Above 960	54.0 (Average)	3			
Above 960	74.0 (Peak)	3			

© CTC advanced GmbH Page 15 of 21



Results: Transmitter mode


	TX spurious emissions radiated [dBμV/m]							
2402 MHz			2440 MHz			2480 MHz		
F [MHz]	Detector	Level [dBµV/m]	F [MHz] Detector Level [dBµV/m]			F [MHz]	Detector	Level [dBµV/m]
4804	Peak	55.4	4884	Peak	56.0	4960	Peak	55.2
4604	AVG	50.5	4004	AVG	51.0	4900	AVG	50.3
	Peak		7324	Peak	53.7	7440	Peak	56.4
	AVG		1324	AVG	49.0	7440	AVG	51.3
	Peak			Peak			Peak	
	AVG			AVG			AVG	

© CTC advanced GmbH Page 16 of 21




Plots: Transmitter mode

Plot 1: 1 GHz to 18 GHz, TX mode, 2402 MHz, vertical & horizontal polarization

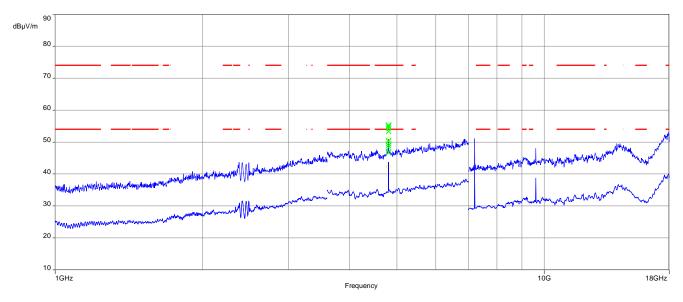

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 2: 1 GHz to 18 GHz, TX mode, 2440 MHz, vertical & horizontal polarization

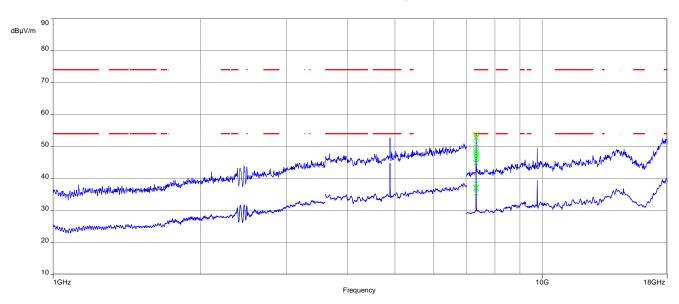


The carrier signal is notched with a 2.4 GHz band rejection filter.

© CTC advanced GmbH Page 17 of 21



Plot 3: 1 GHz to 18 GHz, TX mode, 2480 MHz, vertical & horizontal polarization

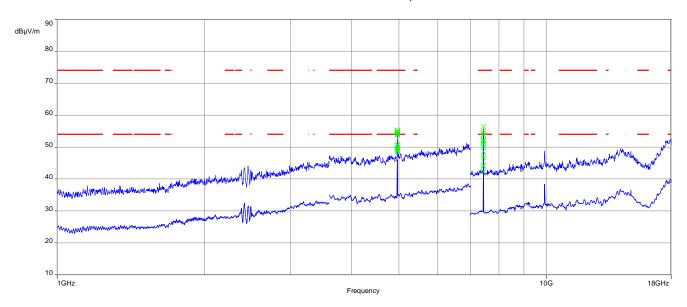

The carrier signal is notched with a 2.4 GHz band rejection filter.

© CTC advanced GmbH Page 18 of 21



13 Glossary

EUT	Equipment under test
DUT	Device under test
UUT	Unit under test
GUE	GNSS User Equipment
ETSI	European Telecommunications Standards Institute
EN	European Standard
FCC	Federal Communications Commission
FCC ID	Company Identifier at FCC
IC	Industry Canada
PMN	Product marketing name
HMN	Host marketing name
HVIN	Hardware version identification number
FVIN	Firmware version identification number
EMC	Electromagnetic Compatibility
HW	Hardware
SW	Software
Inv. No.	Inventory number
S/N or SN	Serial number
С	Compliant
NC	Not compliant
NA	Not applicable
NP	Not performed
PP	Positive peak
QP	Quasi peak
AVG	Average
ОС	Operating channel
ocw	Operating channel bandwidth
OBW	Occupied bandwidth
ООВ	Out of band
DFS	Dynamic frequency selection
CAC	Channel availability check
OP	Occupancy period
NOP	Non occupancy period
DC	Duty cycle
PER	Packet error rate
CW	Clean wave
MC	Modulated carrier
WLAN	Wireless local area network
RLAN	Radio local area network
DSSS	Dynamic sequence spread spectrum
OFDM	Orthogonal frequency division multiplexing
FHSS	Frequency hopping spread spectrum
GNSS	Global Navigation Satellite System
C/N ₀	Carrier to noise-density ratio, expressed in dB-Hz

© CTC advanced GmbH Page 19 of 21



14 Document history

Version	Applied changes	Date of release
-/-	Initial release	2021-03-08
А	HVIN changed	2021-04-15

15 Accreditation Certificate - D-PL-12076-01-04

first page	last page
Deutsche Akkreditierungsstelle GmbH Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition Accreditation The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory CTC advanced GmbH Untertürkheimer Straße 6-10, 66117 Saarbrücken is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields: Telecommunication (TC) and Electromagnetic Compatibility (EMC) for Canadian Standards	Deutsche Akkreditierungsstelle GmbH Office Berlin Office Frankfurt am Main Spittelmarkt 1.0 Europa-Alliee 52 Bundesallee 100 38116 Braunschweig Bundesallee 100 38116 Braunschweig
The accreditation cartificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number 0-Pt-1.2076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 07 pages. Registration number of the certificate: D-Pt-12076-01-04 Frankfurt am Main, 09.06.2020 by order (yet-ing, 1787/81 Egner feed of broken) The certificate tegether with its annex reflects the status at the time of the date of issue. The current status of the scape of accreditation can be journal in the distations of accretited bodies of positions halterofficerungstatic GmbH. http://www.dakks.de/en/excentr/accretited-bodies-dode	The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkrediterungsstelle GmbH (DAMS). Exempted is the unchanged form of separate disseminations of the cover shee by the conformity assessment body mentioned overlead. No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAMS. The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleS) of 31 July 2009 (Federal Law Gasette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union 1. 218 of 9 July 2008, p. 30). DAMS is a signation ty to the Multilateral Agreements for Multitual Recognition of the European co-paration for Accreditation (EA), international Accreditation Forum (IAF) and international Laboratory Accreditation Cooperation (IAC). The signatories to these agreements recognise each other's accreditation. The up-to-date state of membership can be retrieved from the following websites: EA: www.uropean-accreditation.org IAF: www.iaf.nu

Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAkkS or may be received by CTC advanced GmbH on request

https://www.dakks.de/as/ast/d/D-PL-12076-01-04e.pdf

© CTC advanced GmbH Page 20 of 21



16 Accreditation Certificate - D-PL-12076-01-05



Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAkkS or may be received by CTC advanced GmbH on request

https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf

© CTC advanced GmbH Page 21 of 21