

Page: 1 of 25

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

Applicant: Cal-Comp Big Data, Inc.

5F., No.99, Sec. 5, Nanjing E. Rd., Songshan Dist., Taipei City

10571, Taiwan (R.O.C.)

HiMirror Mini Premium X **Product Name:**

Brand Name: HiMirror Model No.: **BM688**

Model Difference: N/A

FCC ID: 2AJTF-BM688

T190711W03-RP4 **Report Number:**

Part 15C **FCC Rule Part**

Issue Date: Jul. 26, 2019

Date of Test: Jul. 11, 2019 ~ Jul. 22, 2019

Date of EUT Received: Jul. 11, 2019

Compliance Certification Services Inc.Wugu Lab. Issued by

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan.

(R.O.C.)

service@ccsrf.com

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report. The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Tested By:

Henry Chiang / Engineer

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 2 of 25

Revision History

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190711W03-RP4	Rev.00	Initial creation of document	All	Jul. 26, 2019	Elle Chang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 3 of 25

Table of Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	9
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	10
6	CONDUCTED EMISSIONS TEST	.11
7	RADIATED EMISSION TEST	15
8	20 dB OCCUPIED BANDWIDTH MEASUREMENT	24
۵	ANTENNA DECLIDEMENT	25



Page: 4 of 25

GENERAL INFORMATION

1.1 Product Description

Product Name:	HiMirror Mini Premium X			
Brand Name:	HiMirror			
Model No.:	BM688			
Model Difference:	N/A			
Hardware Version:	N/A			
Software Version:	N/A			
	12Vdc from AC/DC Adapter			
Power Supply:	Adapter: Model No.: WA-36A12FU Supplier: Asian Power Devices Inc.			

Radio Technology:	WPC
Operating Frequency	111~205 kHz
Transmit Power	46.61 dBuV/m @ 3m
Number of Channels	1
Antenna Type	Loop Antenna
Modulation Type	PSK

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 5 of 25

1.2 Test Methodology

FCC Part 15, Supbpart C

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards..

1.3 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309) FCC Designation number: TW1309

1.4 Special Accessories

There is no special accessory used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.



Page: 6 of 25

SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 7 of 25

Remark 1. Emission level in dBuV/m=20 log (uV/m)

- 2. Measurement was performed at an antenna to the closed point of EUT distance of 3 meters.
- 3. Distance extrapolation factor = 40 log (required distance/ test distance)
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement. Ex.20*log(30)+40*log(30/3) = 69.54dBuV/m
- 5. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of §15.205.
- 6. The general radiated emission limits in §15.209 apply for the spurious emission generate from UE, except for the fundamental emission where the respective section specifies otherwise.



Page: 8 of 25

2.4 Configuration of Tested System

Fig. 2-1 Emission test set up configuration




Fig. 2-2 Conduction test set up configuration




Table 2-1 Equipment Used in Tested System

Ite m	Equipment	Mfr/Brand Model/Type No.		Series No.	Data Cable	Power Cord	
1.	WPC Test software	Tera Term	N/A	N/A	N/A	N/A	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 9 of 25

SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207	AC Power Line Conducted Emission	Compliant
§15.209	Radiated Emission Limits, general requirement	Compliant
§15.215 (c)	20 dB OCCUPIED BANDWIDTH	Compliant
§15.203	Antenna Requirement	Compliant

DESCRIPTION OF TEST MODES

The EUT stay in continuous transmitting mode. The frequency 125kHz is the default channel to test, where it is the only manipulative channel as this application supports.

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode), the worst case H position was reported.

The data rate as the lowest supported is selected while tests are conducted.



Page: 10 of 25

MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 0.0014
RF output power, conducted	+/- 1.14
Power density, conducted	+/- 1.40
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.



Page: 11 of 25

CONDUCTED EMISSIONS TEST

6.1 Limitation

Conducted Emission

According to section 15.207(a) Conducted Emission Limits is as following.

Frequency range	Limits dB (uV)					
MHz	Quasi-peak	Average				
0.15 to 0.50	66 to 56	56 to 46				
0.50 to 5	56	46				
5 to 30	60	50				


Note

- 1. The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Sweep frequency starting from 150 kHz to 30 MHz for phase L1.
- 4. Repeating the measurement as lists above for phase neutral.

6.3 Test SET-UP (Block Diagram of Configuration)

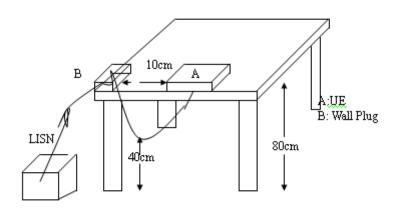

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 12 of 25

6.4 Measurement Equipment Used:

Conducted Emission Test Site									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
CABLE	EMCI	CFD300-NL	CERF	06/27/2019	06/26/2020				
EMI Test Receiver	R&S	ESCI	100064	07/24/2018	07/23/2019				
LISN	SCHWARZBEC K	NSLK 8127	8127-541	01/31/2019	01/30/2020				
LISN	SCHAFFNER	NNB 41	03/10013	02/13/2019	02/12/2020				
Software	EZ-EMC(CCS-3A1-CE)								

6.5 Measurement Result:

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit.




Page: 13 of 25

AC POWER LINE CONDUCTED EMISSION TEST DATA

2019/7/16 Operation **Description:** Date: Line: Temp.(°C)/Hum.(%): 25.7(°C)/62% L1

Test Voltage: AC 120V/60Hz Test By: Henry

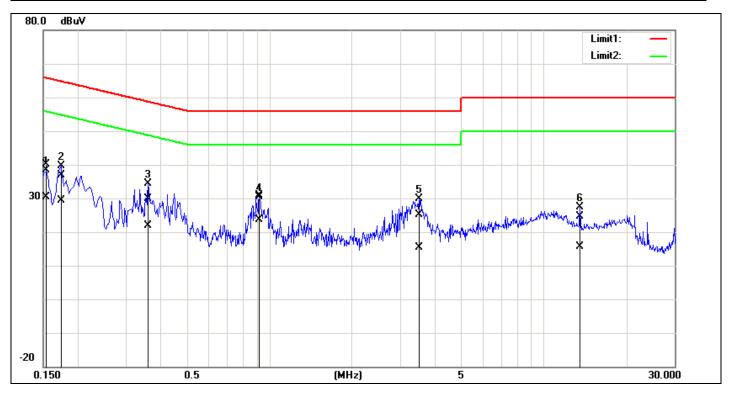

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1539	30.09	20.23	10.14	40.23	30.37	65.78	55.79	-25.55	-25.42	Pass
2	0.1740	26.80	19.17	10.14	36.94	29.31	64.76	54.77	-27.82	-25.46	Pass
3	0.3620	19.66	11.84	10.14	29.80	21.98	58.68	48.68	-28.88	-26.70	Pass
4*	0.9220	20.76	13.45	10.17	30.93	23.62	56.00	46.00	-25.07	-22.38	Pass
5	3.5100	14.81	5.24	10.22	25.03	15.46	56.00	46.00	-30.97	-30.54	Pass
6	13.5580	14.20	5.35	10.36	24.56	15.71	60.00	50.00	-35.44	-34.29	Pass


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 14 of 25

2019/7/16 **Description:** Date: Operation

Line: Temp.(°C)/Hum.(%): 25.7(°C)/62%



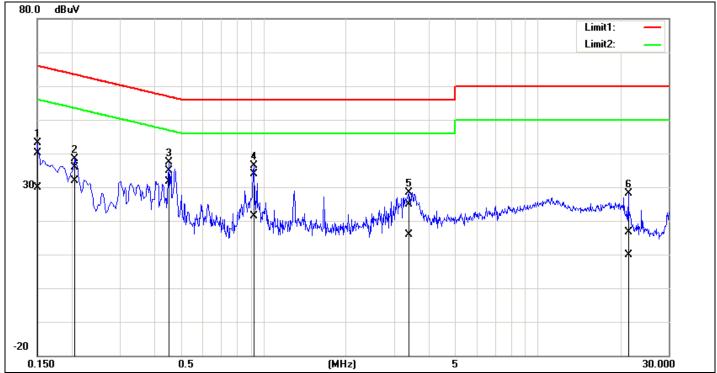

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1500	30.07	19.91	10.02	40.09	29.93	65.99	56.00	-25.90	-26.07	Pass
2	0.2060	25.92	21.94	10.02	35.94	31.96	63.36	53.37	-27.42	-21.41	Pass
3*	0.4540	24.96	21.64	10.03	34.99	31.67	56.80	46.80	-21.81	-15.13	Pass
4	0.9260	23.94	11.34	10.04	33.98	21.38	56.00	46.00	-22.02	-24.62	Pass
5	3.3820	14.78	5.68	10.08	24.86	15.76	56.00	46.00	-31.14	-30.24	Pass
6	21.4540	6.22	-0.45	10.30	16.52	9.85	60.00	50.00	-43.48	-40.15	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 15 of 25


RADIATED EMISSION TEST

7.1 Measurement Procedure


- The EUT was placed on a turn table which is 0.8m above ground plane.
- Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

7.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

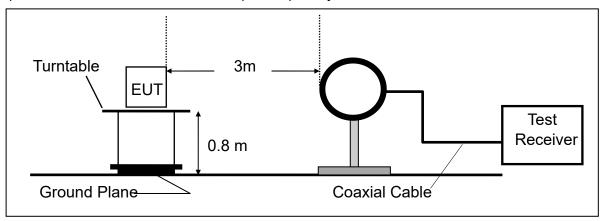

Radiated Emission Test Set-Up, Frequency Below 1000MHz

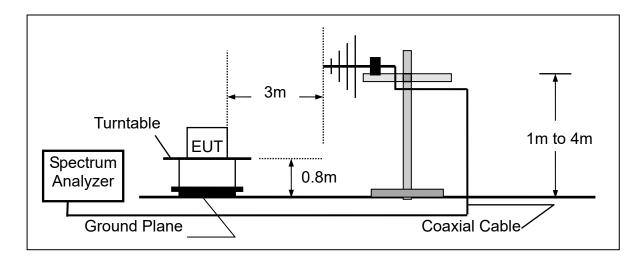

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



Page: 16 of 25

7.3 Measurement Equipment Used:

	966A Chamber										
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due						
Bilog Antenna	Sunol Sciences	JB1	A052609	03/06/2019	03/05/2020						
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020						
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020						
Loop Ant	COM-POWER	AL-130	121051	03/22/2019	03/21/2020						
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020						
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/29/2019	05/28/2020						
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R						
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R						
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R						
Software	e3 V6.11-20180413										

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 17 of 25

7.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	9	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

7.5 Field Strength of Fundamental Emission

7.5.1 Limit Below 30MHz

Frequency (MHz)	Limit (µV/m)	Measurement distance (meters)	Remark
0.009-0.490	2400/F(kHz)	300	Quasi-Peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-Peak Value
1.705-30.0	30	30	Quasi-Peak Value

Above 30MHz

	-	i
Frequency (MHz)	Limit (dBµV/m @3m)	Remark
30-88	40	Quasi-Peak Value
88-216	43.5	Quasi-Peak Value
216-960	46	Quasi-Peak Value
Above 960	54	Quasi-Peak Value
	54	Average Value
Above 1GHz	74	Peak Value

Note:

- 1. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement. Ex.20*log(30)+40*log(30/3) = 69.54dBuV/m
- 2. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
- Actual FS(dBµV/m) = Spectrum. Reading level(dBµV) + Factor(dB) Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



Page: 18 of 25

7.5.2 Below 30 MHz test result


:T190711W03 Report Number Test Date :2019-07-15

Operation Band :WPC Temp./Humi. :25/45

Frequency :125 KHz Antenna Pol. :VERTICAL

Operation Mode :Main CH Mid Engineer :Kailin

EUT Pol. :H Plan

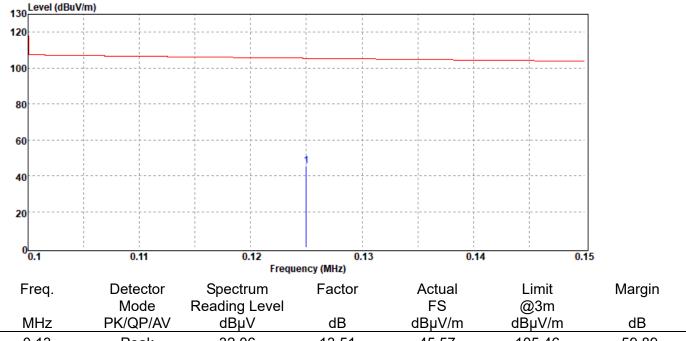

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB	
0.13	Peak	32.06	13.51	45.57	105.46	-59.89	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 19 of 25


Report Number :T190711W03 **Test Date** :2019-07-15

Operation Band :WPC Temp./Humi. :25/45

Frequency :125 KHz Antenna Pol. :HORIZONTAL

Operation Mode :Main CH Mid Engineer :Kailin

EUT Pol. :H Plan

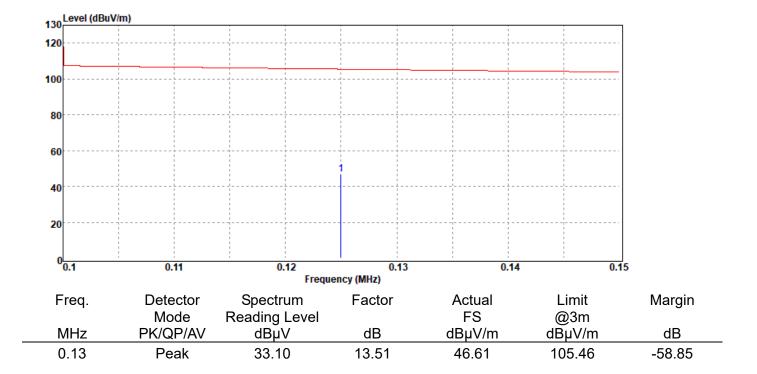

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:H Plan

EUT Pol.

Report No: T190711W03-RP4

Page: 20 of 25


Report Number :T190711W03 **Test Date** :2019-07-15

Operation Band :WPC Temp./Humi. :25/45

Frequency :125 KHz :VERTICAL Antenna Pol.

Operation Mode :TX CH MID Engineer :Kailin



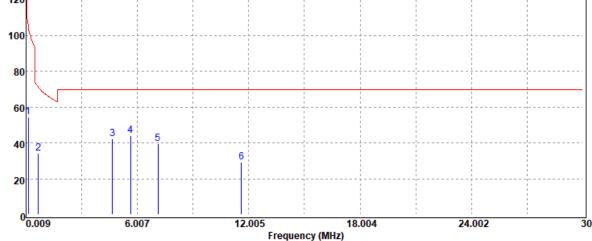

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
0.13	Peak	41.05	13.55	54.60	105.19	-50.59
0.67	Peak	19.78	14.50	34.28	71.08	-36.80
4.66	Peak	26.97	15.31	42.28	69.54	-27.26
5.65	Peak	28.70	15.49	44.19	69.54	-25.35
7.12	Peak	23.86	15.77	39.63	69.54	-29.91
11.62	Peak	13.19	16.04	29.23	69.54	-40.31

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:H Plan

EUT Pol.

Report No: T190711W03-RP4


Page: 21 of 25

Report Number :T190711W03 **Test Date** :2019-07-15

Operation Band :WPC Temp./Humi. :25/45

Frequency :125 KHz Antenna Pol. :HORIZONTAL

Operation Mode :TX CH MID Engineer :Kailin

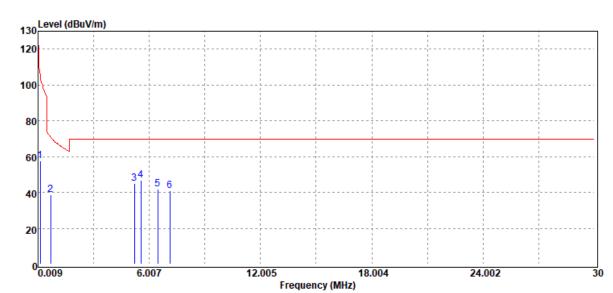

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
0.13	Peak	44.09	13.55	57.64	105.19	-47.55
0.70	Peak	24.05	14.53	38.58	70.70	-32.12
5.20	Peak	29.79	15.40	45.19	69.54	-24.35
5.56	Peak	31.22	15.48	46.70	69.54	-22.84
6.46	Peak	26.23	15.66	41.89	69.54	-27.65
7.12	Peak	25.35	15.77	41.12	69.54	-28.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 22 of 25

7.5.3 Above 30MHz test result


:T190711W03 Report Number Test Date :2019-07-15

Operation Band :WPC Temp./Humi. :25/45

Frequency :125 KHz Antenna Pol. :VERTICAL

Operation Mode :TX CH MID Engineer :Kailin

EUT Pol. :H Plan

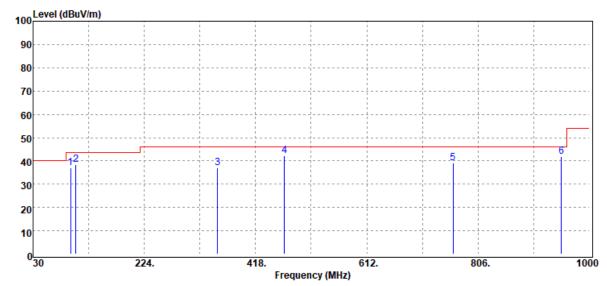

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
95.96	Peak	50.99	-13.95	37.04	43.50	-6.46
104.69	QP	49.55	-11.18	38.37	43.50	-5.13
352.04	Peak	43.96	-6.87	37.09	46.00	-8.91
468.44	Peak	45.60	-3.44	42.16	46.00	-3.84
762.35	Peak	37.37	1.75	39.12	46.00	-6.88
951.50	QP	37.79	4.19	41.98	46.00	-4.02

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 23 of 25


Report Number :T190711W03 **Test Date** :2019-07-15

Operation Band :WPC Temp./Humi. :25/45

Frequency :125 KHz Antenna Pol. :HORIZONTAL

Operation Mode :TX CH MID Engineer :Kailin

EUT Pol. :H Plan

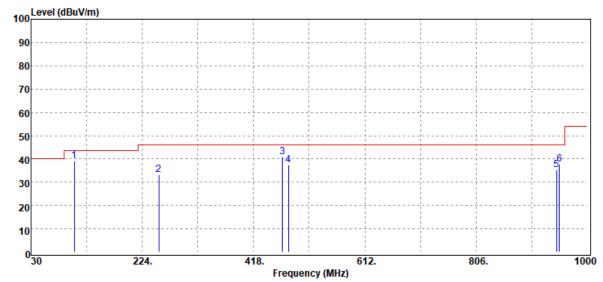

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
105.66	QP	49.99	-11.02	38.97	43.50	-4.53
253.10	Peak	43.41	-10.31	33.10	46.00	-12.90
468.44	Peak	44.44	-3.44	41.00	46.00	-5.00
479.11	Peak	40.43	-2.98	37.45	46.00	-8.55
946.65	Peak	31.36	4.01	35.37	46.00	-10.63
951.50	Peak	33.63	4.19	37.82	46.00	-8.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 24 of 25

20 dB OCCUPIED BANDWIDTH MEASUREMENT

8.1 Standard Applicable:

§2.1049 & §15.215 (c)

8.2 Limit:

None

8.3 Test Set-up

Refer to section 6.2 in this report

8.4 Measurement Procedure

20dB bandwidth

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak mode.
- 2. 20dB Bandwidth the resolution bandwidth of 200 Hz and the video bandwidth of 1 kHz were used.
- 3. Measured the spectrum width with power higher than 20dB below carrier.


8.5 Measurement Equipment Used:

Refer to section 8.3 in this report

8.6 Measurement Result

-20dB Bandwidth

20dB Bandwidth	Limit
2.858kHz	No requirement

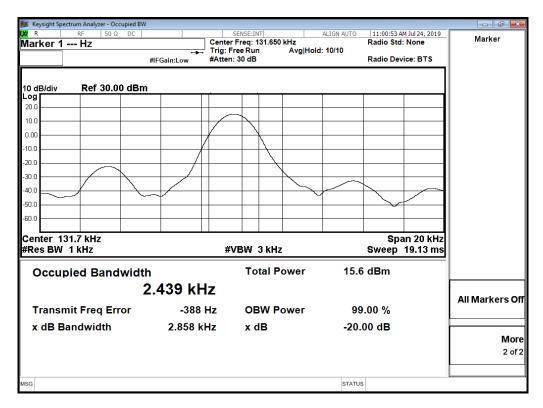

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



Page: 25 of 25

ANTENNA REQUIREMENT

9.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

9.2 Antenna Connected Construction:

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo and antenna spec. for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.