Page 1 of 89



## ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C AND INDUSTRY CANADA RSS 247 REQUIREMENT

OF

Applicant: Cal-Comp Big Data, Inc.

5F., No.99, Sec. 5, Nanjing E. Rd., Songshan Dist., Taipei City 10571,

Taiwan (R.O.C.)

HiMirror Mini Premium X **Product Name:** 

**Brand Name:** HiMirror

Model No.: BM688

**Model Difference:** N/A

**Report Number:** T190711W03-RP3

FCC ID: 2AJTF-BM688

IC: 21978-BM688

**FCC Rule Part:** §15.247, Cat: DTS

IC Rule Part: RSS-247 issue 2 Feb 2017

**Issue Date:** Jul. 30, 2019

Jul. 11, 2019 ~ Jul. 22, 2019 Date of Test:

Date of EUT Received: Jul. 11, 2019

Issued by: Compliance Certification Services Inc.Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan.

(R.O.C.)


service@ccsrf.com

Note: The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Tested By:

Hone Hsieh / Engineer

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# **Revision History**

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190711W03-RP3	Rev.00	Initial creation of docu- ment	All	Jul. 25, 2019	Elle Chang
T190711W03-RP3	Rev.00	Updated antenna type at section 1.1	5	Jul. 30, 2019	Elle Chang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# **Table of Contents**

1	GENERAL INFORMATION	5
2	SYSTEM TEST CONFIGURATION	7
3	SUMMARY OF TEST RESULTS	9
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	12
6	CONDUCTED EMISSION TEST	13
7	DUTY CYCLE OF TEST SIGNAL	17
8	PEAK OUTPUT POWER MEASUREMENT	19
9	6dB & 99% BANDWIDTH MEASUREMENT	27
10	CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT	36
11	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	45
12	POWER SPECTRAL DENSITY	84
13	ANTENNA REQUIREMENT	89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### **GENERAL INFORMATION**

### 1.1 Product description

Product Name:	HiMirror Mini Premium X
Brand Name:	HiMirror
Model No.:	BM688
Model Difference:	N/A
Hardware Version:	N/A
Software Version:	N/A
	12Vdc from AC/DC Adapter
Power Supply:	Adapter: Model No.: WA-36A12FU Supplier: Asian Power Devices Inc.

Wi-Fi	Frequency Range	Channels	Rated Power in dBm (Peak)	Rated Power in dBm (EIRP)	Modulation Technology	
802.11b			19.52	18.19	DSSS	
802.11g	2412-2462	11	21.19	14.24	OFDM	
802.11n HT20			23.96	20.10	OFDIVI	
Modulation type:			CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM			
Antenna Desigr	nation:	PCB Antenna, Gain: 1.93dBi (Main) / 2.30dBi (Aux)			x)	
Transition Rate:		802.11 b: 1/2/5.5/11 Mbps 802.11 g: 6/9/12/18/24/36/48/54 Mbps 802.11 n_20MHz: 6.5 – 144.4Mbps				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### 1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 15.247 Meas. Guidance v05r02

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

RSS-247 issue 2 Feb. 2017

RSS-Gen. issue 5 Apr. 2018

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

### 1.3 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd.,

Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309 Canada Registration number: 2324G


### 1.4 Special Accessories

There are no special accessories used while test was conducted.

### 1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### SYSTEM TEST CONFIGURATION

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

### 2.3 Test Procedure

#### 2.3.1 **Conducted Emissions**

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

#### 2.3.2 **Conducted Test (RF)**

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

#### 2.3.3 **Radiated Emissions**

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level. Note:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor. Following shows an offset computation example with cable loss and attenuator.

### 2.5 Configuration of Tested System

Fig. 2-1 Radiated Emission Configuration

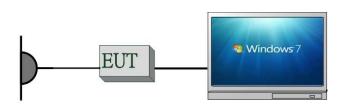


Fig.2-3 Conducted Emission (Antenna Port) Configuration



Fig. 2-2 Conducted Emission (AC Power Line) Configuration




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1	WLAN Test Software	N/A	N/A	N/A	N/A	N/A
2	Notebook	Lenovo	T420	S0012483	Shielded	Unshielded
3	Notebook	Lenovo	T420	S0012407	Shielded	Unshielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### **SUMMARY OF TEST RESULTS**

FCC Rules	IC Rules	Description Of Test	Result
§15.207(a)	RSS-Gen §8.8	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	RSS-247 §5.4(4)	Peak Output Power	Compliant
§15.247(a)(2)	RSS-247 §5.1 (1) RSS-Gen §6.7	6dB & 99% Emission Bandwidth	Compliant
§15.247(d)	RSS-247 §5.5 RSS-Gen §8.10	Conducted Band Edge and Spurious Emission	Compliant
§15.205 §15.209 §15.247(d)	RSS-247 §5.5 RSS-Gen §8.9 RSS-Gen §8.10 RSS-Gen §6.13	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	RSS-247 §5.2(2)	Power Spectral Density	Compliant
§15.203 §15.247(b)	RSS- Gen §6.8	Antenna Requirement	Compliant

### **DESCRIPTION OF TEST MODES**

### 4.1 Operated in 2400 ~ 2483.5MHz Band

11 channels are provided for 802.11b,g and n HT20

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only. 

Phis Application of the sample of documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### 4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3. Investigation has been done on all the possible configurations for searching the worst case. The gevin UE is pre-scanned among below modes.

Modulation	Trans	smission Cha	Multiple Transmission Spatial	
⊠ 802.11 b	⊠ Ch0 ⊠	Ch1 ☐ Ch2	□ Ch3	□ 2TX
⊠ 802.11 g	⊠ Ch0 ⊠	Ch1 ☐ Ch2	☐ Ch3	□ 2TX
⊠ 802.11 n	⊠ Ch0 ⊠	Ch1 ☐ Ch2	□ Ch3	⊠ MIMO

4. Therefore, below summary is the modes of test configuration that yield the highest reading and generate the highest emission chosen to carry out the relevantly mandatory test items.



### **RADIATED EMISSION TEST:**

RADIATED EMISSION TEST (BELOW 1 GHz)						
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT	
802.11g	1 to 11	6	OFDM	6	Ch1	
802.11n (HT20)	1 to 11	6	OFDM	MCS 8	MIMO	

RADIATED EMISSION TEST (ABOVE 1 GHz)						
MODE AVAILABLE TESTED MODULATION DATA RATE ANTENNA (Mbps) PORT						
802.11b	1 to 11	1, 6, 11	DSSS	1	Ch1	
802.11g	1 to 11	1, 6, 11	OFDM	6	Ch1	
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	MCS 8	MIMO	

#### Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g/n WLAN Transmitter for channel Low, Mid and High, the worst case E1 position was reported.

### ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST						
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT	
802.11b	1 to 11	1, 6, 11	DSSS	11	Ch1	
802.11g	1 to 11	1, 6, 11	OFDM	54	Ch1	
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	MCS 8	MIMO	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 0.0014
RF output power, conducted	+/- 1.14
Power density, conducted	+/- 1.40
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87

### Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

CONDUCTED EMISSION TEST

### 6.1 Standard Applicable

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Lin dB(	nits uV)
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

### 6.2 Measurement Equipment Used

	Co	nducted Emission	Test Site		
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
CABLE	EMCI	CFD300-NL	CERF	06/27/2019	06/26/2020
EMI Test Receiver	R&S	ESCI	100064	07/24/2018	07/23/2019
LISN	SCHWARZ- BECK	NSLK 8127	8127-541	01/31/2019	01/30/2020
LISN	SCHAFFNER	NNB 41	03/10013	02/13/2019	02/12/2020
Software		EZ-EMC(	CCS-3A1-CE)		

### 6.3 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

<sup>1.</sup> The lower limit shall apply at the transition frequencies

<sup>2.</sup> The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.



### 6.4 Test SET-UP (Block Diagram of Configuration)

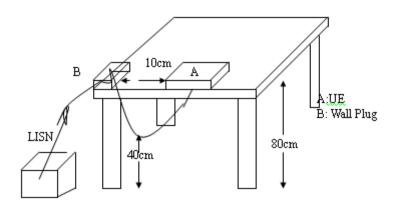

### 6.5 Measurement Procedure


- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

#### 6.6 Measurement Result

Note: Refer to next page for measurement data and plots.

Note2: The \* reveals the worst-case results that closet to the limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






### AC POWER LINE CONDUCTED EMISSION TEST DATA

**Description:** Operation Date: 2019/7/16

Line: L1 Temp.(°C)/Hum.(%): 25.7(°C)/62%

AC 120V/60Hz **Test Voltage:** Test By: Henry

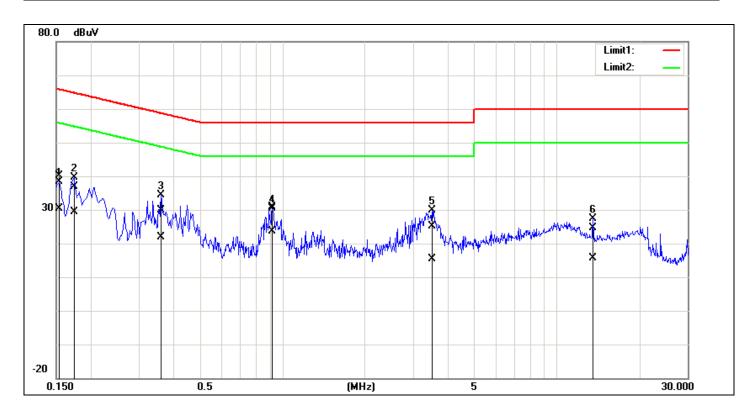


No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak Iimit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1539	30.09	20.23	10.14	40.23	30.37	65.78	55.79	-25.55	-25.42	Pass
2	0.1740	26.80	19.17	10.14	36.94	29.31	64.76	54.77	-27.82	-25.46	Pass
3	0.3620	19.66	11.84	10.14	29.80	21.98	58.68	48.68	-28.88	-26.70	Pass
4*	0.9220	20.76	13.45	10.17	30.93	23.62	56.00	46.00	-25.07	-22.38	Pass
5	3.5100	14.81	5.24	10.22	25.03	15.46	56.00	46.00	-30.97	-30.54	Pass
6	13.5580	14.20	5.35	10.36	24.56	15.71	60.00	50.00	-35.44	-34.29	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 

Replay a state of the results snown in this test report refer only to the sample(s) tested and such sa document is unlawful and offenders may be prosecuted to the fullest extent of the law






**Description:** Operation Date: 2019/7/16

Line: Temp.(°C)/Hum.(%): 25.7(°C)/62%

AC 120V/60Hz **Test Voltage:** Test By: Henry

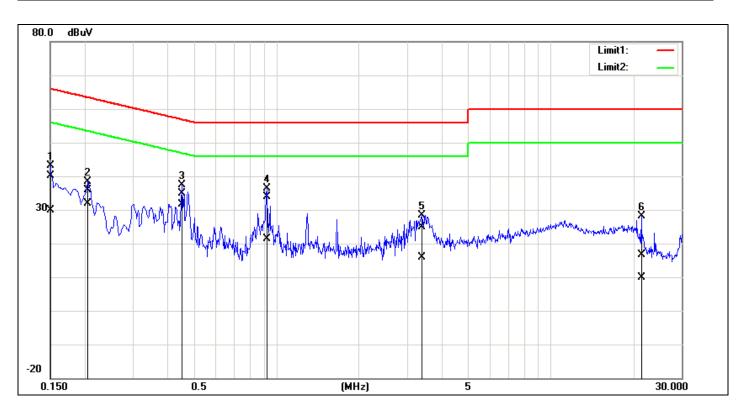

No.	Frequency	QuasiPeak reading	Average	Correction	QuasiPeak result	Average result	QuasiPeak Iimit	Average	QuasiPeak margin	Average	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1500	30.07	19.91	10.02	40.09	29.93	65.99	56.00	-25.90	-26.07	Pass
2	0.2060	25.92	21.94	10.02	35.94	31.96	63.36	53.37	-27.42	-21.41	Pass
3*	0.4540	24.96	21.64	10.03	34.99	31.67	56.80	46.80	-21.81	-15.13	Pass
4	0.9260	23.94	11.34	10.04	33.98	21.38	56.00	46.00	-22.02	-24.62	Pass
5	3.3820	14.78	5.68	10.08	24.86	15.76	56.00	46.00	-31.14	-30.24	Pass
6	21.4540	6.22	-0.45	10.30	16.52	9.85	60.00	50.00	-43.48	-40.15	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 

Replay a state of the results snown in this test report refer only to the sample(s) tested and such sa document is unlawful and offenders may be prosecuted to the fullest extent of the law



### **DUTY CYCLE OF TEST SIGNAL**

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

### Formula:

Duty Cycle = Ton / (Ton+Toff)

### **Measurement Procedure:**

- 1. Set span = Zero
- 2. RBW = 8MHz
- 3. VBW = 8MHz,
- 4. Detector = Peak

### **Duty Cycle:**

	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
802.11b	99.06	0.04	0.12	0.01
802.11g	93.32	0.30	0.72	1.00
802.11n_20	92.84	0.32	0.77	1.00

b = 99.06%, q = 93.32%, n ht 20 = 92.8

Duty Cycle Factor:  $10 * \log(1/0.9906) = 0.04$ Duty Cycle Factor:  $10 * \log(1/0.9332) = 0.3$ Duty Cycle Factor:  $10 * \log(1/0.9284) = 0.32$ 

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




### 7.1 DUTY CYCLE TEST SIGNAL Measurement Result


802.11b\_20MHz

R F 50 0 DC REF Free Run FRG-Int.ew FARENCE OF BRITES OF Avg Type: Voltage ΔMkr3 8.496 ms 0.57 dB 2.437000000 GH Start Fre Stop Fre 2.437000000 GH Span 0 Hz Sweep 20.00 ms (5001 pts) CF Step #VBW 8.0 MHz -0.01 dBn 12.01 dBn 0.57 dE 12.01 dBn (A) Freq Offse Scale Typ

### 802.11n\_20MHz

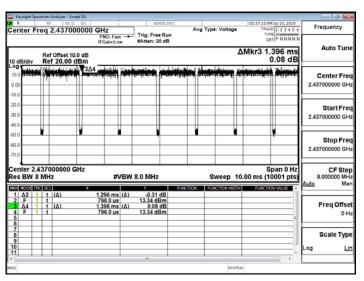

### 802.11g\_20MHz

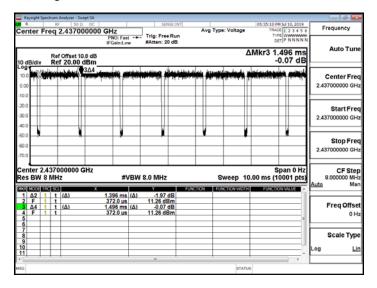

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### PEAK OUTPUT POWER MEASUREMENT

### 8.1 Standard Applicable

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.

Per RSS-247 §5.4(d)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

As per FCC KDB 662911 D01

Unequal antenna gains, with equal transmit powers. For antenna gains given by G1, G2, ..., GN dBi.

(i) If transmit signals are correlated, then Directional gain

=  $10 \log[(10^{G1/20} + 10^{G2/20} + ... + 10^{GN/20})^2/N_{ANT}] dBi$ 

[Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

The antenna gain is not grater than 6 dBi. Therefore, reduction of power is not required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




### 8.2 Measurement Equipment Used

	Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
Power Meter	Anritsu	ML2496A	1326001	08/03/2018	08/02/2019				
Power Sensor	Anritsu	MA2411B	1315048	08/03/2018	08/02/2019				
Power Sensor	Anritsu	MA2411B	1315049	08/03/2018	08/02/2019				
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020				

### 8.3 Test Set-up

#### Power Meter:



### 8.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

### **Power Meter:**

It is used as the auxiliary test equipment to conduct the output power measurement.

4. Record the max. Reading as observed from Spectrum or Power Meter.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 8.5 Measurement Result

### **Antenna Chain 0**

802.1	1b Ch0				
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT
1	2412	1	19.39	30.00	PASS
6	2437	1	19.29	30.00	PASS
11	2462	1	19.45	30.00	PASS
802.1	1b Ch0				-
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT
1	2412	1	15.81	30.00	PASS
6	2437	1	15.79	30.00	PASS
11	2462	1	15.83	30.00	PASS

002.1	1~ Ch0				
CH	1g Ch0 Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT
1	2412	6	20.94	30.00	PASS
6	2437	6	20.98	30.00	PASS
11	2462	6	21.02	30.00	PASS
802.1	1g Ch0				
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT
1	2412	6	11.77	30.00	PASS
6	2437	6	11.74	30.00	PASS
11	2462	6	11.78	30.00	PASS

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對测试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)



802.1	802.11n_HT20M Ch0							
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT			
1	2412	MCS0	21.31	30.00	PASS			
6	2437	MCS0	21.23	30.00	PASS			
11	2462	MCS0	21.34	30.00	PASS			
802.1	1n_HT20	M Ch0						
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT			
1	2412	MCS0	11.76	30.00	PASS			
6	2437	MCS0	11.68	30.00	PASS			
11	2462	MCS0	11.77	30.00	PASS			

### **Antenna Chain 1**

802.1	802.11b Ch1							
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT			
1	2412	1	19.47	30.00	PASS			
6	2437	1	19.43	30.00	PASS			
11	2462	1	19.52	30.00	PASS			
802.1	1b Ch1							
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT			
1	2412	1	15.88	30.00	PASS			
6	2437	1	15.87	30.00	PASS			
11	2462	1	15.89	30.00	PASS			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



802.1	802.11g Ch1							
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT			
1	2412	6	21.07	30.00	PASS			
6	2437	6	21.04	30.00	PASS			
11	2462	6	21.19	30.00	PASS			
802.1	1g Ch1							
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT			
1	2412	6	11.88	30.00	PASS			
6	2437	6	11.86	30.00	PASS			
11	2462	6	11.94	30.00	PASS			

802.1	802.11n_HT20M Ch1							
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT			
1	2412	MCS0	21.46	30.00	PASS			
6	2437	MCS0	21.39	30.00	PASS			
11	2462	MCS0	21.52	30.00	PASS			
802.1	1n_HT20	M Ch1		-				
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT			
1	2412	MCS0	11.83	30.00	PASS			
6	2437	MCS0	11.80	30.00	PASS			
11	2462	MCS0	11.86	30.00	PASS			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### **MIMO**

802.1	302.11n_HT20M MIMO							
СН	Freq. (MHz)	Data Rate	Peak Output Power (dRm)		Total Peak Output Power	Limit (dBm)	RESULT	
			CH 0	CH 1	(dBm)			
1	2412	MCS8	21.15	20.61	23.90	30.00	PASS	
6	2437	MCS8	21.09	20.54	23.83	30.00	PASS	
11	2462	MCS8	21.16	20.72	23.96	30.00	PASS	
802.1	1n_HT20	M MIMO						
СН	Freq. (MHz)	Data Rate	Po	Output wer Bm)	Max. Avg. Output include tune up tolerance Power	Limit (dBm)	RESULT	
			CH 0	CH 1	(dBm)			
1	2412	MCS8	11.97	11.19	14.93	30.00	PASS	
6	2437	MCS8	11.95	11.17	14.91	30.00	PASS	
11	2462	MCS8	12.01	11.22	14.97	30.00	PASS	

<sup>\*</sup> Note: The duty cycle factor is compensated to obtain the maximum value of measurement in average.



### **EIRP Antenna Chain 0**

nam v									
802.11	802.11b Ch0								
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT		
1	2412	1	15.81	1.93	17.74	36	PASS		
6	2437	1	15.79	1.93	17.72	36	PASS		
11	2462	1	15.83	1.93	17.76	36	PASS		
802.11	lg Ch0								
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT		
1	2412	6	11.77	1.93	13.70	36	PASS		
6	2437	6	11.74	1.93	13.67	36	PASS		
11	2462	6	11.78	1.93	13.71	36	PASS		
802.11	1n_HT20N	/I Ch0							
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT		
1	2412	MCS0	11.76	1.93	13.69	36	PASS		
6	2437	MCS0	11.68	1.93	13.61	36	PASS		
11	2462	MCS0	11.77	1.93	13.70	36	PASS		

### Antenna Chain 1

802.1	802.11b Ch1							
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT	
1	2412	1	15.88	2.30	18.18	36	PASS	
6	2437	1	15.87	2.30	18.17	36	PASS	
11	2462	1	15.89	2.30	18.19	36	PASS	
802.1	lg Ch1							
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT	
1	2412	6	11.88	2.30	14.18	36	PASS	
6	2437	6	11.86	2.30	14.16	36	PASS	
11	2462	6	11.94	2.30	14.24	36	PASS	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



802.1	802.11n_HT20M Ch1								
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT		
1	2412	MCS0	11.83	2.30	14.13	36	PASS		
6	2437	MCS0	11.80	2.30	14.10	36	PASS		
11	2462	MCS0	11.86	2.30	14.16	36	PASS		

#### **MIMO**

	<u> </u>									
802.1	802.11n_HT20M MIMO									
СН	CH Freq. (MHz)		Po	output wer Sm)	Total Avg. Output Power	Antenna Gain	EIRP (dBm)	Limit (dBm)	RESULT	
	(141112)	Rate	CH 0	CH 1	(dBm)	(dBi)	(uDiii)	(4211)		
1	2412	MCS8	21.15	20.61	14.93	5.13	20.06	36	PASS	
6	2437	MCS8	21.09	20.54	14.91	5.13	20.04	36	PASS	
11	2462	MCS8	21.16	20.72	14.97	5.13	20.10	36	PASS	

\* Note: EIRP = Average Power + Gain

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### **6DB & 99% BANDWIDTH MEASUREMENT**

### 9.1 Standard Applicable


The minimum 6 dB bandwidth shall be at least 500 kHz.

The occupied bandwidth or the "99% emission bandwidth" is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable **RSSs** 

### 9.2 Measurement Equipment Used

Conducted Emission Test Site									
EQUIPMENT MFR MODEL SER				LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020				
Spectrum Analyzer	Agilent	N9010A	MY53400256	11/21/2018	11/20/2019				
Attenuator	Marvelous	MVE2213- 10	RF80	02/26/2019	02/25/2020				

### 9.3 Test Set-up



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### 9.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:
  - Set the spectrum analyzer as RBW = 100 kHz, VBW = 3\*RBW, Span = 30M/50MHz, Detector=peak, Sweep=auto.
- 5. Mark the peak frequency and –6dB (upper and lower) frequency.
- 6. For 99% Bandwidth:
  - Set the spectrum analyzer as RBW=1%, VBW = 3\*RBW, Span = 30M/50MHz, Detector=Sample, Sweep=auto.
- 7. Turn on the 99% bandwidth function, max reading.
- 8. Repeat above procedures until all frequency of interest measured was complete.

### 9.5 Measurement Result

# 6dB Bandwidth Antenna Chain 0

802.11b Ch0

Freq.	6dB BW	Limit	Result
(MHz)	(kHz)	(kHz)	Result
2412	8106.00	> 500	PASS
2437	8117.00	> 500	PASS
2462	8115.00	> 500	PASS

### 802 11a Ch0

002.11g 0110								
Freq.	6dB BW	Limit	Result					
(MHz)	(kHz)	(kHz)	Result					
2412	15570.00	> 500	PASS					
2437	15570.00	> 500	PASS					
2462	15660.00	> 500	PASS					

### 802 11 n HT20 Ch0

002.11_11_11120 C110								
Freq.	6dB BW	Limit	Result					
(MHz)	(kHz)	(kHz)	Result					
2412	15820.00	> 500	PASS					
2437	15700.00	> 500	PASS					
2462	15510.00	> 500	PASS					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### **Antenna Chain 1**

#### 802.11b Ch1

002.118 0111							
Freq.	6dB BW	Limit	Result				
(MHz)	(kHz)	(kHz)	Resuit				
2412	8119.00	> 500	PASS				
2437	8109.00	> 500	PASS				
2462	8111.00	> 500	PASS				

### 802.11a Ch1

ı	Freq.	6dB BW	Limit	Result				
	(MHz)	(kHz)	(kHz)	Resuit				
	2412	15620.00	> 500	PASS				
	2437	15790.00	> 500	PASS				
	2462	15510.00	> 500	PASS				

#### 802.11 n HT20 Ch1

002:11_11_11120 0111									
Freq.	6dB BW	Limit	Result						
(MHz)	(kHz)	(kHz)	Resuit						
2412	16260.00	> 500	PASS						
2437	15480.00	> 500	PASS						
2462	15510.00	> 500	PASS						

# 99% Bandwidth **Antenna Chain 0**

802.11b Ch0		
Freq. (MHz)	99% BW (MHz)	
2412	10.207	
2437	10.23	
2462	10.242	

802.11g Ch0		
Freq.	99% BW	
(MHz)	(MHz)	
2412	16.485	
2437	16.455	
2462	16.488	


802.11n_HT20M Ch0			
Freq.	99% BW		
(MHz)	(MHz)		
2412	17.715		
2437	17.473		
2462	17.467		


### **Antenna Chain 1**

802.11b Ch	1	802.11g Ch1		802.11n_HT20M Ch1		
Freq. (MHz)	99% BW (MHz)	Freq. (MHz)	99% BW (MHz)	Freq. (MHz)	99% BW (MHz)	
2412	10.207	2412	16.488	2412	17.75	
2437	10.231	2437	16.47	2437	17.48	
2462	10.242	2462	16.514	2462	17.473	


### \*Refer to next page for plots






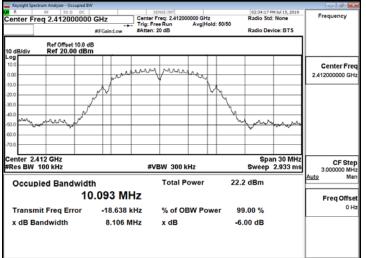


### 802.11b (Aux) 6dB Band Width Test Data CH-Low

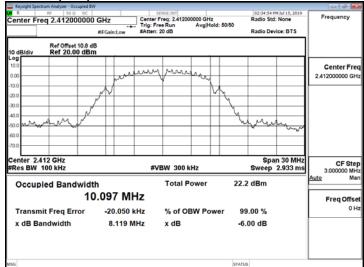


### 6dB Band Width Test Data CH-Mid

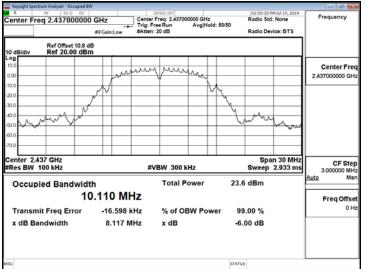


### 6dB Band Width Test Data CH-Mid

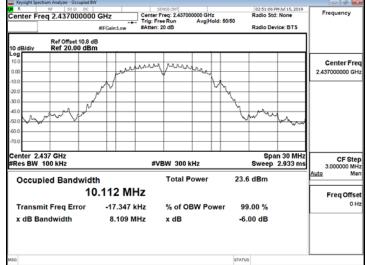

### 6dB Band Width Test Data CH-High

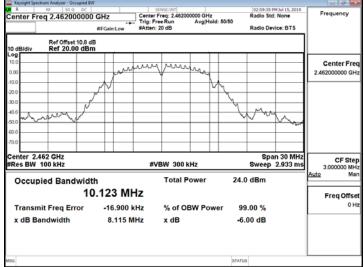

6dB Band Width Test Data CH-High

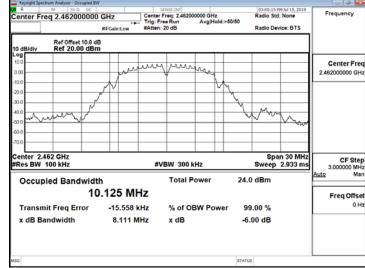


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




### 802.11g (Main) 6dB Band Width Test Data CH-Low

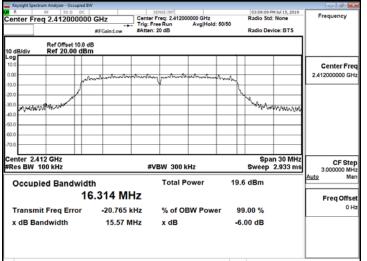


### 802.11g (Aux) 6dB Band Width Test Data CH-Low

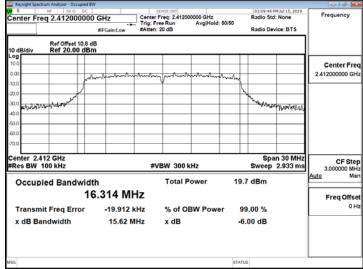


### 6dB Band Width Test Data CH-Mid

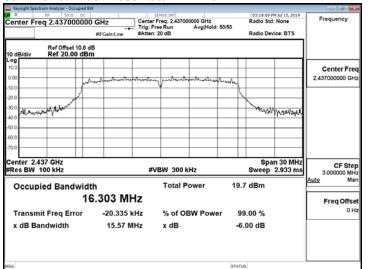

### 6dB Band Width Test Data CH-Mid

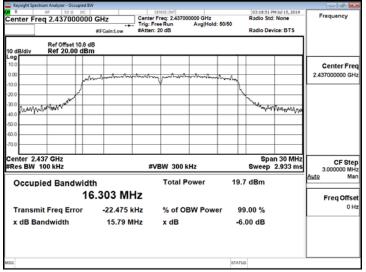

### 6dB Band Width Test Data CH-High

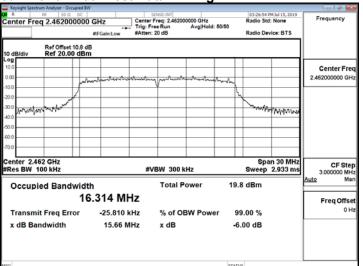

6dB Band Width Test Data CH-High




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




### 802.11n\_20M (Main) 6dB Band Width Test Data CH-Low

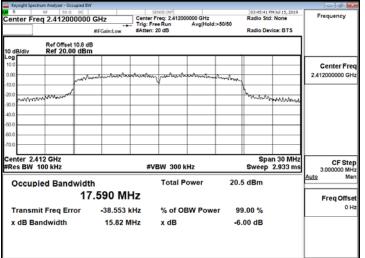


### 802.11n\_20M (Aux) 6dB Band Width Test Data CH-Low

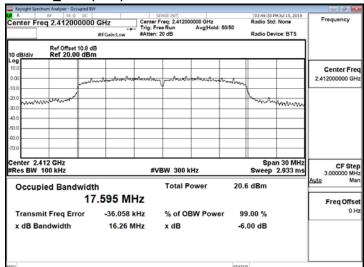


### 6dB Band Width Test Data CH-Mid

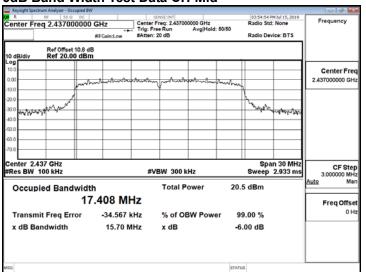


#### 6dB Band Width Test Data CH-Mid

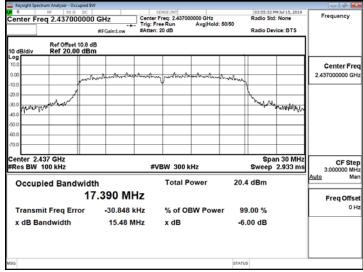

## 6dB Band Width Test Data CH-High

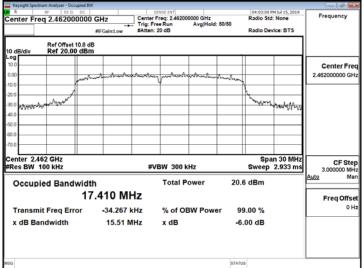

6dB Band Width Test Data CH-High

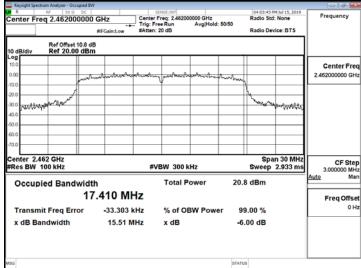


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




### 802.11b (Main) 99% Band Width Test Data CH-Low

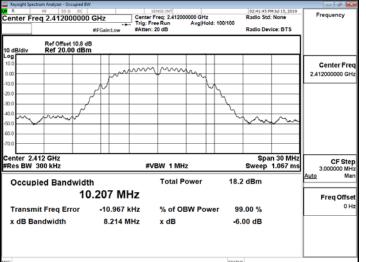


### 802.11b (Aux) 99% Band Width Test Data CH-Low

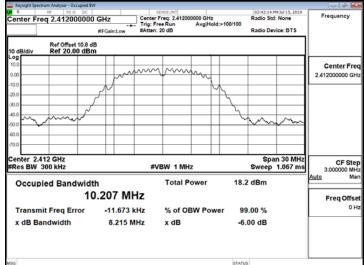


### 99% Band Width Test Data CH-Mid

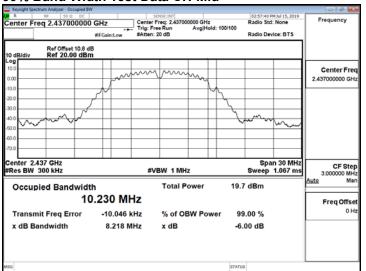


### 99% Band Width Test Data CH-Mid

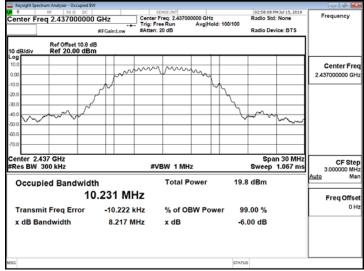

### 99% Band Width Test Data CH-High

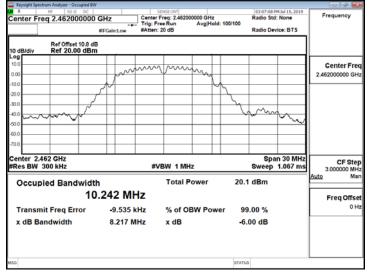


## 99% Band Width Test Data CH-High

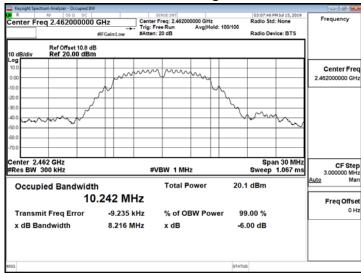


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。






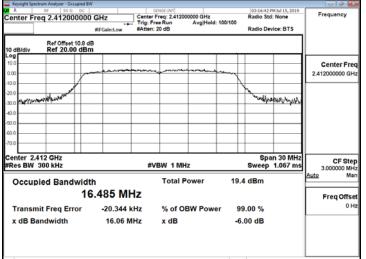


### 802.11g (Aux) 99% Band Width Test Data CH-Low

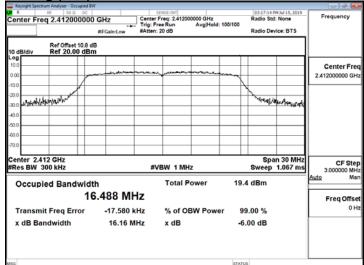


### 99% Band Width Test Data CH-Mid

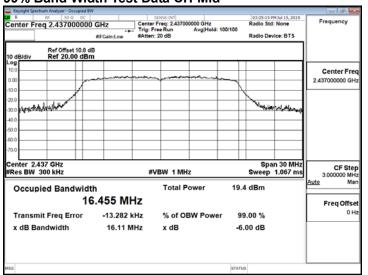


### 99% Band Width Test Data CH-Mid

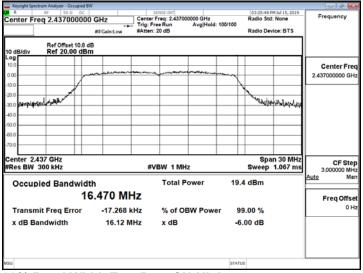

### 99% Band Width Test Data CH-High

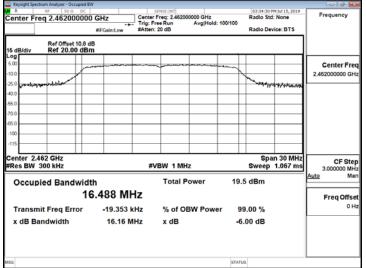

### 99% Band Width Test Data CH-High

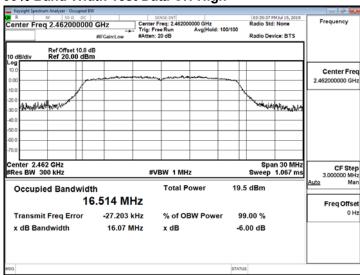


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製




### 802.11n\_20M (Main) 99% Band Width Test Data CH-Low

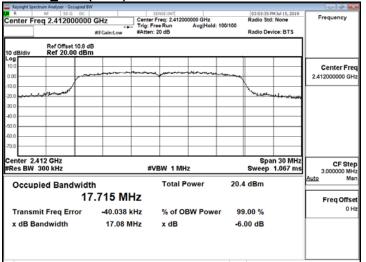


### 802.11n\_20M (Aux) 99% Band Width Test Data CH-Low

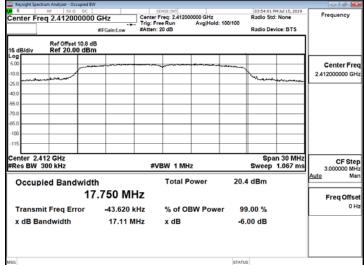


### 99% Band Width Test Data CH-Mid

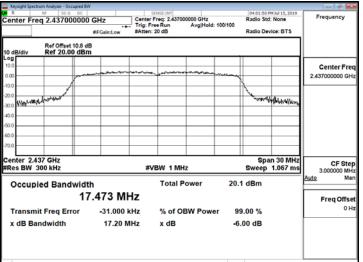


### 99% Band Width Test Data CH-Mid

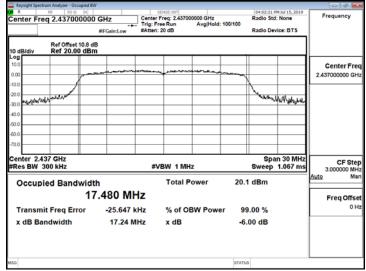

### 99% Band Width Test Data CH-High

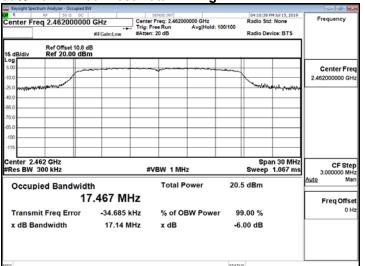

99% Band Width Test Data CH-High

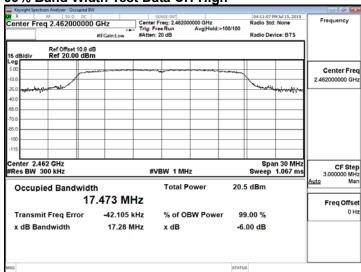

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



### CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT

#### **Standard Applicable** 10.1

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) & RSS-Gen §8.10, must also comply with the radiated emission limits specified in §15.209(a) & RSS-Gen §8.9.

If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

#### **Measurement Equipment Used** 10.2

Conducted Emission Test Site							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020		
Spectrum Analyzer	Agilent	N9010A	MY5340025 6	11/21/2018	11/20/2019		
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020		

#### 10.3 **Test SET-UP**



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



#### 10.4 Measurement Procedure

## **Conducted Band Edge Limt**

- Set analyzer center frequency to DTS channel center frequency.
- The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- Set the span to 1.5 times the DTS channel bandwidth.
- Set the RBW = 100kHz & VBW = 300 kHz.
- Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9.Use the peak marker function to determine the maximum amplitude level.

## **Conducted Band Edge:**

- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- 7. Set DL as the limit = reading on marker 1 20dBm
- 8. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 9. Repeat above procedures until all default test channel (low, middle, and high) was complete.

### **Conducted Spurious Emission:**

- To connect Antenna Port of EUT to Spectrum
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Set RBW = 100 kHz & VBW= 300 kHz, Detector = Peak, Sweep = Auto.
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Onless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only. 

Phis April 19 Age 1 documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### 10.5 **Measurement Result**


Referei	nce Leve	l of Limit 802.11b mode	Reference Level of Limit 802.11g mode		
Freq.	PSD	Reference Level of Limit	Freq.	PSD	Reference Level of Limit
(MHz)	(dBm)	(dBm)	(MHz)	(dBm)	(dBm)
2412	6.60	-13.40	2412	1.51	-18.49
2437	8.14	-11.86	2437	1.61	-18.39
2462	8.45	-11.55	2462	1.69	-18.31


Reference Level of Limit 802.11n20 mode							
Freq. (MHz)	PSD (dBm)	Reference Level of Limit (dBm)					
2412	5.32	-14.68					
2437	5.43	-14.57					
2462	5.77	-14.23					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is used defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


Member of the SGS Group (SGS SA)






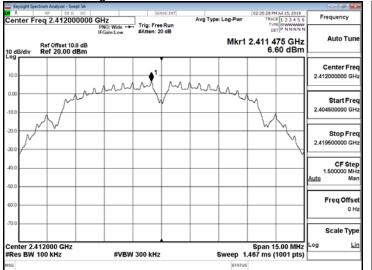


## 802.11g Band Edge Limit Test Data CH-Low

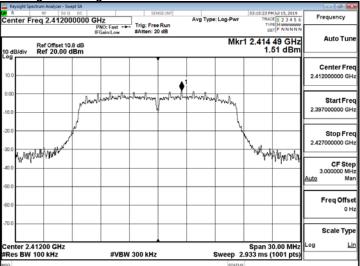


## 802.11b Band Edge Limit Test Data CH-Mid

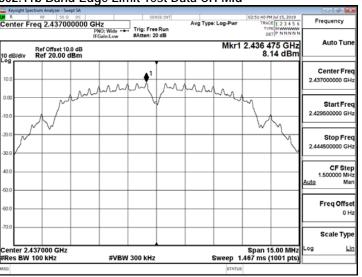


802.11g Band Edge Limit Test Data CH-Mid

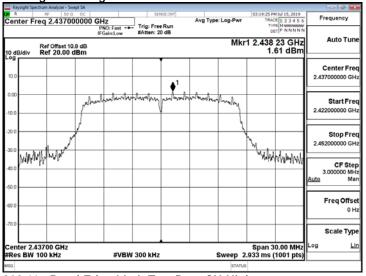

## 802.11b Band Edge Limit Test Data CH-High

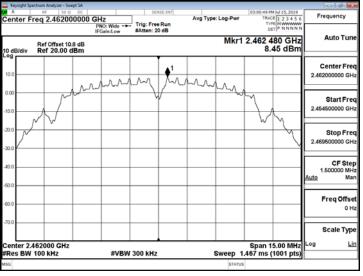



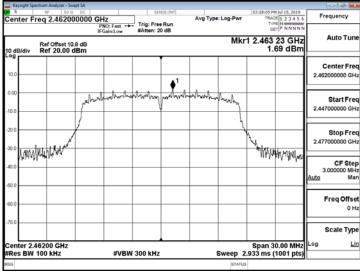

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and <a href="https://www.sgs.com/terms">conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.


Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




802.11n\_HT20 Band Edge Limit Test Data CH-Low

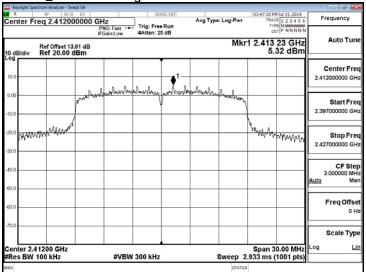

802.11n\_HT20 Band Edge Limit Test Data CH-Mid

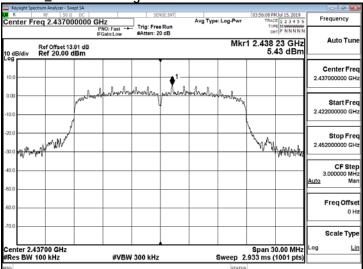

802.11n\_HT20 Band Edge Limit Test Data CH-High

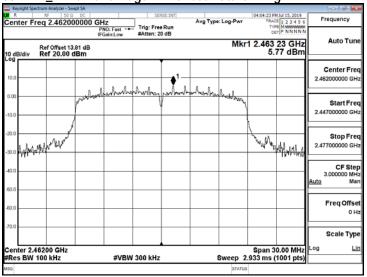

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 

Rps 月有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的兒子。本根告未绝本公司書面許可,不可可的役費?


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)




#### 802.11b

### Band Edge Test Data CH-Low

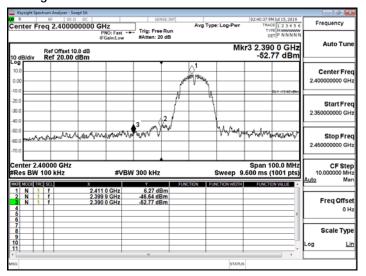


## Band Edge Test Data CH-High

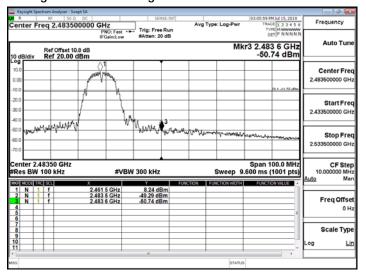


#### 802.11g

#### Band Edge Test Data CH-Low

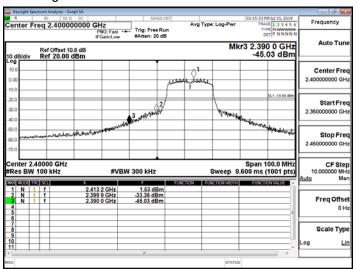

## Band Edge Test Data CH-High

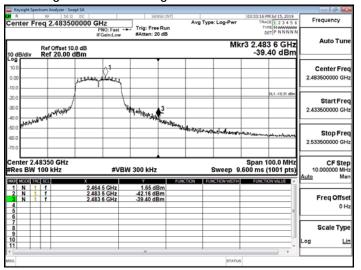


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




### 802.11n\_HT20

## Band Edge Test Data CH-Low

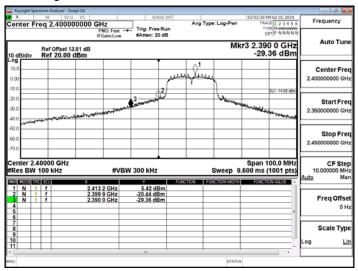

#### Band Edge Test Data CH-High

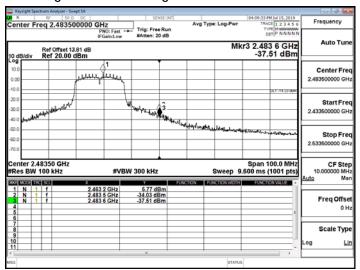


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Member of the SGS Group (SGS SA)




#### Spurious Emission\_802.11b\_20MHz\_Chain0\_2412MHz

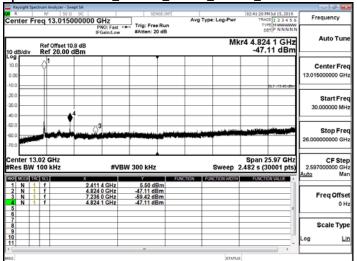


## Spurious Emission\_802.11b\_20MHz\_Chain0\_2437MHz

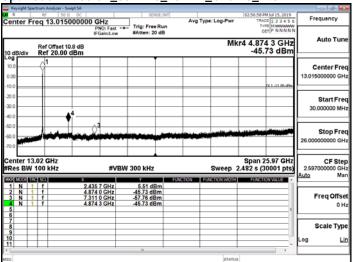


#### Spurious Emission\_802.11b\_20MHz\_Chain0\_2462MHz

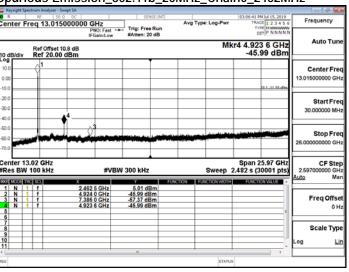


### Spurious Emission\_802.11g\_20MHz\_Chain0\_2412MHz

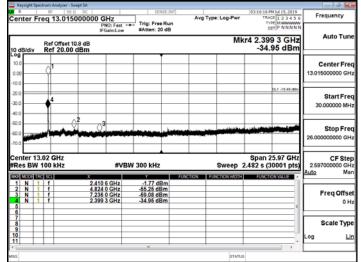

## Spurious Emission\_802.11g\_20MHz\_Chain0\_2437MHz

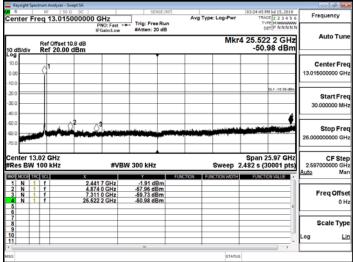


## Spurious Emission\_802.11g\_20MHz\_Chain0\_2462MHz

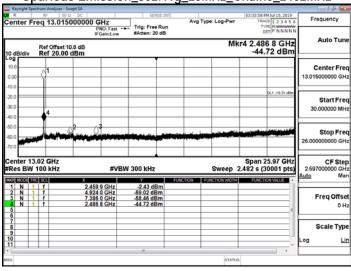


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




## Spurious Emission\_802.11n\_20MHz\_Chain0\_2412MHz

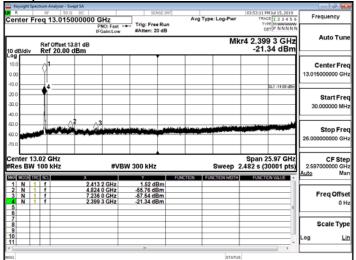

Spurious Emission\_802.11n\_20MHz\_Chain0\_2437MHz

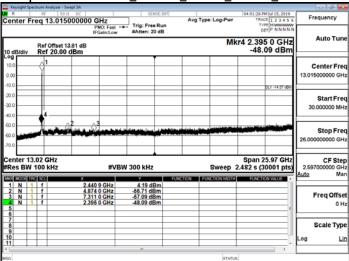

### Spurious Emission\_802.11n\_20MHz\_Chain0\_2462MHz

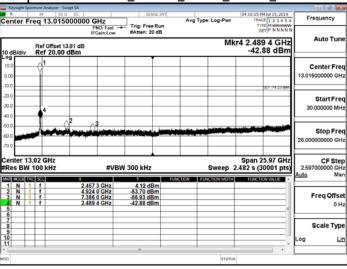

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 

Rps 月有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的兒子。本根告未绝本公司書面許可,不可可的役費?

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and for electronic Documents at <a href="www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)



### 11 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

#### 11.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the RSS-Gen §8.10 Table 7.

And according to 15.33(a)(1) & RSS-Gen §6.13(a) for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

According to RSS-Gen §8.9 Table 5 & 6 Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level  $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only. 

Phis April 19 Age 1 documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## 11.2 Measurement Equipment Used:


966A Chamber								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
Low Pass Filter	EWT	EWT-56-0019	RF46	02/26/2019	02/25/2020			
High Pass Filter	R&S	F13 HPF 3GHz	RF64	02/26/2019	02/25/2020			
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/26/2019	02/25/2020			
Bilog Antenna	Sunol Sciences	JB1	A052609	03/06/2019	03/05/2020			
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020			
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020			
Digital Ther- mo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020			
double Ridged Guide Horn Anten- na	ETC	MCTD 1209	DRH13M02003	08/20/2018	08/19/2019			
Loop Antenna	COM-POWER	AL-130	121051	03/22/2019	03/21/2020			
Horn Antenna	ETS LINDGREN	3116	00026370	12/26/2018	12/25/2019			
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020			
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020			
PSA Series Spec- trum Analyzer	Agilent	E4446A	MY46180323	05/29/2019	05/28/2020			
Antenna Tower	ccs	CC-A-1F	N/A	N.C.R	N.C.R			
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R			
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R			
Software		e3 V6	.11-20180413					

NOTE: N.C.R refers to Not Calibrated Required.





### 11.3 Test SET-UP

(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

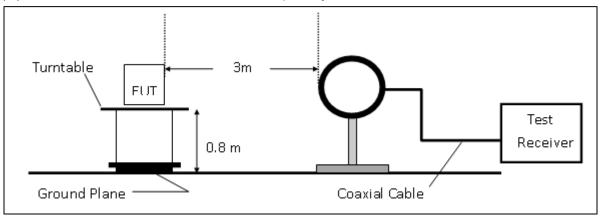

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

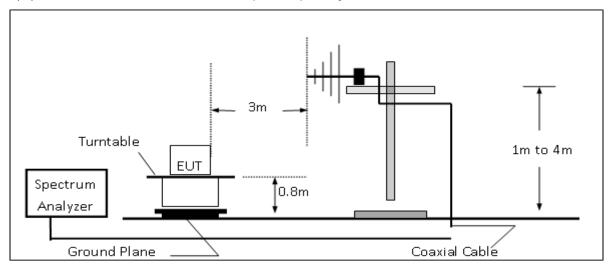

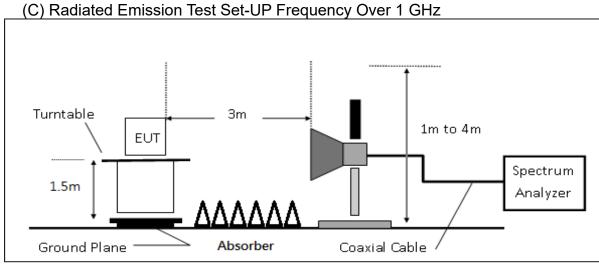

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### 11.4 Measurement Procedure

- The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 6. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 8. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 9. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 12. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Onless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only. 

Phis April 19 Age 1 documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## 11.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	•	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB $\mu$ V/m) = SPA. Reading level(dB $\mu$ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

#### Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz 11.6

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

#### 11.7 **Measurement Result**

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



## **Radiated Band Edge Measurement Result**


Report Number :T190711W03 **Test Date** :2019-07-16

**Operation Band** Temp./Humi. :802.11b :24/45

Frequency :2412 MHz :VERTICAL Antenna Pol.

**Operation Mode** :BE CH LOW Engineer :Kailin


EUT Pol. :E1 Plan

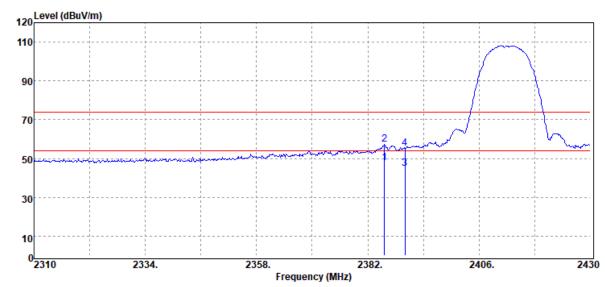

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
2385.60	Average	51.03	-3.38	47.65	54.00	-6.35
2385.60	Peak	60.61	-3.38	57.23	74.00	-16.77
2390.00	Average	48.05	-3.38	44.67	54.00	-9.33
2390.00	Peak	58.61	-3.38	55.23	74.00	-18.77

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

document is unlawful and offenders may be prosecuted to the fullest extent of the law.





Report Number :T190711W03

**Operation Band** :802.11b

:2412 MHz Frequency


**Operation Mode** :BE CH LOW

EUT Pol. :E1 Plan **Test Date** :2019-07-16

Temp./Humi. :24/45

:HORIZONTAL Antenna Pol.


Engineer :Kailin

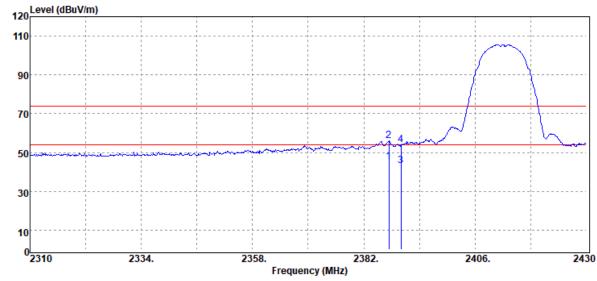

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2387.40	Average	48.62	-3.38	45.24	54.00	-8.76
2387.40	Peak	59.56	-3.38	56.18	74.00	-17.82
2390.00	Average	46.76	-3.38	43.38	54.00	-10.62
2390.00	Peak	57.17	-3.38	53.79	74.00	-20.21

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





Report Number :T190711W03

**Operation Band** :802.11b

:2462 MHz Frequency


**Operation Mode** :BE CH HIGH

EUT Pol. :E1 Plan **Test Date** :2019-07-16

Temp./Humi. :24/45


:VERTICAL Antenna Pol.

Engineer :Kailin

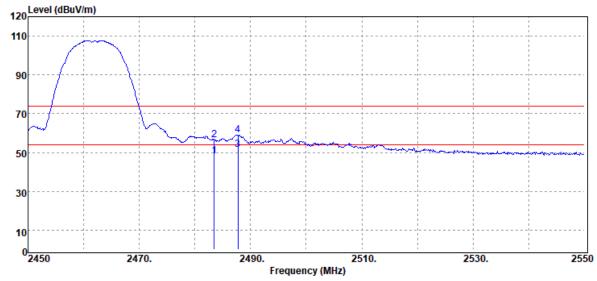

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	51.01	-2.83	48.18	54.00	-5.82
2483.50	Peak	59.49	-2.83	56.66	74.00	-17.34
2487.70	Average	54.22	<b>-</b> 2.80	51.42	54.00	-2.58
2487.70	Peak	61.95	-2.80	59.15	74.00	-14.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:2019-07-16

**Test Date** 




Report Number :T190711W03

**Operation Band** :802.11b Temp./Humi. :24/45

:2462 MHz :HORIZONTAL Frequency Antenna Pol.


**Operation Mode** :BE CH HIGH Engineer :Kailin

EUT Pol. :E1 Plan

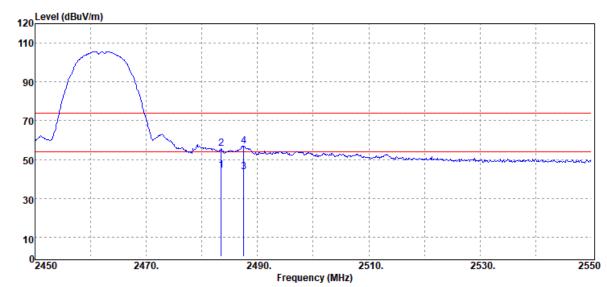

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	47.46	-2.83	44.63	54.00	-9.37
2483.50	Peak	58.61	-2.83	55.78	74.00	-18.22
2487.50	Average	46.54	-2.80	43.74	54.00	-10.26
2487.50	Peak	59.75	-2.80	56.95	74.00	-17.05

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11g Temp./Humi. :24/45

:2412 MHz :VERTICAL Frequency Antenna Pol.


**Operation Mode** :BE CH LOW Engineer :Kailin

EUT Pol. :E1 Plan

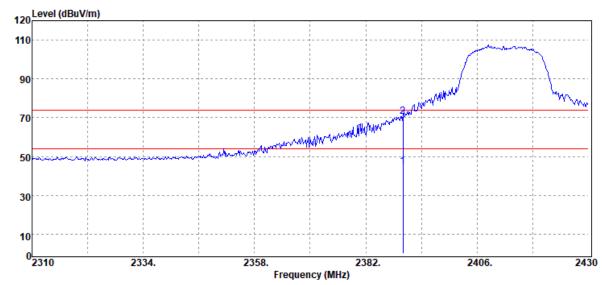

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2390.00	Average	48.13	-3.38	44.75	54.00	-9.25
2390.00	Peak	74.06	-3.38	70.68	74.00	-3.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Report Number :T190711W03

**Operation Band** :802.11g

:2412 MHz Frequency


**Operation Mode** :BE CH LOW

EUT Pol. :E1 Plan **Test Date** :2019-07-16

Temp./Humi. :24/45


:HORIZONTAL Antenna Pol.

Engineer :Kailin

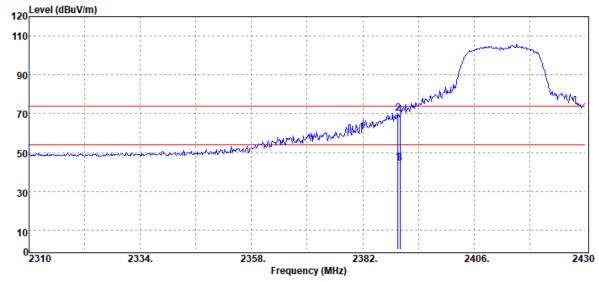

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2389.56	Average	48.23	-3.39	44.84	54.00	-9.16
2389.56	Peak	73.44	-3.39	70.05	74.00	-3.95
2390.00	Average	47.97	-3.38	44.59	54.00	-9.41
2390.00	Peak	72.92	-3.38	69.54	74.00	-4.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11g Temp./Humi. :24/45

:2462 MHz :VERTICAL Frequency Antenna Pol.


**Operation Mode** :BE CH HIGH Engineer :Kailin

EUT Pol. :E1 Plan

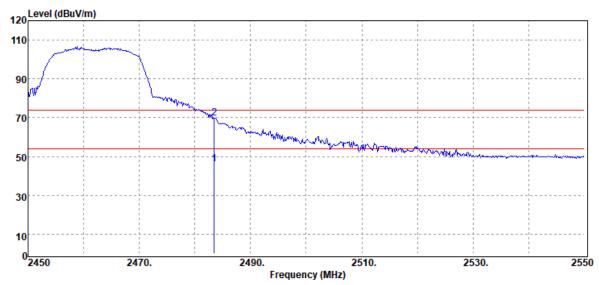

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	48.95	-2.83	46.12	54.00	-7.88
2483.50	Peak	72.42	-2.83	69.59	74.00	-4.41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:2019-07-16




Report Number :T190711W03 **Test Date** 

**Operation Band** :802.11g Temp./Humi. :24/45

:2462 MHz :HORIZONTAL Frequency Antenna Pol.


**Operation Mode** :BE CH HIGH Engineer :Kailin

EUT Pol. :E1 Plan

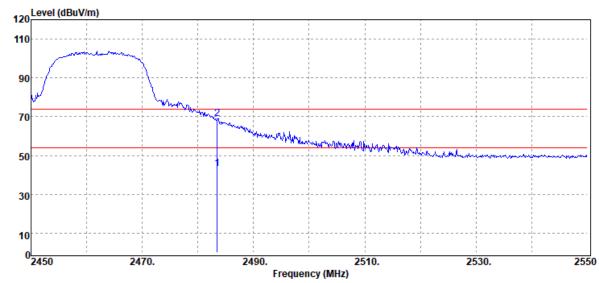

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	46.12	-2.83	43.29	54.00	-10.71
2483.50	Peak	71.56	-2.83	68.73	74.00	-5.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** Temp./Humi. :24/45 :802.11n20

:VERTICAL Frequency :2412 MHz Antenna Pol.

**Operation Mode** :BE CH LOW Engineer :Kailin


EUT Pol. :E1 Plan

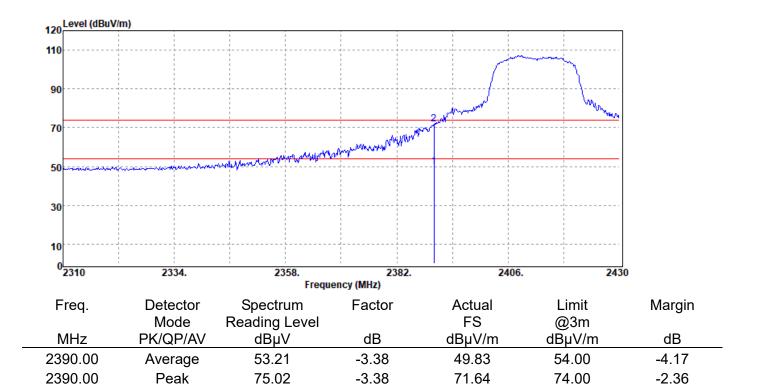

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only. 

Phis Application of the sample of documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






**Operation Band** :802.11n20 Temp./Humi. :24/45

:2412 MHz :HORIZONTAL Frequency Antenna Pol.


**Operation Mode** :BE CH LOW Engineer :Kailin

EUT Pol. :E1 Plan

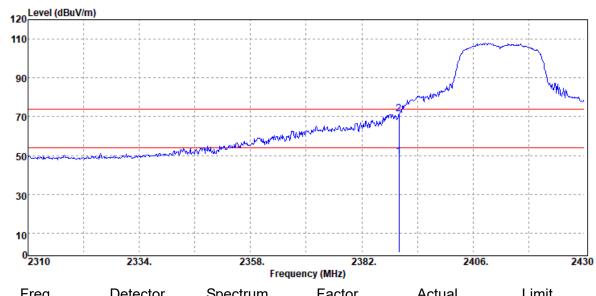

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2390.00	Average	52.65	-3.38	49.27	54.00	-4.73
2390.00	Peak	74.63	-3.38	71.25	74.00	-2.75

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:2019-07-16




Report Number :T190711W03 **Test Date** 

**Operation Band** :802.11n20 Temp./Humi. :24/45

:2462 MHz :VERTICAL Frequency Antenna Pol.


**Operation Mode** :BE CH HIGH Engineer :Kailin

EUT Pol. :E1 Plan

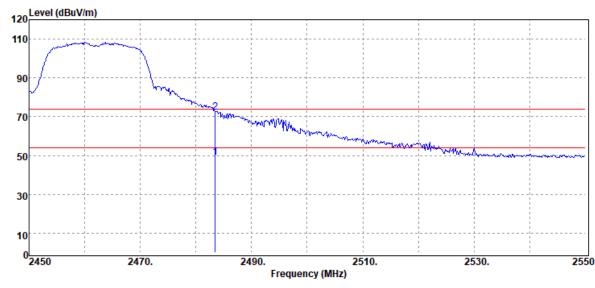

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	_
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	51.77	-2.83	48.94	54.00	-5.06
2483.50	Peak	74.93	-2.83	72.10	74.00	-1.90

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11n20 Temp./Humi. :24/45

:2462 MHz :HORIZONTAL Frequency Antenna Pol.

**Operation Mode** :BE CH HIGH Engineer :Kailin

EUT Pol. :E1 Plan

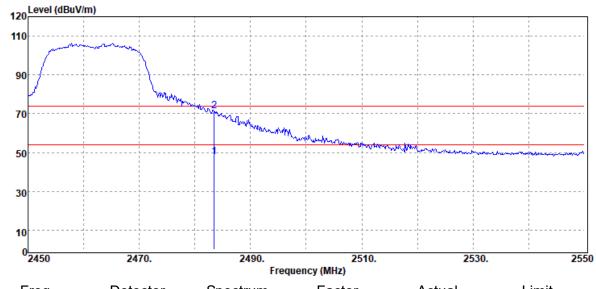

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
 MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	50.77	-2.83	47.94	54.00	-6.06
2483.50	Peak	74.37	-2.83	71.54	74.00	-2.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# **Below 1GHz Worst-Case Data: Radiated Spurious Emission Measurement Result**


Report Number :T190711W03 Test Date :2019-07-16

**Operation Band** Temp./Humi. :24/45 :802.11g

Frequency :2437 MHz :VERTICAL Antenna Pol.

Operation Mode :TX CH MID Engineer :Kailin

EUT Pol. :E1 Plan

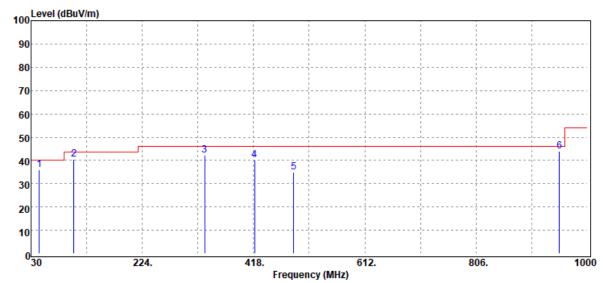


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
44.55	QP	48.59	-12.72	35.87	40.00	-4.13
104.69	QP	51.65	-11.19	40.46	43.50	-3.04
332.64	Peak	49.43	-7.17	42.26	46.00	-3.74
419.94	Peak	44.86	-4.62	40.24	46.00	-5.76
487.84	Peak	37.84	-3.01	34.83	46.00	-11.17
951.50	Peak	39.75	4.19	43.94	46.00	-2.06

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only. 

Phis Application of the sample of documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





Report Number :T190711W03

**Operation Band** :802.11g

:2437 MHz Frequency


**Operation Mode** :TX CH MID

EUT Pol. :E1 Plan **Test Date** :2019-07-16

Temp./Humi. :24/45


:HORIZONTAL Antenna Pol.

:Kailin Engineer

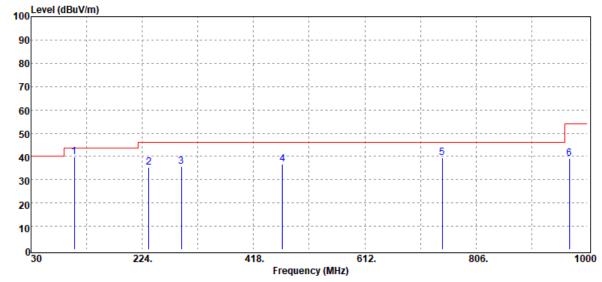

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
105.66	Peak	50.90	-11.02	39.88	43.50	-3.62
235.64	Peak	45.98	-10.56	35.42	46.00	-10.58
291.90	Peak	43.80	-8.33	35.47	46.00	-10.53
468.44	Peak	40.21	-3.44	36.77	46.00	-9.23
746.83	Peak	37.50	1.94	39.44	46.00	-6.56
968.96	Peak	33.87	5.23	39.10	54.00	-14.90

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** Temp./Humi. :24/44 :802.11n20

:2437 MHz :VERTICAL Frequency Antenna Pol.


**Operation Mode** :TX CH MID Engineer :Kailin

EUT Pol. :E1 Plan

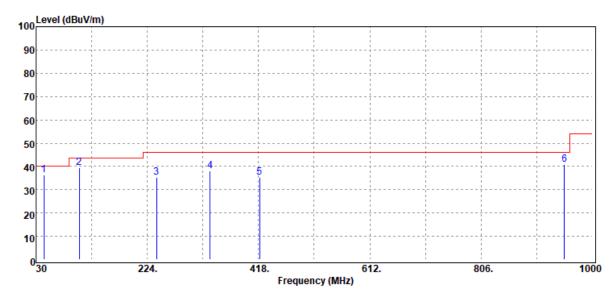

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
43.58	Peak	48.43	-12.05	36.38	40.00	-3.62
105.66	QP	50.49	-11.02	39.47	43.50	-4.03
240.49	Peak	45.58	-10.25	35.33	46.00	-10.67
333.61	Peak	45.17	-7.22	37.95	46.00	-8.05
419.94	Peak	39.91	-4.62	35.29	46.00	-10.71
951.50	Peak	36.63	4.19	40.82	46.00	-5.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:2019-07-16

**Test Date** 




Report Number :T190711W03

**Operation Band** Temp./Humi. :24/44 :802.11n20

:2437 MHz :HORIZONTAL Frequency Antenna Pol.

**Operation Mode** :TX CH MID Engineer :Kailin

EUT Pol. :E1 Plan

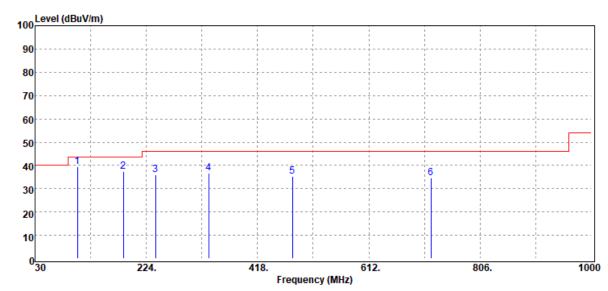

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
103.72	Peak	51.16	-11.62	39.54	43.50	-3.96
184.23	Peak	48.51	-11.14	37.37	43.50	-6.13
240.49	Peak	46.08	-10.25	35.83	46.00	-10.17
332.64	Peak	43.69	-7.17	36.52	46.00	-9.48
479.11	Peak	38.14	-2.98	35.16	46.00	-10.84
720.64	Peak	34.16	0.58	34.74	46.00	-11.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### **Above 1GHz Data:**

## **Radiated Spurious Emission Measurement Result**


Report Number :T190711W03 Test Date :2019-07-16

**Operation Band** Temp./Humi. :25/43 :802.11b

Frequency :2412 MHz :VERTICAL Antenna Pol.

Operation Mode :TX CH LOW :Kailin Engineer

EUT Pol. :E1 Plan

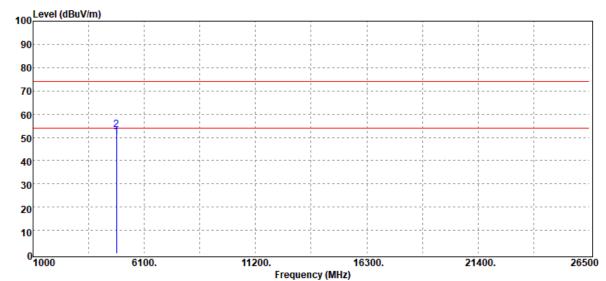


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	47.16	2.84	50.00	54.00	-4.00
4824.00	Peak	50.55	2.84	53.39	74.00	-20.61

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only. 

Phis Application of the sample of documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






**Operation Band** :802.11b Temp./Humi. :25/43

:2412 MHz :HORIZONTAL Frequency Antenna Pol.


**Operation Mode** :TX CH LOW Engineer :Kailin

EUT Pol. :E1 Plan

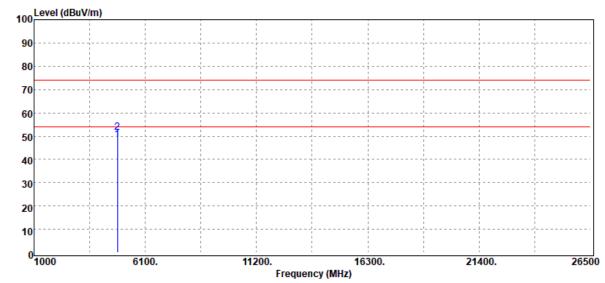

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4824.00	Average	45.61	2.84	48.45	54.00	-5.55
4824.00	Peak	48.68	2.84	51.52	74.00	-22.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11b Temp./Humi. :24/43

:2437 MHz :VERTICAL Frequency Antenna Pol.


**Operation Mode** :TX CH MID Engineer :Kailin

EUT Pol. :E1 Plan

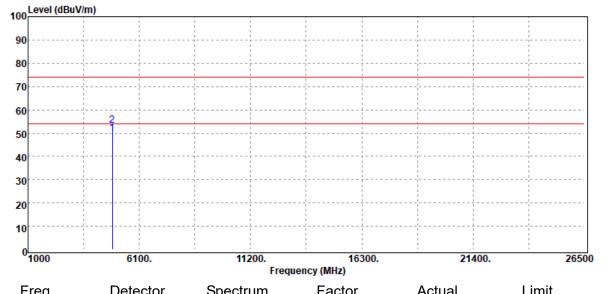

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	_
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4874.00	Average	46.98	2.98	49.96	54.00	-4.04
4874.00	Peak	50.42	2.98	53.40	74.00	-20.60

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11b Temp./Humi. :24/43

:2437 MHz :HORIZONTAL Frequency Antenna Pol.


**Operation Mode** :TX CH MID Engineer :Kailin

EUT Pol. :E1 Plan

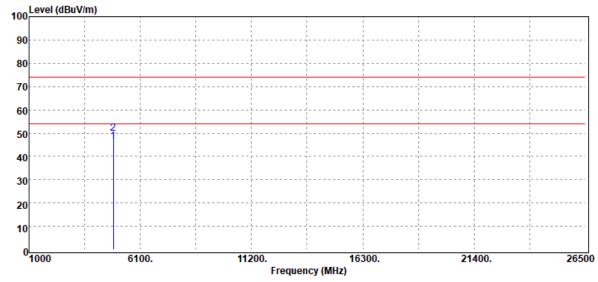

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	_
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4874.00	Average	43.27	2.98	46.25	54.00	-7.75
4874.00	Peak	46.86	2.98	49.84	74.00	-24.16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11b Temp./Humi. :24/43

:2462 MHz :VERTICAL Frequency Antenna Pol.


**Operation Mode** :TX CH HIGH Engineer :Kailin

EUT Pol. :E1 Plan

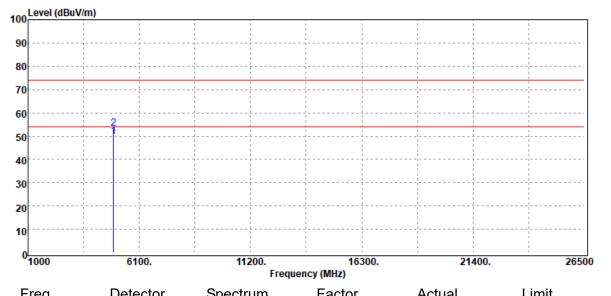

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	_
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4924.00	Average	46.36	3.46	49.82	54.00	-4.18
4924.00	Peak	49.85	3.46	53.31	74.00	-20.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11b Temp./Humi. :24/43

:2462 MHz :HORIZONTAL Frequency Antenna Pol.


**Operation Mode** :TX CH HIGH Engineer :Kailin

EUT Pol. :E1 Plan

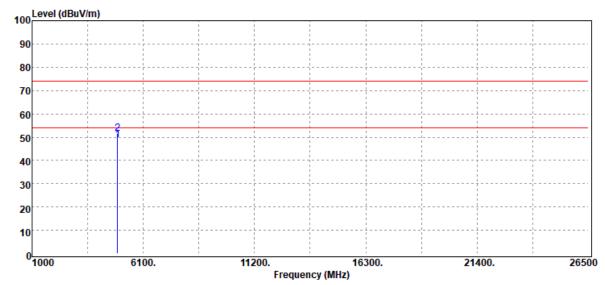

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	45.22	3.46	48.68	54.00	-5.32
4924.00	Peak	48.26	3.46	51.72	74.00	-22.28

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** Temp./Humi. :25/44 :802.11g

:2412 MHz :VERTICAL Frequency Antenna Pol.


**Operation Mode** :TX CH LOW Engineer :Kailin

EUT Pol. :E1 Plan

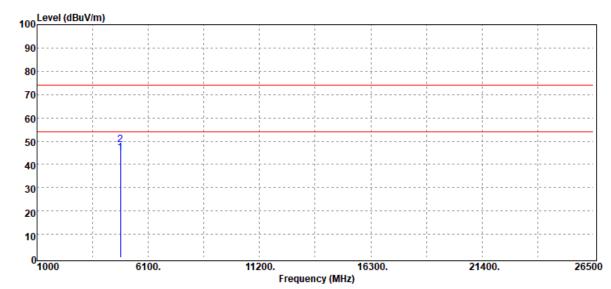

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4824.00	Average	42.02	2.84	44.86	54.00	-9.14
4824.00	Peak	45.61	2.84	48.45	74.00	-25.55

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** Temp./Humi. :25/44 :802.11g

:2412 MHz :HORIZONTAL Frequency Antenna Pol.


**Operation Mode** :TX CH LOW Engineer :Kailin

EUT Pol. :E1 Plan

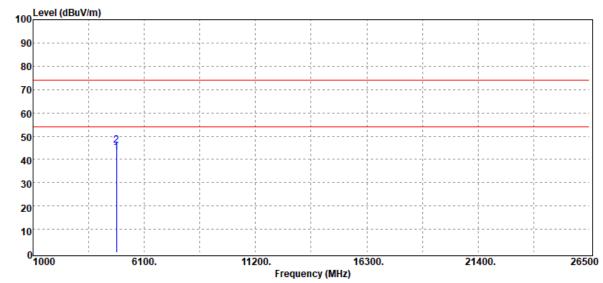

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4824.00	Average	40.12	2.84	42.96	54.00	-11.04
4824.00	Peak	43.22	2.84	46.06	74.00	-27.94

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** Temp./Humi. :25/44 :802.11g

:2437 MHz :VERTICAL Frequency Antenna Pol.


**Operation Mode** :TX CH MID Engineer :Kailin

EUT Pol. :E1 Plan

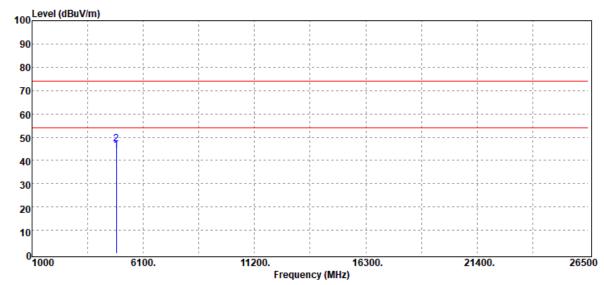

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	41.28	2.98	44.26	54.00	-9.74
4874.00	Peak	44.17	2.98	47.15	74.00	-26.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** Temp./Humi. :25/44 :802.11g

:2437 MHz :HORIZONTAL Frequency Antenna Pol.


**Operation Mode** :TX CH MID Engineer :Kailin

EUT Pol. :E1 Plan

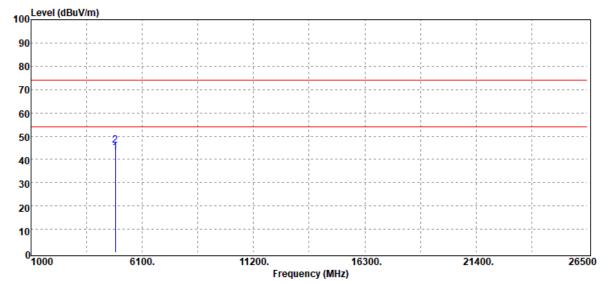

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4874.00	Average	39.83	2.98	42.81	54.00	-11.19
4874.00	Peak	43.04	2.98	46.02	74.00	-27.98

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** :802.11g Temp./Humi. :25/45

:2462 MHz :VERTICAL Frequency Antenna Pol.


**Operation Mode** :TX CH HIGH Engineer :Kailin

EUT Pol. :E1 Plan

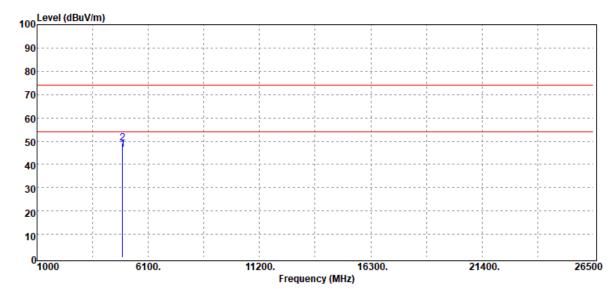

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4924.00	Average	42.81	3.46	46.27	54.00	-7.73
4924.00	Peak	45.56	3.46	49.02	74.00	-24.98

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** Temp./Humi. :25/45 :802.11g

:2462 MHz :HORIZONTAL Frequency Antenna Pol.


**Operation Mode** :TX CH HIGH Engineer :Kailin

EUT Pol. :E1 Plan

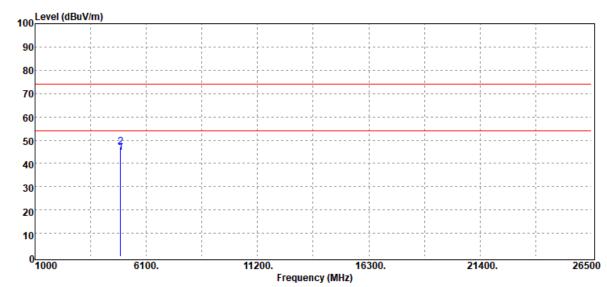

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4924.00	Average	41.03	3.46	44.49	54.00	-9.51
4924.00	Peak	43.71	3.46	47.17	74.00	-26.83

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** Temp./Humi. :25/45 :802.11n20

:VERTICAL Frequency :2412 MHz Antenna Pol.


**Operation Mode** :TX CH LOW Engineer :Kailin

EUT Pol. :E1 Plan

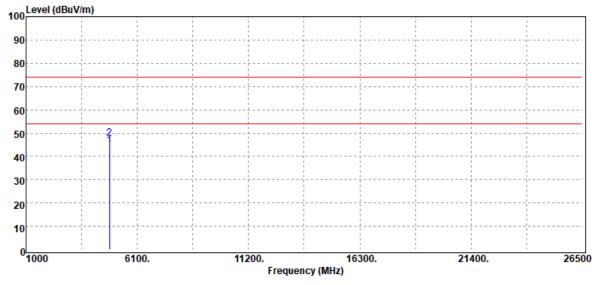

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	41.88	2.84	44.72	54.00	-9.28
4824.00	Peak	44.94	2.84	47.78	74.00	-26.22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** Temp./Humi. :25/45 :802.11n20

:HORIZONTAL Frequency :2412 MHz Antenna Pol.


**Operation Mode** :TX CH LOW Engineer :Kailin

EUT Pol. :E1 Plan

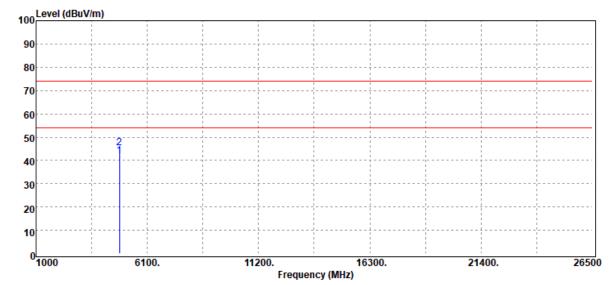

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4824.00	Average	39.04	2.84	41.88	54.00	-12.12
4824.00	Peak	42.63	2.84	45.47	74.00	-28.53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** Temp./Humi. :24/45 :802.11n20

:2437 MHz :VERTICAL Frequency Antenna Pol.


**Operation Mode** :TX CH MID Engineer :Kailin

EUT Pol. :E1 Plan

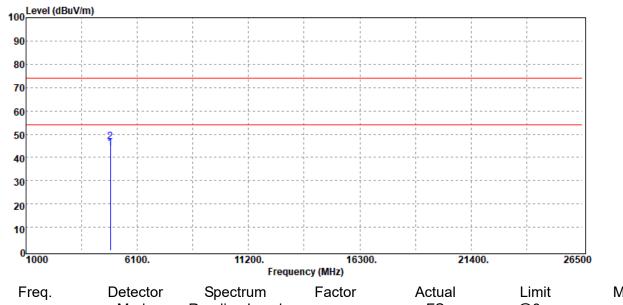

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	_
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4874.00	Average	41.10	2.98	44.08	54.00	-9.92
4874.00	Peak	43.73	2.98	46.71	74.00	-27.29

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** Temp./Humi. :24/45 :802.11n20

:2437 MHz :HORIZONTAL Frequency Antenna Pol.


**Operation Mode** :TX CH MID Engineer :Kailin

EUT Pol. :E1 Plan

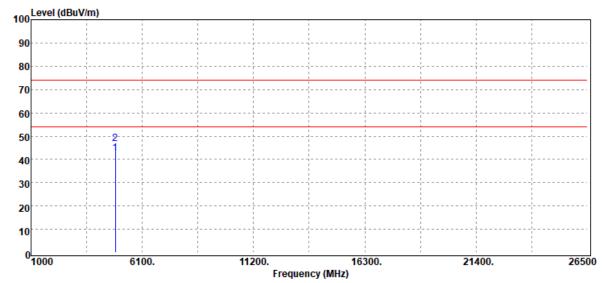

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4874.00	Average	39.70	2.98	42.68	54.00	-11.32
4874.00	Peak	43.72	2.98	46.70	74.00	-27.30

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** Temp./Humi. :24/45 :802.11n20

:2462 MHz :VERTICAL Frequency Antenna Pol.


**Operation Mode** :TX CH HIGH Engineer :Kailin

EUT Pol. :E1 Plan

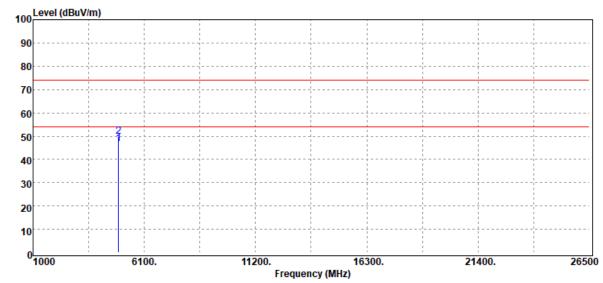

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4924.00	Average	43.09	3.46	46.55	54.00	-7.45
4924.00	Peak	46.26	3.46	49.72	74.00	-24.28

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






**Operation Band** Temp./Humi. :24/45 :802.11n20

:2462 MHz :HORIZONTAL Frequency Antenna Pol.

**Operation Mode** :TX CH HIGH Engineer :Kailin

EUT Pol. :E1 Plan

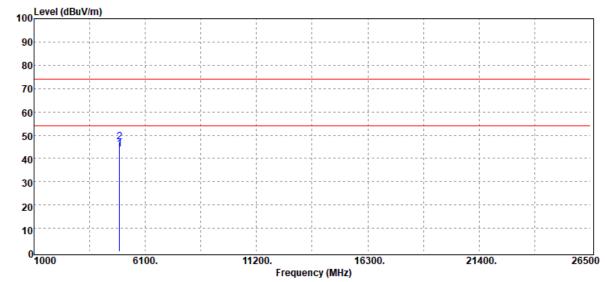

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	40.32	3.46	43.78	54.00	-10.22
4924.00	Peak	43.66	3.46	47.12	74.00	-26.88

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



## 12 POWER SPECTRAL DENSITY

### **Standard Applicable** 12.1

Per Part 15.247 (e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Per RSS-247 section 5.4 d

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

### 12.2 **Measurement Equipment Used**

Conducted Emission Test Site									
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
DC Block	PASTERNACK	PE8210	RF256	02/26/2019	02/25/2020				
Spectrum Analyzer	Agilent	N9010A	MY5340025 6	11/21/2018	11/20/2019				
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020				

### 12.3 **Test Set-up**



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### 12.4 Measurement Procedure

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz. & the VBW = 10 kHz
- 5. For defining Restricted Band Edge Limit: Set the RBW = 100kHz & VBW = 300 kHz.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

# As per FCC KDB 662911 D01

Unequal antenna gains, with equal transmit powers. For antenna gains given by G1, G2, ..., GN dBi.

- (i) If transmit signals are correlated, then Directional gain
- =  $10 \log[(10^{G1/20} + 10^{G2/20} + ... + 10^{GN/20})^2/N_{ANT}] dBi$

[Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.].

The antenna gain is not grater than 6 dBi. Therefore, reduction of power is not required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



## 12.5 Measurement Result

POWER DENSITY 802.11b_Ch1					
Freq.	PSD	Limit	Result		
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Result		
2412	-6.18	8.00	PASS		
2437	-4.95	8.00	PASS		
2462	-5.51	8.00	PASS		


POWER DENSITY 802.11g_Ch1				
Freq.	PSD	Limit	Result	
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Resuit	
2412	-13.62	8.00	PASS	
2437	-13.11	8.00	PASS	
2462	-12.21	8.00	PASS	

POWER DENSITY 802.11n HT20_ch0				
Freq.	PSD	Limit	Result	
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Resuit	
2412	-8.58	8.00	PASS	
2437	-9.58	8.00	PASS	
2462	-9.44	8.00	PASS	

**Note** 

Cable Loss 10.80 dB


\*Refer to next page for plots






802.11b


**Power Spectral Density Test Plot (CH-Low)** 

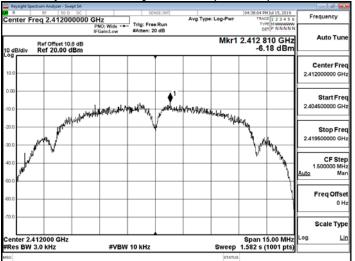


Power Spectral Density Test Plot (CH-Mid)

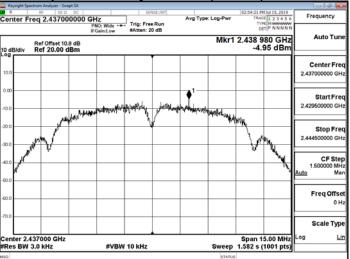


Power Spectral Density Test Plot (CH-High)

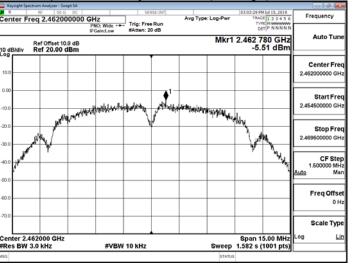


802.11g Power Spectral Density Test Plot (CH-Low)

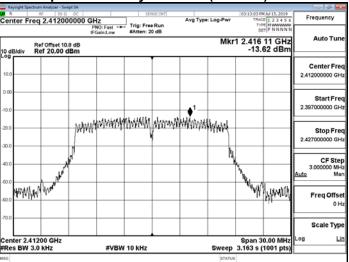

Power Spectral Density Test Plot (CH-Mid)

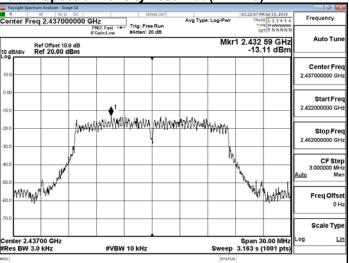

Power Spectral Density Test Plot (CH-High)

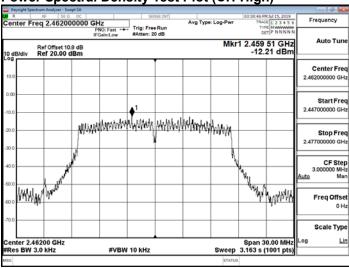

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 


Rep. # A fixed in the state of the fixed in the fi prosecuted to the fullest extent of the law.

程智科技股份有限公司




802.11n\_HT20


Power Spectral Density Test Plot (CH-Low)

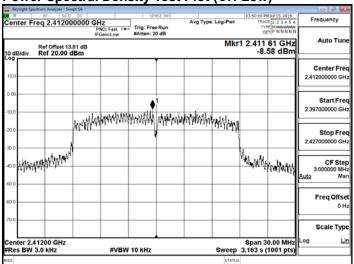

Power Spectral Density Test Plot (CH-Mid)

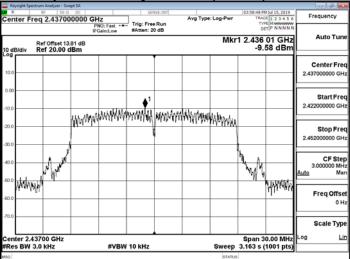



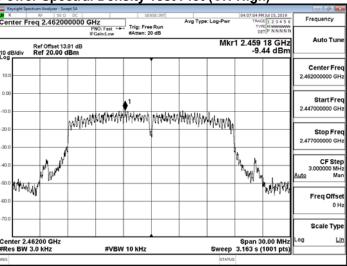

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 

Rep. # A fixed in the state of the fixed in the fi prosecuted to the fullest extent of the law.



# 13 ANTENNA REQUIREMENT

### 13.1 **Standard Applicable**

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

#### 13.2 **Antenna Connected Construction**

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.