



Appendix B

RF Test Data for 5.2GWIFI (Conducted Measurement)

Product Name: 3D laser scanner

Test Model: SPL-500

Environmental Conditions

Temperature:	23.8°C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Eason Zhou
Supervised by:	Nick Peng



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



B.1 -26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	21.293	---	Pass
NVNT	a	5200	Ant1	22.491	---	Pass
NVNT	a	5240	Ant1	22.365	---	Pass
NVNT	n20	5180	Ant1	25.299	---	Pass
NVNT	n20	5200	Ant1	26.993	---	Pass
NVNT	n20	5240	Ant1	27.102	---	Pass
NVNT	n40	5190	Ant1	45.242	---	Pass
NVNT	n40	5230	Ant1	41.367	---	Pass






Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1

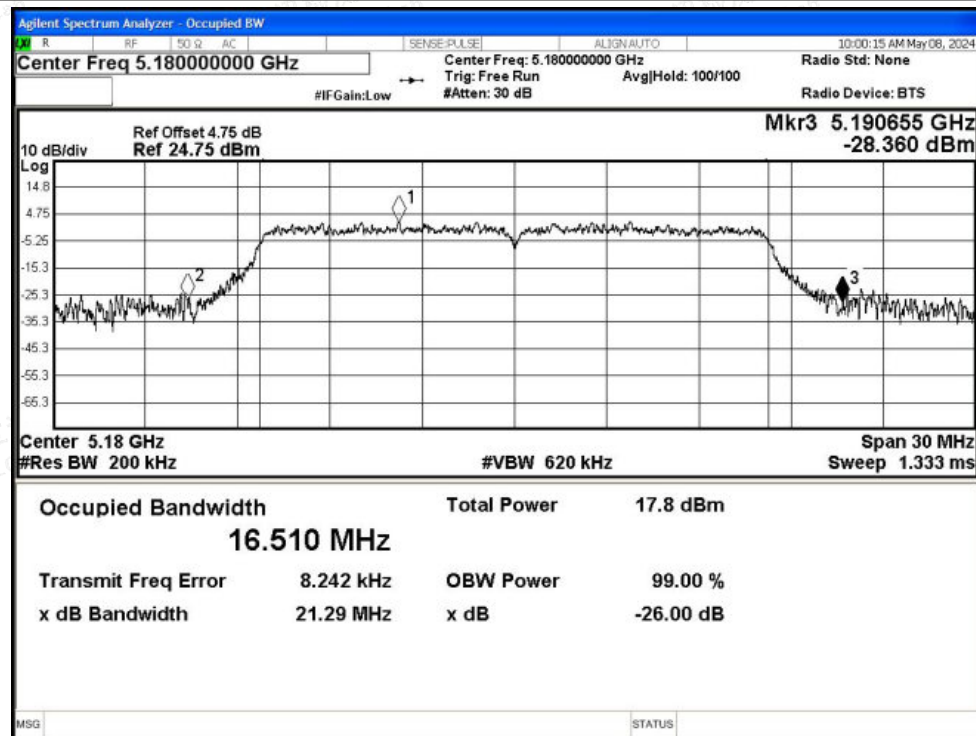


-26dB Bandwidth NVNT a 5200MHz Ant1

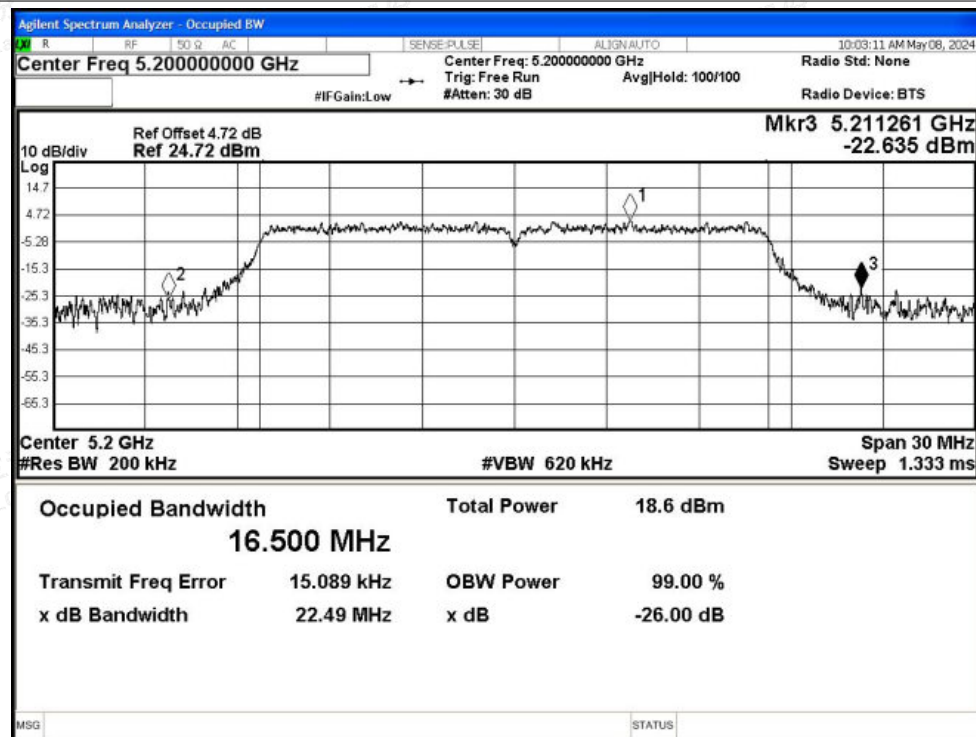




-26dB Bandwidth NVNT a 5240MHz Ant1

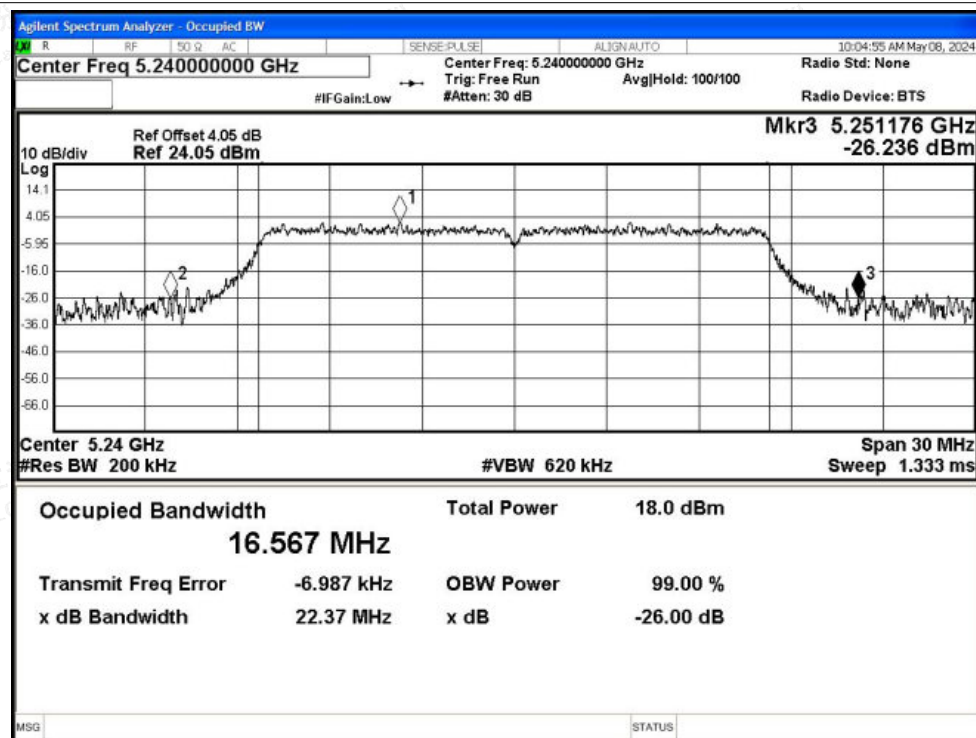


-26dB Bandwidth NVNT n20 5180MHz Ant1

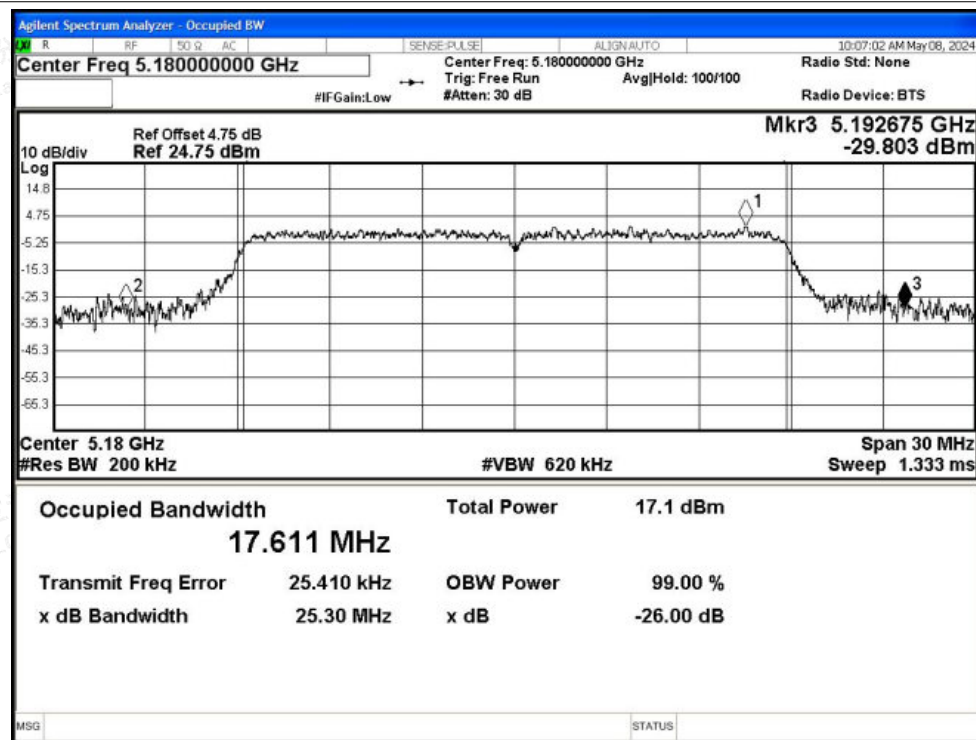




-26dB Bandwidth NVNT n20 5200MHz Ant1

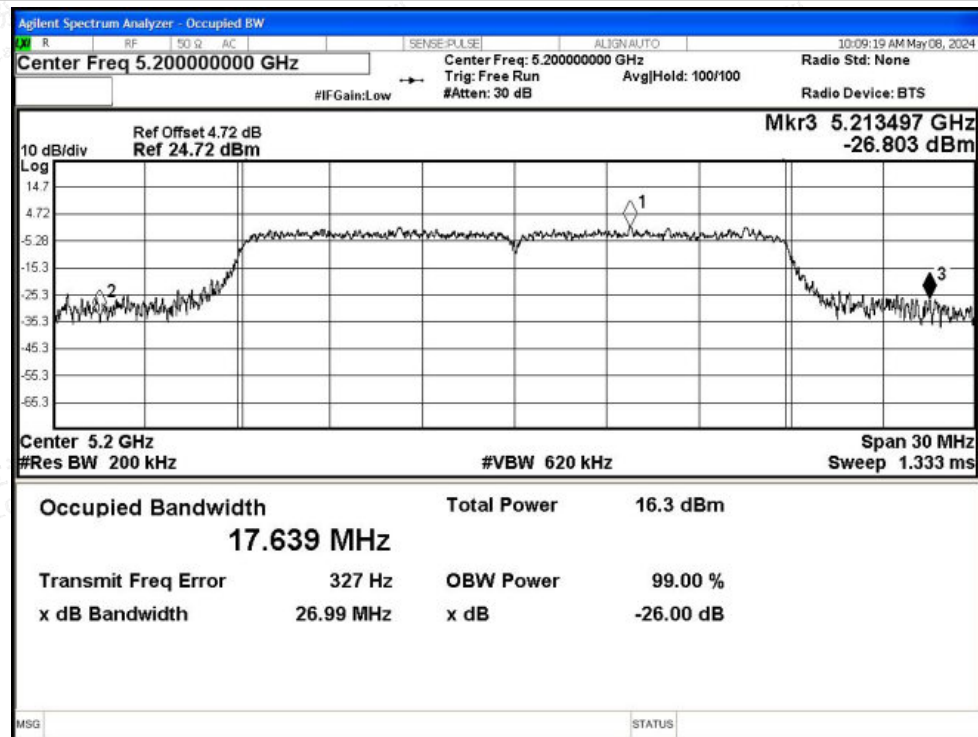


-26dB Bandwidth NVNT n20 5240MHz Ant1

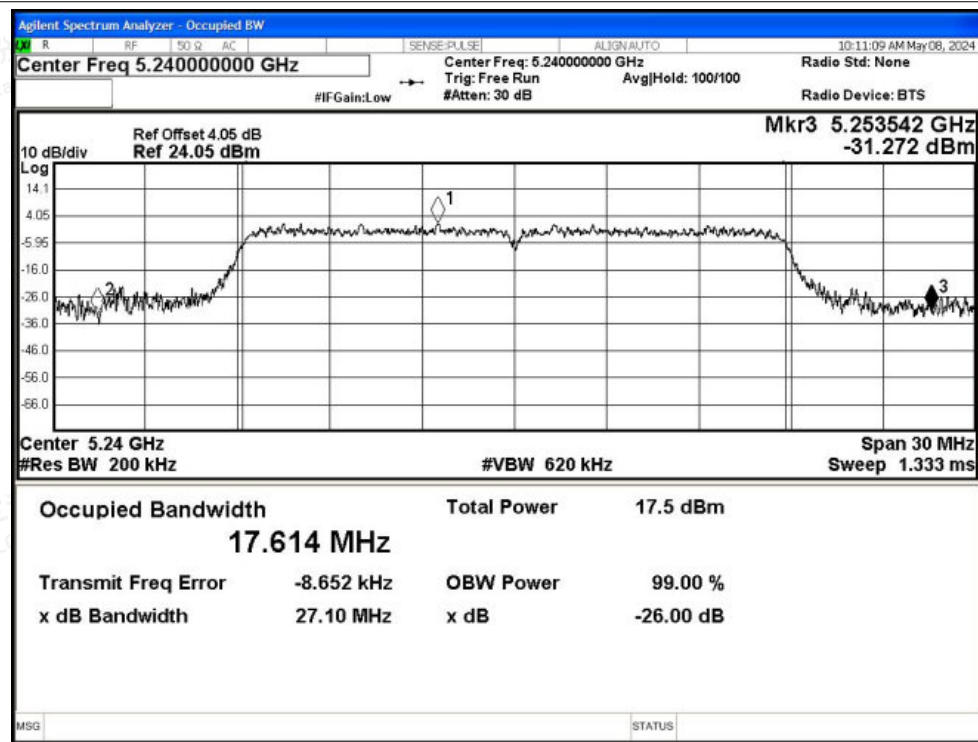




-26dB Bandwidth NVNT n40 5190MHz Ant1

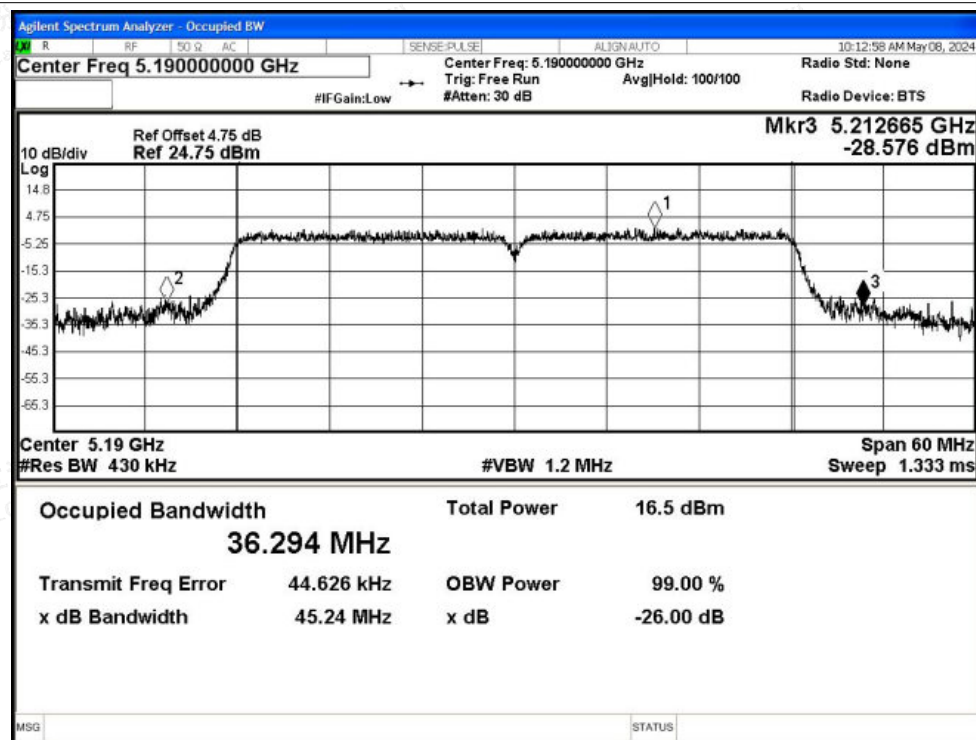

-26dB Bandwidth NVNT n40 5230MHz Ant1

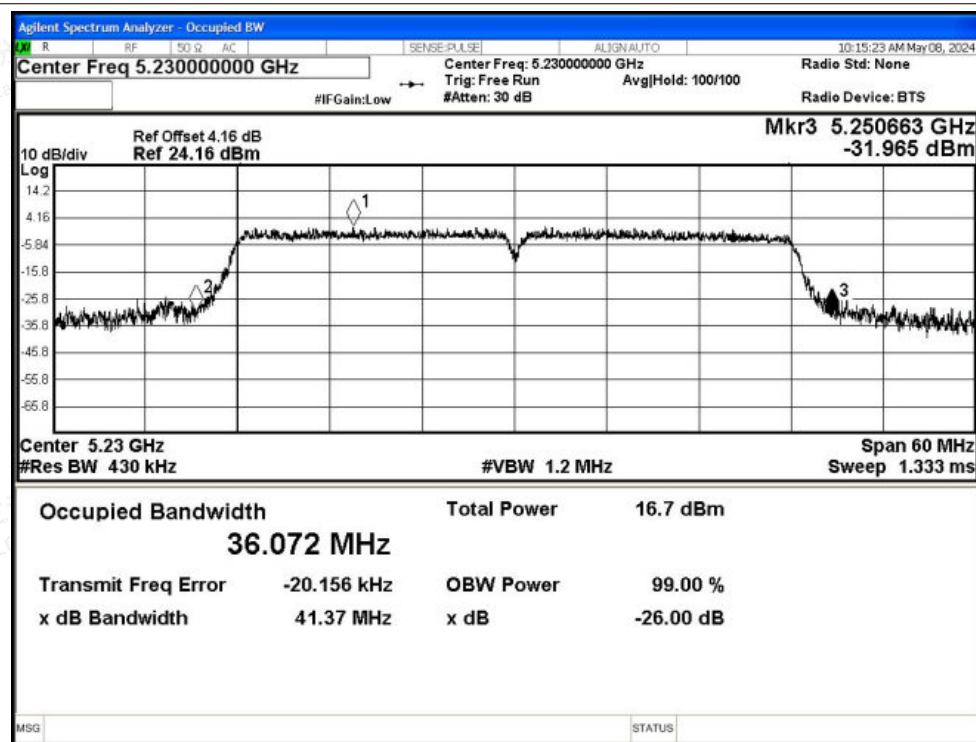



B.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	12.85	0.24	13.09	24	Pass
NVNT	a	5200	Ant1	12.72	0.24	12.96	24	Pass
NVNT	a	5240	Ant1	12.16	0.24	12.4	24	Pass
NVNT	n20	5180	Ant1	11.29	0.28	11.57	24	Pass
NVNT	n20	5200	Ant1	11.43	0.28	11.71	24	Pass
NVNT	n20	5240	Ant1	11.66	0.28	11.94	24	Pass
NVNT	n40	5190	Ant1	10.27	0.55	10.82	24	Pass
NVNT	n40	5230	Ant1	10.32	0.55	10.87	24	Pass





B.3 Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant1	1.8	0.24	2.04	11	Pass
NVNT	a	5200	Ant1	2.15	0.24	2.39	11	Pass
NVNT	a	5240	Ant1	1.59	0.24	1.83	11	Pass
NVNT	n20	5180	Ant1	0.51	0.28	0.79	11	Pass
NVNT	n20	5200	Ant1	-0.17	0.28	0.11	11	Pass
NVNT	n20	5240	Ant1	0.94	0.28	1.22	11	Pass
NVNT	n40	5190	Ant1	-3.41	0.55	-2.86	11	Pass
NVNT	n40	5230	Ant1	-2.84	0.55	-2.29	11	Pass






Test Graphs

PSD NVNT a 5180MHz Ant1

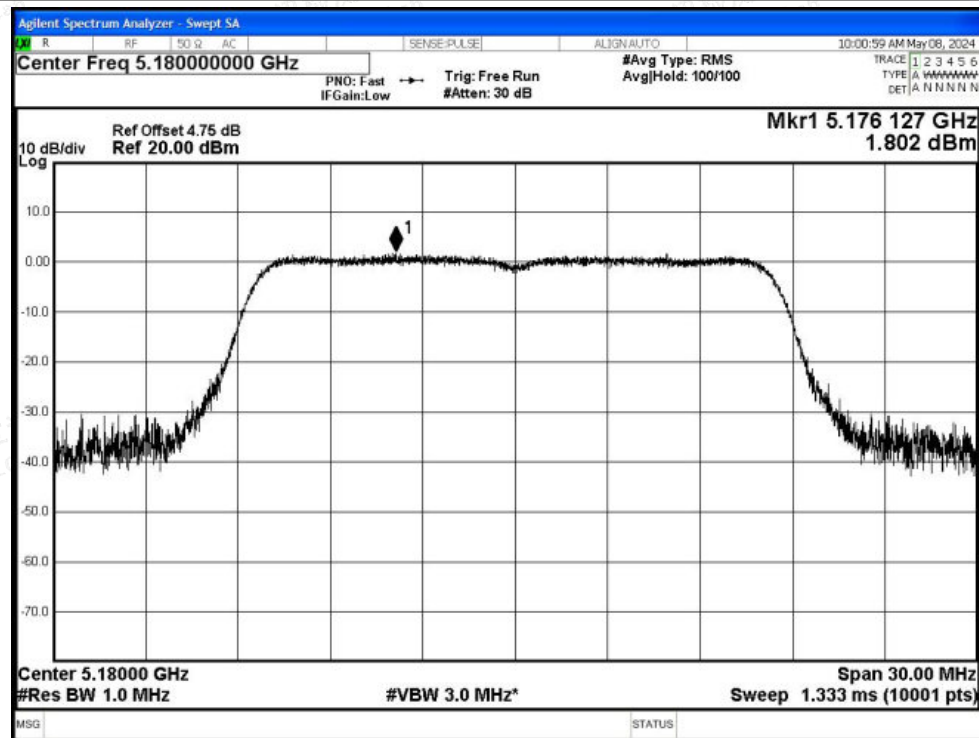


PSD NVNT a 5200MHz Ant1

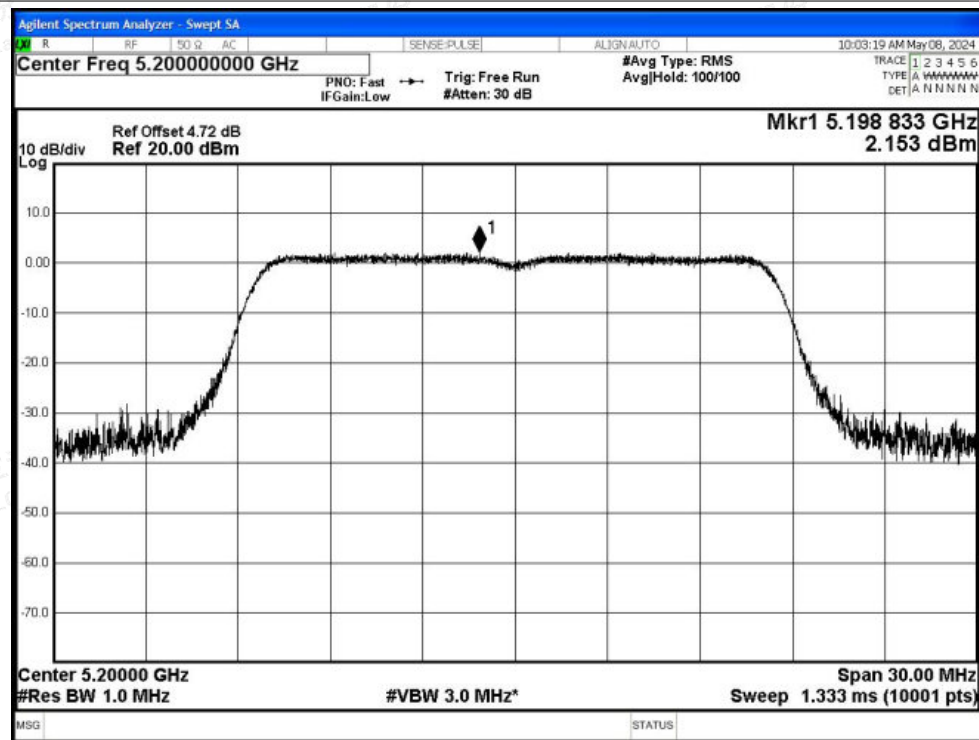






PSD NVNT a 5240MHz Ant1

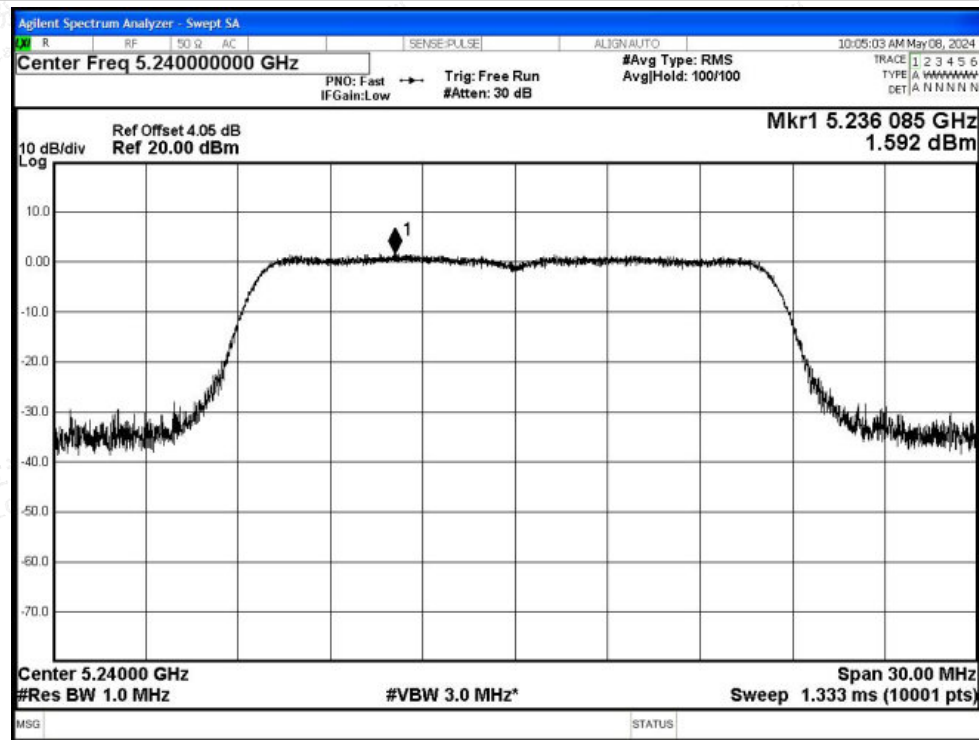


PSD NVNT n20 5180MHz Ant1

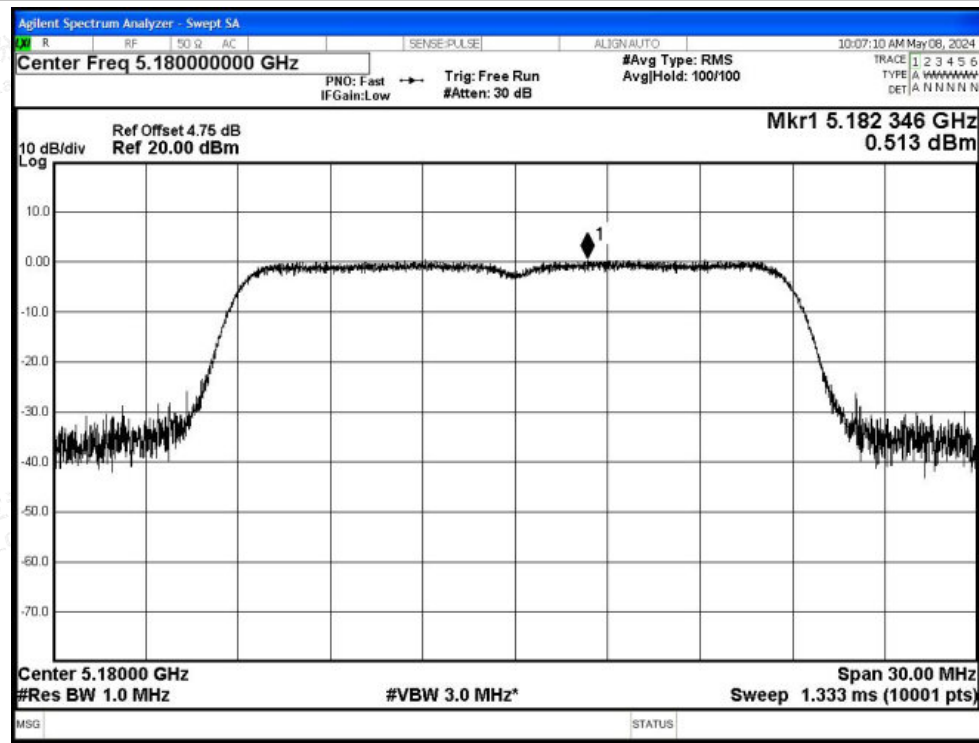

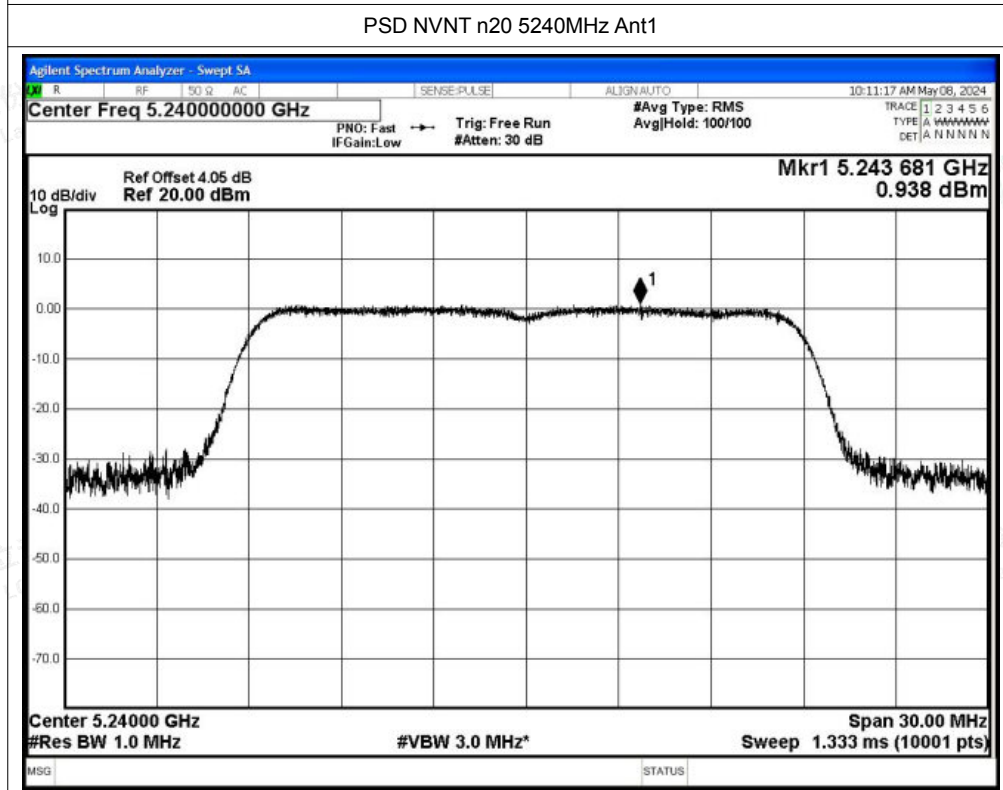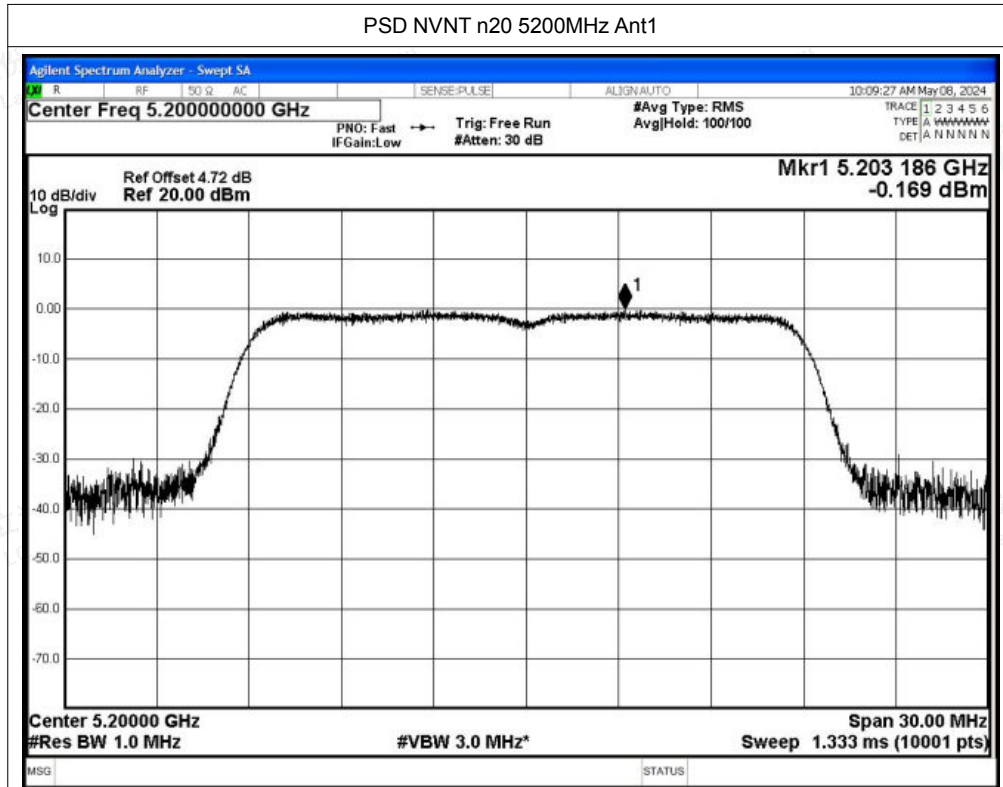




PSD NVNT n40 5190MHz Ant1

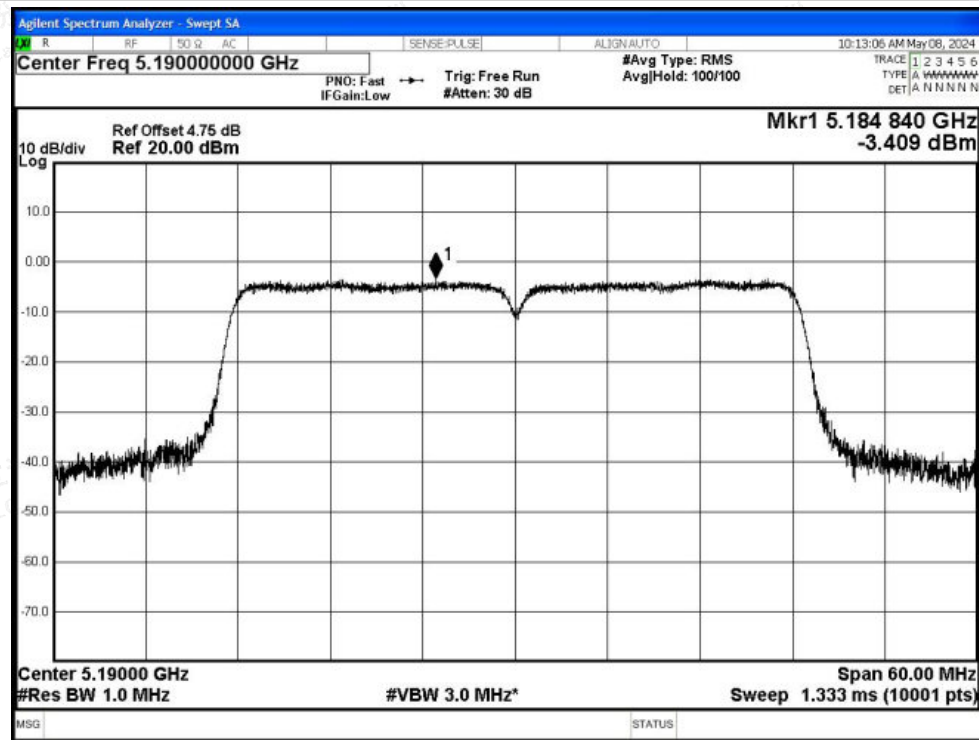

PSD NVNT n40 5230MHz Ant1

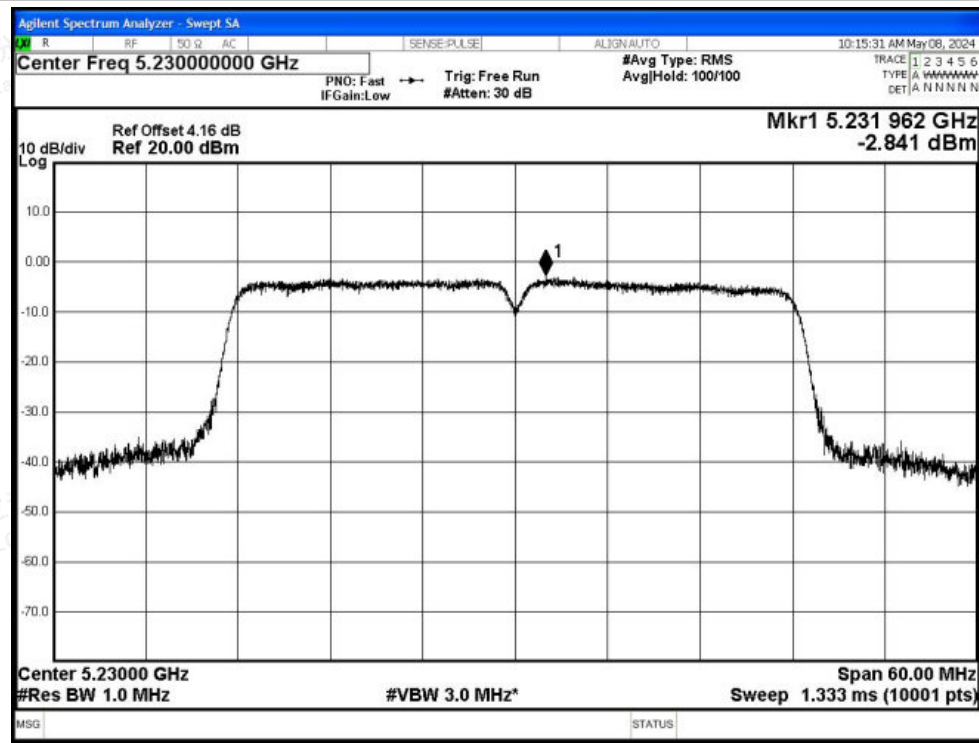



B.4 Restrict Band


Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant1	4500	-49.3	4.0	-	49.93	Peak	68.2	Pass
NVNT	a	5180	Ant1	4500	-57.49	4.0	0.24	41.98	Average	54	Pass
NVNT	a	5180	Ant1	5149.6	-41.15	4.0	-	58.08	Peak	68.2	Pass
NVNT	a	5180	Ant1	5149.6	-53.79	4.0	0.24	45.68	Average	54	Pass
NVNT	a	5180	Ant1	5150	-46.09	4.0	-	53.14	Peak	68.2	Pass
NVNT	a	5180	Ant1	5150	-53.92	4.0	0.24	45.55	Average	54	Pass
NVNT	a	5240	Ant1	5350	-46.92	4.0	-	52.31	Peak	68.2	Pass
NVNT	a	5240	Ant1	5350	-55.96	4.0	0.24	43.51	Average	54	Pass
NVNT	a	5240	Ant1	5370.72	-45.85	4.0	-	53.38	Peak	68.2	Pass
NVNT	a	5240	Ant1	5351.04	-55.46	4.0	0.24	44.01	Average	54	Pass
NVNT	a	5240	Ant1	5460	-49.17	4.0	-	50.06	Peak	68.2	Pass
NVNT	a	5240	Ant1	5460	-57.36	4.0	0.24	42.11	Average	54	Pass
NVNT	n20	5180	Ant1	4500	-49.46	4.0	-	49.77	Peak	68.2	Pass
NVNT	n20	5180	Ant1	4500	-57.51	4.0	0.28	42	Average	54	Pass
NVNT	n20	5180	Ant1	5149.6	-40.95	4.0	-	58.28	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5149.6	-53.03	4.0	0.28	46.48	Average	54	Pass
NVNT	n20	5180	Ant1	5150	-40.32	4.0	-	58.91	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5150	-53.63	4.0	0.28	45.88	Average	54	Pass
NVNT	n20	5240	Ant1	5350	-48	4.0	-	51.23	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5350	-55.73	4.0	0.28	43.78	Average	54	Pass
NVNT	n20	5240	Ant1	5448.24	-46.14	4.0	-	53.09	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5350.08	-55.73	4.0	0.28	43.78	Average	54	Pass
NVNT	n20	5240	Ant1	5460	-48.99	4.0	-	50.24	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5460	-57.37	4.0	0.28	42.14	Average	54	Pass
NVNT	n40	5190	Ant1	4500	-48.82	4.0	-	50.41	Peak	68.2	Pass
NVNT	n40	5190	Ant1	4500	-57.62	4.0	0.55	42.16	Average	54	Pass
NVNT	n40	5190	Ant1	5148.24	-40.17	4.0	-	59.06	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5149.7	-53.48	4.0	0.55	46.3	Average	54	Pass
NVNT	n40	5190	Ant1	5150	-43.07	4.0	-	56.16	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5150	-53.48	4.0	0.55	46.3	Average	54	Pass
NVNT	n40	5230	Ant1	5350	-48.63	4.0	-	50.6	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5350	-56.64	4.0	0.54	43.13	Average	54	Pass
NVNT	n40	5230	Ant1	5357.13	-46.54	4.0	-	52.69	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5353.89	-56.17	4.0	0.54	43.6	Average	54	Pass
NVNT	n40	5230	Ant1	5460	-49.43	4.0	-	49.8	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5460	-57.39	4.0	0.54	42.38	Average	54	Pass






Test Graphs

Restrict Band NVNT a 5180MHz Ant1 Peak

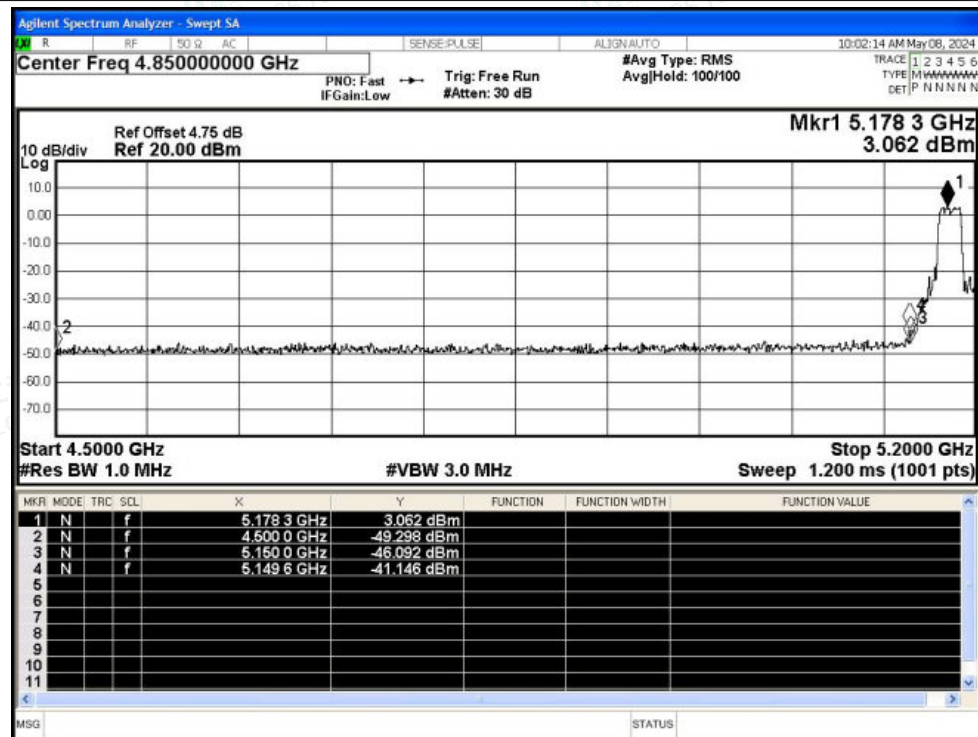


Restrict Band NVNT a 5180MHz Ant1 Average

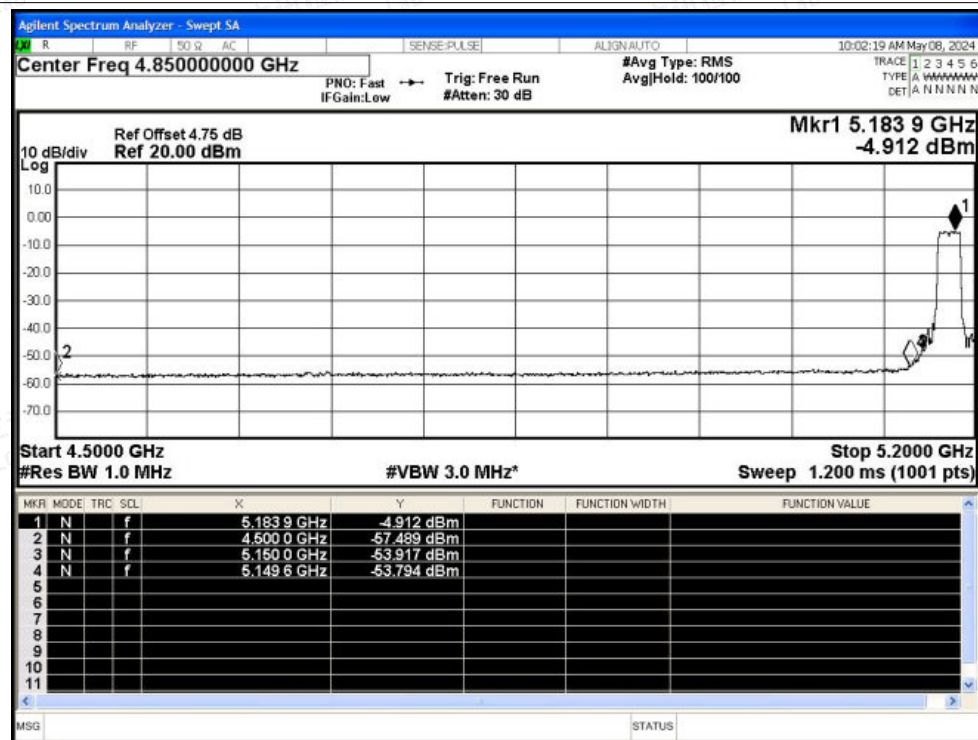




Restrict Band NVNT a 5240MHz Ant1 Peak

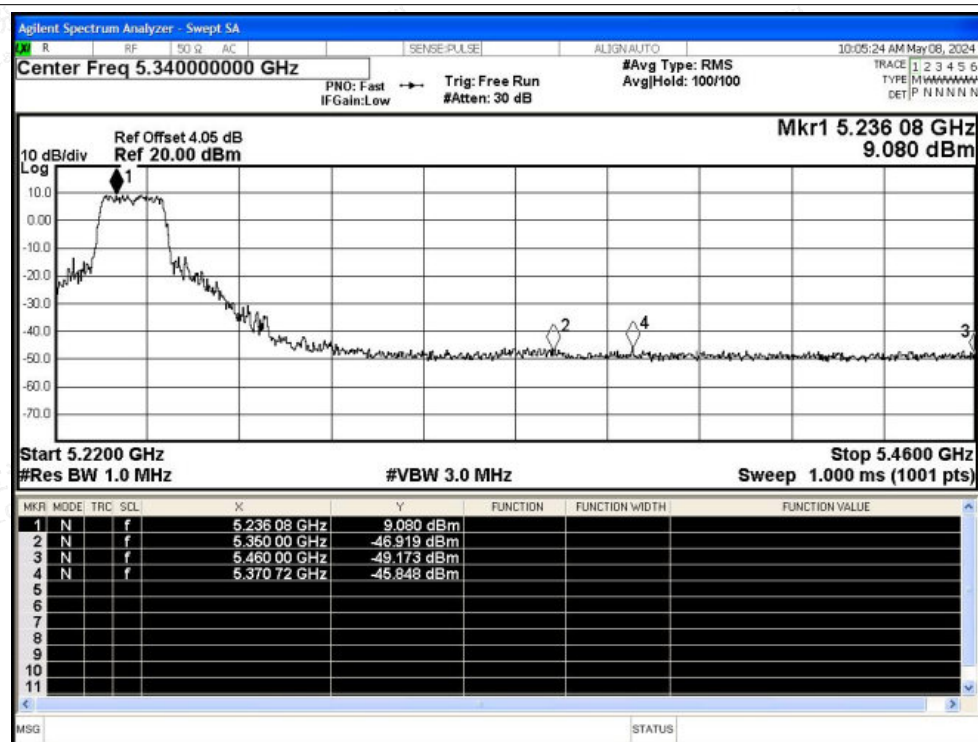


Restrict Band NVNT a 5240MHz Ant1 Average

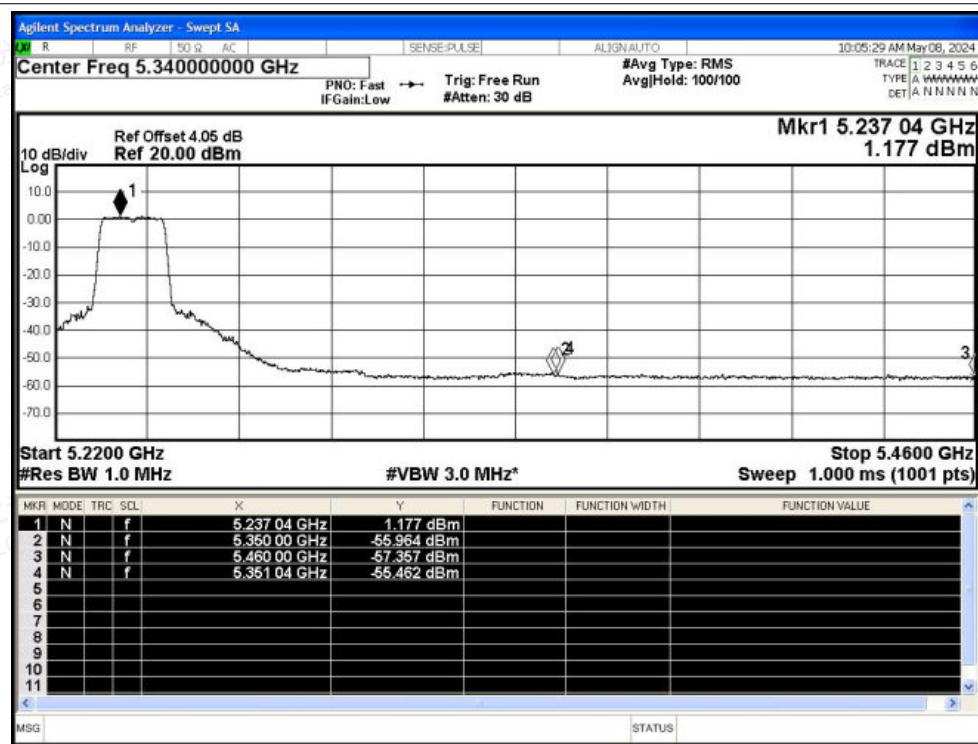




Restrict Band NVNT n20 5180MHz Ant1 Peak

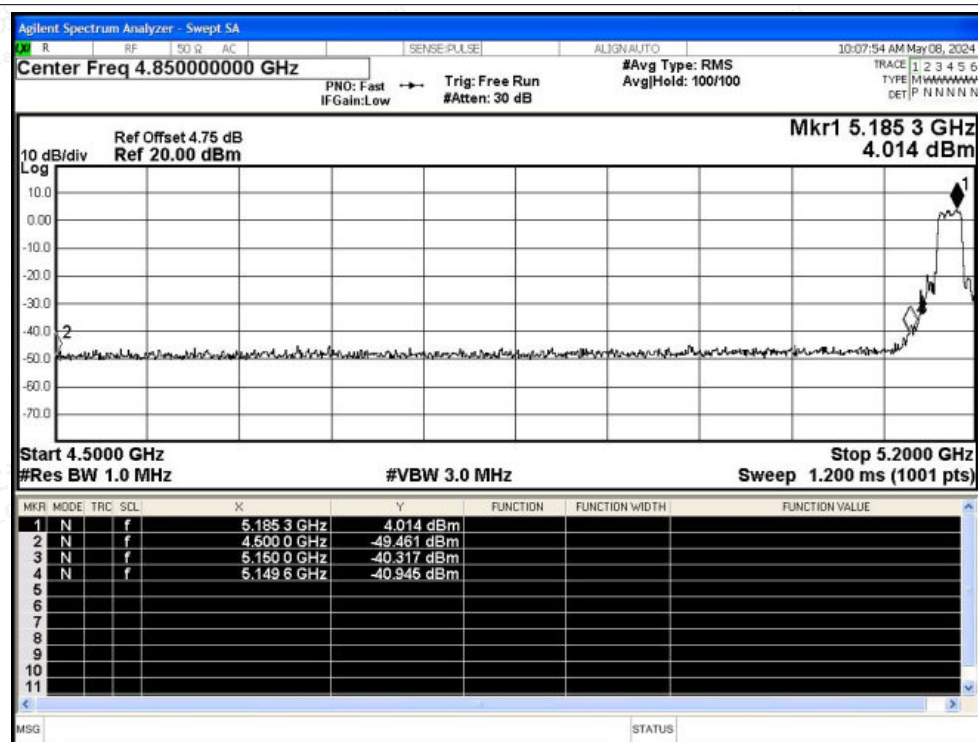


Restrict Band NVNT n20 5180MHz Ant1 Average

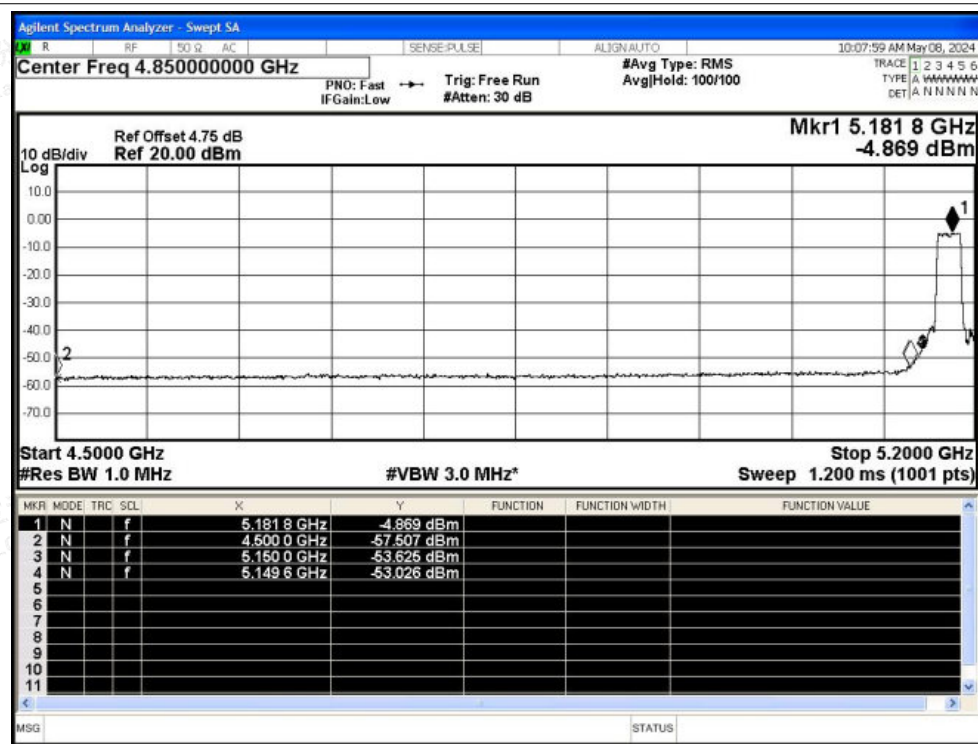




Restrict Band NVNT n20 5240MHz Ant1 Peak

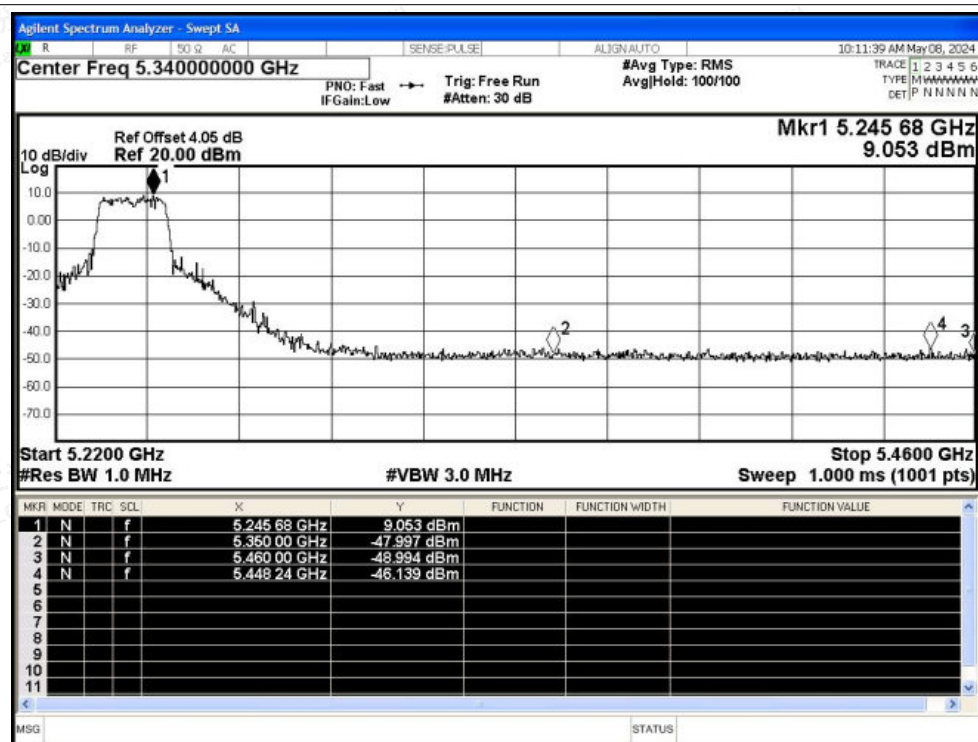


Restrict Band NVNT n20 5240MHz Ant1 Average

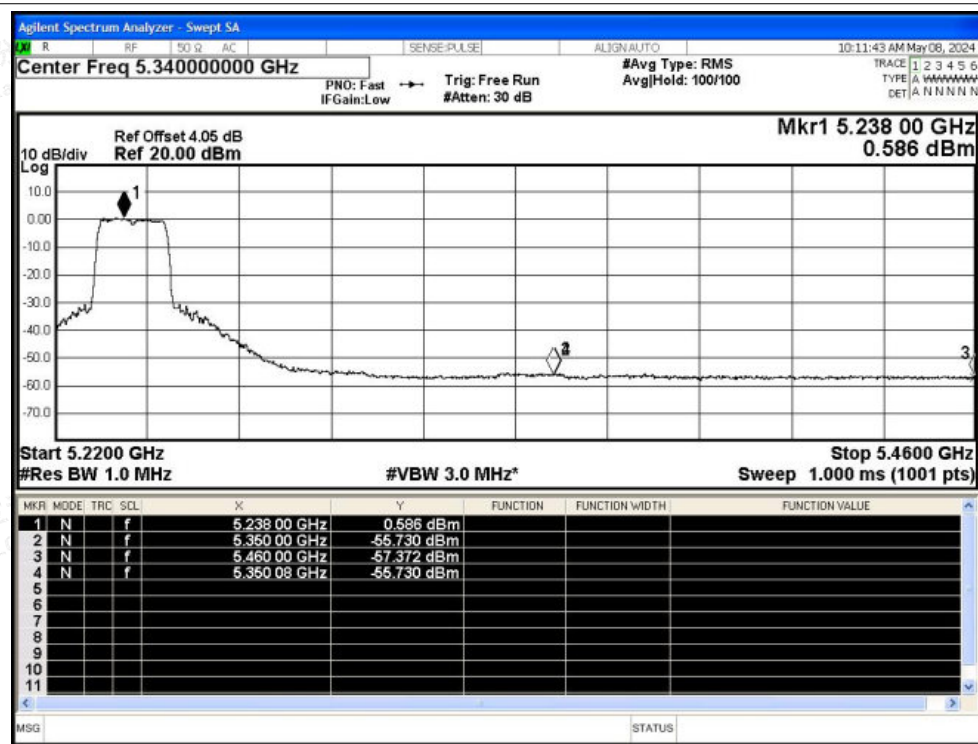




Restrict Band NVNT n40 5190MHz Ant1 Peak

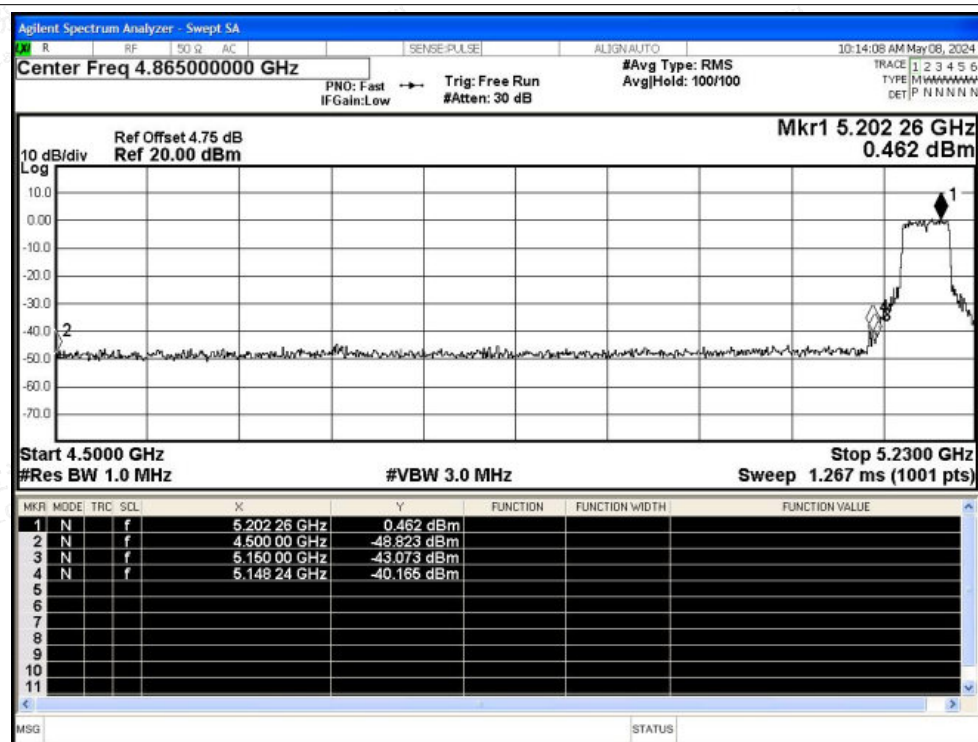


Restrict Band NVNT n40 5190MHz Ant1 Average

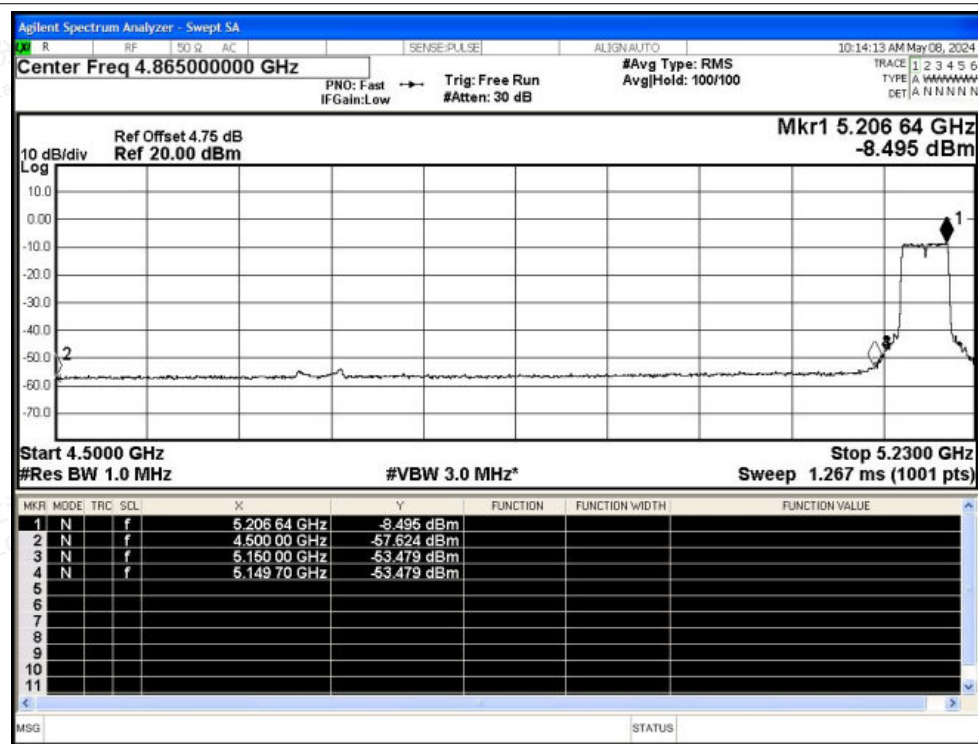




Restrict Band NVNT n40 5230MHz Ant1 Peak

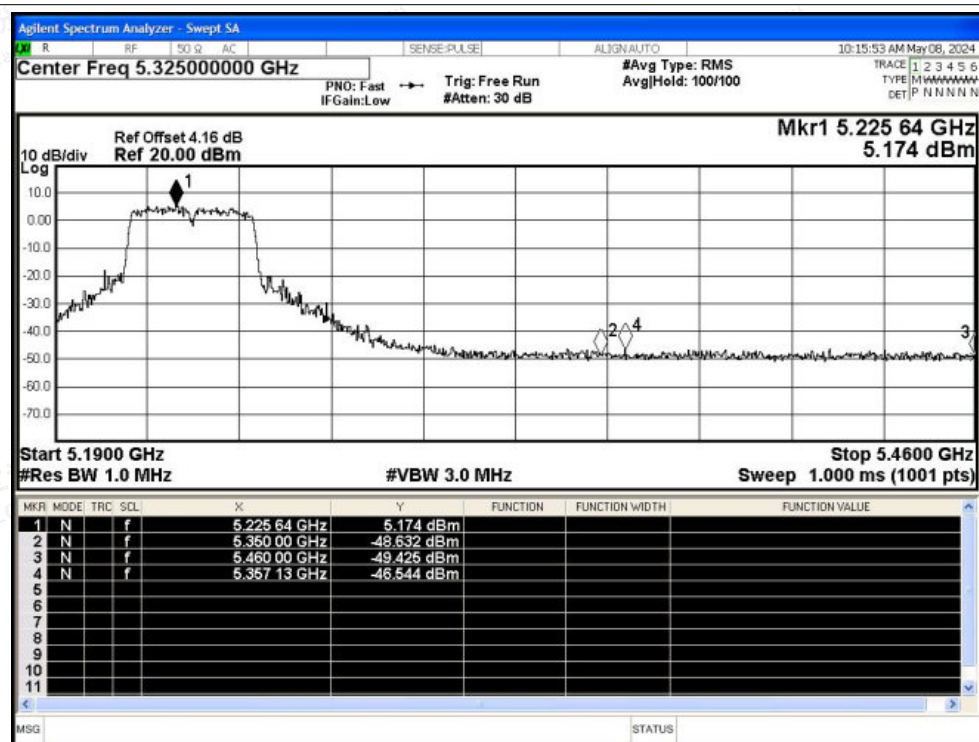

Restrict Band NVNT n40 5230MHz Ant1 Average

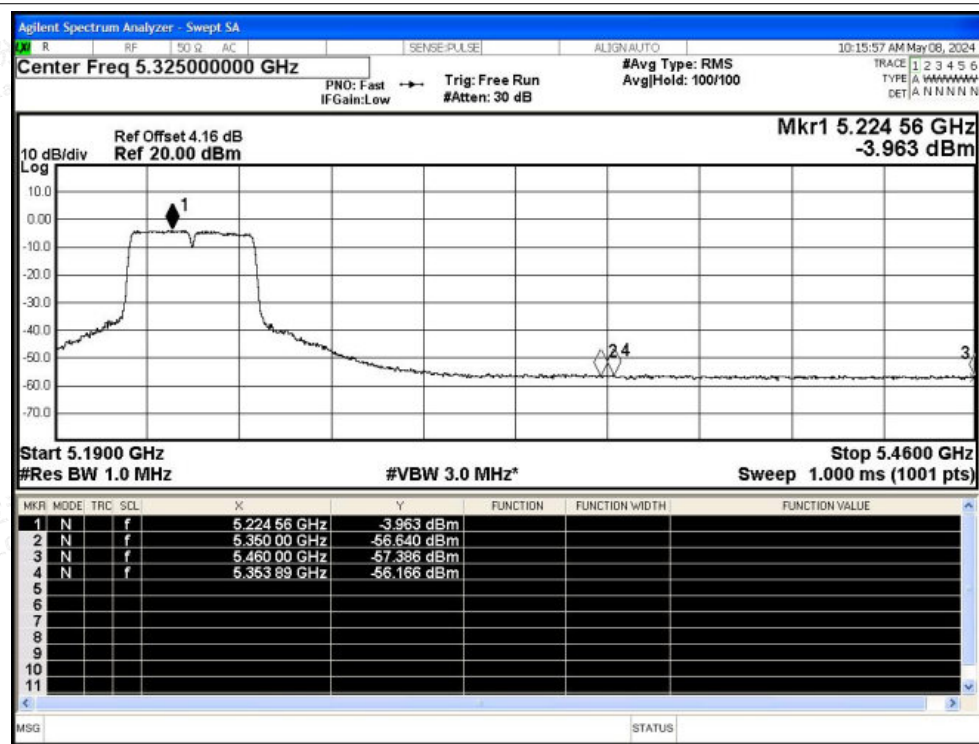



B.5 Frequency Stability

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	a	5180	Ant1	5180	0	0	25	Pass
NVNT	a	5200	Ant1	5199.98	-20000	-3.85	25	Pass
NVNT	a	5240	Ant1	5240	0	0	25	Pass
NVNT	n20	5180	Ant1	5180	0	0	25	Pass
NVNT	n20	5200	Ant1	5200	0	0	25	Pass
NVNT	n20	5240	Ant1	5239.98	-20000	-3.82	25	Pass
NVNT	n40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
NVNT	n40	5230	Ant1	5229.96	-40000	-7.65	25	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Freq. Stability NVNT a 5180MHz Ant1

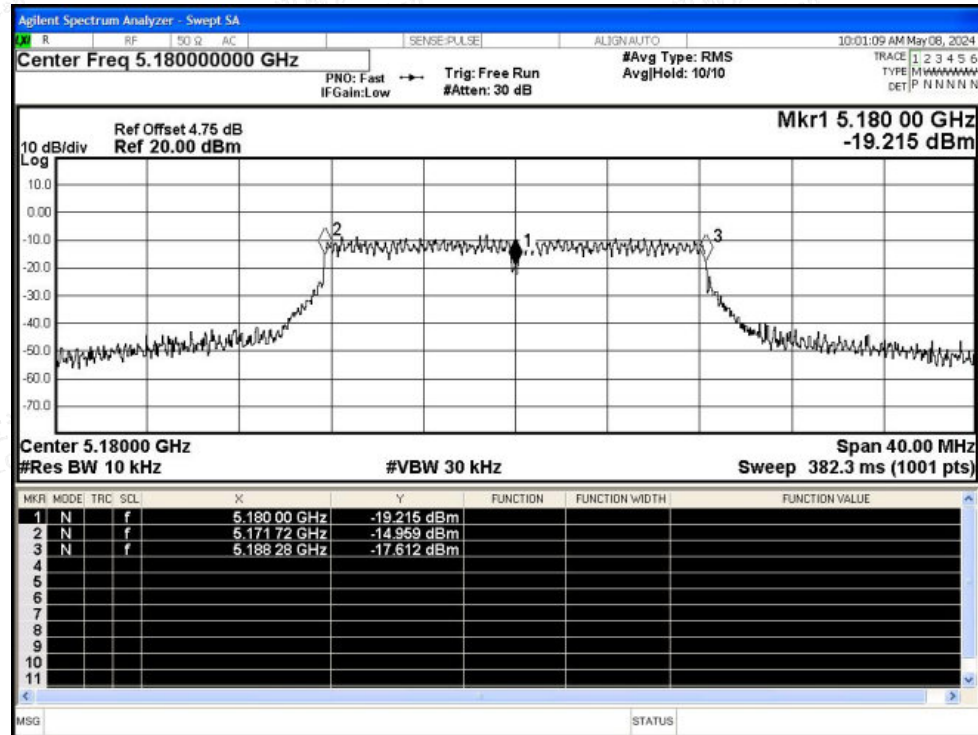


Freq. Stability NVNT a 5200MHz Ant1

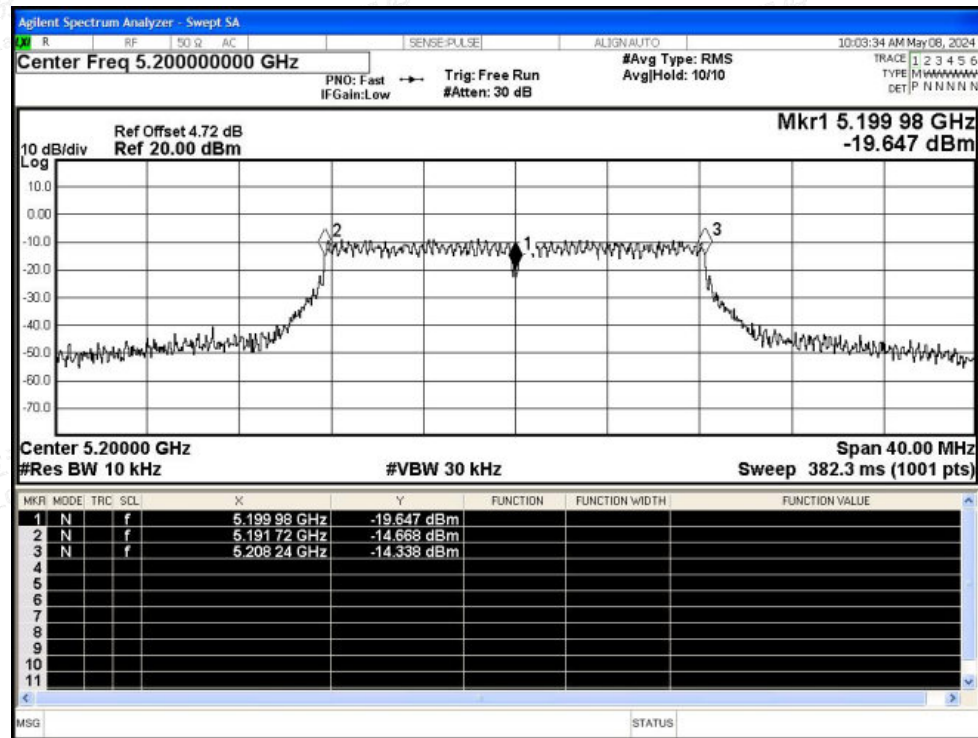




Freq. Stability NVNT a 5240MHz Ant1

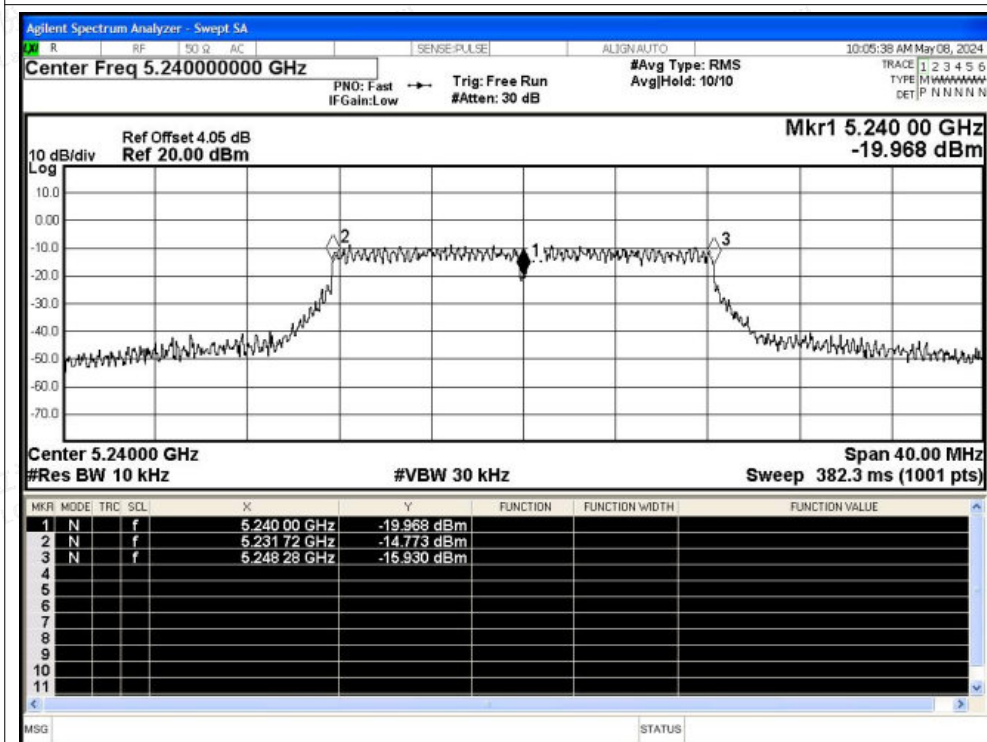


Freq. Stability NVNT n20 5180MHz Ant1

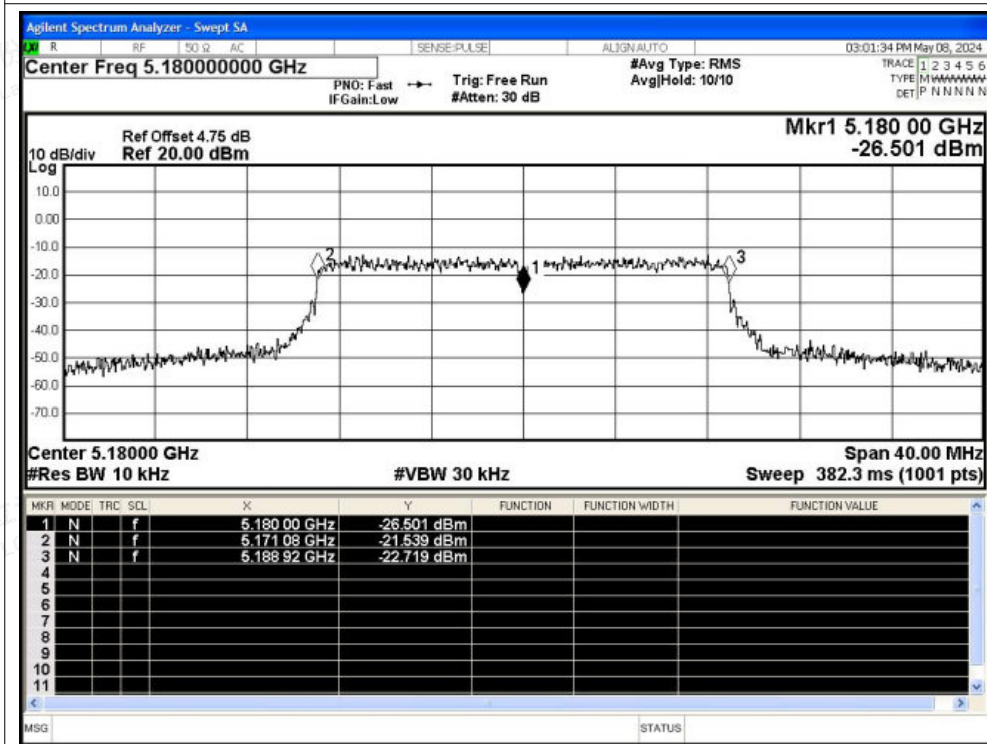




Freq. Stability NVNT n20 5200MHz Ant1

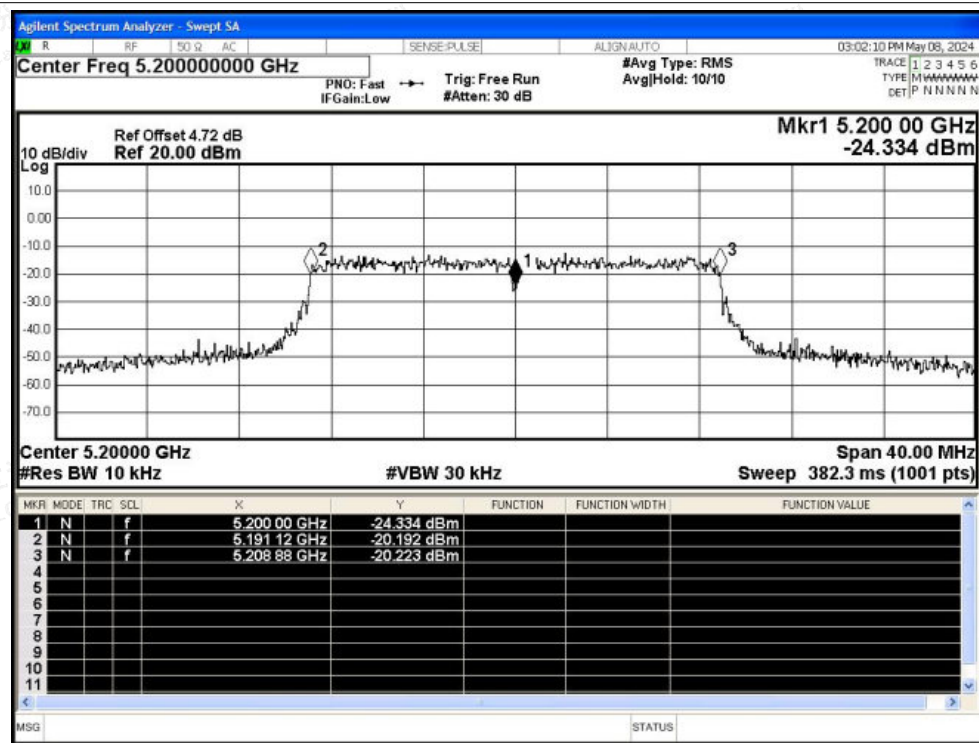


Freq. Stability NVNT n20 5240MHz Ant1

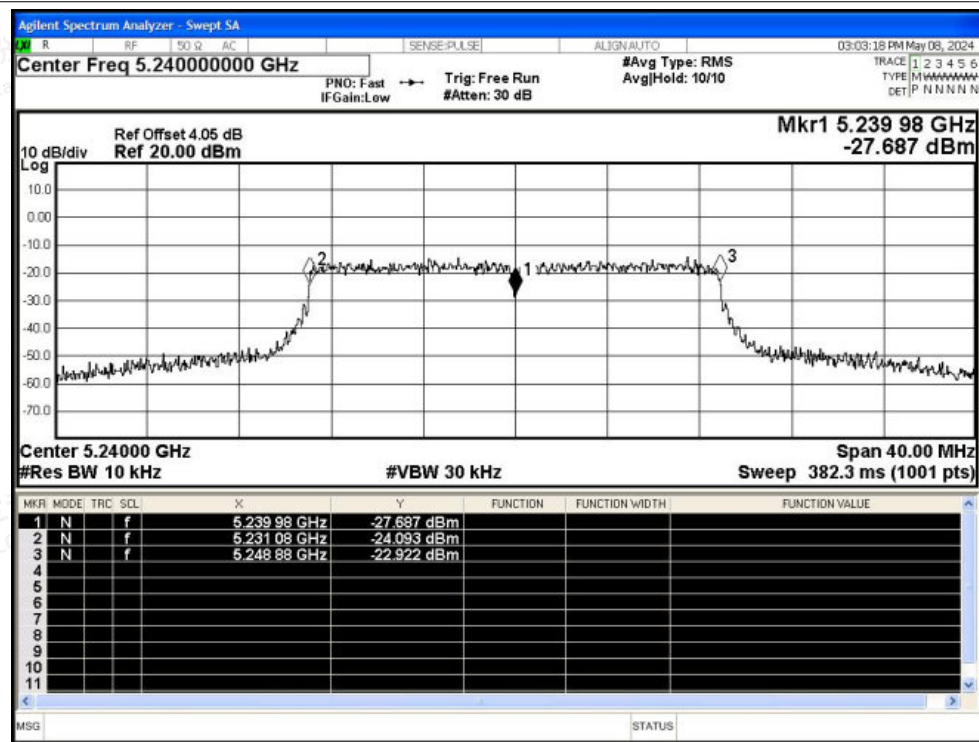




Freq. Stability NVNT n40 5190MHz Ant1

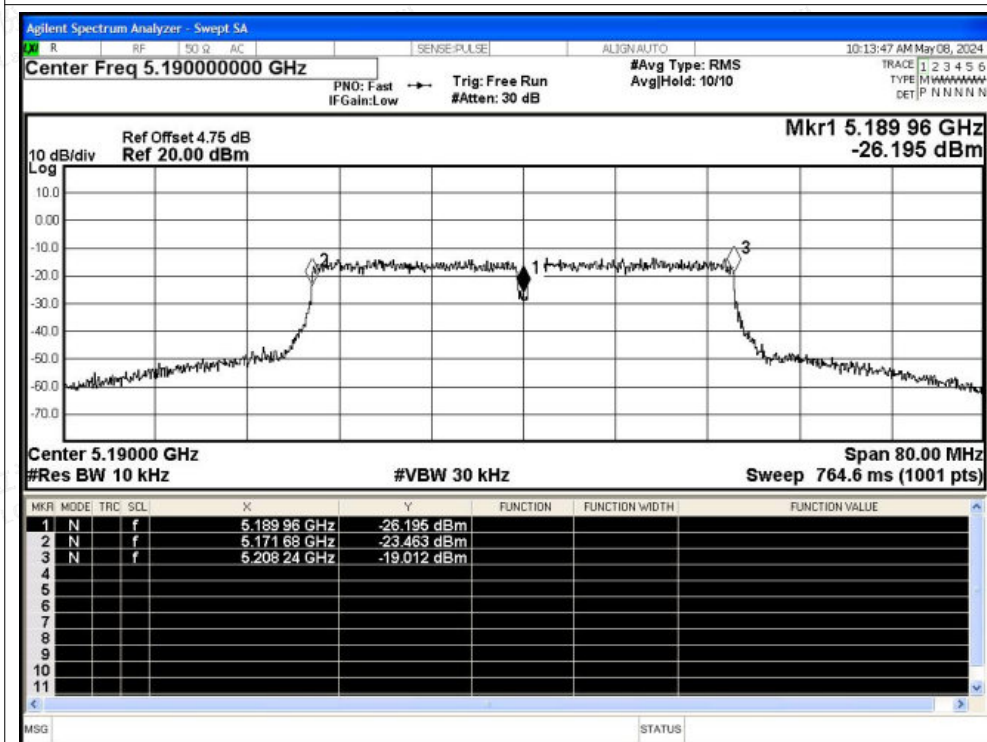

Freq. Stability NVNT n40 5230MHz Ant1

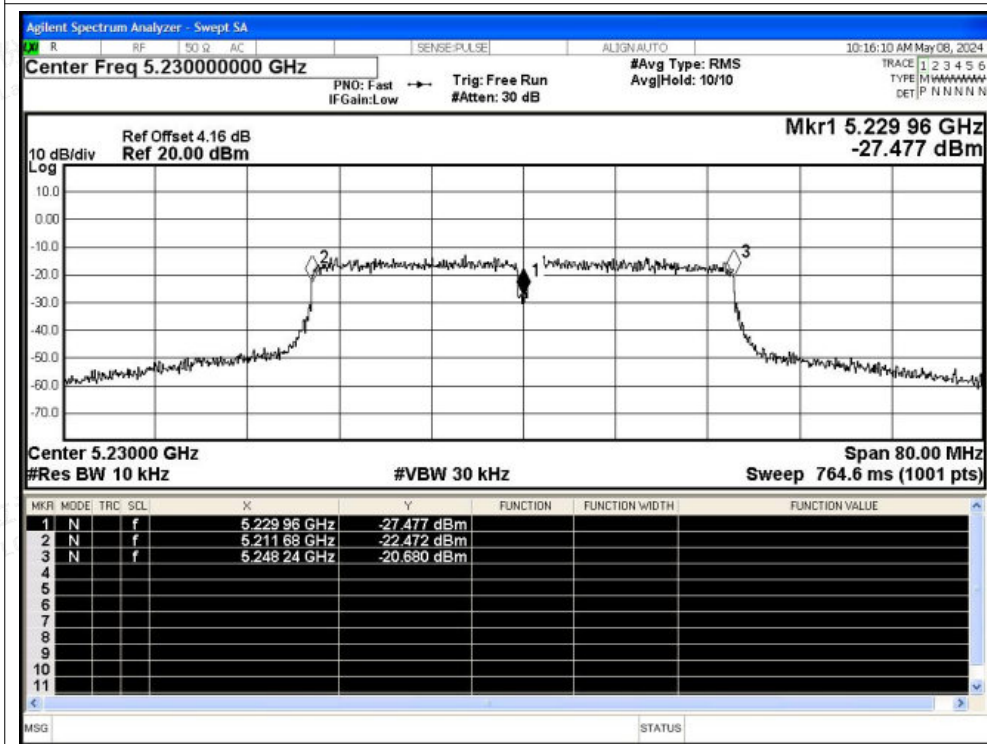



B.6 Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	94.65	0.24	0.91
NVNT	a	5200	Ant1	94.56	0.24	0.91
NVNT	a	5240	Ant1	94.65	0.24	0.91
NVNT	n20	5180	Ant1	93.77	0.28	1.07
NVNT	n20	5200	Ant1	93.77	0.28	1.07
NVNT	n20	5240	Ant1	93.67	0.28	1.07
NVNT	n40	5190	Ant1	88.14	0.55	2.14
NVNT	n40	5230	Ant1	88.14	0.55	2.14






Test Graphs

Duty Cycle NVNT a 5180MHz Ant1

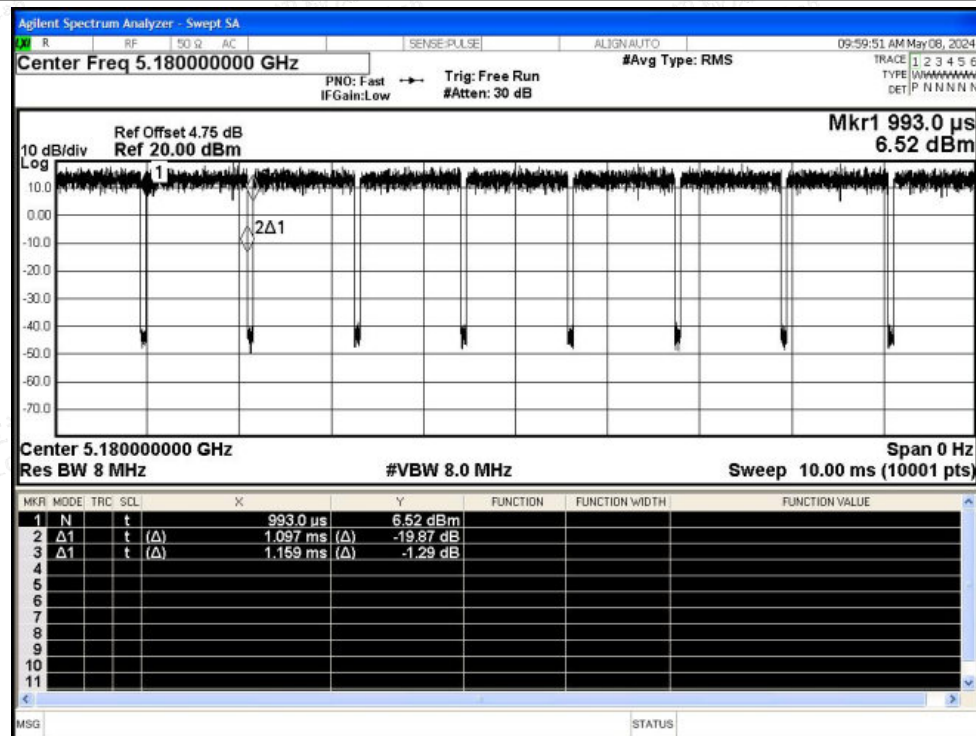


Duty Cycle NVNT a 5200MHz Ant1

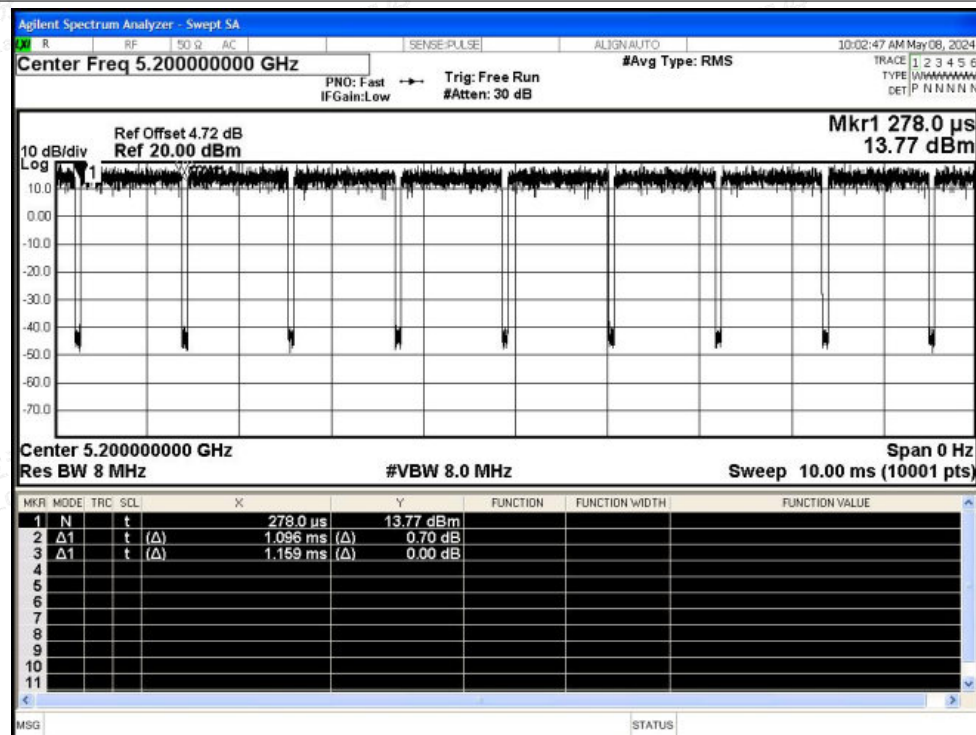




Duty Cycle NVNT a 5240MHz Ant1

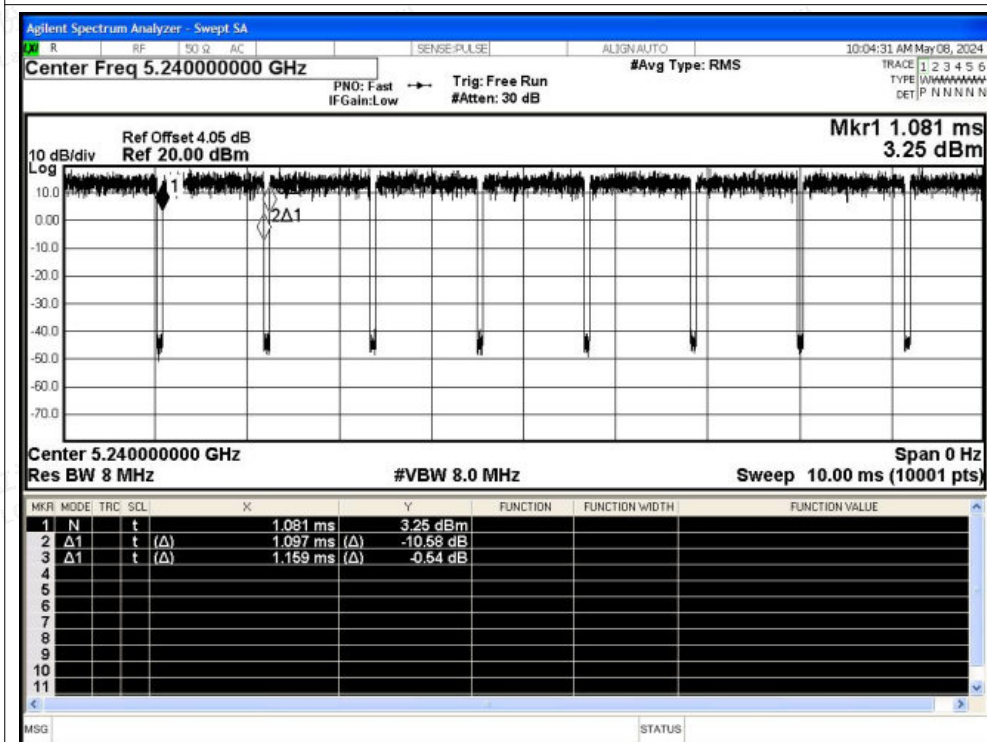


Duty Cycle NVNT n20 5180MHz Ant1

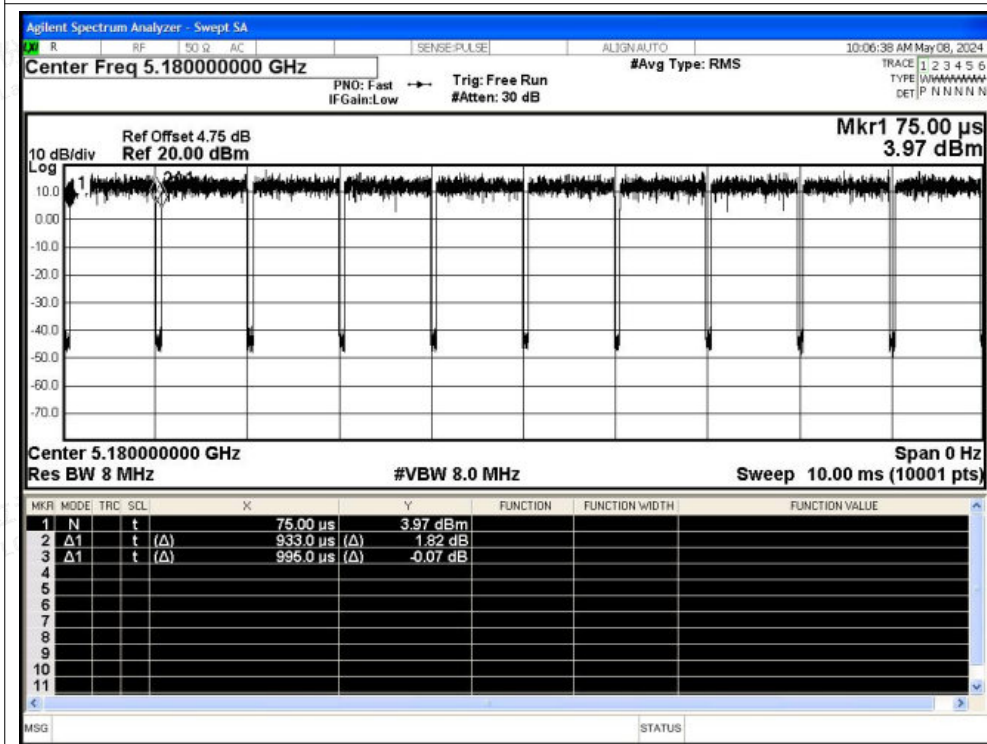




Duty Cycle NVNT n20 5200MHz Ant1

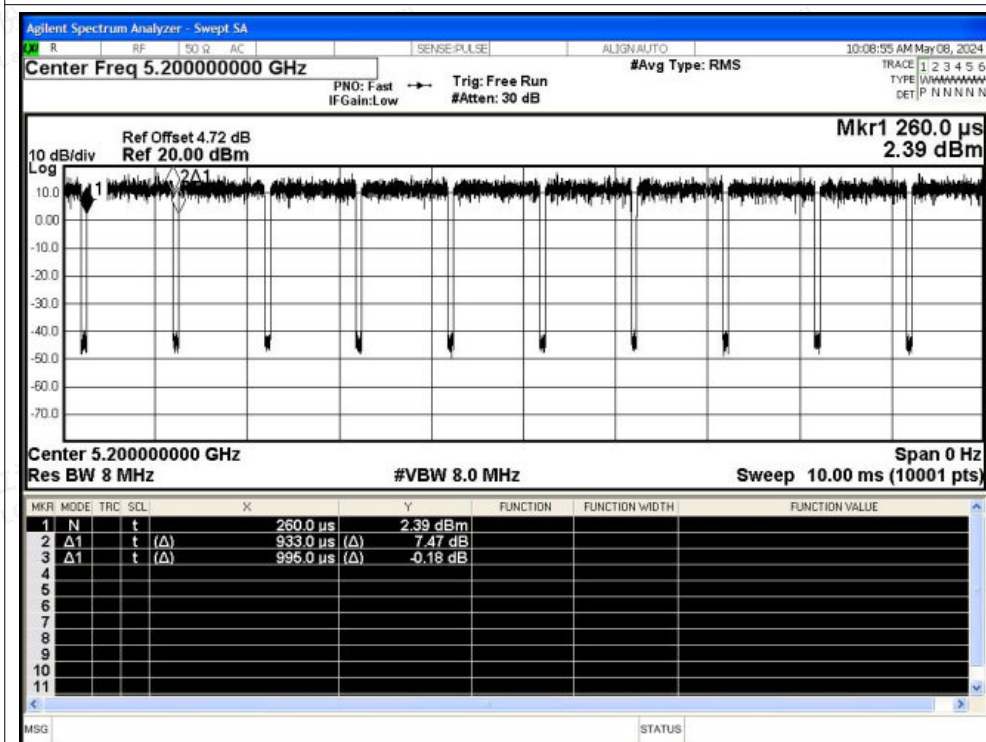


Duty Cycle NVNT n20 5240MHz Ant1

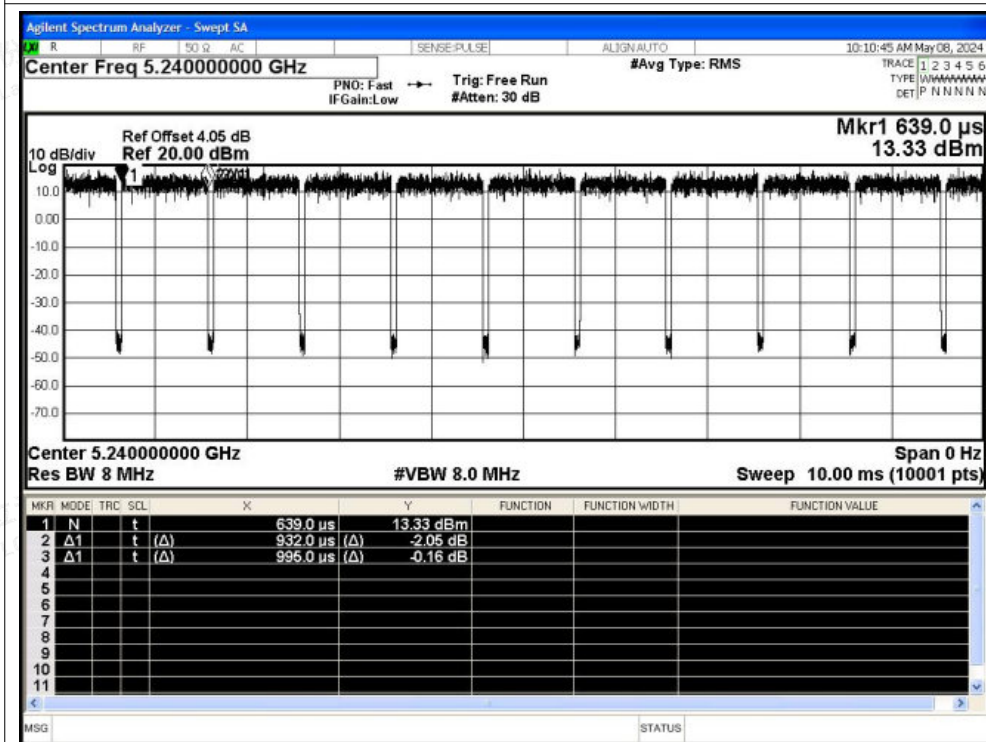



Duty Cycle NVNT n40 5190MHz Ant1

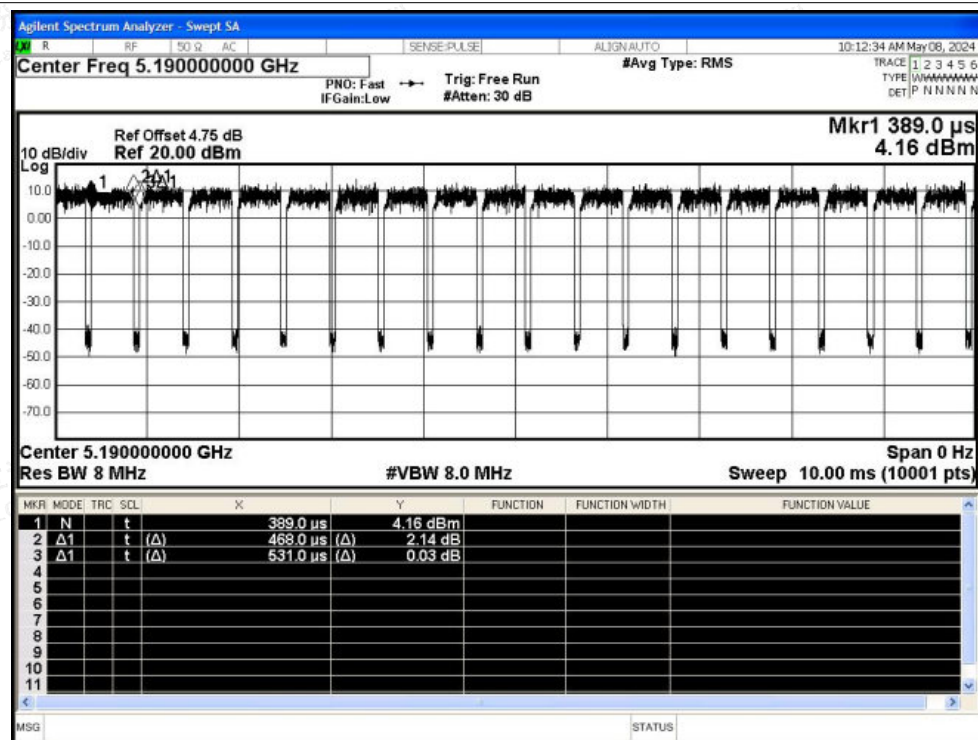

Duty Cycle NVNT n40 5230MHz Ant1

