

# FCC Part 15C

## Measurement and Test Report

For


**Shenzhen Reie intelligent technology Co., ltd**

**401, 4F, NO.1 Building, Zhongkenuo Industry park, Hezhou development**

**Zone, Xixiang Street, Bao'an District, Shenzhen City, China**

**FCC ID: 2AJU3RT723**

<b>FCC Rule(s):</b>	<u>FCC Part 15.231e</u>
<b>Product Description:</b>	<u>Remote Food Thermometer</u>
<b>Tested Model:</b>	<u>TM08</u>
<b>Report No.:</b>	<u>STR18058348I</u>
<b>Sample Receipt Date:</b>	<u>2018-05-31</u>
<b>Tested Date:</b>	<u>2018-06-01 to 2018-06-25</u>
<b>Issued Date:</b>	<u>2018-06-25</u>
<b>Tested By:</b>	<u>Ray Yang / Engineer</u>
<b>Reviewed By:</b>	<u>Silin Chen / EMC Manager</u>
<b>Approved &amp; Authorized By:</b>	<u>Jandy So / PSQ Manager</u>
<b>Prepared By:</b>	



**Shenzhen SEM Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

## **TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY.....	4
1.5 EUT SETUP AND TEST MODE.....	5
1.6 MEASUREMENT UNCERTAINTY.....	5
1.7 TEST EQUIPMENT LIST AND DETAILS.....	6
<b>2. SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>3. ANTENNA REQUIREMENT.....</b>	<b>8</b>
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
<b>4. RADIATED EMISSIONS.....</b>	<b>9</b>
4.1 STANDARD APPLICABLE.....	9
4.2 TEST PROCEDURE.....	10
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	11
4.4 ENVIRONMENTAL CONDITIONS.....	11
4.5 SUMMARY OF TEST RESULTS/PLOTS.....	11
<b>6. 20DB BANDWIDTH.....</b>	<b>14</b>
6.1 STANDARD APPLICABLE.....	14
6.1 TEST PROCEDURE.....	14
6.2 ENVIRONMENTAL CONDITIONS.....	14
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	14
<b>7. TRANSMISSION TIME.....</b>	<b>16</b>
7.1 STANDARD APPLICABLE.....	16
7.2 TEST PROCEDURE.....	16
7.3 ENVIRONMENTAL CONDITIONS.....	16
7.4 SUMMARY OF TEST RESULTS/PLOTS.....	16
<b>8. DUTY CYCLE.....</b>	<b>18</b>
8.1 STANDARD APPLICABLE.....	18
8.2 TEST PROCEDURE.....	18
8.3 ENVIRONMENTAL CONDITIONS.....	18
8.4 SUMMARY OF TEST RESULTS/PLOTS.....	18

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Shenzhen Reie intelligent technology Co., ltd  
Address of applicant: 401, 4F, NO.1 Building, Zhongkenuo Industry park,  
Hezhou development Zone, Xixiang Street, Bao'an  
District, Shenzhen City, China

Manufacturer: Shenzhen Reie intelligent technology Co., ltd  
Address of manufacturer: 401, 4F, NO.1 Building, Zhongkenuo Industry park,  
Hezhou development Zone, Xixiang Street, Bao'an  
District, Shenzhen City, China

General Description of EUT	
Product Name:	Remote Food Thermometer
Trade Name:	Riida
Model No.:	TM08
Adding Model(s):	TM01, TM02, TM03, TM04, TM05, TM06, TM07, TM09, TM10
Rated Voltage:	DC 3V
Power Adaptor :	/
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model TM08, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	433.92 MHz
Max. Field Strength:	78.04dBuV/m(3m)
Data Rate:	/
Modulation:	OOK
Antenna Type:	PCB Antenna
Antenna Gain:	0dBi
Lowest Internal Frequency:	32MHz

## 1.2 Test Standards

The following report is prepared on behalf of the Shenzhen Reie intelligent technology Co., ltd in accordance with FCC Part 15, Subpart C, and section 15.231, 15.203, 15.205 and 15.209 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.231, 15.203, 15.205 and 15.209 of the Federal Communication Commissions rules.

*Maintenance of compliance* is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

### **FCC – Registration No.: 125990**

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated at continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Transmitting	433.92MHz

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Transmission Time	Conducted	$\pm 5\%$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

## 2. SUMMARY OF TEST RESULTS

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§ 15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	N/A
§ 15.209	Radiated Spurious Emissions	Compliant
§15.231(e)	Deactivation Testing	Compliant
§15.231(e)	Radiated Emissions	Compliant
§15.231(c)	20dB Bandwidth Testing	Compliant

### **3. Antenna Requirement**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Test Result**

This product has a PCB antenna, fulfill the requirement of this section.



## 4. Radiated Emissions

---

### 4.1 Standard Applicable

According to §15.231(e), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emission (microvolts/meter)
40.66 - 40.70	1,000	100
70 - 130	500	50
130 - 174	500 to 1,500 **	50 to 150 **
174 - 260	1,500	150
260 - 470	1,500 to 5,000 **	150 to 500 **
Above 470	5,000	500

---

\*\* linear interpolations



The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

Compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.

## 4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.231(e) and FCC Part 15.209 Limit.

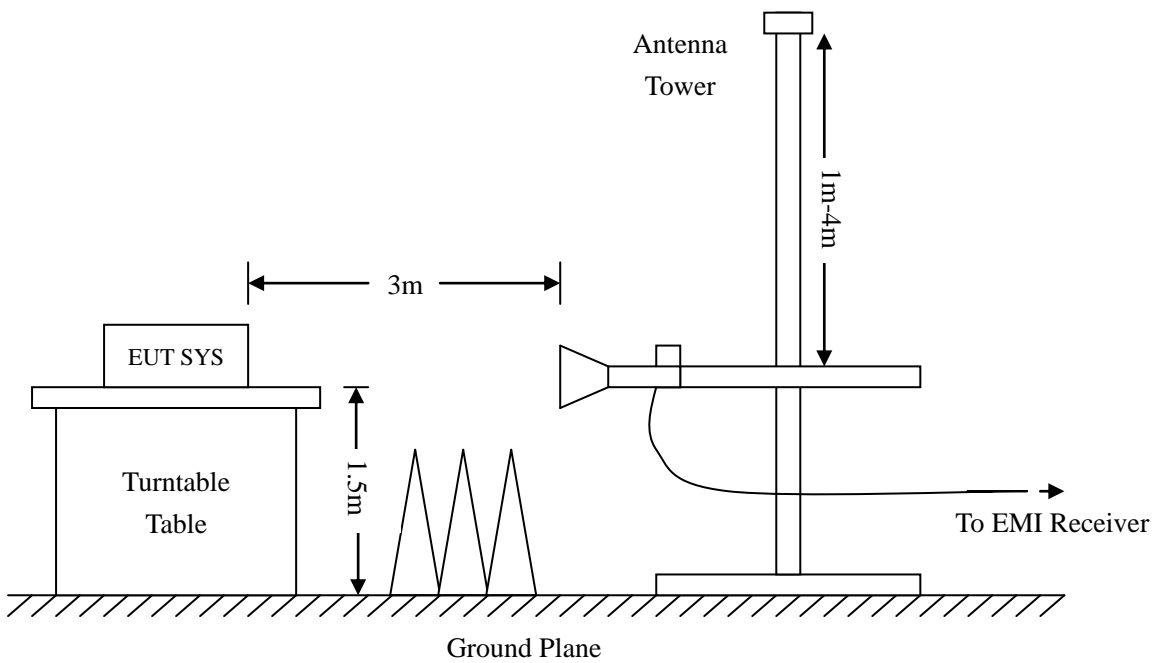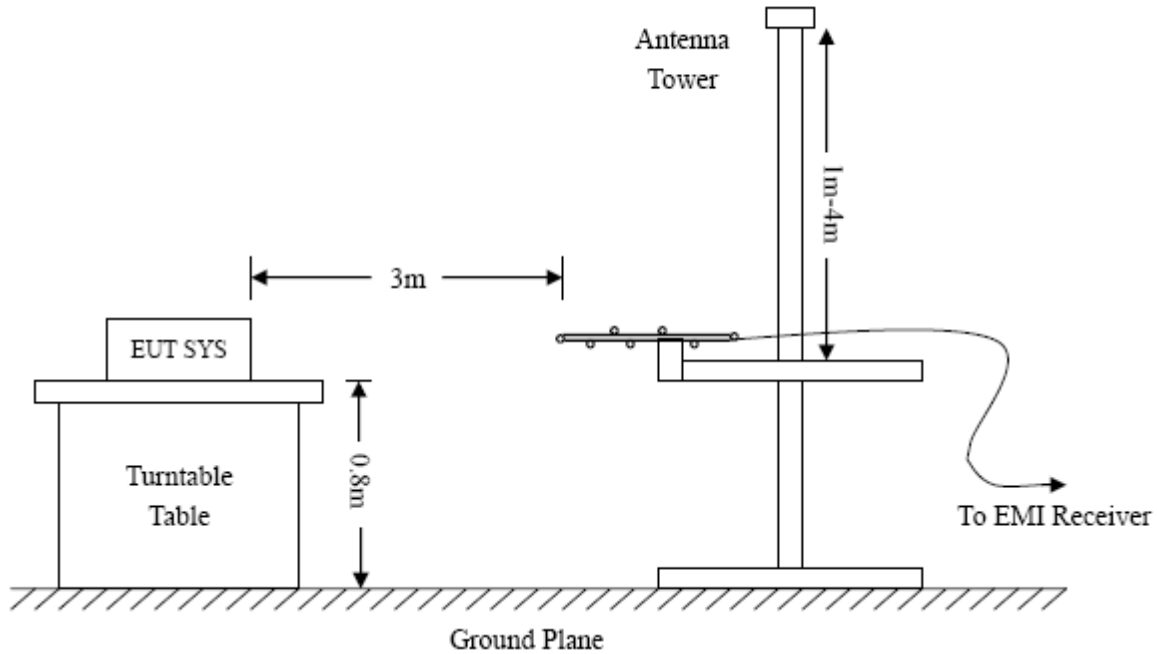

### 4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant.Loss} + \text{Cab. Loss} - \text{Ampl.Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

### 4.4 Environmental Conditions

Temperature:	21° C
Relative Humidity:	50%
ATM Pressure:	1011 mbar


### 4.5 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.231 standards, and had the worst margin of:

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

**Plot of Radiated Emissions Test Data**

EUT: *Remote Food Thermometer*  
 Tested Model: *TM08*  
 Operating Condition: *SRD Transmitting(433.92MHz)*  
 Comment: *DC 3V*  
 Test Specification: *Horizontal*

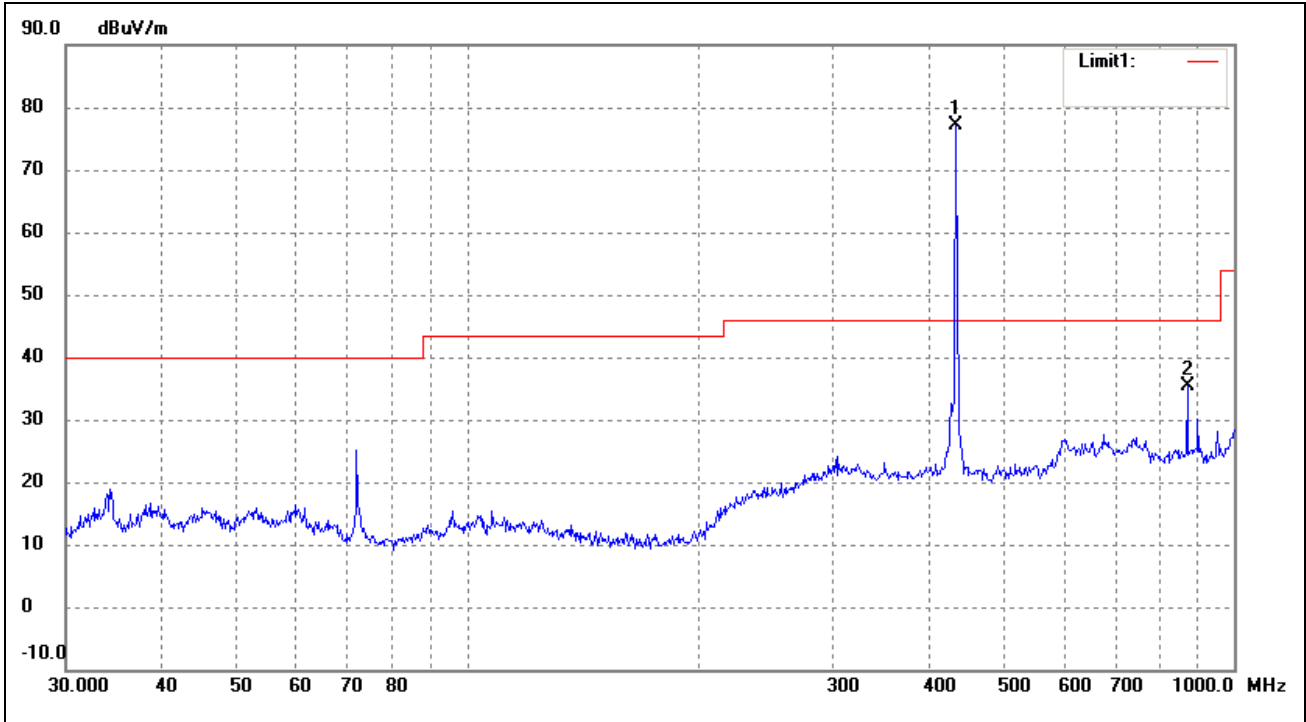


No.	Frequency MHz	Reading dBuV/m	Corr. Factor( dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin (dB)	Deg. ( ° )	Height (cm)	Remark
1	433.92	85.47	-8.24	N/A	77.23	92.87	-15.64	92	100	peak
	433.92	/	/	-6.42	70.81	72.87	-2.06	92	100	Ave
2	867.84	38.99	-3.63	N/A	35.36	74.00	-38.64	92	100	peak
	867.84	/	/	-6.42	28.94	54.00	-25.06	92	100	Ave

*Above 1GHz*

No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin dB	Deg. ( ° )	Height (cm)	Remark
1	1301.76	67.44	-8.44	N/A	59.00	74	-15.00	92	150	Peak
	1301.76	/	/	-6.42	52.58	54	-1.42	92	150	Ave
2	1735.68	51.56	-9.93	N/A	41.63	74	-32.37	92	150	Peak
	1735.68	/	/	-6.42	35.21	54	-18.79	92	150	Ave

Test Specification: Vertical

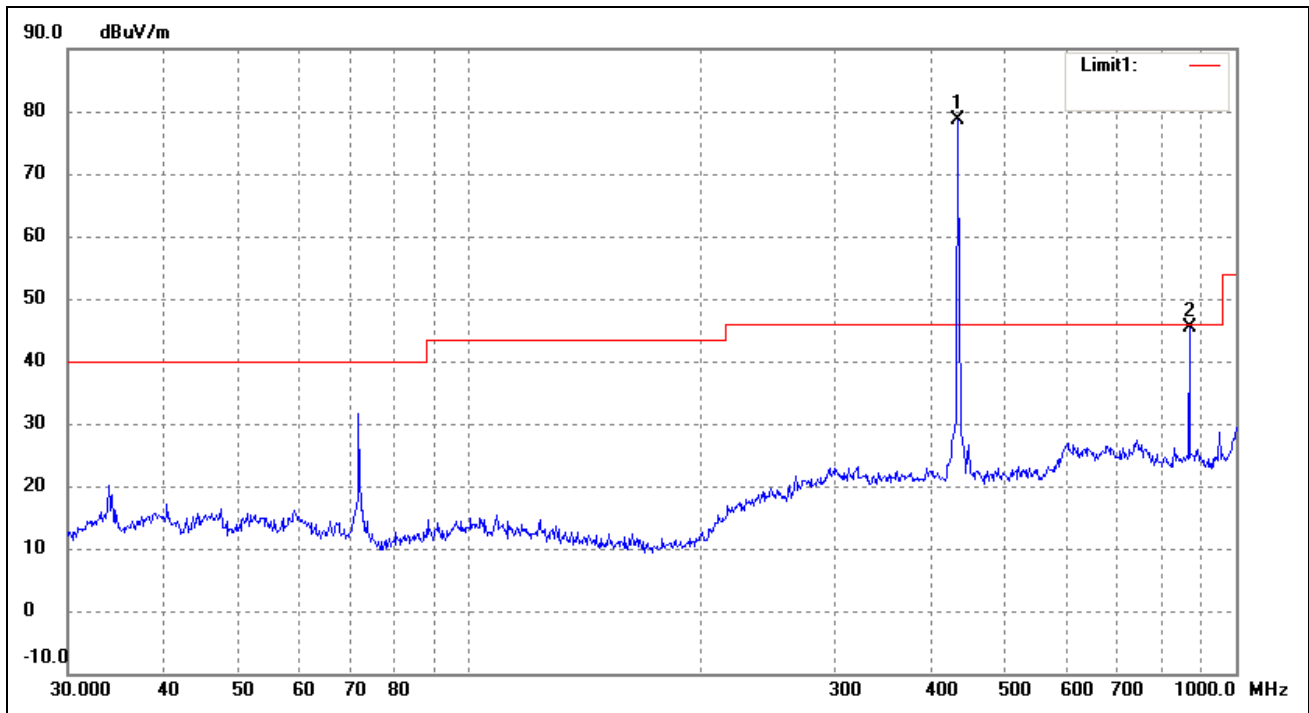

No.	Frequency MHz	Reading dBuV/m	Corr. Factor( dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin (dB)	Deg. ( ° )	Height (cm)	Remark
2	433.92	86.28	-8.24	N/A	78.04	92.87	-14.83	180	100	peak
	433.92	/	/	-6.42	71.62	72.87	-1.25	180	100	Ave
2	867.84	48.97	-3.63	N/A	45.34	74.00	-28.66	180	100	peak
	867.84	/	/	-6.42	38.92	54.00	-15.08	180	100	Ave

Above 1GHz

No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin dB	Deg. ( ° )	Height (cm)	Remark
1	1301.76	66.66	-8.44	N/A	58.22	74	-15.78	180	150	Peak
	1301.76	/	/	-6.42	51.80	54	-2.20	180	150	Ave
2	1735.68	54.51	-9.93	N/A	44.58	74	-29.42	180	100	Peak
	1735.68	/	/	-6.42	38.16	54	-15.84	180	100	Ave

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 4<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The fundamental frequency is 433.92MHz, so the fundamental and spurious emissions radiated limit base on the the operating frequency 433.92MHz.

## 6. 20dB Bandwidth

### 6.1 Standard Applicable

According to FCC Part 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### 6.1 Test Procedure

With the EUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna, which was connected to the spectrum analyzer with the START, and STOP frequencies set to the EUT's operation band.

### 6.2 Environmental Conditions

Temperature:	21° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

### 6.3 Summary of Test Results/Plots


Test Frequency MHz	20dB Bandwidth kHz	Limit kHz	Result
433.92	7.2	1084.8	Pass

Limit = Fundamental Frequency X 0.25% = 433.92 MHz X 0.25% = 1084 kHz

*Please refer to the attached plots.*

433.92MHz:

## 20dB Bandwidth Test Plot

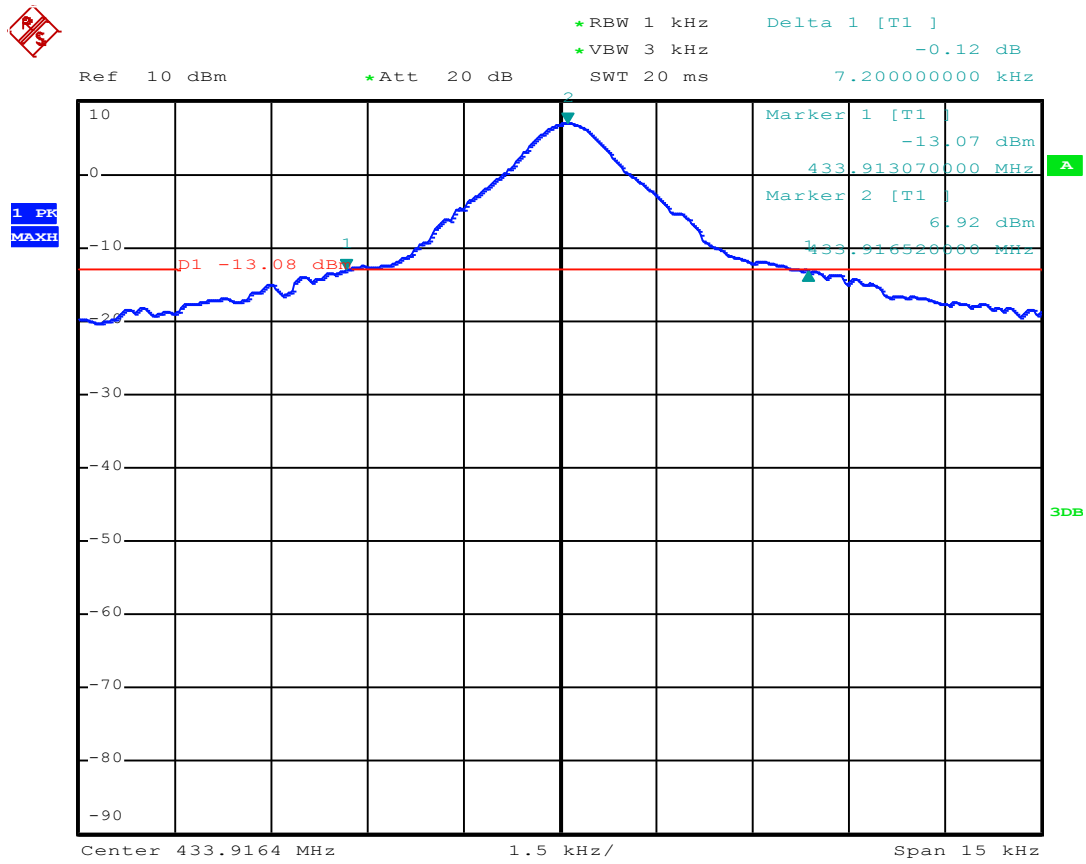

## 7. Transmission Time

### 7.1 Standard Applicable

According to FCC 15.231(e), devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

### 7.2 Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.92MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

### 7.3 Environmental Conditions



Temperature:	20° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

### 7.4 Summary of Test Results/Plots

Item	Measured Value	Limit	Result
Transmission Time	0.29s	<1s	Pass
Silent Time	11.0s	>10s	Pass
Silent Time/Transmission Time	37.93	<30	Pass

*Please refer to the attached plots.*



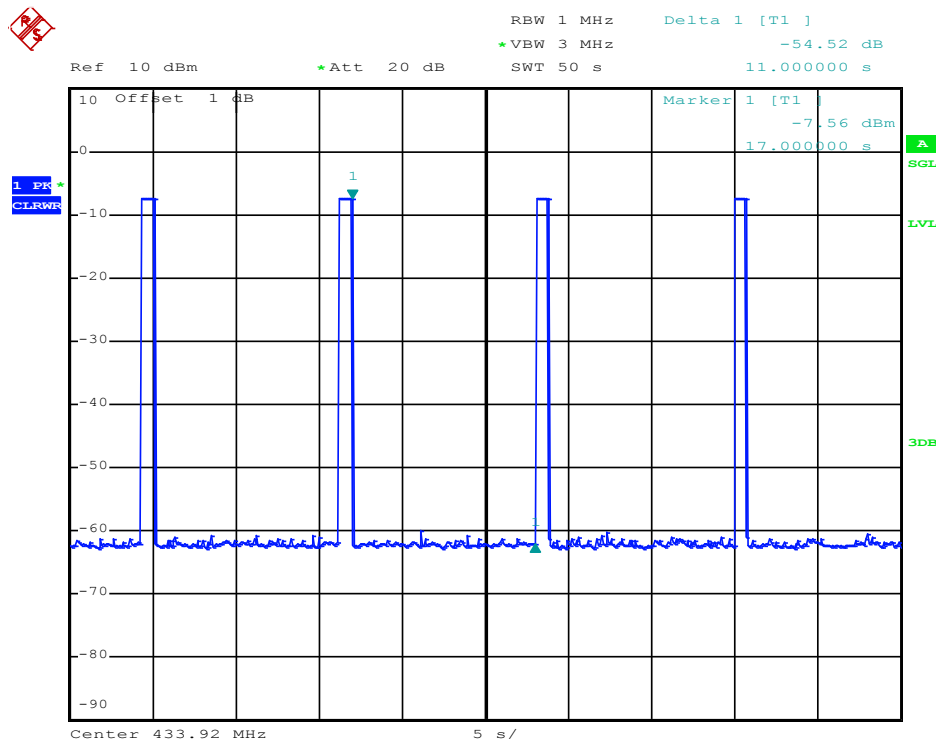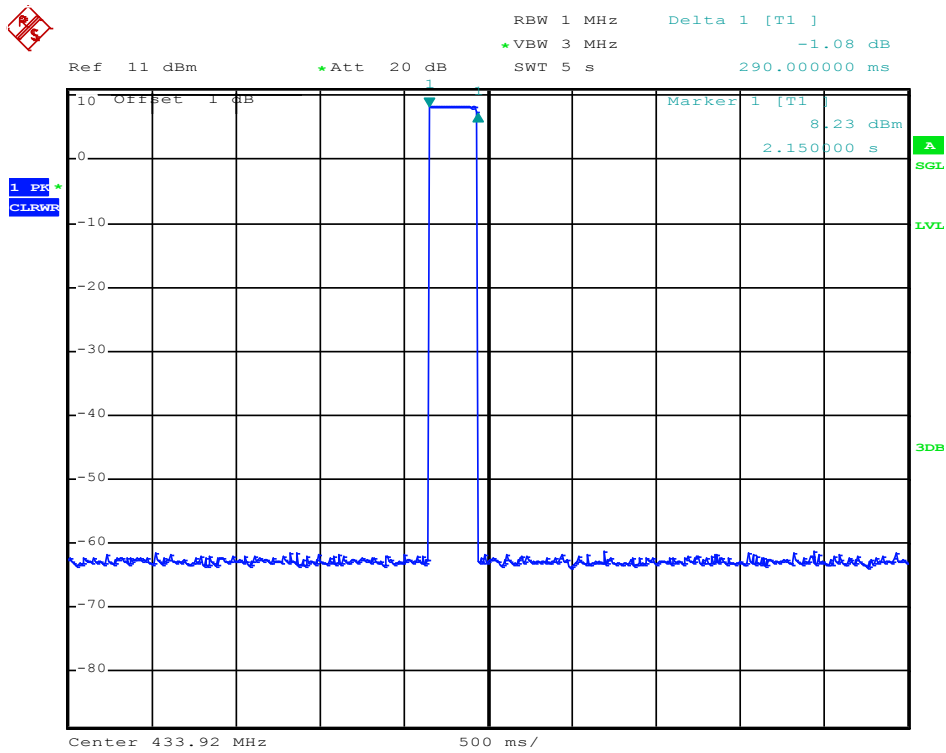

## 8. Duty Cycle

### 8.1 Standard Applicable

According to FCC Part 15.231 (b)(2) and 15.35 (c), For pulse operation transmitter, the averaging pulsed emissions are calculated by peak value of measured emission plus duty cycle factor.

### 8.2 Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.92MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

### 8.3 Environmental Conditions

Temperature:	20° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

### 8.4 Summary of Test Results/Plots



Type of Pulse	Width of Pulse ms	Quantity of Pulse	Transmission Time ms	Total Time (T <sub>on</sub> ) ms
Pulse 1 (Wide)	1.2	3	3.6	60.18
Pulse 2 (Narrow)	0.48	96	46.08	
Pulse 3 (Wider)	10.5	1	10.5	

Test Period (T <sub>p</sub> ) ms	Total Time (T <sub>on</sub> ) ms	Duty Cycle %	Duty Cycle Factor dB
126	60.18	47.76	-6.42



Remark: Duty Cycle Factor=20\*log(Duty Cycle)

Please refer to the attached test plots

### Width of Pulse

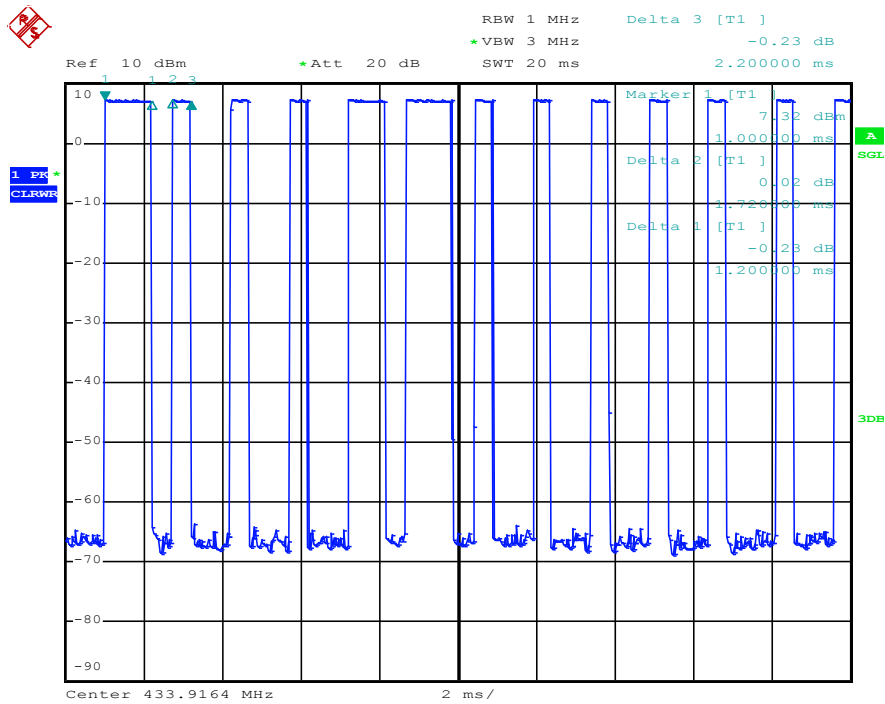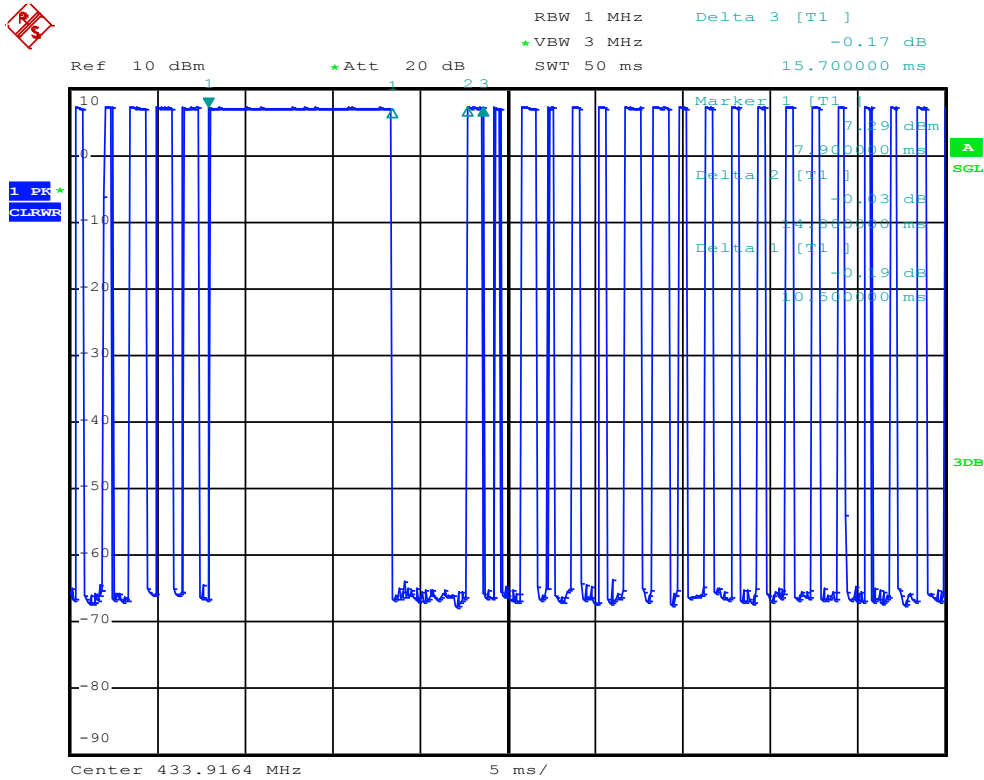

Period (Tp)

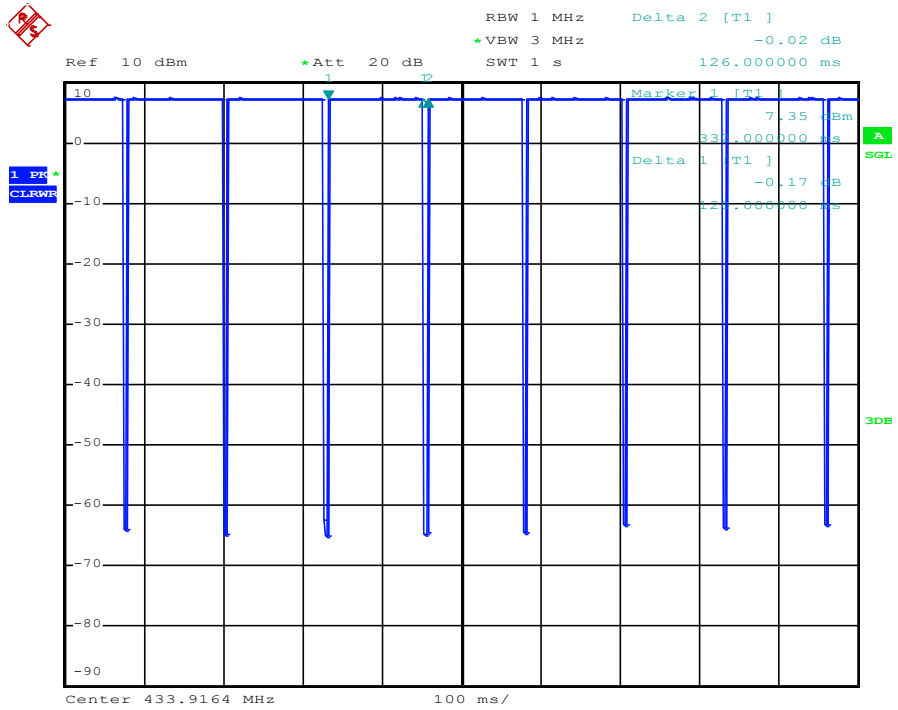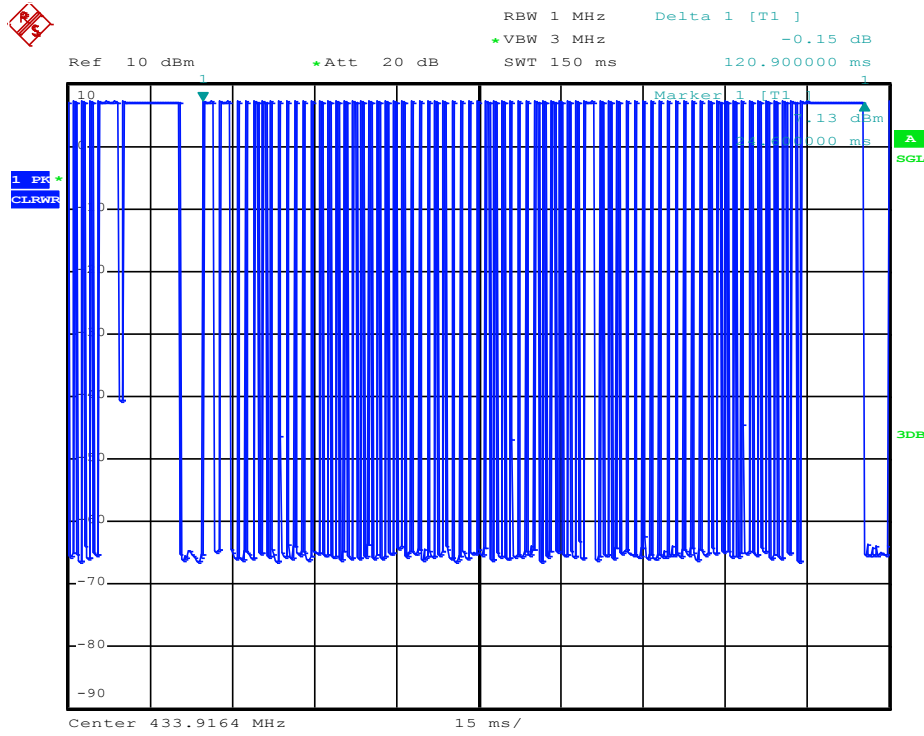

\*\*\*\*\* END OF REPORT \*\*\*\*\*